

1. APPLICABLE STANDARDS/SPECIFICATIONS:
ASME Y14.5-2009, DIMENSIONING AND TOLERANCING.
ASME Y14.38-1999, ABBREVIATIONS AND ACRONYMS.
APPLIED MATERIALS 0251-05096: INCH/MILLIMETER
CONVERSION PROCEDURE.

3. SEE PQC APPENDIX FOR PART QUALIFICATION AND QUALITY CONTROL REQUIREMENTS PER IQMS 04.4-01-11.

5. MANUFACTURE PER APPLIED MATERIALS 0250-20001.




 FIT PER ASME B4.1, CLASS LN2. BEFORE CLEANING.

9 FIT PER ASME B4.1, CLASS FN2. BEFORE CLEANING.


10 DIMENSIONS ARE TO THEORETICAL SHARP CORNERS.

12. COSMETIC PER APPLIED MATERIALS 0250-01019
APPENDIX F, CODE III-C.


14. PACKAGE PER APPLIED MATERIALS 0250-00098.

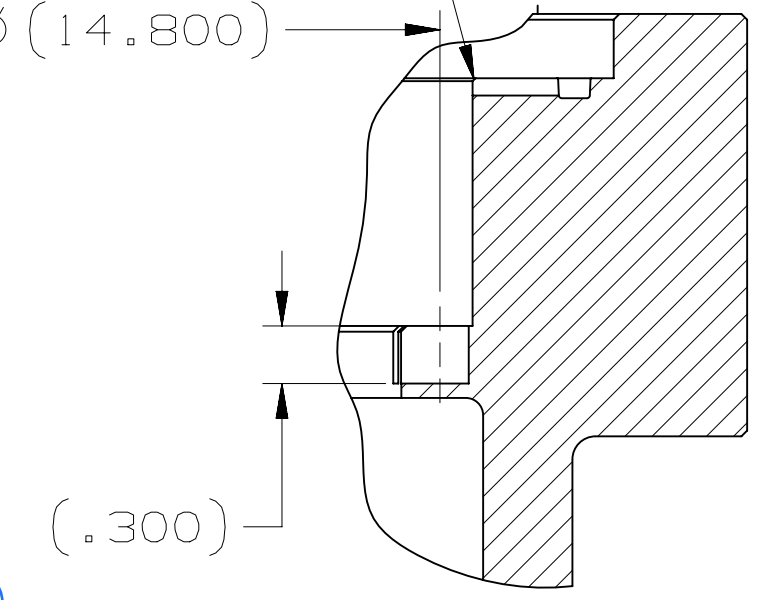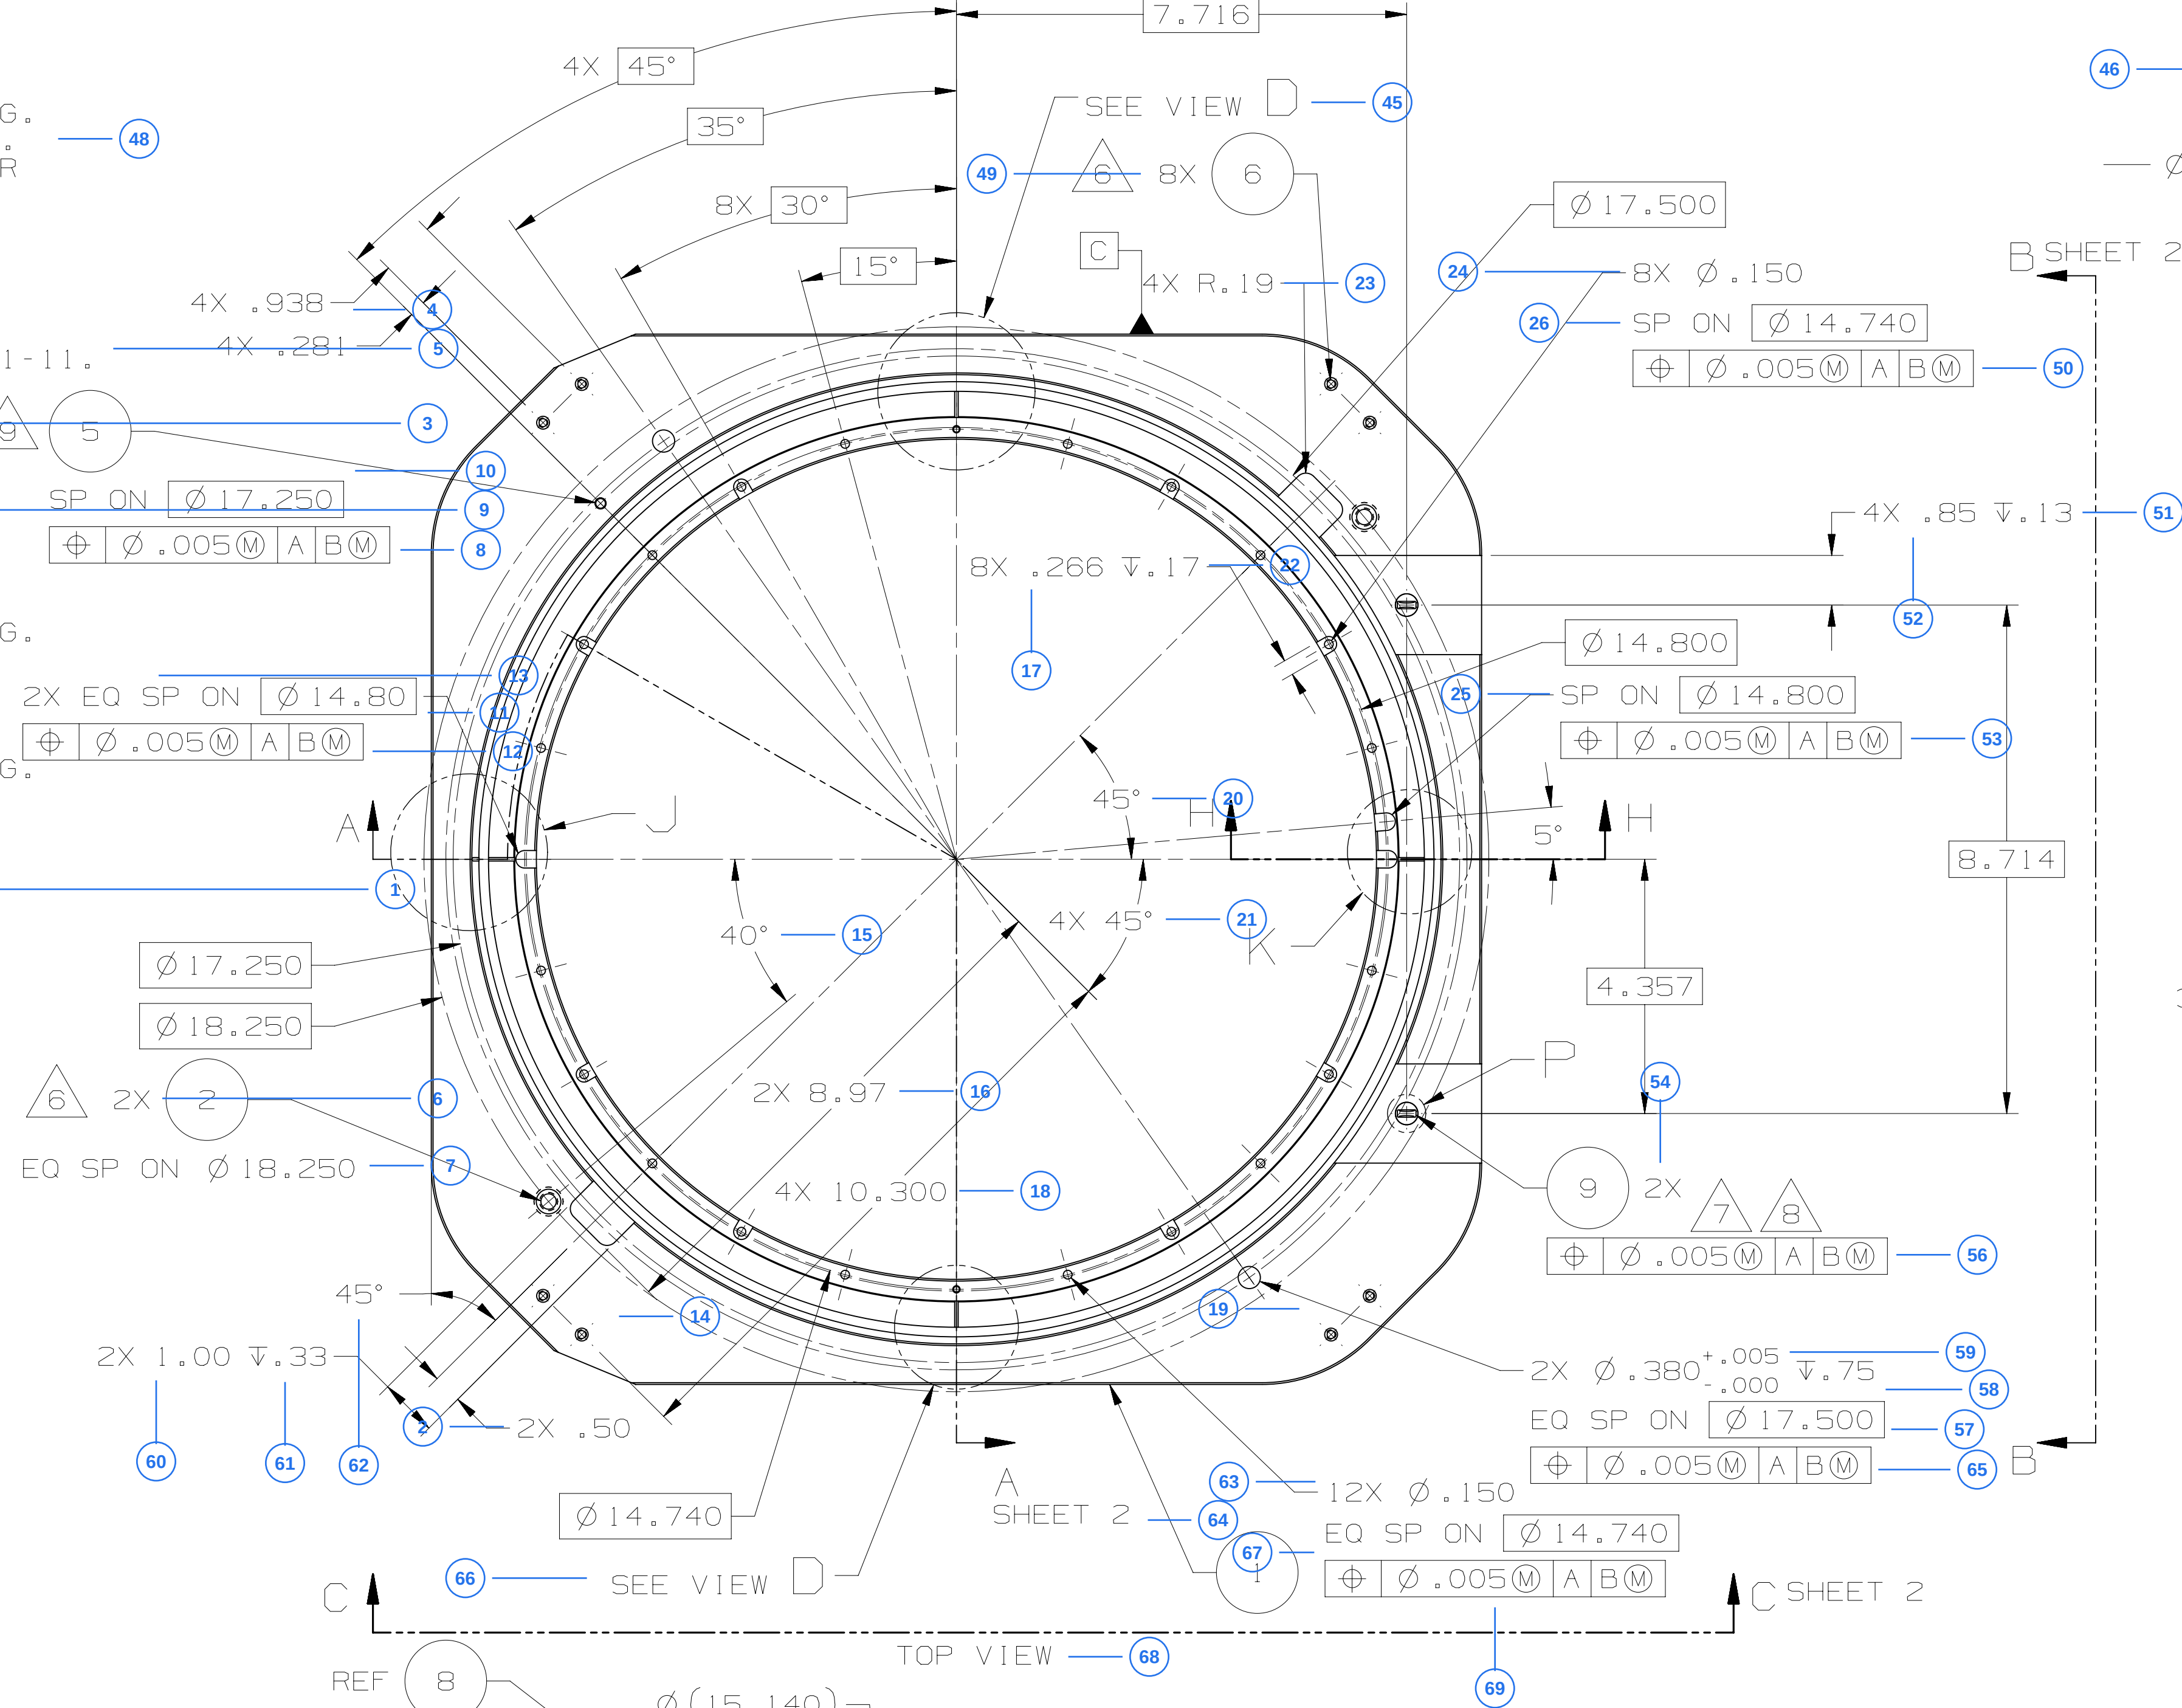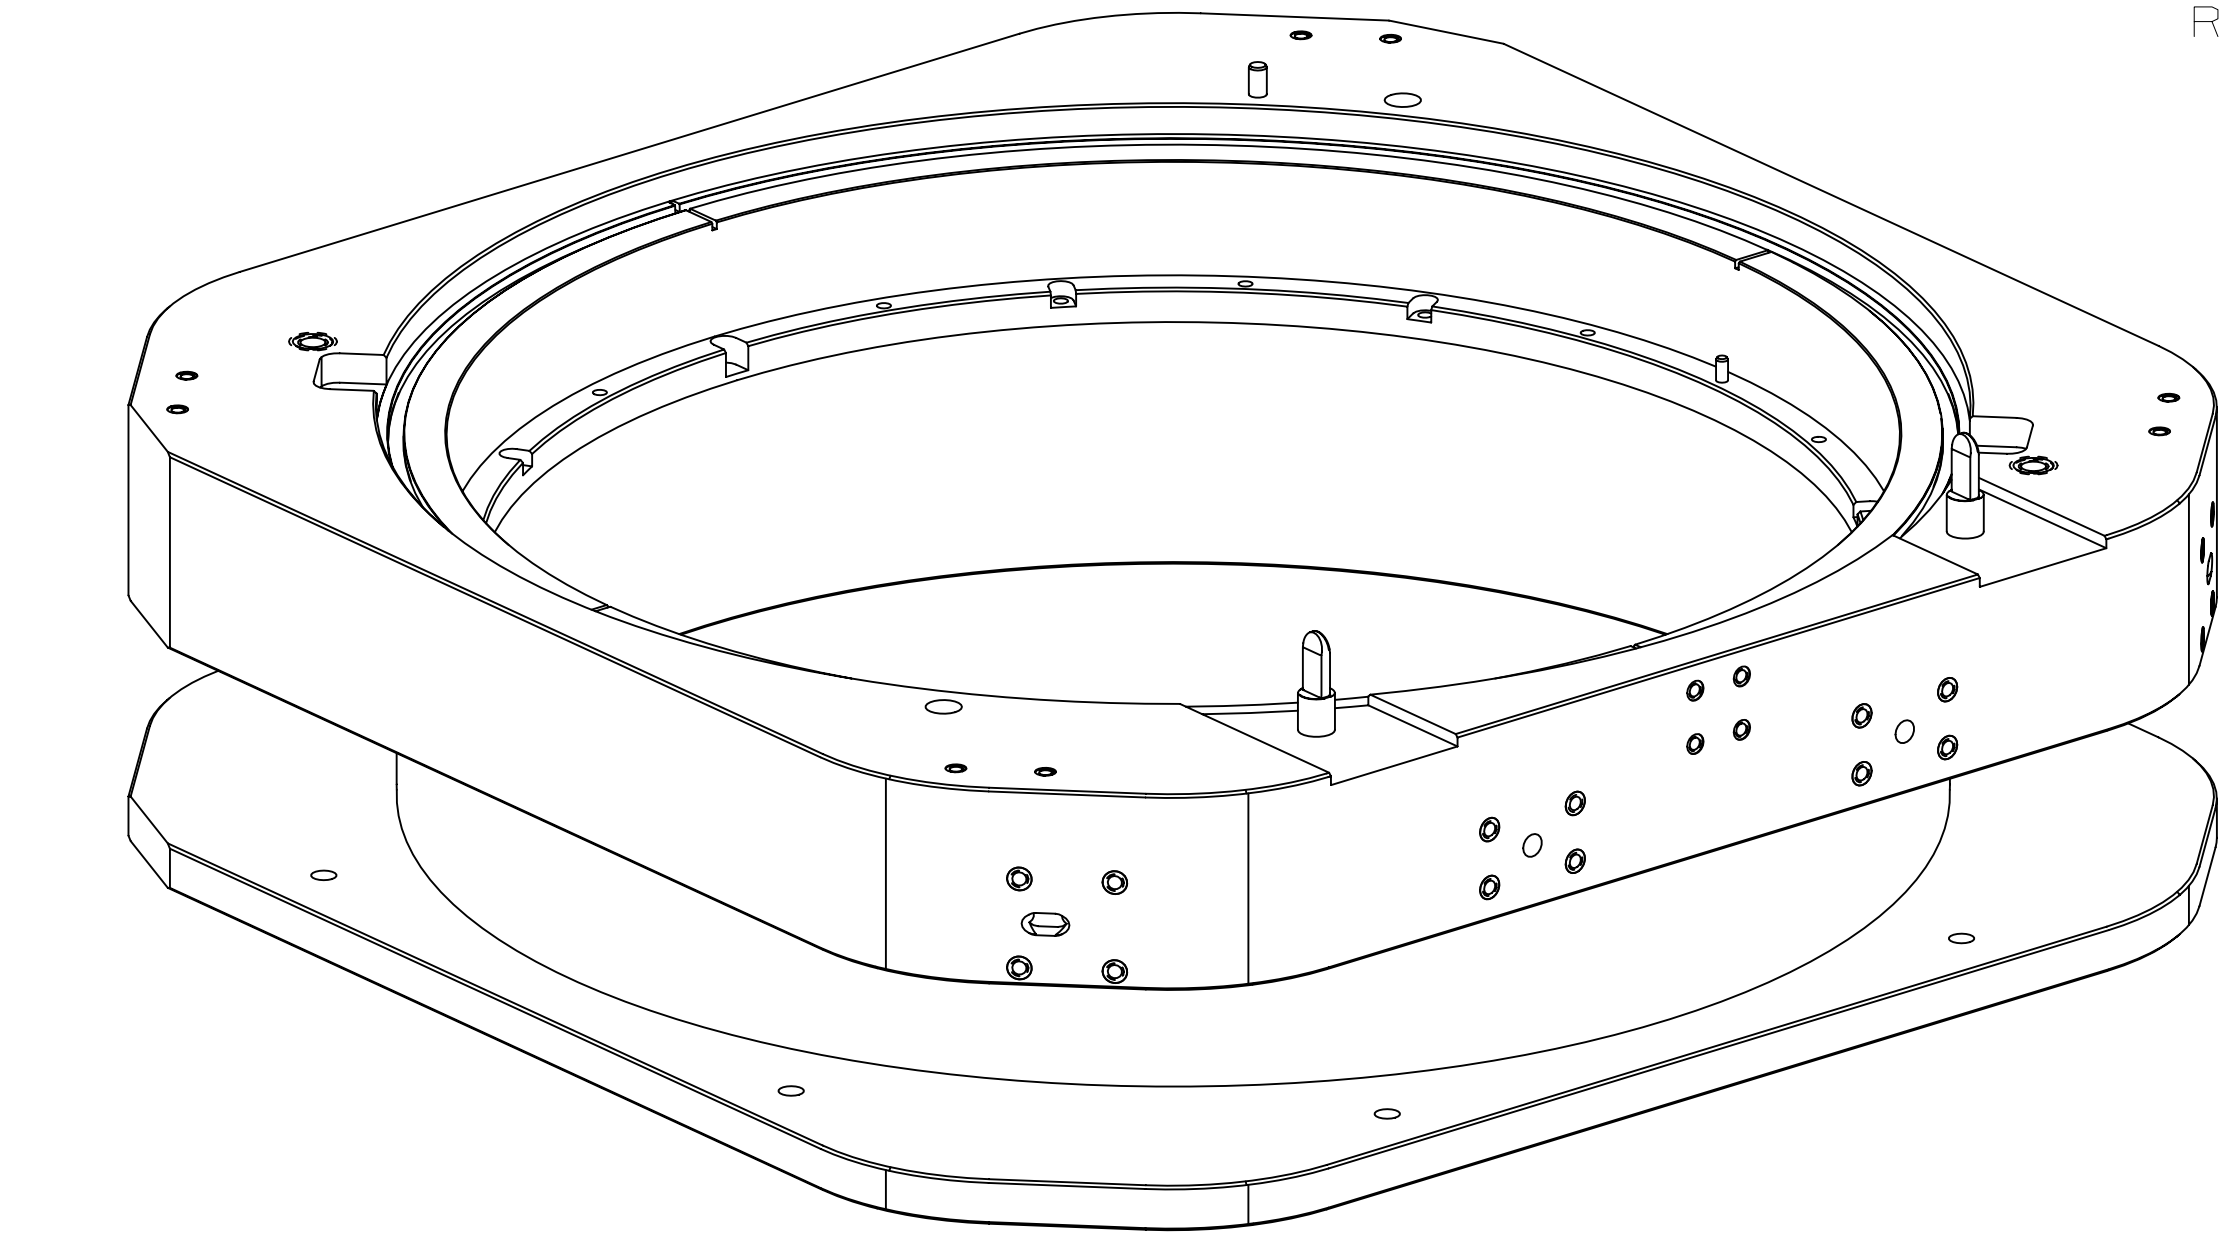

SECTION H-H

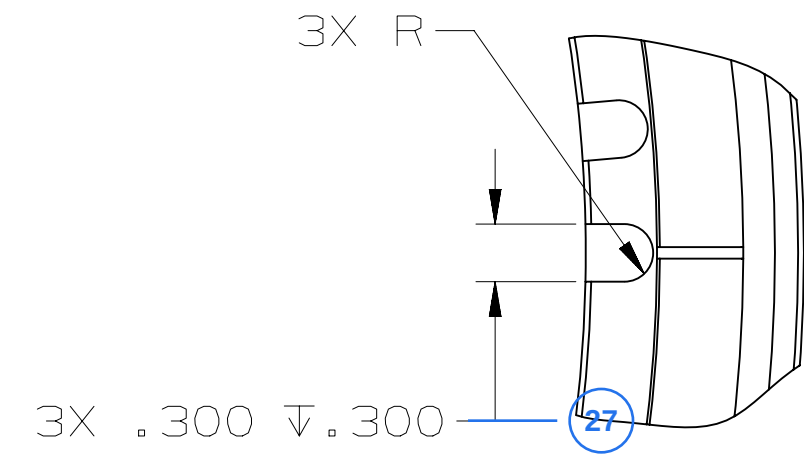

DETAIL K

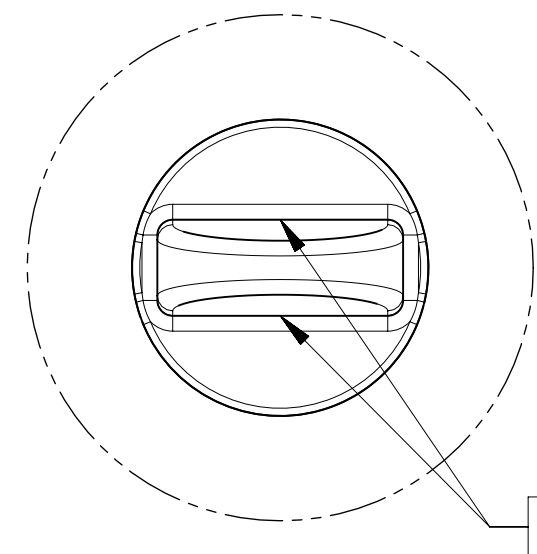






DETAIL P
2X

9	2		BRASS, PIN, DIA .386 X 1.50 IN, SILVER PLATED	(TC3-6201224)
8	2	3550-01081	PIN DOWEL 1/8DIA X 1/2L SST303	(TC1-0051702)
7	24	3410-00322	INSERT, HELICOIL 10-24 X .285LG, 304 SST	(TC3-0152090)
6	12	3410-00271	3410-00271 INSERT, HELICOIL, 8-32 X .246LG, 304 SST	(TC3-0141638)
5	1	3550-01292	PIN DOWEL 3/16DIA X 7/8L 303SST	(TC1-0051823)
4	2	3550-00591	DOWEL PIN .250D X .375L	(TC1-0519720)
3	2	3550-01002	PIN DOWEL 1/8 DIA X 3/8LG SST 303	(TC1-0051643)
2	2	3410-00280	INSR THD 5/16-18 INT X 1/2-13 EXT, .43LG SST NON LKG HD	(TC1-0255299)
1	1		MATERIAL PER 0250-32053	(TC3-6201256)
ITEM	QTY	PART NO.	DESCRIPTION	TcENG NO.

APPROVALS		DATE		TOLERANCES		 APPLIED MATERIALS® 3050 BOWERS AVE., SANTA CLARA, CA 95054	
DESIGNED BY	Kapilraja Sitharthan	15-Apr-2025	DECIMALS	ANGLES	SURFACES	TITLE ADAPTOR UPPER, SIP-CU 290MM, WATER COOLED, NEW SOURCE SUPPLY	
DRAWN BY	Kapilraja Sitharthan	15-Apr-2025	.XX ± .01	± .5°	63 		
REVISED BY	Kapilraja Sitharthan	23-Jun-2025	.XXX ± .005				
MFG ENGR	Mahadev Joshi	23-Jun-2025	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. REMOVE BURRS AND SHARP EDGES.				
CHECKED BY	Ashish Kumar	25-Jun-2025	WATERIAL			SIZE D PART NO. 0043-07547 REV 03 WEIGHT 37.57LB REF SHEET 1 OF 4 TCENG NO. TC3-6013748	
APPLIED MATERIALS CONFIDENTIAL: THIS DOCUMENT AND THE INFORMATION CONTAINED IN IT ARE CONFIDENTIAL, AND CANNOT BE COPIED OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF APPLIED MATERIALS INC.			SEE BOM				
			FINISH				
			SEE NOTES				

- 4X .06 $\pm$.09 (90° APART)
BETWEEN O-RING GROOVE ID
AND ϕ 15.140
DO NOT TOUCH BOTTOM
OF O-RING GROOVE



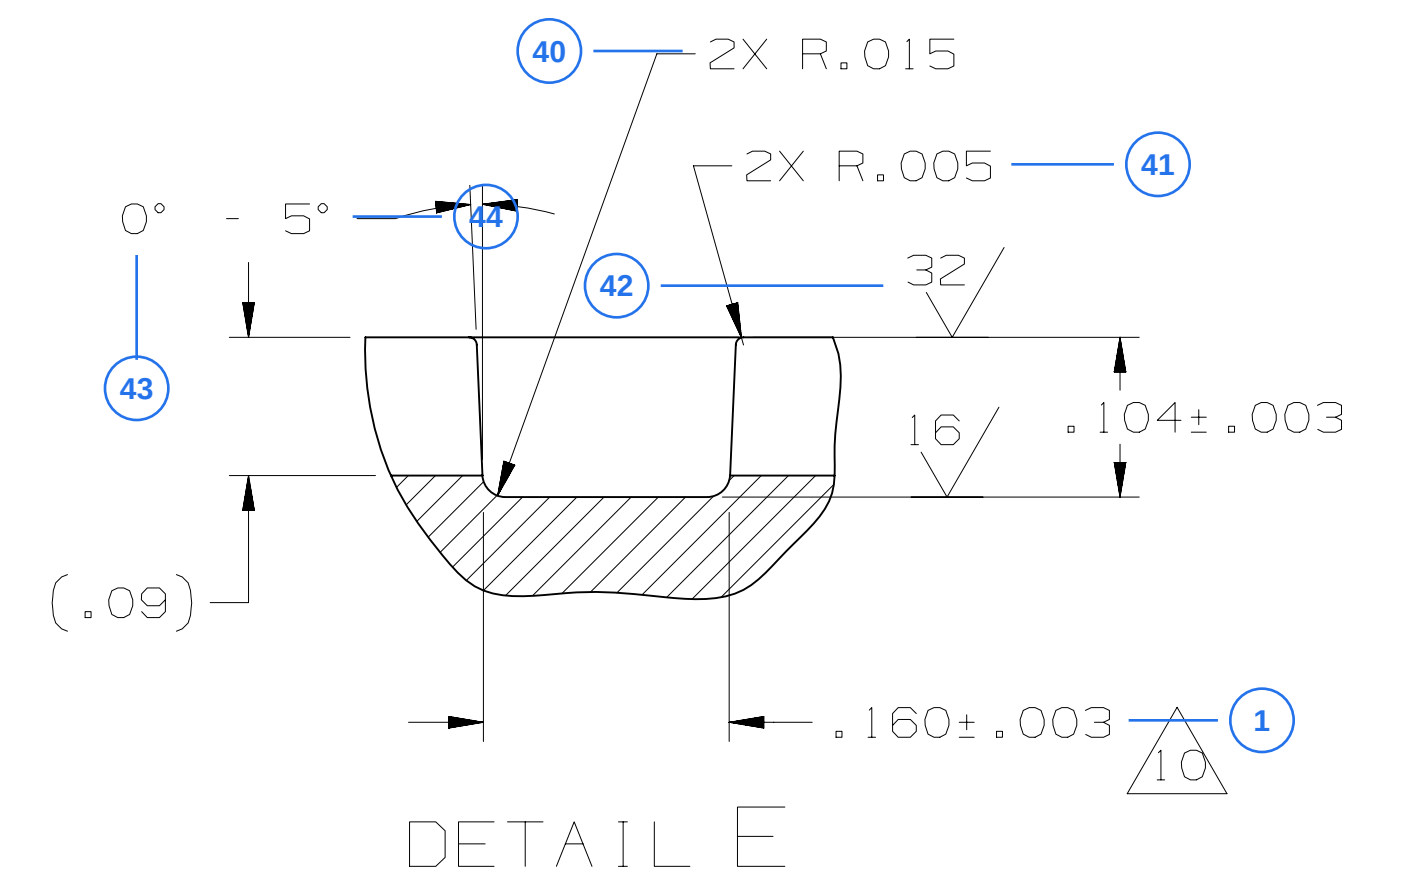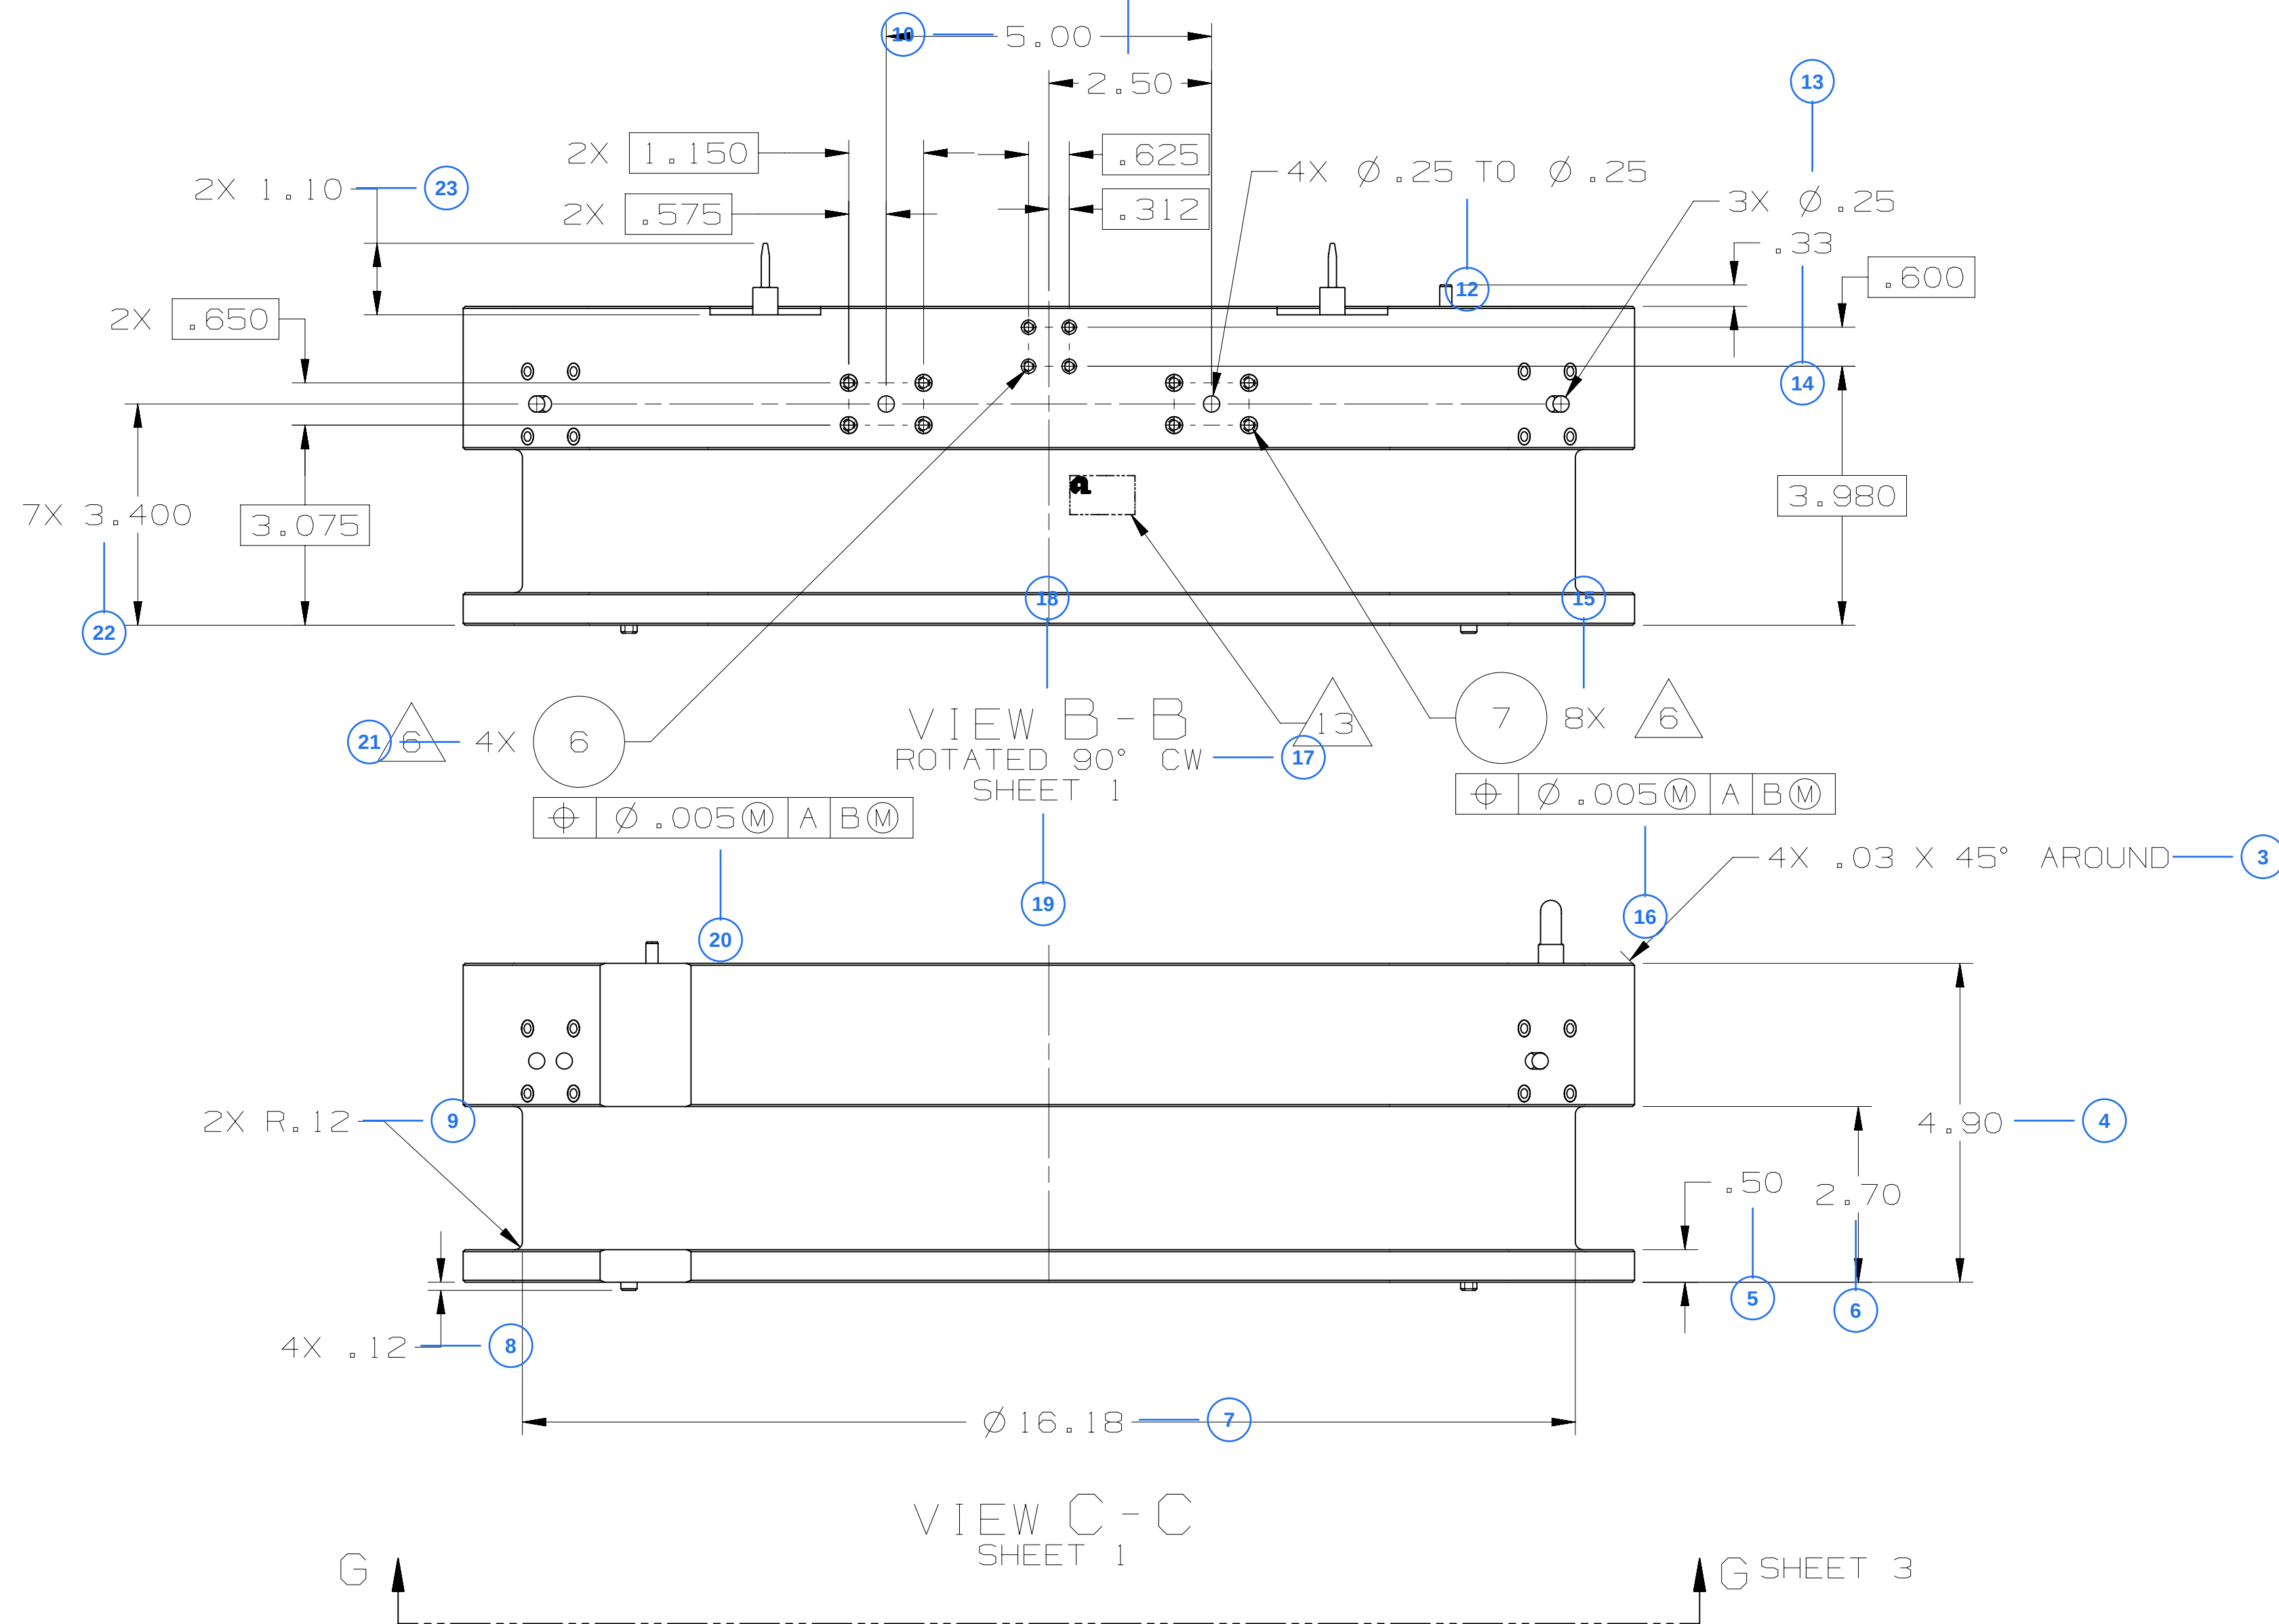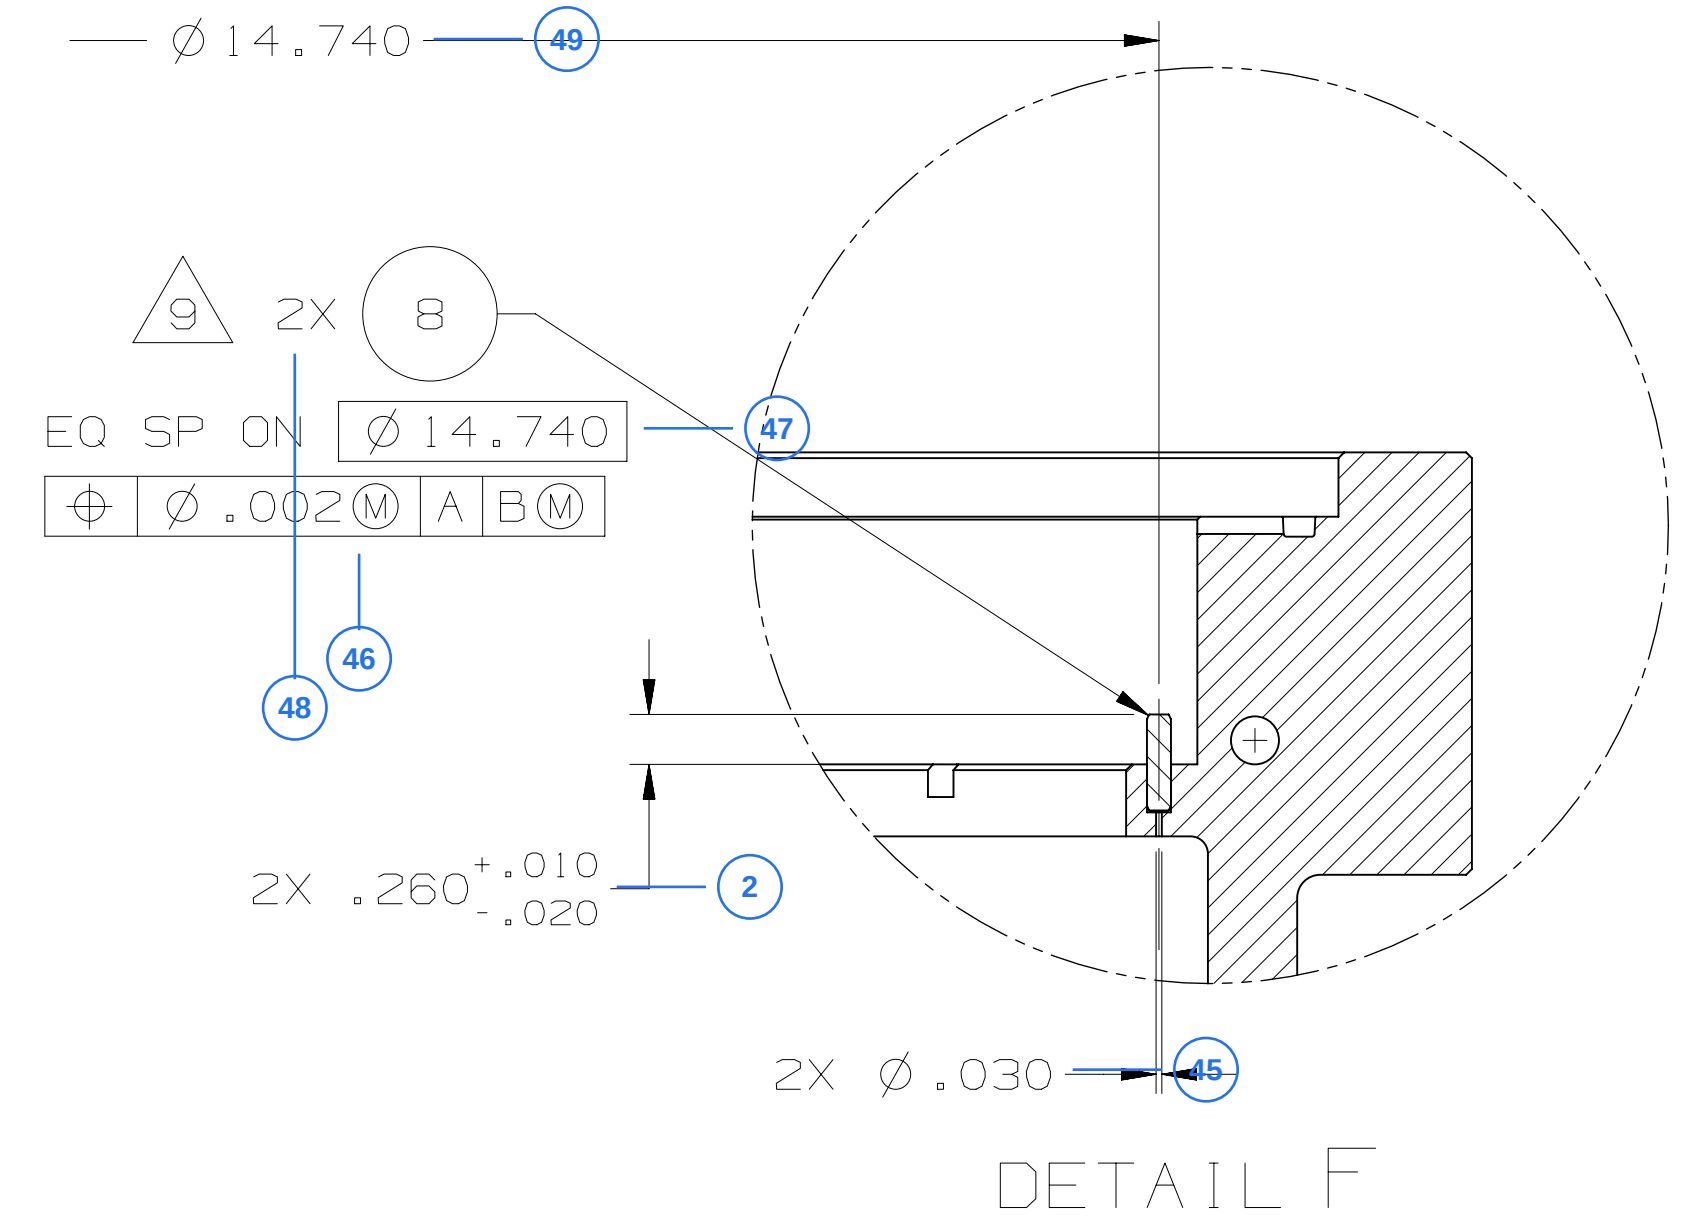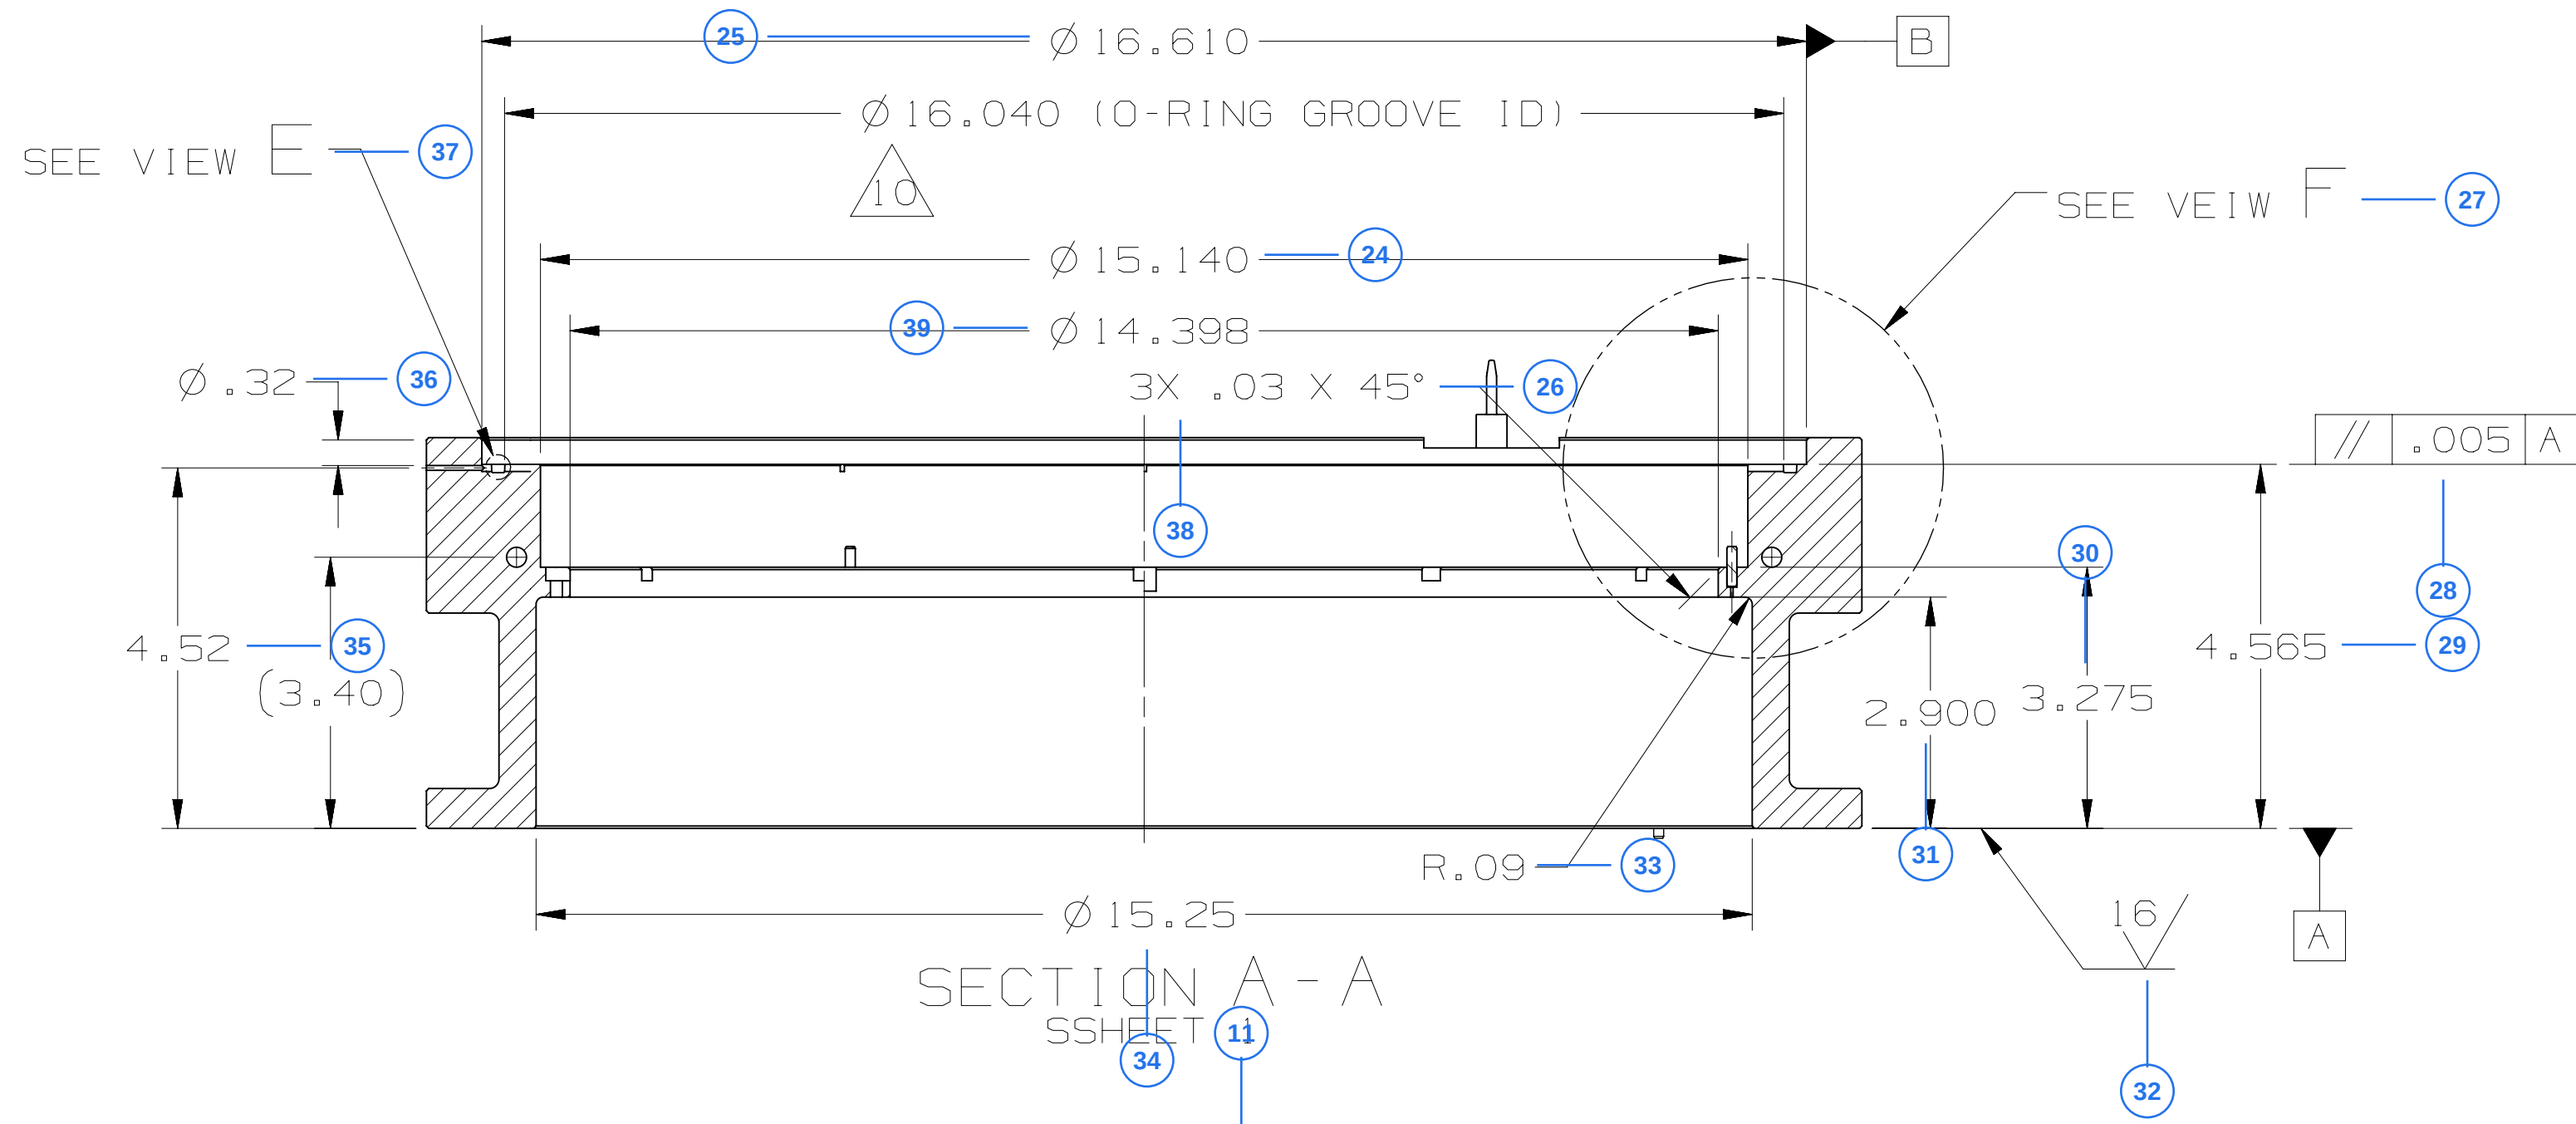


APPLIED MATERIALS®
3050 BOWERS AVE., SANTA CLARA, CA 95054


TITLE
ADAPTOR UPPER, SIP-CU
290MM, WATER COOLED,
NEW SOURCE SUPPLY

SIZE ☐ PART NO. 0043-07547 REV. 03
WEIGHT 37.57LB REF SHEET 2 OF 4
TCENG NO. TC3-6013748

APPLIED MATERIALS CONFIDENTIAL: THIS DOCUMENT AND THE INFORMATION CONTAINED IN IT ARE CONFIDENTIAL, AND CANNOT BE COPIED OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF APPLIED MATERIALS INC.

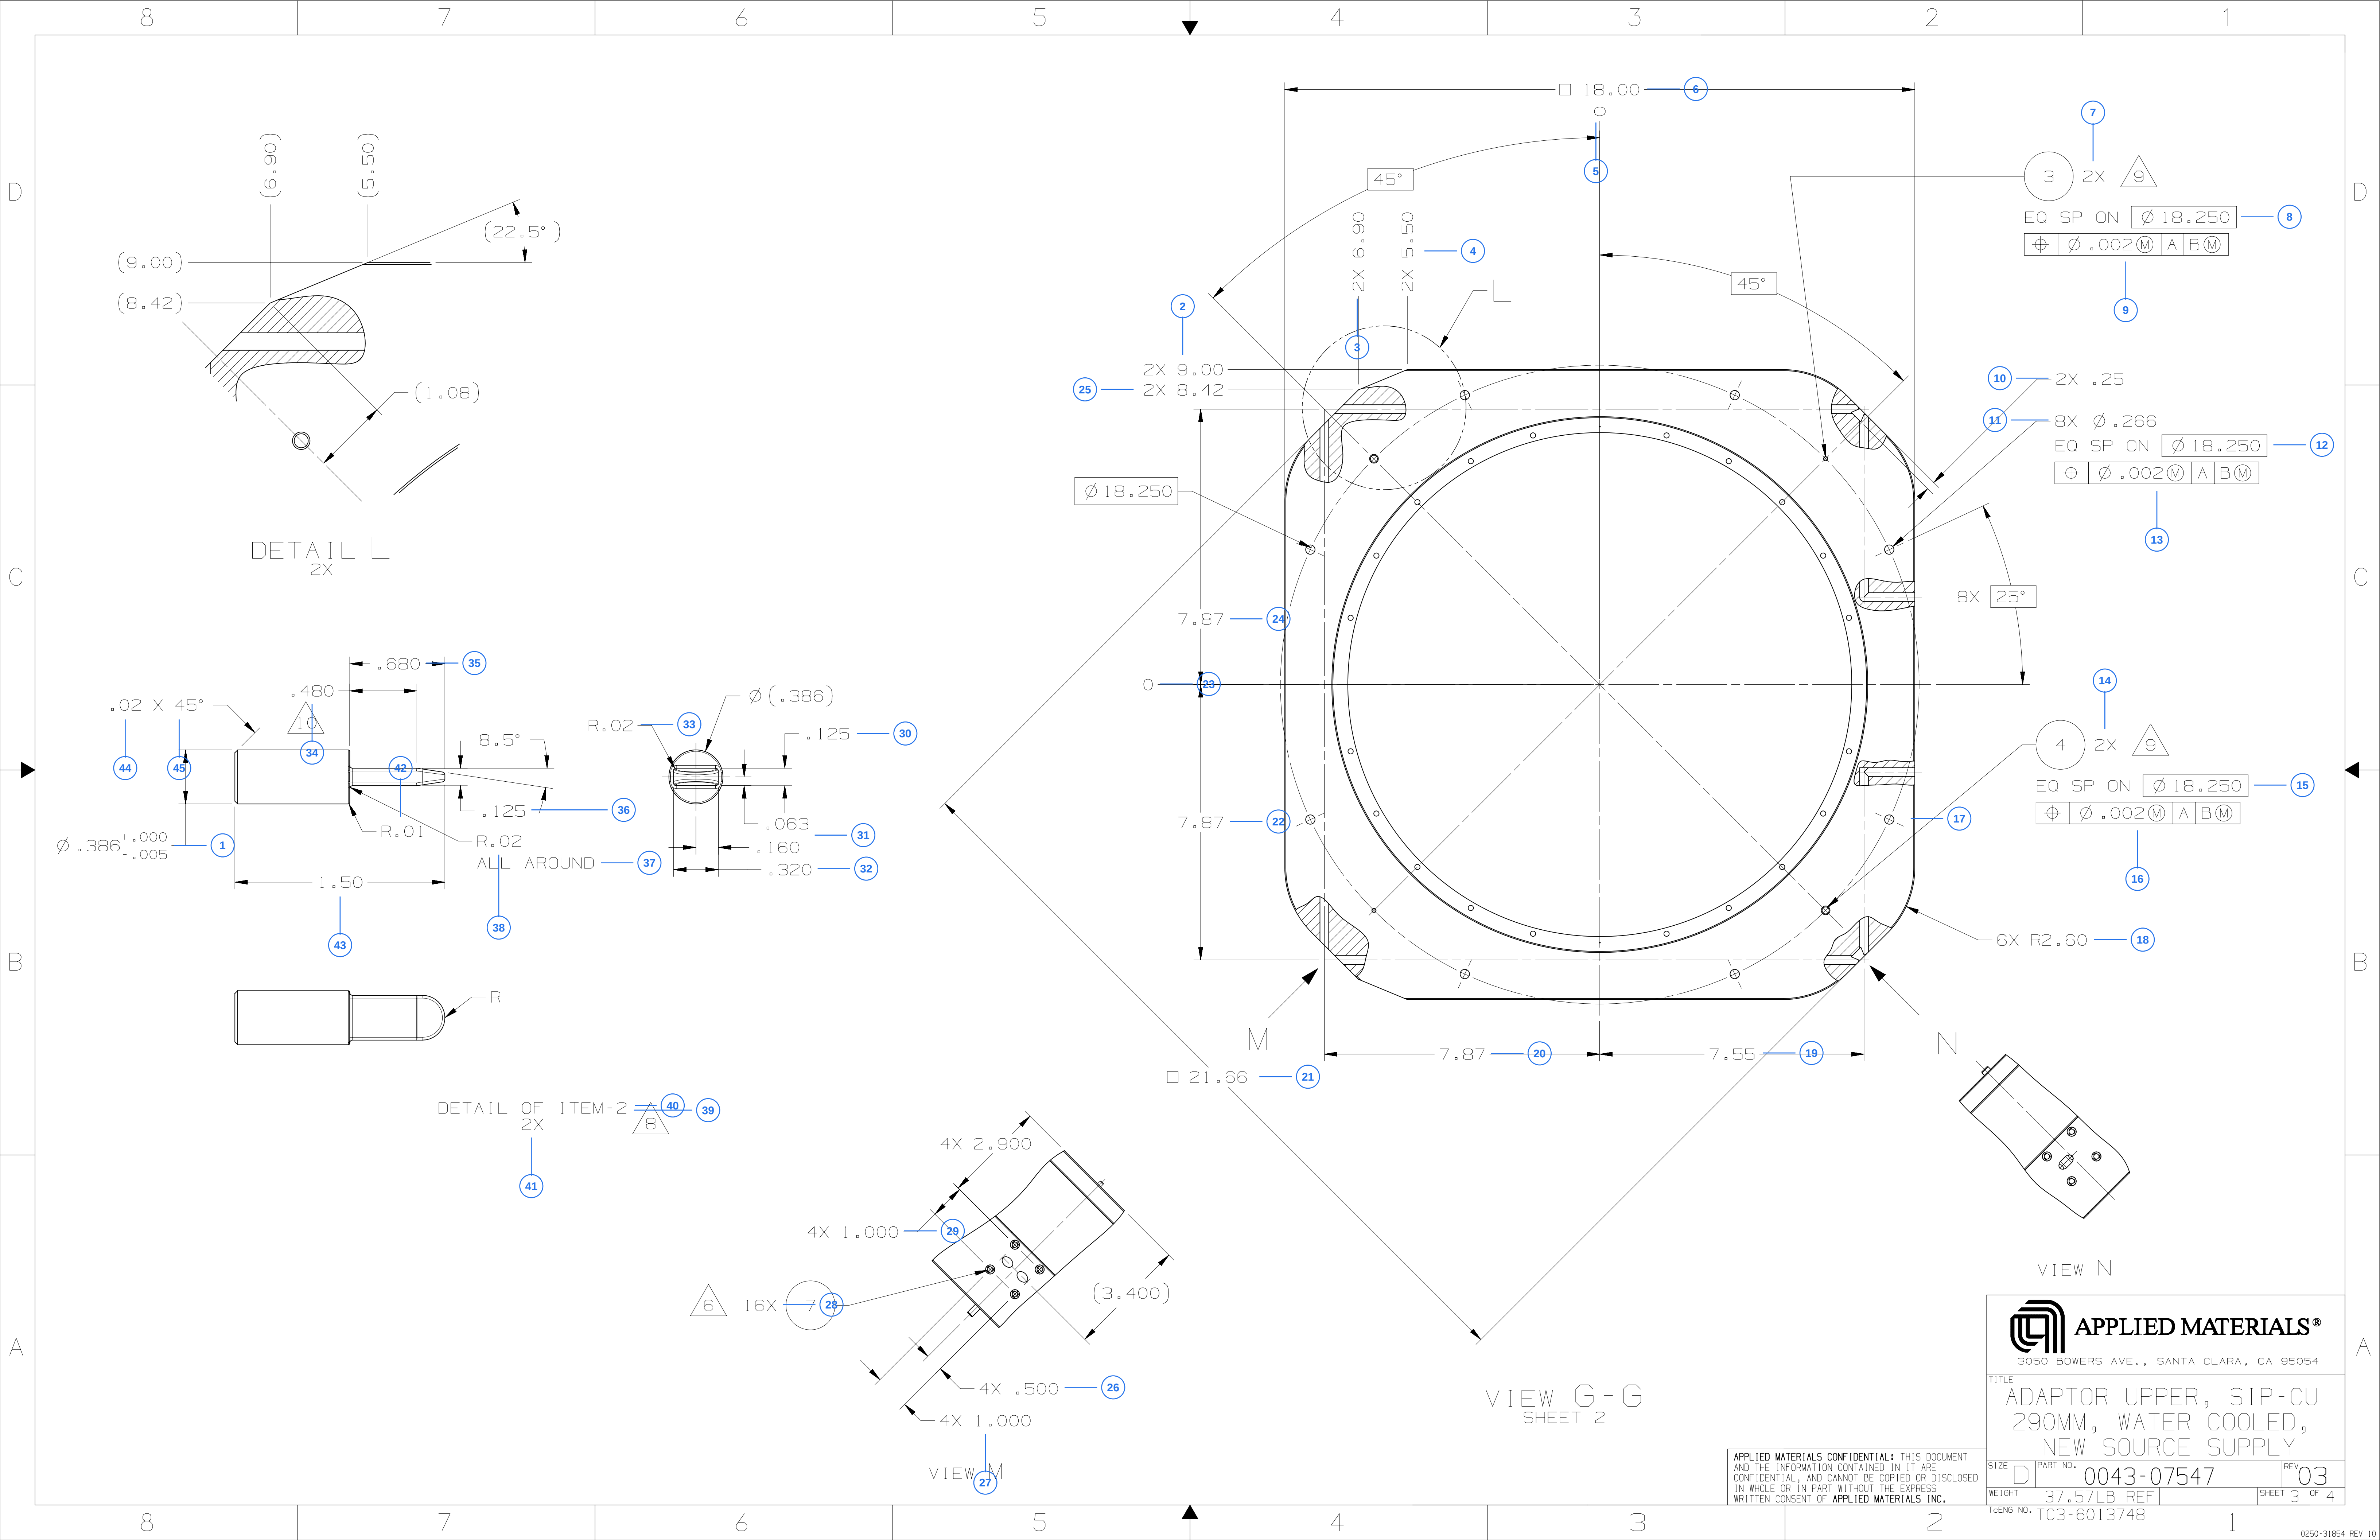

PRODUCT QUALITY REPORT

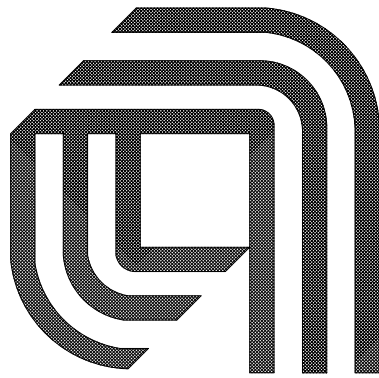

APPLIED MATERIALS®

SUPPLIER:	SERIAL NUMBER:
P.O. NUMBER:	LOT NUMBER:
WORK ORDER NUMBER:	LOT QUANTITY:

LOCATION	CHARACTERISTIC	SPECIFICATION	SPC	ACTUAL	COMMENTS	PASS	FAIL	INITIAL
SH2-D3	DIMENSION	Ø 14.740						
SH2-D3	NOTE	EQ SP ON Ø 14.740 9						
SH2-D3	GD&T	Φ Ø .002 M A B M 8						
SH2-D3	GD&T	// .005 A 7						
SH2-C4	SURFACE FINISH	16/ 6						
SH2-C4	DIMENSION	.33 5						
SH1-C8	NOTE 8	4 ITEM 9 FINISH						
SH1-C8	NOTE 11	CLEAN SPECIFICATION 3						
SH1-B1	GD&T	2 // .005 C						
SH1-B3	GD&T	Φ Ø .005 M A B M 1						

NOTE: EVERY CHARACTERISTIC SHALL BE MEASURED AND RECORDED FOR EACH INSPECTED PART, UNLESS OTHERWISE SPECIFIED. CHARACTERISTICS WHICH REQUIRE REAL-TIME SPC ARE IDENTIFIED BY A CHECK MARK(✓) IN THE SPC COLUMN, REFERENCE SPECIFICATION 0250-36352 Critical Part Compliance and Product Quality Report Requirements. FOR DATA COLLECTION AND REPORTING REQUIREMENTS, AND ADDITIONAL DETAILS.



TITLE
ADAPTOR UPPER, SIP-CU
290MM, WATER COOLED,
NEW SOURCE SUPPLY

APPLIED MATERIALS CONFIDENTIAL: THIS DOCUMENT AND THE INFORMATION CONTAINED IN IT ARE CONFIDENTIAL, AND CANNOT BE COPIED OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF APPLIED MATERIALS INC.

SIZE	D	PART NO.	0043-07547	REV	03
WEIGHT	37.57LB REF			SHEET 4 OF 4	
TCENG NO. TC3-6013748					

PART QUALIFICATION & QUALITY CONTROLS (PQC) TABLE

PART NUMBER:0043-07547

REV:03

CLASSIFICATION: NON-CRITICAL

PART DESCRIPTION: ADAPTOR UPPER, SIP-CU 290MM, WATER COOLED, NEW SOURCE SUPPLY

QUALIFICATION REQUIREMENTS	REQ.
FAI: FIRST ARTICLE INSPECTION	YES
PPI: PART TO PRINT METROLOGY INSP.	NO
CRAMS: COMPONENT RELIABILITY, AVAILABILITY, MAINTAINABILITY AND SAFETY TESTING	NO
PQP-D: PART QUALIFICATION PROCESS (DOCUMENTATION)	NO

REFERENCE APPLIED MATERIALS SPECIFICATION 04.4-01-11
FOR PROCEDURES RELATED TO INDICATED REQUIREMENTS

UNLESS SPECIFIED BY AN APPLIED MATERIALS REPRESENTATIVE,
ALL PQC CONTROLS SPECIFIED AS 'YES' REQUIRE COMPLETION
ONLY WHILE AT EVAL, NSR_CES, OR PRODUCTION STATUS

QUALITY CONTROL REQUIREMENTS	REQ.
SL: SUPPLIER LOCK	NO
PQP-V: PART QUALIFICATION PROCESS (VALIDATION)	NO
COC: CERTIFICATE OF COMPLIANCE	NO
PQR: PRODUCT QUALITY REPORT	YES
SPC: STATISTICAL PROCESS CONTROL	NO
SNT: SERIAL NUMBER TRACKING	NO
FRD: FUNCTIONAL REQUIREMENT DOCUMENT	NO
VSC: VIRUS SCAN CERTIFICATE	NO

REQUIREMENTS LEGEND:
YES - REQUIRED
NO - NOT REQUIRED



PQC APPENDIX

APPLIED MATERIALS CONFIDENTIAL: THIS DOCUMENT
AND THE INFORMATION CONTAINED IN IT ARE
CONFIDENTIAL, AND CANNOT BE COPIED OR DISCLOSED
IN WHOLE OR IN PART WITHOUT THE EXPRESS
WRITTEN CONSENT OF APPLIED MATERIALS INC.