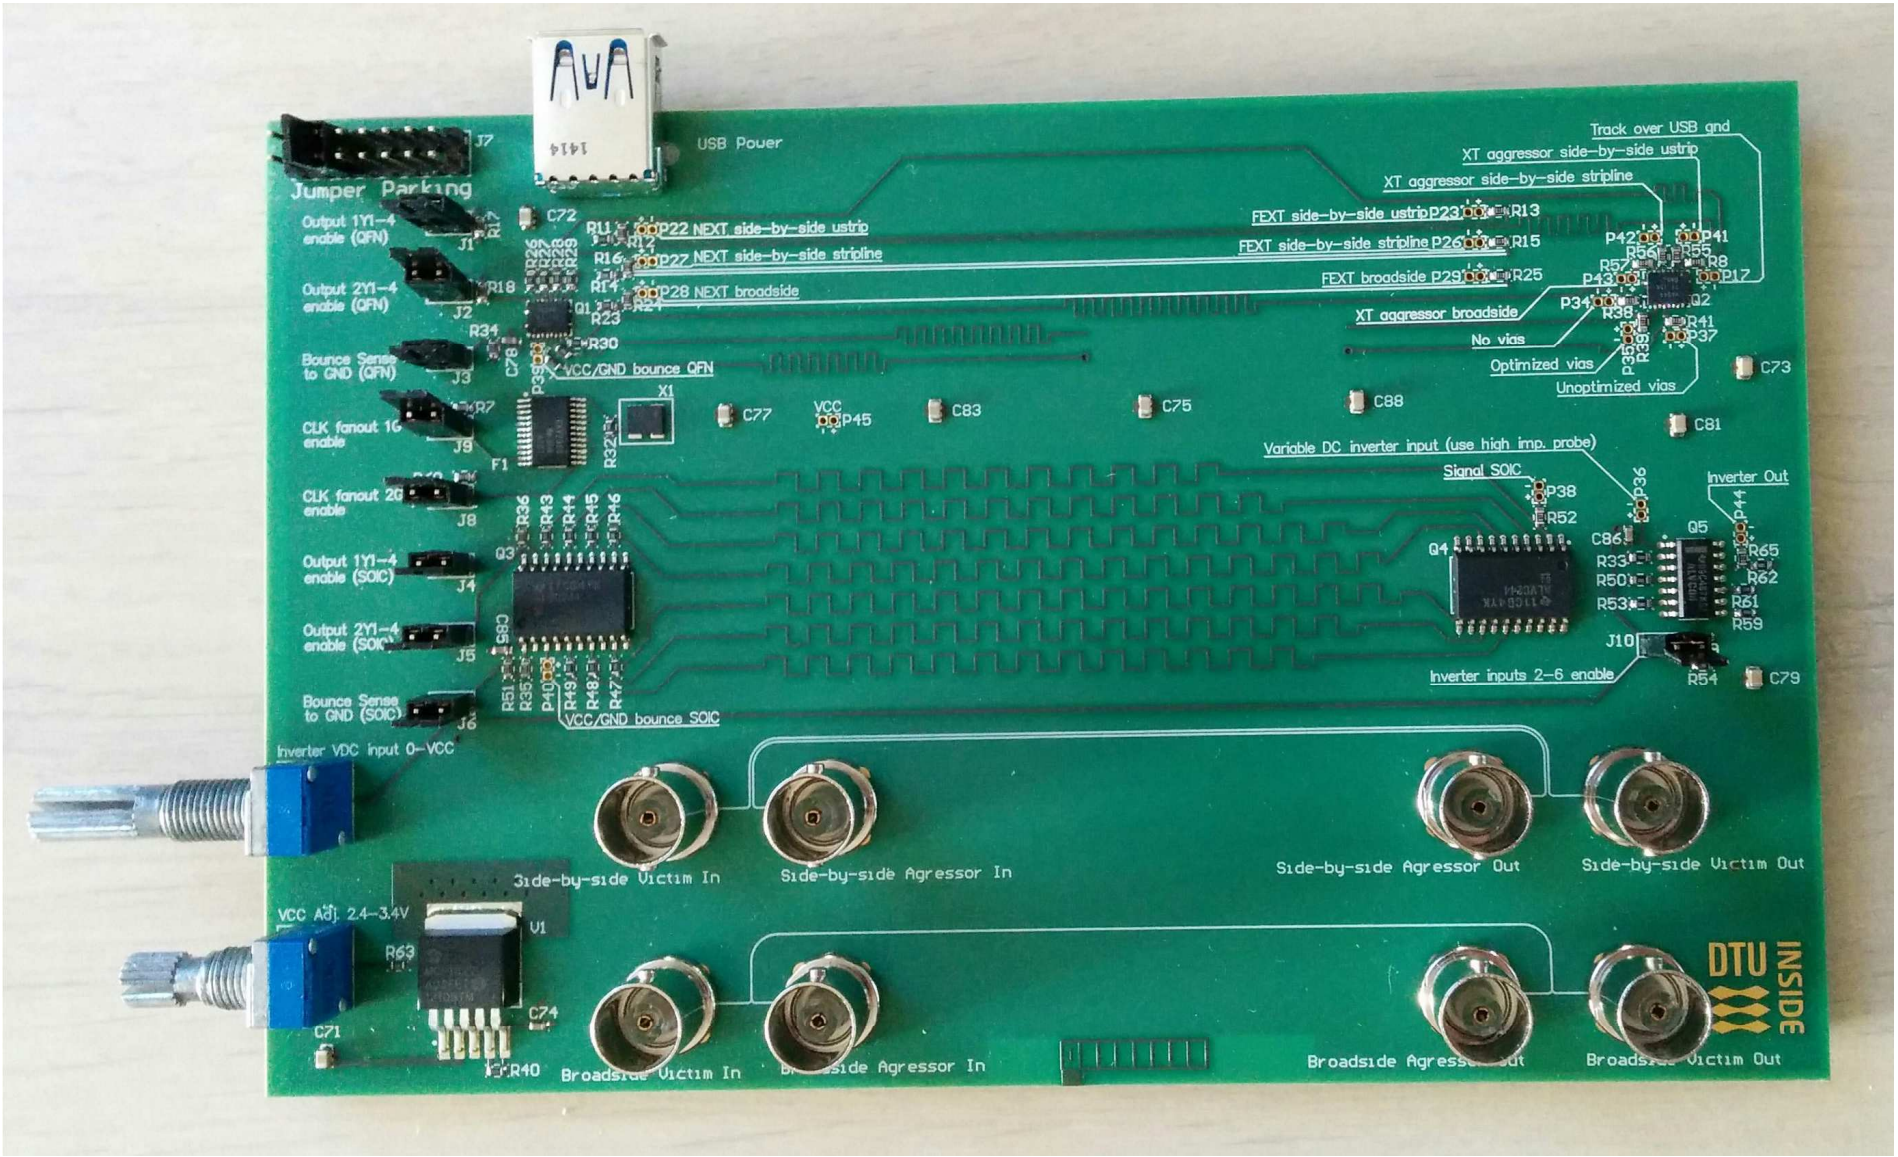

USB Power
Jumper Parking
J7
Output 1Y1-4 enable (QFN)
J1
Output 2Y1-4 enable (QFN)
J2
Bounce Sense to GND (QFN)
J3
CLK fanout 1G enable
J9
CLK fanout 2G enable
J8
Output 1Y1-4 enable (SOIC)
J4
Output 2Y1-4 enable (SOIC)
J5
Bounce Sense to GND (SOIC)
J6
P22 NEXT side-by-side ustrip
P27 NEXT side-by-side stripline
P28 NEXT broadside
VCC/GND bounce QFN
VCC/GND bounce SOIC
Track over USB gnd
XT aggressor side-by-side ustrip
XT aggressor side-by-side stripline
FEXT side-by-side ustrip P23
FEXT side-by-side stripline P26
FEXT broadside P29
XT aggressor broadside
No vias
Optimized vias
Unoptimized vias
Variable DC inverter input (use high imp. probe)
Signal SOIC
Inverter Out
Inverter inputs 2-6 enable
Inverter VDC input 0-VCC
VCC Adj. 2.4-3.4V
Side-by-side Victim In
Side-by-side Agressor In
Side-by-side Agressor Out
Side-by-side Victim Out
Broadside Victim In
Broadside Agressor In
Broadside Agressor Out
Broadside Victim Out
DTU INSIDE