
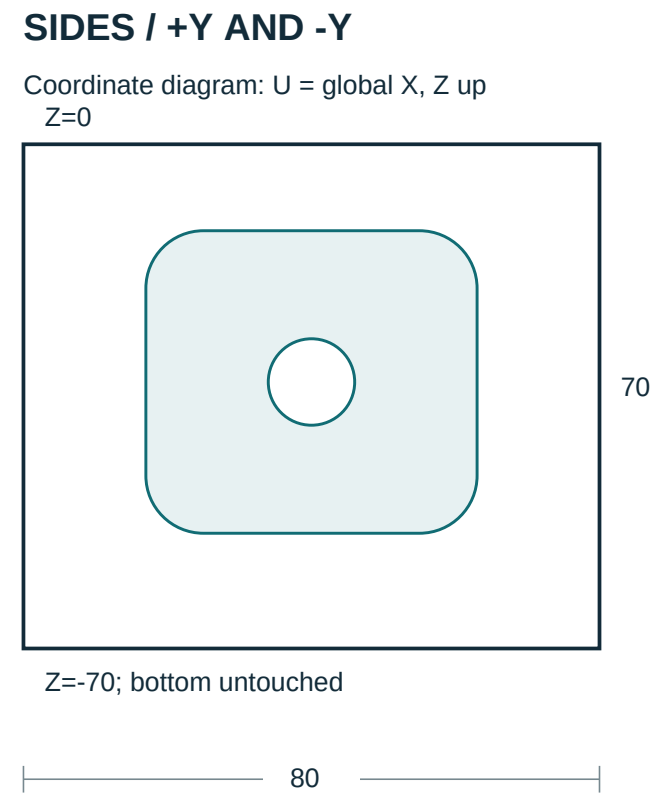
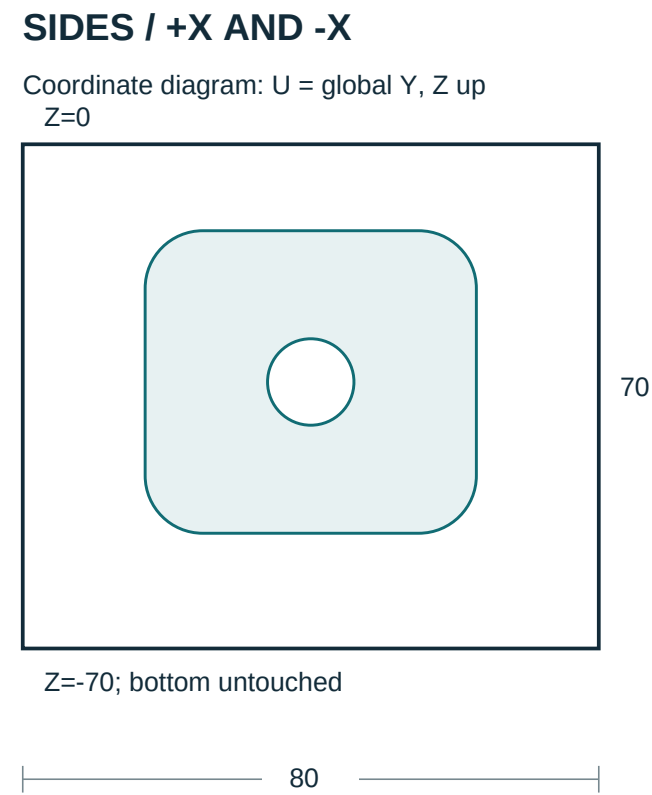


SILTA / VALVE FEEDBACK BLOCK

DEMO-5X-04 | REV A | AL6061 | ALL DIMENSIONS mm | GENERAL +/-0.127 mm

80 x 80 x 70 pre-sized blank. G54 origin = top-face center. Z up.

Indexed 3+2 on UMC-750. One T1 flat end mill, diameter 12.7, flute length 25.4. NOT TO SCALE.

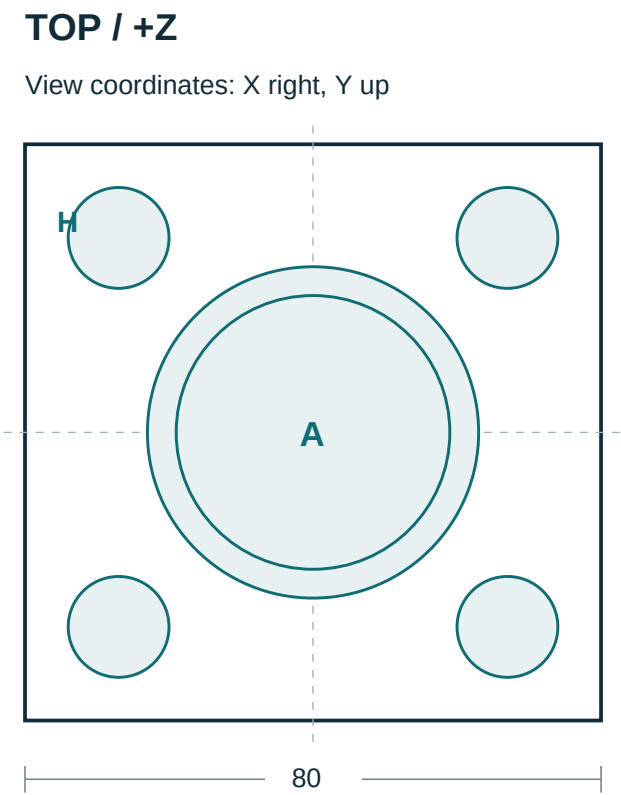

FEATURE SCHEDULE - CUT ONLY THESE BLIND FEATURES

- A / Top concentric stepped recess at (X,Y)=(0,0): diameter 46 to depth 6;**
diameter 38 to TOTAL depth 20 from Z=0. Flat floors; no island in this recess.
- H / 4 blind holes: diameter 14, depth 8; centers (X,Y)=(+/-27, +/-27). Flat bottoms.**
- +X and -X: each pocket 46 wide x 42 high, R8 corners; center (U,Z)=(0,-33); depth 6 inward; central island diameter 12.**
- +Y and -Y: each pocket 46 wide x 42 high, R8 corners; center (U,Z)=(0,-33); depth 6 inward; central island diameter 12.**

Side pockets: planar floors. Islands share their pocket centers and stay flush with the original exterior face.
Side depths measured inward from X=+/-40 or Y=+/-40. U definitions above are global coordinates, not mirrored views.

UNSPECIFIED GEOMETRY IS PROHIBITED: no bottom cuts, exterior facing, edge fillets, chamfers, threads or through holes.
Precondition: the pre-sized blank is secured from below on the provided tall pedestal; mounting hardware is not a part feature.
Demo AL6061 input. Fixed exterior and bottom are already to size. Rigid fixture assumption; no physical load or cutting-force certification.