

SILTA / CROSS-PORT SERVICE BLOCK


DEMO-5X-07 | REV A | AL6061 | ALL DIMENSIONS mm | GENERAL +/-0.127 mm

80 x 80 x 70 pre-sized blank. G54 origin = top-face center. Z up.

Indexed 3+2 on UMC-750. One T1 flat end mill, diameter 12.7, flute length 25.4. NOT TO SCALE.


TOP / +Z

View coordinates: X right, Y up

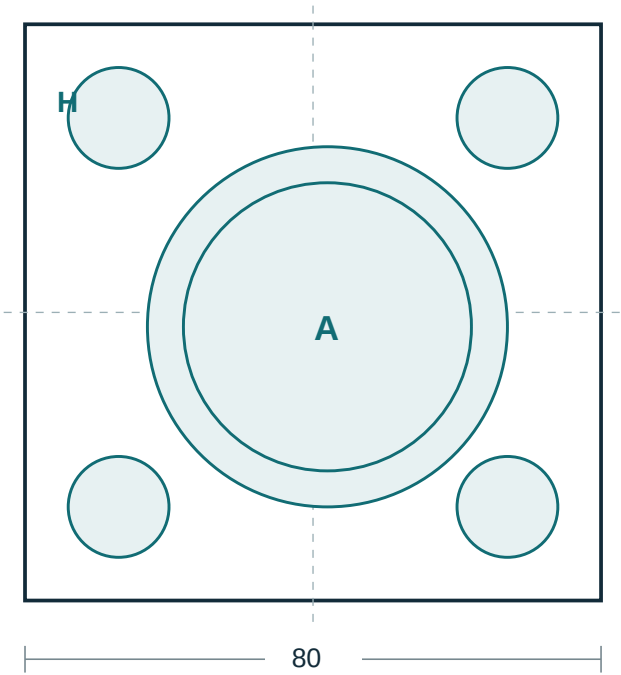


SIDES / +X AND -X

Coordinate diagram: U = global Y, Z up
Z=0

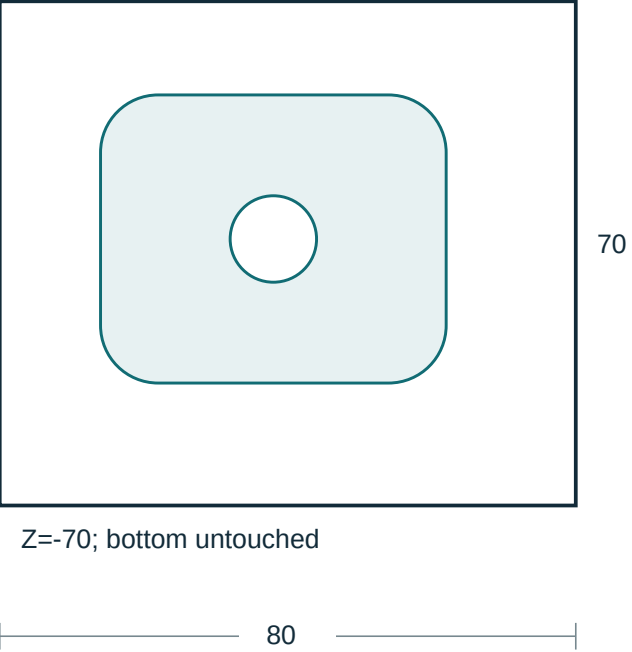

SIDES / +Y AND -Y

Coordinate diagram: U = global X, Z up
Z=0

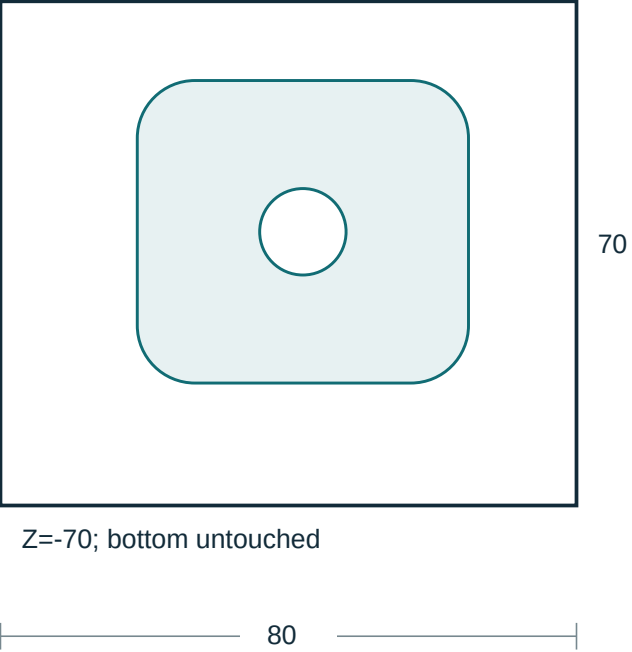

FEATURE SCHEDULE - CUT ONLY THESE BLIND FEATURES

- A / Top concentric stepped recess at (X,Y)=(2,-2): diameter 50 to depth 5; diameter 40 to TOTAL depth 19 from Z=0. Flat floors; no island in this recess.
- H / 4 blind holes: diameter 14, depth 7; centers (X,Y)=(+/-27, +/-27). Flat bottoms.
- +X and -X: each pocket 48 wide x 40 high, R8 corners; center (U,Z)=(-2,-33); depth 7 inward; central island diameter 12.
- +Y and -Y: each pocket 46 wide x 42 high, R8 corners; center (U,Z)=(2,-32); depth 6 inward; central island diameter 12.

Side pockets: planar floors. Islands share their pocket centers and stay flush with the original exterior face.
Side depths measured inward from X=+/-40 or Y=+/-40. U definitions above are global coordinates, not mirrored views.

UNSPECIFIED GEOMETRY IS PROHIBITED: no bottom cuts, exterior facing, edge fillets, chamfers, threads or through holes.

Precondition: the pre-sized blank is secured from below on the provided tall pedestal; mounting hardware is not a part feature.
Demo AL6061 input. Fixed exterior and bottom are already to size. Rigid fixture assumption; no physical load or cutting-force certification.