


FINNED INSTRUMENT SUPPORT


UMC-10 / REV A AL6061 PROJECT-AUTHORED BENCHMARK INPUT

01 TOP / LOOKING -Z

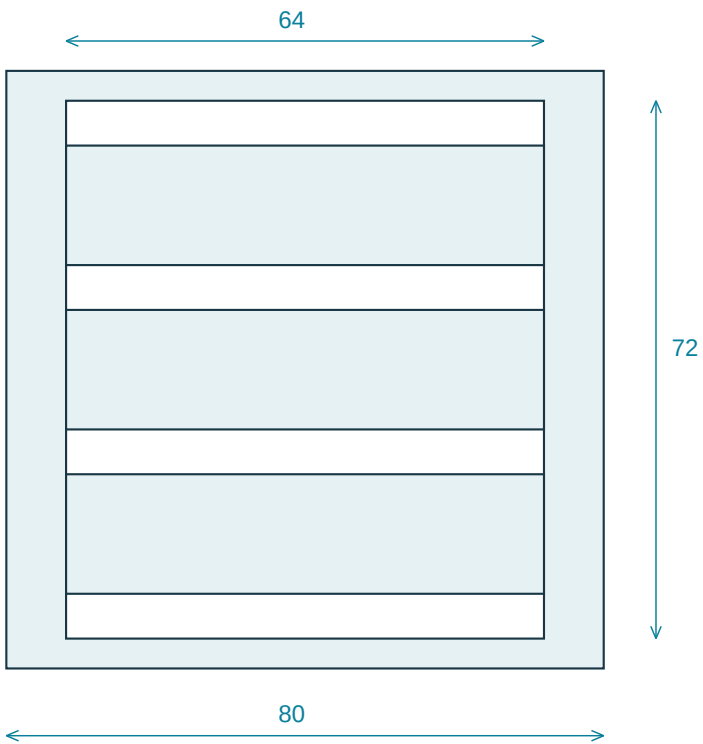


3X open-ended channels: 16 wide x 18 deep.
X=-32..32; every channel floor Z=-18.
Y intervals: -30..-14, -8..8, 14..30.
Each passes both X ends. No end walls.

02 END / LOOKING -X

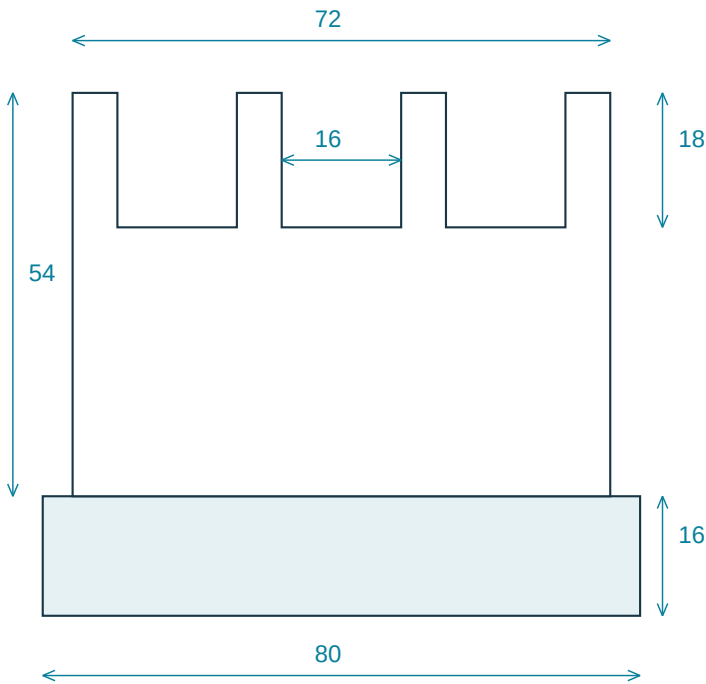

4X fins, each 6 thick, 18 high, 64 long.
Fin Y: -36..-30, -14..-8, 8..14, 30..36.
Overall height 70; upper prism 64 x 72 x 54.
Flange top Z=-54; bottom Z=-70.

03 SIDE / LOOKING -Y

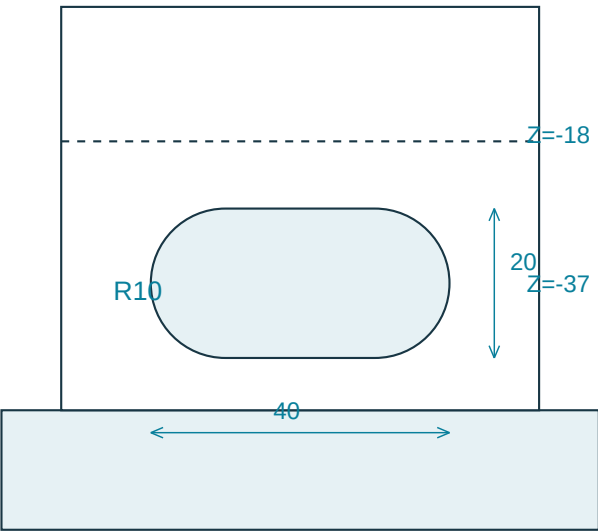

2X blind horizontal obround: 40 x 20, R10.
Center X0,Z=-37; enter Y=-36 and Y=36.
Depth 6 inward; floors Y=-30 and Y=30.
Bounds X=-20..20; Z=-47..-27.

GEOMETRY / DATUMS

All dimensions in mm. General linear tolerance +/-0.127; angular +/-0.2 deg.
G54 = original blank top center. X,Y along blank edges; Z upward. Keep this datum fixed.
Blank: X,Y=-40..40; Z=-70..0. Preserve the full 80 x 80 x 16 bottom flange.
Upper prism: X=-32..32; Y=-36..36; Z=-54..0. All three channels remove Z=-18..0.
Channel floor/wall junctions are square; channels open through both X ends, no corner fillets.
Side-pocket R10 semicircle centers: (X,Z)=(-10,-37),(10,-37). No central island.
No unshown holes, undercuts, threads, chamfers, fillets or mounting features.

TOOL / ACCESS / ANALYTICAL SCREEN

Haas UMC-750 Reboot, indexed 3+2; same tall pedestal.
T1 only: DIA 12.7 flat; flute 25.4; stickout 33.02.
Top channels 18 deep; side pockets 6 deep.
Upper exterior normal removal: X sides 8; Y sides 4.
Channel/pocket web 9; pocket/flange web 7; fin thickness 6.
Channel 16 > tool DIA 12.7; pocket R10 > tool R6.35.
Fixture clearance, fin rigidity and CAM remain unverified.

FRESH INPUT ONLY - NOT QUEUED OR RUN

Authored for a benchmark; no thermal or manufacturing qualification. Astra must generate CAD/CAM and verify it.