


SILTA / LEARNING TEST PART F

Authored test drawing, revision A. Not a production/customer drawing. All dimensions in mm.

TOP VIEW - slot long axes parallel to Y

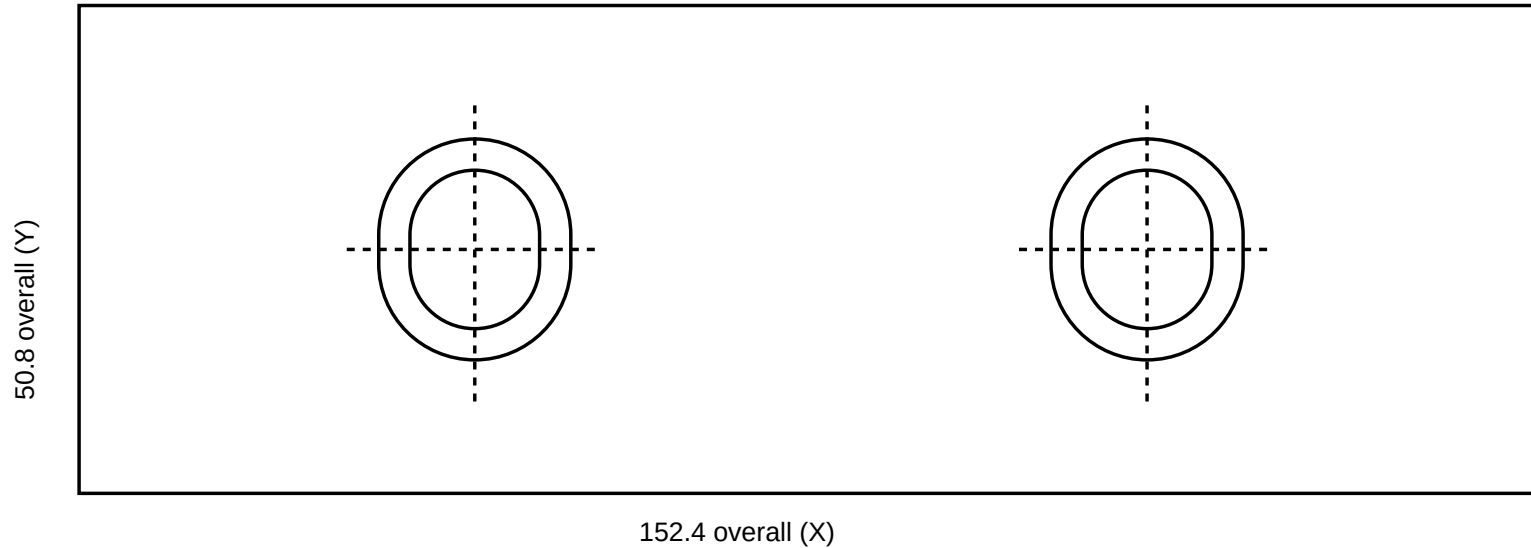

G54: top centre
X along 152.4 length
Y along 50.8 width
Z top = 0
Z bottom = -25.4

BLANK / FINISHED OUTSIDE: 152.4 X x 50.8 Y x 25.4 Z. Physical material: Aluminum 6061.

2 identical stepped obround slot(s). Centres (X,Y): (-35,0), (35,0).

Through slot: width 13.5, overall length 16.5, end radii R6.75; through full thickness.

Counterbore: width 20, overall length 23, end radii R10; depth 9 from top.

Each obround: two semicircles with centres 3 apart along Y, joined by straight sides.

Counterbore and through slot concentric. Arc centres at Y = -1.5 and +1.5.

General dimensional tolerance: +/-0.127. No other holes, pockets, fillets or chamfers.

Use a pre-sized blank; no outer-profile machining. Final edge deburring is manual, after CNC.

Drawing defines the target only. Toolpaths, entry, order and cutting parameters are agent decisions.

Purpose: test transfer across changed feature dimensions/count. Simulation must verify each new target.