


SILTA / INDEXED ACTUATOR HOUSING

DEMO-5X-001 | Rev A | AL6061 | All dimensions mm | General tolerance +/-0.127

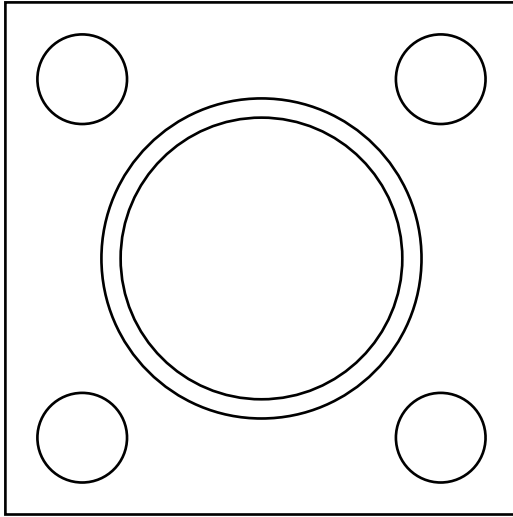

TOP / +Z

80 x 80 exterior; stock top at Z=0


Central stepped blind recess:

diameter 50 to depth 6

diameter 44 to total depth 22

4 x diameter 14 blind holes, depth 8

centers (X,Y) = (+/-28,+/-28)

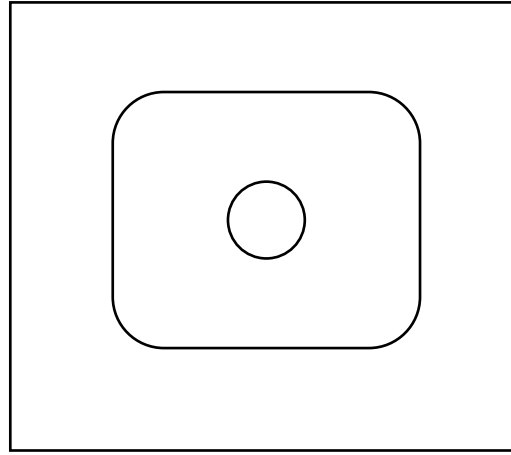

SIDE / FOUR IDENTICAL FACES

Overall height 70; bottom at Z=-70

Pocket on each of +X, -X, +Y, -Y:

48 wide x 40 high; corner radius 8

centered horizontally and at Z=-34

depth 8 inward, flat floor

diameter 12 central island remains flush

with original exterior side face

MANUFACTURING / SIMULATION INPUT

Pre-sized 80 x 80 x 70 blank. Exterior and bottom remain unchanged. No unspecified chamfers.

Blank assumed secured from below to modeled pedestal; mounting hardware is a setup precondition.

One cutter only: T1, diameter 12.7 flat end mill. Top and four sides require indexed orientations.

Geometric simulation demonstration. Fixture loading and real cutting forces are not certified.