

Bearing Pocket

Dimensioned test drawing. All dimensions in millimetres.

Pre-sized box stock: 64 X x 52 Y x 24 Z.

Coordinate origin: stock centre in X/Y; stock bottom Z=0; top Z=24.


One blind obround pocket: end centres A=(-12,0), B=(12,0).

Pocket radius 10; absolute floor Z=8; flat bottom.

No other features, holes, chamfers, fillets or islands.

General geometric tolerance: 3 mm. Coarse simulation demonstration.

Material: aluminium 6061. Not a production drawing.

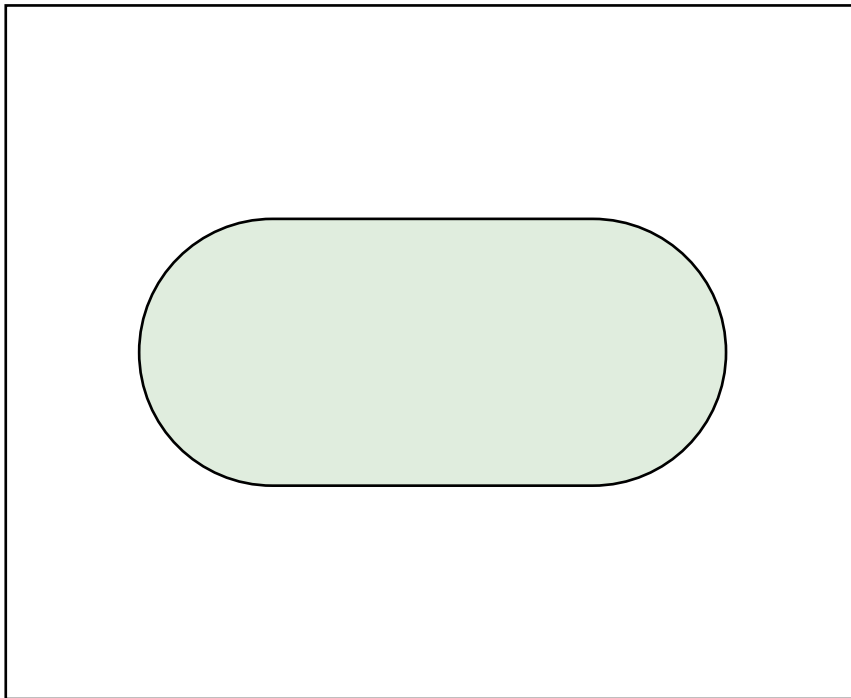

Top view (schematic); dimensions above define the target.