


FORKED ACTUATOR BRACKET


UMC-09 / REV A AL6061 PROJECT-AUTHORED INPUT - NO CAD/CAM SOLUTION

01 TOP / LOOKING -Z

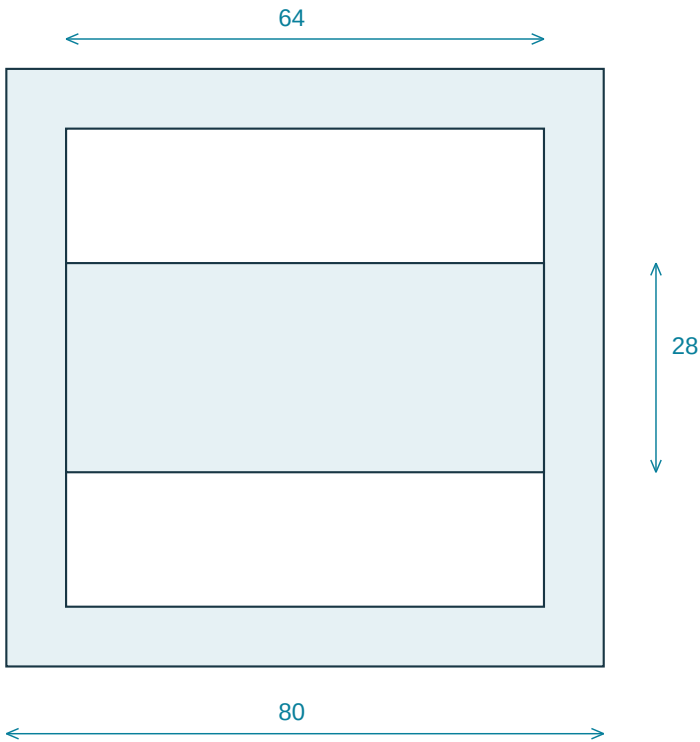


Channel runs **THROUGH** both X ends.
X=-32..32; Y=-14..14; floor Z=-20.
Two ears: Y=-32..-14 and Y=14..32.
Each ear is 18 wide; ends stay open.

02 END / LOOKING -X

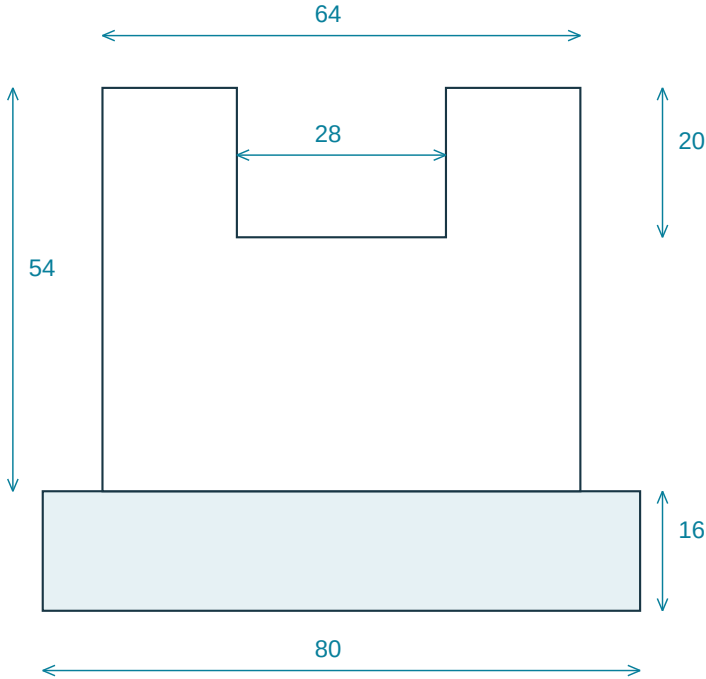

Overall height 70; tower height 54.
Tower centered: 64 x 64 on 80 x 80 base.
Top Z0; flange top Z=-54; bottom Z=-70.
No optional holes in the 18 mm ears.

03 SIDE / LOOKING -Y

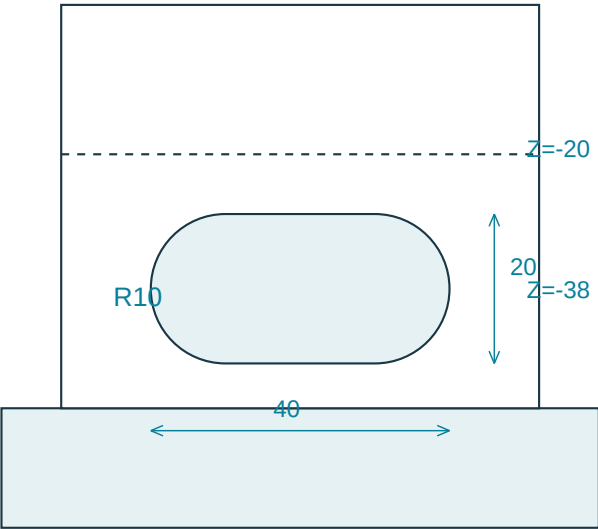

2X horizontal obround, 40 x 20, R10.
Centered X0, Z=-38 on Y=-32 and Y=32.
Depth 6 inward; floors at Y=-26 and Y=26.
Extends X=-20..20; Z=-48..-28.

GEOMETRY AND DATUMS

All dimensions in millimeters. General linear tolerance +/-0.127; angular +/-0.2 deg.
G54 = center of original blank top. X,Y along blank edges; Z upward. Do not move this datum.
Preserve 80 x 80 x 16 base: X,Y=-40..40; Z=-70..-54. Upper tower: X,Y=-32..32.
Remove the top channel to planar Z=-20. Channel boundaries are sharp, open at both X ends.
Side-pocket semicircle centers: (X,Z)=(-10,-38) and (10,-38). No island; flat pocket floors.
No unshown holes, chamfers, added fillets or bottom features. Optional ear holes are omitted.

MACHINE / TOOL / ANALYTICAL SCREEN

Haas UMC-750 Reboot; indexed 3+2; existing tall pedestal.
T1 only: DIA 12.7 flat end mill; flute 25.4; stickout 33.02.
Blank 80 x 80 x 70 AL6061, attached from below. No bottom cuts.
Top depth 20; side depth 6; exterior normal removal 8.
Channel-to-pocket web 8; pocket-to-flange web 6.
R10 > tool radius 6.35; channel 28 > tool diameter 12.7.
These checks do not establish CAM/holder/machine clearance.

INPUT ONLY - UNRUN

Dimensions define the target. Astra must generate CAD and CAM; actual Fusion verification is still required.