



UMC12 / RIBBED CLEVIS

Aerospace-style geometry challenge | AL6061 | INDEXED 3+2 | UNVERIFIED


FRONT / LOOK FROM -Y

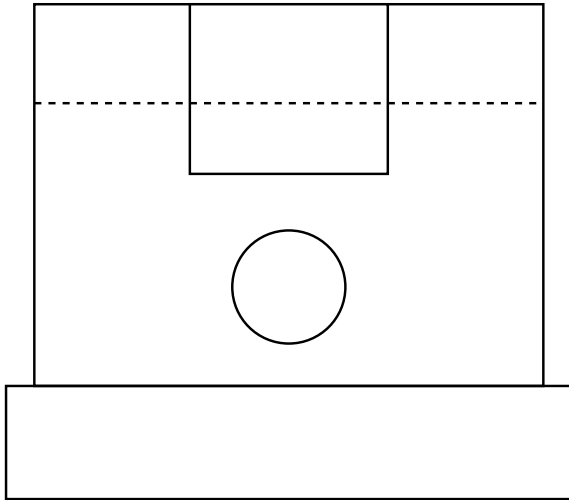

LEFT / LOOK FROM -X

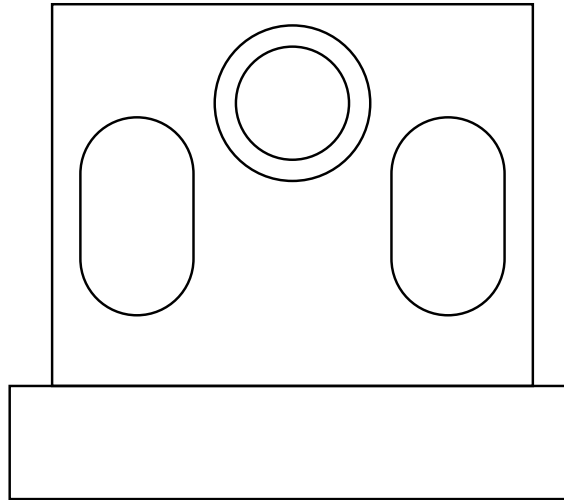

TOP / LOOK FROM +Z

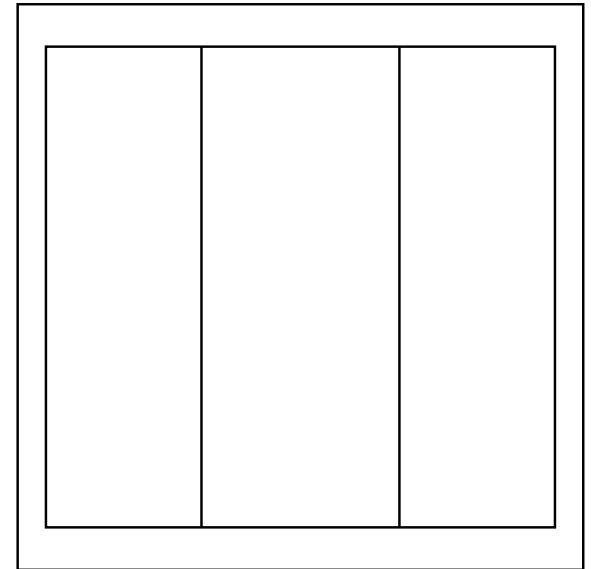

Views are orthographic diagrams. Exact coordinate dimensions on sheet 2 govern.

G54: stock top center (0,0,0). X/Y horizontal; +Z upward. Stock 80 x 80 x 70.

Preserve complete base X,Y +/-40; Z -70 to -54. Upper envelope 72 x 68 x 54.

Clevis ears: X [-36,-14] and [14,36], joined below channel floor Z=-24.

Four side capsules leave outer webs 4 mm, central rib 28 mm and pocket floors 14 mm thick.

Asymmetry: left pin bore has DIA22 x3 counterbore; right bore is DIA16 plain.

No physical machining approval. All geometry, toolpath and collision checks remain required.

UMC12 / RIBBED CLEVIS

Aerospace-style geometry challenge | AL6061 | INDEXED 3+2 | UNVERIFIED

01 / Envelope	Upper: X[-36,36], Y[-34,34], Z[-54,0]. Base: X/Y[-40,40], Z[-70,-54].
02 / Open clevis channel	Remove X[-14,14], Y[-34,34], Z[-24,0]. Width28, depth24; open at both Y ends.
03 / Coaxial pin bores	DIA16, axis X, center(Y,Z)=(0,-14). Through each22-thick ear into channel.
04 / Left counterbore only	DIA22 on -X face, same center as pin. Depth3: entryX=-36, floorX=-33.
05 / Four side pockets	On each X=+/-36 face: capsule centers(Y,Z)=(-22,-30),(22,-30). Depth8.
Pocket definition	Overall16(Y) x28(Z), R8 ends. Arc centersZ=-36,-24. FloorsX=-28,+28.
06 / Two end ports	DIA16 blind from Y=+/-34. Center(X,Z)=(0,-40). Depth16; floorsY=-18,+18.
Intersection rules	Pin/counterbore share axes; pin exits into top channel. No other voids intersect.
Remaining material	Side pocket to Y edge4; pocket floor to inner ear14; ports to base top6.
Critical webs	Pin bottomZ=-22 is2 above channel floor; left counterbore topZ=-3 leaves3.
Tool envelope	Only existing T1: DIA12.7 flat, flute25.4, stickout33.02, assembly gauge96.52mm.
Reach analysis	Largest intended inward cut24; ear bore22; pockets8; ports16; counterbore3.
Entry orientations	Top +Z; side features +/-X; ports +/-Y. No tilted planes or hidden undercuts.
Tolerance / finish	All linear +/-0.127mm; angular +/-0.2deg. No unspecified fillets or chamfers.

Tool reach is a nominal dimension check, not proof of holder clearance, acceptable cutting loads or a feasible strategy.