


SILTA / LEARNING TEST PART B

Authored test drawing, revision A. Not a production/customer drawing. All dimensions in mm.

TOP VIEW — slot long axes parallel to Y

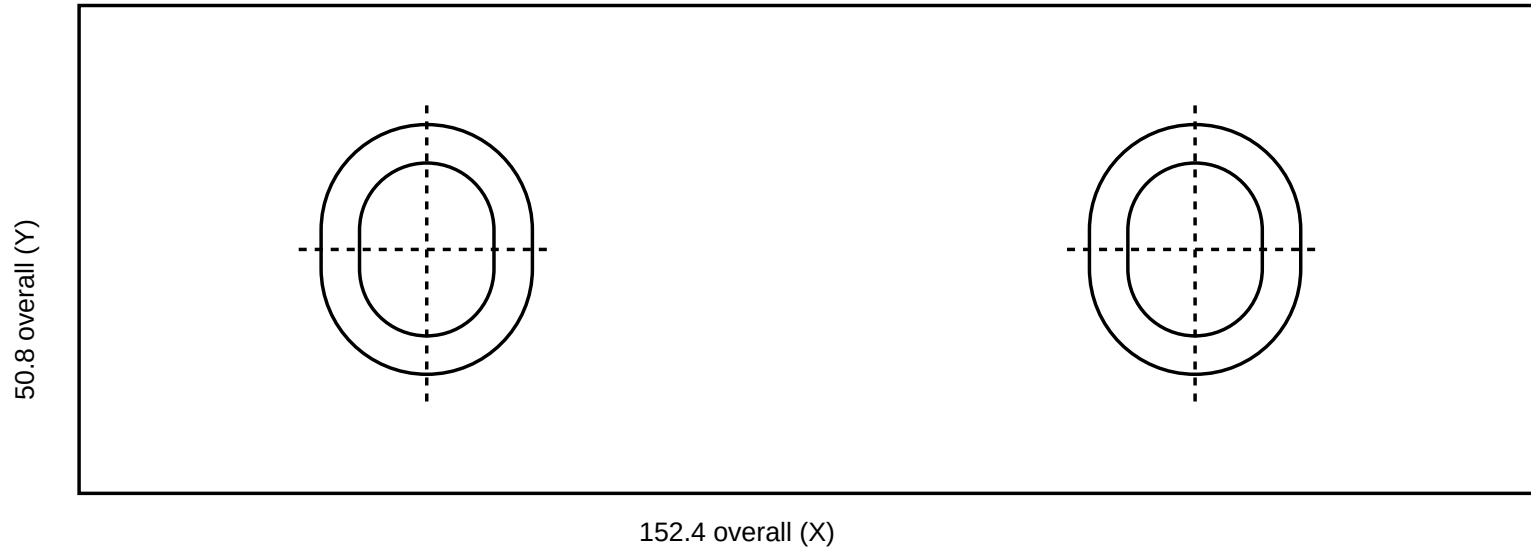

G54: top centre
X along 152.4 length
Y along 50.8 width
Z top = 0
Z bottom = -25.4

BLANK / FINISHED OUTSIDE: 152.4 X x 50.8 Y x 25.4 Z. Physical material: Aluminum 6061.

Two identical stepped obround slots. Centres: (X,Y) = (-40,0) and (+40,0).

Through slot: width 14.0, overall length 18.0, end radii R7.0; through full thickness.

Counterbore: width 22.0, overall length 26.0, end radii R11.0; depth 10.0 from top.

Each obround comprises two semicircles with centres 4.0 apart along Y, joined by straight sides.

Counterbore and through slot concentric. Slot ends centred at Y = -2.0 and +2.0.

General dimensional tolerance: +/-0.127. No other holes, pockets, fillets or chamfers.

Use a pre-sized blank; no outer-profile machining. Final edge deburring is manual, after CNC.

Drawing defines the target only. Toolpaths, entry, order and cutting parameters are agent decisions.

Purpose: test transfer of learned CAM guidance/checks to changed slot sizes, spacing and counterbore depth.