

3.7V Lithium Polymer Battery Data Sheet

Model: 402025

Please Find More:

<https://www.fpbattery.com/3-7v-150mah-lithium-polymer-battery/>

File Number: A/FP2025-7482

File Version: 01

CONTACT

CUSTOMER SERVICE

86.755.3682.7358

sales@fpbattery.com

Hours of Operation:

9:00am-6:00pm CST, Monday to Friday

LEARN MORE ON:

<https://www.fpbattery.com/>

DNK POWER COMPANY LIMITED

BATTERY SPECIFICATION

Part Number	DNK 402025
Nominal Voltage	3.7 V
Nominal Capacity	170 mAh
Internal Impedence	<60mΩ
Charge Voltage	4.2V
Recommended Charge Current	0.2 C
Allowed Max Charge Current	0.5 C
Output Voltage Range	4.2 - 2.5 V
Recommended Discharge Current	0.2 C
Max Continuous Discharge Current	1 C
Pulse Discharge Current	3 C (10 mS)
Discharge Cut-off Voltage	2.5± 0.05V
Cycle Life to 80% Health	500 (0.2C, 25°C)

ENVIRONMENTAL SPECIFICATIONS

Charging Temperature Range	0 - 45°C
Discharging Temperature Range	-20 - 60°C
Storage Period 1 Week	-20 - 45°C
Storage Period 1 Month	-10 - 45°C
Storage Period 6 Months	0 - 35°C

BATTERY PROTECTION


Over Charge	4.275 ± 50mV
Over Discharge	2.5V ± 50mV
Over Current	3A to 5A
Short Circuit	Yes

MECHANICAL SPECIFICATIONS


Dimensions	27x 20 x 4 mm(L*W*T)
Weight	≤5 g
Battery Terminals	WC/ FL ★

CERTIFICATION


Certification Approval	PLEASE CONSULT SALES
★	WC=With Connector FL=Flying Leads UWP=Blue Wrapped PVC BWP=Black Wrapped PVC BC= Bare Cell

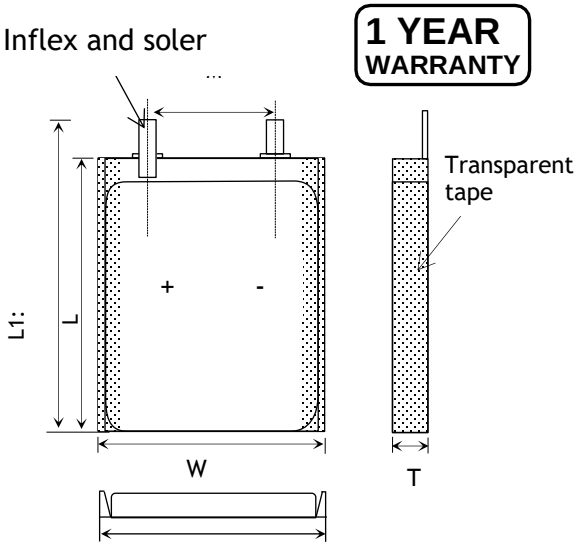

Item	Parameter (mm)
T	4
W	20
M	10
L	25
L ₁	27
BL	27 ± 1
CL	100

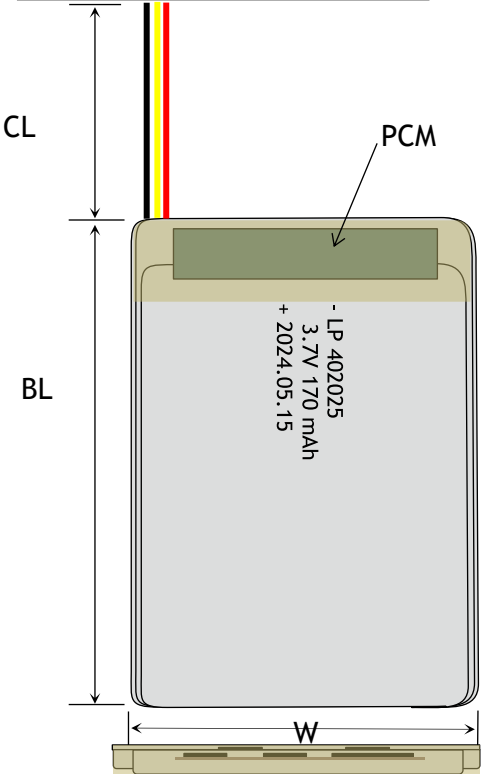

RELATIVE CURVES

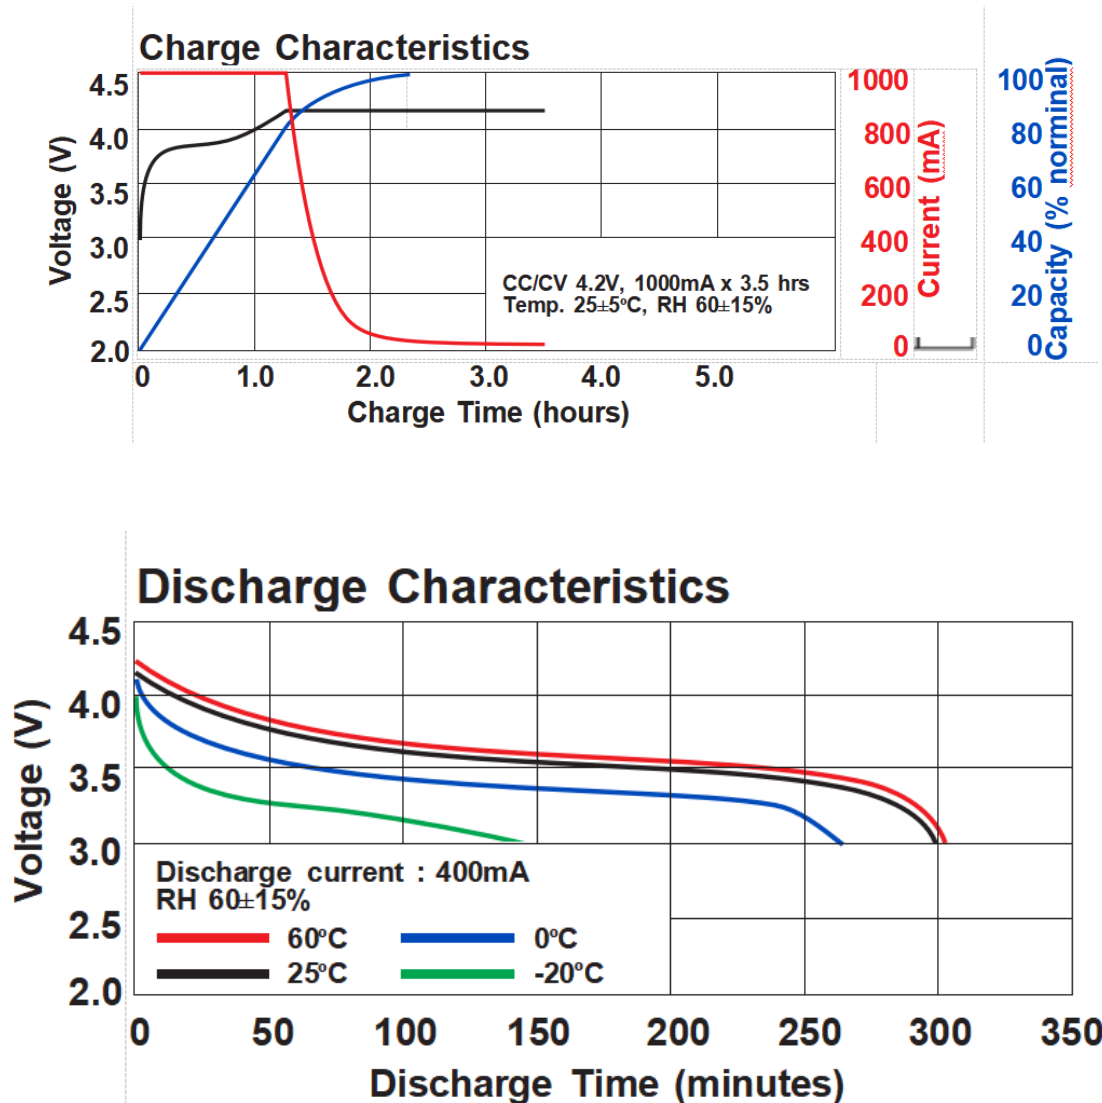

ANNOUNCEMENT

- Do not touch the battery to materials that are easily conductive.
- Maintain safe distances (up to 5m from flammable materials)
- Keep Lipo batteries away from heat! And direct sunlight, and do not Store ma car during hot weather. Never use a Lipo that is leaking or gives off a strong odor, or has been damaged many way.
- Do not fully discharge your LiPo battery pack. Discharging a LiPo beyond it's critical minimum voltage (often 3.0v) can cause damage to the battery.
- Avoid placing the battery in a damp environment.
- Do not soak the battery with water.
- Do not submit to static electricity risks tAVOID damages to the Protecting Circuit Board.
- Never charge a LiPo battery while inside your model.
- Always guard against any possible short circuit.
- Do not mix batteries of different models or capacities.
- Always inspect batteries for any signs of damage before use, check for physical damage such as cracks/bulges/indentations . Any battery that has been damaged, dented or pierced should be taken out of service immediately, segregated from other batteries and stored as set out below while awaiting safe disposal. Similarly, damaged goods containing batteries should also be segregated from other material and stored safely to await safe disposal.