



MRT-1075 Lubricating Pump Chain


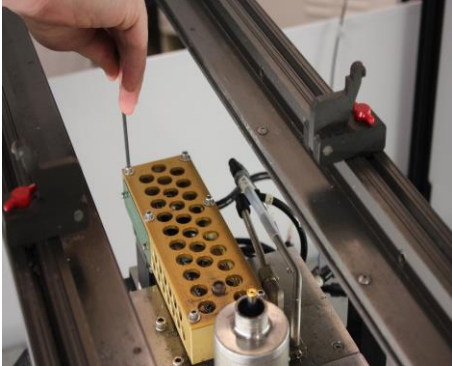
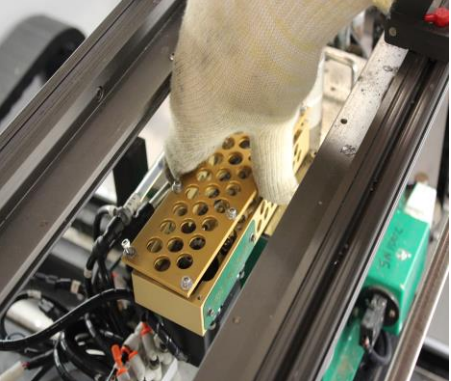
Tool List:

Safety Glasses
7/64 Allen wrench
High Temp Gloves
Acid Brush
Hi Temp Anti Seize




Always wear safety glasses & high temp gloves while working with a hot pump

NOTE: If you have Hi Temp oil on the chain, you must remove it by cleaning the chain in Isopropyl alcohol or equivalent solution.


		
<p>P/N S0011-1-FS Use this Hi Temp Anti Seize once a month or as needed.</p>	<p>Loosen screws; 6-32 3/8" socket cap screws (6X) from top cover using 7/64 Allen Wrench, as seen.</p>	<p>Remove screws and top cover from pump as shown.</p>




Apply lube to a clean acid brush as shown.

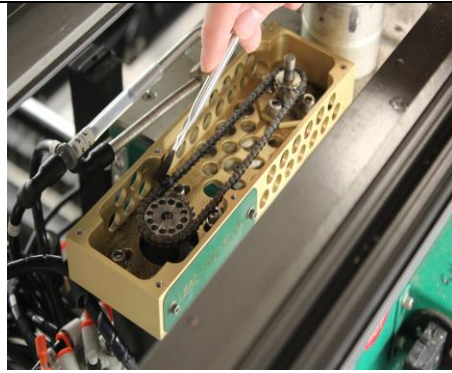

Spread an even thin coat of lube over the entire chain, as seen.

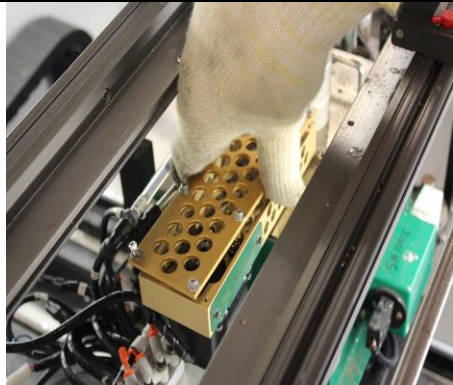

Place cover on pump, leaving the screws loose.

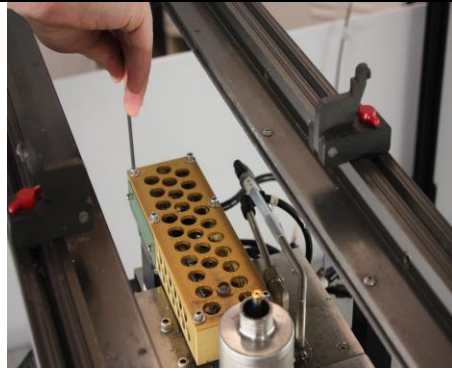

Turn pump motor on to 300 rpm.
Then tighten the screws snug (6X).
This will help the bushing find center.
Then you are ready to operate!

Customer Service
Nordson SELECT, Inc.
22425 East Appleway Ave
Suite 1
Liberty Lake, WA 99019
Office: +1.509.924.4898
Fax: +1.509.533.1299