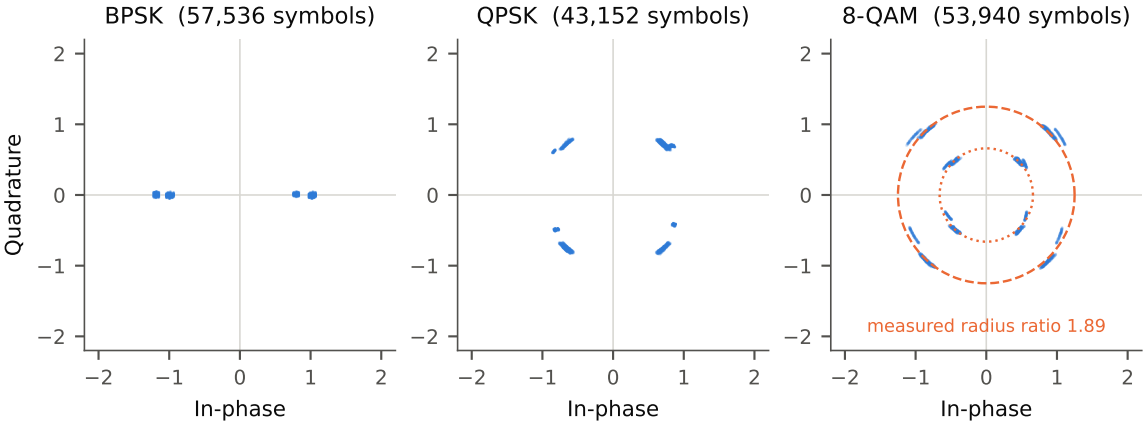

All captures pooled across the five boards, normalised per capture to unit RMS. Same downconversion and derotation used to generate the training labels. No noise added.