



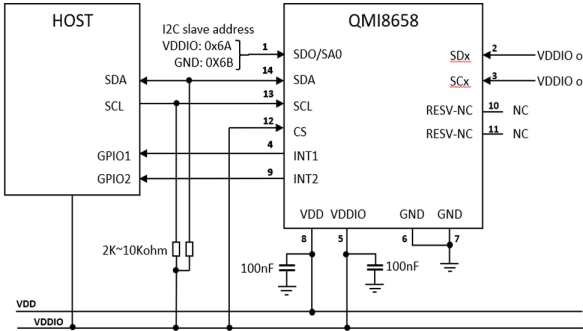


Figure 6. I3C/I2C-UI mode


Note: As there is internal 200Kohm pull-up resistor, pull SDO/SA0 low will cost more current then pull it high.

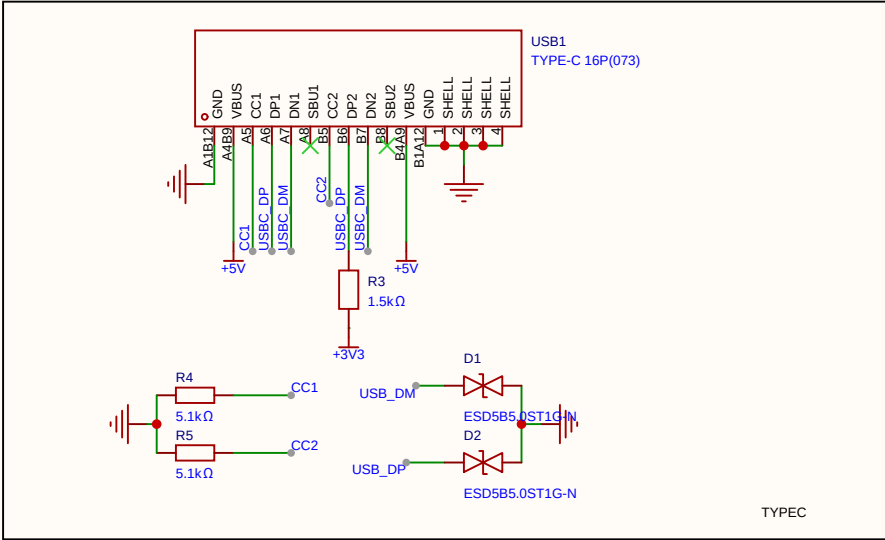


TYPE-C

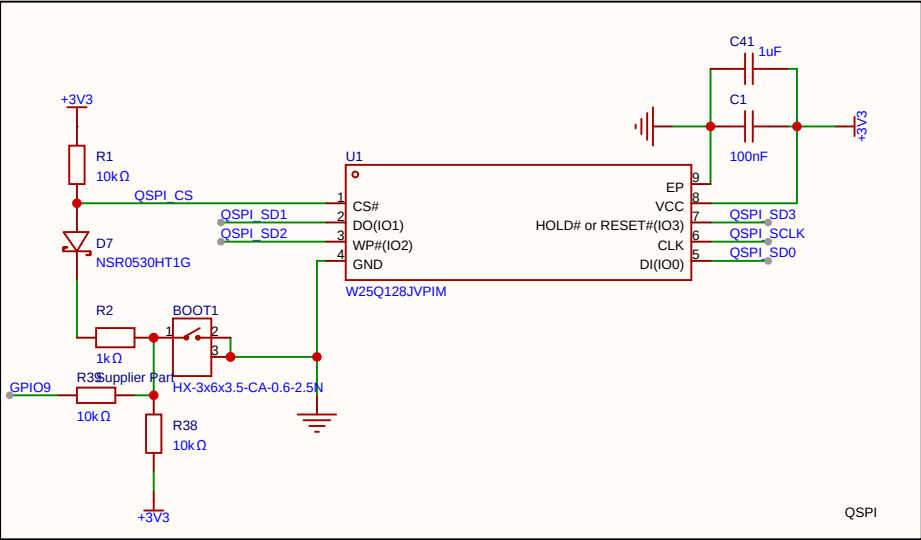


QSPI

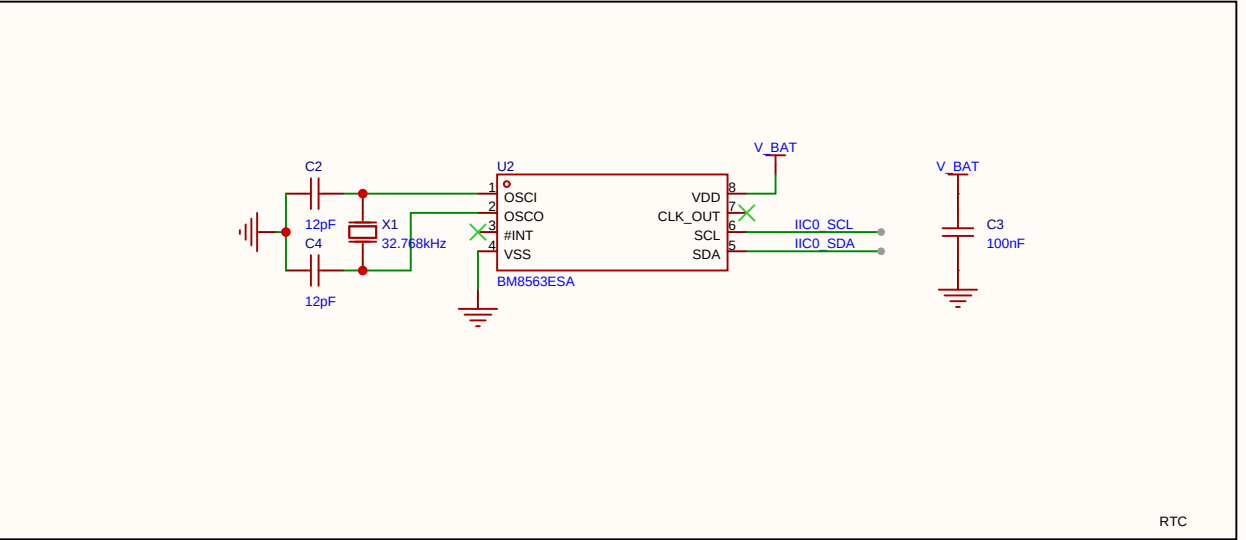


RTC

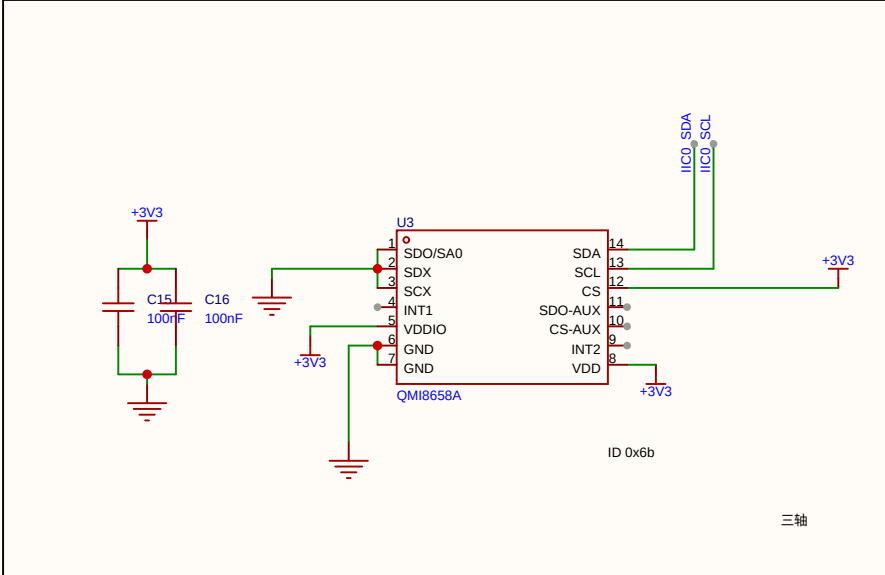


三轴

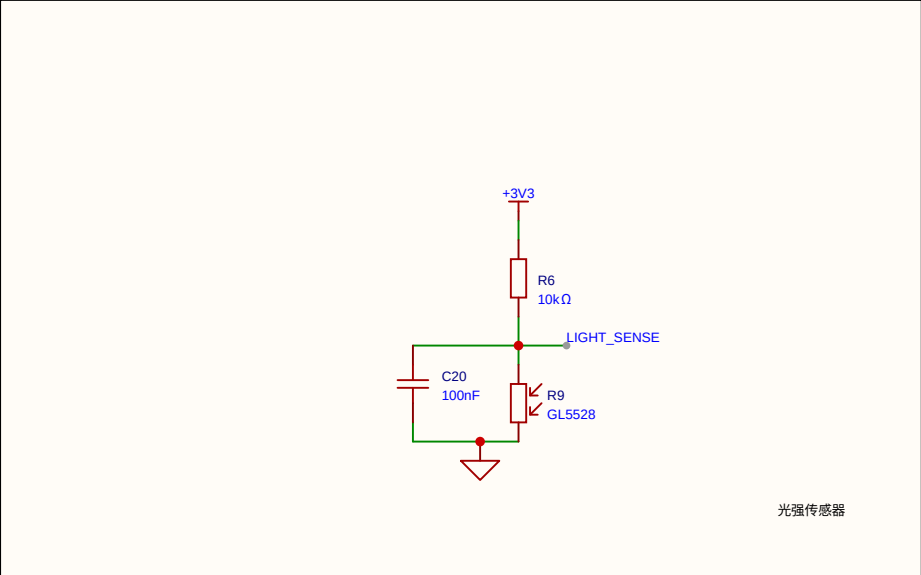


光强传感器

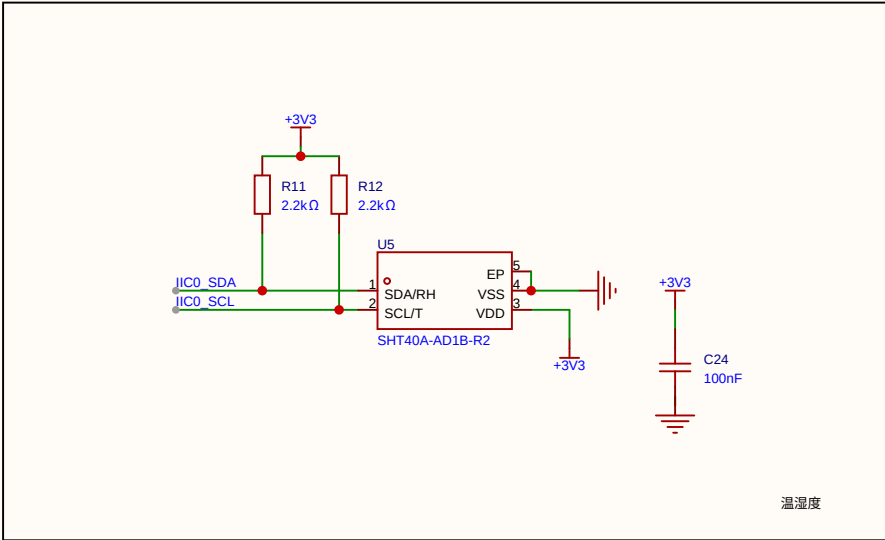


温湿度

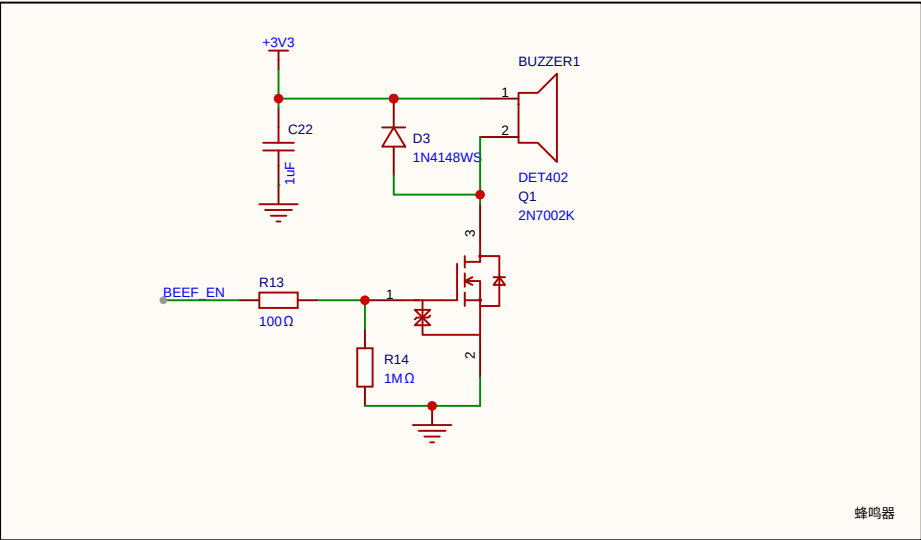


蜂鸣器

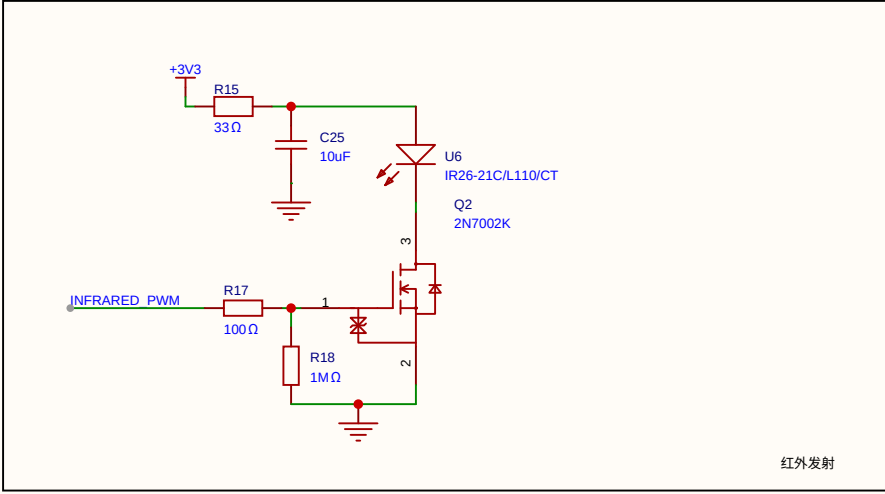

红外发射

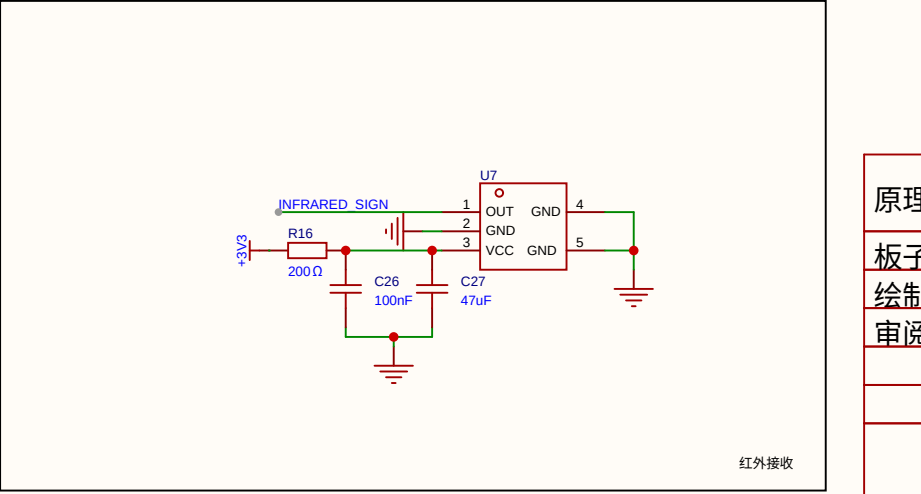


红外接收

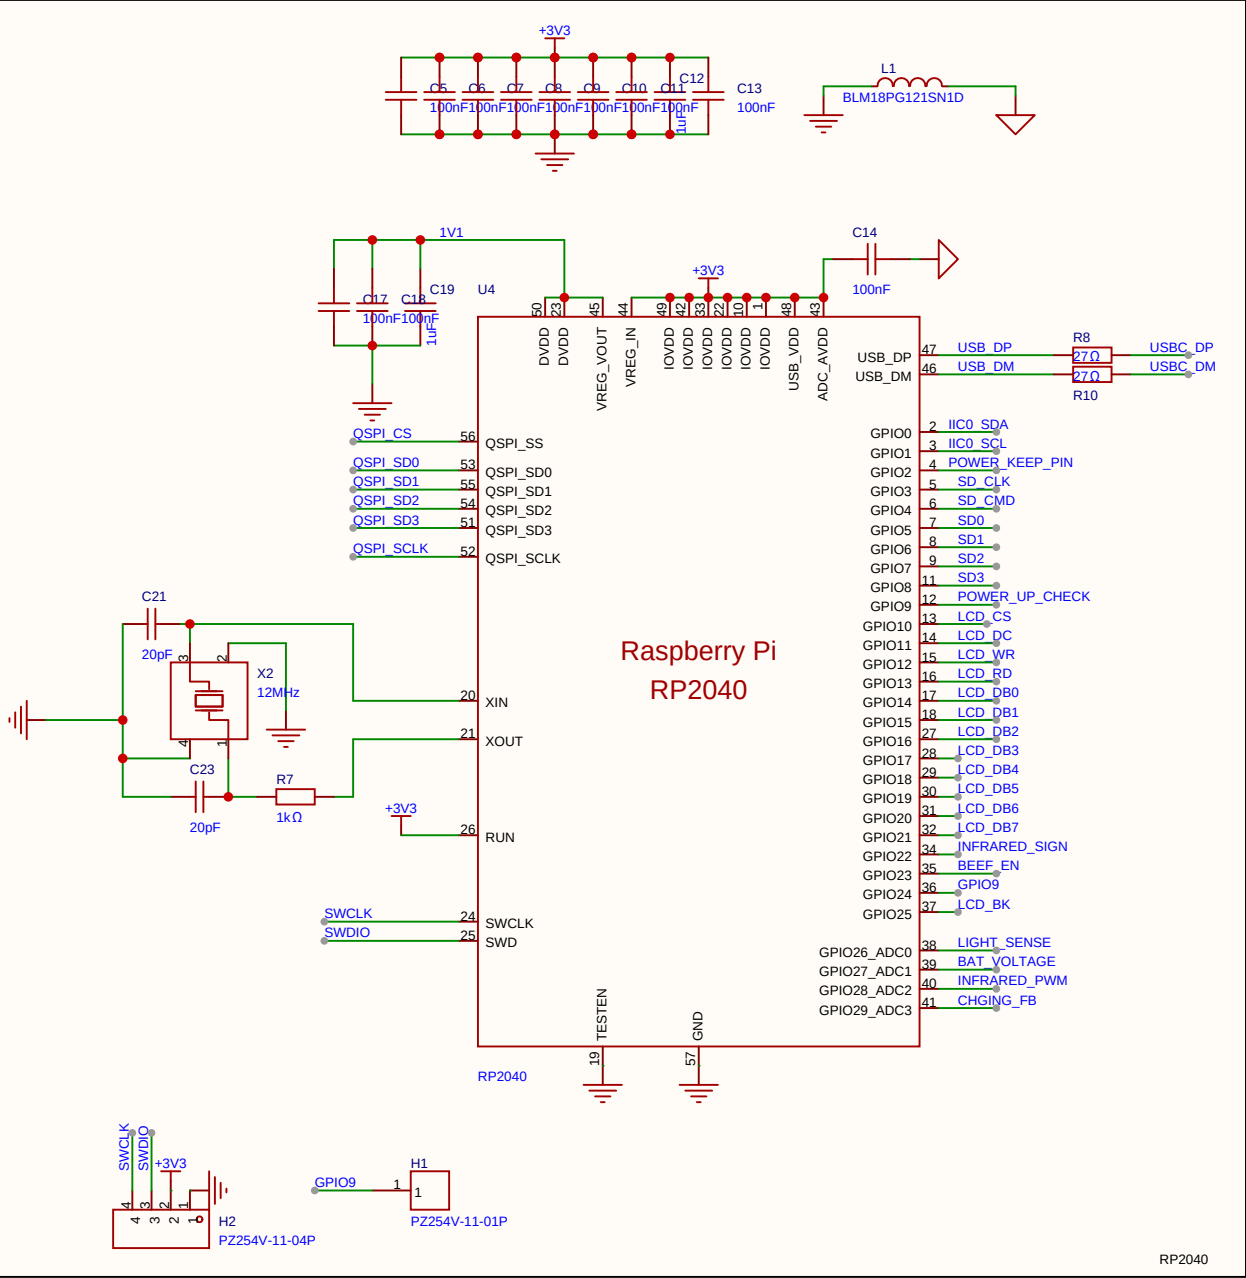


RP2040

原理图 板子 绘制 审阅	Crystal_Mouse		创建日期	2026-03-23
	Board1		更新日期	2026-05-20
			图页	mcu
			arm2d_demo_board_v1.2	
版本		尺寸	页 1 共 4	
V1.0		A4	嘉立创EDA	

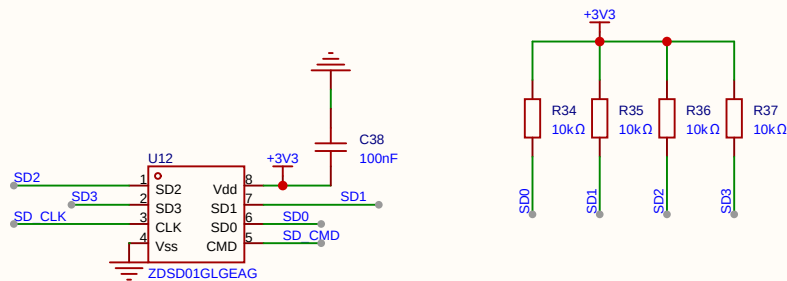

原理图	Crystal_Mouse			创建日期	2026-03-20
				更新日期	2026-05-10
板子	Board1			图页	sd card
绘制				arm2d_demo_board_v1.2	
审阅					
	版本	尺寸	页 3 共 4		
		V1.0	A4	嘉立创EDA	

PIN	SYMBOL	PIN	SYMBOL
1	GND	9	RES
2	LED_K	10	DC/WR
3	LED_A	11	CS
4	VDD	12	RD
5	VDD_IO	13~28	DB0~DB15
6	SCL/DC	29	IM1
7	SDA/SDO	30	IM3/IM0
8	TE		

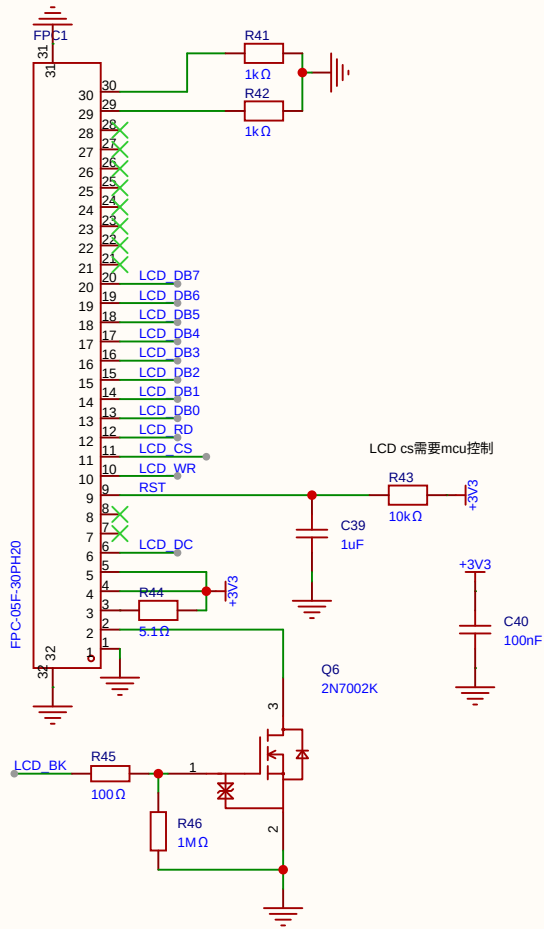

Pin.No	Symbol	Description
1	GND	Ground
2	LED_K	Backlit cathode.
3	LED_A	Backlit anode.
4	VDD	Power supply for Analog.
5	VDD_IO	Logic Operating Voltage
6	SCL/DC	Serial clock input for SPI interface.
7	SDA/SDO	Serial data input/output bidirectional pin for SPI Interface.
8	TE	Tearing effect output pin to synchronize MPU to frame writing
9	RES	LCM Reset pin.
10	DC/WR	8080- I /8080- II system (WRX): Serves as a write signal and writes data at the rising edge. 4-line system (D/CX): Serves as command or parameter select.
11	CS	Chip select pin ("Low" enable)
12	RD	Serves as a read signal and MCU read data at the rising edge.
13-28	DB0-DB15	16-bit parallel bi-directional data bus for MCU system and RGB interface mode
29	IM1	MPU Parallel interface bus and serial interface select If use RGB Interface must select serial interface. Fix this pin at IOVCC or GND.
30	IM3/IM0	

原理图	Crystal_Mouse			创建日期	2026-03-20
				更新日期	2026-05-11
板子	Board1			图页	lcd_8080
绘制					
审阅	arm2d_demo_board_v1.2				
		版本	尺寸	页	4 共 4
		V1.0	A4	嘉立创EDA	