
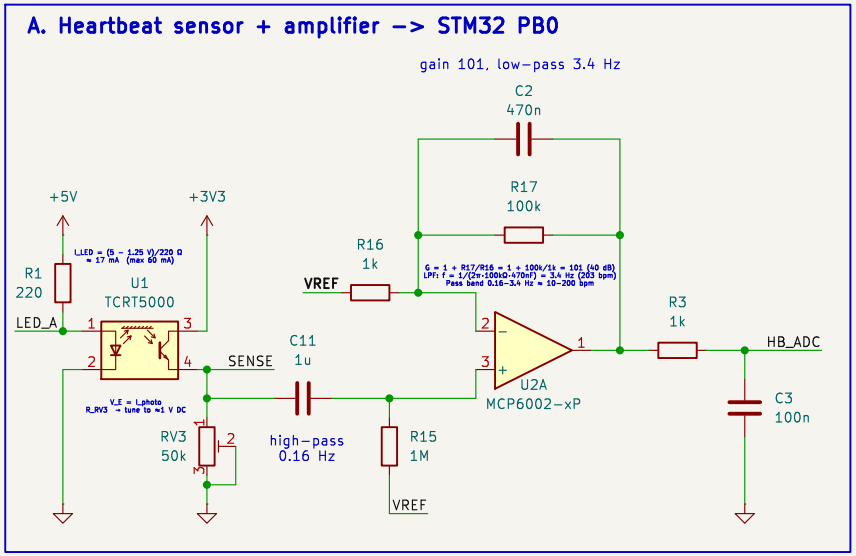


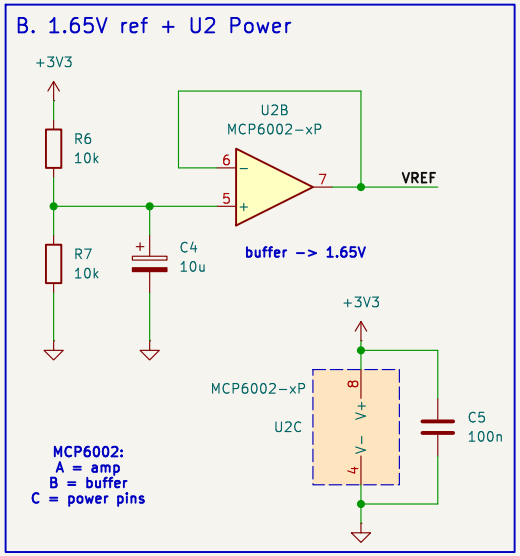


Rev C notes

Rev C (24 Oct 2026): heartbeat only

Removed: heater switch (Q1, R8–R12, C6, J2 XT30, J3), thermistors + overheat cutoff (U5 LM393, TH1, TH2, R13, R18, RV2, C7–C9, J4) and the GNDPWR net tie (NT1). Box heating is handled by the other experiment.

Board now needs only +5V, +3V3, GND from the FC. Signals to FC: PB0 = HB_ADC, PD12/PD13 = I2C4.

Bring-up:
1. Power it: U2 pin 7 (VREF) = 1.65 V
2. Finger on TCRT5000: ~1 Hz wave on HB_ADC
3. Turn RV3 so SENSE sits near 1 V DC
4. I2C scan: 0x40, 0x76, 0x57

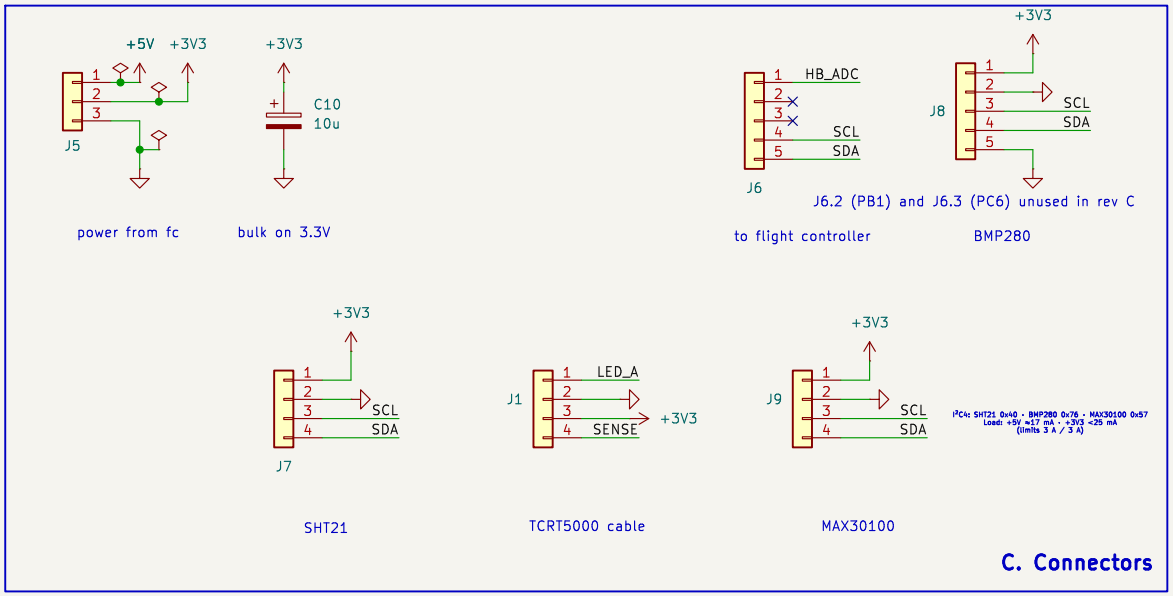

SnailPulse Project for Orbita 2026 Season

All the math is in docs/SnailPulse_Math.md on the repo

Rev C: heartbeat-only, heater and thermistors removed
Made by Azizbek N
find out more about this project in this repo:
https://github.com/notazizelse/Orbita26
NazarX

Sheet: /
File: Orbita26.kicad_sch

Title: SnailPulse for International Space Competition Orbita

Size: A4	Date: 2026-10-24	Rev: C
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1