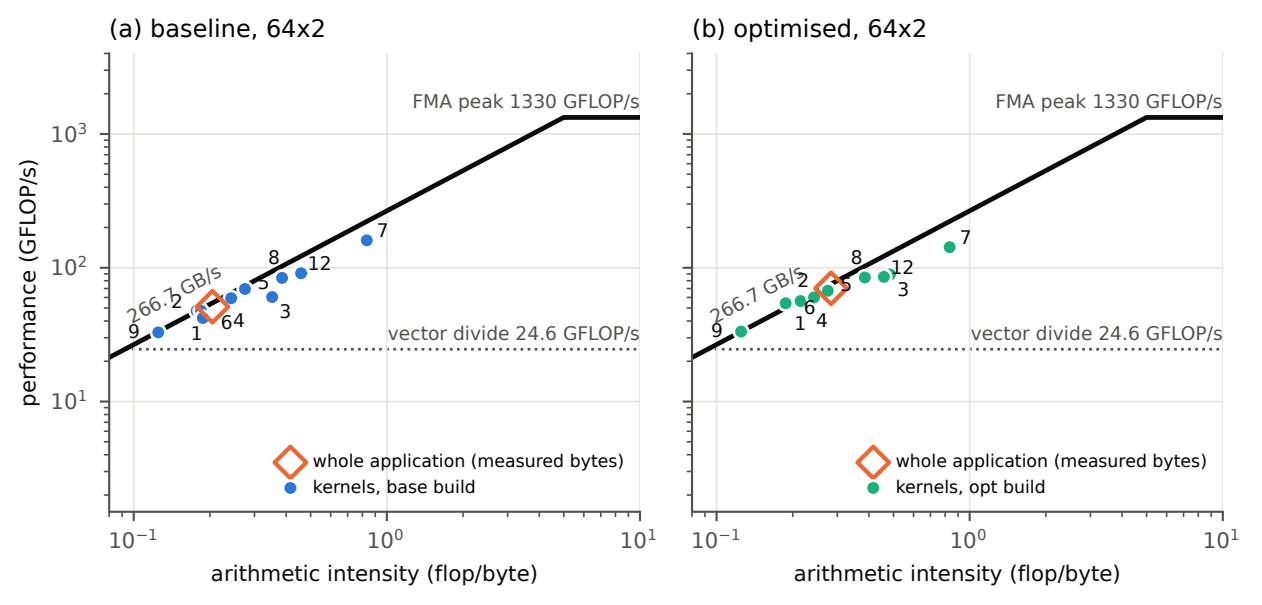
(a) baseline, 64x2
(b) optimised, 64x2
FMA peak 1330 GFLOP/s
vector divide 24.6 GFLOP/s
266.7 GB/s
whole application (measured bytes)
kernels, base build
kernels, opt build
performance (GFLOP/s)
arithmetic intensity (flop/byte)
10^1
10^2
10^3
10^{-1}
10^0
10^1