




VREG 4V-36V ----> 5V

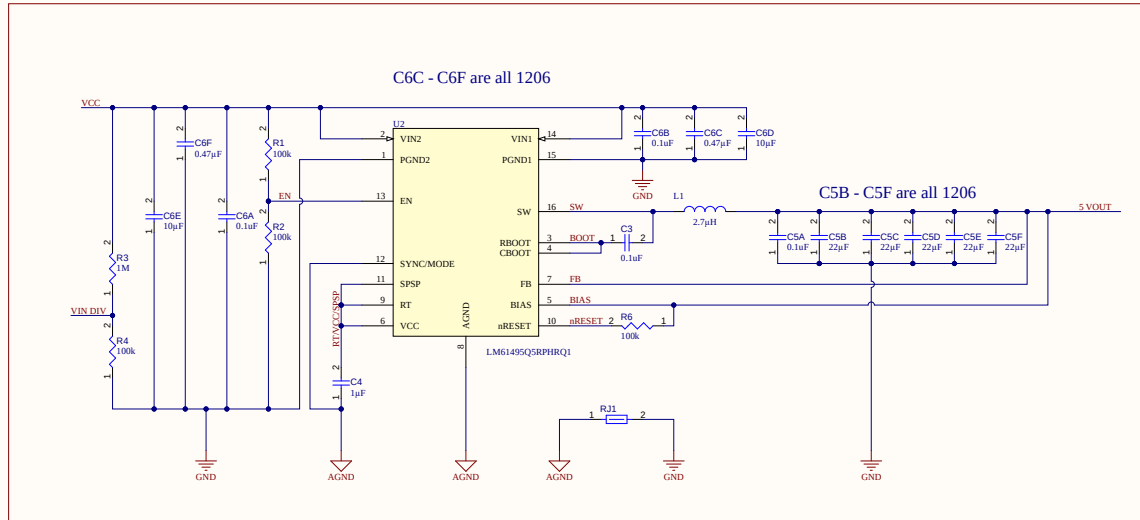


Pins/Headers

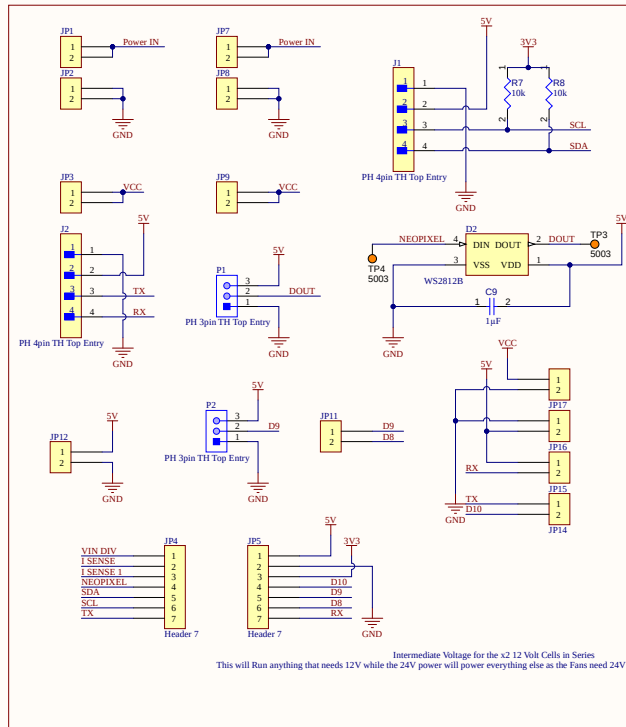


Intermediate Voltage for the x2 12 Volt Cells in Series
This will Run anything that needs 12V while the 24V power will power everything else as the Fans need 24V

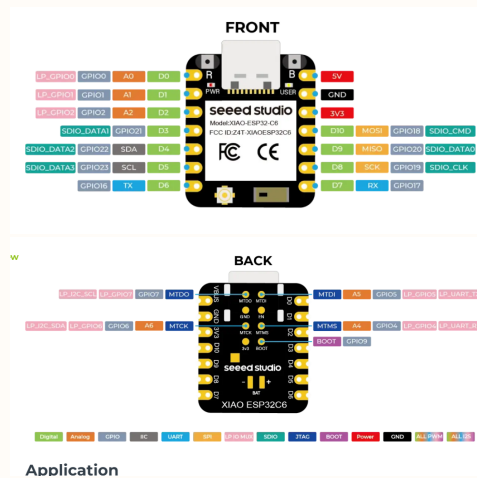


I am using the Seeed Studio XIAO-ESP32-C6 for this, but any other MCU with that has the same pinnout should work

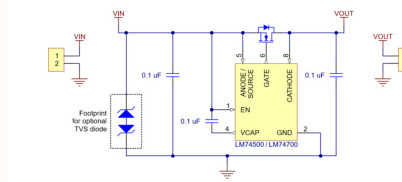


RVP

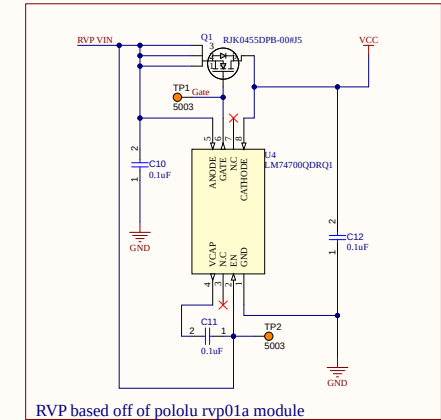

Current Sense IN

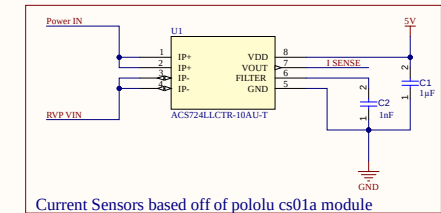

Current Sense OUT

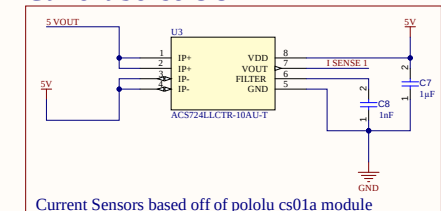

Title		
Size C	Number	Revision
Date: 9/28/2026	Sheet of	
File: C:\Users\...Proot test board.SchDoc	Drawn By:	