CASE STUDY: THE LINUX OPERATING SYSTEM

History

- Linux is a modem, free operating system based on UNIX standards.
- First developed as a small but self-contained kernel in 1991 by Linus Torvalds, with the major design goal of UNIX compatibility.
- Its history has been one of collaboration by many users from all around the world, corresponding almost exclusively over the Internet.
- It has been designed to run efficiently and reliably on common PC hardware, but also runs on a variety
 of other platforms.
- The core Linux operating system kernel is entirely original, but it can run much existing free UNIX software, resulting in an entire UNIX-compatible operating system free from proprietary code.

The Linux Kernel

- Version 0.01 (May 1991) had no networking, ran only on 80386-compatible Intel processors and on PC hardware, had extremely limited device-drive support, and supported only the Minix file system.
- Linux 1.0 (March 1994) included these new features:
 - Support for UNIX's standard TCP/IP networking protocols
 - BSD-compatible socket interface for networking programming
 - Device-driver support for running IP over an Ethernet
 - Enhanced file system
 - Support for a range of SCSI controllers for high-performance disk access
 - Extra hardware support
- Version 1.2 (March 1995) was the final PC-only Linux kernel.

Linux 2.0

- Released in June 1996, 2.0 added two major new capabilities:
 - Support for multiple architectures, including a fully 64-bit native Alpha port.
 - Support for multiprocessor architectures
- Other new features included:
 - Improved memory-management code
 - Improved TCP/IP performance
 - Support for internal kernel threads, for handling dependencies between loadable modules, and for automatic loading of modules on demand.
 - Standardized configuration interface
- Available for Motorola 68000-series processors, Sun Sparc systems, and for PC and PowerMac systems.

The Linux System

Linux uses many tools developed as part of Berkeley's BSD operating system, MIT's X Window

- System, and the Free Software Foundation's GNU project.
- The min system libraries were started by the GNU project, with improvements provided by the Linux community.
- Linux networking-administration tools were derived from 4.3BSD code; recent BSD derivatives such as Free BSD have borrowed code from Linux in return.
- The Linux system is maintained by a loose network of developers collaborating over the Internet, with a small number of public ftp sites acting as de facto standard repositories.

Linux Distributions

- Standard, precompiled sets of packages, or distributions, include the basic Linux system, system
 installation and management utilities, and ready-to-install packages of common UNIX tools.
- The first distributions managed these packages by simply providing a means of unpacking all the files into the appropriate places; modern distributions include advanced package management.
- Early distributions included SLS and Slackware. Red Hat and Debian are popular distributions from commercial and non-commercial sources, respectively.
- The RPM Package file format permits compatibility among the various Linux distributions.

Linux Licensing

- The Linux kernel is distributed under the GNU General Public License (GPL), the terms of which
 are set out by the Free Software Foundation.
- Anyone using Linux, or creating their own derivative of Linux, may not make the derived product proprietary; software released under the GPL may not be redistributed as a binary-only product.

Design Principles

- Linux is a multiuser, multitasking system with a full set of UNIX-compatible tools.
- Its file system adheres to traditional UNIX semantics, and it fully implements the standard UNIX networking model.
- · Main design goals are speed, efficiency, and standardization.
- Linux is designed to be compliant with the relevant POSIX documents; at least two Linux distributions have achieved official POSIX certification.
- The Linux programming interface adheres to the SVR4 UNIX semantics, rather than to BSD behaviour

Components of a Linux System

- Like most UNIX implementations, Linux is composed of three main bodies of code; the most
 important distinction between the kernel and all other components.
- · The kernel is responsible for maintaining the important abstractions of the operating system.
 - o Kernel code executes in kernel mode with full access to all the physical resources of the

- computer.
- All kernel code and data structures are kept in the same single address space.
- The system libraries define a standard set of functions through which applications interact with the kernel, and which implement much of the operating-system functionality that does not need the full privileges of kernel code.

· The system utilities perform individual specialized management tasks.

Kernel Modules

- Sections of kernel code that can be compiled, loaded, and unloaded independent of the rest of the kernel.
- A kernel module may typically implement a device driver, a file system, or a networking protocol.
- The module interface allows third parties to write and distribute, on their own terms, device drivers
 or file systems that could not be distributed under the GPL.
- Kernel modules allow a Linux system to be set up with a standard, minimal kernel, without any
 extra device drivers built in.
- Three components to Linux module support:
 - o module management
 - o driver registration
 - o conflict resolution

Module Management

- Supports loading modules into memory and letting them talk to the rest of the kernel.
- Module loading is split into two separate sections:
 - Managing sections of module code in kernel memory
 - Handling symbols that modules are allowed to reference
- The module requestor manages loading requested, but currently unloaded, modules; it also regularly queries the kernel to see whether a dynamically loaded module is still in use, and will unload it when it is no longer actively needed.

Driver Registration

- · Allows modules to tell the rest of the kernel that a new driver has become available.
- The kernel maintains dynamic tables of all known drivers, and provides a set of routines to allow drivers to be added to or removed from these tables at any time.
- Registration tables include the following items:
 - Device drivers
 - File systems
 - Network protocols
 - Binary format

Conflict Resolution

 A mechanism that allows different device drivers to reserve hardware resources and to protect those resources from accidental use by another driver

- · The conflict resolution module aims to:
 - Prevent modules from clashing over access to hardware resources
 - Prevent autoprobes from interfering with existing device drivers
 - Resolve conflicts with multiple drivers trying to access the same hardware

Process Management

- UNIX process management separates the creation of processes and the running of a new program into two distinct operations.
 - The fork system call creates a new process.
 - A new program is run after a call to execve.
- Under UNIX, a process encompasses all the information that the operating system must maintain track the context of a single execution of a single program.
- Under Linux, process properties fall into three groups: the process's identity, environment, and context.

Process Identity

- Process ID (PID). The unique identifier for the process; used to specify processes to the
 operating system when an application makes a system call to signal, modify, or wait for
 another process.
- Credentials. Each process must have an associated user ID and one or more group IDs that determine the process's rights to access system resources and files.
- Personality. Not traditionally found on UNIX systems, but under Linux each process has an
 associated personality identifier that can slightly modify the semantics of certain system calls.
 Used primarily by emulation libraries to request that system calls be compatible with certain
 specific flavors of UNIX.

Process Environment

- The process's environment is inherited from its parent, and is composed of two null-terminated vectors:
 - The argument vector lists the command-line arguments used to invoke the running program; conventionally starts with the name of the program itself
 - The environment vector is a list of "NAME=VALUE" pairs that associates named environment variables with arbitrary textual values.
- Passing environment variables among processes and inheriting variables by a process's children
 are flexible means of passing information to components of the user mode system software.
- The environment-variable mechanism provides a customization of the operating system that can be set on a per-process basis, rather than being configured for the system as a whole.

Process Context

- The (constantly changing) state of a running program at any point in time.
- The scheduling context is the most important part of the process context; it is the information that
 the scheduler needs to suspend and restart the process.
- The kernel maintains accounting information about the resources currently being consumed by each process, and the total resources consumed by the process in its lifetime so far.
- The file table is an array of pointers to kernel file structures. When making file I/O system calls, processes refer to files by their index into this table.
- Whereas the file table lists the existing open files, the file-system context applies to requests to
 open new files. The current root and default directories to be used for new file searches are stored
 here.
- The signal-handler table defines the routine in the process's address space to be called when specific signals arrive.
- The virtual-memory context of a process describes the full contents of the its private address space.

Processes and Threads

- Linux uses the same internal representation for processes and threads; a thread is simply a new process that happens to share the same address space as its parent.
- A distinction is only made when a new thread is created by the clone system call.
 - o fork creates a new process with its own entirely new process context
 - clone creates a new process with its own identity, but that is allowed to share the data structures of its parent
- Using clone gives an application fine-grained control over exactly what is shared between two
 threads.

Scheduling

- The job of allocating CPU time to different tasks within an operating system.
- While scheduling is normally thought of as the running and interrupting of processes, in Linux, scheduling also includes the running of the various kernel tasks.
- Running kernel tasks encompasses both tasks that are requested by a running process and tasks that execute internally on behalf of a device driver.

Kernel Synchronization

- A request for kernel-mode execution can occur in two ways:
 - A running program may request an operating system service, either explicitly via a system call, or implicitly, for example, when a page fault occurs.
 - A device driver may deliver a hardware interrupt that causes the CPU to start executing a kernel-defined handler for that interrupt.
- · Kernel synchronization requires a framework that will allow the kernel's critical sections to run

without interruption by another critical section


- Linux uses two techniques to protect critical sections:
- Normal kernel code is no preemptible

✓ when a time interrupt is received while a process is executing a kernel system service routine, the kernel's **need_resched** flag is set so that the scheduler will run once the system call has completed and control is about to be returned to user mode.

- 2. The second technique applies to critical sections that occur in an interrupt service routines.
 - By using the processor's interrupt control hardware to disable interrupts during a critical section, the kernel guarantees that it can proceed without the risk of concurrent access of shared data structures.
 - To avoid performance penalties, Linux's kernel uses a synchronization architecture that allows long critical sections to run without having interrupts disabled for the critical section's entire duration.
 - Interrupt service routines are separated into a top half and a bottom half.
 - The top half is a normal interrupt service routine, and runs with recursive interrupts disabled.
 - The bottom half is run, with all interrupts enabled, by a miniature scheduler that ensures that bottom halves never interrupt themselves.
 - This architecture is completed by a mechanism for disabling selected bottom halves while executing normal, foreground kernel code.

Interrupt Protection Levels

- Each level may be interrupted by code running at a higher level, but will never be interrupted by code running at the same or a lower level.
- User processes can always be pre-empted by another process when a time-sharing scheduling interrupt occurs.

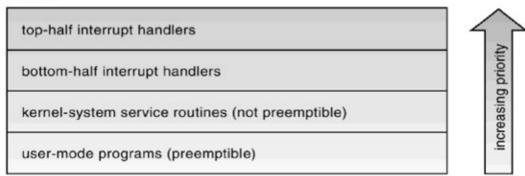

Process Scheduling

- Linux uses two process-scheduling algorithms:
 - o A time-sharing algorithm for fair pre-emptive scheduling between multiple processes
 - A real-time algorithm for tasks where absolute priorities are more important than fairness
 - A process's scheduling class defines which algorithm to apply.

- For time-sharing processes, Linux uses a prioritized, credit-based algorithm.
 - The crediting rule factors in both the process's history and its priority.
 - This crediting system automatically prioritizes interactive or I/O-bound processes.
- Linux implements the FIFO and round-robin real-time scheduling classes; in both cases, each
 process has a priority in addition to its scheduling class.
 - The scheduler runs the process with the highest priority; for equal-priority processes, it runs the longest-waiting one FIFO processes continue to run until they either exit or block
 - A round-robin process will be pre-empted after a while and moved to the end of the scheduling queue, so that round robin processes of equal priority automatically time- share between themselves.


Symmetric Multiprocessing

- Linux 2.0 was the first Linux kernel to support SMP hardware; separate processes or threads can
 execute in parallel on separate processors.
- To preserve the kernel's no preemptible synchronization requirements, SMP imposes the restriction, via a single kernel spinlock, that only one processor at a time may execute kernelmode code.

Memory Management

- Linux's physical memory-management system deals with allocating and freeing pages, groups of pages, and small blocks of memory.
- It has additional mechanisms for handling virtual memory, memory mapped into the address space of running processes.

Splitting of Memory in a Buddy Heap

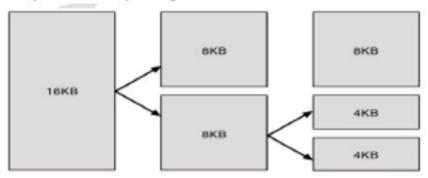

Managing Physical Memory

- The page allocator allocates and frees all physical pages; it can allocate ranges of physically contiguous pages on request.
- · The allocator uses a buddy-heap algorithm to keep track of available physical pages.
 - Each allocatable memory region is paired with an adjacent partner.
 - Whenever two allocated partner regions are both freed up, they are combined to form a larger region.
 - o If a small memory request cannot be satisfied by allocating an existing small free region,

then a larger free region will be subdivided into two partners to satisfy the request.

Memory allocations in the Linux kernel occur either statically (drivers reserve a contiguous area
of memory during system boot time) or dynamically (via the page allocator).

Virtual Memory

- The VM system maintains the address space visible to each process: It creates pages of virtual memory on demand, and manages the loading of those pages from disk or their swapping back out to disk as required.
- The VM manager maintains two separate views of a process's address space:
 - A logical view describing instructions concerning the layout of the address space. The
 address space consists of a set of nonoverlapping regions, each representing a continuous,
 page-aligned subset of the address space.
 - A physical view of each address space which is stored in the hardware page tables for the process.
- Virtual memory regions are characterized by:
 - The backing store, which describes from where the pages for a region come; regions are usually backed by a file or by nothing (demand-zero memory)
 - The region's reaction to writes (page sharing or copy-onwrite).
- The kernel creates a new virtual address space
 - 1. When a process runs a new program with the exec system call
 - 2. Upon creation of a new process by the fork system call
- On executing a new program, the process is given a new, completely empty virtual-address space;
 the program loading routines populate the address space with virtual memory regions.
- Creating a new process with fork involves creating a complete copy of the existing process's virtual address space.
 - The kernel copies the parent process's VMA descriptors, then creates a new set of page tables for the child.
 - The parent's page tables are copies directly into the child's, with the reference count of each page covered being incremented.
 - After the fork, the parent and child share the same physical pages of memory in their address spaces.
- The VM paging system relocates pages of memory from physical memory out to disk when the memory is needed for something else.
- The VM paging system can be divided into two sections:
 - The pageout-policy algorithm decides which pages to write out to disk, and when.
 - The paging mechanism actually carries out the transfer, and pages data back into physical memory as needed.
- The Linux kernel reserves a constant, architecture dependent region of the virtual address space of every process for its own internal use.
- This kernel virtual-memory area contains two regions:


 A static area that contains page table references to every available physical page of memory in the system, so that there is a simple translation from physical to virtual addresses when running kernel code.

 The reminder of the reserved section is not reserved for any specific purpose; its page-table entries can be modified to point to any other areas of memory.

Executing and Loading User Programs

- Linux maintains a table of functions for loading programs; it gives each function the opportunity to try loading the given file when an exec system call is made.
- The registration of multiple loader routines allows Linux to support both the ELF and a.out binary formats.
- Initially, binary-file pages are mapped into virtual memory; only when a program tries to access a
 given page will a page fault result in that page being loaded into physical memory.
- An ELF-format binary file consists of a header followed by several page-aligned sections; the ELF loader works by reading the header and mapping the sections of the file into separate regions of virtual memory.

Memory Layout for ELF Programs

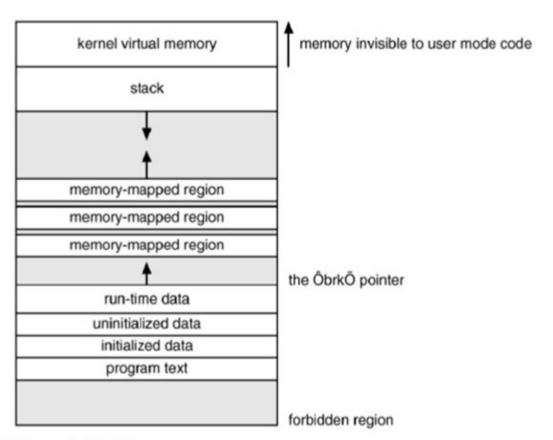

Static and Dynamic Linking

A program whose necessary library functions are embedded directly in the program's executable

- binary file is statically linked to its libraries.
- The main disadvantage of static linkage is that every program generated must contain copies of exactly the same common system library functions.

Dynamic linking is more efficient in terms of both physical memory and disk-space usage because
it loads the system libraries into memory only once.


File Systems

- To the user, Linux's file system appears as a hierarchical directory tree obeying UNIX semantics.
- Internally, the kernel hides implementation details and manages the multiple different file systems
 via an abstraction layer, that is, the virtual file system (VFS).
- The Linux VFS is designed around object-oriented principles and is composed of two components:
 - A set of definitions that define what a file object is allowed to look like
 - ✓ The inode-object and the file-object structures represent individual files
 - ✓ the file system object represents an entire file system
 - A layer of software to manipulate those objects.

The Linux Ext2fs File System

- Ext2fs uses a mechanism similar to that of BSD Fast File System (ffs) for locating data blocks belonging to a specific file.
- The main differences between ext2fs and ffs concern their disk allocation policies.
 - In ffs, the disk is allocated to files in blocks of 8Kb, with blocks being subdivided into fragments of 1Kb to store small files or partially filled blocks at the end of a file.
 - Ext2fs does not use fragments; it performs its allocations in smaller units. The default block size on ext2fs is 1Kb, although 2Kb and 4Kb blocks are also supported.
 - Ext2fs uses allocation policies designed to place logically adjacent blocks of a file into physically adjacent blocks on disk, so that it can submit an I/O request for several disk blocks as a single operation.

Ext2fs Block-Allocation Policies

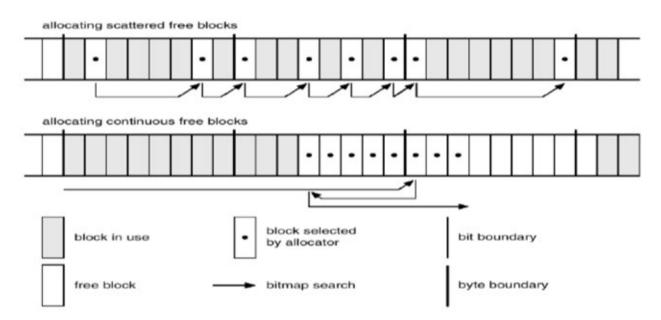

The Linux Proc File System


 The proc file system does not store data, rather, its contents are computed on demand according to user file I/O requests.

- proc must implement a directory structure, and the file contents within; it must then define a
 unique and persistent inode number for each directory and files it contains.
 - It uses this inode number to identify just what operation is required when a user tries to read from a particular file inode or perform a lookup in a particular directory inode.
 - When data is read from one of these files, proc collects the appropriate information, formats it into text form and places it into the requesting process's read buffer.


Input and Output

- The Linux device-oriented file system accesses disk storage through two caches:
 - O Data is cached in the page cache, which is unified with the virtual memory system
 - Metadata is cached in the buffer cache, a separate cache indexed by the physical disk block.
- Linux splits all devices into three classes:
 - block devices allow random access to completely independent, fixed size blocks of data
 - character devices include most other devices; they don't need to support the functionality of regular files.
 - network devices are interfaced via the kernel's networking Subsystem

Device-driver Block Structure



user application

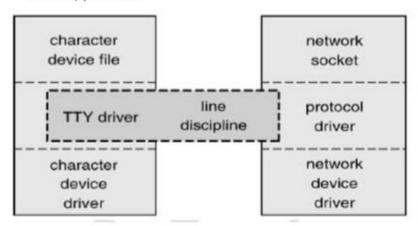

Block Devices

- Provide the main interface to all disk devices in a system.
- The block buffer cache serves two main purposes:
 - it acts as a pool of buffers for active I/O
 - it serves as a cache for completed I/O
- The request manager manages the reading and writing of buffer contents to and from a block device driver.

Character Devices

- A device driver which does not offer random access to fixed blocks of data.
- A character device driver must register a set of functions which implement the driver's various file I/O operations.
- The kernel performs almost no pre-processing of a file read or write request to a character device, but simply passes on the request to the device.
- The main exception to this rule is the special subset of character device drivers which implement terminal devices, for which the kernel maintains a standard interface.

Inter process Communication

Like UNIX, Linux informs processes that an event has occurred via signals.

- There is a limited number of signals, and they cannot carry information: Only the fact that a signal
 occurred is available to a process.
- The Linux kernel does not use signals to communicate with processes with are running in kernel mode, rather, communication within the kernel is accomplished via scheduling states and wait.
 Queue structures.

Passing Data Between Processes

- The pipe mechanism allows a child process to inherit a communication channel to its parent, data written to one end of the pipe can be read as the other.
- Shared memory offers an extremely fast way of communicating; any data written by one process
 to a shared memory region can be read immediately by any other process that has mapped that
 region into its address space.
- To obtain synchronization, however, shared memory must be used in conjunction with another Inter process communication mechanism.

Shared Memory Object

- The shared-memory object acts as a backing store for shared-memory regions in the same way as
 a file can act as backing store for a memory-mapped memory region.
- Shared-memory mappings direct page faults to map in pages from a persistent shared-memory object.
- Shared-memory objects remember their contents even if no processes are currently mapping them into virtual memory.

Network Structure

- · Networking is a key area of functionality for Linux.
 - It supports the standard Internet protocols for UNIX to UNIX communications.
 - It also implements protocols native to nonUNIX operating systems, in particular, protocols used on PC networks, such as Appletalk and IPX.
- Internally, networking in the Linux kernel is implemented by three layers of software:
 - o The socket interface
 - Protocol drivers

- Network device drivers
- The most important set of protocols in the Linux networking system is the internet protocol suite.
 - It implements routing between different hosts anywhere on the network.
 - On top of the routing protocol are built the UDP, TCP and ICMP protocols

Security

- The pluggable authentication modules (PAM) system is available under Linux.
- PAM is based on a shared library that can be used by any system component that needs to authenticate users.
- Access control under UNIX systems, including Linux, is performed through the use of unique numeric identifiers (uid and gid).
- Access control is performed by assigning objects a protections mask, which specifies which access
 modes—read, write, or execute—are to be granted to processes with owner, group, or world
 access.
- Linux augments the standard UNIX setuid mechanism in two ways:
 - It implements the POSIX specification's saved user-id mechanism, which allows a process to repeatedly drop and reacquire its effective uid.
 - It has added a process characteristic that grants just a subset of the rights of the effective uid.
- Linux provides another mechanism that allows a client to selectively pass access to a single file to some server process without granting it any other privileges.

Device-driver Block Structure

