

Stepper Motor NEMA 17

This document describes mechanical and electrical specifications for PBC Linear stepper motors; including standard, hollow, and extended shaft variations.




Standard shaft motor shown.

Phases	2
Steps/Revolution	200
Step Accuracy	±5%
Shaft Load	20,000 Hours at 1000 RPM
Axial	25 N (5.6 lbs.) Push 65 N (15 lbs.) Pull
Radial	29 N (6.5 lbs.) At Flat Center
IP Rating	40
Approvals	RoHS
Operating Temp	-20° C to +40° C
Insulation Class	B, 130° C
Insulation Resistance	100 MegOhms


Description	Length	Mounted Rated Current	Mounted Holding Torque	Winding Ohms	mH	Detent Torque	Rotor Inertia	Motor Weight
(Stack)	"L" Max	Amps	Nm Typ. oz-in Typ.	±10% @ 20°C Typ.		mNm oz-in	g cm ² oz-in ²	kg lbs
Single	39.8 mm (1.57 in)	2	0.48 68	1.04 2.2		15 2.1	57 0.31	0.28 0.62
Double	48.3 mm (1.90 in)	2	0.63 89	1.3 2.9		25 3.5	82 0.45	0.36 0.79
Triple	62.8 mm (2.47 in)	2	0.83 120	1.49 3.8		30 4.2	123 0.67	0.6 1.3

*All standard motors have plug connector. Consult factory for other options.

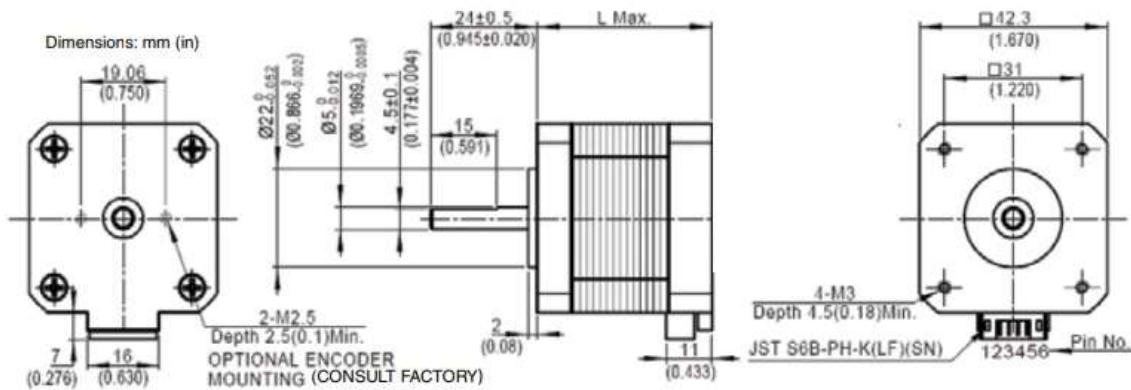

Standard shaft dimensions shown. All other dimensions apply to hollow and extended shaft options.

Dimensions: mm (in)
4 Lead Connector, PBC Part#6200490
(Consult factory for optional motor connectors)

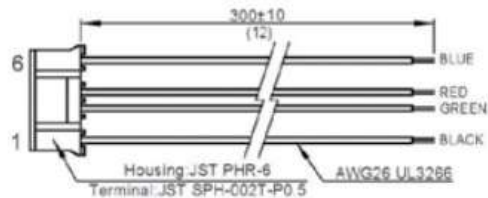

+1.815.389.5600 • pbclinear.com



Ball Screws




Lead Screws




Compact Series

NEMA 17 Stepper Motor


*Performance curves apply to continuous duty cycles.
Consult factory for intermittent cycles or other voltages.

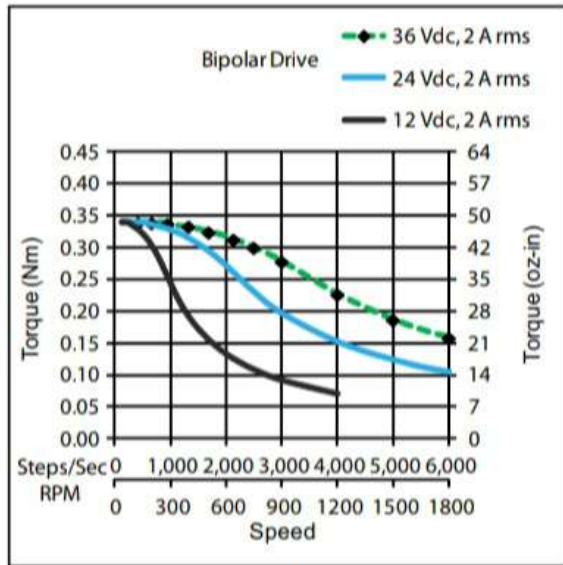

Single Stack

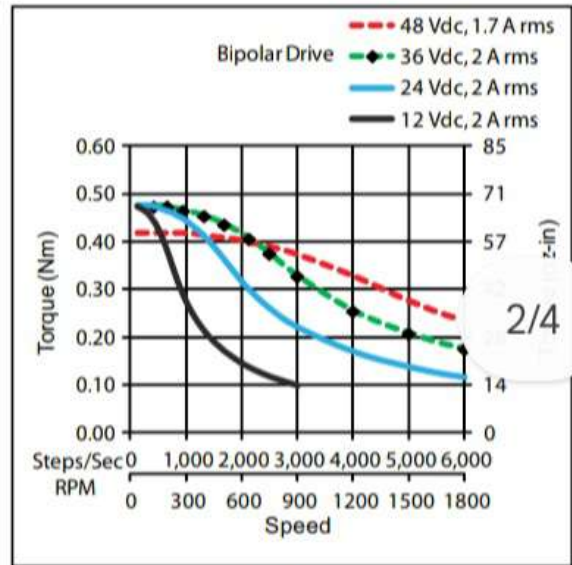

Double Stack

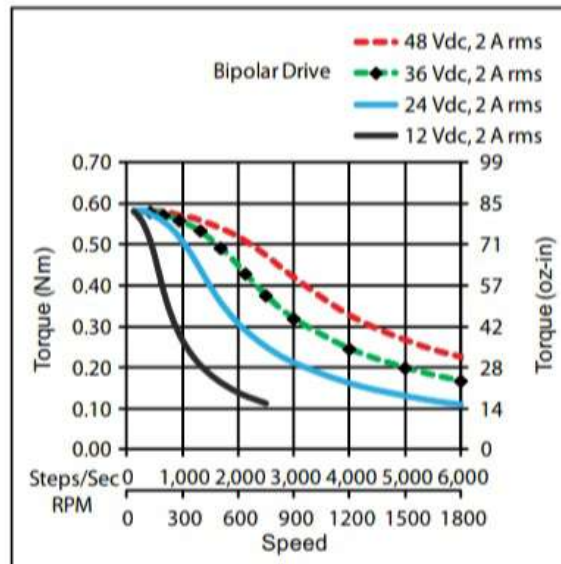

Triple Stack