
DENER MACHINERY · SOLD & SERVICED IN CANADA BY NOVOTECH

FIBER LASER CUTTING MACHINES

SMART FIBER LASERS — CLOSED, SEMI-CLOSED & OPEN TYPES · GFL FIBER LASERS WITH PALLET CHANGER · 3 KW TO 40 KW LASER SOURCES





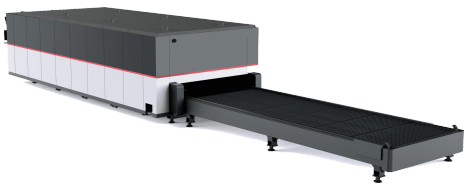





Turkey
MADE IN TURKEY

11
MACHINE FAMILIES

1-Year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

NovoTech Machine Tools Inc.
1365 Mid-Way Blvd, 26, Mississauga, ON L5T 2J5, Canada
NovoTechMachineTools.com | info@NovoTechMachineTools.com | +1 647 526 5510

DENER MACHINERY BY NOVOTECH

CONTENTS

SMART FIBER LASER SERIES

Smart Fiber Laser Cutting Machine Smart Series 04
Smart Fiber Laser — Closed Type Series Smart Closed Type 05
Smart Fiber Laser — Semi-Closed Type Series Smart Semi-Closed 06
Smart Fiber Laser — Open Type Series Smart Open Type 07
Smart Series — Quality Components Smart Components 08

GFL FIBER LASER SERIES

GFL Fiber Laser Cutting Machine GFL Series 09
GFL Fiber Laser — Technical Specifications GFL 3015 - 6020 10
GFL Series — Equipment GFL Equipment 11

CUTTING HEAD, SOFTWARE & SAFETY

Laser Cutting Head Laser Cutting Head 12
CypNest Nesting Software CypNest Software 13
Ease of Use & Safety Ease of Use & Safety 14

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR DENER MACHINERY

Sales, installation, parts and technical support across Canada

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario. Every machine in this catalogue is built by Dener Makina and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

DENER MAKINA · KAYSERI, TURKEY

ABOUT THE MANUFACTURER

Dener Makina was founded in 1974 in Kayseri, Turkey. Since 2000 the company has concentrated on CNC sheet-metal processing machines, building guillotine shears, hydraulic, ball-screw and servo-electric press brakes, plasma cutting machines and fiber laser cutting machines. In 2016 Dener made a major investment, expanding to 155,000 m² (1,670,000 sq ft) of factory buildings on its campus in the İncesu Organized Industrial Zone. With more than half a century of experience, a skilled workforce and a multinational R&D centre, Dener is a leading producer of high-value sheet-metal and metal-cutting machinery.



Dener production campus, Kayseri

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment.

SMART SERIES · 2D SHEET-METAL FIBER LASER CUTTING · 3 KW TO 40 KW

SMART FIBER LASER CUTTING MACHINE



MODEL **Smart Laser 6020 · 12 kW** Closed-type Smart fiber laser with pallet exchange table



Open front: cutting area, CNC control unit and remote handset

DESIGN ADVANTAGES

- Precise positioning
- Optimized energy efficiency
- Ergonomic and compact design
- Advanced safety standards
- Low maintenance cost

DESIGN

Using fiber-optic technology, the Dener fiber laser achieves high-speed performance when cutting 2D sheet metal. Equipped with a range of cutting modes and a well-known fiber laser source, it handles challenging parts with ease. The well-thought-out design allows easy transport and installation, and the machine comes with user-friendly equipment. The speeds reached on the X, Y and Z axes deliver a fast return on investment combined with cutting precision. The stress-relieved, robust machine body and a bridge designed with space-frame geometry make the machine ready for high accelerations. Six pneumatic extraction compartments draw off the fumes produced during cutting, and small parts that fall through are collected in six scrap boxes on easy-to-remove wheels. The machine is prepared for connection to an extraction system that collects all cutting fumes.

RIGID, OPTIMIZED BODY STRUCTURE FOR


- High speed
- High cutting quality
- Quality components
- High technology
- Low cost

MACHINE HIGHLIGHTS

- Pallet exchange table
- Compact body
- Laser-safe protective viewing glass
- Control unit
- Scrap boxes

SMART 3015 – 12526 · FULLY ENCLOSED · DOUBLE (EXCHANGE) TABLE · 140 M/MIN

SMART FIBER LASER — CLOSED TYPE SERIES

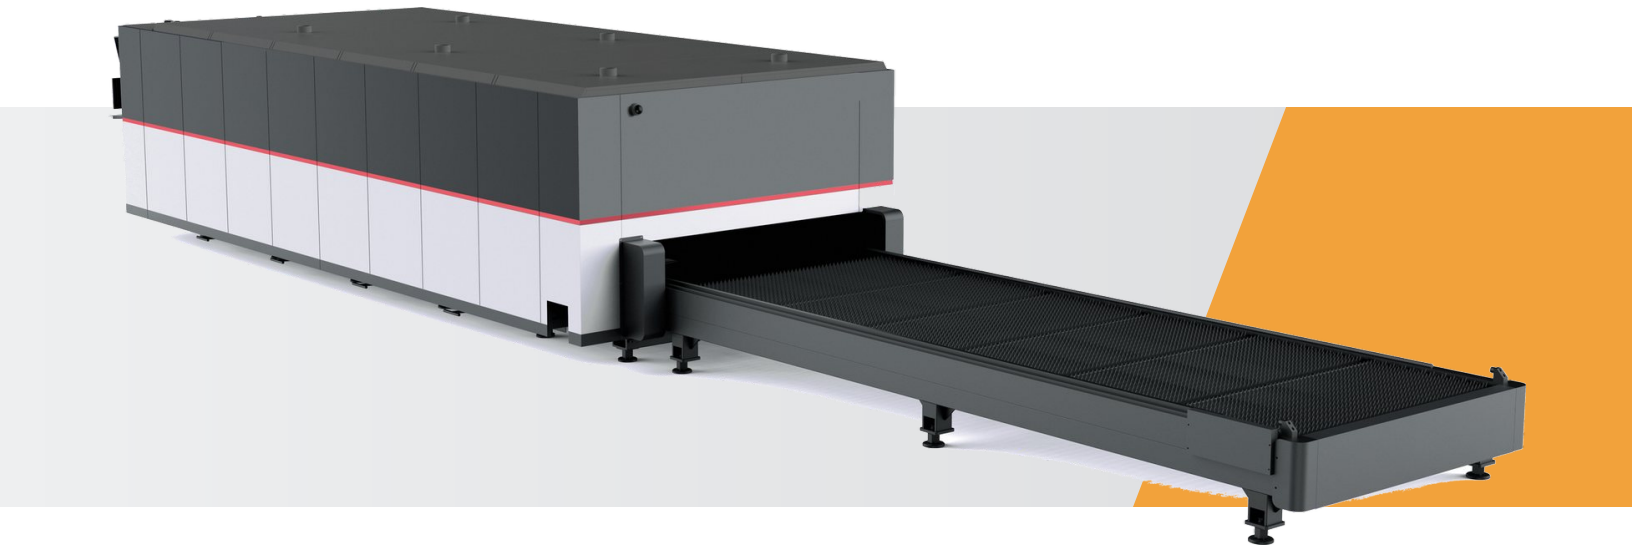

MODEL **Smart Closed Type** Fully enclosed cabin with pallet exchange table

Engineered for speed, built for value: the closed-type Smart fiber laser combines a fully enclosed cutting cabin with a double exchange table for high-speed cutting and maximum throughput.

TECHNICAL SPECIFICATIONS — CLOSED TYPE / DOUBLE TABLE

Model		Smart 3015	Smart 4020	Smart 6020	Smart 6025	Smart 8025	Smart 12526
Working area (L × W), nominal	FT	9.8 FT × 4.9 FT	13.1 FT × 6.6 FT	19.7 FT × 6.6 FT	19.7 FT × 8.2 FT	26.2 FT × 8.2 FT	41 FT × 8.5 FT
Working area (L × W), nominal	in	118.1 × 59.1	157.5 × 78.7	236.2 × 78.7	236.2 × 98.4	315 × 98.4	492.1 × 102.4
Worktable		Double (exchange)	Double (exchange)	Double (exchange)	Double (exchange)	Double (exchange)	Double (exchange)
Laser source power (options)		3 / 6 / 12 / 20 / 30 / 40 kW	3 / 6 / 12 / 20 / 30 / 40 kW	3 / 6 / 12 / 20 / 30 / 40 kW	3 / 6 / 12 / 20 / 30 / 40 kW	3 / 6 / 12 / 20 / 30 / 40 kW	3 / 6 / 12 / 20 / 30 / 40 kW
Positioning accuracy	in	±0.0012	±0.0012	±0.0012	±0.0012	±0.0012	±0.0012
Max. axis speed	ft/min	459	459	459	459	459	459
Max. acceleration		1 G	1 G	1 G	1 G	1 G	1 G

The model number gives the nominal working area (e.g. 3015 = 3000 × 1500 mm). Every table size is available with any of the listed laser source powers. Laser source powers available: 3000 W, 6000 W, 12000 W, 20000 W, 30000 W and 40000 W.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

SMART 6025 – 25040 · SEMI-CLOSED · SINGLE TABLE · LARGE-FORMAT PLATE CUTTING

SMART FIBER LASER — SEMI-CLOSED TYPE SERIES



MODEL **Smart Semi-Closed Type** Semi-closed gantry cabin travelling over a long single table



Large-format single table with enclosed gantry



Semi-closed cutting cabin

Designed for flexibility, built for productivity: the semi-closed Smart fiber laser covers very large sheet formats — up to 25 m long and 4 m wide — on a single table, with low operating costs.

TECHNICAL SPECIFICATIONS — SEMI-CLOSED TYPE / SINGLE TABLE

Model		Smart 6025	Smart 8025	Smart 12525	Smart 14035	Smart 16045	Smart 25031	Smart 25040
Working area (L × W), nominal	FT	19.7 FT × 8.2 FT	26.2 FT × 8.2 FT	41 FT × 8.2 FT	45.9 FT × 11.5 FT	52.5 FT × 14.8 FT	82 FT × 10.2 FT	82 FT × 13.1 FT
Working area (L × W), nominal	in	236.2 × 98.4	315 × 98.4	492.1 × 98.4	551.2 × 137.8	629.9 × 177.2	984.3 × 122	984.3 × 157.5
Worktable		Single	Single	Single	Single	Single	Single	Single
Laser source power (options)		3 / 6 / 12 / 20 / 30 / 40 kW	3 / 6 / 12 / 20 / 30 / 40 kW	3 / 6 / 12 / 20 / 30 / 40 kW	3 / 6 / 12 / 20 / 30 / 40 kW	3 / 6 / 12 / 20 / 30 / 40 kW	3 / 6 / 12 / 20 / 30 / 40 kW	3 / 6 / 12 / 20 / 30 / 40 kW
Positioning accuracy	in	±0.0004	±0.0004	±0.0004	±0.0004	±0.0004	±0.0004	±0.0004
Max. axis speed	ft/min	246	246	246	246	246	246	246
Max. acceleration		0.6 G	0.6 G	0.6 G	0.6 G	0.6 G	0.6 G	0.6 G

The model number gives the nominal working area (e.g. 3015 = 3000 × 1500 mm). Every table size is available with any of the listed laser source powers. Laser source powers available: 3000 W, 6000 W, 12000 W, 20000 W, 30000 W and 40000 W.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

SMART 3015 / 4020 / 6020 · OPEN TYPE · SINGLE TABLE · 3 KW OR 6 KW

SMART FIBER LASER — OPEN TYPE SERIES





Smart Open Type

Open-frame design with free access to the table

Smart Open Type

Gantry with cable carrier and side-mounted control unit

Maximum access, uncompromised performance: the open-type Smart fiber laser offers easy loading from all sides, high-speed cutting and low operating costs.

TECHNICAL SPECIFICATIONS — OPEN TYPE / SINGLE TABLE

Model		Smart 3015	Smart 4020	Smart 6020
Working area (L × W), nominal	FT	9.8 FT × 4.9 FT	13.1 FT × 6.6 FT	19.7 FT × 6.6 FT
Working area (L × W), nominal	in	118.1 × 59.1	157.5 × 78.7	236.2 × 78.7
Worktable		Single	Single	Single
Laser source power (options)		3000 W / 6000 W	3000 W / 6000 W	3000 W / 6000 W
Positioning accuracy	in	±0.0012	±0.0012	±0.0012
Max. axis speed	ft/min	361	361	361
Max. acceleration		1 G	1 G	1 G

The model number gives the nominal working area (e.g. 3015 = 3000 × 1500 mm). Every table size is available with any of the listed laser source powers.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

RAYCUS · S&A · FSCUT · INOVANCE · TECHMECH · TWEBOLUN · SMC

SMART SERIES — QUALITY COMPONENTS



Laser source

Raycus RFL series

- Raycus is a global brand known in the laser processing industry for reliability, long service life and high performance
- Stable power output, precise cutting quality and an excellent price-to-performance ratio
- One of the most widely used laser sources worldwide



Chiller

S&A CWFL series

- Developed for fiber laser cutting machines: stable temperature control of laser source and optics improves cutting quality and machine life
- Dual-circuit cooling balances the laser source and the optical path independently
- Compact, quiet and energy-efficient; low maintenance for long, uninterrupted operation



Control unit

FSCUT

- Developed for fiber laser cutting, raising cutting speed and quality with high performance and advanced software
- Intelligently optimizes cutting parameters for stable, fast cutting even on complex geometries
- User-friendly interface: easy programming, fewer errors, higher overall efficiency



Servo motors & drives

Inovance

- High-precision motion control with fast response and stable torque for maximum axis accuracy
- Advanced control algorithms minimize vibration, improving cutting quality and extending machine life
- Compact design for easy installation and wiring; energy-efficient, highly dynamic operation



Reducers

Techmech

- Gearboxes for high-precision motion transmission
- High torque capacity and low-backlash design for maximum axis accuracy
- Compact, space-saving construction; durable materials and high efficiency for long, trouble-free operation



Rack and pinion

TWEBOLUN

- Low backlash and stable power transmission follow cutting paths accurately, even on complex geometries
- Durable materials and long-life design for uninterrupted production
- Easy installation and low maintenance



Gas pressure regulator

SMC

- High precision and stability in pressure control for safe, efficient and long-lasting operation of the air system
- Made by Japan-based SMC Corporation, a worldwide reference in industrial automation and pneumatic control

COMPONENT BRANDS — SMART SERIES

Component	Brand / series
Laser source (resonator)	Raycus RFL series
Chiller	S&A CWFL series
CNC control unit	FSCUT
Servo motors and drives	Inovance
Reducers (gearboxes)	Techmech
Rack and pinion	TWEBOLUN
Gas pressure regulator	SMC (Japan)
Laser cutting head	BLT series Smart Cutter with closed-loop autofocus
Nesting software	CypNest (for CypCut / HypCut)

GFL SERIES · FULLY ENCLOSED · PALLET CHANGER · 3 KW TO 40 KW

GFL FIBER LASER CUTTING MACHINE



MODEL **GFL 3015** Fully enclosed GFL fiber laser with pallet changer



Open front door: cutting area and swivelling control panel

DIFFERENTIATING FEATURES

- Advanced hardware, best in class
- Advanced remote access and ease of control
- High safety and easy maintenance
- Ease of use with Windows-based operating system

DESIGN

Using fiber-optic technology, the Dener fiber laser achieves high-speed performance when cutting 2D sheet metal. Equipped with a range of cutting modes and well-known fiber laser sources, it handles challenging parts with ease. The well-thought-out design allows easy transport and installation, and the machine has a user-friendly interface. The speeds reached on the X, Y and Z axes deliver a fast return on investment combined with cutting precision. The stress-relieved, robust frame and a bridge designed with space-frame geometry make the machine ready for high accelerations. Six pneumatic extraction compartments draw off the cutting fumes, and small parts that fall through are collected in six scrap boxes on easy-to-remove wheels; the machine is prepared for connection to a fume extraction system. The frame is built from high-quality steel, welded, stress-relieved and finish-machined on a high-precision 5-axis portal milling and boring machine, giving a rigid, ergonomic frame that withstands high-speed movements of the bridge.

RIGID, OPTIMIZED BODY STRUCTURE FOR

- High speed
- High cutting quality
- Quality components
- High technology
- Low cost

MACHINE HIGHLIGHTS

- Control unit
- LED status indicator
- Compact body
- Laser-safe protective viewing glass
- Pallet changer
- Light curtain
- Scrap boxes

GFL 3015 / 4020 / 6020 · 120 M/MIN · 1.5 G

GFL FIBER LASER — TECHNICAL SPECIFICATIONS



GFL 3015
Front view



GFL 3015
Pallet changer side

High-speed cutting with low operating costs: the GFL combines a fully enclosed cabin, a shuttle-type pallet changer and high-dynamic axes (1.5 G) with laser sources from 3 kW to 40 kW.

TECHNICAL SPECIFICATIONS — GFL SERIES

Model		GFL 3015	GFL 4020	GFL 6020
Working area (L × W), nominal	FT	9.8 FT × 4.9 FT	13.1 FT × 6.6 FT	19.7 FT × 6.6 FT
Working area (L × W), nominal	in	118.1 × 59.1	157.5 × 78.7	236.2 × 78.7
Worktable		Pallet changer (2 tables)	Pallet changer (2 tables)	Pallet changer (2 tables)
Laser source power (options)		3 / 6 / 12 / 20 / 30 / 40 kW	3 / 6 / 12 / 20 / 30 / 40 kW	3 / 6 / 12 / 20 / 30 / 40 kW
Positioning accuracy	in	±0.0012	±0.0012	±0.0012
Max. axis speed	ft/min	394	394	394
Max. acceleration		1.5 G	1.5 G	1.5 G
Z-axis stroke	in	13.8	13.8	13.8

The model number gives the nominal working area (e.g. 3015 = 3000 × 1500 mm). Every table size is available with any of the listed laser source powers. Laser source powers available: 3000 W, 6000 W, 12000 W, 20000 W, 30000 W and 40000 W.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

LASER SOURCE · CHILLER · LIGHT CURTAIN · RACK AND PINION · Z AXIS · WELDED FRAME · SHUTTLE TABLES

GFL SERIES — EQUIPMENT



Laser source


Fiber laser resonator

- High electro-optical conversion efficiency, excellent beam quality and high energy density
- Wide modulation frequency range, strong reliability, long service life and maintenance-free operation for stable, efficient laser performance



Chiller

- Continuously communicates with the CNC control to keep the laser source and cutting head at optimum temperature
- Improves process stability, protects critical components and keeps cutting quality consistent over long production runs



Light curtain

- Protects the operator during pallet change
- Detects any intrusion into the protected area and immediately triggers the safety response



Rack and pinion system

- Higher positioning accuracy, easy assembly, reduced wear and long service life
- Axis positioning tolerance of ±0.05 mm (±0.002 in) for stable, precise motion




High-performance Z axis

- Designed and configured for 1 G acceleration while maintaining cutting accuracy
- 350 mm (13.8 in) Z-axis stroke on the GFL model



Compact welded frame

- High-quality steel, welded and stress-relieved
- Finish-machined on a high-precision 5-axis portal milling and boring machine
- Rigid, ergonomic frame that withstands high-speed bridge movements

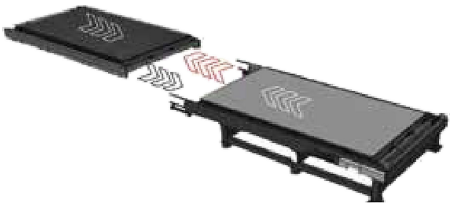

Shuttle cutting tables


- Two moving tables: while cutting continues on the table inside the machine, the other table is loaded with sheets or unloaded

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

BLT SERIES SMART CUTTER · CLOSED-LOOP AUTOFOCUS · FOR SMART AND GFL LASERS

LASER CUTTING HEAD

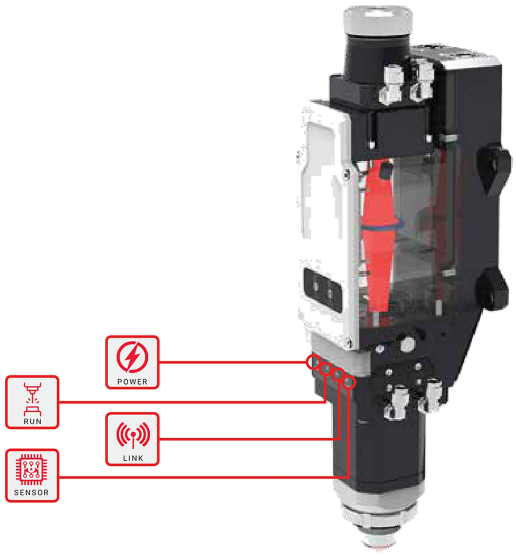

BLT cutting head with LED status indicators: power, run, link and sensor

BLT SERIES SMART CUTTER

Designed for 2D, 3D and bevel cutting, the cost-effective BLT Series Smart Cutter is available for laser powers below 30 kW and offers excellent performance with stable cutting and easy installation and setup. New optical solutions are available with closed-loop autofocus. Slag-free cutting, nozzle cooling and a water-cooling sensor are supported, making cutting more stable and efficient. Smart Drilling and Auto Re-cutting functions meet the most demanding requirements for air and high-performance N2 cutting, significantly increasing efficiency and productivity.

STABLE AND EFFICIENT CUTTING PROCESS

- LED indicators on the laser head show power, run, communication (link) and sensor status — confirming that the head is working correctly
- Advanced technology: high cutting performance at an affordable cost
- Easy installation and low repair costs
- Lens change in 2 minutes with ready-to-use optical drawers




Quick-change optical drawers

INCLUDED WITH EVERY NOVOTECH MACHINE


- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

SMART SOFTWARE · NESTING FOR CYPCUT / HYPCUT LASER CUTTING SYSTEMS

CYPNEST NESTING SOFTWARE

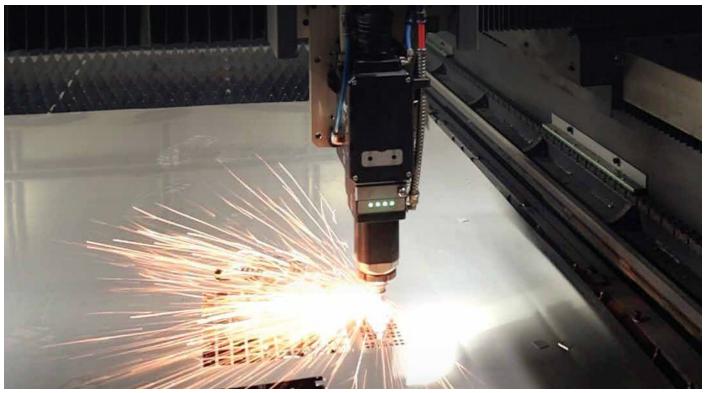


Precision meets performance

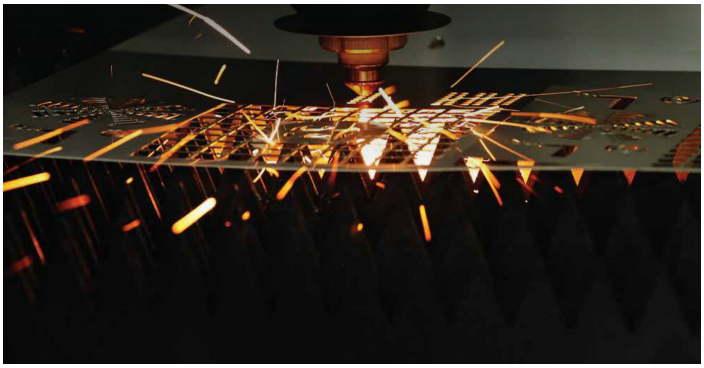

Laser power that moves your production forward

CypNest is nesting software for CypCut / HypCut laser cutting systems. It offers advanced functions such as drawing modification, quick nesting and toolpath optimization, supports DWG and DXF files and Excel-based batch import. Its powerful algorithm enables efficient manual or automatic nesting, with smart toolpath strategies that minimize travel. CypNest also generates production and pricing reports and integrates perfectly with the HypCut / CypCut cutting software.

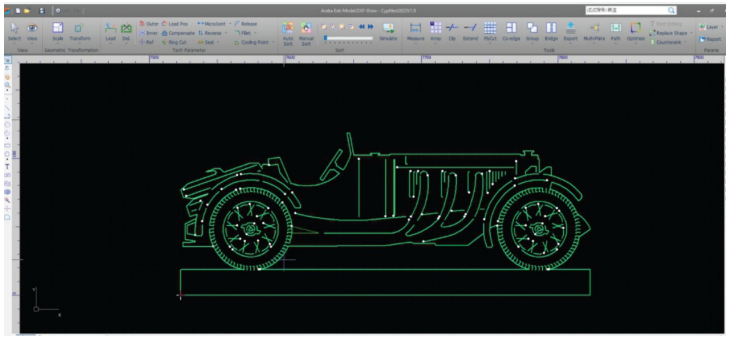

CypNest user interface

SPEED UP PRODUCTION

- Drawing modification and intelligent part recognition
- Supports DWG and DXF formats; Excel table-based part creation and import
- Nesting strategy: powerful algorithm for high efficiency and a fast production rate
- No limit on part quantity; manual and automatic nesting and free placement on the sheet
- Toolpath optimization: smart cutting-path strategy minimizes travel length
- Smooth operation with toolpath adjustment options and multiple contact settings
- Production and pricing analysis reports; technical and cutting parameters match HypCut / CypCut

BENEFITS


- Superior cut accuracy and high laser precision
- High-speed cutting and faster throughput
- Energy-efficient operation and lower energy consumption
- Lower operating cost

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

HANDWHEEL · RESUME AFTER ALARM · SCRAP BOXES · HEAD PROTECTION · LASER-SAFE GLASS · LIGHT BARRIERS

EASE OF USE & SAFETY

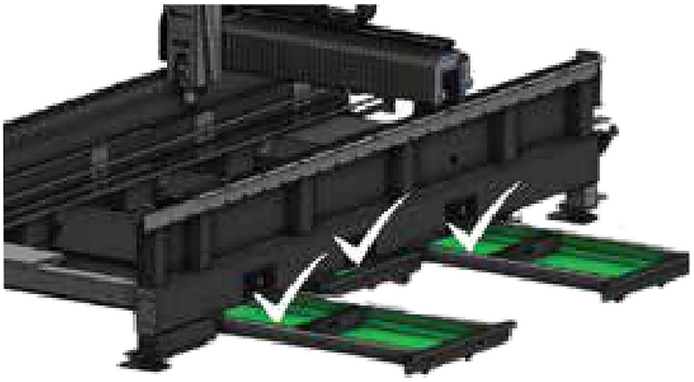

Pull-out scrap boxes

SCRAP BOXES

- Ergonomic scrap boxes are easy to pull out, so small parts and scrap are easy to reach
- Optional CNC-controlled scrap conveyor

EASE OF USE

- Handwheel: precise manual axis positioning — especially useful for cutting small parts from the remnants of previously cut sheets
- Resume cutting after an alarm: when the machine is stopped or paused for any reason, cutting can be restarted from any desired point

SAFETY

- Cutting head protection: if the cutting head comes too close to a part or the pallet, the machine stops immediately to prevent damage; after the operator has checked and solved the problem, pressing start resumes cutting from where it left off
- Protective glass: viewing windows in the front doors are made of glass suited to the fiber laser wavelength, protecting the operator's eyes
- Emergency stops: easily accessible emergency stop buttons provide a safe working environment; a buzzer on top of the machine signals the working state in real time
- Safety light barriers: the pallet change stops if the light barrier is interrupted, preventing injury; after a reset, the pallet change can be resumed in the desired direction

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

NovoTech MACHINE TOOLS Inc.

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga location.

PHONE
+1 647 526 5510

WEB & EMAIL
NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS
1365 Mid-Way Blvd, 26
Mississauga, ON L5T 2J5
Canada

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**






Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment.