
"THE FUTURE IS HERE" · SOLD & SERVICED IN CANADA BY NOVOTECH

HYDRAULIC PRESS BRAKES

FAST BENDING · PRECISE BENDING · HIGH PRODUCTIVITY

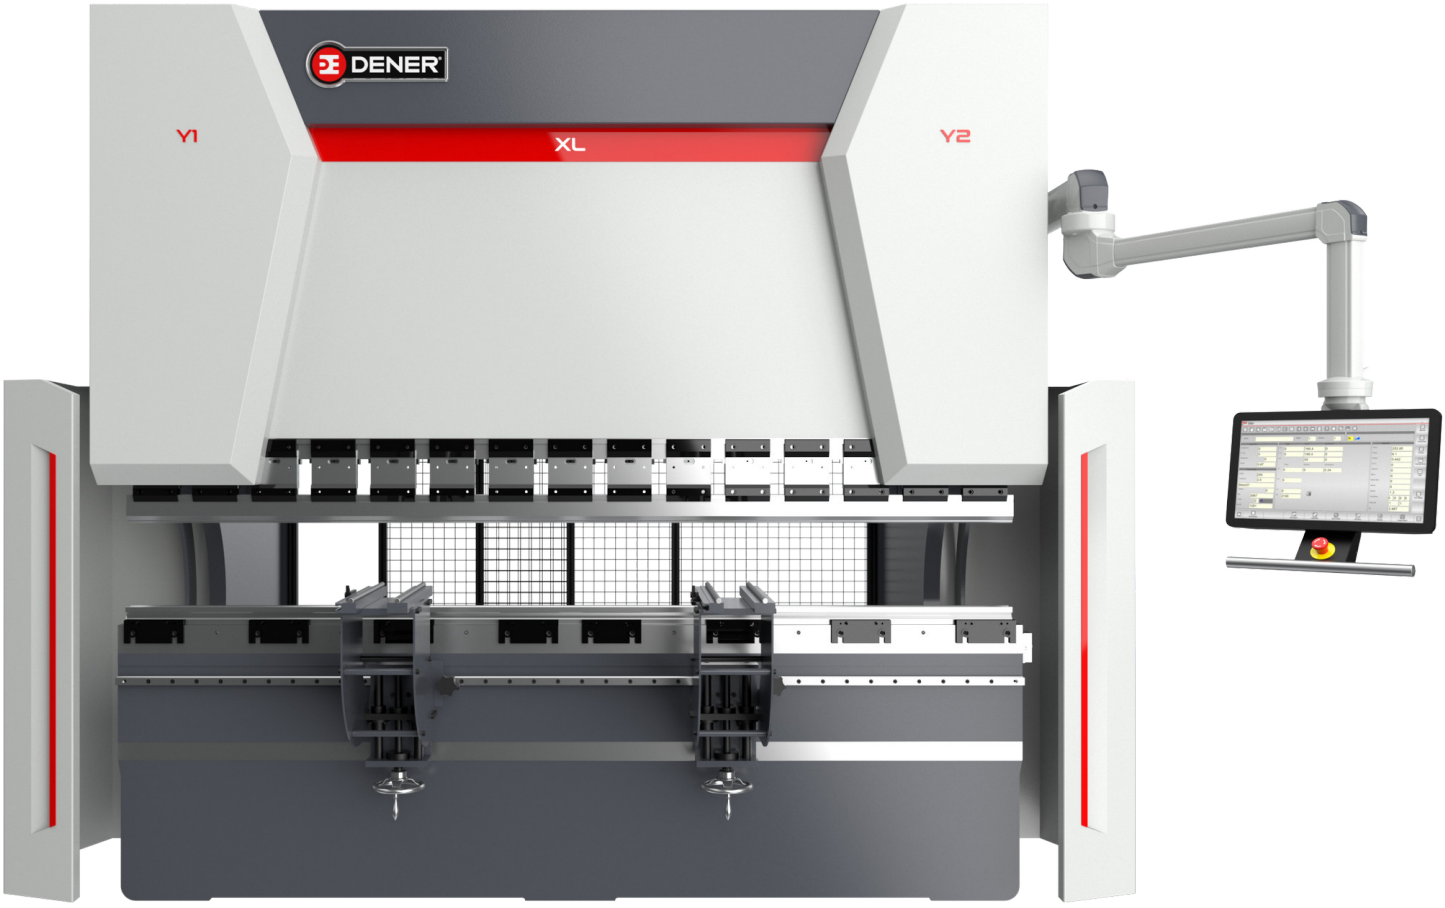

Since 1974
MANUFACTURING EXPERIENCE

66 – 661
US TONS

5 – 20 FT
BENDING LENGTH

Canada
PARTS & TECHNICAL SUPPORT

NovoTech Machine Tools Inc.
1365 Mid-Way Blvd, 26, Mississauga, ON L5T 2J5, Canada
NovoTechMachineTools.com | info@NovoTechMachineTools.com | +1 647 526 5510

MANUFACTURER · ESTABLISHED 1974

ABOUT DENER

Dener Makina was established in 1974 in the Kayseri Old Industrial Zone. Since 2000 the company has focused on producing CNC sheet-metal processing machines, manufacturing a wide range of products including guillotine shears, hydraulic press brakes, ball-screw press brakes, servo-electric press brakes, plasma cutting machines and fiber laser cutting machines.

In 2016 the company made a major investment, expanding its facilities to include 1,670,000 sq ft (155,000 m^2) of factory buildings and 290,000 sq ft (27,000 m^2) of social facilities on a 14,000,000 sq ft (1,300,000 m^2) site within the İncesu Organized Industrial Zone (OSB). In this new phase Dener began producing CNC metal processing machines such as Taksan integrated systems, double-column machining centers, 5-axis simultaneous machining centers, vertical machining centers, lathes and grinding machines.

With its extensive production range, over half a century of experience, skilled workforce and multinational R&D center, Dener holds a leading position globally by providing high-value industrial investment products in CNC sheet-metal processing and CNC metal processing machines.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **FREE INSTALLATION AND TRAINING in GTA**

SOLD & SERVICED IN CANADA
by NovoTech Machine Tools — Mississauga, Ontario

CONTENTS THIS BROCHURE

Production Campus 03
General Specifications 05
Back Gauges 07
Best Components 09
Automation 12
Standard & Optional 14
Hybrid Series 17
Award-Winning Design 19
Dener Product Range 21
Design Advantages 04
Feel The Power 06
Punch and Die 08
Control Unit 10
Special Project 13
Technical Specifications 15
Dener Worldwide 18
Sheet Metal Processing 20

DENER PRODUCTION CAMPUS İNCESU ORGANIZED INDUSTRIAL ZONE · KAYSERI


In 2016 Dener expanded to a 14,000,000 sq ft (1,300,000 m^2) site within the İncesu Organized Industrial Zone, with 1,670,000 sq ft (155,000 m^2) of factory buildings and 290,000 sq ft (27,000 m^2) of social facilities.



- Machine Tools Production Plant
- Sheet Processing Machines Production Plant
- Production Plant
- Sheet Welding Factory
- Sheet Cladding Factory
- Technology Center
- Administrative Building
- Social Facilities
- Helicopter Pad
- Main Entrance · Visitor Parking Area

HYDRAULIC PRESS BRAKE

PRESS BRAKES — DESIGN ADVANTAGES

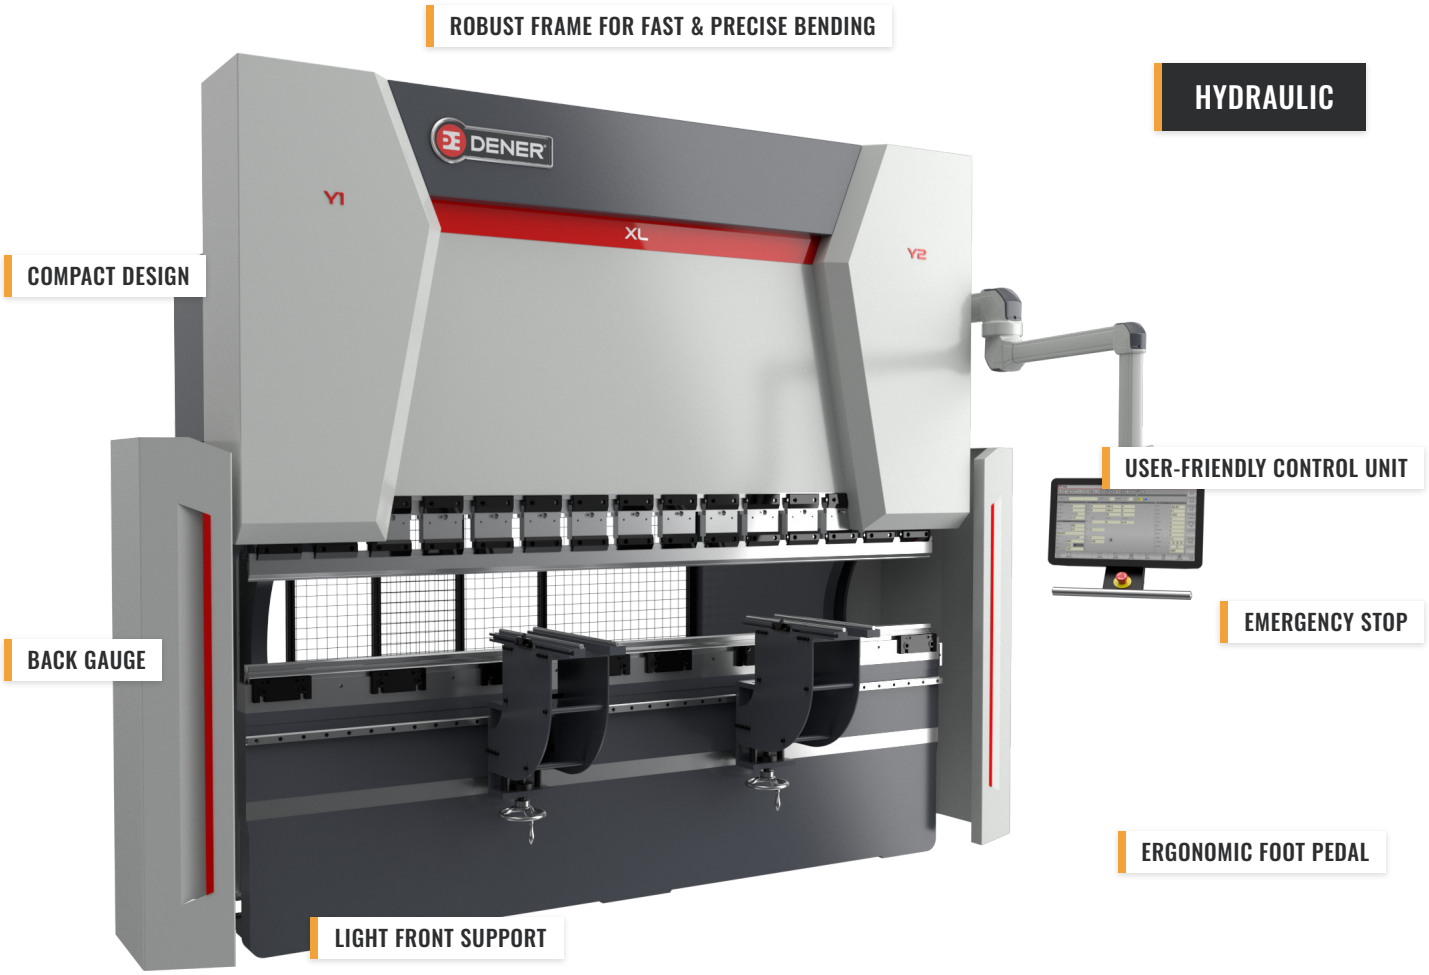

The DENER, with its synchronized hydraulic system and advanced 2D graphical control unit, is designed for high-precision bending. Its easy-to-program interface allows you to draw parts on screen, and the automatic bend-step system determines the most efficient bending method. The 2D punch and die programming feature provides operators with quick setup and easy recording.

The bend-correction function automatically saves data, maintaining consistent quality. Drawings in 3D or DXF format are automatically stepped by the CNC, and suitable tools are selected from memory for simulation. This allows even the most complex parts to be produced quickly, with high accuracy and repeatability.

GENERAL SPECIFICATIONS

HYDRAULIC PRESS BRAKE

- High-quality, precise bending results
- St-44 monoblock steel frame
- Stress-relieved, rigid, durable body
- Deeper throat depth, higher stroke and intermediate clearance
- Quality hydraulic system — faster, quieter, more powerful, with less hydraulic maintenance
- Minimum tool replacement and adjustment time
- Low bending cost per part
- High-quality built-in hydraulic and electrical components
- Easy maintenance and repair
- Smart production power with Industry 4.0 technologies



SPEED
STROKE
DAYLIGHT
PRECISION
BIG THROAT DEPTH

TOP FIVE

EASIEST SOLUTION FOR COMPLEX BENDING

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **FREE INSTALLATION AND TRAINING in GTA**

HYDRAULIC SERIES

FEEL THE POWER — DISCOVER THE QUALITY



The hydraulic series is designed for long-lasting production with its high bending power, robust body structure and reliable performance. The advanced hydraulic system, constant pressure and precise control deliver excellent results with every bend, ensuring uninterrupted operation even under harsh conditions.

PRECISION POSITIONING UP TO 6 AXES

DENER BACK GAUGES

One of the most important factors affecting bending quality is the design and stability of the back gauge. Faultless bending, a flawless product, and a stable and precise back gauge are possible.

The back gauge system manufactured by Dener is one of the most important factors affecting bending quality. Whether single-step or multi-step, you can bend complex parts with up to 6 axes using the back gauge. The ball-screw back gauges are supported by linear guides and servo motors, ensuring flawless bending at high speed and precision. Furthermore, the stepped back gauge fingers allow you to easily perform all types of bending operations.

OPTION



X-R
BACK GAUGE

OPTION



X-R-Z1-Z2
BACK GAUGE

OPTION




X-R-Z1-Z2 + X prime
BACK GAUGE

STANDARD BACK GAUGE


- X axis with servo motor
- Ball screw for X axis
- Double linear guide for every axis
- X-axis positioning accuracy ±0.001" (±0.03 mm)

OPTIONAL BACK GAUGE

- X, R
- X1, X2, R
- X, R, Z1, Z2
- X, X' , R, Z1, Z2
- X1, X2, R, Z1, Z2
- X1, X2, R1, R2, Z1, Z2 (ATF type)

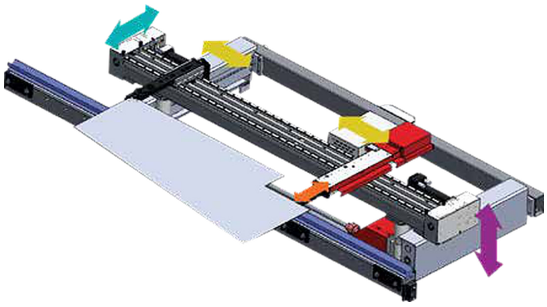

Optional multi-axis back gauge

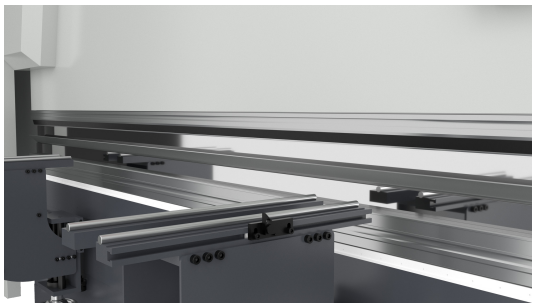

Back gauge fingers and front support move on linear guides

EUROPEAN-STYLE TOOL CLAMPING

PUNCH AND DIE

The machine's bending performance is enhanced and its use made easier with the high-hold European-style tool clamping system. The lower body is narrowly designed for Z-type bending and is compatible with the European-style clamping system.



Wila hydraulic upper tool holder



Wila hydraulic lower tool holder




Wila manual upper tool holder



Wila manual lower tool holder

FAST TOOL REPLACEMENT

By ensuring maximum control of vertical tolerances during the bending process, highly precise clamping, positioning and alignment are achieved. Superior clamping force comes from separate clamping pins for each tool segment. For maximum speed and safety, the system offers vertical and horizontal tool loading and unloading, with a professional finish including a slide rule for easy tool positioning — ensuring maximum productivity.

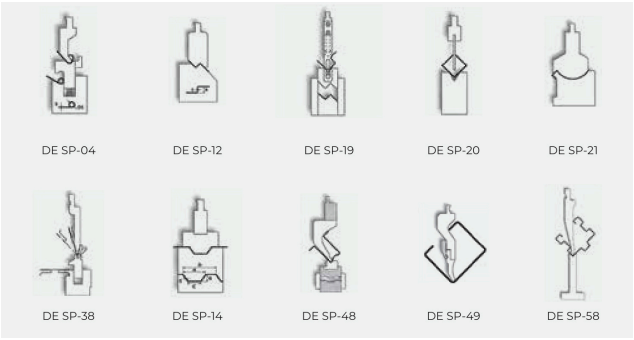

Tool profiles: DE SP-04 · DE SP-12 · DE SP-19 · DE SP-20 · DE SP-21 · DE SP-38 · DE SP-14 · DE SP-48 · DE SP-49 · DE SP-58

KEY SYSTEMS

SAFE AND PRECISE BENDS WITH THE BEST COMPONENTS




CROWNING SYSTEM

The manual or CNC-controlled motorized crowning system ensures perfect accuracy at every bending point. The CNC crowning system automatically calculates bending differences resulting from material differences or external factors, ensuring error-free results.




FRONT SUPPORT

Thanks to its powerful front arms, linear guides and bearing structure, the sheet can be easily moved to the right or left and secured in the desired position. This simplifies the operator's work and ensures high precision during bending.




LASER SAFETY SYSTEM

Our machines are designed in compliance with European CE standards and directives. Hydraulic, electrical and laser safety systems ensure the highest level of operator safety. Tandem models offer full protection thanks to CE safety barriers and laser light curtains.

FIXED UPPER TABLE MOVEMENT

By using a long, flat clamping surface, the disadvantages caused by point clamping have been eliminated. This system provides a 100% free bending area by removing elements between the side frames that could obstruct bending, and the clamping system has been relocated to the upper section.

STANDARD & OPTIONAL CNC CONTROLS

CONTROL UNIT



ESA S640 — 2D (STANDARD)

- 15" LCD TFT SXGA colour touchscreen with anti-glare screen and multi-touch
- Interactive 2D graphic editor for part and tool data entry
- 2D graphic display of machine frame, workpiece and tools
- Automatic calculation of the optimal 2D bending sequence
- Windows 10 operating system
- Complete offline programming on a standard PC
- Manages up to 6 axes in any combination, with programmable auxiliary functions
- Supports sheet followers, thickness detection, in-process angle measurement, robot interfacing and tandem press brakes
- 2 USB ports



ESA S 875 W (OPTION)

- 3D and 2D graphical touchscreen programming mode
- 3D and 2D visualization in simulation and production
- 21" high-resolution colour touchscreen
- Full-featured Windows application
- ESA offline software
- USB flash memory drive
- Hard disk for over 1,000,000 part programs
- 2D and 3D automatic bend-sequence calculation
- Graphics-based product and tool selection

OPTIONAL CNC CONTROLS · DELEM

CONTROL UNIT



DELEM DA-66S (OPTION)

- 2D graphical touchscreen programming mode
- 3D machine representation during simulation and production
- 24" high-resolution TFT display
- Delem Modusys compatibility (module scalability and adaptability)
- USB and peripheral interface support
- User-specific application support in the controller's multitasking environment
- Sensor-based bending and straightening interface
- Profile-S2D offline software



DELEM DA-69S (OPTION)

- 3D and 2D graphical touchscreen programming mode
- 3D visualization, including 3D machine representation, during simulation and production
- 24" high-resolution colour TFT display
- Delem Modusys compatibility (module scalability and adaptability)
- USB and peripheral interface support
- User-specific application support in the control's multitasking environment
- Sensor-based bending and straightening interface
- Profile-S3D offline software

ANGLE MEASUREMENT · SHEET FOLLOWER · ROBOT BENDING

ACCURACY & AUTOMATION OPTIONS

ANGLE MEASUREMENT SYSTEM

By detecting angular deviations on the bent sheet, the system communicates with the CNC control unit and performs automatic corrections, ensuring a bending accuracy of 0.05° at every bending point.



AUTOMATIC SHEET FOLLOWER

Supports the sheet and moves synchronously during bending, reducing operator effort and improving safety and accuracy.



ROBOT BENDING SOLUTION

OPTION Robot bending cell



TANDEM & HEAVY-TONNAGE XL PRESS BRAKES

SPECIAL PROJECT



DENER tandem 60' × 1600 ton (18.4 m × 1600 ton) HYBRID press brake

Built by Dener · tandem hybrid press brake



XL 1600 — 1,764 US tons · 39.4 FT

Built by Dener · 1600 metric tons, 12 m

HYDRAULIC SERIES

STANDARD & OPTIONAL EQUIPMENT





STANDARD FEATURES

- ESA S640 15" 2D graphical touchscreen controller (Italy)
- 2D offline programming system for the CNC controller
- Heavy-duty X-axis back gauge with servo motor and ball screw, including 2 finger stops, manually adjustable in height and lateral position
- DSP-AP finger safety laser + MCS safety PLC
- 2 front supports (sliding arms with manual height adjustment)
- European PROMECAM tool clamping system
- EUROSTAMP 1281 punch (Italy)
- EUROSTAMP 2067 4V die (Italy)
- Side and back safety covers with safety interlocks
- Heavy-duty ram guideways
- Foot pedal with emergency stop button
- Large daylight and throat depth
- CSA-approved electrical panel
- 600 V 3-phase transformer included
- Aluminum-foil waterproof overseas packaging

OPTIONAL EQUIPMENT

- 21" ESA 875 W 3D CNC control unit
- Delem DA-66S CNC control unit
- Delem DA-69S 3D CNC control unit
- X, R type back gauge
- X, R, Z1, Z2 type back gauge
- X1, X2, R, Z1, Z2 type back gauge
- ATF type X1, X2, R1, R2, Z1, Z2 back gauge
- Bar type X1, X2, R1, R2, Z1, Z2 back gauge
- Sheet follower
- Hydraulic oil cooling system
- Electrical panel cooling system
- Automatic lubrication system
- Motorized / manual crowning system
- Quick punch clamping system
- Pneumatic punch and die clamping system
- Wila mechanical top and bottom die clamping system
- Wila hydraulic top and bottom die clamping system
- **Mild Hybrid System:** the main hydraulic pump is driven by a servo motor, eliminating unnecessary motor idle time and significantly reducing electrical energy consumption
- North American / European PROMECAM combo tool clamping system
- 9 pcs. segmented EUROSTAMP 1281 punch – 805 mm (31.7")
- Additional press brake finger for back gauge
- Euro-American die holder
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase


INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **FREE INSTALLATION AND TRAINING in GTA**

TECHNICAL SPECIFICATIONS HYDRAULIC SERIES · 1560 – 30320

5–10 FT HYDRAULIC SERIES
8 MODELS

Model		1560	2060	26100	30100	30135	30175	30220	30320
Bending length (A)	FT · in	5.1 FT · 61.0"	6.7 FT · 80.7"	8.5 FT · 102.4"	9.9 FT · 118.9"	9.9 FT · 118.9"	9.9 FT · 118.9"	9.9 FT · 118.9"	9.9 FT · 118.9"
Bending capacity	metric tons	60	60	100	100	135	175	220	320
Bending capacity	US tons	66	66	110	110	149	193	243	353
Approach speed	in/s	7.09	7.09	6.30	6.30	6.30	5.91	5.51	4.92
Bending speed	in/s	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39
Return speed	in/s	6.30	6.30	5.91	5.91	5.12	5.12	5.12	4.72
Stroke (C)	in	8.7	8.7	11.8	11.8	12.6	13.8	13.8	15.7
Daylight (D)	in	16.1	16.1	20.9	20.9	21.7	23.6	23.6	25.6
Throat depth (E)	in	15.7	15.7	17.7	17.7	17.7	17.7	17.7	17.7
Distance between frames (B)	in	49.2	65.0	84.6	100.6	100.6	100.6	100.6	100.6
Length (L)	in	96.3	112.0	130.7	146.7	147.4	147.4	147.4	149.0
Width (W)	in	86.6	86.6	89.0	89.0	89.8	89.8	90.2	90.2
Width without front support (Y)	in	64.4	64.4	67.3	66.5	67.7	67.7	67.7	69.1
Height (H)	in	94.1	94.1	109.4	109.4	111.6	119.3	120.3	122.0
Lower table height (F)	in	35.4	35.4	35.4	35.4	35.4	35.4	36.2	36.2
Pit depth	in	–	–	–	–	–	–	–	–
Main motor	HP	10	10	15	15	20	30	30	40
Oil tank	L	100	100	190	190	190	300	300	400
Approx. weight	lb	9,480	10,803	16,976	19,180	21,164	25,574	26,015	32,628

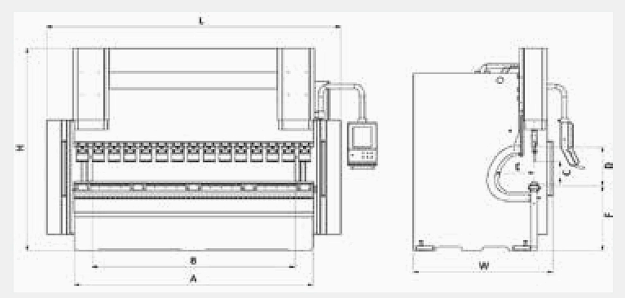

*Dimension letters A – H refer to the drawing. *Capacities may vary due to factors such as material quality, operator settings and bending speed. Model numbers are Dener designations (metric bending length × metric tonnage); imperial values converted from manufacturer data and rounded.*

MODEL **Dener hydraulic press brake**



TECHNICAL SPECIFICATIONS

HYDRAULIC SERIES · 36175 – 60600

12–13.3 FT HYDRAULIC SERIES

5 MODELS

Model		36175	36220	40175	40220	40320
Bending length (A)	FT · in	12 FT · 143.7"	12 FT · 143.7"	13.3 FT · 159.4"	13.3 FT · 159.4"	13.3 FT · 159.4"
Bending capacity	metric tons	175	220	175	220	320
Bending capacity	US tons	193	243	193	243	353
Approach speed	in/s	5.91	5.51	5.91	5.51	4.92
Bending speed	in/s	0.39	0.39	0.39	0.39	0.39
Return speed	in/s	5.12	5.12	5.12	5.12	4.72
Stroke (C)	in	13.8	13.8	13.8	13.8	15.7
Daylight (D)	in	23.6	23.6	23.6	23.6	25.6
Throat depth (E)	in	17.7	17.7	17.7	17.7	17.7
Distance between frames (B)	in	122.0	122.0	139.8	139.8	139.8
Length (L)	in	168.9	168.9	186.6	186.6	188.2
Width (W)	in	90.2	90.2	90.2	90.2	90.2
Width without front support (Y)	in	67.7	68.1	67.7	68.1	69.3
Height (H)	in	119.3	120.3	119.3	120.1	122.0
Lower table height (F)	in	36.2	36.2	36.2	36.2	36.2
Pit depth	in	–	–	–	–	–
Main motor	HP	30	30	30	30	40
Oil tank	L	300	300	300	300	400
Approx. weight	lb	27,558	27,999	31,306	31,526	38,581

13.3–20 FT HYDRAULIC SERIES

5 MODELS

Model		40400	60220	60320	60400	60600
Bending length (A)	FT · in	13.3 FT · 159.4"	19.8 FT · 238.2"	19.8 FT · 238.2"	19.8 FT · 238.2"	19.8 FT · 238.2"
Bending capacity	metric tons	400	220	320	400	600
Bending capacity	US tons	441	243	353	441	661
Approach speed	in/s	3.15	3.94	3.15	2.36	2.36
Bending speed	in/s	0.39	0.39	0.39	0.31	0.31
Return speed	in/s	3.15	3.94	3.15	2.36	2.36
Stroke (C)	in	15.7	13.8	13.8	15.7	17.7
Daylight (D)	in	25.6	23.6	25.6	25.6	26.8
Throat depth (E)	in	23.6	17.7	17.7	23.6	23.6
Distance between frames (B)	in	139.8	200.8	200.8	200.8	200.8
Length (L)	in	196.9	268.7	270.3	271.9	281.3
Width (W)	in	109.1	90.6	89.8	109.4	128.9
Width without front support (Y)	in	90.2	69.3	69.3	91.7	110.2
Height (H)	in	140.2	118.5	122.4	142.3	153.9
Lower table height (F)	in	43.1	36.2	36.2	43.1	39.4
Pit depth	in	–	–	–	–	40.6
Main motor	HP	50	30	40	50	60
Oil tank	L	400	300	400	400	600
Approx. weight	lb	55,116	41,888	50,927	70,548	113,979

**Capacities may vary due to factors such as material quality, operator settings and bending speed. Model numbers are Dener designations (metric bending length × metric tonnage); imperial values converted from manufacturer data and rounded.*

DENER XH HYBRID

HYBRID SERIES PRESS BRAKES

MODEL XH Hybrid





TECHNICAL SPECIFICATIONS HYBRID SERIES


Model		SVP 60	SVP 100	SVP 135	SVP 175	SVP 220	SVP 320	SVP 400	SVP 80 XF	SVP 125 XF
Approach speed	in/s	4.72	7.87	6.69	6.69	6.89	5.12	3.94	5.12	4.72
Bending speed	in/s	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39
Return speed	in/s	6.30	7.87	6.30	5.91	6.30	5.91	3.94	4.92	7.48
Motor power	HP	6.7	12	14	18	22	29	36	12	14

**Capacities may vary due to factors such as material quality, operator settings and bending speed. SVP model numbers are Dener designations.*



GLOBAL MANUFACTURING & SALES NETWORK

DENER WORLDWIDE

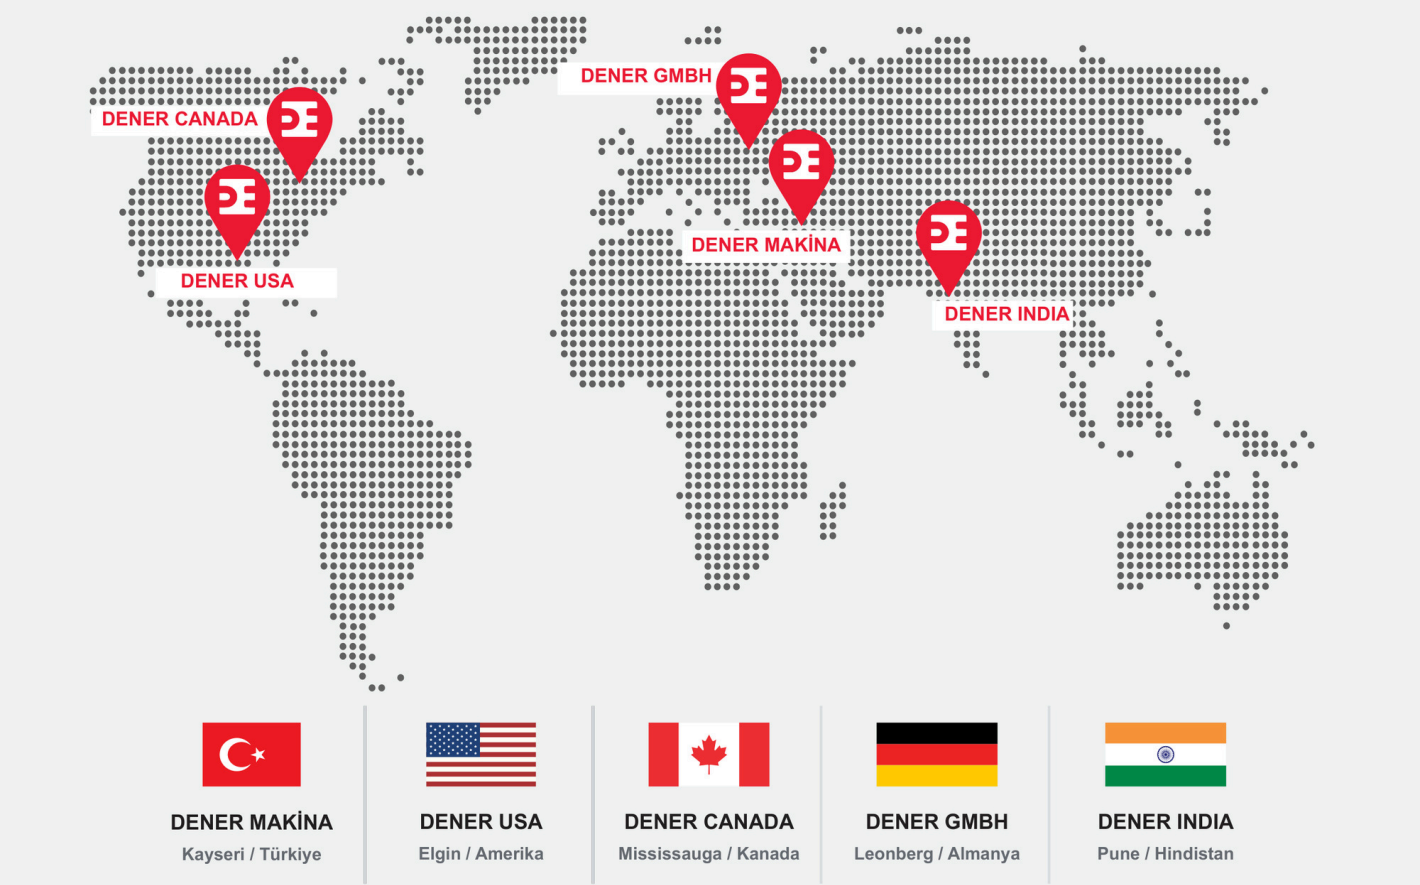

52+
YEARS OF EXPERIENCE

100+
EXPORT COUNTRIES

14,000,000 sq ft
PRODUCTION CAMPUS (1,300,000 M^2)

Dener Makina A.Ş. reserves the right to modify catalogue information and machine specifications without notice.

GLOBAL RECOGNITION IN ENGINEERING

AWARD-WINNING DESIGN

International recognition reflecting Dener's commitment to product quality, innovation and design excellence.



Good Design Award



European Product Design Award



International Design Awards (IDA)



Design Intelligence Award (DIA)



Design Turkey



Productivity Project Awards 2022–2023

THE DENER RANGE

SHEET METAL PROCESSING MACHINES



Hydraulic press brake



Hybrid press brake



Panel bender



Press brake



Compact press brake



Hydraulic shear



Fiber laser cutting machine



Fiber laser with shuttle table



Tube profile laser

"THE FUTURE IS HERE" · AVAILABLE THROUGH NOVOTECH

DENER PRODUCT RANGE

PRESS BRAKES


Hydraulic press brake


Hybrid press brake


Servo-electric press brake


Ball-screw press brake

PANEL BENDER


Panel bender

SHEARS


CNC hydraulic shear


NC hydraulic shear

LASER CUTTING MACHINES


GFL fiber laser cutting machine


Smart fiber laser cutting machine


Tube profile laser cutting machine

MACHINE TOOLS


CNC lathe


CNC vertical milling machine


Double-column milling machine


5-axis machining center


NC grinding machine

NovoTech MACHINE TOOLS Inc.

LET'S FIND THE RIGHT PRESS BRAKE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga location.

PHONE
+1 647 526 5510

WEB & EMAIL
NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS
1365 Mid-Way Blvd, 26
Mississauga, ON L5T 2J5
Canada

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **FREE INSTALLATION AND TRAINING in GTA**



Specifications subject to change without notice. Imperial values converted from manufacturer metric data and rounded. Photos may show optional equipment.