GMS MACHINERY · SOLD & SERVICED IN CANADA BY NOVOTECH

REBAR BENDING & CUTTING MACHINES

REBAR CUTTERS · REBAR BENDERS · STIRRUP & SPIRAL BENDERS · AUTOMATIC STIRRUP BENDERS, SHEAR LINES & DOUBLE BENDERS · MESH MACHINES · LIGHT CONSTRUCTION EQUIPMENT

Turkey
MADE IN TURKEY

21
MACHINE FAMILIES

1-Year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

GMS MACHINERY BY NOVOTECH

CONTENTS

REBAR CUTTING MACHINES

Hydraulic Rebar Cutting Machines – H Series H 26 – H 55 04
Hydraulic Rebar Cutting Machines – SH Series SH 45 · SH 60 06
Mechanical Rebar Cutting Machines – M Series M 36 – M 55 05

REBAR BENDING MACHINES

Rebar Bending Machines – B Series B 26 – B 50 07
Dowel Bar Bending Machines A 40 · MG 26-32B 09
Rebar Bending Machines – BS Series BS 36 – BS 60 08

COMBINED BENDING & CUTTING

Portable Rebar Bending & Cutting Machines MG 20B – POWER 24 10
Combined Rebar Cutting & Bending Machine MAX 40 11

STIRRUP & SPIRAL BENDING

Spiral Bending Machines – SX Series SX 26 – SX 40 12
Spiral Bending Machine – AXIS 50S AXIS 50S 14
Stirrup Bending Machines – SL Series SL 30 · SL 36 13

AUTOMATIC REINFORCEMENT PROCESSING LINES

Automatic Stirrup Bending Machine – SLS 12 SLS 12 16
Automatic Double Bender – SYNCLONE 45S SYNCLONE 45S 29
Automatic Rebar Shear Line – MATRIX 55 MATRIX 55 · 55S 23

MESH MACHINES

Mesh Bending & Cutting Machines HB 12x3 · MH 8C 31

CONSTRUCTION EQUIPMENT & TOOLS

Walk-Behind Double Drum Roller RL 2000 32
Power Trowels MT 700P · MT 900P 34
Plate & Pipe Bevelling Machines GMS 12 · GMS 25S 36
Brick & Aerated Concrete Block Cutting Machine BCZ 600 33
Plate Compactors MT 600K · MT 700K 35
Construction Hand Tools Hand tools 37

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR GMS MACHINERY

Sales, installation, parts and technical support across Canada

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario. Every machine in this catalogue is built by GöçMakSan and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

GÖÇMAKSAN MAKINA · ANKARA, TURKEY

ABOUT THE MANUFACTURER

GöçMakSan (GMS) has been building rebar processing machinery in Turkey since 1960. From its headquarters in the Ostim industrial zone of Ankara, with a sales, after-sales and showroom centre in Istanbul, the company designs and manufactures portable and stationary rebar cutting and bending machines, stirrup and spiral benders and dowel bar benders, as well as fully automatic reinforcement processing systems: the SLS 12 automatic stirrup bender, AXIS 50S spiral bender, MATRIX 55 shear lines and SYNCLONE 45S double bender. Mesh bending and cutting machines and light construction equipment complete the range. Key components such as gears are produced in-house by GMS.

SLS 12 Omnitron robotic stirrup cell

SYNCLONE 45S double bender in production

MATRIX 55S shear line infeed

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment.

H 26 · H 36S · H 38S · H 45S · H 55

HYDRAULIC REBAR CUTTING MACHINES – H SERIES

H 45S

H 36S

H 26

H 38S

H 55

- Hydraulic system
- Adjustable blade stopper
- Silent, safe and environmentally friendly
- Easy maintenance, low maintenance costs
- Long service life
- Reinforced steel body



Cutting two bars at once

Bar stop

Cutting blades

Cutting head

TECHNICAL SPECIFICATIONS

Model		H 26	H 36S	H 38S	H 45S	H 55
Dimensions W × L × H	in	21 × 39 × 31	21 × 41 × 31	24 × 48 × 31	26 × 54 × 31	30 × 61 × 40
Motor power	HP	3	3	4	5.4	10
Weight	lb	265	364	602	708	1,063
Hydraulic oil tank capacity	L	7	13	17.5	17.5	35
Cutting capacity · 45 kg/mm² steel (≈ 64,000 psi)		Ø1″ (one bar) Ø5⁄8″ (two bars)	Ø1-1⁄8″ (one bar) Ø7⁄8″ (two bars)	Ø1-1⁄2″ (one bar) Ø1″ (two bars)	Ø1-3⁄4″ (one bar) Ø1-3⁄8″ (two bars)	Ø2-1⁄8″ (one bar) Ø1-1⁄4″ (two bars)
Cutting capacity · 65 kg/mm² steel (≈ 92,500 psi)		Ø7⁄8″ (one bar) Ø1⁄2″ (two bars)	Ø1″ (one bar) Ø11⁄16″ (two bars)	Ø1-3⁄8″ (one bar) Ø7⁄8″ (two bars)	Ø1-5⁄8″ (one bar) Ø1-1⁄8″ (two bars)	Ø2″ (one bar) Ø1-1⁄8″ (two bars)
Cutting capacity · 85 kg/mm² steel (≈ 120,900 psi)		Ø13⁄16″ (one bar) Ø3⁄8″ (two bars)	Ø7⁄8″ (one bar) Ø5⁄8″ (two bars)	Ø1-1⁄4″ (one bar) Ø13⁄16″ (two bars)	Ø1-3⁄8″ (one bar) Ø1″ (two bars)	Ø1-5⁄8″ (one bar) Ø1″ (two bars)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

M 36 · M 45 · M 55

MECHANICAL REBAR CUTTING MACHINES – M SERIES

MODEL **M 45** Mechanical rebar cutting machine

M 36

M 55

- Mechanical system
- High cutting performance
- Cutting time 0.8 s
- Foot pedal and hand lever control

Cutting head with rebar

Cutting a rebar

Cutting blades

Foot pedal

TECHNICAL SPECIFICATIONS

Model		M 36	M 45	M 55
Dimensions W × L × H	in	21 × 40 × 31	20 × 43 × 33	26 × 54 × 37
Motor power	HP	4	4	4
Weight	lb	717	959	1,488
Cutting capacity · 45 kg/mm² steel (≈ 64,000 psi)		Ø1-3/8" (one bar) Ø15/16" (two bars)	Ø1-3/4" (one bar) Ø1-3/8" (two bars)	Ø2-1/8" (one bar) Ø1-1/4" (two bars)
Cutting capacity · 65 kg/mm² steel (≈ 92,500 psi)		Ø1-1/4" (one bar) Ø13/16" (two bars)	Ø1-5/8" (one bar) Ø1-1/8" (two bars)	Ø1-3/4" (one bar) Ø1-1/8" (two bars)
Cutting capacity · 85 kg/mm² steel (≈ 120,900 psi)		Ø1-1/8" (one bar) Ø11/16" (two bars)	Ø1-1/8" (one bar) Ø15/16" (two bars)	Ø1-3/8" (one bar) Ø15/16" (two bars)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SH 45 · SH 60 · DOUBLE-ACTING HYDRAULIC

HYDRAULIC REBAR CUTTING MACHINES – SH SERIES

SH 45

SH 60

- Double-acting hydraulic system
- High cutting performance
- Can be controlled both automatically and manually

Hydraulic cutting unit

Cut rebar end



Cutting blades

Pressure gauge

TECHNICAL SPECIFICATIONS

Model		SH 45	SH 60
Dimensions W × L × H	in	34 × 52 × 39	28 × 68 × 45
Motor power	HP	7.4	10
Weight	lb	1,305	2,116
Hydraulic oil tank capacity	L	105	163
Cutting capacity · 45 kg/mm² steel (≈ 64,000 psi)		Ø1-⅝″ (one bar) Ø1-½″ (two bars)	Ø2-⅜″ (one bar) Ø1-⅜″ (two bars)
Cutting capacity · 65 kg/mm² steel (≈ 92,500 psi)		Ø1-½″ (one bar) Ø1-¼″ (two bars)	Ø2″ (one bar) Ø1-⅛″ (two bars)
Cutting capacity · 85 kg/mm² steel (≈ 120,900 psi)		Ø1-¼″ (one bar) Ø1″ (two bars)	Ø1-¾″ (one bar) Ø1″ (two bars)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

B 26 · B 36 · B 45X1 · B 50 · BD DIGITAL CONTROL SERIES

REBAR BENDING MACHINES – B SERIES

MODEL **B 45x1** Stationary rebar bending machine with foot pedal

B 26

B 36

B 50

- Planetary reducer system
- Program saving option (9 different bending angles)
- Manual and automatic control
- BD Series: digital display control panel (BD 45 shown below)

Bending disc with centre and bending pins

Adjustable bar stop and support rollers

Standard bending pins, rollers and disc

Multiple bends in one bar

BD Series digital control panel (BD 45)

TECHNICAL SPECIFICATIONS

Model		B 26	B 36	B 45x1	B 50
Dimensions W × L × H	in	28 × 30 × 34	31 × 34 × 35	33 × 44 × 35	34 × 47 × 35
Motor power	HP	3	4	5.4	7.4
Weight	lb	481	628	864	1,008
Bending capacity · 45 kg/mm² steel (≈ 64,000 psi)		Ø1″ (one bar) Ø5/8″ (two bars)	Ø1-3/8″ (one bar) Ø7/8″ (two bars)	Ø1-3/4″ (one bar) Ø1-1/8″ (two bars)	Ø2″ (one bar) Ø1-1/4″ (two bars)
Bending capacity · 65 kg/mm² steel (≈ 92,500 psi)		Ø15/16″ (one bar) Ø9/16″ (three bars)	Ø1-1/4″ (one bar) Ø13/16″ (two bars)	Ø1-5/8″ (one bar) Ø1″ (two bars)	Ø1-3/4″ (one bar) Ø1-1/8″ (two bars)
Bending capacity · 85 kg/mm² steel (≈ 120,900 psi)		Ø7/8″ (one bar) Ø1/2″ (five bars)	Ø1-1/8″ (one bar) Ø5/8″ (two bars)	Ø1-1/4″ (one bar) Ø13/16″ (two bars)	Ø1-3/8″ (one bar) Ø1-1/8″ (two bars)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BS 36 · BS 45 · BS 50 · BS 60 · LONG TABLE, DOUBLE BENDING SLEEVE

REBAR BENDING MACHINES – BS SERIES

MODEL **BS 50** Long-table rebar bending machine with foot pedal

BS 36

BS 45

BS 60

- Fast bending with 2 bending sleeves
- Turns left and right
- Long table

Bending disc with pins and support rollers

Bending with two bending sleeves

Multiple bends in one bar



Bending disc with pin holes

TECHNICAL SPECIFICATIONS

Model		BS 36	BS 45	BS 50	BS 60
Dimensions W × L × H	in	33 × 44 × 35	33 × 48 × 35	35 × 56 × 35	39 × 61 × 35
Motor power	HP	4	5.4	7.4	10
Weight	lb	772	1,019	1,290	1,874
Bending capacity · 45 kg/mm² steel (≈ 64,000 psi)		Ø1-3/8″ (one bar) Ø7/8″ (two bars)	Ø1-3/4″ (one bar) Ø1-1/8″ (two bars)	Ø2″ (one bar) Ø1-1/4″ (two bars)	Ø2-3/8″ (one bar) Ø1-1/2″ (two bars)
Bending capacity · 65 kg/mm² steel (≈ 92,500 psi)		Ø1-1/4″ (one bar) Ø13/16″ (two bars)	Ø1-5/8″ (one bar) Ø1″ (two bars)	Ø1-3/4″ (one bar) Ø1-1/8″ (two bars)	Ø2-1/8″ (one bar) Ø1-3/8″ (two bars)
Bending capacity · 85 kg/mm² steel (≈ 120,900 psi)		Ø1-1/8″ (one bar) Ø5/8″ (two bars)	Ø1-1/4″ (one bar) Ø13/16″ (two bars)	Ø1-3/8″ (one bar) Ø1-1/8″ (two bars)	Ø2″ (one bar) Ø1-1/8″ (two bars)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

A 40 · MG 26-32B · PORTABLE HYDRAULIC DOWEL BAR BENDERS

DOWEL BAR BENDING MACHINES

A 40

Max. bending 1-3⁄8″ (36 mm) · dowel bar bending

MG 26-32B

Max. bending 1-1⁄4″ (32 mm) · dowel bar bending

Bending head on a dowel bar

MG 26-32B in use on site



Bending dowel bars in place

TECHNICAL SPECIFICATIONS

Model		A 40	MG 26-32B
Dimensions W × L × H	in	Unit 18 × 20 × 24 Body 11 × 27 × 9	Unit 7 × 20 × 9 Body 9 × 17 × 24
Motor power	HP	3	3
Weight	lb	Unit 99 Body 185	Unit 56 Body 97
Hydraulic oil tank capacity	L	13	10
Bending capacity · 45 kg/mm² steel (≈ 64,000 psi)		Ø1-3⁄8″	Ø1-1⁄4″
Bending capacity · 65 kg/mm² steel (≈ 92,500 psi)		Ø1-1⁄4″	Ø1-1⁄8″
Bending capacity · 85 kg/mm² steel (≈ 120,900 psi)		Ø1-1⁄8″	Ø1-1⁄8″

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

MG 20B · MG 26 JUNIOR · BT 24X5 · BT 26 · POWER 24

PORTABLE REBAR BENDING & CUTTING MACHINES

MG 20B

- Digital control panel option
- Single-phase (220 V) or three-phase (380 V) versions available
- Easy to carry

MG 26 Junior

- 254 lb · 2.4 HP (115 kg · 1.8 kW)
- Digital control panel option
- Single-phase (220 V) or three-phase (380 V) versions available
- Easy to carry

BT 24x5

- Special stirrup bending pin
- Digital control panel option
- Single-phase (220 V) or three-phase (380 V) versions available

BT 26

- Special stirrup bending pin
- Digital control panel option
- Single-phase (220 V) or three-phase (380 V) versions available

POWER 24

- Easy to handle
- Portable solution for the construction site



Bending disc with bending pins and rollers



Bending a rebar with the bending pin

BT 24x5 – control panel

TECHNICAL SPECIFICATIONS

Model		MG 20B	MG 26 Junior	BT 24x5	BT 26	POWER 24
Dimensions W × L × H	in	19 × 24 × 13	22 × 23 × 26	25 × 28 × 24	25 × 28 × 24	21 × 31 × 29
Motor power	HP	2	2.4	2	3	3
Weight	lb	209	254	320	331	198
Hydraulic oil tank capacity	L	–	–	–	–	7
Bending & cutting capacity · 45 kg/mm² steel (≈ 64,000 psi)		Ø13⁄16″ (one bar) Ø9⁄16″ (two bars)	Ø1″ (one bar) Ø13⁄16″ (two bars)	Ø15⁄16″ (one bar) Ø5⁄8″ (two bars)	Ø1″ (one bar) Ø5⁄8″ (two bars)	Ø15⁄16″ (one bar) Ø9⁄16″ (two bars)
Bending & cutting capacity · 65 kg/mm² steel (≈ 92,500 psi)		Ø11⁄16″ (one bar) Ø1⁄2″ (three bars)	Ø7⁄8″ (one bar) Ø5⁄8″ (two bars)	Ø7⁄8″ (one bar) Ø9⁄16″ (two bars)	Ø7⁄8″ (one bar) Ø9⁄16″ (two bars)	Ø13⁄16″ (one bar) Ø3⁄8″ (three bars)
Bending & cutting capacity · 85 kg/mm² steel (≈ 120,900 psi)		Ø5⁄8″ (one bar) Ø3⁄8″ (four bars)	Ø13⁄16″ (one bar) Ø1⁄2″ (three bars)	Ø13⁄16″ (one bar) Ø1⁄2″ (three bars)	Ø13⁄16″ (one bar) Ø1⁄2″ (three bars)	Ø5⁄8″ (one bar) Ø5⁄16″ (four bars)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

MAX 40 · HYDROMECHANICAL CUTTING AND BENDING IN ONE MACHINE

COMBINED REBAR CUTTING & BENDING MACHINE

MODEL **MAX 40** Combined rebar cutting and bending machine

- Hydromechanical system
- Max. cutting capacity 1-⅛" (30 mm)
- Max. bending capacity 1-⅜" (36 mm)
- Low energy consumption

Cutting unit

Bending a rebar on the bending disc

MAX 40 – control panel side

TECHNICAL SPECIFICATIONS

Model		MAX 40
Dimensions W × L × H	in	43 × 39 × 43
Motor power – cutting	HP	3
Motor power – bending	HP	4
Motor speed	rpm	1450
Weight	lb	948
Hydraulic oil tank capacity	L	18
Bending capacity · 45 kg/mm² steel (≈ 64,000 psi)		Ø1-⅜" (one bar) Ø15⁄16" (two bars)
Bending capacity · 65 kg/mm² steel (≈ 92,500 psi)		Ø1-¼" (one bar) Ø13⁄16" (two bars)
Bending capacity · 85 kg/mm² steel (≈ 120,900 psi)		Ø1-⅛" (one bar) Ø11⁄16" (two bars)
Cutting capacity · 45 kg/mm² steel (≈ 64,000 psi)		Ø1-⅛"
Cutting capacity · 65 kg/mm² steel (≈ 92,500 psi)		Ø1-⅛"
Cutting capacity · 85 kg/mm² steel (≈ 120,900 psi)		Ø1"

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SX 26 · SX 36 · SX 40

SPIRAL BENDING MACHINES – SX SERIES

MODEL **SX 40** Spiral bending machine

SX 26

SX 36

- Spiral bending from min. 6-¾″ (170 mm) to any desired diameter

Spiral-reinforced pile cage

Spiral forming

Continuous spiral

Finished spiral cage

TECHNICAL SPECIFICATIONS

Model		SX 26	SX 36	SX 40
Dimensions W × L × H	in	22 × 30 × 40	30 × 41 × 39	34 × 47 × 34
Motor power	HP	2	3	4
Motor speed	rpm	1450	1387	1387
Weight	lb	428	661	1,052
Bending capacity · 45 kg/mm² steel (≈ 64,000 psi)		Ø⅞″	Ø1-⅛″	Ø1-¼″
Bending capacity · 65 kg/mm² steel (≈ 92,500 psi)		Ø11⁄16″	Ø15⁄16″	Ø1-⅛″
Bending capacity · 85 kg/mm² steel (≈ 120,900 psi)		Ø11⁄16″	Ø13⁄16″	Ø1″
Minimum spiral bending diameter		8-¼″	10-¼″	10-¾″

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SL 30 · SL 36

STIRRUP BENDING MACHINES – SL SERIES

SL 30

SL 36

- Repeats bends automatically without readjusting the angles
- Easy to fix in place
- Powerful reducer

Bending disc with stirrup pins and rollers



Stirrup bending

Stirrup bending pin

TECHNICAL SPECIFICATIONS

Model		SL 30	SL 36
Dimensions W × L × H	in	30 × 30 × 35	31 × 34 × 35
Motor power	HP	4	4
Weight	lb	606	750
Bending capacity · 45 kg/mm² steel (≈ 64,000 psi)		Ø1-1⁄8″ (one bar) Ø5⁄8″ (two bars)	Ø1-3⁄8″ (one bar) Ø11⁄16″ (two bars)
Bending capacity · 65 kg/mm² steel (≈ 92,500 psi)		Ø15⁄16″ (one bar) Ø9⁄16″ (two bars)	Ø1-1⁄8″ (one bar) Ø9⁄16″ (two bars)
Bending capacity · 85 kg/mm² steel (≈ 120,900 psi)		Ø7⁄8″ (one bar) Ø1⁄2″ (two bars)	Ø15⁄16″ (one bar) Ø1⁄2″ (two bars)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

AXIS 50S · 2" (50 MM) SPIRAL BENDING MACHINE

SPIRAL BENDING MACHINE – AXIS 50S

AXIS 50S
With supporting bending conveyors open

AXIS 50S
Supporting conveyors closed

AXIS 50S
Front view

AXIS 50S
With supporting bending conveyors open

Bending rollers and supporting roller unit

Spiral-reinforced pile cage

Supporting roller unit

Bending rollers

Bending table and roller set

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

AXIS 50S · 2" (50 MM) SPIRAL BENDING MACHINE

SPIRAL BENDING MACHINE – AXIS 50S (CONT.)

TECHNICAL SPECIFICATIONS

Model		AXIS 50S
Bending motor	HP	7.4
Roller motor 1	HP	4
Roller motor 2	HP	4
Supporting roller motor	HP	2
Dimensions W × L × H – supporting conveyor closed	in	36 × 63 × 63
Dimensions W × L × H – supporting conveyor open	in	64 × 110 × 63
Weight	lb	2,513

BENDING CAPACITY – 45 KG/MM² STEEL (≈ 64,000 PSI)

Bar Ø / flat bar size	Bars at once (pcs)
Ø2"	1
Ø1-5/8"	1
Ø1-1/4"	1
Ø1"	2
Ø13/16"	3
3-1/8" × 13/16" flat	1
3-7/8" × 3/8" flat	1
2-3/8" × 9/16" flat	1

SPIRAL BENDING DIAMETERS

Rebar Ø	Spiral diameter
Ø13/16"	Ø11-3/4"
Ø1-1/8"	Ø14-1/4"
Ø1-5/8"	Ø19-3/4"

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SLS 12 · 1/4"–1/2" (6–12 MM) COIL · MULTI-PRODUCTION AND QUICK SOLUTION FOR PROJECTS

AUTOMATIC STIRRUP BENDING MACHINE – SLS 12

MODEL **SLS 12** Automatic stirrup bender with two decoilers, control console and foot pedal

SLS 12 Omnitron robot for automatic stirrup handling

FEATURES

- Decoilers supplied with the machine store the coils easily; brake system and swivel arms feed the wire to the main shaping unit
- Straightening wheels made of high-quality, heat-treated material for fast and precise processing
- Gears 100% manufactured by GMS
- Pneumatic door design
- User-friendly touch panel and intelligent software; easy-to-operate touch-screen console
- Quick safety action with 3 emergency stops
- Foot pedal assistance; very ergonomic design with easy access to the machine
- More than 50 stirrup shapes pre-loaded; an additional 100 shapes or graphics can be saved
- SLS 12 Omnitron: robotic cell for automatic handling of finished stirrups

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SLS 12 · 1/4"–1/2" (6–12 MM) COIL · MULTI-PRODUCTION AND QUICK SOLUTION FOR PROJECTS

AUTOMATIC STIRRUP BENDING MACHINE – SLS 12 (CONT.)

TECHNICAL SPECIFICATIONS

Model		SLS 12
Wire diameter (double-strand processing)		1/4" / 5/16" / 3/8" / 1/2"
US bar sizes		#2 / #3 / #4
Bending type		2D
Bending capacity (two strands at once)		Ø1/4" / Ø5/16" / Ø3/8" / Ø1/2"
Driving system		Pneumatic
Driving (feed) servo motor	HP	15
Driving speed	ft/min	394
Bending servo motor	HP	5.4
Bending speed	°/s	1250
Cutting motor (AC)	HP	4
Length tolerance	in	± 0.039 – 0.079
Bending tolerance		± 1°
Compressor needed		Yes
Working pressure	psi	120 – 150
Driving gearbox		Industrial type
Control panel		15" HMI screen
Machine dimensions	in	67 × 197 × 92
Decoiler dimensions	in	83 × 85 × 91
Machine weight	lb	6,614
Decoiler weight	lb	2,205
Software language		English (other languages on request)
HS code		846229000000

SUPPLIED WITH THE MACHINE

- Stirrup head for 1/4", 5/16", 3/8" and 1/2" (6 / 8 / 10 / 12 mm) wire
- 2 blades for each wire size (6 / 8 / 10 / 12 mm)
- Bending pin – 1 standard type
- Bending pin – 1 spiral type
- Allen wrench set 2.5–10 mm
- Spanner set 6–30 mm
- Screwdriver set
- Grease pump
- Protective gloves
- Work vest
- 16 steel screw anchors M16 × 150 mm
- 2 decoilers
- Control panel
- Foot pedal

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SLS 12 · PROCESS AND USAGE

AUTOMATIC STIRRUP BENDING MACHINE – SLS 12

PROCESS

Decoiler with brake system and swivel arms

Wire guide from the decoiler

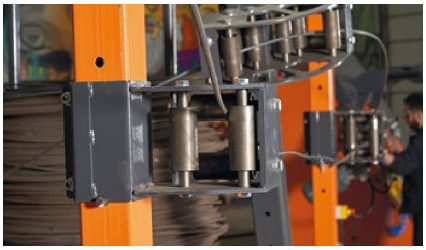

Wire feeding to the shaping unit

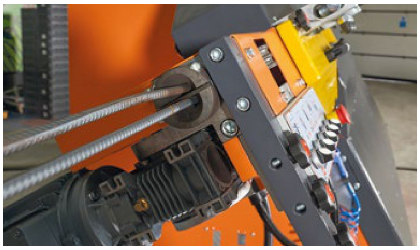

Wire inlet



Pre-straightening rollers



Straightening rollers

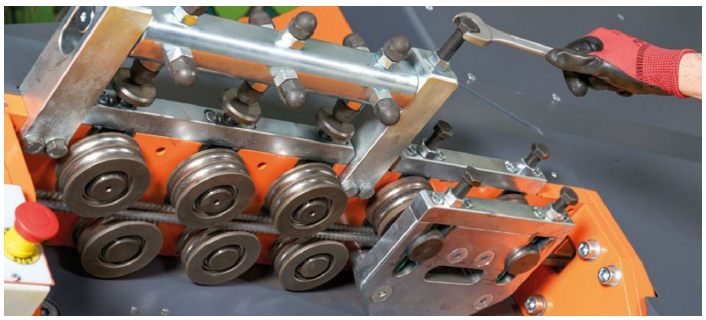

Straightening unit – prepares the wire for a perfect shape

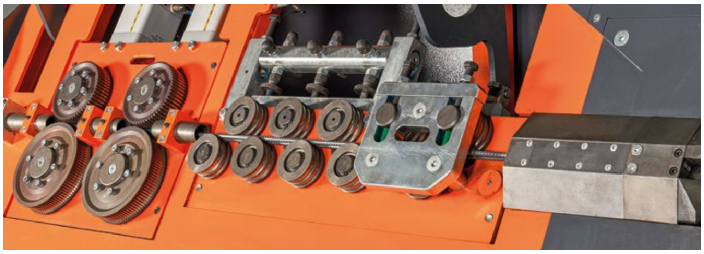

Heat-treated straightening wheels; gears 100% made by GMS

Pneumatic door

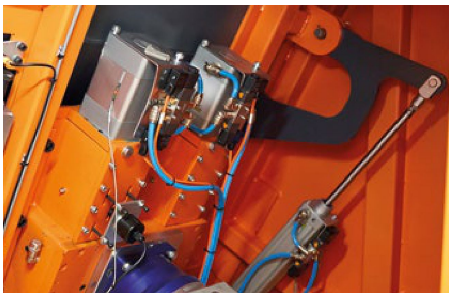

Pneumatic door cylinder

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SLS 12 · USAGE

AUTOMATIC STIRRUP BENDING MACHINE – SLS 12

USAGE

User-friendly touch panel and intelligent software

Easy-to-operate touch-screen console

Foot pedal – ergonomic design, easy access

Emergency stop on the decoiler

Emergency stop on the foot pedal

Emergency stop on the control console

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SLS 12 · FINISHED SHAPES

AUTOMATIC STIRRUP BENDING MACHINE – SLS 12

EXCELLENT FINISHED SHAPE

Shape library

Shape library

Shape library

Stirrup bending

Bending sequence

Bending sequence

Bending sequence

Bending head

Cutting unit

Wire guide

Bending pin

Finished stirrups at the SLS 12

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SLS 12 OMNITRON · ROBOTIC STIRRUP PRODUCTION CELL

AUTOMATIC STIRRUP BENDING MACHINE – SLS 12

SLS 12 OMNITRON ROBOTIC CELL

Robot cell with safety fencing

Robot cell – side view

Complete SLS 12 Omnitron installation with decoilers

Robot picking a finished stirrup

Robot at the bending head

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SLS 12 OMNITRON · ROBOTIC HANDLING

AUTOMATIC STIRRUP BENDING MACHINE – SLS 12

Robot gripper

Stacking finished stirrups

Robot on its base

Robot at the bending head

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

MATRIX 55 · MATRIX 55S · SHEAR LINE FOR REBAR UP TO 2-1/8" (55 MM)

AUTOMATIC REBAR SHEAR LINE – MATRIX 55

MODEL **MATRIX 55S** Shear line with outfeed conveyor and collecting bins

MATRIX 55S maximizes productivity and saves time in cutting operations, eliminating 2–3 operators thanks to its software programming.

TECHNICAL SPECIFICATIONS

Model		MATRIX 55	MATRIX 55S
Hydraulic motor	HP	10	10
Loading roller motors (3 pcs)	HP	1.5	1.5
Loading roller motor (1 pc)	HP	1	1
Discharging roller motors (3 pcs)	HP	1.5	1.5
Moving stopper servo motor	HP	1	–
Main cutting unit travel servo motor	HP	–	2
Total power	HP	21	25
Energy consumption		14.65 kWh	14.65 kWh
Cutting system		Hydraulic	Hydraulic
Electrical working system		PLC controlled	PLC controlled
Control panel		10.1" digital screen	10.1" digital touch screen
Remote control (remote connection)		Available	Available
Collecting bins		Available (manual)	Available (automatic)
Discharging		One side only	Both sides of the outfeed conveyor
Discharging system		Hydraulic	Pneumatic
3-storey loading platforms		–	Available
Barcode system		Optional	Optional
Total weight	lb	11,464	37,479
Cutting accuracy	in	± 0.118	± 0.118
Hydraulic system pressure	psi	3,630	3,630
Pneumatic working air pressure	psi	–	120 – 150

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

MATRIX 55 · MATRIX 55S · CUTTING CAPACITY AND COMPARISON

AUTOMATIC REBAR SHEAR LINE – MATRIX 55

CUTTING CAPACITY (MATRIX 55 AND MATRIX 55S)

Bar Ø	Bar size as listed	45 kg/mm² (≈ 64,000 psi) – bars at once (pcs)	65 kg/mm² (≈ 92,500 psi) – bars at once (pcs)	85 kg/mm² (≈ 120,900 psi) – bars at once (pcs)
Ø2-1/8"	#14	1	1	1
Ø1-5/8"	#14	5	4	4
Ø1-3/8"	#11	6	5	5
Ø1-1/4"	#10	7	6	6
Ø1-1/8"	#9	8	7	7
Ø1"	#8	11	10	10
Ø7/8"	#7	13	12	12
Ø13/16"	#6	14	13	13
Ø5/8"	#5	18	18	18
Ø1/2"	#4	24	24	24
Ø3/8"	#3	30	30	30
Ø5/16"	#3	35	35	35

SHEAR LINE COMPARISON

Feature	MATRIX 55 standard	MATRIX 55 optional	MATRIX 55S standard	MATRIX 55S optional
Infeed conveyor	40 ft (12 m)	60 ft (18 m)	40 ft (12 m)	60 ft (18 m)
Infeed platform	40 ft (12 m); 1 storey, 1 side	60 ft (18 m); 2 storey / 3 storey, 2 sides	40 ft (12 m); 3 storey one side / 1 storey other side	60 ft (18 m); 2 sides, 3 storey
Digital controller	360° turnable	-	Separate console	-
Cutting system	Hydraulic	-	Hydraulic	-
Stopper / discharging	Pneumatic	-	Pneumatic	-
Outfeed conveyor	40 ft (12 m)	40 ft (12 m) or 60 ft (18 m)	40 ft (12 m)	40 ft (12 m) or 60 ft (18 m)
Collecting bins	2 pockets, 1 side	3 or 4 pocket bins	4 pockets one side / 4 pockets other side	-
Collecting bin length	40 ft (12 m)	40 ft (12 m) or 60 ft (18 m)	40 ft (12 m)	40 ft (12 m) or 60 ft (18 m)
Rebar discharging	1 side	-	2 sides	-
Rebar bin storage	Manual	-	Automatic	-
Operator platform	Not available	-	Available	-
Barcode system	Not available	Available	Not available	Available

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

MATRIX 55 · FEATURES

AUTOMATIC REBAR SHEAR LINE – MATRIX 55

MATRIX 55 – INFEED CONVEYOR & FEEDING PLATFORM

Standard 40 ft (12 m) infeed conveyor

Loading rebars onto the infeed conveyor

Galvanized steel conveyor with automatic sliding rollers

DIGITAL CONTROL PANEL & MAIN HYDRAULIC CUTTING UNIT

Digital control panel – 360° movement

Control panel and cutting unit

Heat-treated main hydraulic cutting body

Main hydraulic body

Cutting unit

OUTFEED CONVEYOR & COLLECTING BINS

40 ft (12 m) outfeed conveyor


Outfeed conveyor with automatic sliding rollers


Collecting bins – 2 pockets

Modular base pockets

Sheared rebars unloaded automatically to the desired bin

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

MATRIX 55S · FEATURES

AUTOMATIC REBAR SHEAR LINE – MATRIX 55

MATRIX 55S – FEATURES

- Infeed conveyor & feeding platform: easy assembly; 40 ft (12 m) two-sided loading platform – 3-storey loading platform on one side and 1-storey on the other side
- Made of galvanized steel; rebars move on automatic sliding rollers
- Operator platform extended on 2 sides with bridge; all electrical panels and units are located on this bridge
- Branded electrical components, easy to source on local markets
- 10.1" touch screen digital panel; all functions can be controlled fully automatically or manually by one operator
- Windows-based PLC screen; remote connection available for service
- Required cuts and rebar quantities are calculated and measured automatically on the digital screen
- Barcode system with instant scanning available on request
- Cutting sizes are organized by the hydraulic system; detailed shear requests are handled by servo systems
- Movable main cutting body (travels 1 m / 3.3 ft forward and backward) for precise measuring and cutting
- Outfeed conveyor & collecting bins: 40 ft (12 m) with 4 pockets on one side and 4 pockets on the other side
- Bin arms open automatically (pneumatic); sheared rebars are unloaded automatically to the desired bin
- Modular base pockets; the length can be adapted


Two-sided feeding platform

Loading platform

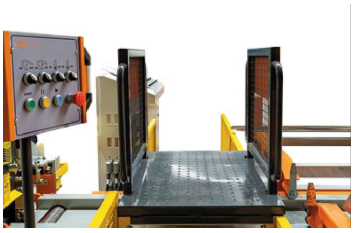
Operator platform with bridge

Infeed conveyor with automatic sliding rollers

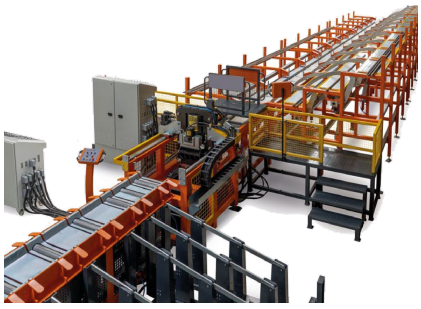
MATRIX 55S with operator platform and bridge

Operator bridge with electrical cabinet

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

MATRIX 55S · CONTROL PANEL, CUTTING UNIT, OUTFEED

AUTOMATIC REBAR SHEAR LINE – MATRIX 55

DIGITAL CONTROL PANEL & MAIN HYDRAULIC CUTTING UNIT

Digital control panel

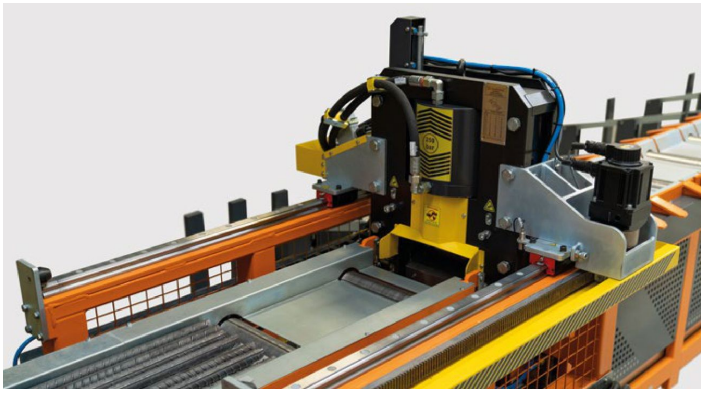

Servo-controlled movable main cutting unit

Barcode system (optional)

Control panel

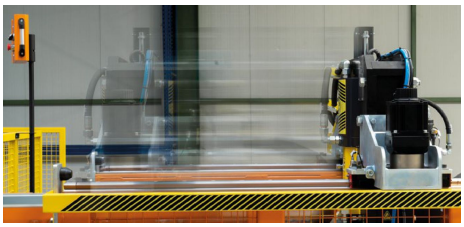

Main cutting unit travelling on its rails

Hydraulic cutting unit



Cutting blades

Cutting rebar bundles

Infeed rollers

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

MATRIX 55S · OUTFEED CONVEYOR & COLLECTING BINS

AUTOMATIC REBAR SHEAR LINE – MATRIX 55

OUTFEED CONVEYOR & COLLECTING BINS

Collecting bin trolley with control box

Outfeed conveyor

Collecting bin arms

Collecting bins on one side

Collecting bins on the other side

Sheared rebars in the bin

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SYNCLONE 45S · SERVO-CONTROLLED DOUBLE BENDER FOR REBAR UP TO 1-5/8" (42 MM, #14)

AUTOMATIC DOUBLE BENDER – SYNCLONE 45S

MODEL **SYNCLONE 45S** Double bender with control console and feeding conveyor

SYNCLONE 45S is designed around customer requirements to reduce costs and increase productivity in rebar and precast plants. This servo-controlled double bender bends rebar up to 1-5/8" (42 mm, #14). User-friendly software reduces labour, maximizes the number of bends and reduces operator errors; the operator has quick options for bending angles and tooling.

FEATURES

- 40 ft (12 m) feeding conveyor unit
- Servo motors
- Pneumatic kick-off system, automatic
- Feeding to bending is manual
- Easy to operate, user-friendly setup and control
- Adjustable roller speed for the conveyors
- Works as a double bender or as manual benders: 1 stationary and 1 moving bender; small shapes can be bent on each bender individually
- Fully automatic digital control panel for fast work and fast bending results
- Minimum distance between the two benders 1 m (3.3 ft); narrower with the help of bending tools
- Mandrels supplied with the machine: Ø2-3/4", Ø3-1/8", Ø3-7/8", Ø4-3/8", Ø4-7/8", Ø5-3/4", Ø6-1/4", Ø7-1/8", Ø8-1/2" (Ø70, 80, 100, 110, 125, 145, 160, 180, 215 mm)
- 10.1" digital panel: saving and recalling many bending shapes automatically; faster programming setups
- Barcode system (with instant scanning) available as an option

Bending heads on the bending table

Digital panel with barcode system (optional)

Operator at the bender control

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SYNCLONE 45S · TECHNICAL DETAILS

AUTOMATIC DOUBLE BENDER – SYNCLONE 45S

Moving bender with control box

Bending heads

Foot pedal control

Bending pins

Bending mandrel and pins

SYNCLONE 45S combined with a MATRIX shear line

TECHNICAL SPECIFICATIONS

Model		SYNCLONE 45S
Stationary bender servo motor	HP	10
Moving bender servo motor	HP	10
Travel servo motor	HP	2.7
Hydraulic motor (AC)	HP	5.4
Roller motor (AC)	HP	4
Total power	HP	34
Energy consumption		17.3 kWh
Total weight	lb	15,432
Bending accuracy	in	± 0.197
Hydraulic system pressure	psi	2,610
Pneumatic working air pressure	psi	120 – 150
Remote control (remote connection)		Available
Collecting bins		Available (3 pcs)
Barcode system		Available (optional)

BENDING CAPACITY

Bar Ø	US bar size	45 kg/mm² (≈ 64,000 psi) – bars at once (pcs)	65 kg/mm² (≈ 92,500 psi) – bars at once (pcs)	85 kg/mm² (≈ 120,900 psi) – bars at once (pcs)
Ø1-5/8"	#14	1	1	–
Ø1-3/8"	#11	1	1	1
Ø1-1/8"	#10	2	2	1
Ø15/16"	#8	3	3	2
Ø13/16"	#6	4	4	3

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

HB 12X3 · HB 12X6 · MH 8C

MESH BENDING & CUTTING MACHINES

HB 12x3 / HB 12x6

Hydraulic mesh bending machine

- Hydraulic
- Working width 9 ft 10 in (3 m); 19 ft 8 in (6 m) optional – HB 12x6
- Bending angles 45°, 90° and 135°

MH 8C

Mechanical mesh cutting machine

- Mechanical system
- Working width 9 ft 10 in (3 m)
- Cuts in 7 seconds

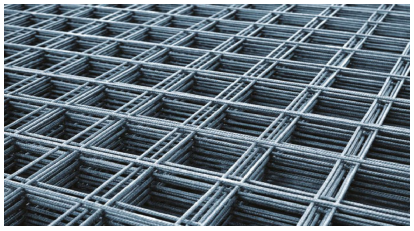

Welded reinforcement mesh



Mesh on the bending beam

Mesh bending

TECHNICAL SPECIFICATIONS

Model		HB 12x3	HB 12x6	MH 8C
Working width	FT	9.8 FT	19.7 FT	9.8 FT
Working width	in	118.1	236.2	118.1
Dimensions W × L × H	in	39 × 134 × 43	39 × 252 × 43	38 × 159 × 52
Motor power	HP	7.4	10	1.5
Weight	lb	1,565	2,756	1,168
Hydraulic oil tank capacity	L	36	36	—
Bending & cutting capacity · 45 kg/mm² steel (≈ 64,000 psi)		Ø1/2"	Ø1/2"	Ø5/16"
Bending & cutting capacity · 65 kg/mm² steel (≈ 92,500 psi)		Ø3/8"	Ø3/8"	Ø5/16"
Bending & cutting capacity · 85 kg/mm² steel (≈ 120,900 psi)		Ø5/16"	Ø5/16"	Ø5/16"

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

RL 2000 · LIGHT CONSTRUCTION EQUIPMENT

WALK-BEHIND DOUBLE DRUM ROLLER

Compact design with folding handle

MODEL **RL 2000** Walk-behind double drum roller

RL 2000 compacting asphalt

Compacted asphalt layer

Smooth steel drum

TECHNICAL SPECIFICATIONS

Model		RL 2000
Engine power @ 3,600 rpm	HP	7.5
Engine displacement		349 cm^3 (21.3 in^3)
Engine speed	rpm	3600
Fuel consumption	L/h	2.5
Battery	V	12
Fuel tank capacity	L	4.3
Engine oil capacity	L	1.2
Drum diameter	in	15.7
Drum width	in	23.6
Water tank	L	25
Hydraulic oil tank capacity	L	50
Vibration frequency	Hz	60
Centrifugal force (front / rear)	metric tons	2
Centrifugal force (front / rear)	US tons	2.2
Static linear load		31.4 lb/in (5.6 kg/cm)
Compaction output per hour	sq ft	29,063
Travel speed (forward / reverse)		2.8 mph (4.5 km/h)
Gradeability	%	40
Machine weight	lb	1,334
Dimensions W × L × H – handle folded	in	28 × 51 × 49
Dimensions W × L × H – handle extended	in	28 × 94 × 40

Other engine options available on request.

BCZ 600 · FOR BRICKS AND AERATED CONCRETE (YTONG) BLOCKS

BRICK & AERATED CONCRETE BLOCK CUTTING MACHINE

MODEL **BCZ 600** Brick and block cutting machine

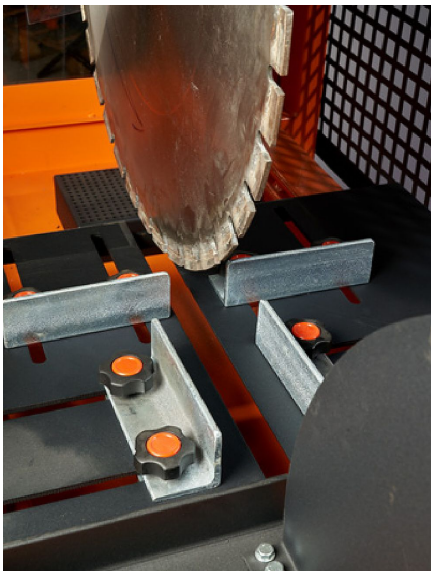

Saw blade and adjustable workpiece guides

Cutting an aerated concrete block

TECHNICAL SPECIFICATIONS

Model		BCZ 600
Dimensions W × L × H	in	33 × 62 × 60
Saw blade Ø × thickness × bore	in	Ø23.6 × 0.2 × 1.2
Saw blade teeth (Z)		30 / 72
Weight	lb	397
Motor power	HP	4
Motor speed	rpm	1450

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

MT 700P · MT 900P

POWER TROWELS

MODEL **MT 700P** Petrol-engine power trowel

Power trowel finishing a concrete floor

TECHNICAL SPECIFICATIONS

Model		MT 700P	MT 900P
Trowel diameter	in	27.6	35.4
Guard ring diameter	in	29.5	37.4
Number of blades		4	4
Blade pitch angle	°	0 – 20	0 – 20
Weight	lb	161	220
Float pan weight	lb	23	35
Dimensions W × L × H – handle folded	in	30 × 38 × 43	37 × 40 × 37
Dimensions W × L × H – handle extended	in	30 × 71 × 43	37 × 75 × 43
Engine		Honda G × 200	Honda G × 200
Engine power @ 3,600 rpm (petrol)	HP	5.5	7.5
Engine displacement		196 cm^3 (12 in^3)	196 cm^3 (12 in^3)
Fuel consumption	L/h	1.7	1.7
Fuel tank capacity	L	3.6	3.6
Engine oil capacity	L	0.6	0.6

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

MT 600K · MT 700K

PLATE COMPACTORS

MODEL **MT 600K** Petrol-engine plate compactor

Plate compactor at work

TECHNICAL SPECIFICATIONS

Model		MT 600K	MT 700K
Dimensions W × L × H – handle folded	in	34 × 17 × 31	39 × 20 × 33
Dimensions W × L × H – handle extended	in	57 × 17 × 30	62 × 20 × 37
Plate size W × L	in	16 × 24	20 × 28
Gradeability	%	30	30
Centrifugal force	metric tons	2	3
Centrifugal force	US tons	2.2	3.3
Vibration frequency	Hz	73	90
Weight	lb	227	287
Engine		Honda G × 200	Honda G × 270
Engine power @ 3,600 rpm (petrol)	HP	6.5	9
Engine displacement		196 cm^3 (12 in^3)	270 cm^3 (16.5 in^3)
Fuel consumption @ 3,600 rpm	L/h	1.7	2.5
Fuel tank capacity	L	3.6	6
Engine oil capacity	L	0.6	1.1

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

GMS 12 · GMS 25S · WELD EDGE PREPARATION

PLATE & PIPE BEVELLING MACHINES

GMS 12

Portable bevelling machine

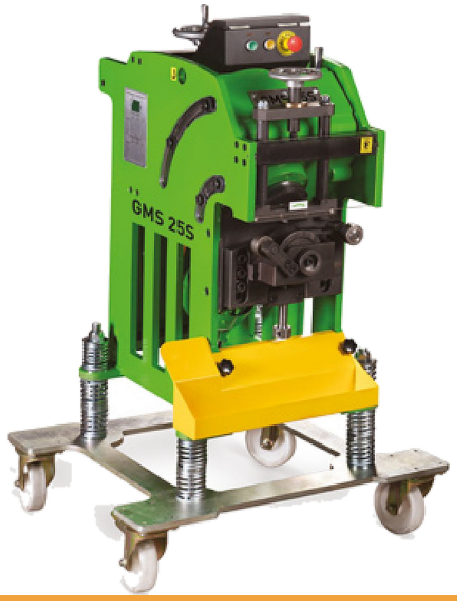

GMS 25S

Mobile bevelling machine

GMS 12 bevelling a plate edge

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

TECHNICAL SPECIFICATIONS

Model		GMS 12	GMS 25S
Motor power	HP	3	4
Plate thickness		1/4" – 1-5/8"	3/8" – 2"
Bevel width		1/2"	13/16"
Pipe diameter		5-7/8" – 11-3/4"	5-7/8"
Bevel angle		0 – 30° (45° optional)	20°–45°
Weight	lb	144	937
Dimensions W × L × H	in	15 × 24 × 27	35 × 30 × 52

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

REBAR HAND TOOLS · LEVERS

CONSTRUCTION HAND TOOLS

1 · Manual stirrup benders

4 · Hand scissors (bolt cutters)

2 · Construction steel keys

3 · Low stool scissors

5 · Adjustable angle bracket

6 · Formwork stripping and stone levers

CAPACITIES

No.	Tool	Rebar capacity
1	Manual stirrup bender	Ø5⁄16″ – Ø5⁄8″
2	Construction steel keys (rebar bending keys)	Ø5⁄16″ – Ø1-3⁄8″
3	Low stool scissors (bench rebar cutter)	Ø5⁄16″ – Ø1-1⁄4″
4	Hand scissors (bolt cutters)	Ø5⁄16″ – Ø5⁄8″
5	Adjustable angle bracket	Ø5⁄16″ – Ø1″
6	Formwork stripping and stone levers	–

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

NovoTech
MACHINE TOOLS Inc.

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga location.

PHONE
+1 647 526 5510

WEB & EMAIL
NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS
1365 Mid-Way Blvd, 26
Mississauga, ON L5T 2J5
Canada

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment.