NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2025

İŞITAN MACHINERY · SOLD & SERVICED IN CANADA BY NOVOTECH

# SHEET METAL FORMING & TUBE BENDING MACHINERY

PLATE ROLLS · BEADING · CIRCULAR CUTTING · PRESS BRAKES · TUBE BENDERS · COLD SAWS

**Since 1959**
MANUFACTURING EXPERIENCE

**20+**
MACHINE FAMILIES

**1-Year**
WARRANTY

**Canada**
PARTS & TECHNICAL SUPPORT



**NovoTech Machine Tools Inc.**
1365 Mid-Way Blvd, 26, Mississauga, ON L5T 2J5, Canada
NovoTechMachineTools.com | info@NovoTechMachineTools.com | +1 647 526 5510

İŞITAN MACHINERY BY NOVOTECH

# CONTENTS

## PLATE BENDING ROLLS

Hydraulic 4-Roll Plate Bending Machines 4R HMS ..... 04
Hydraulic Asymmetrical 3-Roll Plate Rolls MRM-H ..... 10
Mechanical 3-Roll Plate Rolls IRM ..... 18
Motorized Slip Roll Machines IR ..... 22
Economical Plate Rolls RST / RST-M ..... 26
4-Roll Corrugated & Special Machines 4R OM / 4R HOM / 4RH ..... 09
Mechanical Asymmetrical 3-Roll Plate Rolls MRM-S ..... 14
Motorized & Manual 3-Roll Plate Rolls RM / RS ..... 20
Manual Slip Roll Machines R ..... 24
Mechanical-Hydraulic 3-Roll Plate Rolls 3R HMD ..... 27

## BEADING & TRIMMING MACHINES

Hydraulic & Motorized Beading Machines HIBKS / IBKS ..... 28
Manual Beading Machines / Swagers IK / IKS ..... 31
Motorized & Pneumatic Beading Machines IBKS 1.8 / IKM / IKMP ..... 30

## CIRCULAR CUTTING & SEAMING

Circular Cutting Machines IDK ..... 32
Lock Seaming Machine LS-13P ..... 34

## HYDRAULIC PRESS BRAKES

3-Axis CNC Press Brake Edgebender 1240 CNC ..... 35
2-Axis NC Press Brakes Edgebender NC ..... 37

## TUBE & PIPE BENDING

CNC Mandrel Tube Benders SFB-CNC A3 / A5 ..... 40
Compact & Aluminum-Profile Benders SFB 32 / SFB 38-NC/A ..... 46
NC Mandrel Tube Benders SFB NC/C / SFB NC ..... 43
Rotary Draw Benders BK ..... 48

## PIPE-END PROCESSING & SAWING

Pipe Notching, Deburring & End Forming PN / TD / SFF ..... 50
Circular Cold Saws SFC ..... 52

*Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded; plate and sheet capacities are fractions for mild steel (34,100 psi yield) unless noted. Model numbers are manufacturer designations. Photos may show optional equipment.*

ABOUT NOVOTECH

# YOUR CANADIAN SOURCE FOR İŞITAN MACHINERY

Sales, installation, parts and technical support across Canada

**NovoTech Machine Tools Inc.** supplies metal-forming machinery and tooling to fabricators, HVAC and sheet-metal shops, and manufacturers across Canada from our base in Mississauga, Ontario. Every machine in this catalogue is built by İşitan and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

### INCLUDED WITH EVERYNOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

### QUOTING & TOOLING

Send your material, size and wall thickness — we'll match the machine and tooling.

### CUSTOM VOLTAGE

208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on suitable models.

İŞITAN MAKINE · BURSA, TURKEY

# ABOUT THE MANUFACTURER

İşitan was founded in 1959 in a small workshop in Bursa, Turkey, building beading and plate-rolling machines for tinsmiths — many of those early machines are still in production use today. Through the 1970s the range grew to larger pyramid plate rolls, circular cutting shears and flanging machines, and the company began exporting in 1996.

Today İşitan builds in two factories with about 160 employees, producing 3- and 4-roll plate bending machines, beading machines, circular cutting machines, hydraulic press brakes, rotary-draw and mandrel tube and profile benders, pipe-end forming machines and wet-type circular saws — all CE certified and built with European components.

Main production plant — 118,400 sq ft

Second production plant — 43,000 sq ft

Early İşitan plate roll

Classic plate roll

Classic beading machine

Classic slip roll

4R HMS SERIES · NC-CONTROLLED & FULL AUTOMATION

# HYDRAULIC 4-ROLL PLATE BENDING MACHINES

Hydraulic 4-roll plate rolls for light and medium plate, aluminum and stainless steel

**MODEL** **4R HMS 3100x250**

- Motor + planetary reducer drive
- Hydraulic linear roll movement
- Optional NC control
- Optional overhead crane & side supports

Full circles (ferrules) and varying radii are produced easily: the pinch and side rolls travel on a pyramid-style linear path driven by hydraulic cylinders, while the top roll is powered by an electric motor through a planetary gearbox.

## STANDARD FEATURES

- Pinch and side rolls moved linearly by hydraulic cylinders
- Top roll driven by electric motor and planetary gearbox; bottom roll driven through a cardan-joint system
- Overload protection
- Three digital readouts for easy roll positioning
- Hydraulic drop-end for easy removal of finished parts
- Mobile control panel
- Welded steel frames
- Induction-hardened forged or rolled SAE 1050 (CK45) steel rolls
- Cone-bending device
- Hydraulic balancing system
- Built to EC safety directives (CE marked)
- Remote technical support via Wi-Fi
- Operator's manual

## OPTIONAL EQUIPMENT

- NC control with remote assistance
- Overhead crane for large diameters
- Hydraulic side supports for large diameters
- Ground and polished rolls
- Two-speed system
- Infinitely variable speed
- Hydraulic motor for rotation
- Plate ejector system
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

4R HMS · NC CONTROL

# SEMI & FULL AUTOMATION

Semi- and full-automation options enable high-volume series production

**MODEL** **4R HMS 2050x130 · NC + overhead crane + sheet feeder + ejector**

## AUTOMATION PACKAGE

- Vacuum sheet lifting and positioning feeder
- Automatic bending with the NC control unit
- Ejector system to transfer parts to the welding line
- Hydraulic overhead crane for large diameters to prevent stretching
- Air-system control and resetting

## BENEFITS OF NC CONTROL

- Automatic bending by programming roll positions — standard sizes at high volume
- Easy to use, no high-tech knowledge required; ideal for mass production
- Multilingual interface (16 languages, more on request)
- Standard 4-axis system expandable to 7 axes for overhead crane and side supports
- Works with sheet feeder and part ejector extensions
- Teach mode records programs step by step
- Precise roll positioning with semi-automatic bending
- With stored programs the operator only loads and unloads material
- Stores thousands of programs; save and recall via USB
- Capacity chart viewable on the NC screen

NC control panel

NC program screen

Ejector system

Full automation line

4R HMS · FROM 2.1 FT TO 13.4 FT

# 4R HMS MODEL RANGE

### 4R HMS 2050x200

Standard machine with digital readouts

### 4R HMS 1550x100

Optional NC control + automatic plate ejector + mechanical overhead crane

### 4R HMS 1270x100

Optional NC control + automatic plate ejector + mechanical overhead crane

### 4R HMS 2050x180

NC control and automatic plate ejector

### 4R HMS 4100x250

Standard type

### 4R HMS 1050x100

Standard type

Standard safety switch on drop-end

Standard pressure adjustment on bottom roll

Standard cone-bending device

4R HMS 650x80 — compact standard type

# TECHNICAL SPECIFICATIONS 4R HMS

## 2.1–3.4 FT — 4R HMS 650 – 1050

WORKING LENGTH 25.6" – 41.3" · 4 MODELS

| Model | | 4R HMS 650x80 | 4R HMS 1050x80 | 4R HMS 1050x100 | 4R HMS 1050x130 |
|---|---|---|---|---|---|
| Working length | FT | 2.1 FT | 3.4 FT | 3.4 FT | 3.4 FT |
| Working length | in | 25.6 | 41.3 | 41.3 | 41.3 |
| Pre-bending capacity | | 12 ga / 11 ga | 16 ga / 14 ga | 14 ga / 12 ga | 8 ga / 3⁄16" |
| Rolling capacity | | 11 ga / 10 ga | 14 ga / 12 ga | 12 ga / 10 ga | 3⁄16" / 1⁄4" |
| Top & bottom roll Ø | in | 3.15 | 3.15 | 3.94 | 5.12 |
| Side roll Ø | in | 3.15 | 3.15 | 3.54 | 5.12 |
| Min. rolling Ø | in | 4.7 / 15.7 | 4.7 / 15.7 | 5.9 / 19.7 | 7.7 / 25.6 |
| Motor power | HP | 1.5 + 1.0 | 1.5 + 1.0 | 1.5 + 1.0 | 3.0 + 1.5 |
| Rolling speed | ft/min | 16 | 16 | 21 | 16 |
| Oil tank capacity | L | 15 | 15 | 15 | 40 |
| Dimensions L × W × H | in | 77 × 37 × 38 | 93 × 37 × 38 | 93 × 45 × 38 | 109 × 45 × 43 |
| Weight | lb | 2,094 | 2,535 | 2,756 | 4,519 |

## 4.2 FT — 4R HMS 1270

WORKING LENGTH 50.0" · 6 MODELS

| Model | | 4R HMS 1270x80 | 4R HMS 1270x100 | 4R HMS 1270x130 | 4R HMS 1270x150 | 4R HMS 1270x180 | 4R HMS 1270x200 |
|---|---|---|---|---|---|---|---|
| Working length | FT | 4.2 FT | 4.2 FT | 4.2 FT | 4.2 FT | 4.2 FT | 4.2 FT |
| Working length | in | 50.0 | 50.0 | 50.0 | 50.0 | 50.0 | 50.0 |
| Pre-bending capacity | | 20 ga / 16 ga | 16 ga / 14 ga | 11 ga / 8 ga | 8 ga / 3⁄16" | 3⁄16" / 5⁄16" | 5⁄16" / 3⁄8" |
| Rolling capacity | | 16 ga / 14 ga | 14 ga / 11 ga | 8 ga / 3⁄16" | 3⁄16" / 1⁄4" | 5⁄16" / 3⁄8" | 3⁄8" / 1⁄2" |
| Top & bottom roll Ø | in | 3.15 | 3.94 | 5.12 | 5.91 | 7.09 | 7.87 |
| Side roll Ø | in | 3.15 | 3.54 | 5.12 | 5.12 | 5.91 | 7.09 |
| Min. rolling Ø | in | 4.7 / 15.7 | 5.9 / 17.7 | 7.7 / 25.6 | 8.9 / 29.5 | 10.6 / 35.4 | 11.8 / 39.4 |
| Motor power | HP | 1.5 + 1.5 | 1.5 + 1.5 | 3.0 + 1.5 | 3.0 + 1.5 | 5.4 + 2.0 | 5.4 + 2.0 |
| Rolling speed | ft/min | 16 | 21 | 16 | 20 | 16 | 20 |
| Oil tank capacity | L | 15 | 15 | 40 | 40 | 40 | 40 |
| Dimensions L × W × H | in | 101 × 37 × 38 | 105 × 41 × 38 | 114 × 45 × 44 | 119 × 45 × 44 | 121 × 53 × 51 | 121 × 53 × 51 |
| Weight | lb | 2,756 | 2,976 | 4,740 | 5,027 | 5,952 | 6,614 |

## 5.1 FT — 4R HMS 1550

WORKING LENGTH 61.0" · 7 MODELS

| Model | | 4R HMS 1550x100 | 4R HMS 1550x130 | 4R HMS 1550x150 | 4R HMS 1550x180 | 4R HMS 1550x200 | 4R HMS 1550x220 | 4R HMS 1550x250 |
|---|---|---|---|---|---|---|---|---|
| Working length | FT | 5.1 FT | 5.1 FT | 5.1 FT | 5.1 FT | 5.1 FT | 5.1 FT | 5.1 FT |
| Working length | in | 61.0 | 61.0 | 61.0 | 61.0 | 61.0 | 61.0 | 61.0 |
| Pre-bending capacity | | 20 ga / 16 ga | 12 ga / 10 ga | 10 ga / 7 ga | 3⁄16" / 1⁄4" | 1⁄4" / 3⁄8" | 5⁄16" / 3⁄8" | 3⁄8" / 1⁄2" |
| Rolling capacity | | 16 ga / 14 ga | 10 ga / 7 ga | 7 ga / 1⁄4" | 1⁄4" / 3⁄8" | 3⁄8" / 7⁄16" | 3⁄8" / 1⁄2" | 1⁄2" / 9⁄16" |
| Top & bottom roll Ø | in | 3.94 | 5.12 | 5.91 | 7.09 | 7.87 | 8.66 | 9.84 |
| Side roll Ø | in | 3.54 | 5.12 | 5.12 | 5.91 | 7.09 | 7.09 | 7.87 |
| Min. rolling Ø | in | 5.9 / 17.7 | 7.7 / 25.6 | 8.9 / 29.5 | 10.6 / 35.4 | 11.8 / 39.4 | 13.0 / 43.3 | 14.8 / 49.2 |
| Motor power | HP | 1.5 + 1.5 | 3.0 + 1.5 | 3.0 + 1.5 | 5.4 + 2.0 | 5.4 + 2.0 | 7.4 + 2.0 | 10 + 2.0 |
| Rolling speed | ft/min | 21 | 16 | 20 | 16 | 20 | 16 | 16 |
| Oil tank capacity | L | 15 | 40 | 40 | 40 | 40 | 40 | 40 |
| Dimensions L × W × H | in | 112 × 37 × 38 | 130 × 45 × 44 | 130 × 45 × 44 | 132 × 53 × 51 | 132 × 53 × 51 | 138 × 59 × 54 | 138 × 59 × 54 |
| Weight | lb | 3,307 | 4,960 | 5,225 | 6,393 | 7,165 | 9,370 | 10,251 |

*Capacities shown as two values: at a minimum rolling Ø of 1.5× the top roll Ø / at 5× the top roll Ø. Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga).*

# TECHNICAL SPECIFICATIONS 4R HMS

## 6.7 FT — 4R HMS 2050

WORKING LENGTH 80.7" · 6 MODELS

| Model | | 4R HMS 2050x130 | 4R HMS 2050x150 | 4R HMS 2050x180 | 4R HMS 2050x200 | 4R HMS 2050x220 | 4R HMS 2050x250 |
|---|---|---|---|---|---|---|---|
| Working length | FT | 6.7 FT | 6.7 FT | 6.7 FT | 6.7 FT | 6.7 FT | 6.7 FT |
| Working length | in | 80.7 | 80.7 | 80.7 | 80.7 | 80.7 | 80.7 |
| Pre-bending capacity | | 14 ga / 11 ga | 11 ga / 8 ga | 8 ga / 1/4" | 1/4" / 5/16" | 1/4" / 3/8" | 5/16" / 3/8" |
| Rolling capacity | | 11 ga / 8 ga | 8 ga / 1/4" | 1/4" / 5/16" | 5/16" / 3/8" | 3/8" / 7/16" | 3/8" / 1/2" |
| Top & bottom roll Ø | in | 5.12 | 5.91 | 7.09 | 7.87 | 8.66 | 9.84 |
| Side roll Ø | in | 5.12 | 5.12 | 5.91 | 7.09 | 7.09 | 7.87 |
| Min. rolling Ø | in | 7.7 / 25.6 | 8.9 / 29.5 | 10.6 / 35.4 | 11.8 / 39.4 | 13.0 / 43.3 | 14.8 / 49.2 |
| Motor power | HP | 3.0 + 1.5 | 3.0 + 1.5 | 5.4 + 2.0 | 5.4 + 2.0 | 7.4 + 2.0 | 10 + 2.0 |
| Rolling speed | ft/min | 16 | 20 | 16 | 20 | 16 | 16 |
| Oil tank capacity | L | 40 | 40 | 40 | 40 | 40 | 40 |
| Dimensions L × W × H | in | 142 × 47 × 44 | 142 × 47 × 44 | 152 × 53 × 51 | 152 × 56 × 51 | 157 × 59 × 54 | 157 × 59 × 54 |
| Weight | lb | 4,982 | 6,173 | 7,275 | 8,267 | 10,582 | 11,795 |

## 8.4 FT — 4R HMS 2550

WORKING LENGTH 100.4" · 5 MODELS

| Model | | 4R HMS 2550x150 | 4R HMS 2550x180 | 4R HMS 2550x200 | 4R HMS 2550x220 | 4R HMS 2550x250 |
|---|---|---|---|---|---|---|
| Working length | FT | 8.4 FT | 8.4 FT | 8.4 FT | 8.4 FT | 8.4 FT |
| Working length | in | 100.4 | 100.4 | 100.4 | 100.4 | 100.4 |
| Pre-bending capacity | | 14 ga / 11 ga | 11 ga / 8 ga | 8 ga / 1/4" | 3/16" / 1/4" | 1/4" / 5/16" |
| Rolling capacity | | 11 ga / 8 ga | 8 ga / 1/4" | 1/4" / 5/16" | 1/4" / 3/8" | 5/16" / 3/8" |
| Top & bottom roll Ø | in | 5.91 | 7.09 | 7.87 | 8.66 | 9.84 |
| Side roll Ø | in | 5.12 | 5.91 | 7.09 | 7.09 | 7.87 |
| Min. rolling Ø | in | 8.9 / 29.5 | 10.6 / 35.4 | 11.8 / 39.4 | 13.0 / 43.3 | 14.8 / 49.2 |
| Motor power | HP | 3.0 + 1.5 | 5.4 + 2.0 | 5.4 + 2.0 | 7.4 + 2.0 | 10 + 2.0 |
| Rolling speed | ft/min | 20 | 16 | 20 | 16 | 16 |
| Oil tank capacity | L | 40 | 40 | 40 | 40 | 40 |
| Dimensions L × W × H | in | 169 × 45 × 44 | 171 × 53 × 51 | 171 × 53 × 51 | 177 × 59 × 54 | 177 × 59 × 54 |
| Weight | lb | 7,121 | 8,157 | 9,370 | 11,905 | 13,448 |

## 10.2 FT — 4R HMS 3100

WORKING LENGTH 122.0" · 4 MODELS

| Model | | 4R HMS 3100x180 | 4R HMS 3100x200 | 4R HMS 3100x220 | 4R HMS 3100x250 |
|---|---|---|---|---|---|
| Working length | FT | 10.2 FT | 10.2 FT | 10.2 FT | 10.2 FT |
| Working length | in | 122.0 | 122.0 | 122.0 | 122.0 |
| Pre-bending capacity | | 14 ga / 11 ga | 11 ga / 8 ga | 8 ga / 1/4" | 3/16" / 1/4" |
| Rolling capacity | | 11 ga / 8 ga | 8 ga / 1/4" | 1/4" / 5/16" | 1/4" / 3/8" |
| Top & bottom roll Ø | in | 7.09 | 7.87 | 8.66 | 9.84 |
| Side roll Ø | in | 5.91 | 7.09 | 7.09 | 7.87 |
| Min. rolling Ø | in | 10.6 / 35.4 | 11.8 / 39.4 | 13.0 / 43.3 | 14.8 / 49.2 |
| Motor power | HP | 5.4 + 2.0 | 5.4 + 2.0 | 7.4 + 2.0 | 10 + 2.0 |
| Rolling speed | ft/min | 16 | 20 | 16 | 16 |
| Oil tank capacity | L | 40 | 40 | 40 | 40 |
| Dimensions L × W × H | in | 191 × 53 × 51 | 191 × 53 × 51 | 197 × 59 × 54 | 197 × 59 × 54 |
| Weight | lb | 9,039 | 10,472 | 13,228 | 14,991 |

*Capacities shown as two values: at a minimum rolling Ø of 1.5× the top roll Ø / at 5× the top roll Ø. Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga). 4R HMS 4100 models available on request.*

4R OM · 4R HOM · 4RH · SPECIAL PRODUCTION MACHINES

# 4-ROLL CORRUGATED SHEET & SPECIAL BENDING MACHINES

Purpose-built machines for corrugated galvanized sheet and special applications

MODEL **4R OM 1550x220**

These forming machines are designed specifically to roll corrugated galvanized steel sheet up to **11 ga** thick. Corrugated steel is mainly rolled for tanks, roofs and silos, and the corrugation profile can be custom made to the customer's requirements.

- Motor + reducer drive
- Motorized linear movement

### 4R HOM 1270x220

Special-production corrugated sheet bending machine

### 4R HOM 2050x250

4-roll corrugated sheet bending machine

### 4RH 10x90

Standard NC controlled · motor + planetary reducer · hydraulic linear movement

**3.4 FT** **4RH 10X90**

SPECIAL SHEET BENDING MACHINE

| Model | | 4RH 10x90 |
|---|---|---|
| Working length | FT | 3.4 FT |
| Working length | in | 41.3 |
| Pre-bending capacity | | 14 ga |
| Rolling capacity | | 12 ga |
| Roll Ø | in | 3.54 |
| Motor power | HP | 3.0 |
| Rolling speed | ft/min | 15 |
| Dimensions L × W × H | in | 89 × 39 × 59 |
| Weight | lb | 1,984 |

## OPTIONAL EQUIPMENT

+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

MRM-H SERIES · INITIAL PINCH

# HYDRAULIC ASYMMETRICAL 3-ROLL PLATE BENDING MACHINES

Hydraulic back and bottom roll movement with motor-driven rolls

**MODEL** MRM-H 3100x250

- Motor + planetary reducer drive
- Hydraulic linear movement
- Hydraulic drop-end
- Control panel with digital readouts

## STANDARD FEATURES

- Welded steel main frames
- Hydraulic drop-end
- Mobile control panel
- Motor-driven centralized rolls
- Hydraulic movement of back and bottom rolls
- Main motor with brake system
- Cone bending and pre-bending
- Planetary gearbox drive on two rolls
- Back roll on ball bearings for thin-sheet work
- Certified SAE 1050 (CK45) forged steel rolls with high tensile strength
- Hardened rolls
- 2 digital readouts
- Built to EC safety directives (CE marked)
- Operator's manual

## OPTIONAL EQUIPMENT

- Overhead crane for large diameters
- Hydraulic side supports for large diameters
- Ground and polished rolls
- Wire grooves on roll ends
- NC control
- Two-speed operation
- Adjustable stepless speed
- Hydraulic motor drive
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

MRM-H · FROM 2.1 FT TO 10 FT

# MRM-H MODEL RANGE

## MRM-H 2050x180

Motor + planetary reducer drive · hydraulic linear movement

## MRM-H 1550x150

Standard control panel with digital readouts

Optional wire grooves

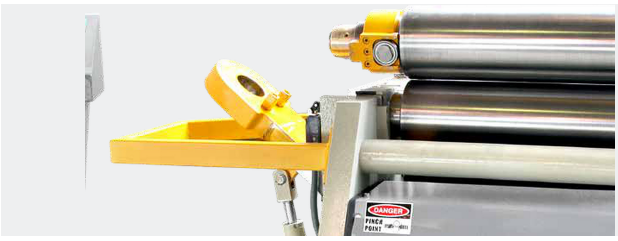

Roll-end and drop-end detail

## INITIAL-PINCH ROLLING SEQUENCE

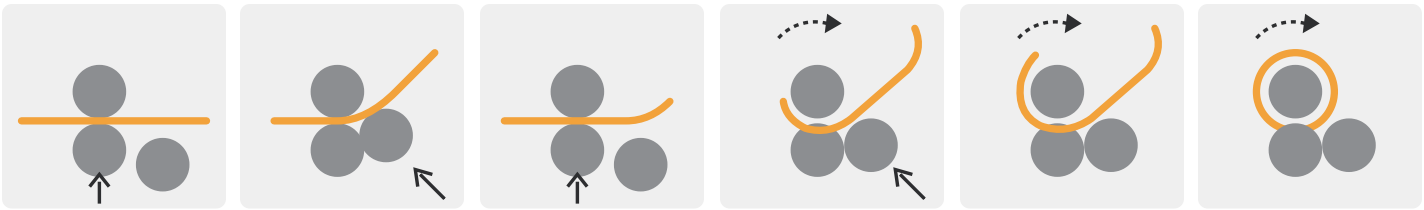

1 PINCH | 2 PRE-BEND | 3 FEED | 4 ROLL | 5 ROLL | 6 CLOSE

# TECHNICAL SPECIFICATIONS MRM-H

## 2.1–3.4 FT — MRM-H 650 – 1050

WORKING LENGTH 25.6″ – 41.3″ · 4 MODELS

| Model | | MRM-H 650x80 | MRM-H 1050x80 | MRM-H 1050x100 | MRM-H 1050x130 |
|---|---|---|---|---|---|
| Working length | FT | 2.1 FT | 3.4 FT | 3.4 FT | 3.4 FT |
| Working length | in | 25.6 | 41.3 | 41.3 | 41.3 |
| Pre-bending capacity | | 12 ga / 11 ga | 16 ga / 14 ga | 14 ga / 12 ga | 12 ga / 11 ga |
| Rolling capacity | | 11 ga / 10 ga | 14 ga / 12 ga | 12 ga / 11 ga | 11 ga / 3⁄16″ |
| Top & bottom roll Ø | in | 3.15 | 3.15 | 3.94 | 5.12 |
| Side roll Ø | in | 3.15 | 3.15 | 3.54 | 5.12 |
| Min. rolling Ø | in | 4.7 / 15.7 | 4.7 / 15.7 | 5.9 / 19.7 | 7.7 / 25.6 |
| Motor power | HP | 1.5 + 1.0 | 1.5 + 1.5 | 1.5 + 1.0 | 3.0 + 1.5 |
| Rolling speed | ft/min | 16 | 16 | 21 | 16 |
| Oil tank capacity | L | 15 | 15 | 15 | 25 |
| Dimensions L × W × H | in | 77 × 30 × 38 | 93 × 30 × 38 | 93 × 30 × 38 | 93 × 37 × 44 |
| Weight | lb | 1,764 | 2,028 | 2,469 | 3,792 |

## 4.2 FT — MRM-H 1270

WORKING LENGTH 50.0″ · 6 MODELS

| Model | | MRM-H 1270x80 | MRM-H 1270x100 | MRM-H 1270x130 | MRM-H 1270x150 | MRM-H 1270x180 | MRM-H 1270x200 |
|---|---|---|---|---|---|---|---|
| Working length | FT | 4.2 FT | 4.2 FT | 4.2 FT | 4.2 FT | 4.2 FT | 4.2 FT |
| Working length | in | 50.0 | 50.0 | 50.0 | 50.0 | 50.0 | 50.0 |
| Pre-bending capacity | | 20 ga / 16 ga | 16 ga / 14 ga | 11 ga / 8 ga | 8 ga / 3⁄16″ | 3⁄16″ / 5⁄16″ | 5⁄16″ / 3⁄8″ |
| Rolling capacity | | 16 ga / 14 ga | 14 ga / 11 ga | 8 ga / 3⁄16″ | 3⁄16″ / 1⁄4″ | 5⁄16″ / 3⁄8″ | 3⁄8″ / 1⁄2″ |
| Top & bottom roll Ø | in | 3.15 | 3.94 | 5.12 | 5.91 | 7.09 | 7.87 |
| Side roll Ø | in | 3.15 | 3.54 | 5.12 | 5.12 | 5.91 | 7.09 |
| Min. rolling Ø | in | 4.7 / 15.7 | 5.9 / 17.7 | 7.7 / 25.6 | 8.9 / 29.5 | 10.6 / 35.4 | 11.8 / 39.4 |
| Motor power | HP | 1.5 + 1.5 | 1.5 + 1.5 | 3.0 + 1.5 | 3.0 + 1.5 | 5.4 + 1.5 | 5.4 + 2.0 |
| Rolling speed | ft/min | 16 | 21 | 16 | 20 | 16 | 20 |
| Oil tank capacity | L | 15 | 15 | 25 | 25 | 25 | 25 |
| Dimensions L × W × H | in | 101 × 30 × 38 | 101 × 30 × 38 | 119 × 37 × 44 | 119 × 37 × 44 | 121 × 43 × 51 | 121 × 43 × 51 |
| Weight | lb | 2,094 | 2,535 | 3,858 | 4,134 | 4,630 | 4,850 |

## 5.1 FT — MRM-H 1550

WORKING LENGTH 61.0″ · 7 MODELS

| Model | | MRM-H 1550x100 | MRM-H 1550x130 | MRM-H 1550x150 | MRM-H 1550x180 | MRM-H 1550x200 | MRM-H 1550x220 | MRM-H 1550x250 |
|---|---|---|---|---|---|---|---|---|
| Working length | FT | 5.1 FT | 5.1 FT | 5.1 FT | 5.1 FT | 5.1 FT | 5.1 FT | 5.1 FT |
| Working length | in | 61.0 | 61.0 | 61.0 | 61.0 | 61.0 | 61.0 | 61.0 |
| Pre-bending capacity | | 20 ga / 16 ga | 12 ga / 10 ga | 10 ga / 7 ga | 3⁄16″ / 1⁄4″ | 1⁄4″ / 3⁄8″ | 5⁄16″ / 3⁄8″ | 3⁄8″ / 1⁄2″ |
| Rolling capacity | | 16 ga / 14 ga | 10 ga / 7 ga | 7 ga / 1⁄4″ | 1⁄4″ / 3⁄8″ | 3⁄8″ / 7⁄16″ | 3⁄8″ / 1⁄2″ | 1⁄2″ / 9⁄16″ |
| Top & bottom roll Ø | in | 3.94 | 5.12 | 5.91 | 7.09 | 7.87 | 8.66 | 9.84 |
| Side roll Ø | in | 3.54 | 5.12 | 5.12 | 5.91 | 7.09 | 7.09 | 7.87 |
| Min. rolling Ø | in | 5.9 / 17.7 | 7.7 / 25.6 | 8.9 / 29.5 | 10.6 / 35.4 | 11.8 / 39.4 | 13.0 / 43.3 | 14.8 / 49.2 |
| Motor power | HP | 1.5 + 1.5 | 3.0 + 1.5 | 3.0 + 1.5 | 5.4 + 1.5 | 5.4 + 2.0 | 7.4 + 2.0 | 10 + 2.0 |
| Rolling speed | ft/min | 21 | 16 | 20 | 16 | 20 | 16 | 16 |
| Oil tank capacity | L | 15 | 25 | 25 | 25 | 25 | 25 | 25 |
| Dimensions L × W × H | in | 112 × 30 × 38 | 130 × 37 × 44 | 130 × 37 × 44 | 132 × 43 × 51 | 132 × 43 × 51 | 138 × 47 × 54 | 138 × 47 × 54 |
| Weight | lb | 2,646 | 4,079 | 4,409 | 5,093 | 5,401 | 7,165 | 7,937 |

*Capacities shown as two values: at a minimum rolling Ø of 1.5× the top roll Ø / at 5× the top roll Ø. Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga).*

# TECHNICAL SPECIFICATIONS MRM-H

## 6.7 FT — MRM-H 2050

WORKING LENGTH 80.7" · 6 MODELS

| Model | | MRM-H 2050x130 | MRM-H 2050x150 | MRM-H 2050x180 | MRM-H 2050x200 | MRM-H 2050x220 | MRM-H 2050x250 |
|---|---|---|---|---|---|---|---|
| Working length | FT | 6.7 FT | 6.7 FT | 6.7 FT | 6.7 FT | 6.7 FT | 6.7 FT |
| Working length | in | 80.7 | 80.7 | 80.7 | 80.7 | 80.7 | 80.7 |
| Pre-bending capacity | | 14 ga / 11 ga | 11 ga / 8 ga | 8 ga / 1/4" | 1/4" / 5/16" | 1/4" / 3/8" | 5/16" / 3/8" |
| Rolling capacity | | 11 ga / 8 ga | 8 ga / 1/4" | 1/4" / 5/16" | 5/16" / 3/8" | 3/8" / 7/16" | 3/8" / 1/2" |
| Top & bottom roll Ø | in | 5.12 | 5.91 | 7.09 | 7.87 | 8.66 | 9.84 |
| Side roll Ø | in | 5.12 | 5.12 | 5.91 | 7.09 | 7.09 | 7.87 |
| Min. rolling Ø | in | 7.7 / 25.6 | 8.9 / 29.5 | 10.6 / 35.4 | 11.8 / 39.4 | 13.0 / 43.3 | 14.8 / 49.2 |
| Motor power | HP | 3.0 + 1.5 | 3.0 + 1.5 | 5.4 + 1.5 | 5.4 + 2.0 | 7.4 + 2.0 | 10 + 2.0 |
| Rolling speed | ft/min | 16 | 20 | 16 | 20 | 16 | 16 |
| Oil tank capacity | L | 25 | 25 | 25 | 25 | 25 | 25 |
| Dimensions L × W × H | in | 150 × 37 × 44 | 150 × 37 × 44 | 152 × 43 × 51 | 152 × 43 × 51 | 157 × 47 × 54 | 157 × 47 × 54 |
| Weight | lb | 4,519 | 4,960 | 5,930 | 6,504 | 8,267 | 9,259 |

## 8.4 FT — MRM-H 2550

WORKING LENGTH 100.4" · 5 MODELS

| Model | | MRM-H 2550x150 | MRM-H 2550x180 | MRM-H 2550x200 | MRM-H 2550x220 | MRM-H 2550x250 |
|---|---|---|---|---|---|---|
| Working length | FT | 8.4 FT | 8.4 FT | 8.4 FT | 8.4 FT | 8.4 FT |
| Working length | in | 100.4 | 100.4 | 100.4 | 100.4 | 100.4 |
| Pre-bending capacity | | 14 ga / 11 ga | 11 ga / 8 ga | 8 ga / 1/4" | 3/16" / 1/4" | 1/4" / 5/16" |
| Rolling capacity | | 11 ga / 8 ga | 8 ga / 1/4" | 1/4" / 5/16" | 1/4" / 3/8" | 5/16" / 3/8" |
| Top & bottom roll Ø | in | 5.91 | 7.09 | 7.87 | 8.66 | 9.84 |
| Side roll Ø | in | 5.12 | 5.91 | 7.09 | 7.09 | 7.87 |
| Min. rolling Ø | in | 8.9 / 29.5 | 10.6 / 35.4 | 11.8 / 39.4 | 13.0 / 43.3 | 14.8 / 49.2 |
| Motor power | HP | 3.0 + 1.5 | 5.4 + 1.5 | 5.4 + 2.0 | 7.4 + 2.0 | 10 + 2.0 |
| Rolling speed | ft/min | 20 | 16 | 20 | 16 | 16 |
| Oil tank capacity | L | 25 | 25 | 25 | 25 | 25 |
| Dimensions L × W × H | in | 169 × 37 × 44 | 171 × 43 × 51 | 171 × 43 × 51 | 177 × 47 × 54 | 177 × 47 × 54 |
| Weight | lb | 5,512 | 6,768 | 7,606 | 9,370 | 10,582 |

## 10 FT — MRM-H 3100

WORKING LENGTH 120.1" · 4 MODELS

| Model | | MRM-H 3100x180 | MRM-H 3100x200 | MRM-H 3100x220 | MRM-H 3100x250 |
|---|---|---|---|---|---|
| Working length | FT | 10 FT | 10 FT | 10 FT | 10 FT |
| Working length | in | 120.1 | 120.1 | 120.1 | 120.1 |
| Pre-bending capacity | | 14 ga / 11 ga | 11 ga / 8 ga | 8 ga / 1/4" | 3/16" / 1/4" |
| Rolling capacity | | 11 ga / 8 ga | 8 ga / 1/4" | 1/4" / 5/16" | 1/4" / 3/8" |
| Top & bottom roll Ø | in | 7.09 | 7.87 | 8.66 | 9.84 |
| Side roll Ø | in | 5.91 | 7.09 | 7.09 | 7.87 |
| Min. rolling Ø | in | 10.6 / 35.4 | 11.8 / 39.4 | 13.0 / 43.3 | 14.8 / 49.2 |
| Motor power | HP | 5.4 + 1.5 | 5.4 + 2.0 | 7.4 + 2.0 | 10 + 2.0 |
| Rolling speed | ft/min | 16 | 20 | 16 | 16 |
| Oil tank capacity | L | 25 | 25 | 25 | 25 |
| Dimensions L × W × H | in | 191 × 43 × 51 | 191 × 43 × 51 | 197 × 47 × 54 | 197 × 47 × 54 |
| Weight | lb | 7,606 | 8,708 | 10,472 | 11,905 |

*Capacities shown as two values: at a minimum rolling Ø of 1.5× the top roll Ø / at 5× the top roll Ø. Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga).*

MRM-S SERIES · INITIAL PINCH

# MECHANICAL ASYMMETRICAL 3-ROLL PLATE BENDING MACHINES

Motorized plate rolls for light to medium-duty work

**MODEL** MRM-S 2050x190

- Motor + planetary gearbox drive
- Linear back-roll movement
- Manual drop-end with safety switch

Built for light to medium-duty work, the MRM-S mechanical series rolls plate up to 3/8" (0.39") thick. It is ideal for aluminum forming, HVAC and ventilation ducting, signage panels, machine guards and general sheet-metal enclosures.

## STANDARD FEATURES

- Planetary gearbox drive on all models
- High-tensile rolls in certified SAE 1050 (CK45) steel
- Fabricated welded-steel main frames
- Manual drop-end top roll
- Mobile pendant control panel
- Cone-bending device
- Central lubrication system
- Top-roll support system
- Precision rolling with brake motor
- Motorized back-roll adjustment
- Built to EC safety directives (CE certified)
- Operator's manual

## OPTIONAL EQUIPMENT

- Digital readout (DRO) for back roll
- Induction-hardened rolls
- Extended roll shafts for profile & pipe bending
- Profile & section bending roll set
- Motorized bottom roll
- Plastic-coated top roll for Alucobond / ACM
- Variable stepless speed
- NC control
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Optional control panel with digital readout

Optional extended roll shafts and section bending roll set

Standard cone-bending device

Manual drop-end with safety switch

## INITIAL-PINCH ROLLING SEQUENCE

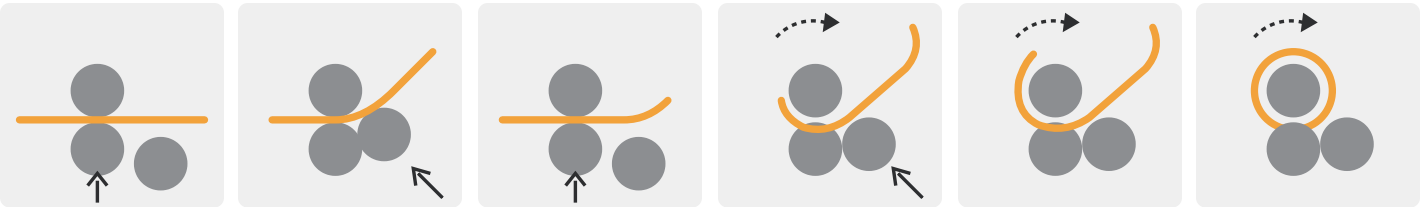


MRM-S · SPECIAL MODEL

# SPECIAL MODEL FOR COMPOSITE PANELS

Top roll with segmented plastic (Delrin) rings

A special version of the MRM-S fitted with a top roll covered in segmented hard-plastic (Delrin) rings. Designed to roll aluminum composite panels for exterior signage, architectural cladding and outdoor design work — without marking the finished surface.

Optional segmented plastic-coated top roll for composite panels

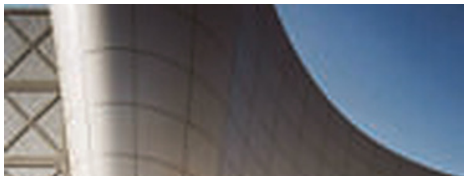

# TECHNICAL SPECIFICATIONS MRM-S

## 3.4 FT MRM-S 1050

WORKING LENGTH 41.3" · 4 MODELS

| Model | | MRM-S 1050x130 | MRM-S 1050x150 | MRM-S 1050x170 | MRM-S 1050x190 |
|---|---|---|---|---|---|
| Working length | FT | 3.4 FT | 3.4 FT | 3.4 FT | 3.4 FT |
| Working length | in | 41.3 | 41.3 | 41.3 | 41.3 |
| Pre-bending capacity | | 3/16" / 1/4" | 1/4" / 1/4" | 1/4" / 5/16" | 5/16" / 3/8" |
| Rolling capacity | | 1/4" / 1/4" | 1/4" / 5/16" | 5/16" / 3/8" | 3/8" / 3/8" |
| Top & bottom roll Ø | in | 5.12 | 5.91 | 6.69 | 7.48 |
| Min. rolling Ø | in | 7.7 | 8.9 | 10.0 | 11.2 |
| Motor power | HP | 3.0 | 3.0 | 5.4 | 5.4 |
| Back roll motor | HP | 1.5 | 1.5 | 1.5 | 2.0 |
| Dimensions L × W × H | in | 108 × 26 × 40 | 108 × 27 × 41 | 112 × 28 × 41 | 126 × 37 × 51 |
| Weight | lb | 2,646 | 3,197 | 3,527 | 5,401 |

## 5.1 FT MRM-S 1550

WORKING LENGTH 61.0" · 4 MODELS

| Model | | MRM-S 1550x130 | MRM-S 1550x150 | MRM-S 1550x170 | MRM-S 1550x190 |
|---|---|---|---|---|---|
| Working length | FT | 5.1 FT | 5.1 FT | 5.1 FT | 5.1 FT |
| Working length | in | 61.0 | 61.0 | 61.0 | 61.0 |
| Pre-bending capacity | | 8 ga / 3/16" | 3/16" / 1/4" | 1/4" / 1/4" | 1/4" / 5/16" |
| Rolling capacity | | 3/16" / 1/4" | 1/4" / 1/4" | 1/4" / 5/16" | 5/16" / 3/8" |
| Top & bottom roll Ø | in | 5.12 | 5.91 | 6.69 | 7.48 |
| Min. rolling Ø | in | 7.7 | 8.9 | 10.0 | 11.2 |
| Motor power | HP | 3.0 | 3.0 | 5.4 | 5.4 |
| Back roll motor | HP | 1.5 | 1.5 | 1.5 | 2.0 |
| Dimensions L × W × H | in | 128 × 26 × 40 | 128 × 27 × 41 | 132 × 28 × 41 | 146 × 37 × 51 |
| Weight | lb | 3,086 | 3,638 | 4,079 | 6,063 |

## 6.7 FT MRM-S 2050

WORKING LENGTH 80.7" · 5 MODELS

| Model | | MRM-S 2050x130 | MRM-S 2050x150 | MRM-S 2050x170 | MRM-S 2050x190 | MRM-S 2050x220 |
|---|---|---|---|---|---|---|
| Working length | FT | 6.7 FT | 6.7 FT | 6.7 FT | 6.7 FT | 6.7 FT |
| Working length | in | 80.7 | 80.7 | 80.7 | 80.7 | 80.7 |
| Pre-bending capacity | | 14 ga / 11 ga | 11 ga / 8 ga | 8 ga / 3/16" | 3/16" / 1/4" | 1/4" / 1/4" |
| Rolling capacity | | 11 ga / 8 ga | 8 ga / 3/16" | 3/16" / 1/4" | 1/4" / 1/4" | 1/4" / 5/16" |
| Top & bottom roll Ø | in | 5.12 | 5.91 | 6.69 | 7.48 | 8.66 |
| Min. rolling Ø | in | 7.7 | 8.9 | 10.0 | 11.2 | – |
| Motor power | HP | 3.0 | 3.0 | 5.4 | 5.4 | 5.4 |
| Back roll motor | HP | 1.5 | 1.5 | 1.5 | 2.0 | 3.0 |
| Dimensions L × W × H | in | 148 × 26 × 40 | 148 × 27 × 41 | 152 × 28 × 41 | 165 × 37 × 51 | 165 × 45 × 55 |
| Weight | lb | 3,527 | 4,156 | 4,630 | 6,834 | 8,818 |

*Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga). Capacity values shown as pairs, as published by the manufacturer.*

# TECHNICAL SPECIFICATIONS MRM-S

## 8.4 FT MRM-S 2550

WORKING LENGTH 100.4" · 4 MODELS

| Model | | MRM-S 2550x150 | MRM-S 2550x180 | MRM-S 2550x190 | MRM-S 2550x220 |
|---|---|---|---|---|---|
| Working length | FT | 8.4 FT | 8.4 FT | 8.4 FT | 8.4 FT |
| Working length | in | 100.4 | 100.4 | 100.4 | 100.4 |
| Pre-bending capacity | | 14 ga / 11 ga | 11 ga / 8 ga | 8 ga / 3⁄16" | 3⁄16" / 1⁄4" |
| Rolling capacity | | 11 ga / 8 ga | 8 ga / 3⁄16" | 3⁄16" / 1⁄4" | 1⁄4" / 1⁄4" |
| Top & bottom roll Ø | in | 5.91 | 7.09 | 7.48 | 8.66 |
| Min. rolling Ø | in | 8.9 | 10.6 | 11.2 | 13.0 |
| Motor power | HP | 3.0 | 5.4 | 5.4 | 5.4 |
| Back roll motor | HP | 1.5 | 2.0 | 2.0 | 3.0 |
| Dimensions L × W × H | in | 167 × 26 × 40 | 171 × 37 × 51 | 185 × 37 × 51 | 185 × 45 × 55 |
| Weight | lb | 4,740 | 6,724 | 7,496 | 11,023 |

## 10 FT MRM-S 3050

WORKING LENGTH 120.1" · 4 MODELS

| Model | | MRM-S 3050x160 | MRM-S 3050x190 | MRM-S 3050x200 | MRM-S 3050x220 |
|---|---|---|---|---|---|
| Working length | FT | 10 FT | 10 FT | 10 FT | 10 FT |
| Working length | in | 120.1 | 120.1 | 120.1 | 120.1 |
| Pre-bending capacity | | 16 ga / 14 ga | 14 ga / 11 ga | 11 ga / 8 ga | 8 ga / 3⁄16" |
| Rolling capacity | | 14 ga / 11 ga | 11 ga / 8 ga | 8 ga / 3⁄16" | 3⁄16" / 1⁄4" |
| Top & bottom roll Ø | in | 6.30 | 7.48 | 7.87 | 8.66 |
| Min. rolling Ø | in | 9.4 | 11.2 | 11.8 | 13.0 |
| Motor power | HP | 3.0 | 5.4 | 5.4 | 5.4 |
| Back roll motor | HP | 1.5 | 2.0 | 2.0 | 3.0 |
| Dimensions L × W × H | in | 191 × 28 × 41 | 205 × 37 × 51 | 205 × 37 × 51 | 205 × 45 × 55 |
| Weight | lb | 5,842 | 8,267 | 8,818 | 13,228 |

*Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga).*

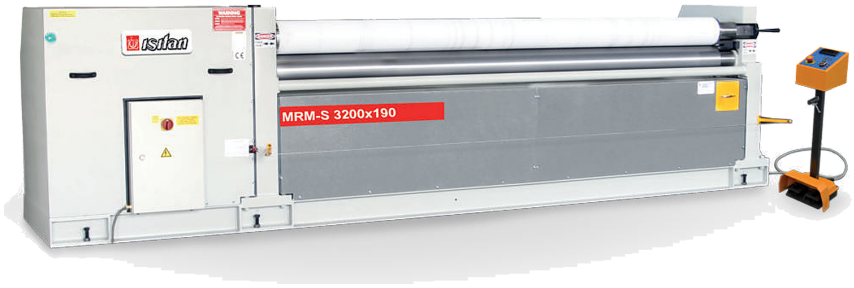


**LONG BED** **MRM-S long-bed models**

Working lengths up to 10 FT with mobile pendant control.

IRM SERIES

# MECHANICAL ASYMMETRICAL 3-ROLL PLATE BENDING MACHINES

Value-priced motorized plate rolls — a favourite of small workshops

### IRM 1550x140

Motor driven · linear back-roll movement

### IRM 1050x110

Compact cast-frame model

Designed for light to medium work up to 3⁄16" thick. Used for aluminum forming, HVAC ducting, signage panels and sheet-metal enclosures — and its attractive price makes it ideal for small workshops.

## STANDARD FEATURES

- Top and bottom rolls driven by a single gearbox and gear system
- Certified SAE 1050 steel rolls with high tensile strength
- Spheroidal cast-iron main frames
- Mobile control panel with foot pedal
- Cone-bending device
- Manual drop-end
- Top-roll support system with bearing
- Wire grooves at roll ends
- Precision bending with brake motor
- IRM 2550x140 supplied with motorized back roll as standard
- Built to EC safety directives (CE certified)
- Operator's manual

## OPTIONAL EQUIPMENT

- Motorized back-roll adjustment
- Digital readout for back roll
- Induction-hardened rolls
- Adjustable stepless speed
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

# TECHNICAL SPECIFICATIONS IRM

## 3.4–5.1 FT — IRM 1050 – 1550

5 MODELS

| Model | | IRM 1050x110 | IRM 1050x130 | IRM 1270x120 | IRM 1270x140 | IRM 1550x110 |
|---|---|---|---|---|---|---|
| Working length | FT | 3.4 FT | 3.4 FT | 4.2 FT | 4.2 FT | 5.1 FT |
| Working length | in | 41.3 | 41.3 | 50.0 | 50.0 | 61.0 |
| Rolling capacity | | 8 ga | 3/16" | 8 ga | 3/16" | 11 ga |
| Roll Ø | in | 4.33 | 5.12 | 4.72 | 5.51 | 4.33 |
| Rolling speed | ft/min | 10 | 11 | 10 | 11 | 10 |
| Motor power | HP | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 |
| Wire grooves Ø | | 3/16", 1/4", 3/8", 1/2" | 3/16", 1/4", 3/8", 1/2" | 3/16", 1/4", 3/8", 1/2" | 3/16", 1/4", 3/8", 1/2" | 3/16", 1/4", 3/8", 1/2" |
| Dimensions L × W × H | in | 87 × 30 × 39 | 87 × 30 × 39 | 98 × 33 × 39 | 97 × 30 × 39 | 106 × 30 × 39 |
| Weight | lb | 2,183 | 2,646 | 2,381 | 2,976 | 2,646 |

## 5.1–8.4 FT — IRM 1550 – 2550

5 MODELS

| Model | | IRM 1550x140 | IRM 2050x110 | IRM 2050x130 | IRM 2050x140 | IRM 2550x140 |
|---|---|---|---|---|---|---|
| Working length | FT | 5.1 FT | 6.7 FT | 6.7 FT | 6.7 FT | 8.4 FT |
| Working length | in | 61.0 | 80.7 | 80.7 | 80.7 | 100.4 |
| Rolling capacity | | 8 ga | 14 ga | 11 ga | 8 ga | 12 ga |
| Roll Ø | in | 5.51 | 4.33 | 5.12 | 5.51 | 5.51 |
| Rolling speed | ft/min | 11 | 10 | 11 | 11 | 11 |
| Motor power | HP | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 + 1.0 |
| Wire grooves Ø | | 3/16", 1/4", 3/8", 1/2" | 3/16", 1/4", 3/8", 1/2" | 3/16", 1/4", 3/8", 1/2" | 3/16", 1/4", 3/8", 1/2" | 3/16", 1/4", 3/8", 1/2" |
| Dimensions L × W × H | in | 106 × 30 × 39 | 126 × 30 × 39 | 126 × 30 × 39 | 126 × 30 × 39 | 146 × 30 × 39 |
| Weight | lb | 3,131 | 3,042 | 3,307 | 3,638 | 4,079 |

*Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga).*

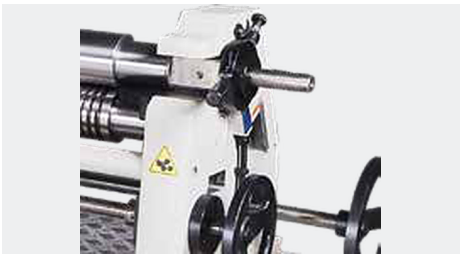

Standard manual drop-end

## ROLLING SEQUENCE

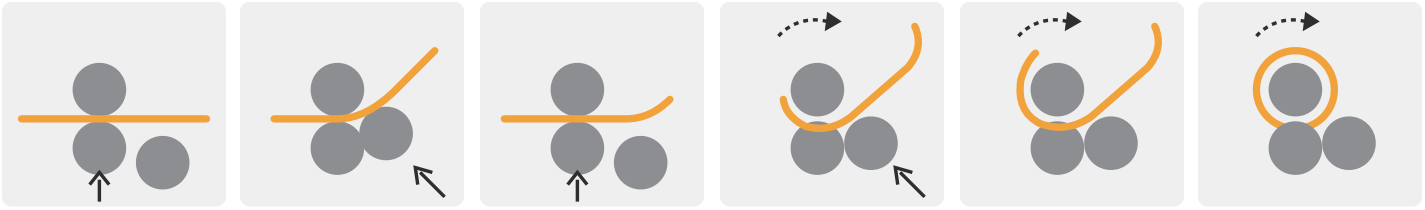

1 PINCH 2 PRE-BEND 3 FEED 4 ROLL 5 ROLL 6 CLOSE

RM (MOTORIZED) · RS (MANUAL)

# MOTORIZED & MANUAL 3-ROLL ASYMMETRICAL PLATE ROLLS

### RM 1270x90

Motorized · foot-pedal control

### RS 1270x90

Manual · hand-crank operation

## STANDARD FEATURES

- Top and bottom rolls driven by a single gearbox and chain/gear system (RM)
- Certified SAE 1050 steel rolls with high tensile strength
- Reinforced steel main frame
- Mobile control panel with foot pedal (RM)
- Cone-bending device
- Manual drop-end
- Wire grooves at roll ends
- Precision bending with brake motor (RM)
- Built to EC safety directives (CE)
- Operator's manual

## OPTIONAL EQUIPMENT

- Motorized back-roll adjustment
- Digital readout for back roll
- Induction-hardened rolls
- Variable speed system
- Fully enclosed sheet covers (RS)
- Coated rolls
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Standard manual drop-end

Standard drop-end safety switch

# TECHNICAL SPECIFICATIONS RM · RS

## 3.4–6.7 FT RM — MOTORIZED

4 MODELS

| Model | | RM 1050x90 | RM 1270x90 | RM 1550x90 | RM 2050x95 |
|---|---|---|---|---|---|
| Working length | FT | 3.4 FT | 4.2 FT | 5.1 FT | 6.7 FT |
| Working length | in | 41.3 | 50.0 | 61.0 | 80.7 |
| Rolling capacity | | 11 ga | 12 ga | 14 ga | 16 ga |
| Roll Ø | in | 3.54 | 3.54 | 3.54 | 3.74 |
| Rolling speed | ft/min | 20 | 20 | 20 | 20 |
| Motor power | HP | 1.5 | 1.5 | 2.0 | 2.0 |
| Wire grooves Ø | | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" |
| Dimensions L × W × H | in | 64 × 28 × 47 | 73 × 28 × 47 | 84 × 28 × 47 | 104 × 28 × 47 |
| Weight | lb | 1,014 | 1,146 | 1,279 | 1,576 |

## 3.4–6.7 FT RS — MANUAL

4 MODELS

| Model | | RS 1050x90 | RS 1270x90 | RS 1550x90 | RS 2050x95 |
|---|---|---|---|---|---|
| Working length | FT | 3.4 FT | 4.2 FT | 5.1 FT | 6.7 FT |
| Working length | in | 41.3 | 50.0 | 61.0 | 80.7 |
| Rolling capacity | | 11 ga | 12 ga | 14 ga | 16 ga |
| Roll Ø | in | 3.54 | 3.54 | 3.54 | 3.74 |
| Rolling speed | ft/min | — | — | — | — |
| Motor power | HP | — | — | — | — |
| Wire grooves Ø | | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" |
| Dimensions L × W × H | in | 82 × 28 × 49 | 91 × 28 × 49 | 102 × 28 × 49 | 121 × 28 × 49 |
| Weight | lb | 904 | 926 | 1,235 | 1,433 |

*Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga). Manual RS models carry the NovoTech warranty and support; electrical items apply to RM models.*

IR SERIES

# MOTORIZED 3-ROLL SLIP ROLL MACHINES

Motorized slip rolls with foot-pedal control

### IR 1270x75

Motorized with foot pedal

### IR 1050x56

Reinforced main frame made of special steel

Standard manual drop-end

Geared lock for quick back-roll adjustment

Optional drop-end safety switch

## STANDARD FEATURES

- Top and bottom rolls driven by a single gearbox and chain/gear system
- Certified SAE 1050 steel rolls with high tensile strength
- Steel frame (68 and 75 mm roll models)
- Mobile control panel with foot pedal
- Manual drop-end
- Wire grooves at roll ends
- Precision bending with brake motor
- Built to EC safety directives (CE certified)
- Operator's manual

## OPTIONAL EQUIPMENT

- Induction-hardened rolls
- Drop-end safety switch
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

# TECHNICAL SPECIFICATIONS IR

## 3.4–4.2 FT

### IR 1050 – 1270
5 MODELS

| Model | | IR 1050x46 | IR 1050x56 | IR 1050x68 | IR 1050x75 | IR 1270x56 |
|---|---|---|---|---|---|---|
| Working length | FT | 3.4 FT | 3.4 FT | 3.4 FT | 3.4 FT | 4.2 FT |
| Working length | in | 41.3 | 41.3 | 41.3 | 41.3 | 50.0 |
| Rolling capacity | | 20 ga | 18 ga | 16 ga | 14 ga | 20 ga |
| Roll Ø | in | 1.81 | 2.20 | 2.68 | 2.95 | 2.20 |
| Motor power | HP | 1.0 | 1.0 | 2.0 | 2.0 | 1.0 |
| Wire grooves Ø | | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" |
| Dimensions L × W × H | in | 59 × 28 × 44 | 59 × 28 × 44 | 63 × 28 × 46 | 63 × 28 × 46 | 69 × 28 × 44 |
| Weight | lb | 463 | 529 | 750 | 849 | 661 |

## 4.2–6.7 FT

### IR 1270 – 2050
5 MODELS

| Model | | IR 1270x68 | IR 1270x75 | IR 1550x68 | IR 1550x75 | IR 2050x75 |
|---|---|---|---|---|---|---|
| Working length | FT | 4.2 FT | 4.2 FT | 5.1 FT | 5.1 FT | 6.7 FT |
| Working length | in | 50.0 | 50.0 | 61.0 | 61.0 | 80.7 |
| Rolling capacity | | 18 ga | 16 ga | 20 ga | 18 ga | 20 ga |
| Roll Ø | in | 2.68 | 2.95 | 2.68 | 2.95 | 2.95 |
| Motor power | HP | 2.0 | 2.0 | 2.0 | 2.0 | 2.0 |
| Wire grooves Ø | | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" |
| Dimensions L × W × H | in | 72 × 28 × 46 | 72 × 28 × 46 | 83 × 28 × 46 | 83 × 28 × 46 | 103 × 28 × 46 |
| Weight | lb | 827 | 794 | 882 | 948 | 1,301 |

*Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga).*

R SERIES · FLOOR-STANDING & BENCH MODELS

# MANUAL 3-ROLL SLIP ROLL MACHINES

## R 1050x56

Manual · hand-crank on stand

Easy bottom-roll pinching lever

Wire grooves as standard

## R 610x46

Bench slip roll, without stand

## R 1270x46

Bench slip roll with geared lock for quick back-roll adjustment

## STANDARD FEATURES

- Certified SAE 1050 steel rolls with high tensile strength
- Steel frame (68 and 75 mm roll models)
- Manual drop-end
- Wire grooves at roll ends
- Operator's manual

## OPTIONAL EQUIPMENT

+ Induction-hardened rolls

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

# TECHNICAL SPECIFICATIONS R

## 3.4–4.2 FT

### R 1050 – 1270 · FLOOR-STANDING

5 MODELS

| Model | | R 1050x46 | R 1050x56 | R 1050x68 | R 1050x75 | R 1270x56 |
|---|---|---|---|---|---|---|
| Working length | FT | 3.4 FT | 3.4 FT | 3.4 FT | 3.4 FT | 4.2 FT |
| Working length | in | 41.3 | 41.3 | 41.3 | 41.3 | 50.0 |
| Rolling capacity | | 20 ga | 18 ga | 16 ga | 14 ga | 20 ga |
| Roll Ø | in | 1.81 | 2.20 | 2.68 | 2.95 | 2.20 |
| Wire grooves Ø | | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" |
| Dimensions L × W × H | in | 55 × 28 × 44 | 55 × 28 × 44 | 76 × 28 × 46 | 76 × 28 × 46 | 69 × 28 × 44 |
| Weight | lb | 353 | 408 | 617 | 573 | 507 |

## 4.2–6.7 FT

### R 1270 – 2050 · FLOOR-STANDING

5 MODELS

| Model | | R 1270x68 | R 1270x75 | R 1550x68 | R 1550x75 | R 2050x75 |
|---|---|---|---|---|---|---|
| Working length | FT | 4.2 FT | 4.2 FT | 5.1 FT | 5.1 FT | 6.7 FT |
| Working length | in | 50.0 | 50.0 | 61.0 | 61.0 | 80.7 |
| Rolling capacity | | 18 ga | 16 ga | 20 ga | 18 ga | 20 ga |
| Roll Ø | in | 2.68 | 2.95 | 2.68 | 2.95 | 2.95 |
| Wire grooves Ø | | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" |
| Dimensions L × W × H | in | 85 × 28 × 46 | 85 × 28 × 46 | 96 × 28 × 46 | 96 × 28 × 46 | 115 × 28 × 46 |
| Weight | lb | 683 | 728 | 772 | 805 | 1,157 |

## 2–4.2 FT

### R BENCH MODELS · WITHOUT STAND

3 MODELS

| Model | | R 610x46 | R 1050x46 | R 1270x46 |
|---|---|---|---|---|
| Working length | FT | 2 FT | 3.3 FT | 4.2 FT |
| Working length | in | 23.6 | 39.4 | 50.0 |
| Rolling capacity | | 18 ga | 20 ga | 22 ga |
| Roll Ø | in | 1.81 | 1.81 | 1.81 |
| Wire grooves Ø | | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" | 3/16", 1/4", 3/8" |
| Dimensions L × W × H | in | 35 × 20 × 16 | 55 × 20 × 16 | 64 × 20 × 16 |
| Weight | lb | 198 | 265 | 331 |

*Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga).*

RST-M (MOTORIZED) · RST (MANUAL)

# ECONOMICAL MOTORIZED & MANUAL PLATE ROLLS

Reinforced, value-priced plate rolls for light work

**RST-M 1270x86**
Motorized · electrical box and foot pedal

**RST 1270x86**
Manual economical plate roll

Built for light work up to 12 ga thick — ventilation ducting, signage panels, machine guards and sheet-metal parts. Its attractive price and versatility make it a favourite of small workshops.

## STANDARD FEATURES

- Cast main frames
- Geared main motor (RST-M)
- Manual drop-end top roll
- Back and bottom rolls adjusted up/down by screws on both sides
- Motor- or hand-driven center rolls
- Certified SAE 1050 steel rolls with high tensile strength
- Foot-pedal control (RST-M)
- Operator's manual

## OPTIONAL EQUIPMENT

+ Hardened rolls
+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*



Manual up/down setting of bottom and back rolls by screws

### INCLUDED WITH EVERYNOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

## 4.1–5.1 FT

RST · RST-M
4 MODELS

| Model | | RST 1270x86 | RST-M 1270x86 | RST 1550x86 | RST-M 1550x86 |
|---|---|---|---|---|---|
| Working length | FT | 4.1 FT | 4.1 FT | 5.1 FT | 5.1 FT |
| Working length | in | 49.2 | 49.2 | 61.0 | 61.0 |
| Rolling capacity | | 12 ga | 12 ga | 14 ga | 14 ga |
| Roll Ø | in | 3.39 | 3.39 | 3.39 | 3.39 |
| Rolling speed | ft/min | — | 39 | — | 39 |
| Motor power | HP | — | 2.0 | — | 2.0 |
| Dimensions L × W × H | in | 90 × 28 × 49 | 73 × 28 × 49 | 83 × 28 × 49 | 98 × 28 × 49 |
| Weight | lb | 937 | 926 | 1,014 | 1,146 |

*Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga).*

3R HMD SERIES · NEW

# MECHANICAL-HYDRAULIC 3-ROLL ASYMMETRICAL PLATE ROLLS

All 3 rolls motor + planetary reducer driven, with hydraulic back roll

**MODEL** 3R HMD 1270x90

## STANDARD FEATURES

- All 3 rolls powered by a single gearbox and gear system
- Certified SAE 1050 induction-hardened steel rolls with high tensile strength
- Cast-iron main frames
- Mobile control panel with foot pedal
- Cone bending with easy joystick positioning
- Manual drop-end mechanism
- Wire grooves on rolls: Ø3⁄16", 1⁄4", 3⁄8"
- Hydraulic back-roll piston
- Digital readout and joystick control for back-roll adjustment
- Precision bending with brake motor
- Built to EC safety directives (CE certified)
- Operator's manual

## OPTIONAL EQUIPMENT

+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

**4.2–6.7 FT** **3R HMD**
3 MODELS

| Model | | 3R HMD 1270x90 | 3R HMD 1550x90 | 3R HMD 2050x95 |
|---|---|---|---|---|
| Working length | FT | 4.2 FT | 5.1 FT | 6.7 FT |
| Working length | in | 50.0 | 61.0 | 80.7 |
| Rolling capacity | | 12 ga | 14 ga | 16 ga |
| Roll Ø | in | 3.54 | 3.54 | 3.74 |
| Rolling speed | ft/min | 20 | 20 | 20 |
| Motor power | HP | 1.5 + 1.0 | 2.0 + 1.0 | 2.0 + 1.0 |
| Wire grooves Ø | | 3⁄16", 1⁄4", 3⁄8" | 3⁄16", 1⁄4", 3⁄8" | 3⁄16", 1⁄4", 3⁄8" |
| Oil tank capacity | L | 6 | 6 | 6 |
| Dimensions L × W × H | in | 93 × 28 × 30 | 104 × 28 × 30 | 120 × 28 × 30 |
| Weight | lb | 1,146 | 1,279 | 1,576 |

*Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga).*

HIBKS · IBKS 4.0

# HYDRAULIC & MOTORIZED BEADING MACHINES

Heavy-duty beading / trimming machines for sheet up to 8 ga thick

### HIBKS 4.0

Hydraulic top-roll movement

### IBKS 4.0

Motorized, manual top-roll setting

## STANDARD FEATURES — HIBKS (IBKS: MANUAL TOP ROLL)

- Welded steel construction frame
- Hydraulic up/down top roll
- Forward-backward adjustable bottom roll
- Forward-backward adjustable sheet support
- Special-steel shafts in tapered roller bearings
- Gearbox motor with brake
- Foot-pedal control
- Complete with floor stand
- 4 sets of standard rolls and roll spanner key
- Low-maintenance ball-bearing design
- Built to EC safety directives (CE)
- Operator's manual

## OPTIONAL EQUIPMENT

- Rolls for special jobs (made to order)
- Digital readout (HIBKS)
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

## HIBKS · IBKS 4.0

| Model | | HIBKS 4.0 · hydraulic | IBKS 4.0 · motorized |
|---|---|---|---|
| Shaft length | in | 11.8 | 11.8 |
| Beading capacity | | 8 ga | 8 ga |
| Roll Ø | in | 4.96 | 4.96 |
| Throat depth | in | 7.9 | 7.9 |
| Spindle speed | rpm | 10 | 10 |
| Motor power | HP | 3.0 + 1.0 | 3.0 |
| Oil tank capacity | L | 6 | — |
| Dimensions L × W × H | in | 68 × 23 × 50 | 58 × 22 × 47 |
| Weight | lb | 1,213 | 1,014 |

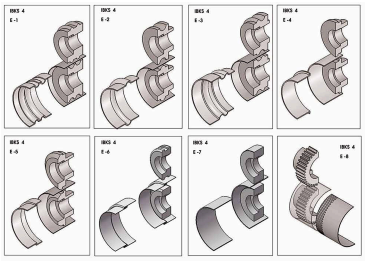

Standard roll sets S1–S4 and extra roll sets E1–E8

HIBKS · IBKS 2.5

# HYDRAULIC & MOTORIZED BEADING MACHINES

Beading / trimming machines for sheet up to 12 ga thick

## HIBKS 2.5

Hydraulic top-roll movement

## IBKS 2.5

Motorized, manual top-roll setting

## HIBKS · IBKS 2.5

| Model | | HIBKS 2.5 · hydraulic | IBKS 2.5 · motorized |
|---|---|---|---|
| Shaft length | in | 9.8 | 9.8 |
| Beading capacity | | 12 ga | 12 ga |
| Roll Ø | in | 3.78 | 3.78 |
| Throat depth | in | 6.3 | 6.3 |
| Spindle speed | rpm | 13 | 13 |
| Motor power | HP | 2.0 + 0.7 | 2.0 |
| Oil tank capacity | L | 6 | — |
| Dimensions L × W × H | in | 68 × 23 × 50 | 58 × 22 × 47 |
| Weight | lb | 838 | 705 |

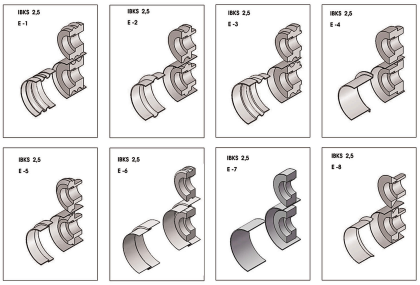

Standard roll sets S1–S4 and extra roll sets E1–E8

*Standard and optional equipment as listed for the 4.0 models; 4 sets of standard rolls and roll spanner key included.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

IBKS 1.8 · IKM 1.2 · IKMP 1.2 · IKMP 1.2 P

# MOTORIZED & PNEUMATIC BEADING MACHINES

## IBKS 1.8

3 sets of standard rolls and roll spanner key

- Welded steel-plate main frame
- Forward-backward adjustable sheet support
- Forward-backward adjustable upper roll
- Gearbox motor with brake
- Easy to move around the shop
- Foot-pedal control
- Special-steel roll shafts
- 3 sets of standard rolls
- Complete with floor stand
- Built to EC safety directives (CE)

## IKM 1.2

8 sets of standard rolls and roll spanner key

- Heavy-duty cast-iron main frame
- Forward-backward adjustable sheet support
- Forward-backward adjustable bottom roll
- Special-steel shafts
- 8 sets of standard rolls
- Tooling cupboard
- 4 working speeds via pulley belt: 30 / 60 / 90 / 120 rpm

## IKMP 1.2

Standard motorized

## IKMP 1.2 P

Pneumatic top shaft

- Heavy-duty cast-iron main frame
- Forward-backward adjustable sheet support
- Adjustable bottom roll
- Foot-pedal control
- Special-steel roll shafts
- 8 sets of standard rolls
- Complete with floor stand
- Built to EC safety directives (CE)

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

### IBKS 1.8 · IKM 1.2

| Model | | IBKS 1.8 | IKM 1.2 |
|---|---|---|---|
| Shaft length | in | 4.7 | 5.5 |
| Beading capacity | | 14 ga | 18 ga |
| Roll Ø | in | 3.23 | 2.44 |
| Throat depth | in | 11.0 | 3.9 |
| Spindle speed | rpm | 48 | 30 / 60 / 90 / 120 |
| Motor power | HP | 2.0 | 1.0 |
| Dimensions L × W × H | in | 33 × 16 × 48 | 35 × 18 × 53 |
| Weight | lb | 309 | 298 |

### IKMP 1.2 · IKMP 1.2 P

| Model | | IKMP 1.2 | IKMP 1.2 P |
|---|---|---|---|
| Shaft length | in | 5.5 | 5.5 |
| Beading capacity | | 18 ga | 18 ga |
| Roll Ø | in | 2.44 | 2.44 |
| Throat depth | in | 3.9 | 3.9 |
| Spindle speed | rpm | 32 | 32 |
| Motor power | HP | 1.0 | 1.0 |
| Dimensions L × W × H | in | 39 × 18 × 53 | 35 × 18 × 65 |
| Weight | lb | 287 | 331 |

## OPTIONAL EQUIPMENT

+ Rolls for special jobs (made to order)
+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*



Extra rolls for IKMP and IKM




Standard rolls for IKMP and IKM

IK (CAST IRON) · IKS (STEEL PLATE)

# MANUAL BEADING MACHINES / SWAGERS

### IK 1.2

8 sets of standard rolls and roll spanner key

### IK 0.8

7 sets of standard rolls and roll spanner key

### IKS 1.3

8 sets of standard rolls · compatible with IK 1.2 rolls

### IKS 1.0

7 sets of standard rolls · compatible with IK 0.8 rolls

## IK — CAST-IRON FRAME

- Heavy-duty cast-iron main frame
- Forward-backward adjustable sheet support
- Adjustable bottom roll
- Special-steel roll shafts
- Easy to carry around the shop

## IKS — STEEL-PLATE FRAME

- Steel-plate construction
- Forward-backward adjustable sheet support
- Adjustable bottom roll
- Special-steel roll shafts
- Easy to carry around the shop
- Operator's manual

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

## IK 1.2 · IK 0.8

| Model | | IK 1.2 | IK 0.8 |
|---|---|---|---|
| Shaft length | in | 5.5 | 4.3 |
| Beading capacity | | 18 ga | 22 ga |
| Roll Ø | in | 2.44 | 2.20 |
| Throat depth | in | 3.9 | 3.1 |
| Dimensions L × W × H | in | 22 × 9 × 20 | 15 × 7 × 15 |
| Weight | lb | 110 | 66 |

## IKS 1.3 · IKS 1.0

| Model | | IKS 1.3 | IKS 1.0 |
|---|---|---|---|
| Shaft length | in | 7.1 | 10.2 |
| Beading capacity | | 18 ga | 20 ga |
| Roll Ø | in | 2.44 | 2.20 |
| Throat depth | in | 9.1 | 6.3 |
| Dimensions L × W × H | in | 20 × 12 × 20 | 20 × 10 × 20 |
| Weight | lb | 110 | 88 |



Extra rolls for IK / IKMP 1.2




Standard rolls S1–S5




Standard rolls S7–S8

IDK-5

# HYDRAULIC CIRCULAR CUTTING & FLANGING MACHINE

Cuts discs Ø9.8" – 78.7" in sheet up to 3⁄16" thick

**MODEL** **IDK-5**

## STANDARD FEATURES

- Welded steel construction frame
- Hydraulic center clamp
- Special-steel blades
- Long blade life — shafts on special conical bearings
- Gearbox motor with brake
- Motorized cutting-diameter adjustment
- Mobile control panel
- Inside-diameter cutting system
- Built to EC safety directives (CE)
- Operator's manual

## OPTIONAL EQUIPMENT

- Special rolls and attachments for edge flanging up to 3⁄8"
- Digital readout
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

Hydraulic clamping and cutting system

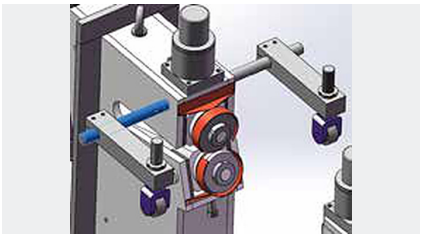

Optional flanging attachment

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

IDK-3.5 (PNEUMATIC CLAMP) · IDK-2 (HEAVY DUTY)

# MOTORIZED CIRCULAR CUTTING MACHINES

## IDK-3.5

Pneumatic-pressure motorized circular cutting shear

- Welded steel construction frame
- Special-steel blades
- Long blade life — shafts on special conical bearings
- Gearbox motor with brake
- Motorized cutting-diameter adjustment
- Mobile control panel
- Inside-diameter cutting system
- Pneumatic center clamp (requires 116 psi air supply)
- Built to EC safety directives (CE)
- Operator's manual

## IDK-2

Heavy-duty motorized circular cutting machine

- Rigid cast frame
- Special-steel blades
- Blades mounted in bearings
- Gearbox motor with brake
- Mobile control panel with foot pedal
- Inside-diameter cutting system
- Built to EC safety directives (CE)
- Operator's manual

## OPTIONAL EQUIPMENT

- + Pneumatic sheet-centering device (IDK-2)
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

## IDK-1.8

Motorized · rigid cast frame · blades in bronze bushings · foot pedal (no inside-Ø cutting)

## IDK-1

Manual · rigid cast frame · blades in cast-iron bushings (no inside-Ø cutting)

# TECHNICAL SPECIFICATIONS IDK CIRCULAR CUTTING

## IDK SERIES

5 MODELS

| Model | | IDK-5 | IDK-3.5 | IDK-2 | IDK-1.8 | IDK-1 |
|---|---|---|---|---|---|---|
| Min. cutting Ø | in | 9.8 | 7.9 | 4.7 | 4.3 | 5.9 |
| Max. cutting Ø | in | 78.7 | 47.2 | 39.4 | 39.4 | 39.4 |
| Cutting capacity (mild steel) | | 3⁄16" | 10 ga | 14 ga | 14 ga | 20 ga |
| Cutting speed | ft/min | 13 | 20 | 25 | 25 | manual |
| Blade material | | 1.2379 tool steel | 1.2379 tool steel | 1.2379 tool steel | 1.2379 tool steel | 1.2379 tool steel |
| Motor power | HP | 3.0 + 1.0 | 3.0 | 1.5 | 1.5 | — |
| Hump depth | in | 47.2 | 29.5 | 27.6 | 24.0 | 23.6 |
| Throat depth | in | 11.8 | 9.8 | 11.0 | 8.5 | 7.9 |
| Inside-diameter cutting | | Yes | Yes | Yes | No | No |
| Dimensions L × W × H | in | 118 × 30 × 55 | 79 × 24 × 55 | 55 × 16 × 51 | 59 × 16 × 51 | 47 × 8 × 18 |
| Weight | lb | 2,976 | 1,653 | 772 | 529 | 132 |

*Cutting capacities for mild steel. IDK-1 is manually operated.*

LS-13P

# PNEUMATIC HEAVY-DUTY LOCK SEAMING MACHINE

Motorized lock seamer with pneumatic pressing for duct and pipe seams

### LS-13P

Pneumatic motorized heavy-duty lock seaming machine

## STANDARD FEATURES

- Gearbox-driven pinching system
- Easy operation with pneumatic pressing system
- Pinching and rotation controlled by standard foot pedal
- Pneumatic system protected by air filter
- Hardened seaming rolls
- Sliding system on ball bearings
- Operator's manual



Lock-seam profile



Finished lock seam

| Model | | LS-13P |
|---|---|---|
| Seaming capacity | | 18 ga |
| Seaming length | FT | 4.3 FT |
| Seaming length | in | 51.2 |
| Seaming Ø (min – max) | in | 3.9 – 5.1 |
| Working pressure (pneumatic) | psi | 120 |
| Press force | lbf | 220 |
| Motor power | HP | 0.5 |
| Dimensions L × W × H | in | 68 × 35 × 65 |
| Weight | lb | 661 |

### INCLUDED WITH EVERYNOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

*Optional: Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase* *240 V single-phase depends on the machine's motor power and is not available on all models.*

EDGEBENDER 1240 CNC

# 3-AXIS (Y1 + Y2 + X) CNC HYDRAULIC PRESS BRAKE

44 US tons · 4.2 FT working length · Cybelec Cybtouch 12 CNC

**MODEL** Edgebender 1240 CNC

**CYBELEC CYBTOUCH 12**
CNC controller

**3 AXES**
Y1 + Y2 + X

**FAST TOOL EXCHANGER**
Quick-release Promecam clamping

**PROMECAM TOOLING**
Top and bottom Promecam-adaptable tools

**SIDE COVERS**
with safety switch

**LIGHTGUARD**
in the front working area

**PROGRAMMABLE RETREAT**
Sensitive backgauge retract to avoid collision

**FRONT SUPPORT ARMS**
Height adjustable

**OPTIONAL**
Motorized crowning (cambering) system

Cybelec Cybtouch 12 CNC controller

Motorized backgauge

HAWE or Rexroth hydraulics

Promecam blade installed

# EDGEBENDER 1240 CNC FEATURES & SPECIFICATIONS

## GENERAL FEATURES

- Double-cylinder bending system on the upper beam
- Static and dynamic rigidity: strong steel frame and upper beam
- Upper beam guided by easily adjustable fiber slide bearings
- Durable balancing spindle and eccentric bearings for parallelism
- High stroke and daylight for a wide range of tooling
- Hydraulic safety system against pressure overload
- Two-speed operation: free fall, bending, return
- Compact, low-maintenance REXROTH or HAWE hydraulic unit at the rear top
- European SIEMENS electrical equipment with remote-connection service
- LEUZE front safety barrier with learning mode for different part shapes

| Model | | EB 1240 CNC |
|---|---|---|
| Bending force | US tons | 44 |
| Working length | FT | 4.2 FT |
| Working length | in | 50.0 |
| Distance between frames | in | 39.8 |
| Stroke | in | 8.7 |
| Throat depth | in | 11.6 |
| Y free-fall speed | in/s | 5.91 |
| Y working speed | in/s | 0.39 |
| Daylight | in | 16.1 |
| Main motor | HP | 5.4 |
| X-axis motor | HP | 0.7 |
| Backgauge travel | in | 19.7 |
| Dimensions L × W × H | in | 81 × 60 × 89 |
| Weight | lb | 5,181 |

## STANDARD FEATURES

- Cybelec Cybtouch 12 CNC control
- Quick-release PROMECAM top-tool clamping for partial and quick removal
- GIVI magnetic linear scales
- Standard top tools and bottom die for short-edge bends
- CNC X-axis backgauge on HIWIN linear guides with ball screws; 19.7" travel; manual R axis
- Manual crowning with bottom die and Promecam tooling
- Foot pedal
- Front support arms on linear slides and bearings

## OPTIONAL EQUIPMENT

- Special bending dies
- Special safety systems (DSP, FIESSLER)
- Extended backgauge length
- Extra backgauge fingers
- Extra front support arms
- Servo-motorized R axis
- Servo-motorized X axis
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Easy adjustment and fixing on lower die bed

Separate height setting on front supports

Optional FIESSLER barrier system

EDGEBENDER 1230 · 1540 · 2160 NC

# 2-AXIS (Y + X) NC-CONTROLLED HYDRAULIC PRESS BRAKES

33 – 66 US tons · 4.2 – 6.9 FT working length

### Edgebender 2160

6.9 FT × 66 US tons

### Edgebender 1230

4.1 FT × 33 US tons

Precision bending results

Motorized backgauge

Promecam blade installed (EB 1540 / 2160)



Optional motorized or manual lower-blade crowning

# EDGEBENDER NC STANDARD & OPTIONAL EQUIPMENT

## STANDARD FEATURES

- Double-cylinder bending system on the upper beam
- Static and dynamic rigidity: strong steel frame and upper beam
- Upper beam guided by easily adjustable fiber slide bearings
- Durable balancing spindle and eccentric bearings for parallelism
- Stroke-controlled angle adjustment with mechanical stop and motor control
- High stroke and daylight for a wide range of tooling
- Easy tonnage adjustment with pressure switch; stop at bottom of stroke via NC
- Hydraulic safety system against pressure overload
- Two-speed operation: free fall, slow bend and fast return
- Safety foot pedal with emergency stop linked to the NC control (CE compliant)
- Compact, low-maintenance HAWE or REXROTH hydraulic unit on top of the machine
- European SIEMENS, PIZZATO and BALLUFF electrical components with remote service connection
- LEUZE front safety system with learning mode for different part shapes
- NC control storing 500 programs of 200 lines each; save and load via USB
- High-speed motorized X backgauge on linear guides: 23.6" travel, 0.008" accuracy
- Motor-driven Y-axis angle setting via the NC control
- Quick-release PROMECAM upper-tool clamping; manual crowning by wedges in the upper tool holders
- Floating-arm control panel
- Front support arms on linear slides and bearings
- Bolts for centering and fixing the bottom die
- Sensitive programmable backgauge retract to avoid collision
- Standard upper and lower tools
- Tooling selection / drawing feature and bending-force calculation on the controller

## OPTIONAL EQUIPMENT

- Special bending dies
- Special two-hand and foot-pedal control system
- Special safety systems (DSP, FIESSLER)
- Additional backgauge length
- Extra backgauge fingers
- Extra front support arm
- Motorized R axis with precision movement
- Manual or motorized crowning on lower blade
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

### INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Safety lightguard complying with CE

Torsion bar for sensitive bending

Motorized backgauge with ball screw

Standard LEUZE lightguard with work-area learning

# TECHNICAL SPECIFICATIONS EDGEBENDER NC

| Model | | EB 1230 NC | EB 1540 NC | EB 2160 NC |
|---|---|---|---|---|
| Bending force | US tons | 33 | 44 | 66 |
| Bending capacity* | | 8 ga | 8 ga | 8 ga |
| Working length | FT | 4.2 FT | 5.1 FT | 6.9 FT |
| Working length | in | 50.0 | 61.0 | 82.7 |
| Distance between frames | in | 39.8 | 49.6 | 66.9 |
| Stroke | in | 5.9 | 6.3 | 6.3 |
| Bending speed | in/s | 0.39 | 0.39 | 0.39 |
| Idle ram speed | in/s | 2.76 | 3.54 | 3.54 |
| Throat depth | in | 10.0 | 12.6 | 12.6 |
| Daylight | in | 10.4 | 15.0 | 15.0 |
| Table width | in | 5.1 | 3.9 | 3.9 |
| Lower table height | in | 32.7 | 33.3 | 33.3 |
| Main motor | HP | 4.0 | 7.4 | 10 |
| X-axis motor | HP | 0.7 | 1.0 | 1.0 |
| Y-axis motor | HP | 0.2 | 0.5 | 0.5 |
| R-axis motor (optional) | HP | 0.3 | 0.3 | 0.3 |
| Backgauge travel | in | 19.7 | 23.6 | 23.6 |
| Oil tank capacity | L | 90 | 120 | 120 |
| Dimensions L × W × H | in | 69 × 54 × 85 | 79 × 63 × 88 | 96 × 63 × 88 |
| Weight | lb | 3,748 | 7,606 | 9,568 |

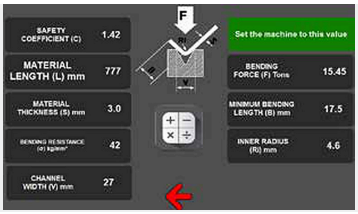

Sensitive bending feature on the NC

Tool selection and drawing on the NC

EB 1230 NC motor-controlled Y axis (angle set)


EB 1540 / 2160 gearbox-driven angle adjustment

**Bending capacity varies with V-die opening and sheet length — please check the bending chart.*

User-friendly NC interface

Rexroth or HAWE hydraulics

Remote assistance and maintenance via network

Well-known electrical components

SFB-CNC · 3-AXIS (A3) & 5-AXIS (A5)

# CNC MANDREL TUBE & PIPE BENDERS

Fully servo-driven mandrel benders with 21" touchscreen CNC and 3D simulation

**MODEL** **SFB 38-CNC/A5 · 5-axis**

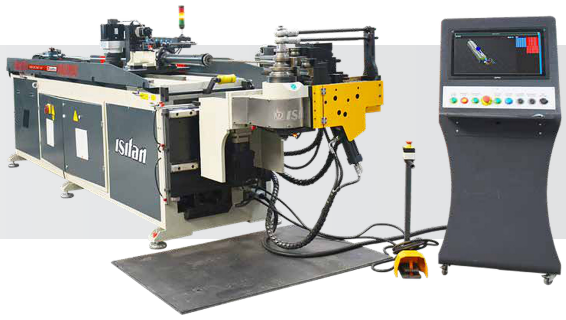

- Servo feeding, rotation & bending axes
- 21" touchscreen CNC
- 3D simulation
- Hydraulic mandrel & collet

## STANDARD FEATURES

- 1 die set (3 pieces) in requested size
- Servo-motorized feeding axis (Y)
- Servo-motorized rotation axis (B)
- Servo-motorized bending axis (C) — A5 and SFB 38/51/65 A3; geared electric bending drive on SFB 76/90 A3
- Mobile CNC control unit with 21" TFT touchscreen
- 3D bending simulation
- Daily, weekly and monthly working reports, e-mailed automatically
- Tube length and bending-time calculation
- X-Y-Z to Y-B-C conversion
- Remote assistance
- Mobile foot pedal with emergency stop
- Manual and automatic operation
- Bending with or without mandrel
- Safety plate behind the bending head
- Hydraulic clamping, mandrel, pressure die and linear slider
- Hydraulic collet
- Hydraulic oil cooler (A3)
- Automatic mandrel lubrication (SFB 38 CNC/A3)
- Lockable electrical panel with safety interlock
- Electrical cabinet cooler
- Overload protection
- Roll bending (A5)

## OPTIONAL EQUIPMENT

- Extra die sets
- Safety mat (30 × 39" or 39 × 59")
- Hydraulic oil heater
- Extended mandrel length (up to 20 FT)
- Ball mandrel and wiper die
- Automatic mandrel lubrication (SFB 51 / 65 / 76 / 90)
- Hydraulic oil cooler (A5)
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

### INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

## SFB CNC CONTROL, SOFTWARE & KEY COMPONENTS

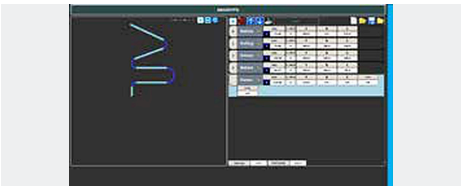

21" touchscreen CNC control

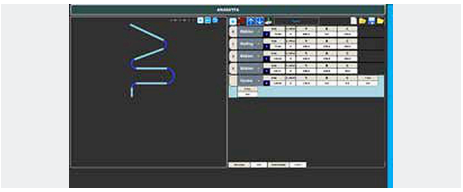

3D simulation

**SPRING-BACK CALCULATION**
precise, repeatable production values and fast setup

**3D SIMULATION**
upgraded 3D bending simulation with collision warning

**X-Y-Z TO Y-B-C**
converts drawing coordinates automatically

**MATERIAL & TIME ESTIMATE**
calculates required tube length and cycle time before bending

**HARDNESS COMPENSATION**
removes angle differences between materials of different hardness

**ALL PROFILE TYPES**
round, square and rectangular tube and profile calculations

**REPORTING**
daily, weekly and monthly job reports over the local network

**TWO AXES TOGETHER**
simultaneous axis motion cuts wasted time

**REMOTE ASSISTANCE**
fast support over the network



Hydraulic mandrel

Safety plate behind bending head

Hydraulic oil cooler

CNC control unit

*Typical parts: furniture, seating and fitness frames, automotive and exhaust tube, handrails and fabricated tube assemblies.*

# TECHNICAL SPECIFICATIONS SFB CNC

MODEL **SFB 90-CNC/A3**

## 5-AXIS SFB CNC/A5

Y + B + C SERVO AXES PLUS SERVO ROLL-BENDING AXES

| Model | | SFB 38-CNC/A5 | SFB 51-CNC/A5 | SFB 65-CNC/A5 |
|---|---|---|---|---|
| Max. tube capacity (OD × wall) | | Ø1-½" × 11 ga | Ø2" × 11 ga | Ø2-½" × 11 ga |
| Max. bending radius (CLR) | in | 9.8 | 9.8 | 9.8 |
| Max. bending angle | ° | 190 | 190 | 190 |
| Hydraulic pressure | psi | 730 – 2,900 | 730 – 2,900 | 730 – 2,900 |
| Working length | FT | 9.8 FT | 9.8 FT | 9.8 FT |
| Working length | in | 118.1 | 118.1 | 118.1 |
| Rotation tolerance | ° | ±0.1 | ±0.1 | ±0.1 |
| Bending speed | | Adjustable | Adjustable | Adjustable |
| Motor power | HP | 20 | 30 | 30 |
| Dimensions L × W × H | in | 217 × 51 × 63 | 250 × 55 × 63 | 250 × 55 × 63 |
| Weight | lb | 4,960 | 8,267 | 8,708 |

## 3-AXIS SFB CNC/A3

Y + B + C SERVO AXES

| Model | | SFB 38-CNC/A3 | SFB 51-CNC/A3 | SFB 65-CNC/A3 | SFB 76-CNC/A3 | SFB 90-CNC/A3 |
|---|---|---|---|---|---|---|
| Max. tube capacity (OD × wall) | | Ø1-½" × 11 ga | Ø2" × 11 ga | Ø2-½" × 11 ga | Ø3" × 8 ga | Ø3-½" × 8 ga |
| Max. bending radius (CLR) | in | 9.8 | 9.8 | 9.8 | 9.8 | 9.8 |
| Max. bending angle | ° | 190 | 190 | 190 | 190 | 190 |
| Hydraulic pressure | psi | 730 – 2,610 | 730 – 2,610 | 730 – 2,610 | 730 – 2,610 | 730 – 2,610 |
| Working length | FT | 9.8 FT | 9.8 FT | 9.8 FT | 13.1 FT | 13.1 FT |
| Working length | in | 118.1 | 118.1 | 118.1 | 157.5 | 157.5 |
| Rotation tolerance | ° | ±0.1 | ±0.1 | ±0.1 | ±0.1 | ±0.1 |
| Bending speed | | Adjustable | Adjustable | Adjustable | Adjustable | Adjustable |
| Motor power | HP | 14 | 21 | 21 | 27 | 34 |
| Dimensions L × W × H | in | 177 × 47 × 59 | 195 × 51 × 63 | 195 × 51 × 63 | 236 × 57 × 69 | 236 × 57 × 69 |
| Weight | lb | 2,866 | 3,858 | 4,079 | 6,945 | 7,385 |

*Tube capacities for mild steel tube. Wall thickness shown as nearest fraction.*

SFB NC/C · SERVO ROTATION, HYDRAULIC COLLET

# NC MANDREL TUBE BENDERS WITH CARRIER

Servo rotation axis on a carrier — fast, repeatable series production

**MODEL** SFB 90-NC/C

Servo rotation axis on carrier

Servo-motorized rotation axis

## NC CARRIER FEATURES

- Hydraulic collet holds the workpiece firmly while bending
- Servo-motorized rotation axis controlled from the screen — the same servo motors as the CNC models for very low rotation tolerance
- Manual feeding axis with adjustable stoppers on the carrier slide — faster than standard NC models
- Screen on the carrier shows feed length and rotation angle while working
- Ideal for furniture, metal accessories, lighting and other series production

## STANDARD FEATURES

- 1 die set in requested size
- NC carrier: servo-motorized rotation (B axis), hydraulic collet, manual feeding (Y axis), screen on carrier
- 5 hydraulic cylinders: slider support, clamping, mandrel, pressure die and collet
- NC control unit with 10" touchscreen on mobile panel
- 100-program memory, 20 bends per program
- Working status reports; error and warning messages
- Mobile foot pedal with emergency stop
- Electric bending axis with reducer (C axis)
- Bending with or without mandrel
- Brake motor for precise bends
- Bending angle measured by encoder
- Safety plate behind bending head
- Overload protection
- CE certified

## OPTIONAL EQUIPMENT

- Extra die sets
- Extended mandrel length (up to 20 FT)
- Ball mandrel
- Wiper die
- Motorized feeding (Y axis)
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

SFB NC · 38 / 51 / 65 / 76 / 90

# NC MANDREL TUBE BENDERS

10" touchscreen NC with 100 programs and hydraulic mandrel

MODEL **SFB 90-NC**

MODEL **SFB 65-NC**

## STANDARD FEATURES

- 1 die set in requested size
- NC control unit with 10" TFT touchscreen
- Electric bending drive with reducer (direct-drive reducer on 76 & 90 NC)
- 100-program memory, 20 sequential bends per program
- Working status reports; error and warning messages
- Mobile foot pedal with emergency stop
- Gauge-distance bracket
- Bending with or without mandrel
- Safety plate on bending head
- Bending angle measured by encoder
- Brake motor for precise bends
- 4 hydraulic cylinders: slider support, clamping, mandrel and pressure die
- Lockable electrical panel with safety interlock
- Overload protection

## OPTIONAL EQUIPMENT

- Manual carrier
- Extra die sets in requested size
- Extended mandrel length (up to 20 FT)
- Ball mandrel
- Wiper die
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Direct-drive reducer system on 76 & 90 NC

Carrier screen: feed and rotation

Hydraulic collet

SFB 38-NC standard

# TECHNICAL SPECIFICATIONS SFB NC/C · SFB NC

## NC/C SFB NC/C — WITH CARRIER

4 MODELS

| Model | | SFB 38-NC/C | SFB 51-NC/C | SFB 65-NC/C | SFB 76-NC/C |
|---|---|---|---|---|---|
| Max. tube capacity (OD × wall) | | Ø1-½" × 11 ga | Ø2" × 11 ga | Ø2-½" × 11 ga | Ø3" × 8 ga |
| Max. bending radius (CLR) | in | 9.8 | 9.8 | 9.8 | 9.8 |
| Max. bending angle | ° | 190 | 190 | 190 | 190 |
| Hydraulic pressure | psi | 730 – 2,610 | 730 – 2,610 | 730 – 2,610 | 730 – 2,610 |
| Working length | FT | 9.8 FT | 9.8 FT | 9.8 FT | 13.1 FT |
| Working length | in | 118.1 | 118.1 | 118.1 | 157.5 |
| Bending speed | | Adjustable | Adjustable | Adjustable | Adjustable |
| Motor power | HP | 7.1 | 12 | 15 | 22 |
| Dimensions L × W × H | in | 177 × 45 × 65 | 191 × 59 × 73 | 191 × 59 × 73 | 236 × 63 × 73 |
| Weight | lb | 2,646 | 3,638 | 3,858 | 6,614 |

## NC SFB NC

5 MODELS

| Model | | SFB 38-NC | SFB 51-NC | SFB 65-NC | SFB 76-NC | SFB 90-NC |
|---|---|---|---|---|---|---|
| Max. tube capacity (OD × wall) | | Ø1-½" × 11 ga | Ø2" × 11 ga | Ø2-½" × 11 ga | Ø3" × 8 ga | Ø3-½" × 8 ga |
| Max. bending radius (CLR) | in | 9.8 | 9.8 | 9.8 | 9.8 | 9.8 |
| Max. bending angle | ° | 190 | 190 | 190 | 190 | 190 |
| Hydraulic pressure | psi | 730 – 2,610 | 730 – 2,610 | 730 – 2,610 | 730 – 2,610 | 730 – 2,610 |
| Working length | FT | 11.8 FT | 11.8 FT | 11.8 FT | 15.1 FT | 15.1 FT |
| Working length | in | 141.7 | 141.7 | 141.7 | 181.1 | 181.1 |
| Bending speed | | Adjustable | Adjustable | Adjustable | Adjustable | Adjustable |
| Oil tank capacity | L | 40 | 70 | 70 | 100 | 100 |
| Motor power | HP | 7.0 | 11 | 14 | 20 | 25 |
| Dimensions L × W × H | in | 177 × 45 × 55 | 191 × 59 × 59 | 191 × 59 × 59 | 236 × 63 × 63 | 236 × 63 × 63 |
| Weight | lb | 2,205 | 3,417 | 3,527 | 5,842 | 6,283 |

**SFB 51-NC/C**
Carrier type

**SFB 38-NC/C**
Carrier type

**SFB 51-NC**
Standard NC

*Tube capacities for mild steel tube.*

SFB 32-HD (PLC HYDRAULIC) · SFB 32-M (MOTORIZED)

# COMPACT MANDREL TUBE BENDERS

## SFB 32-HD

PLC-controlled hydraulic tube bender with mandrel

- 1 die set in requested size
- Bending system with special direct gear-drive reducer
- PLC control with 4.7" TFT touchscreen
- 20-program memory, 10 sequential bends per program
- Hydraulic clamping
- Mobile foot pedal with emergency stop
- Brake motor for precise bends
- Gauge-distance attachment
- Square attachment
- Support pulley
- Lockable electrical panel with safety interlock
- Overload protection
- CE certified

## SFB 32-M

Motorized tube bender with mandrel

- 1 die set in requested size
- Special direct-drive reducer
- Mobile foot pedal with emergency stop
- Manual clamping
- Square attachment
- Manual angle scale
- Brake motor for precise bends
- Gauge-distance bracket
- Support pulley
- Lockable electrical panel with safety interlock
- CE certified

## SFB 32-HD

| Model | | SFB 32-HD |
|---|---|---|
| Max. tube capacity (OD × wall) | | Ø1-¼" × 11 ga |
| Max. bending radius (CLR) | in | 9.8 |
| Max. bending angle | ° | 190 |
| Hydraulic pressure | psi | 730 – 2,610 |
| Working length | FT | 6.9 FT |
| Working length | in | 82.7 |
| Motor power | HP | 5.0 |
| Oil tank capacity | L | 20 |
| Dimensions L × W × H | in | 91 × 43 × 45 |
| Weight | lb | 794 |

## SFB 32-M

| Model | | SFB 32-M |
|---|---|---|
| Max. tube capacity (OD × wall) | | Ø1-¼" × 11 ga |
| Max. bending radius (CLR) | in | 9.8 |
| Max. bending angle | ° | 190 |
| Working length | FT | 4.9 FT |
| Working length | in | 59.1 |
| Motor power | HP | 3.0 |
| Dimensions L × W × H | in | 91 × 43 × 45 |
| Weight | lb | 639 |

## OPTIONAL EQUIPMENT

+ Extra die sets in requested size
+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

## INCLUDED WITH EVERYNOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SFB 38-NC/A2 (WITH CARRIER) · SFB 38-NC/A · SPECIAL PRODUCTION

# NC ALUMINUM-PROFILE BENDING MACHINES

Special tooling for aluminum profiles — windows, doors and frames

MODEL **SFB 38-NC/A2**

MODEL **SFB 38-NC/A**

## STANDARD FEATURES

- 1 special aluminum-profile bending die set in requested size
- Mobile NC control unit with 10" TFT touchscreen
- Electric bending drive with reducer
- 100-program memory, 20 bends per program
- Working status reports; error and warning messages
- Mobile foot pedal with emergency stop
- Safety plate behind bending head
- Bending angle measured by encoder
- Gauge-distance bracket
- Hydraulic support and clamping
- Hydraulic tooling clamp
- Lockable electrical panel with safety interlock
- Overload protection

## OPTIONAL EQUIPMENT

+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

## SFB 38-NC/A2 · NC/A

| Model | | SFB 38-NC/A2 | SFB 38-NC/A |
|---|---|---|---|
| Max. bending radius (CLR) | in | 9.8 | 9.8 |
| Max. bending angle | ° | 190 | 190 |
| Hydraulic pressure | psi | 730 – 2,610 | 730 – 2,610 |
| Working length | FT | 9.8 FT | 9.8 FT |
| Working length | in | 118.1 | 118.1 |
| Bending speed | | Adjustable | Adjustable |
| Motor power | HP | 9.4 | 7.4 |
| Dimensions L × W × H | in | 177 × 45 × 39 | 177 × 45 × 53 |

Special tooling for aluminum profiles

Typical part: window frame

Typical part: door frame

BK SERIES · NON-MANDREL

# ROTARY DRAW TUBE & PROFILE BENDERS

Compact benders for tube, pipe, solid bar, flat bar and box section — 1 tooling set included

### BK-42

Ø1-5/8" × 1/8" steel tube · touchscreen · quick tooling change

### BK-050

Ø2-3/8" × 1/8" steel tube · NC (PLC) control · two speeds

### BK-H 060

Hydraulic · Ø2-3/8" × 1/8" steel tube · 0–210°

### BK 030 (76)

Ø3" × 1/8" steel tube · touchscreen programming

## BK-42 · BK 030 (76)

- Touchscreen programming of bend angle, multilingual diagnostics
- 20 programs of 10 lines with NC (PLC) control
- Quick-change tooling
- Sequential bends with high repeatability
- Digital display of bend angle
- Foot-pedal control for hands-free operation

## BK-050 · BK-H 060

- One-touch control: any operator can program and store bend angles
- Two bending speeds
- Bend from the control panel or the foot pedal
- Mobile on rollers with handle, compact design
- BK-H 060: hydraulic, draws tube from one direction for easier sequential bending
- BK-H 060: one-piece solid bronze counter-bend die, swiveling bend head, angle indicator

| Model | | BK-42 | BK-050 | BK-H 060 | BK 030 (76) |
|---|---|---|---|---|---|
| Tube capacity (pipe size) | NPS | 1/8" – 1-1/4" | 1/8" – 2" | 1/8" – 2" | 1/8" – 2-1/2" |
| Max. bending radius (CLR) | in | 7.9 | 7.9 | 7.9 | 7.9 |
| Bending angle | ° | — | — | 0–210 | — |
| Motor power | HP | 1.0 | 3.0 | 3.0 | 3.0 |
| Oil tank capacity | L | — | — | 25 | — |
| Dimensions L × W × H | in | 22 × 18 × 41 | 30 × 22 × 43 | 30 × 22 × 43 | 30 × 22 × 43 |
| Weight | lb | 243 | 309 | 311 | 397 |

## OPTIONAL EQUIPMENT

+ Additional tooling for other diameters and profiles
+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

### INCLUDED WITH EVERYNOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

# MAXIMUM BENDING CAPACITIES BK SERIES

| Model | BK-42 | BK-050 | BK-H 060 | BK 030 (76) |
|---|---|---|---|---|
| Gas pipe (Sch. 40) | 1-1/4" NPS | 2" NPS | — | — |
| Steel tube | Ø1-5/8" × 11 ga | Ø2-3/8" × 11 ga | Ø2-3/8" × 11 ga | Ø3" × 11 ga |
| Stainless steel tube (304/316) | Ø1-5/8" × 14 ga | Ø2-3/8" × 14 ga | Ø2-3/8" × 12 ga | Ø2-3/4" × 8 ga |
| Hard copper & aluminum tube | Ø2-1/8" × 14 ga | Ø2-1/2" × 8 ga | Ø2-3/8" × 3/16" | Ø3" × 1/4" |
| Solid round bar | Ø1-1/8" | Ø1-3/8" | Ø1-3/4" | Ø1-3/4" |
| Solid square / rectangular bar | 1/4" × 1-5/8" | 3/8" × 2-3/8" | 1-1/8" × 2-3/8" | 3/8" × 3-1/2" |
| Flat bar — hard way | 1-5/8" × 1/2" | 2-3/8" × 5/8" | 2-3/8" × 5/8" | 3" × 9/16" |
| Flat bar — easy way | 1-5/8" × 13/16" | 2-3/8" × 1-1/8" | 2-3/8" × 1-1/8" | 3" × 1-1/8" |
| Box section | 1-5/8" × 13/16" × 12 ga | 2-3/8" × 1-1/8" × 8 ga | 2-3/8" × 1-1/8" × 8 ga | 2-3/4" × 1-5/8" × 8 ga |

*Tube shown as OD × wall. Capacities at maximum, with matching tooling.*



Touchscreen with manual, program, auto and parameter modes

NC (PLC) control

Tooling for BK models

Mandrel tooling: SFB-CNC



Mandrel tooling: SFB-NC

## TOOLING QUOTE CHECKLIST

- Material type
- Tube / profile size
- Wall thickness
- Min. centerline radius (CLR)
- Max. bending angle
- Max. tube / profile length

PN 17/90 · PN 20/76

# MOTORIZED PIPE NOTCHING MACHINES

Belt-sander tube notchers — 10 dovetail drums standard

### PN 17/90

Basic centering and easy belt adjustment

### PN 20/76

Compact notcher with movable clamp

- Quickly opens the right dovetail for each tube diameter using the processing drum
- Fast clamping and release with the moving clamp
- Clamp moves left and right
- Notching up to 50° with the movable clamp
- 10 dovetail drums standard: Ø3⁄4″, 13⁄16″, 1″, 1-1⁄4″, 1-1⁄2″, 1-5⁄8″, 1-7⁄8″, 2″, 2-3⁄8″, 3″
- Special dovetails for other sizes (optional)

| Model | | PN 17/90 | PN 20/76 |
|---|---|---|---|
| Notching capacity (tube OD) | in | 11⁄16″ – 3-1⁄2″ | 13⁄16″ – 3″ |
| Max. notching angle | ° | 50 | 50 |
| Sanding belt | in | 4 × 47 | 4 × 79 |
| Motor power | HP | 3.0 | 3.0 |
| Dimensions L × W × H | in | 43 × 33 × 47 | 53 × 28 × 47 |
| Weight | lb | 375 | 287 |

Typical notched tube joints

TD-01

# MOTORIZED TUBE-END DEBURRING MACHINE

### TD-01

Wire-brush deburring for tube ends

- Balanced, long-life construction
- Inside and outside deburring up to Ø3-1⁄2″
- Fast, easy wire-brush deburring at high speed
- Round, rectangular, oval and other profiles
- Stainless steel, mild steel, aluminum and more
- Works alongside tube benders and saws
- Low running cost, high productivity

| Model | | TD-01 |
|---|---|---|
| Deburring capacity (in & out) | in | Ø3-1⁄2″ |
| Wire brush | in | Ø10 × 4 |
| Brush speed | rpm | 1,500 |
| Motor power | HP | 3.0 |
| Dimensions L × W × H | in | 18 × 18 × 14 |
| Weight | lb | 88 |

SFF 90-1 · SFF 60-1

# SINGLE-STATION HYDRAULIC PIPE-END FORMING MACHINES

Expand or reduce tube ends — easy tool change system

## SFF 90-1

Single-station hydraulic end former

## SFF 60-1

Single-station hydraulic end former

Easy tool-changing system

## STANDARD FEATURES

- Expands or reduces (collapses) pipe ends
- 1 set of end-forming tooling in requested size
- Easy tool-changing system
- Mobile foot pedal
- CE certified

## OPTIONAL EQUIPMENT

- Additional end-forming tooling sets
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

| Model | | SFF 90-1 | SFF 60-1 |
|---|---|---|---|
| Expanding capacity | in | Ø1-3/8" – 3-1/2" × 14 ga | Ø1-3/8" – 2-3/8" × 14 ga |
| Reducing capacity | in | Ø5/16" – 3-1/2" × 14 ga | Ø5/16" – 2-3/8" × 14 ga |
| Motor power | HP | 15 | 10 |
| Dimensions L × W × H | in | 51 × 28 × 45 | 51 × 28 × 45 |
| Weight | lb | 1,301 | 992 |

*Capacities for mild steel tube, wall thickness shown.*

SFC 350-VX · SFC 275/315-VP · SFC 275/315-V

# CIRCULAR COLD SAWS

Wet-type circular cold saws for burr-free cuts in tube, bar and profile

### SFC 350-VX

Semi-automatic, double-gear

### SFC 275/315-VP

Pneumatic vise

### SFC 275/315-V

Manual vise

## SFC 350-VX · SEMI-AUTOMATIC

- Semi-automatic circular saw for fast cutting
- High output, ideal for short batch runs
- Heavy-duty gearbox
- Cast-iron base
- Foot-switch actuation
- Hydro-pneumatic head descent for optimum cut
- Cutting-speed regulator
- Head stroke adjustable to material size
- Mitre cuts 45° right to 45° left
- Air supply: 85 psi (8.5 cfm)

## SFC VP · PNEUMATIC VISE

- Air-operated material vise
- Low-voltage start/stop trigger in the pull-down handle
- Mitre cuts 45° left and right
- Double split vise grips both sides of the material
- Self-centering vise optimizes cutting position
- Large base for stability

## SFC V · MANUAL VISE

- Manually operated material vise
- Robust double-hinged pivot
- Low-voltage start/stop trigger in the pull-down handle
- Mitre cuts 45° left and right
- Double split vise grips both sides of the material

**NO-BURR CUTTING**
wet-type cold sawing for clean, burr-free cuts

**BLADE COATINGS**
TiN for medium-hard steel · TiCN for high-strength steel · TiAlN for stainless steel

**ELECTRICAL**
24 V control voltage; main voltage to suit Canadian supply

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

# TECHNICAL SPECIFICATIONS SFC CIRCULAR COLD SAWS

| Model | | SFC 350-VX | SFC 275-VP | SFC 315-VP | SFC 275-V | SFC 315-V |
|---|---|---|---|---|---|---|
| Blade Ø | in | 13-¾" | 10-¾" | 12-½" | 10-¾" | 12-½" |
| Round — 90° / 45° | in | 4-½" / 4-⅜" | 3-⅜" / 2-¾" | 4-⅛" / 3-½" | 3-⅜" / 2-¾" | 4-⅛" / 3-½" |
| Square — 90° | in | 3-⅞" × 3-⅞" | 2-¾" × 2-¾" | 3-⅜" × 3-⅜" | 2-¾" × 2-¾" | 3-⅜" × 3-⅜" |
| Square — 45° | in | 3-½" × 3-½" | 2-⅜" × 2-⅜" | 3-⅛" × 3-⅛" | 2-⅜" × 2-⅜" | 3-⅛" × 3-⅛" |
| Rectangular — 90° | in | 4-¾" × 3-⅛" | 3-¾" × 2-⅜" | 4-¾" × 2-⅜" | 3-¾" × 2-⅜" | 4-¾" × 2-⅜" |
| Rectangular — 45° | in | 3-½" × 3-½" | 2-¾" × 2-⅛" | 3-½" × 2-⅜" | 2-¾" × 2-⅛" | 3-½" × 2-⅜" |
| Mitre range | ° | 0 – 45 L/R | 0 – 45 L/R | 0 – 45 L/R | 0 – 45 L/R | 0 – 45 L/R |
| Blade speeds | rpm | 45 / 80 | 45 / 90 | 45 / 90 | 45 / 90 | 45 / 90 |
| Saw motor | HP | 2.4 – 3.0 | 1.7 – 2.4 | 1.7 – 2.4 | 1.7 – 2.4 | 1.7 – 2.4 |
| Installed power | HP | 7.8 | 5.0 | 6.3 | 5.0 | 6.3 |
| Blade bore / pin holes | mm | 32 / 2 × Ø11 | 32 / 2 × Ø11 | 32 / 2 × Ø11 | 32 / 2 × Ø11 | 32 / 2 × Ø11 |
| Dimensions L × W × H | in | 43 × 24 × 55 | 39 × 24 × 55 | 39 × 24 × 55 | 39 × 24 × 55 | 39 × 24 × 55 |
| Net weight | lb | 661 | 463 | 441 | 419 | 441 |

*Cutting capacities shown at 90° / 45°. Coolant pump 0.08 HP on all models.*

## OPTIONAL EQUIPMENT

- Saw blades for specific materials (TiN, TiCN, TiAlN)
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

SFC 350-VX

SFC 315-VP

SFC 315-V

NovoTech MACHINE TOOLS Inc.

# LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga location.


PHONE
+1 647 526 5510

WEB & EMAIL
NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS
1365 Mid-Way Blvd, 26
Mississauga, ON L5T 2J5
Canada


## INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded; plate and sheet capacities are fractions for mild steel (34,100 psi yield) unless noted. Model numbers are manufacturer designations. Photos may show optional equipment.