NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH VALUE LINE · BUILT IN CHINA TO NORTH AMERICAN STANDARDS · SOLD & SERVICED IN CANADA BY NOVOTECH

GRINDING AND FINISHING MACHINES

BELT GRINDERS AND SANDERS · DISC SANDERS AND BENCH GRINDERS · END-SURFACE GRINDERS · DUST COLLECTORS · DEBURRING AND FINISHING MACHINES · CORNER GRINDERS · EDGE CHAMFERING MACHINES







China
MADE IN CHINA

22
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

VALUE-LINE GRINDING AND FINISHING MACHINES

CONTENTS

BELT GRINDERS

S-75 · S-150 pedestal belt grinders, 3″ and 6″ × 79″ belt S-75 – S-150L · 5 models 04
S-75H · S-150H heavy-duty belt grinders, 5.5 HP, with dust collector on the HB S-75HA – S-150HB · 4 models 06
S-100 · S-220 wide-belt grinders, 4″ and 8″ belt S-100 · S-220 · 2 models 07
S-75F mobile floor belt grinder for weld seams, 3″ belt S-75F · 1 model 08
S-50 · S-50B compact belt grinders, 2″ and 3″ belt S-50 · S-50B · 2 models 09
S-50V · S-75V vertical column belt grinders, 2″ and 3″ × 79″ belt S-50V · S-75V · 2 models 10
SDD75 multi-purpose belt grinder — flat, contact wheel and tube notching SDD75 · 1 model 11
BGM-50HV · BGM-50 belt grinders for knives and tools, 2″ and 1-1/2″ belt BGM-50HV · BGM-50 · 2 models 12

COMBINATION GRINDERS AND SANDERS

WS25-200 belt and disc combination sander, 1 × 42″ belt and 8″ disc WS25-200 · 1 model 13
SP-2 · SP-3 · SP-6 grinding and polishing machines — belt, disc and wheel on one motor SP-2 · SP-3 · SP-6 · 3 models 14
BTM250 belt and disc sander · BKM-250 belt sander and edge beveller BTM250 · BKM-250 · 2 models 15

DISC SANDERS

DS-20 20″ disc sanders for metal and TSM300 12″ disc sander TSM300 – DS-20V · 4 models 16
DS12 12″ bench disc sanders DS12 · DS12A · DS12B · 3 models 19

BENCH GRINDERS AND WIRE-WHEEL MACHINES

BG-8 · BG-10 bench grinders and BG-60 wire-wheel deburring machines BG-8 – BG-60A · 4 models 20

END-SURFACE GRINDERS

MD-380A · MD-380B end-surface grinders MD-380A · MD-380B · 2 models 22

DUST COLLECTORS

DVS14 · DC650 metal dust collectors DVS14 · DC650 · 2 models 23

WIDE-BELT DEBURRING MACHINES

BFM-2560 wide-belt deburring machine, 24″, and WD-1800 wet dust collector BFM-2560 · WD-1800 · 2 models 24
MGM-300 finishing and deburring machine, 12″ working width MGM-300 · 1 model 26
R series dry deburring and finishing sanders, 1 – 3 heads, 24.8″ and 51.2″ wide R-630 – R-R-R1300 · 6 models + dust collector 27

CORNER GRINDING MACHINES

YQ horizontal corner grinding machines for box weld seams, edges to 35.4 – 59.1″ YQ-900 · YQ-1200 · YQ-1500 · 3 models 30
YQ-450 vertical corner grinding and polishing machine, corners to 17.7″ high YQ-450 · 1 model 31

EDGE CHAMFERING MACHINES

CMD-4 · CMD-80 edge chamfering machines and DM5 hand chamfering tools CMD-4 – DM5A · 4 models 32

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR VALUE-LINE GRINDING AND FINISHING MACHINES

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Built in China to North American standards
- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee
  in-stock machines only
- Spare parts & technical support
  readily available in Canada
- Order today with just 10% down
  0% down financing available
- Installation and training available

NOVOTECH VALUE LINE

GRINDING, DEBURRING AND FINISHING FOR THE FABRICATION SHOP

NovoTech's value line is our own brand: machines built in China to our specification by a maker that exports metalworking machinery to more than 70 countries, inspected before they ship and sold under NovoTech's name with a CSA-approved panel on every 3-phase machine, a 1-year warranty and parts and technical support from Mississauga, Ontario, Canada.

Belt grinders take the burr off a cut, blend a weld and square an end faster than a hand grinder: pedestal, floor and wide-belt grinders with 2 to 8" belts, combination belt and disc machines, disc sanders, bench grinders and wire-wheel machines, end-surface grinders and metal dust collectors; wide-belt deburring and finishing machines for laser-cut and punched parts; corner grinders for welded boxes and frames; and edge chamfering machines for weld preps.

S-75 – S-150L · 5 MODELS

S-75 · S-150 PEDESTAL BELT GRINDERS, 3″ AND 6″ × 79″ BELT



MODEL S-75 · S-75 / S-150A HEAVY-DUTY BELT GRINDER ON PEDESTAL, 3″ AND 6″ × 79″ BELT



S-75L / S-150L light-type belt grinder on pedestal

3 – 6″ × 79″ belt, 4 HP

The everyday pedestal belt grinder for steel and stainless: a 79″ belt, 3″ wide on the S-75 and 6″ wide on the S-150, running up to 6,693 ft/min from a 4 HP motor — two speeds on the S-150 — with a quick-adjusting belt angle, a large flat grinding platen and a contact wheel for radius work. The L models are the lighter versions, 5,709 ft/min, 159 and 181 lb.

STANDARD FEATURES

- 3 × 79″ (S-75) or 6 × 79″ (S-150) belt; contact wheel Ø7-7/8 – 9-7/8″
- 4 HP; up to 6,693 ft/min — the S-150 has two speeds, 3,346 / 6,693 ft/min
- Quick-adjusting belt angle; large flat sanding surface; vibration-free running
- L models: lighter build, 5,709 ft/min

OPTIONAL EQUIPMENT

S-75 · S-150 · S-150A — TECHNICAL SPECIFICATIONS

Model	S-75	S-150	S-150A
Motor	**4 HP (3 kW) output**	**3 / 3.75 HP (2.2 / 2.8 kW), two-speed**	**4 HP (3 kW) output**
Contact wheel	Ø7-7/8 × 3″ (200 × 75 mm)	Ø9-7/8 × 5-7/8″ (250 × 150 mm)	Ø7-7/8 × 5-7/8″ (200 × 150 mm)
Belt size	**3 × 79″ (75 × 2,000 mm)**	**6 × 79″ (150 × 2,000 mm)**	**6 × 79″ (150 × 2,000 mm)**
Belt speed	**6,693 ft/min (34 m/s)**	**3,346 / 6,693 ft/min (17 / 34 m/s)**	**6,693 ft/min (34 m/s)**
Packing size L × W × H	45 × 22 × 21″ (115 × 56 × 54 cm)	45 × 25 × 26″ (114 × 63 × 65 cm)	45 × 25 × 26″ (114 × 63 × 65 cm)
Weight	**187 lb (85 kg)**	**236 lb (107 kg)**	**236 lb (107 kg)**

TECHNICAL SPECIFICATIONS

S-75 · S-150 PEDESTAL BELT GRINDERS, 3" AND 6" × 79" BELT

S-75L · S-150L

Light-type belt grinders on pedestal, 3" and 6" belt

Model	S-75L	S-150L
Motor	**4 HP (3 kW) input**	**4 HP (3 kW) input**
Contact wheel	Ø7-7/8 × 3" (200 × 75 mm)	Ø7-7/8 × 5-7/8" (200 × 150 mm)
Belt size	**3 × 79" (75 × 2,000 mm)**	**6 × 79" (150 × 2,000 mm)**
Belt speed	**5,709 ft/min (29 m/s)**	**5,709 ft/min (29 m/s)**
Packing size L × W × H	46 × 22 × 28" (117 × 57 × 70 cm)	48 × 30 × 28" (122 × 77 × 72 cm)
Weight	**159 lb (72 kg)**	**181 lb (82 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

S-75HA – S-150HB · 4 MODELS

S-75H · S-150H HEAVY-DUTY BELT GRINDERS, 5.5 HP, WITH DUST COLLECTOR ON THE HB



MODEL S-75H · S-75HA / S-150HA HEAVY-DUTY BELT GRINDER WITH DUST DRAWER IN THE BASE



S-75HB / S-150HB heavy-duty belt grinder with the built-in dust collector

3 – 6" × 79" belt, 5.5 HP

The heavy-duty pedestal grinder for production deburring: a rigid welded steel base, a 5.5 HP motor driving a 79" belt at 6,496 ft/min, a 21" flat grinding length for large parts and a grinding angle that is adjusted and locked. The HB models have a 3/4 HP dust collector built into the base, the HA models a dust drawer.

STANDARD FEATURES

- 5.5 HP (4 kW) at 2,800 rpm; 3 × 79" or 6 × 79" belt at 6,496 ft/min
- 20.9" (530 mm) flat grinding length
- Adjustable grinding angle with lock; adjustable height
- HB: built-in 3/4 HP dust collector; HA: dust drawer

OPTIONAL EQUIPMENT

S-75HA · S-75HB · S-150HA · S-150HB — TECHNICAL SPECIFICATIONS

Model	S-75HA	S-75HB	S-150HA	S-150HB
Motor	**5.5 HP (4 kW), 2,800 rpm**	**5.5 HP (4 kW), 2,800 rpm**	**5.5 HP (4 kW), 2,800 rpm**	**5.5 HP (4 kW), 2,800 rpm**
Dust collector motor	–	3/4 HP (0.55 kW)	–	3/4 HP (0.55 kW)
Contact wheel	Ø7-7/8 × 3" (200 × 75 mm)	Ø7-7/8 × 3" (200 × 75 mm)	Ø7-7/8 × 5-7/8" (200 × 150 mm)	Ø7-7/8 × 5-7/8" (200 × 150 mm)
Drive wheel	Ø8-7/8 × 3" (225 × 75 mm)	Ø8-7/8 × 3" (225 × 75 mm)	Ø8-7/8 × 5-7/8" (225 × 150 mm)	Ø8-7/8 × 5-7/8" (225 × 150 mm)
Flat grinding length	20.9" (530 mm)	20.9" (530 mm)	20.9" (530 mm)	20.9" (530 mm)
Belt size	**3 × 79" (75 × 2,000 mm)**	**3 × 79" (75 × 2,000 mm)**	**6 × 79" (150 × 2,000 mm)**	**6 × 79" (150 × 2,000 mm)**
Belt speed	**6,496 ft/min (33 m/s)**	**6,496 ft/min (33 m/s)**	**6,496 ft/min (33 m/s)**	**6,496 ft/min (33 m/s)**
Packing size L × W × H	43 × 28 × 52" (110 × 70 × 132 cm)	43 × 28 × 52" (110 × 70 × 132 cm)	43 × 28 × 52" (110 × 70 × 132 cm)	43 × 28 × 52" (110 × 70 × 132 cm)
Weight	**225 lb (102 kg)**	**236 lb (107 kg)**	**282 lb (128 kg)**	**298 lb (135 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

S-100 · S-220 · 2 MODELS

S-100 · S-220 WIDE-BELT GRINDERS, 4″ AND 8″ BELT



MODEL S-100 · S-220 WIDE-BELT RADIUS GRINDER AND SURFACE SANDER WITH 8″ BELT



S-100 belt grinder with 4″ belt on pedestal

4″ and 8″ belts

Wide belts for wide work: the S-100 runs a 4 × 48″ belt from 1.5 HP with a quick-adjusting belt angle and a large flat platen; the S-220 is a radius grinder and surface sander in one, with an 8 × 79″ belt, a Ø7-7/8″ contact wheel, a 19.7 × 8.7″ graphite platen and an adjustable working position, driven by 4 HP.

STANDARD FEATURES

- S-100: 4 × 48″ belt, 3,740 ft/min, 1.5 HP, 99 lb
- S-220: 8 × 79″ belt, 5,709 ft/min, 4 HP, 260 lb
- Graphite platen pads for flat sanding; contact wheels for radius grinding
- Adjustable belt angle and working position

OPTIONAL EQUIPMENT

S-100 · S-220 — TECHNICAL SPECIFICATIONS

Model	S-100	S-220
Motor	**1.5 HP (1.1 kW)**	**4 HP (3 kW)**
Drive wheel	Ø5-1/8 × 3-7/8″ (130 × 100 mm)	Ø7-7/8 × 8-5/8″ (200 × 220 mm)
Contact wheel	Ø5-1/8 × 3-7/8″ (130 × 100 mm)	Ø7-7/8 × 8-5/8″ (200 × 220 mm)
Belt size	**4 × 48″ (100 × 1,220 mm)**	**8 × 79″ (200 × 2,000 mm)**
Belt speed	**3,740 ft/min (19 m/s)**	**5,709 ft/min (29 m/s)**
Graphite platen pad	11.8 × 4.7 × 0.06″ (300 × 120 × 1.5 mm)	19.7 × 8.7 × 0.06″ (500 × 220 × 1.5 mm)
Packing size L × W × H	40 × 22 × 24″ (102 × 57 × 60 cm)	48 × 30 × 28″ (122 × 77 × 72 cm)
Weight	**99 lb (45 kg)**	**260 lb (118 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

S-75F · 1 MODEL

S-75F MOBILE FLOOR BELT GRINDER FOR WELD SEAMS, 3″ BELT



MODEL S-75F · S-75F MOBILE FLOOR BELT GRINDER FOR WELD SEAMS

3 × 79″ belt, on wheels

The belt grinder that goes to the work: on wheels with a handle, it grinds and polishes weld seams on the floor and on parts too heavy to lift onto a bench machine, with an adjustable depth stop. 3 × 79″ belt at 6,693 ft/min, 4 HP, 165 lb.

STANDARD FEATURES

- ✓ 3 × 79″ belt at 6,693 ft/min; 4 HP
- ✓ Adjustable depth stop
- ✓ On wheels with a handle — grinds weld seams on the floor

OPTIONAL EQUIPMENT

S-75F — TECHNICAL SPECIFICATIONS

Model	S-75F
Motor	**4 HP (3 kW)**
Contact wheel	Ø7-7/8 × 3″ (200 × 75 mm)
Belt size	**3 × 79″ (75 × 2,000 mm)**
Belt speed	**6,693 ft/min (34 m/s)**
Packing size L × W × H	41 × 28 × 37″ (105 × 70 × 95 cm)
Weight	**165 lb (75 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

S-50 · S-50B · 2 MODELS

S-50 · S-50B COMPACT BELT GRINDERS, 2″ AND 3″ BELT



MODEL S-50 · S-50 COMBINATION BELT GRINDER AND DISC SANDER



S-50B compact 3″ belt grinder

2″ and 3″ belts, 1 HP

Compact belt grinders for the bench: the S-50 combines a 2 × 39″ belt with a sanding disc and is light enough to carry; the S-50B runs a 3 × 69″ belt from 1 HP and grinds, cleans, brushes and deburrs the edges of all kinds of parts, with a stand as an option.

STANDARD FEATURES

- ✓ S-50: 2 × 39″ belt and sanding disc, 55 lb
- ✓ S-50B: 3 × 69″ belt, 1 HP, 110 lb; stand optional
- ✓ 1 HP (0.75 kW)

OPTIONAL EQUIPMENT

S-50 · S-50B — TECHNICAL SPECIFICATIONS

Model	S-50	S-50B
Motor	**1 HP (0.75 kW)**	**1 HP (0.75 kW)**
Contact wheel	Ø3 × 1-15/16″ (75 × 50 mm)	Ø3-7/8 × 3″ (100 × 75 mm)
Belt size	**2 × 39″ (50 × 1,000 mm)**	**3 × 69″ (75 × 1,750 mm)**
Belt speed	**4,331 ft/min (22 m/s)**	**2,559 ft/min (13 m/s)**
Packing size L × W × H	21 × 17 × 17″ (54 × 44 × 42 cm)	31 × 20 × 23″ (80 × 50 × 58 cm)
Weight	**55 lb (25 kg)**	**110 lb (50 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

S-50V · S-75V · 2 MODELS

S-50V · S-75V VERTICAL COLUMN BELT GRINDERS, 2" AND 3" × 79" BELT



MODEL S-50V · S-50V / S-75V VERTICAL COLUMN BELT GRINDER

2 – 3" × 79" belt

Column belt grinders that take a third of the floor space of a conventional machine: ready to use without assembly, quick belt changes and sparks directed away from the operator. 2 or 3 × 79" belt, 1 – 1.5 HP.

STANDARD FEATURES

- ✓ 2 × 79" (S-50V) or 3 × 79" (S-75V) belt
- ✓ 1 – 1.5 HP at 2,800 rpm
- ✓ Small footprint; quick belt changes; sparks directed for safe work

OPTIONAL EQUIPMENT

S-50V · S-75V — TECHNICAL SPECIFICATIONS

Model	S-50V	S-75V
Motor	**1 HP (0.75 kW)**	**1.5 HP (1.1 kW)**
Motor speed	2,800 rpm	2,800 rpm
Belt size	**2 × 79" (50 × 2,000 mm)**	**3 × 79" (75 × 2,000 mm)**
Belt speed	**4,331 ft/min (22 m/s)**	**5,118 ft/min (26 m/s)**
Packing size L × W × H	19 × 16 × 47" (48 × 40 × 120 cm)	19 × 16 × 47" (48 × 40 × 120 cm)
Weight	**88 lb (40 kg)**	**99 lb (45 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SDD75 · 1 MODEL

SDD75 MULTI-PURPOSE BELT GRINDER — FLAT, CONTACT WHEEL AND TUBE NOTCHING



MODEL SDD75 · SDD75 MULTI-PURPOSE BELT GRINDER — FLAT, CONTACT WHEEL AND TUBE NOTCHING ON ONE ARM

3 × 79″ belt, two speeds

Three kinds of grinding on one arm and one 3 × 79″ belt: flat grinding on the platen, contact-wheel grinding like a normal belt grinder, and an adjustable wheel for knives — and, with the optional vise and Ø28 mm roller, notching tube from Ø3/4 to 3″. Two speeds from a 2 / 3 HP motor; easy belt change.

STANDARD FEATURES

- 3 × 79″ belt, two speeds 2,953 / 5,906 ft/min
- Flat, contact-wheel and knife grinding on one arm
- Tube notching Ø3/4 – 3″ with the optional vise and Ø28 mm roller
- Easy belt change

OPTIONAL EQUIPMENT

SDD75 — TECHNICAL SPECIFICATIONS

Model	SDD75
Motor	**2 / 3 HP (1.5 / 2.2 kW), two-speed**
Belt size	**3 × 79″ (75 × 2,000 mm)**
Belt speed	**2,953 / 5,906 ft/min (15 / 30 m/s)**
Tube notching	**Ø3/4 – 3″ (20 – 76 mm) with the optional vise and Ø28 mm roller**
Packing size L × W × H	32 × 29 × 40″ (81 × 74 × 102 cm)
Weight	**243 lb (110 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BGM-50HV · BGM-50 · 2 MODELS

BGM-50HV · BGM-50 BELT GRINDERS FOR KNIVES AND TOOLS, 2″ AND 1-1/2″ BELT



MODEL BGM-50 · BGM-50HV 2″ BELT GRINDER FOR KNIVES AND TOOLS, HORIZONTAL AND VERTICAL



BGM-50 variable-speed belt grinder with inverter

1-1/2″ and 2″ belts, variable speed

Belt grinders for knife makers and tool rooms: the BGM-50HV runs a 2 × 48″ belt at variable speed up to 3,543 ft/min, works horizontal or vertical, comes with five contact wheels from 3/4 to 8″ and polyurethane wheels ground flat for precise finishing, and tilted on its side it works as a bobbin grinder or a pipe notcher. The BGM-50 is a cast-frame 1-1/2″ grinder with inverter speed control.

STANDARD FEATURES

- BGM-50HV: 2 × 48″ belt, variable speed to 3,543 ft/min, 2 HP; horizontal and vertical
- Five contact wheels 3/4, 1, 1-1/2, 3-1/2 and 8″; sanding disc available
- BGM-50: 1-1/2 × 60″ belt, inverter speed control, 1.5 HP
- Sealed bearings; quick belt change and tracking

OPTIONAL EQUIPMENT

BGM-50HV · BGM-50 — TECHNICAL SPECIFICATIONS

Model	BGM-50HV	BGM-50
Motor	**2 HP (1.5 kW)**	**1.5 HP (1.1 kW)**
Contact wheel	Ø3-3/8 × 1-15/16″ (87 × 50 mm)	Ø7-1/8 × 1-1/2″ (180 × 38 mm)
Belt size	**2 × 48″ (50 × 1,220 mm)**	**1-1/2 × 60″ (38 × 1,520 mm)**
Belt speed	**Variable, up to 3,543 ft/min (18 m/s)**	**Variable (inverter)**
Working position	Horizontal and vertical	Vertical
Packing size L × W × H	56 × 20 × 25″ (142 × 52 × 63 cm)	27 × 23 × 31″ (68 × 58 × 80 cm)
Weight	**110 lb (50 kg)**	**101 lb (46 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

WS25-200 · 1 MODEL

WS25-200 BELT AND DISC COMBINATION SANDER, 1 × 42″ BELT AND 8″ DISC



MODEL WS25-200 · WS25-200 BELT AND DISC COMBINATION SANDER

1 × 42″ belt, 8″ disc

A bench sander for small parts and edges: a 1 × 42″ belt at 3,000 ft/min and an 8″ disc on one 1/3 HP motor, both with cast-iron tables that tilt 0 – 45° and have miter slots, and 1-1/2″ dust ports for a shop vacuum.

STANDARD FEATURES

- ✓ 1 × 42″ belt at 3,000 ft/min; 8″ disc at 1,725 rpm
- ✓ Cast-iron tables with miter slots, both tilt 0 – 45°
- ✓ 1-1/2″ dust ports; 1/3 HP; 57 lb

OPTIONAL EQUIPMENT

WS25-200 — TECHNICAL SPECIFICATIONS

Model	WS25-200
Belt	**1 × 42″ (25 × 1,067 mm), 3,000 ft/min**
Disc	**8″ (203 mm), 1,725 rpm at 60 Hz**
Tables	Cast iron with miter slots, both tilt 0 – 45°: belt 6 × 7″ (153 × 178 mm), disc 4 × 10″ (102 × 254 mm)
Dust ports	1-1/2″ (38 mm)
Motor	**1/3 HP (0.25 kW)**
Packing size L × W × H	25 × 15 × 20″ (64 × 38 × 50 cm)
Weight	**57 lb (26 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SP-2 · SP-3 · SP-6 · 3 MODELS

SP-2 · SP-3 · SP-6 GRINDING AND POLISHING MACHINES — BELT, DISC AND WHEEL ON ONE MOTOR



MODEL SP · SP-6 BELT GRINDER AND 20" DISC SANDER COMBINATION WITH DUST PORTS



SP-2 variable-speed grinding and polishing machine with belt and disc



SP-3 belt grinder, grinding wheel and polishing wheel on one motor

Belt, disc and wheel on one machine

Combination machines with two working ends on one motor: the SP-2 runs a 2 × 79" belt and a 10 – 12-5/8" disc at variable speed from 3 HP; the SP-6 combines a 2" belt grinder that tilts from 0 to 90° with a 20" disc sander and its tilting table; the SP-3 combines a 3" belt with a grinding or cup wheel and a polishing wheel, on two speeds.

STANDARD FEATURES

- ✓ SP-2: variable speed 200 – 2,800 rpm; belt and disc; safety cover rotates 360°
- ✓ SP-6: 2 × 79" belt (0 – 90°) and 20" disc sander, variable speed
- ✓ SP-3: 3 × 59" belt (0 – 90°), 10" grinding wheel or cup wheel and 8" polishing wheel, two speeds
- ✓ Accessories for the SP-2: polishing mandrel, keyless chuck, hook-and-loop sanding disc, clamping arbors

OPTIONAL EQUIPMENT

SP-2 · SP-3 · SP-6 — TECHNICAL SPECIFICATIONS

Model	SP-2	SP-3	SP-6
Motor	3 HP (2.2 kW), variable 200 – 2,800 rpm	1.5 / 2 HP (1.1 / 1.5 kW), 1,400 / 2,800 rpm	3 HP (2.2 kW), variable 400 – 2,800 rpm
Belt size	2 × 79" (50 × 2,000 mm)	3 × 59" (75 × 1,500 mm)	2 × 79" (50 × 2,000 mm)
Belt angle	–	0 – 90°	0 – 90°
Second station	Disc Ø10 – 12-5/8" (250 – 320 mm); Ø6" (150 mm) disc with the belt	Grinding wheel Ø10 × 1-1/4" (250 × 32 mm) or cup wheel; polishing wheel Ø8" (200 mm)	Disc sander Ø20" (508 mm), table 25 × 12" (636 × 305 mm), tilts 45° down
Belt speed	–	2,894 / 5,709 ft/min (14.7 / 29 m/s)	–
Packing size L × W × H	48 × 27 × 59" (123 × 69 × 150 cm)	33 × 25 × 50" (83 × 63 × 128 cm)	46 × 34 × 57" (118 × 87 × 145 cm)
Weight	320 lb (145 kg)	165 lb (75 kg)	430 lb (195 kg)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BTM250 · BKM-250 · 2 MODELS

BTM250 BELT AND DISC SANDER · BKM-250 BELT SANDER AND EDGE BEVELLER



MODEL BTM250 · BTM250 6″ BELT AND 10″ DISC SANDER ON CABINET STAND



BKM-250 belt sander and edge beveller

6 × 48″ belt

6″ belt machines on a cabinet stand: the BTM250 combines a 6 × 48″ belt that works horizontal or vertical with a 10″ disc and support tables for both; the BKM-250 bevels steel and non-ferrous parts at 15 to 45°, up to 1/4″ at 45°, with an easy depth adjustment, a removable top cover for contours and a miter stop.

STANDARD FEATURES

- 6 × 48″ belt; 1.5 HP (1.1 kW)
- BTM250: belt horizontal or vertical, 10″ disc at 2,100 rpm, quick-lock belt change
- BKM-250: bevels 15 – 45°, up to 1/4″ (6 mm) at 45°, parts from 3.5″ long
- Dust plates; exhaust connector optional

OPTIONAL EQUIPMENT

BTM250 · BKM-250 — TECHNICAL SPECIFICATIONS

Model	BTM250	BKM-250
Belt size	**6 × 48″ (150 × 1,220 mm)**	**6 × 48″ (150 × 1,220 mm)**
Belt speed	**1,654 ft/min (8.4 m/s)**	**2,854 ft/min (14.5 m/s)**
Belt table	6 × 10.5″ (152 × 267 mm), tilts to 45°	7.4 × 14.8″ (188 × 375 mm), tilts 70 – 135°
Disc	**Ø10″ (250 mm), 2,100 rpm, table 7.5 × 13″ (190 × 330 mm)**	**—**
Bevel	**15°**	**15 – 45°: max. 1/4″ (6 mm) at 45°, 3/16″ (4.5 mm) at 15°**
Min. workpiece length	—	3.5″ (90 mm)
Motor	**1.5 HP (1.1 kW)**	**1.5 HP (1.1 kW)**
Packing size L × W × H	31 × 20 × 45″ (79 × 51 × 114 cm)	33 × 25 × 45″ (85 × 63 × 114 cm)
Weight	**198 lb (90 kg)**	**260 lb (118 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

TSM300 - DS-20V · 4 MODELS

DS-20 20" DISC SANDERS FOR METAL AND TSM300 12" DISC SANDER



MODEL DS-20 · DS-20 20" DISC SANDER FOR METAL ON PEDESTAL



DS-20A 20" disc sander — the table rides up and down the column



DS-20V variable-speed 20" disc sander on cabinet base

12" and 20" discs

Disc sanders for metal: the 20" DS-20 models smooth burrs, chamfer edges for welding and clean up castings on a heavy column, with a hand-wheel table tilt to 45° down; on the DS-20A the whole table rides up and down the column, the DS-20V has variable speed and a 25 × 12" table on a cabinet base. The TSM300 is a 12" disc sander on a cabinet stand with a tilting table and miter stop.

STANDARD FEATURES

- ✓ 20" (508 mm) disc, 2 HP; 1,100 rpm at 60 Hz, or 500 – 1,800 rpm variable on the DS-20V
- ✓ Table tilts 30° up and 45° down by hand wheel
- ✓ DS-20A: table raised and lowered on the column; dust port for a shop vacuum
- ✓ TSM300: 12" disc, 1.5 HP, tilting table with miter stop

OPTIONAL EQUIPMENT

TSM300 — TECHNICAL SPECIFICATIONS

Model	TSM300
Disc diameter	11.8" (300 mm)
Disc speed	1,960 rpm
Table size	12 × 16.3" (305 × 415 mm), tilting, with miter stop
Motor	1.5 HP (1.1 kW)
Packing size L × W × H	20 × 21 × 50" (52 × 54 × 127 cm)
Weight	198 lb (90 kg)

DETAILS, COMPONENTS AND OPTIONS

DS-20 20" DISC SANDERS FOR METAL AND TSM300 12" DISC SANDER



TSM300 12" disc sander on cabinet stand

TECHNICAL SPECIFICATIONS

DS-20 20" DISC SANDERS FOR METAL AND TSM300 12" DISC SANDER

DS-20 · DS-20A · DS-20V

20" disc sanders for metal: deburr, chamfer weld edges, clean castings

Model	DS-20	DS-20A	DS-20V
Disc diameter	20" (508 mm)	20" (508 mm)	20" (508 mm)
Disc speed	1,100 rpm at 60 Hz (900 rpm at 50 Hz)	1,100 rpm at 60 Hz (900 rpm at 50 Hz)	Variable, 500 – 1,800 rpm at 60 Hz (500 – 1,500 rpm at 50 Hz)
Table tilt	30° up, 45° down, hand wheel	30° up, 45° down, hand wheel; table raised and lowered on the column	45° down
Table size	—	—	25 × 12" (636 × 305 mm)
Base size	22 × 22" (558 × 558 mm)	22 × 22" (558 × 558 mm)	22.8 × 20.5" (580 × 520 mm)
Motor	2 HP (1.5 kW)	2 HP (1.5 kW)	2 HP (1.5 kW)
Packing size L × W × H	30 × 28 × 54" (77 × 71 × 138 cm)	30 × 28 × 54" (77 × 71 × 138 cm)	31 × 28 × 54" (78 × 72 × 136 cm)
Weight	364 lb (165 kg)	364 lb (165 kg)	298 lb (135 kg)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

DS12 · DS12A · DS12B · 3 MODELS

DS12 12″ BENCH DISC SANDERS



MODEL DS12 · DS12A 12″ DISC SANDER WITH TWO TABLES

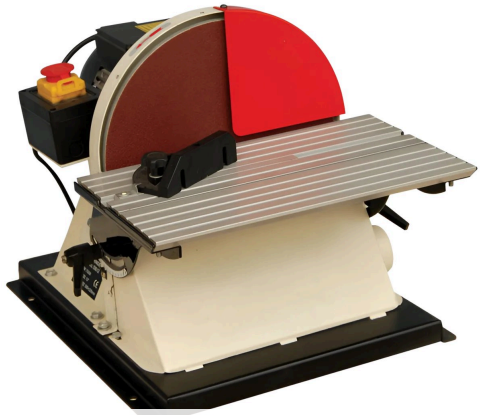

DS12B 12″ bench disc sander with tilting table

12″ disc

Bench disc sanders with a 12″ disc at 1,725 rpm: the DS12 with a 17.6 × 6.1″ table and 3/4 HP, the DS12A with two tables and the DS12B with a 15.7 × 8.9″ table, 1 HP.

STANDARD FEATURES

- ✓ 12″ (304 mm) disc, 1,725 rpm at 60 Hz
- ✓ 3/4 HP (DS12) or 1 HP (DS12A, DS12B)
- ✓ DS12A: two tables

OPTIONAL EQUIPMENT

DS12 · DS12A · DS12B — TECHNICAL SPECIFICATIONS

Model	DS12	DS12A	DS12B
Disc diameter	12″ (304 mm)	12″ (304 mm)	12″ (304 mm)
Table size	17.6 × 6.1″ (446 × 156 mm)	15.7 × 8.9″ (400 × 225 mm), two tables	15.7 × 8.9″ (400 × 225 mm)
Motor	3/4 HP (550 W)	1 HP (750 W)	1 HP (750 W)
Disc speed	1,725 rpm at 60 Hz (1,450 rpm at 50 Hz)	1,725 rpm at 60 Hz (1,450 rpm at 50 Hz)	1,725 rpm at 60 Hz (1,450 rpm at 50 Hz)
Packing size L × W × H	18 × 17 × 17″ (46 × 43 × 43 cm)	26 × 19 × 17″ (66 × 47 × 44 cm)	20 × 19 × 17″ (51 × 47 × 44 cm)
Weight	75 lb (34 kg)	84 lb (38 kg)	66 lb (30 kg)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BG-8 – BG-60A · 4 MODELS


BG-8 · BG-10 BENCH GRINDERS AND BG-60 WIRE-WHEEL DEBURRING MACHINES



MODEL BENCH · BG-8 8″ BENCH GRINDER WITH EYE SHIELDS



BG-60 wire-wheel deburring and polishing machine



BG-60A 3 HP wire-wheel deburring machine

8″ and 10″ wheels

Heavy cast-iron bench grinders with 8 × 1″ and 10 × 1″ wheels, and the BG-60 deburring and polishing machines with a 10″ steel wire wheel 2-3/8″ wide — two speeds (1,680 / 3,400 rpm at 60 Hz) on the BG-60, 3 HP on the BG-60A.

STANDARD FEATURES

- ✓ BG-8: 8 × 1″ wheels, 3/4 HP; BG-10: 10 × 1″ wheels, 1 HP
- ✓ Heavy-duty cast-iron construction
- ✓ BG-60 / BG-60A: Ø10 × 2-3/8″ wire wheel, 0.012″ wire, 2 – 3 HP

OPTIONAL EQUIPMENT

BG-8 · BG-10 — TECHNICAL SPECIFICATIONS

Model	BG-8	BG-10
Wheel size	**8 × 1″ (200 × 25 mm)**	**10 × 1″ (250 × 25 mm)**
Motor	**3/4 HP (550 W)**	**1 HP**
Arbor	5/8″ (15.88 mm)	0.7″ (18 mm)
Wheel grit	**36 / 60**	**46 / 60**
Packing size L × W × H	19 × 15 × 15″ (48 × 37 × 37 cm)	15 × 14 × 19″ (37 × 35 × 48 cm)
Weight	**64 lb (29 kg)**	**73 lb (33 kg)**

TECHNICAL SPECIFICATIONS

BG-8 · BG-10 BENCH GRINDERS AND BG-60 WIRE-WHEEL DEBURRING MACHINES

BG-60 · BG-60A

Wire-wheel deburring and polishing machines, 10" wheel

Model	BG-60	BG-60A
Wheel size	**Ø10 × 2-3/8" (250 × 60 mm), 2" (50 mm) bore**	**Ø10 × 2-3/8" (250 × 60 mm), 2" (50 mm) bore**
Steel wire diameter	0.012" (0.3 mm)	0.012" (0.3 mm)
Wheel speed	**1,680 / 3,400 rpm at 60 Hz (1,400 / 2,800 at 50 Hz)**	**1,680 rpm at 60 Hz (1,400 at 50 Hz)**
Motor	**2 / 3 HP (1.5 / 2.2 kW), two-speed**	**3 HP (2.2 kW)**
Packing size L × W × H	18 × 20 × 24" (45 × 51 × 61 cm)	17 × 16 × 16" (44 × 41 × 41 cm)
Weight	**84 lb (38 kg)**	**82 lb (37 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

MD-380A · MD-380B · 2 MODELS

MD-380A · MD-380B END-SURFACE GRINDERS



MODEL MD-380 · MD-380A / MD-380B END-SURFACE GRINDING MACHINE

Parts to 11" high

End-surface grinding machines of Italian design that grind the faces of parts flat: a Ø7-7/8" wheel on a 4 HP electro-spindle, 0.0004" vertical increments, coolant, and either a fixed 15.2 × 7" table (MD-380A) or a Ø15.7" rotary table (MD-380B); parts up to 11" high.

STANDARD FEATURES

- Ø7-7/8" grinding wheel at 2,800 rpm on a 4 HP electro-spindle
- Grinding height to 11" (280 mm); 0.0004" (0.01 mm) increments
- MD-380A fixed table; MD-380B Ø15.7" rotary table; magnetic chuck optional
- Coolant system; 68 dB

OPTIONAL EQUIPMENT

MD-380A · MD-380B — TECHNICAL SPECIFICATIONS


Model	MD-380A	MD-380B
Table	**Fixed, 15.2 × 7" (386 × 177 mm)**	**Rotary, Ø15.7" (400 mm)**
Grinding height, max	**11" (280 mm)**	**11" (280 mm)**
Vertical increment	0.0004" (0.01 mm)	0.0004" (0.01 mm)
Grinding wheel	Ø7-7/8 × 3-1/16", 3-1/16" bore (200 × 78 × 78 mm), 2,800 rpm	Ø7-7/8 × 3-1/16", 3-1/16" bore (200 × 78 × 78 mm), 2,800 rpm
Spindle motor	**4 HP electro-spindle**	**4 HP electro-spindle**
Coolant	0.12 HP pump, 5.3 US gal (20 L) tank	0.12 HP pump, 5.3 US gal (20 L) tank
Noise level, max	68 dB	68 dB
Machine size L × W × H	49 × 37 × 71" (1,250 × 950 × 1,800 mm)	49 × 37 × 71" (1,250 × 950 × 1,800 mm)
Packing size L × W × H	56 × 42 × 75" (143 × 107 × 191 cm)	61 × 42 × 75" (156 × 106 × 191 cm)
Weight	**1,521 lb (690 kg)**	**1,698 lb (770 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DVS14 · DC650 · 2 MODELS

DVS14 · DC650 METAL DUST COLLECTORS

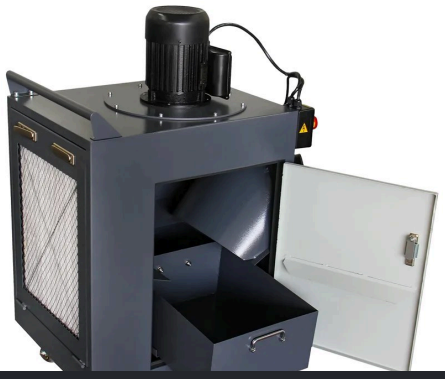

MODEL DUST · DC650 METAL DUST COLLECTOR WITH THREE-STAGE FILTRATION AND DUST DRAWER



DVS14 metal dust collector with cyclone separation

494 – 650 CFM

Dust collectors for grinding and sanding metal: the DVS14 moves 494 CFM through a cyclone and a panel filter with a pull-out tray; the DC650 filters 650 CFM in three stages down to 1 micron, connects two machines at once through two 4" inlets and drops the dust into a removable drawer. For metal dust only — never mix wood dust with metal sparks.

STANDARD FEATURES

- DVS14: 494 CFM; cyclone separation and panel filter; pull-out tray; 3/4 HP
- DC650: 650 CFM; 30-, 5- and 1-micron filter stages; 1.5 HP single-phase
- Two Ø4" inlets on the DC650 — two machines at a time
- Casters; removable clean-out drawer

OPTIONAL EQUIPMENT

DVS14 · DC650 — TECHNICAL SPECIFICATIONS

Model	DVS14	DC650
Airflow	494 CFM (14 m³/min)	650 CFM
Filtration	Panel filter 12 × 16 × 1" (305 × 405 × 25 mm); cyclone separation	Three stages: 30-micron stainless steel, 5-micron activated carbon, 1-micron pleated filter
Inlets	One hose 3 × 59" (75 × 1,500 mm)	Two Ø4" (100 mm) — two machines at a time
Motor	3/4 HP (0.55 kW)	1.5 HP (1.1 kW), single-phase
Dust drawer	Pull-out tray	1.06 cu ft (30 L)
Sound level	—	82 dB
Packing size L × W × H	36 × 23 × 33" (92 × 59 × 85 cm)	32 × 24 × 46" (81 × 62 × 116 cm)
Weight	148 lb (67 kg)	198 lb (90 kg)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BFM-2560 · WD-1800 · 2 MODELS

BFM-2560 WIDE-BELT DEBURRING MACHINE, 24", AND WD-1800 WET DUST COLLECTOR



MODEL BFM-2560 · BFM-2560 WIDE-BELT FINISHING AND DEBURRING MACHINE, 24" WORKING WIDTH



WD-1800 stainless-steel wet dust collector for metal grinding dust

24" working width

An entry-level wide-belt machine for deburring and finishing laser-cut, punched and sheared parts: a 25 × 60" abrasive belt over a 24" working width, parts from 0.04 to 6" thick on a heat-resistant conveyor with variable speed, the table height set digitally in mm or inch on four synchronized posts, electric-eye belt tracking and a 6" dust hood. The WD-1800 stainless-steel wet collector keeps the grinding dust from becoming a fire hazard.

STANDARD FEATURES

- 24" (600 mm) working width; parts 0.04 – 6" thick, from 12" long
- 25 × 60" abrasive belt; 10 HP main motor
- Conveyor 6.6 – 30 ft/min, variable
- Digital table height; four-post synchronous lifting; electric-eye belt tracking
- WD-1800: 2,100 CFM stainless-steel wet dust collector, 5 HP

OPTIONAL EQUIPMENT

BFM-2560 — TECHNICAL SPECIFICATIONS

Model	BFM-2560
Working width, max	**24" (600 mm)**
Workpiece thickness	**0.04 – 6" (1 – 156 mm)**
Workpiece length, min	12" (300 mm)
Abrasive belt	25 × 60" (635 × 1,520 mm)
Feed speed	**7 / 30 ft/min (2 / 9 m/min)**
Dust extraction air flow	1,766 CFM (3,000 m^3/h); 6" (Ø152 mm) hood outlet
Main motor	**10 HP (7.5 kW)**
Packing size L × W × H	70 × 59 × 80" (177 × 150 × 204 cm)
Weight	**2,105 lb (955 kg)**

TECHNICAL SPECIFICATIONS

BFM-2560 WIDE-BELT DEBURRING MACHINE, 24", AND WD-1800 WET DUST COLLECTOR

WD-1800

Stainless-steel wet dust collector for metal grinding dust

Model	WD-1800
Air flow	**2,100 CFM**
Motor	**5 HP (3.7 kW)**
Packing size L × W × H	48 × 39 × 83" (122 × 100 × 210 cm)
Weight	**573 lb (260 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

MGM-300 · 1 MODEL

MGM-300 FINISHING AND DEBURRING MACHINE, 12″ WORKING WIDTH



MODEL MGM-300 · MGM-300 FINISHING AND DEBURRING MACHINE, 12″ WORKING WIDTH

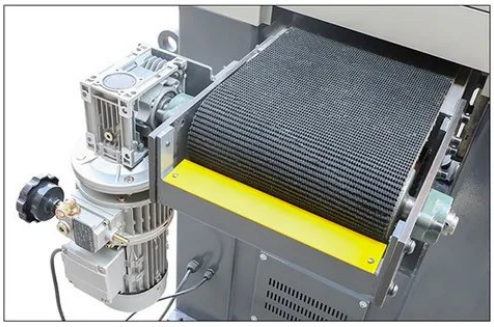

Conveyor drive and abrasive belt of the MGM-300

12″ working width

A compact finishing machine for small laser-cut, punched and machined parts: a 12 × 41″ abrasive belt over a 12″ working width, parts from 0.04 to 7-7/8″ thick on a conveyor with variable speed from 4.9 to 23 ft/min, the table height set digitally in mm or inch on four synchronized posts, electric-eye belt tracking and a 4″ dust extraction port.

STANDARD FEATURES

- 12″ (300 mm) working width; parts 0.04 – 7-7/8″ (1 – 200 mm) thick
- Abrasive belt 12 × 41″ (310 × 1,040 mm); rubber contact roller
- Conveyor 4.9 – 23 ft/min (1.5 – 7 m/min), variable
- Digital table height; four-post synchronous lifting; electric-eye belt tracking
- 4″ dust port; 5.4 HP (4 kW); 1,190 lb

OPTIONAL EQUIPMENT

MGM-300 — TECHNICAL SPECIFICATIONS

Model	MGM-300
Working width, max	**12″ (300 mm)**
Workpiece thickness	**0.04 – 7-7/8″ (1 – 200 mm)**
Abrasive belt	12 × 41″ (310 × 1,040 mm); electric-eye belt tracking
Feed speed	**4.9 – 23 ft/min (1.5 – 7 m/min), variable**
Contact roller	Rubber, Ø4-1/4 × 12-1/2″ (110 × 320 mm)
Table height	Digital, mm / inch; four synchronized lifting posts
Dust extraction	4″ (Ø100 mm) vacuum hose connection
Main motor	**5.5 HP (4 kW)**
Packing size L × W × H	39 × 63 × 70″ (100 × 160 × 178 cm)
Weight	**1,190 lb (540 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

R-630 – R-R-R1300 · 6 MODELS + DUST COLLECTOR

R SERIES DRY DEBURRING AND FINISHING SANDERS, 1 – 3 HEADS, 24.8″ AND 51.2″ WIDE



MODEL R · R-R1300 TWO-HEAD DRY DEBURRING AND FINISHING SANDER WITH ITS DUST COLLECTOR



One sanding head with its belt-tension cylinder



Two sanding heads, one behind the other

24.8″ and 51.2″ wide, 1 – 3 heads

Dry wide-belt sanders that take the burrs, slag and rust off laser-, plasma- and flame-cut, sheared, punched and machined steel and aluminum plate in one pass — one side at a time, all round — for pre-grinding the surface, deburring holes and edges and brushed (hairline) finishing, without the dust and the uneven results of hand grinding. Two widths with one, two or three sanding heads: the 630 series for parts up to 24.8″ wide and the 1300 series for parts to 51.2″, both for parts from 0.04 to 4.3″ thick, with a dry dust collector.

STANDARD FEATURES

- 630 series: 24.8″ (630 mm) wide, 1 – 3 heads of 10 HP (7.5 kW), parts from 10.2″ long
- 1300 series: 51.2″ (1,300 mm) wide, 1 – 3 heads of 25 HP (18.5 kW), 52 × 87″ belts, conveyor 6.6 – 82 ft/min by VFD
- Parts 0.04 – 4.3″ (1 – 110 mm) thick; motorized table lifting
- Dry dust collector, 600 V with CSA, UL and RU-listed components
- Deburring holes and edges, removing slag and rust, pre-grinding and brushed finishing

OPTIONAL EQUIPMENT

R-630 · R-R630 · R-R-R630 — TECHNICAL SPECIFICATIONS

Model	R-630	R-R630	R-R-R630
Sanding heads	1	2	3
Working width, max	Under 24.8″ (630 mm)	Under 24.8″ (630 mm)	Under 24.8″ (630 mm)
Workpiece thickness	0.04 – 4.3″ (1 – 110 mm)	0.04 – 4.3″ (1 – 110 mm)	0.04 – 4.3″ (1 – 110 mm)
Workpiece length, min	Over 10.2″ (260 mm)	Over 10.2″ (260 mm)	Over 10.2″ (260 mm)
1st sanding motor	10 HP (7.5 kW), 4-pole, copper-wound	10 HP (7.5 kW), 4-pole, copper-wound	10 HP (7.5 kW), 4-pole, copper-wound
2nd sanding motor	—	10 HP (7.5 kW), 4-pole, copper-wound	10 HP (7.5 kW), 4-pole, copper-wound
3rd sanding motor	—	—	10 HP (7.5 kW), 4-pole
Conveyor motor	1.5 HP (1.1 kW), stepless speed, copper-wound	1.5 HP (1.1 kW), stepless speed, copper-wound	2 HP (1.5 kW), stepless speed, copper-wound
Table lifting motor	1/2 HP (0.37 kW), copper-wound	1/2 HP (0.37 kW), copper-wound	1/2 HP (0.37 kW), copper-wound
Weight	1,984 lb (900 kg)	2,646 lb (1,200 kg)	3,968 lb (1,800 kg)

DETAILS, COMPONENTS AND OPTIONS

R SERIES DRY DEBURRING AND FINISHING SANDERS, 1 – 3 HEADS, 24.8″ AND 51.2″ WIDE



Three sanding heads with their belt-tension and tracking units



Electrical cabinet with the conveyor's variable-frequency drive



Laser-cut frames after sanding (left) and before (right)



Machined steel part, the left half sanded

TECHNICAL SPECIFICATIONS

R SERIES DRY DEBURRING AND FINISHING SANDERS, 1 – 3 HEADS, 24.8″ AND 51.2″ WIDE

R-1300 · R-R1300 · R-R-R1300

1300 series heavy-duty metal sanders, 1 – 3 heads

Model	R-1300	R-R1300	R-R-R1300
Sanding heads	1	2	3
Working width, max	**51.2″ (1,300 mm)**	**51.2″ (1,300 mm)**	**51.2″ (1,300 mm)**
Workpiece thickness max	**4.3″ (110 mm)**	**4.3″ (110 mm)**	**4.3″ (110 mm)**
Workpiece length, min	Over 13.8″ (350 mm)	Over 13.8″ (350 mm)	Over 13.8″ (350 mm)
Sanding rollers	Ø8.3″ (210 mm) rubber × 1	Ø8.3″ (210 mm) rubber × 2	Ø8.3″ (210 mm) rubber × 3
Conveyor speed	6.6 – 82 ft/min (2 – 25 m/min)	6.6 – 82 ft/min (2 – 25 m/min)	6.6 – 82 ft/min (2 – 25 m/min)
Sanding motors	25 HP (18.5 kW)	2 × 25 HP (2 × 18.5 kW)	3 × 25 HP (3 × 18.5 kW)
Conveyor motor hypoid gearmotor	3 HP (2.2 kW), VFD speed control	5.5 HP (4 kW), VFD speed control	5.5 HP (4 kW), VFD speed control
Total motor power	36 HP (27 kW)	56 HP (42 kW)	80 HP (60 kW)
Working air pressure	116 psi (0.8 MPa)	116 psi (0.8 MPa)	116 psi (0.8 MPa)
Abrasive belt	52 × 87″ (1,320 × 2,200 mm)	52 × 87″ (1,320 × 2,200 mm)	52 × 87″ (1,320 × 2,200 mm)
Dimensions L × W × H	80.7 × 63 × 92.5″ (2,050 × 1,600 × 2,350 mm)	80.7 × 86.6 × 92.5″ (2,050 × 2,200 × 2,350 mm)	80.7 × 102.4 × 92.5″ (2,050 × 2,600 × 2,350 mm)
Weight	**4,189 lb (1,900 kg)**	**6,173 lb (2,800 kg)**	**8,818 lb (4,000 kg)**

DUST COLLECTOR

Dry dust collector for the sanders

Model	Dust collector
Motor	**1.5 HP (1.1 kW) or 3 HP (2.2 kW); full-load current 6 / 9 A**
Power supply	600 V 60 Hz 3-phase; CSA, UL and RU-listed electrical components
Packing size L × W × H	38 × 24 × 72″ (97 × 62 × 184 cm)
Weight gross	**602 lb (273 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee in-stock machines only
- ✓ Spare parts & technical support readily available in Canada
- ✓ Order today with just 10% down 0% down financing available
- ✓ Installation and training available

YQ-900 · YQ-1200 · YQ-1500 · 3 MODELS

YQ HORIZONTAL CORNER GRINDING MACHINES FOR BOX WELD SEAMS, EDGES TO 35.4 – 59.1”



MODEL YQ · YQ HORIZONTAL CORNER GRINDING MACHINE WITH ITS CONTROL CABINET AND FOOT PEDAL

Edges to 35.4 – 59.1”

Grinds and polishes the corner weld seams and weld marks on square boxes — water tanks, battery boxes and other box-shaped parts — and grinds and polishes the R corner: the box lies on the table and the belt travels the edge at 0 – 236 in/min. Three lengths for edges up to 35.4, 47.2 or 59.1”, a 4 × 83” abrasive belt and 4 HP in total; the machine is run from a separate control cabinet with a touch screen.

STANDARD FEATURES

- Edges up to 35.4” (YQ-900), 47.2” (YQ-1200) or 59.1” (YQ-1500)
- Grinding speed 0 – 236 in/min (0 – 100 mm/s)
- Abrasive belt 4 × 83” (100 × 2,100 mm); 4 HP (3 kW) in total
- Corner weld seams and weld marks ground and polished; R corners on water tanks and battery boxes
- Separate control cabinet with touch screen; foot pedal

OPTIONAL EQUIPMENT

YQ-900 · YQ-1200 · YQ-1500 — TECHNICAL SPECIFICATIONS

Model	YQ-900	YQ-1200	YQ-1500
Processing length, max	**35.4” (900 mm)**	**47.2” (1,200 mm)**	**59.1” (1,500 mm)**
Total power	**4 HP (3 kW)**	**4 HP (3 kW)**	**4 HP (3 kW)**
Grinding speed	**0 – 236 in/min (0 – 100 mm/s)**	**0 – 236 in/min (0 – 100 mm/s)**	**0 – 236 in/min (0 – 100 mm/s)**
Abrasive belt	4 × 83” (100 × 2,100 mm)	4 × 83” (100 × 2,100 mm)	4 × 83” (100 × 2,100 mm)
Ambient temperature	5 – 113 °F (–15 – 45 °C)	5 – 113 °F (–15 – 45 °C)	5 – 113 °F (–15 – 45 °C)
Power supply	3-phase, 600 V 60 Hz in Canada (factory standard 380 V ±5 %, 50 Hz)	3-phase, 600 V 60 Hz in Canada (factory standard 380 V ±5 %, 50 Hz)	3-phase, 600 V 60 Hz in Canada (factory standard 380 V ±5 %, 50 Hz)
Weight	**937 lb (425 kg)**	**1,069 lb (485 kg)**	**1,444 lb (655 kg)**
Dimensions L × W × H	53.1 × 61.8 × 45.7” (1,350 × 1,570 × 1,160 mm)	65 × 61.8 × 45.7” (1,650 × 1,570 × 1,160 mm)	80.7 × 61.8 × 45.7” (2,050 × 1,570 × 1,160 mm)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

YQ-450 · 1 MODEL

YQ-450 VERTICAL CORNER GRINDING AND POLISHING MACHINE, CORNERS TO 17.7" HIGH



MODEL YQ-450 · YQ-450 VERTICAL CORNER GRINDING AND POLISHING MACHINE

Corners to 17.7" high

The vertical machine grinds and polishes the corner of a box from the side, for corners up to 17.7" high: the belt head swings on a 180 W motor with adjustable speed, the part rests on the work table against its fence, and the machine is controlled from a separate electrical cabinet.

STANDARD FEATURES

- ✓ Corners up to 17.7" (450 mm) high
- ✓ Swinging belt head: 180 W motor, adjustable speed
- ✓ Separate electrical cabinet; hard-wired power connection

OPTIONAL EQUIPMENT

YQ-450 — TECHNICAL SPECIFICATIONS

Model	YQ-450
Processing height, max	**17.7" (450 mm)**
Swing motor	**180 W (1/4 HP) × 1, adjustable speed**
Power connection	Hard-wired
Control	From a separate electrical cabinet
Packing size L × W × H	71 × 35 × 54" (181 × 89 × 136 cm)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

CMD-4 - DM5A · 4 MODELS

CMD-4 · CMD-80 EDGE CHAMFERING MACHINES AND DM5 HAND CHAMFERING TOOLS



MODEL CHAMFERING · CMD-80 EDGE CHAMFERING MACHINE FOR 15 - 45° WELD PREPS



CMD-4 bench chamfering machine



DM5 compact chamfering unit, 3/16" at 45°

Chamfers to 1/4"

Edge chamfering machines that put a 15 – 45° weld prep or a clean deburred edge on plate, strip and parts: the CMD-80 cuts chamfers up to 1/4" (6 mm) from 1.5 HP, the CMD-4 up to 5/32", and the compact DM5 units 3/16" at 45°.

STANDARD FEATURES

- ✓ CMD-80: chamfers 0 – 1/4" (6 mm) at 15 – 45°, 1.5 HP
- ✓ CMD-4: chamfers 0 – 5/32" (4 mm) at 15 – 45°
- ✓ DM5 / DM5A: compact units, 45° chamfers to 3/16" (5 mm), 20 lb

OPTIONAL EQUIPMENT

CMD-4 · CMD-80 · DM5 · DM5A — TECHNICAL SPECIFICATIONS

Model	CMD-4	CMD-80	DM5	DM5A
Chamfer size	**0 – 5/32" (0 – 4 mm)**	**0 – 1/4" (0 – 6 mm)**	**0 – 3/16" (0 – 5 mm)**	**0 – 3/16" (0 – 5 mm)**
Chamfer angle	**15 – 45°**	**15 – 45°**	**45°**	**45°**
Motor	**1/2 HP (0.375 kW)**	**1.5 HP (1.1 kW)**	**1/2 HP (370 W)**	**1/3 HP (250 W)**
Motor speed	2,800 rpm	2,800 rpm	0 – 4,300 rpm	2,800 rpm
Packing size L × W × H	22 × 16 × 19" (56 × 40 × 48 cm)	23 × 19 × 23" (59 × 48 × 58 cm)	13 × 13 × 9" (34 × 34 × 23 cm)	13 × 13 × 9" (34 × 34 × 23 cm)
Weight	**62 lb (28 kg)**	**146 lb (66 kg)**	**20 lb (9 kg)**	**20 lb (9 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

CMD-4 · CMD-80 EDGE CHAMFERING MACHINES AND DM5 HAND CHAMFERING TOOLS



DM5A compact chamfering unit with the table set for 45°

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.