NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH VALUE LINE · BUILT IN CHINA TO NORTH AMERICAN STANDARDS · SOLD & SERVICED IN CANADA BY NOVOTECH

HYDRAULIC PRESS BRAKES

CNC PRESS BRAKES 55 – 331 US TONS · HEAVY-DUTY AND TANDEM TO 1,323 TONS · NC TORSION-BAR PRESS BRAKES 33 – 441 TONS







China
MADE IN CHINA

6
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

VALUE-LINE HYDRAULIC PRESS BRAKES

CONTENTS

CNC HYDRAULIC PRESS BRAKES

Compact CNC hydraulic press brakes, 55 US tons × 4.3 and 5.2 ft WAD-50T/1300 · WAD-50T/1600 · 2 models 04

CNC hydraulic press brakes, 55 – 331 US tons × 4 – 20 ft WAD-50T/1300 – WAD-300T/6000 · 25 models 08

Heavy-duty CNC press brakes, 441 – 1,323 US tons × 13 – 26 ft, and tandems WAD-400T/4000 – WAD-1200T/8000 · 21 models · tandem to 60 ft 16

NC HYDRAULIC PRESS BRAKES — TORSION BAR

Compact NC hydraulic press brake, 33 US tons × 5.2 ft — torsion bar WC67K-30T/1600 · 1 model 21

NC hydraulic press brakes, 33 – 441 US tons × 5 – 20 ft — torsion bar WC67K-30t/1600 – WC67K/E-400T/6000 · 34 models 24

HYDRAULIC BENDING BRAKES

HBV hydraulic bending brakes, 5/32″ × 24 – 48″, 3/16″ × 49″ and 1/8″ × 100″ HBV24 – HBV-2540 · 4 models 29

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR VALUE-LINE HYDRAULIC PRESS BRAKES

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Built in China to North American standards
- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee
  in-stock machines only
- Spare parts & technical support
  readily available in Canada
- Order today with just 10% down
  0% down financing available
- Installation and training available

NOVOTECH VALUE LINE

CNC AND NC PRESS BRAKES AT A PRICE A SMALL SHOP CAN JUSTIFY

NovoTech's value line is our own brand: machines built in China to our specification with European and Japanese controls and hydraulics — Delem, Estun, Schneider, Siemens, NOK — inspected before they ship and sold under NovoTech's name with the same CSA-approved panel, 1-year warranty and parts and technical support from Mississauga, Ontario, Canada, as every machine we sell.

The CNC press brakes in this catalogue use electro-hydraulic servo synchronisation with proportional servo valves and linear scales, a servo-driven pump that runs only while the ram moves, a Delem DA-53T control and a servo back gauge on ball screws — the architecture of the European machines, from 55 to 331 US tons over 4 to 20 ft, with heavy-duty and tandem machines to 1,323 tons and 26 ft. The NC press brakes keep the two cylinders in step with a torsion bar and set the depth on mechanical stops, with an Estun E21 control for the back gauge and 40 stored programs: the simple, rugged brake for brackets, boxes, channels and roofing, from 33 to 441 tons.

WAD-50T/1300 · WAD-50T/1600 · 2 MODELS

COMPACT CNC HYDRAULIC PRESS BRAKES, 55 US TONS × 4.3 AND 5.2 FT



MODEL COMPACT · NOVOTECH WAD-50T/1600 COMPACT CNC PRESS BRAKE, 55 US TONS × 5.2 FT, WITH DELEM CONTROL



NovoTech WAD-50T/1300 compact CNC press brake, 55 US tons × 4.3 ft



Segmented top-tool holders with the quick-release clamps of the compact CNC press brake

55 US tons × 4.3 / 5.2 ft · 4 axes · Delem DA-53Tx · 7,700 lb · servo pump

The two smallest WAD machines are the value line's compact CNC press brakes: 50 metric tons (55 US tons) over 1,300 or 1,600 mm (4.3 and 5.2 ft), 44 or 51" between the frames, a 9.8" throat, 5.9" stroke and 18.1" daylight, on a 69 – 85 × 59" footprint at 7,700 lb. The same electro-hydraulic servo architecture as the big machines — servo valves, linear scales on both sides, a servo-driven pump that only runs while the ram moves, Y1-Y2-X-R axes and the 15" Delem DA-53Tx — with a sectioned punch set and a 2-V die in the crate. Mild steel to 1/8" (3 mm) over the full length and 5/32" (4 mm) over 4.3 ft; stainless to 3/32". For enclosures, HVAC fittings, brackets and small-part production where a 10 ft machine would stand idle — and the lowest-priced real CNC press brake NovoTech sells.

STANDARD FEATURES


- ✓ Mild steel to 1/8" (3 mm) over the full length and 5/32" (4 mm) over 4.3 ft (V = 8 × thickness); 44 / 51" (1,120 / 1,300 mm) between the frames
- ✓ 9.8" (250 mm) throat, 5.9" (150 mm) stroke, 18.1" (460 mm) daylight; 19.7" (500 mm) X back gauge travel
- ✓ 4.4 kW (6 HP) servo main motor on a 13 cc pump — the quietest and most frugal CNC brake in the range
- ✓ Delem DA-53Tx 15" touch-screen CNC control; 4 axes — Y1, Y2 (independent ram cylinders), X and R back gauge
- ✓ Welded mono-block frame of high-yield steel, designed by finite-element analysis and stress-relieved by heat treatment after welding, so it keeps its accuracy
- ✓ Electro-hydraulic servo synchronisation: proportional servo valves on one integrated manifold (few pipes, few leak points) and linear scales on both sides keep the ram parallel to the table — ± 0.01 mm ram repeatability
- ✓ Mild hybrid drive as standard: a servo motor and servo pump in place of the conventional motor and pump — the pump turns only while the ram moves and stops while the machine waits, loads or unloads: 40 – 60 % less energy, oil 18 – 36 °F (10 – 20 °C) cooler, much less noise for a quieter shop (about 60 dB, and silent while the ram waits), longer life for the pump, seals and valves
- ✓ Servo back gauge on ball screws and linear guides, ± 0.01 mm: one servo motor and a timing belt turn the X screws on both sides together; two large stop fingers with four positioning steps
- ✓ Motorised CNC crowning (V axis) on 110 t and up: the control works out how the ram and the table deflect and sets the crowning for each bend, for the same angle along the whole part
- ✓ Quick-release top-tool clamps — punches load and change from the front without tools; a segmented 2-V die and a sectioned punch set (42CrMo, HRC 47), each piece marked with its material and hardness
- ✓ Two front sheet support arms that slide on linear guides along the bed
- ✓ Schneider electrics, with spare parts available anywhere; Estun servo drives
- ✓ DSP laser finger protection under the punch (EN 12622 CAT 4 / SIL 3) with its safety PLC: the ram slows to bending speed just above the sheet, and sections of the beam can be muted for box bends
- ✓ Side guards, rear guard, anti-panic foot pedal with emergency stop on a movable stand
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Delem DA-58Tx (18.5" 2D graphic), DA-66S (24" 2D with 3D view) or DA-69S (24" 3D) control; ESA S840 or S875 W; Cybelec CybTouch 12
- + X-R-Z1-Z2 back gauge: the two fingers also move sideways along the beam under CNC (Z1, Z2)
- + X1-X2-R-Z1-Z2 back gauge: each finger also sets its own depth (X1, X2) — for tapered and stepped flanges
- + ATF X1-X2-R1-R2-Z1-Z2 back gauge: each finger tower moves in depth, height and sideways on its own; back gauge strokes to 39" (1,000 mm)
- + Sheet followers: CNC arms rise with the sheet through the bend, so large, thin sheets do not sag or whip back
- + Double-sided quick clamps for European-style punches with the 8.4 × 3.5 mm safety groove: front clamping for a vertical tool change, rear clamping to slide the punches out horizontally
- + Rolleri ROL200 PN POWER pneumatic clamping: vertical tool change from the front with full anti-fall safety for European (R1) punches; also in a hydraulic version
- + Wila hydraulic upper and lower tool clamping (New Standard): one push-button clamps and seats the punches and the dies — up to 80 % less tool-change time
- + Safety light curtain: stops the machine when anyone enters the guarded area
- + Automatic angle measurement
- + Segmented and special tooling: punch and die sections for boxes, acute- and obtuse-angle tools, designed from your part drawings
- + Hydraulic oil cooler; automatic lubrication
- + Tandem machines on one control; robot bending cells
- + Custom voltage: 208 V, 240 V or 480 V 3-phase

DETAILS, COMPONENTS AND OPTIONS · 1 / 2


COMPACT CNC HYDRAULIC PRESS BRAKES, 55 US TONS × 4.3 AND 5.2 FT

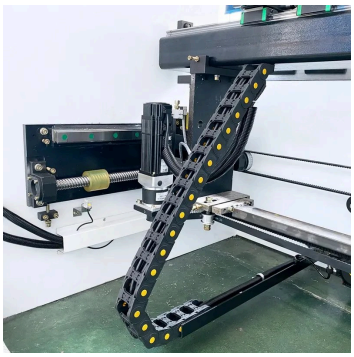

X-R back gauge of the compact CNC press brake on linear guides and ball screw, with the cable chain

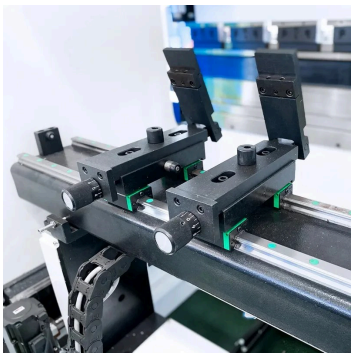

Back gauge fingers on linear guides with the four-step stops

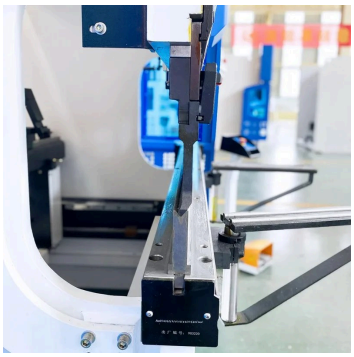


DSP laser finger-protection receiver on the compact CNC press brake




Servo motor of the back gauge axis




Back gauge drive with servo motor, ball screw and cable chain

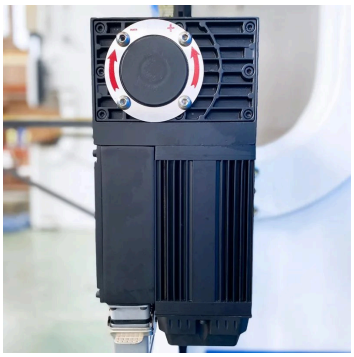

Servo main motor on the pump — the pump turns only while the ram moves

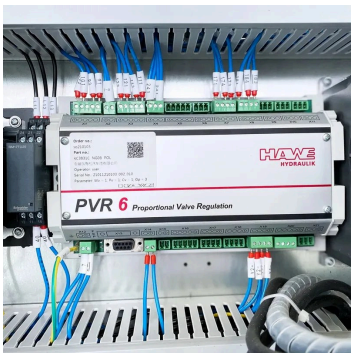

Proportional valve regulation in the electrical cabinet

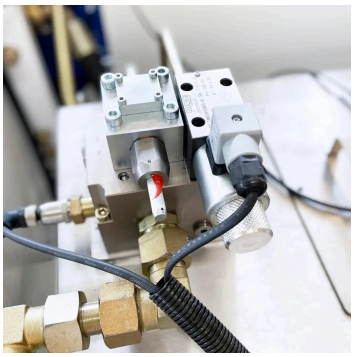

Hydraulic valve block with pressure gauge




Hydraulic unit with filter and pump motor of the compact CNC press brake

DETAILS, COMPONENTS AND OPTIONS · 2 / 2

COMPACT CNC HYDRAULIC PRESS BRAKES, 55 US TONS × 4.3 AND 5.2 FT



Compact CNC press brake from the rear: enclosed rear guard, electrical cabinet and hydraulic unit

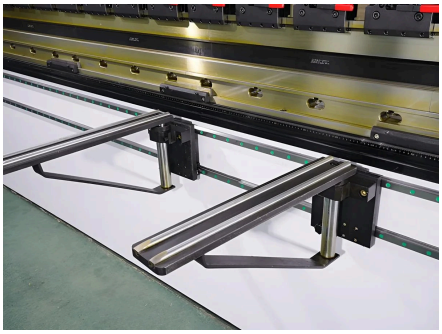

Front support arms on the linear rail of the compact CNC press brake




Back gauge beam and fingers seen from the rear of the compact CNC press brake



Electrical cabinet with Schneider components of the compact CNC press brake



Top-tool holders along the ram of the compact CNC press brake

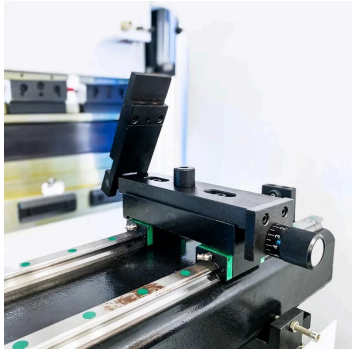

Two back gauge fingers on the linear guide of the compact CNC press brake

TECHNICAL SPECIFICATIONS

COMPACT CNC HYDRAULIC PRESS BRAKES, 55 US TONS × 4.3 AND 5.2 FT

COMPACT CNC PRESS BRAKES · 4.3 AND 5.2 FT

2 models · 55 US tons

Model	WAD-50T/1300	WAD-50T/1600
Bending force	**55 US tons (50 t)**	**55 US tons (50 t)**
Bending length	**4.3 ft · 51.2″ (1,300 mm)**	**5.2 ft · 63.0″ (1,600 mm)**
Distance between columns	44.1″ (1,120 mm)	51.2″ (1,300 mm)
Throat depth	9.8″ (250 mm)	9.8″ (250 mm)
Stroke	5.9″ (150 mm)	5.9″ (150 mm)
Daylight open height	18.1″ (460 mm)	18.1″ (460 mm)
Approach speed	6.30 in/s (160 mm/s)	6.30 in/s (160 mm/s)
Bending speed	0.51 in/s (13 mm/s)	0.71 in/s (18 mm/s)
Return speed	6.30 in/s (160 mm/s)	7.87 in/s (200 mm/s)
Back gauge X stroke · speed	19.7″ (500 mm) · 13.78 in/s (350 mm/s)	19.7″ (500 mm) · 15.75 in/s (400 mm/s)
Back gauge R stroke · speed	7.9″ (200 mm) · 7.87 in/s (200 mm/s)	7.9″ (200 mm) · 7.87 in/s (200 mm/s)
Servo main motor	5.9 HP (4.4 kW)	5.9 HP (4.4 kW)
Hydraulic oil tank	34 US gal (130 L)	34 US gal (130 L)
Dimensions L × W × H	69 × 59 × 92″ (1,750 × 1,500 × 2,330 mm)	85 × 59 × 92″ (2,150 × 1,500 × 2,330 mm)
Weight	7,716 lb (3,500 kg)	7,716 lb (3,500 kg)

Bending force in US tons (metric tons in brackets); the model number is the supplier's — metric tonnage × metric bending length. Capacities vary with the V-die opening, material and sheet length: check the bending chart or ask us for the tonnage your part needs. Dimensions are overall L (along the bed) × W × H with the standard front supports; weights are reference values.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

WAD-50T/1300 – WAD-300T/6000 · 25 MODELS

CNC HYDRAULIC PRESS BRAKES, 55 – 331 US TONS × 4 – 20 FT



MODEL CNC · NOVOTECH WAD 100T/3200 CNC HYDRAULIC PRESS BRAKE — 10 FT × 110 US TONS, FRONT VIEW WITH THE DELEM CONTROL ON ITS SWING ARM



WAD 100T/3200 CNC hydraulic press brake — front view with front support arms



WAD 110T/3200 CNC hydraulic press brake with the 2D graphic touchscreen control

The value-line CNC press brake: a welded, stress-relieved mono-block frame, electro-hydraulic servo synchronisation with servo valves and linear scales, a servo-driven pump that only runs while the ram moves, a Delem DA-53Tx control and a servo back gauge on ball screws — the same architecture as the European machines, built to a price that lets a small shop own a real CNC brake. Twenty-five models on one design, from 55 US tons × 4 ft to 331 US tons × 20 ft: the 110 and 135 t × 10 ft machines are the ones most Canadian shops ask for; from 170 t up the machines have 17.7 – 19.7″ throats, 7.9 – 9.8″ strokes and 18.9 – 22.4″ daylight for deep boxes, with 25 – 40 cc pumps and 13 – 21 kW servo main motors, and the 220 and 250 t × 13 ft bend 3/8″ plate the full length. Delem DA-53Tx with 4+1 axes, CNC crowning and DSP laser finger protection are standard; DA-58Tx, DA-66S / 69S controls, 6-axis back gauges, sheet followers and Wila clamping are options.

STANDARD FEATURES

- ✓ Delem DA-53Tx 15″ touch-screen CNC control; 4 axes — Y1, Y2 (independent ram cylinders), X and R back gauge
- ✓ Welded mono-block frame of high-yield steel, designed by finite-element analysis and stress-relieved by heat treatment after welding, so it keeps its accuracy
- ✓ Electro-hydraulic servo synchronisation: proportional servo valves on one integrated manifold (few pipes, few leak points) and linear scales on both sides keep the ram parallel to the table — ± 0.01 mm ram repeatability
- ✓ Mild hybrid drive as standard: a servo motor and servo pump in place of the conventional motor and pump — the pump turns only while the ram moves and stops while the machine waits, loads or unloads: 40 – 60 % less energy, oil 18 – 36 °F (10 – 20 °C) cooler, much less noise for a quieter shop (about 60 dB, and silent while the ram waits), longer life for the pump, seals and valves
- ✓ Servo back gauge on ball screws and linear guides, ± 0.01 mm: one servo motor and a timing belt turn the X screws on both sides together; two large stop fingers with four positioning steps
- ✓ Motorised CNC crowning (V axis) on 110 t and up: the control works out how the ram and the table deflect and sets the crowning for each bend, for the same angle along the whole part
- ✓ Quick-release top-tool clamps — punches load and change from the front without tools; a segmented 2-V die and a sectioned punch set (42CrMo, HRC 47), each piece marked with its material and hardness
- ✓ Two front sheet support arms that slide on linear guides along the bed
- ✓ Schneider electrics, with spare parts available anywhere; Estun servo drives
- ✓ DSP laser finger protection under the punch (EN 12622 CAT 4 / SIL 3) with its safety PLC: the ram slows to bending speed just above the sheet, and sections of the beam can be muted for box bends
- ✓ Side guards, rear guard, anti-panic foot pedal with emergency stop on a movable stand
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Delem DA-58Tx (18.5″ 2D graphic), DA-66S (24″ 2D with 3D view) or DA-69S (24″ 3D) control; ESA S840 or S875 W; Cybelec CybTouch 12
- + X-R-Z1-Z2 back gauge: the two fingers also move sideways along the beam under CNC (Z1, Z2)
- + X1-X2-R-Z1-Z2 back gauge: each finger also sets its own depth (X1, X2) — for tapered and stepped flanges
- + ATF X1-X2-R1-R2-Z1-Z2 back gauge: each finger tower moves in depth, height and sideways on its own; back gauge strokes to 39″ (1,000 mm)
- + Sheet followers: CNC arms rise with the sheet through the bend, so large, thin sheets do not sag or whip back
- + Double-sided quick clamps for European-style punches with the 8.4 × 3.5 mm safety groove: front clamping for a vertical tool change, rear clamping to slide the punches out horizontally
- + Rolleri ROL200 PN POWER pneumatic clamping: vertical tool change from the front with full anti-fall safety for European (R1) punches; also in a hydraulic version
- + Wila hydraulic upper and lower tool clamping (New Standard): one push-button clamps and seats the punches and the dies — up to 80 % less tool-change time
- + Safety light curtain: stops the machine when anyone enters the guarded area
- + Automatic angle measurement
- + Segmented and special tooling: punch and die sections for boxes, acute- and obtuse-angle tools, designed from your part drawings
- + Hydraulic oil cooler; automatic lubrication
- + Tandem machines on one control; robot bending cells
- + Custom voltage: 208 V, 240 V or 480 V 3-phase

DETAILS, COMPONENTS AND OPTIONS · 1 / 3

CNC HYDRAULIC PRESS BRAKES, 55 – 331 US TONS × 4 – 20 FT



WAD 110T/3200 CNC hydraulic press brake: 10 ft × 121 US tons, with the Delem DA-53Tx on its swing arm, the front support arms and the foot pedal




WAD 110T/3200 from the side: the Delem control on its swing arm, the hinged side guards and the electrical cabinet



Side frame of the WAD with the hinged side guard and its window



WAD 110T/3200 CNC press brake in a robot bending cell

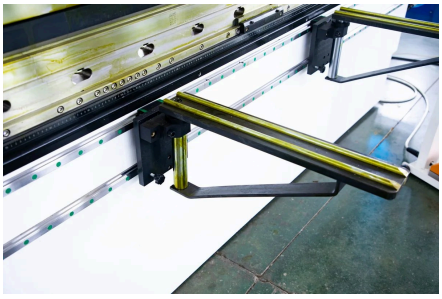

Front sheet support arm sliding on a linear rail along the bed



Foot pedal on a movable stand, with the emergency stop on top



4-axis CNC back gauge X-R-Z1-Z2, option: the fingers move in depth (X) and height (R), and each finger tower travels along the beam on its own (Z1, Z2) — ball screws, linear guides and servo drives




Back gauge from the rear: the beam with a stop finger on its linear rail, and the X-axis ball screw and linear guide that move it front to back




X-axis drive behind the frame: one servo motor and a timing belt turn the ball screws on both sides together, so the back gauge beam stays parallel

DETAILS, COMPONENTS AND OPTIONS · 2 / 3

CNC HYDRAULIC PRESS BRAKES, 55 – 331 US TONS × 4 – 20 FT

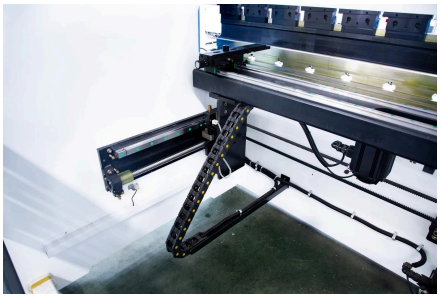

Back gauge from the side: the X-axis carriage on its ball screw and linear guide, with the cable chain that follows the beam

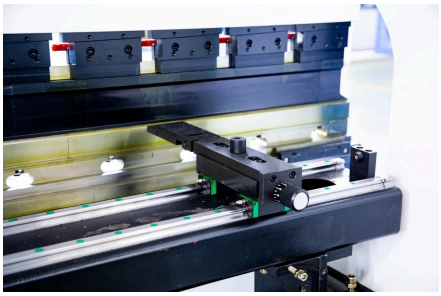

Back gauge stop finger: it slides along the beam on a linear rail and locks with the knob



Back gauge stop fingers on the X-R beam



European-style tool clamping along the ram with the light curtain at the side



Quick-release tool clamps — the punch changes without tools




DSP laser finger protection under the punch



Throat in the side frame: a flange can pass into it when the part is longer than the distance between the frames



Y1 and Y2 ram cylinders with the hydraulic blocks on top of the frame

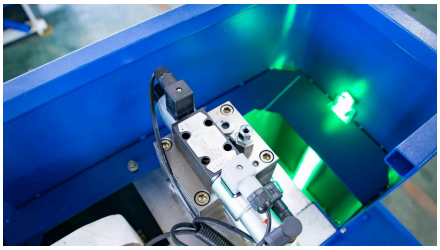

Valve block on top of a ram cylinder, inside the top cover

DETAILS, COMPONENTS AND OPTIONS · 3 / 3


CNC HYDRAULIC PRESS BRAKES, 55 – 331 US TONS × 4 – 20 FT



Servo motor and pump of the mild-hybrid drive, with the oil filter: the servo motor turns the pump only while the ram moves and stops it while the machine waits, loads or unloads — that is where the mild hybrid's gains come from: 40 – 60 % less energy, oil 18 – 36 °F (10 – 20 °C) cooler, a quieter shop (about 60 dB, silent while the ram waits) and longer life for the pump, seals and valves



Crowning motor at the end of the bed: the control sets the crowning wedges for each bend

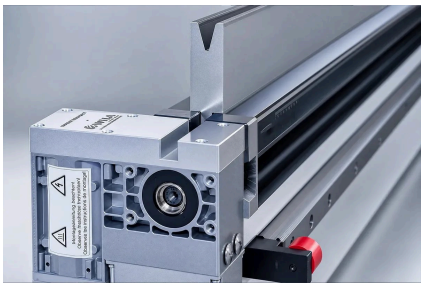

CNC motorised crowning: the motor and gearbox at the end of the table drive the crowning wedges under the die holder, and the control sets the crowning for every bend, for the same angle along the whole part



Electrical cabinet on the side of the machine, door open



CSA / UL approved electrical components — inside the cabinet: the main switch, the two servo drives of the back gauge axes and the drive of the main hydraulic motor

TECHNICAL SPECIFICATIONS · 1 / 4

CNC HYDRAULIC PRESS BRAKES, 55 – 331 US TONS × 4 – 20 FT

CNC HYDRAULIC PRESS BRAKES · 50 – 300 T

25 models · 55 – 331 US tons · 4 – 20 ft

Model	WAD-50T/1300	WAD-50T/1600	WAD-70T/2000	WAD-70T/2500	WAD-80T/2500	WAD-110T/3200	WAD-110T/4100	WAD-135T/3200	WAD-135T/4100	WAD-170T/3200	WAD-170T/4100	WAD-170T/5000	WAD-170T/6000
Bending force	**55 US tons (50 t)**	**55 US tons (50 t)**	**77 US tons (70 t)**	**77 US tons (70 t)**	**88 US tons (80 t)**	**121 US tons (110 t)**	**121 US tons (110 t)**	**149 US tons (135 t)**	**149 US tons (135 t)**	**187 US tons (170 t)**	**187 US tons (170 t)**	**187 US tons (170 t)**	**187 US tons (170 t)**
Bending length	**4.3 ft · 51.2" (1,300 mm)**	**5.2 ft · 63.0" (1,600 mm)**	**6.6 ft · 78.7" (2,000 mm)**	**8.2 ft · 98.4" (2,500 mm)**	**8.2 ft · 98.4" (2,500 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.5 ft · 161.4" (4,100 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.5 ft · 161.4" (4,100 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.5 ft · 161.4" (4,100 mm)**	**16.4 ft · 196.9" (5,000 mm)**	**19.7 ft · 236.2" (6,000 mm)**
Distance between columns	44.1" (1,120 mm)	51.2" (1,300 mm)	63.0" (1,600 mm)	80.7" (2,050 mm)	80.7" (2,050 mm)	106.3" (2,700 mm)	141.7" (3,600 mm)	106.3" (2,700 mm)	141.7" (3,600 mm)	106.3" (2,700 mm)	141.7" (3,600 mm)	157.5" (4,000 mm)	189.0" (4,800 mm)
Throat depth	9.8" (250 mm)	9.8" (250 mm)	11.8" (300 mm)	11.8" (300 mm)	11.8" (300 mm)	15.7" (400 mm)	15.7" (400 mm)	15.7" (400 mm)	15.7" (400 mm)	17.7" (450 mm)	17.7" (450 mm)	17.7" (450 mm)	17.7" (450 mm)
Stroke	5.9" (150 mm)	5.9" (150 mm)	5.9" (150 mm)	5.9" (150 mm)	5.9" (150 mm)	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)
Daylight open height	18.1" (460 mm)	18.1" (460 mm)	18.1" (460 mm)	18.1" (460 mm)	18.1" (460 mm)	18.9" (480 mm)	18.9" (480 mm)	18.9" (480 mm)	18.9" (480 mm)	18.9" (480 mm)	18.9" (480 mm)	18.9" (480 mm)	18.9" (480 mm)
Approach speed	6.30 in/s (160 mm/s)	6.30 in/s (160 mm/s)	8.66 in/s (220 mm/s)	8.66 in/s (220 mm/s)	8.66 in/s (220 mm/s)	8.66 in/s (220 mm/s)	8.66 in/s (220 mm/s)	8.66 in/s (220 mm/s)	8.66 in/s (220 mm/s)	6.30 in/s (160 mm/s)	6.30 in/s (160 mm/s)	6.30 in/s (160 mm/s)	6.30 in/s (160 mm/s)
Bending speed	0.51 in/s (13 mm/s)	0.71 in/s (18 mm/s)	0.51 in/s (13 mm/s)	0.59 in/s (15 mm/s)	0.47 in/s (12 mm/s)	0.47 in/s (12 mm/s)	0.47 in/s (12 mm/s)	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)
Return speed	6.30 in/s (160 mm/s)	7.87 in/s (200 mm/s)	6.30 in/s (160 mm/s)	7.87 in/s (200 mm/s)	5.71 in/s (145 mm/s)	6.30 in/s (160 mm/s)	6.30 in/s (160 mm/s)	5.12 in/s (130 mm/s)	5.12 in/s (130 mm/s)	3.94 in/s (100 mm/s)	3.94 in/s (100 mm/s)	3.94 in/s (100 mm/s)	3.94 in/s (100 mm/s)
Back gauge X stroke · speed	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 15.75 in/s (400 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 15.75 in/s (400 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)
Back gauge R stroke · speed	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)
Servo main motor	5.9 HP (4.4 kW)	5.9 HP (4.4 kW)	7.4 HP (5.5 kW)	7.4 HP (5.5 kW)	11.7 HP (8.7 kW)	14.5 HP (10.8 kW)	14.5 HP (10.8 kW)	14.5 HP (10.8 kW)	14.5 HP (10.8 kW)	17.7 HP (13.2 kW)	17.7 HP (13.2 kW)	17.7 HP (13.2 kW)	17.7 HP (13.2 kW)
Hydraulic oil tank	34 US gal (130 L)	34 US gal (130 L)	34 US gal (130 L)	34 US gal (130 L)	45 US gal (170 L)	45 US gal (170 L)	45 US gal (170 L)	45 US gal (170 L)	45 US gal (170 L)	79 US gal (300 L)	79 US gal (300 L)	79 US gal (300 L)	79 US gal (300 L)

TECHNICAL SPECIFICATIONS · 2 / 4

CNC HYDRAULIC PRESS BRAKES, 55 – 331 US TONS × 4 – 20 FT

CNC HYDRAULIC PRESS BRAKES · 50 – 300 T (CONTINUED)

25 models · 55 – 331 US tons · 4 – 20 ft

Model	WAD-50T/1300	WAD-50T/1600	WAD-70T/2000	WAD-70T/2500	WAD-80T/2500	WAD-110T/3200	WAD-110T/4100	WAD-135T/3200	WAD-135T/4100	WAD-170T/3200	WAD-170T/4100	WAD-170T/5000	WAD-170T/6000
Dimensions L × W × H	69 × 59 × 92″ (1,750 × 1,500 × 2,330 mm)	85 × 59 × 92″ (2,150 × 1,500 × 2,330 mm)	94 × 63 × 94″ (2,400 × 1,600 × 2,400 mm)	122 × 63 × 94″ (3,100 × 1,600 × 2,400 mm)	122 × 63 × 97″ (3,100 × 1,600 × 2,460 mm)	148 × 87 × 106″ (3,750 × 2,202 × 2,700 mm)	185 × 71 × 106″ (4,700 × 1,800 × 2,700 mm)	150 × 71 × 106″ (3,800 × 1,800 × 2,700 mm)	185 × 71 × 106″ (4,700 × 1,800 × 2,700 mm)	150 × 79 × 110″ (3,800 × 2,000 × 2,800 mm)	185 × 79 × 110″ (4,700 × 2,000 × 2,800 mm)	248 × 79 × 124″ (6,300 × 2,000 × 3,160 mm)	248 × 79 × 124″ (6,300 × 2,000 × 3,160 mm)
Weight	7,716 lb (3,500 kg)	7,716 lb (3,500 kg)	9,259 lb (4,200 kg)	9,700 lb (4,400 kg)	12,346 lb (5,600 kg)	16,535 lb (7,500 kg)	19,180 lb (8,700 kg)	19,401 lb (8,800 kg)	23,149 lb (10,500 kg)	23,810 lb (10,800 kg)	27,558 lb (12,500 kg)	29,542 lb (13,400 kg)	42,990 lb (19,500 kg)

TECHNICAL SPECIFICATIONS · 3 / 4

CNC HYDRAULIC PRESS BRAKES, 55 – 331 US TONS × 4 – 20 FT

CNC HYDRAULIC PRESS BRAKES · 50 – 300 T (CONTINUED)

25 models · 55 – 331 US tons · 4 – 20 ft

Model	WAD-220T/3200	WAD-220T/4100	WAD-220T/5000	WAD-220T/6000	WAD-250T/3200	WAD-250T/4000	WAD-250T/5000	WAD-250T/6000	WAD-300T/3200	WAD-300T/4000	WAD-300T/5000	WAD-300T/6000
Bending force	243 US tons (220 t)	243 US tons (220 t)	243 US tons (220 t)	243 US tons (220 t)	276 US tons (250 t)	276 US tons (250 t)	276 US tons (250 t)	276 US tons (250 t)	331 US tons (300 t)	331 US tons (300 t)	331 US tons (300 t)	331 US tons (300 t)
Bending length	10.5 ft · 126.0" (3,200 mm)	13.5 ft · 161.4" (4,100 mm)	16.4 ft · 196.9" (5,000 mm)	19.7 ft · 236.2" (6,000 mm)	10.5 ft · 126.0" (3,200 mm)	13.1 ft · 157.5" (4,000 mm)	16.4 ft · 196.9" (5,000 mm)	19.7 ft · 236.2" (6,000 mm)	10.5 ft · 126.0" (3,200 mm)	13.1 ft · 157.5" (4,000 mm)	16.4 ft · 196.9" (5,000 mm)	19.7 ft · 236.2" (6,000 mm)
Distance between columns	102.4" (2,600 mm)	141.7" (3,600 mm)	157.5" (4,000 mm)	189.0" (4,800 mm)	102.4" (2,600 mm)	122.0" (3,100 mm)	149.6" (3,800 mm)	189.0" (4,800 mm)	102.4" (2,600 mm)	122.0" (3,100 mm)	149.6" (3,800 mm)	189.0" (4,800 mm)
Throat depth	17.7" (450 mm)	17.7" (450 mm)	17.7" (450 mm)	17.7" (450 mm)	17.7" (450 mm)	17.7" (450 mm)	17.7" (450 mm)	17.7" (450 mm)	19.7" (500 mm)	19.7" (500 mm)	19.7" (500 mm)	19.7" (500 mm)
Stroke	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)	9.8" (250 mm)	9.8" (250 mm)	9.8" (250 mm)	9.8" (250 mm)	9.8" (250 mm)	9.8" (250 mm)	9.8" (250 mm)	9.8" (250 mm)
Daylight open height	18.9" (480 mm)	18.9" (480 mm)	18.9" (480 mm)	18.9" (480 mm)	21.3" (540 mm)	21.3" (540 mm)	21.3" (540 mm)	21.3" (540 mm)	22.4" (570 mm)	22.4" (570 mm)	22.4" (570 mm)	22.4" (570 mm)
Approach speed	6.30 in/s (160 mm/s)	6.30 in/s (160 mm/s)	6.30 in/s (160 mm/s)	6.30 in/s (160 mm/s)	5.12 in/s (130 mm/s)	5.12 in/s (130 mm/s)	5.12 in/s (130 mm/s)	5.12 in/s (130 mm/s)	4.72 in/s (120 mm/s)	4.72 in/s (120 mm/s)	4.72 in/s (120 mm/s)	4.72 in/s (120 mm/s)
Bending speed	0.35 in/s (9 mm/s)	0.35 in/s (9 mm/s)	0.35 in/s (9 mm/s)	0.35 in/s (9 mm/s)	0.33 in/s (8.5 mm/s)	0.33 in/s (8.5 mm/s)	0.33 in/s (8.5 mm/s)	0.33 in/s (8.5 mm/s)	0.33 in/s (8.5 mm/s)	0.33 in/s (8.5 mm/s)	0.33 in/s (8.5 mm/s)	0.33 in/s (8.5 mm/s)
Return speed	4.13 in/s (105 mm/s)	4.13 in/s (105 mm/s)	4.13 in/s (105 mm/s)	4.13 in/s (105 mm/s)	3.94 in/s (100 mm/s)	3.94 in/s (100 mm/s)	3.94 in/s (100 mm/s)	3.94 in/s (100 mm/s)	4.33 in/s (110 mm/s)	4.33 in/s (110 mm/s)	4.33 in/s (110 mm/s)	4.33 in/s (110 mm/s)
Back gauge X stroke · speed	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)	19.7" (500 mm) · 13.78 in/s (350 mm/s)
Back gauge R stroke · speed	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)	7.9" (200 mm) · 7.87 in/s (200 mm/s)
Servo main motor	22.4 HP (16.7 kW)	22.4 HP (16.7 kW)	22.4 HP (16.7 kW)	22.4 HP (16.7 kW)	22.4 HP (16.7 kW)	22.4 HP (16.7 kW)	22.4 HP (16.7 kW)	22.4 HP (16.7 kW)	28.7 HP (21.4 kW)	28.7 HP (21.4 kW)	28.7 HP (21.4 kW)	28.7 HP (21.4 kW)
Hydraulic oil tank	79 US gal (300 L)	79 US gal (300 L)	79 US gal (300 L)	79 US gal (300 L)	122 US gal (460 L)	122 US gal (460 L)	122 US gal (460 L)	122 US gal (460 L)	172 US gal (650 L)	172 US gal (650 L)	172 US gal (650 L)	172 US gal (650 L)
Dimensions L × W × H	150 × 87 × 112" (3,800 × 2,200 × 2,850 mm)	185 × 87 × 112" (4,700 × 2,200 × 2,850 mm)	220 × 87 × 117" (5,600 × 2,200 × 2,980 mm)	264 × 87 × 127" (6,700 × 2,200 × 3,220 mm)	150 × 87 × 123" (3,800 × 2,200 × 3,120 mm)	181 × 87 × 124" (4,600 × 2,200 × 3,150 mm)	220 × 85 × 124" (5,600 × 2,150 × 3,150 mm)	248 × 85 × 124" (6,300 × 2,150 × 3,150 mm)	138 × 89 × 126" (3,500 × 2,250 × 3,200 mm)	169 × 98 × 134" (4,300 × 2,500 × 3,400 mm)	209 × 98 × 134" (5,300 × 2,500 × 3,400 mm)	248 × 98 × 134" (6,300 × 2,500 × 3,400 mm)

TECHNICAL SPECIFICATIONS · 4 / 4

CNC HYDRAULIC PRESS BRAKES, 55 – 331 US TONS × 4 – 20 FT

CNC HYDRAULIC PRESS BRAKES · 50 – 300 T (CONTINUED) (CONTINUED)

25 models · 55 – 331 US tons · 4 – 20 ft

Model	WAD-220T/3200	WAD-220T/4100	WAD-220T/5000	WAD-220T/6000	WAD-250T/3200	WAD-250T/4000	WAD-250T/5000	WAD-250T/6000	WAD-300T/3200	WAD-300T/4000	WAD-300T/5000	WAD-300T/6000
Weight	27,558 lb (12,500 kg)	32,187 lb (14,600 kg)	38,581 lb (17,500 kg)	45,195 lb (20,500 kg)	36,376 lb (16,500 kg)	36,597 lb (16,600 kg)	45,195 lb (20,500 kg)	56,218 lb (25,500 kg)	41,447 lb (18,800 kg)	43,872 lb (19,900 kg)	57,982 lb (26,300 kg)	65,477 lb (29,700 kg)

Bending force in US tons (metric tons in brackets); the model number is the supplier's — metric tonnage × metric bending length. Capacities vary with the V-die opening, material and sheet length: check the bending chart or ask us for the tonnage your part needs. Dimensions are overall L (along the bed) × W × H with the standard front supports; weights are reference values.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

WAD-400T/4000 – WAD-1200T/8000 · 21 MODELS · TANDEM TO 60 FT

HEAVY-DUTY CNC PRESS BRAKES, 441 – 1,323 US TONS × 13 – 26 FT, AND TANDEMS



MODEL HEAVY-DUTY · HEAVY-DUTY CNC PRESS BRAKE WITH TWIN SHEET FOLLOWERS — 30 FT BENDING LENGTH



Heavy-duty CNC press brake with a CNC sheet follower table



Tandem CNC press brake — two 300 t × 13 ft machines on one control with sheet followers

For plate work, poles, towers and long profiles: 400 to 1,200 t machines with 13, 16, 20, 23 and 26 ft beds, 23.6" throats, strokes to 15.7" and 36" daylight, twin pumps and twin servo motors from 800 t up, and a 38.6" (980 mm) back gauge stroke as standard. CNC sheet followers, extra-long front supports and tandem configurations — two machines on one control bending to 60 ft — are built to order; the 3,000 t × 30 ft machine in the photos shows how far the range goes.

STANDARD FEATURES


- ✓ Twin cylinders and twin pumps from 800 t; 38.6" (980 mm) X back gauge stroke; 11 – 15 ft bed widths
- ✓ Delem DA-53Tx 15" touch-screen CNC control; 4 axes — Y1, Y2 (independent ram cylinders), X and R back gauge
- ✓ Welded mono-block frame of high-yield steel, designed by finite-element analysis and stress-relieved by heat treatment after welding, so it keeps its accuracy
- ✓ Electro-hydraulic servo synchronisation: proportional servo valves on one integrated manifold (few pipes, few leak points) and linear scales on both sides keep the ram parallel to the table — ± 0.01 mm ram repeatability
- ✓ Mild hybrid drive as standard: a servo motor and servo pump in place of the conventional motor and pump — the pump turns only while the ram moves and stops while the machine waits, loads or unloads: 40 – 60 % less energy, oil 18 – 36 °F (10 – 20 °C) cooler, much less noise for a quieter shop (about 60 dB, and silent while the ram waits), longer life for the pump, seals and valves
- ✓ Servo back gauge on ball screws and linear guides, ± 0.01 mm: one servo motor and a timing belt turn the X screws on both sides together; two large stop fingers with four positioning steps
- ✓ Motorised CNC crowning (V axis) on 110 t and up: the control works out how the ram and the table deflect and sets the crowning for each bend, for the same angle along the whole part
- ✓ Top-tool clamps, segmented die and sectioned punch set sized for the tonnage (42CrMo, HRC 47)
- ✓ Two front sheet support arms that slide on linear guides along the bed
- ✓ Schneider electrics, with spare parts available anywhere; Estun servo drives
- ✓ DSP laser finger protection under the punch (EN 12622 CAT 4 / SIL 3) with its safety PLC: the ram slows to bending speed just above the sheet, and sections of the beam can be muted for box bends
- ✓ Side guards, rear guard, anti-panic foot pedal with emergency stop on a movable stand
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Delem DA-58Tx (18.5" 2D graphic), DA-66S (24" 2D with 3D view) or DA-69S (24" 3D) control; ESA S840 or S875 W; Cybelec CybTouch 12
- + X-R-Z1-Z2 back gauge: the two fingers also move sideways along the beam under CNC (Z1, Z2)
- + X1-X2-R-Z1-Z2 back gauge: each finger also sets its own depth (X1, X2) — for tapered and stepped flanges
- + ATF X1-X2-R1-R2-Z1-Z2 back gauge: each finger tower moves in depth, height and sideways on its own; back gauge strokes to 39" (1,000 mm)
- + Sheet followers: CNC arms rise with the sheet through the bend, so large, thin sheets do not sag or whip back
- + Double-sided quick clamps for European-style punches with the 8.4 × 3.5 mm safety groove: front clamping for a vertical tool change, rear clamping to slide the punches out horizontally
- + Rolleri ROL200 PN POWER pneumatic clamping: vertical tool change from the front with full anti-fall safety for European (R1) punches; also in a hydraulic version
- + Wila hydraulic upper and lower tool clamping (New Standard): one push-button clamps and seats the punches and the dies — up to 80 % less tool-change time
- + Safety light curtain: stops the machine when anyone enters the guarded area
- + Automatic angle measurement
- + Segmented and special tooling: punch and die sections for boxes, acute- and obtuse-angle tools, designed from your part drawings
- + Hydraulic oil cooler; automatic lubrication
- + Tandem machines on one control; robot bending cells
- + Custom voltage: 208 V, 240 V or 480 V 3-phase
- + Extra-long front supports and CNC sheet followers for plate
- + Tandem and tridem machines to 60 ft on one control

DETAILS, COMPONENTS AND OPTIONS

HEAVY-DUTY CNC PRESS BRAKES, 441 – 1,323 US TONS × 13 – 26 FT, AND TANDEMS

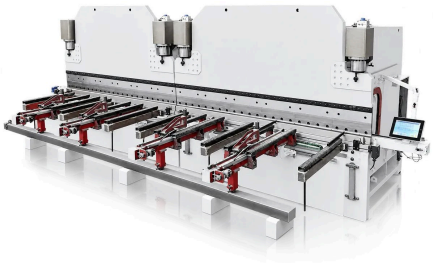

Tandem press brake with CNC sheet followers for long, heavy plate

TECHNICAL SPECIFICATIONS · 1 / 3

HEAVY-DUTY CNC PRESS BRAKES, 441 – 1,323 US TONS × 13 – 26 FT, AND TANDEMS

HEAVY-DUTY CNC PRESS BRAKES · 400 – 600 T

9 models · 441 – 661 US tons · 13 – 20 ft

Model	WAD-400T/4000	WAD-400T/5000	WAD-400T/6000	WAD-500T/4000	WAD-500T/5000	WAD-500T/6000	WAD-600T/4000	WAD-600T/5000	WAD-600T/6000
Bending force	**441 US tons (400 t)**	**441 US tons (400 t)**	**441 US tons (400 t)**	**551 US tons (500 t)**	**551 US tons (500 t)**	**551 US tons (500 t)**	**661 US tons (600 t)**	**661 US tons (600 t)**	**661 US tons (600 t)**
Bending length	**13.1 ft · 157.5″ (4,000 mm)**	**16.4 ft · 196.9″ (5,000 mm)**	**19.7 ft · 236.2″ (6,000 mm)**	**13.1 ft · 157.5″ (4,000 mm)**	**16.4 ft · 196.9″ (5,000 mm)**	**19.7 ft · 236.2″ (6,000 mm)**	**13.1 ft · 157.5″ (4,000 mm)**	**16.4 ft · 196.9″ (5,000 mm)**	**19.7 ft · 236.2″ (6,000 mm)**
Distance between columns	122.0″ (3,100 mm)	149.6″ (3,800 mm)	189.0″ (4,800 mm)	122.0″ (3,100 mm)	149.6″ (3,800 mm)	189.0″ (4,800 mm)	122.0″ (3,100 mm)	149.6″ (3,800 mm)	189.0″ (4,800 mm)
Throat depth	19.7″ (500 mm)	19.7″ (500 mm)	19.7″ (500 mm)	19.7″ (500 mm)	19.7″ (500 mm)	19.7″ (500 mm)	23.6″ (600 mm)	23.6″ (600 mm)	23.6″ (600 mm)
Stroke	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)	12.6″ (320 mm)	12.6″ (320 mm)	12.6″ (320 mm)
Daylight open height	24.0″ (610 mm)	24.0″ (610 mm)	24.0″ (610 mm)	24.0″ (610 mm)	24.0″ (610 mm)	24.0″ (610 mm)	25.6″ (650 mm)	25.6″ (650 mm)	25.6″ (650 mm)
Approach speed	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)
Bending speed	0.31 in/s (8 mm/s)	0.31 in/s (8 mm/s)	0.31 in/s (8 mm/s)	0.37 in/s (9.5 mm/s)	0.37 in/s (9.5 mm/s)	0.37 in/s (9.5 mm/s)	0.33 in/s (8.5 mm/s)	0.33 in/s (8.5 mm/s)	0.33 in/s (8.5 mm/s)
Return speed	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)	4.33 in/s (110 mm/s)	4.33 in/s (110 mm/s)	4.33 in/s (110 mm/s)	3.35 in/s (85 mm/s)	3.35 in/s (85 mm/s)	3.35 in/s (85 mm/s)
Back gauge X stroke · speed	38.6″ (980 mm) · 7.87 in/s (200 mm/s)	38.6″ (980 mm) · 7.87 in/s (200 mm/s)	38.6″ (980 mm) · 7.87 in/s (200 mm/s)	38.6″ (980 mm) · 8.66 in/s (220 mm/s)	38.6″ (980 mm) · 7.87 in/s (200 mm/s)	38.6″ (980 mm) · 7.87 in/s (200 mm/s)	38.6″ (980 mm) · 7.87 in/s (200 mm/s)	38.6″ (980 mm) · 8.66 in/s (220 mm/s)	38.6″ (980 mm) · 7.87 in/s (200 mm/s)
Back gauge R stroke · speed	7.9″ (200 mm) · 1.57 in/s (40 mm/s)	7.9″ (200 mm) · 1.57 in/s (40 mm/s)	7.9″ (200 mm) · 1.57 in/s (40 mm/s)	7.9″ (200 mm) · 1.57 in/s (40 mm/s)	7.9″ (200 mm) · 1.57 in/s (40 mm/s)	7.9″ (200 mm) · 1.57 in/s (40 mm/s)	7.9″ (200 mm) · 1.57 in/s (40 mm/s)	7.9″ (200 mm) · 1.57 in/s (40 mm/s)	7.9″ (200 mm) · 1.57 in/s (40 mm/s)
Servo main motor	36.1 HP (26.9 kW)	36.1 HP (26.9 kW)	36.1 HP (26.9 kW)	44.3 HP (33 kW)	44.3 HP (33 kW)	44.3 HP (33 kW)	60.3 HP (45 kW)	60.3 HP (45 kW)	60.3 HP (45 kW)
Hydraulic oil tank	211 US gal (800 L)	211 US gal (800 L)	211 US gal (800 L)	201 US gal (760 L)	201 US gal (760 L)	201 US gal (760 L)	277 US gal (1050 L)	277 US gal (1050 L)	277 US gal (1050 L)
Dimensions L × W × H	169 × 106 × 138″ (4,300 × 2,700 × 3,500 mm)	209 × 106 × 138″ (5,300 × 2,700 × 3,500 mm)	248 × 106 × 138″ (6,300 × 2,700 × 3,500 mm)	169 × 106 × 138″ (4,300 × 2,700 × 3,500 mm)	209 × 106 × 138″ (5,300 × 2,700 × 3,500 mm)	248 × 106 × 142″ (6,300 × 2,700 × 3,600 mm)	169 × 130 × 154″ (4,300 × 3,300 × 3,900 mm)	209 × 130 × 154″ (5,300 × 3,300 × 3,900 mm)	248 × 130 × 154″ (6,300 × 3,300 × 3,900 mm)
Weight	54,675 lb (24,800 kg)	66,139 lb (30,000 kg)	78,264 lb (35,500 kg)	73,855 lb (33,500 kg)	79,807 lb (36,200 kg)	92,153 lb (41,800 kg)	95,019 lb (43,100 kg)	106,483 lb (48,300 kg)	123,900 lb (56,200 kg)

TECHNICAL SPECIFICATIONS · 2 / 3

HEAVY-DUTY CNC PRESS BRAKES, 441 – 1,323 US TONS × 13 – 26 FT, AND TANDEMS

HEAVY-DUTY CNC PRESS BRAKES · 800 – 1,200 T

12 models · 882 – 1,323 US tons · 13 – 26 ft · twin pumps

Model	WAD-800T/4000	WAD-800T/5000	WAD-800T/6000	WAD-800T/8000	WAD-1000T/5000	WAD-1000T/6000
Bending force	**882 US tons (800 t)**	**882 US tons (800 t)**	**882 US tons (800 t)**	**882 US tons (800 t)**	**1,102 US tons (1000 t)**	**1,102 US tons (1000 t)**
Bending length	**13.1 ft · 157.5″ (4,000 mm)**	**16.4 ft · 196.9″ (5,000 mm)**	**19.7 ft · 236.2″ (6,000 mm)**	**26.2 ft · 315.0″ (8,000 mm)**	**16.4 ft · 196.9″ (5,000 mm)**	**19.7 ft · 236.2″ (6,000 mm)**
Distance between columns	110.2″ (2,800 mm)	145.7″ (3,700 mm)	181.1″ (4,600 mm)	248.0″ (6,300 mm)	141.7″ (3,600 mm)	181.1″ (4,600 mm)
Throat depth	23.6″ (600 mm)	23.6″ (600 mm)	23.6″ (600 mm)	23.6″ (600 mm)	23.6″ (600 mm)	23.6″ (600 mm)
Stroke	12.6″ (320 mm)	12.6″ (320 mm)	12.6″ (320 mm)	12.6″ (320 mm)	15.7″ (400 mm)	15.7″ (400 mm)
Daylight open height	31.5″ (800 mm)	31.5″ (800 mm)	31.5″ (800 mm)	31.5″ (800 mm)	36.2″ (920 mm)	36.2″ (920 mm)
Approach speed	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)
Bending speed	0.31 in/s (8 mm/s)	0.31 in/s (8 mm/s)	0.31 in/s (8 mm/s)	0.31 in/s (8 mm/s)	0.33 in/s (8.5 mm/s)	0.33 in/s (8.5 mm/s)
Return speed	3.54 in/s (90 mm/s)	3.54 in/s (90 mm/s)	3.54 in/s (90 mm/s)	3.54 in/s (90 mm/s)	3.94 in/s (100 mm/s)	3.94 in/s (100 mm/s)
Back gauge X stroke · speed	38.6″ (980 mm) · 8.66 in/s (220 mm/s)	38.6″ (980 mm) · 8.66 in/s (220 mm/s)	38.6″ (980 mm) · 8.66 in/s (220 mm/s)	38.6″ (980 mm) · 7.87 in/s (200 mm/s)	38.6″ (980 mm) · 7.87 in/s (200 mm/s)	38.6″ (980 mm) · 7.87 in/s (200 mm/s)
Back gauge R stroke · speed	7.9″ (200 mm) · 1.57 in/s (40 mm/s)	7.9″ (200 mm) · 1.57 in/s (40 mm/s)	7.9″ (200 mm) · 1.57 in/s (40 mm/s)	7.9″ (200 mm) · 1.57 in/s (40 mm/s)	7.9″ (200 mm) · 1.57 in/s (40 mm/s)	7.9″ (200 mm) · 1.57 in/s (40 mm/s)
Servo main motor	2 × 36.1 HP (26.9 kW)	2 × 36.1 HP (26.9 kW)	2 × 36.1 HP (26.9 kW)	2 × 36.1 HP (26.9 kW)	2 × 44.3 HP (33 kW)	2 × 44.3 HP (33 kW)
Hydraulic oil tank	476 US gal (1800 L)	476 US gal (1800 L)	476 US gal (1800 L)	476 US gal (1800 L)	449 US gal (1700 L)	449 US gal (1700 L)
Dimensions L × W × H	167 × 138 × 161″ (4,250 × 3,500 × 4,100 mm)	209 × 142 × 174″ (5,300 × 3,600 × 4,420 mm)	248 × 142 × 169″ (6,300 × 3,600 × 4,300 mm)	327 × 142 × 177″ (8,300 × 3,600 × 4,500 mm)	207 × 174 × 168″ (5,260 × 4,410 × 4,260 mm)	246 × 174 × 176″ (6,260 × 4,410 × 4,460 mm)
Weight	125,663 lb (57,000 kg)	145,505 lb (66,000 kg)	163,142 lb (74,000 kg)	192,904 lb (87,500 kg)	171,960 lb (78,000 kg)	194,007 lb (88,000 kg)

TECHNICAL SPECIFICATIONS · 3 / 3

HEAVY-DUTY CNC PRESS BRAKES, 441 – 1,323 US TONS × 13 – 26 FT, AND TANDEMS

HEAVY-DUTY CNC PRESS BRAKES · 800 – 1,200 T (CONTINUED)

12 models · 882 – 1,323 US tons · 13 – 26 ft · twin pumps

Model	WAD-1000T/7000	WAD-1000T/8000	WAD-1200T/5000	WAD-1200T/6000	WAD-1200T/7000	WAD-1200T/8000
Bending force	**1,102 US tons (1000 t)**	**1,102 US tons (1000 t)**	**1,323 US tons (1200 t)**	**1,323 US tons (1200 t)**	**1,323 US tons (1200 t)**	**1,323 US tons (1200 t)**
Bending length	**23 ft · 275.6″ (7,000 mm)**	**26.2 ft · 315.0″ (8,000 mm)**	**16.4 ft · 196.9″ (5,000 mm)**	**19.7 ft · 236.2″ (6,000 mm)**	**23 ft · 275.6″ (7,000 mm)**	**26.2 ft · 315.0″ (8,000 mm)**
Distance between columns	220.5″ (5,600 mm)	248.0″ (6,300 mm)	137.8″ (3,500 mm)	177.2″ (4,500 mm)	208.7″ (5,300 mm)	248.0″ (6,300 mm)
Throat depth	23.6″ (600 mm)	23.6″ (600 mm)	23.6″ (600 mm)	23.6″ (600 mm)	23.6″ (600 mm)	23.6″ (600 mm)
Stroke	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)
Daylight open height	36.2″ (920 mm)	36.2″ (920 mm)	36.2″ (920 mm)	36.2″ (920 mm)	36.2″ (920 mm)	36.2″ (920 mm)
Approach speed	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)
Bending speed	0.33 in/s (8.5 mm/s)	0.33 in/s (8.5 mm/s)	0.33 in/s (8.5 mm/s)	0.33 in/s (8.5 mm/s)	0.33 in/s (8.5 mm/s)	0.33 in/s (8.5 mm/s)
Return speed	3.94 in/s (100 mm/s)	3.94 in/s (100 mm/s)	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)	3.15 in/s (80 mm/s)
Back gauge X stroke · speed	38.6″ (980 mm) · 7.87 in/s (200 mm/s)	38.6″ (980 mm) · 7.87 in/s (200 mm/s)	38.6″ (980 mm) · 7.87 in/s (200 mm/s)	38.6″ (980 mm) · 7.87 in/s (200 mm/s)	38.6″ (980 mm) · 7.87 in/s (200 mm/s)	38.6″ (980 mm) · 7.87 in/s (200 mm/s)
Back gauge R stroke · speed	7.9″ (200 mm) · 1.57 in/s (40 mm/s)	7.9″ (200 mm) · 1.57 in/s (40 mm/s)	7.9″ (200 mm) · 1.57 in/s (40 mm/s)	7.9″ (200 mm) · 1.57 in/s (40 mm/s)	7.9″ (200 mm) · 1.57 in/s (40 mm/s)	7.9″ (200 mm) · 1.57 in/s (40 mm/s)
Servo main motor	2 × 44.3 HP (33 kW)	2 × 44.3 HP (33 kW)	2 × 60.3 HP (45 kW)	2 × 60.3 HP (45 kW)	2 × 60.3 HP (45 kW)	2 × 60.3 HP (45 kW)
Hydraulic oil tank	502 US gal (1900 L)	502 US gal (1900 L)	608 US gal (2300 L)	608 US gal (2300 L)	608 US gal (2300 L)	608 US gal (2300 L)
Dimensions L × W × H	288 × 174 × 184″ (7,310 × 4,410 × 4,680 mm)	327 × 174 × 196″ (8,300 × 4,410 × 4,980 mm)	208 × 182 × 168″ (5,280 × 4,620 × 4,260 mm)	247 × 182 × 180″ (6,280 × 4,620 × 4,560 mm)	287 × 182 × 191″ (7,280 × 4,620 × 4,860 mm)	326 × 182 × 199″ (8,280 × 4,620 × 5,060 mm)
Weight	211,644 lb (96,000 kg)	233,690 lb (106,000 kg)	213,848 lb (97,000 kg)	233,690 lb (106,000 kg)	249,122 lb (113,000 kg)	271,168 lb (123,000 kg)

Bending force in US tons (metric tons in brackets); the model number is the supplier's — metric tonnage × metric bending length. Capacities vary with the V-die opening, material and sheet length: check the bending chart or ask us for the tonnage your part needs. Dimensions are overall L (along the bed) × W × H with the standard front supports; weights are reference values.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

WC67K-30T/1600 · 1 MODEL


COMPACT NC HYDRAULIC PRESS BRAKE, 33 US TONS × 5.2 FT — TORSION BAR



MODEL COMPACT · NOVOTECH WC67K COMPACT NC HYDRAULIC PRESS BRAKE WITH TORSION-BAR SYNCHRONISATION, SEGMENTED TOP TOOLS AND FOOT PEDAL



Estun E21PS NC control of the WC67K compact press brake



Operator buttons of the WC67K compact: key selectors, start and reset, and the Schneider emergency stop

33 US tons × 5.2 ft · torsion bar · Estun E21PS · 4,630 lb

The smallest torsion-bar press brake: 30 metric tons (33 US tons) over 1,600 mm (5.2 ft), 51″ between the frames, a 7.9″ throat and 13.2″ daylight, 4,630 lb on a 71 × 47″ footprint. A torsion bar keeps the two cylinders in step, mechanical stops set the depth and the Estun E21PS control positions the back gauge and the ram for 40 stored programs — nothing that needs a technician. Mild steel to 14 ga (2 mm) over the full length and 1/8″ (3 mm) over 4 ft. The press brake for a maintenance shop, a sign maker or a small fabricator bending brackets, boxes and channels in one material, at the lowest price of any powered press brake we sell.

STANDARD FEATURES

- ✓ Mild steel to 14 ga (2 mm) over 5.2 ft and 1/8″ (3 mm) over 4 ft (V = 8 × thickness); 51″ (1,300 mm) between the frames, 7.9″ (200 mm) throat, 13.2″ (335 mm) daylight
- ✓ 23.6″ (600 mm) motorised X back gauge on ball screw and linear guide; 5.5 kW (7.5 HP) motor
- ✓ Estun E21PS NC control — programs the back gauge (X) and ram depth (Y), 40 programs × 25 steps, one-way / two-way positioning, stroke counter; inches or millimetres
- ✓ Torsion-bar synchronised ram with mechanical depth stops — simple, rigid and easy to service
- ✓ Motorised X back gauge on ball screw and linear guide, 23.6″ (600 mm) stroke; manual crowning
- ✓ Welded, stress-relieved monoblock frame machined in one setting; compact hydraulic block; Schneider electrics
- ✓ Manual top-tool clamps, segmented 2-V die and sectioned punch set; front support arms
- ✓ Side and rear guards; foot pedal with emergency stop
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Estun E315PS 15.6″ touch NC control (6+1 axes, tool and material database), Delem DA-41T 7″ touch or ESA S630 10″ touch control
- + Y-axis CNC upgrade (closed-loop ram) to the WAD series
- + DSP laser finger protection or light curtain
- + Sheet follower support; longer back gauge
- + Hydraulic oil cooler
- + Custom voltage: 208 V, 240 V or 480 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

COMPACT NC HYDRAULIC PRESS BRAKE, 33 US TONS × 5.2 FT — TORSION BAR



Foot pedal of the WC67K compact NC press brake: up and down pedals under a steel guard

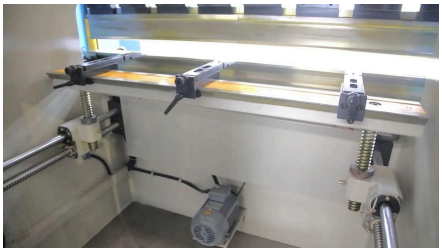


Back gauge of the WC67K compact NC press brake seen from the rear: three stop fingers on the beam, the lead screws and the drive motor




Back gauge drive of the WC67K compact: a geared motor and two chains turn the lead screws, behind the hydraulic pump unit



Electrical cabinet of the NC press brake: Schneider TeSys contactors and motor protection, numbered wiring

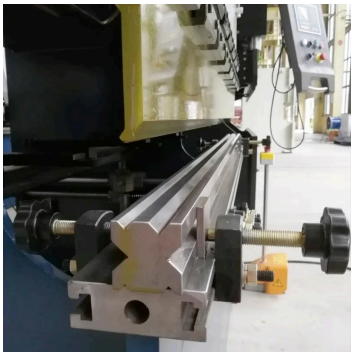

Back gauge lead screw and hand wheel of the WC67K NC press brake

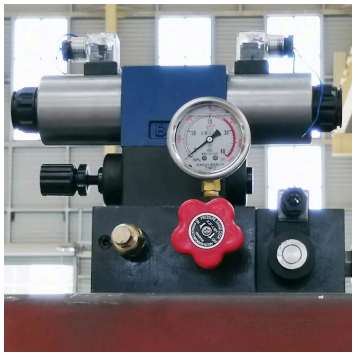

Hydraulic valve block with pressure gauge and overload valve of the WC67K



Torsion-bar synchronisation of the ram — the mechanical link between the two cylinders

TECHNICAL SPECIFICATIONS

COMPACT NC HYDRAULIC PRESS BRAKE, 33 US TONS × 5.2 FT — TORSION BAR

COMPACT NC PRESS BRAKE · 5.2 FT

1 model · 33 US tons

Model	WC67K-30t/1600
Bending force	**33 US tons (30 t)**
Bending length	**5.2 ft · 63.0″ (1,600 mm)**
Distance between columns	51.2″ (1,300 mm)
Throat depth	7.9″ (200 mm)
Stroke	3.1″ (80 mm)
Daylight open height	13.2″ (335 mm)
Approach speed	4.72 in/s (120 mm/s)
Bending speed	0.67 in/s (17 mm/s)
Return speed	6.30 in/s (160 mm/s)
Back gauge X stroke · speed	23.6″ (600 mm) · 5.91 in/s (150 mm/s)
Main motor	7.4 HP (5.5 kW)
Hydraulic oil tank	21 US gal (80 L)
Dimensions L × W × H	71 × 47 × 67″ (1,800 × 1,200 × 1,700 mm)
Weight	4,630 lb (2,100 kg)

Bending force in US tons (metric tons in brackets); the model number is the supplier's — metric tonnage × metric bending length. Capacities vary with the V-die opening, material and sheet length: check the bending chart or ask us for the tonnage your part needs. Dimensions are overall L (along the bed) × W × H with the standard front supports; weights are reference values.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

WC67K-30T/1600 – WC67K/E-400T/6000 · 34 MODELS

NC HYDRAULIC PRESS BRAKES, 33 – 441 US TONS × 5 – 20 FT — TORSION BAR



MODEL NC · NOVOTECH WC67E 100T/3200 NC HYDRAULIC PRESS BRAKE — 10 FT × 110 US TONS, TORSION-BAR SYNCHRONISED, WITH THE ESTUN CONTROL



NC hydraulic press brake 200/3200: 220 US tons (200 t) × 10.5 ft, with the optional Estun E315PS touch control on its swing arm, the front support arms and the foot pedal



The 200/3200 NC press brake from the right: the side guards, the front support arms and the Estun E315PS control

The simplest press brake we sell: a torsion bar keeps the two ram cylinders in step mechanically, mechanical stops set the depth and an Estun E21PS control positions the back gauge and the ram for 40 stored programs. No servo valves, no linear scales — nothing that needs a technician — which is why these machines run for decades in general fabrication shops bending brackets, boxes, channels, roofing and plate. Thirty-four models on one design, from 33 tons × 5 ft to 441 tons × 20 ft: the 100 t × 10 ft and 125 t × 13 ft are the standard sizes, and from 160 t up the machines have 13.8 – 15.7″ throats, 7.9 – 9.8″ strokes, 18.9 – 22.8″ daylight, 20 – 50 cc pumps and 11 – 22 kW motors for 3/8″ and 1/2″ plate in simple shapes.

STANDARD FEATURES

- ✓ Estun E21PS NC control — programs the back gauge (X) and ram depth (Y), 40 programs × 25 steps, one-way / two-way positioning, stroke counter; inches or millimetres
- ✓ Torsion-bar synchronised ram with mechanical depth stops — simple, rigid and easy to service
- ✓ Motorised X back gauge on ball screw and linear guide, 23.6″ (600 mm) stroke; manual crowning
- ✓ Welded, stress-relieved monoblock frame machined in one setting; compact hydraulic block; Schneider electrics
- ✓ Manual top-tool clamps, segmented 2-V die and sectioned punch set; front support arms
- ✓ Side and rear guards; foot pedal with emergency stop
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Estun E315PS 15.6″ touch NC control (6+1 axes, tool and material database), Delem DA-41T 7″ touch or ESA S630 10″ touch control
- + Y-axis CNC upgrade (closed-loop ram) to the WAD series
- + DSP laser finger protection or light curtain
- + Sheet follower support; longer back gauge
- + Hydraulic oil cooler
- + Custom voltage: 208 V, 240 V or 480 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

NC HYDRAULIC PRESS BRAKES, 33 – 441 US TONS × 5 – 20 FT — TORSION BAR



The 200/3200 NC press brake from the front, with the right side guard open




From the rear: the main motor and pump on top of the frame, the electrical cabinet and the rear guard doors




Torsion bar and the motorised X back gauge seen from the rear



Torsion-bar synchronisation of the ram — the mechanical link between the two cylinders

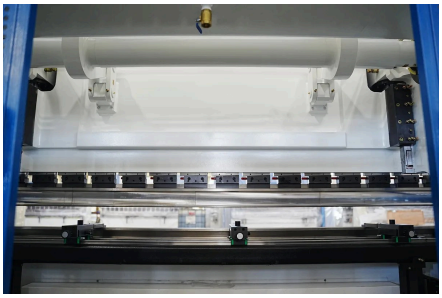

NC press brake — European-style punch clamping on the ram

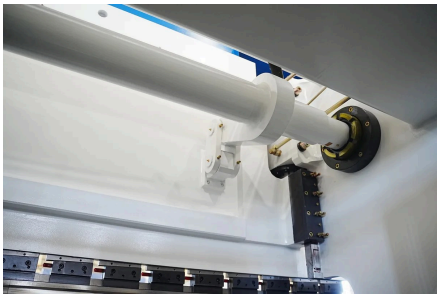

NC press brake — ram cylinder and the mechanical depth stop

TECHNICAL SPECIFICATIONS · 1 / 3

NC HYDRAULIC PRESS BRAKES, 33 – 441 US TONS × 5 – 20 FT — TORSION BAR

NC PRESS BRAKES · 30 – 400 T

34 models · 33 – 441 US tons · 5 – 20 ft

Model	WC67K-30t/1600	WC67K/E-30t/2000	WC67K/E-40t/2500	WC67K-63t/2500	WC67K/E-80t/2500	WC67K/E-100t/2500	WC67K-100t/3200	WC67K-100t/4000	WC67K/E-125t/2500	WC67K-125t/3200	WC67K-125t/4000	WC67K/E-125t/5000
Bending force	**33 US tons (30 t)**	**33 US tons (30 t)**	**44 US tons (40 t)**	**69 US tons (63 t)**	**88 US tons (80 t)**	**110 US tons (100 t)**	**110 US tons (100 t)**	**110 US tons (100 t)**	**138 US tons (125 t)**	**138 US tons (125 t)**	**138 US tons (125 t)**	**138 US tons (125 t)**
Bending length	**5.2 ft · 63.0" (1,600 mm)**	**6.6 ft · 78.7" (2,000 mm)**	**8.2 ft · 98.4" (2,500 mm)**	**8.2 ft · 98.4" (2,500 mm)**	**8.2 ft · 98.4" (2,500 mm)**	**8.2 ft · 98.4" (2,500 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**	**8.2 ft · 98.4" (2,500 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**	**16.4 ft · 196.9" (5,000 mm)**
Distance between columns	51.2" (1,300 mm)	63.0" (1,600 mm)	79.9" (2,030 mm)	80.7" (2,050 mm)	80.7" (2,050 mm)	80.7" (2,050 mm)	98.8" (2,510 mm)	122.0" (3,100 mm)	80.7" (2,050 mm)	98.8" (2,510 mm)	122.0" (3,100 mm)	149.6" (3,800 mm)
Throat depth	7.9" (200 mm)	7.9" (200 mm)	9.8" (250 mm)	9.8" (250 mm)	9.8" (250 mm)	12.6" (320 mm)	12.6" (320 mm)	16.5" (420 mm)	12.6" (320 mm)	12.6" (320 mm)	16.5" (420 mm)	12.6" (320 mm)
Stroke	3.1" (80 mm)	3.1" (80 mm)	3.9" (100 mm)	4.7" (120 mm)	4.7" (120 mm)	6.3" (160 mm)	6.3" (160 mm)	6.3" (160 mm)	6.3" (160 mm)	6.3" (160 mm)	6.3" (160 mm)	6.3" (160 mm)
Daylight open height	13.2" (335 mm)	13.2" (335 mm)	14.0" (355 mm)	14.6" (370 mm)	15.0" (380 mm)	16.9" (430 mm)	16.9" (430 mm)	16.9" (430 mm)	16.9" (430 mm)	16.9" (430 mm)	16.9" (430 mm)	16.9" (430 mm)
Approach speed	4.72 in/s (120 mm/s)	5.51 in/s (140 mm/s)	4.33 in/s (110 mm/s)	3.94 in/s (100 mm/s)	4.33 in/s (110 mm/s)	3.54 in/s (90 mm/s)	3.94 in/s (100 mm/s)	4.72 in/s (120 mm/s)	3.54 in/s (90 mm/s)	3.74 in/s (95 mm/s)	4.33 in/s (110 mm/s)	4.72 in/s (120 mm/s)
Bending speed	0.67 in/s (17 mm/s)	0.67 in/s (17 mm/s)	0.59 in/s (15 mm/s)	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)	0.30 in/s (7.5 mm/s)	0.30 in/s (7.5 mm/s)	0.30 in/s (7.5 mm/s)	0.28 in/s (7 mm/s)	0.28 in/s (7 mm/s)	0.28 in/s (7 mm/s)	0.28 in/s (7 mm/s)
Return speed	6.30 in/s (160 mm/s)	6.30 in/s (160 mm/s)	3.54 in/s (90 mm/s)	2.76 in/s (70 mm/s)	3.15 in/s (80 mm/s)	2.76 in/s (70 mm/s)	2.76 in/s (70 mm/s)	2.76 in/s (70 mm/s)	2.56 in/s (65 mm/s)	2.56 in/s (65 mm/s)	2.56 in/s (65 mm/s)	2.56 in/s (65 mm/s)
Back gauge X stroke · speed	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)
Main motor	7.4 HP (5.5 kW)	7.4 HP (5.5 kW)	7.4 HP (5.5 kW)	7.4 HP (5.5 kW)	7.4 HP (5.5 kW)	10.1 HP (7.5 kW)	10.1 HP (7.5 kW)	10.1 HP (7.5 kW)	10.1 HP (7.5 kW)	10.1 HP (7.5 kW)	10.1 HP (7.5 kW)	10.1 HP (7.5 kW)
Hydraulic oil tank	21 US gal (80 L)	26 US gal (100 L)	45 US gal (170 L)	45 US gal (170 L)	45 US gal (170 L)	69 US gal (260 L)	69 US gal (260 L)	69 US gal (260 L)	69 US gal (260 L)	69 US gal (260 L)	69 US gal (260 L)	69 US gal (260 L)
Dimensions L × W × H	71 × 47 × 67" (1,800 × 1,200 × 1,700 mm)	87 × 47 × 67" (2,200 × 1,200 × 1,700 mm)	106 × 47 × 75" (2,700 × 1,200 × 1,900 mm)	98 × 53 × 90" (2,500 × 1,350 × 2,282 mm)	98 × 55 × 85" (2,500 × 1,400 × 2,150 mm)	98 × 59 × 87" (2,500 × 1,500 × 2,200 mm)	126 × 59 × 91" (3,200 × 1,500 × 2,300 mm)	157 × 59 × 94" (4,000 × 1,500 × 2,400 mm)	101 × 64 × 96" (2,570 × 1,620 × 2,450 mm)	126 × 63 × 93" (3,200 × 1,600 × 2,350 mm)	157 × 69 × 102" (4,000 × 1,750 × 2,590 mm)	197 × 63 × 96" (5,000 × 1,600 × 2,450 mm)
Weight	4,630 lb (2,100 kg)	5,071 lb (2,300 kg)	7,055 lb (3,200 kg)	9,039 lb (4,100 kg)	10,141 lb (4,600 kg)	12,346 lb (5,600 kg)	14,771 lb (6,700 kg)	18,519 lb (8,400 kg)	13,889 lb (6,300 kg)	15,653 lb (7,100 kg)	19,842 lb (9,000 kg)	25,353 lb (11,500 kg)

TECHNICAL SPECIFICATIONS · 2 / 3

NC HYDRAULIC PRESS BRAKES, 33 – 441 US TONS × 5 – 20 FT — TORSION BAR

NC PRESS BRAKES · 30 – 400 T (CONTINUED)

34 models · 33 – 441 US tons · 5 – 20 ft

Model	WC67K/E-125t/6000	WC67K/E-160t/2500	WC67K-160t/3200	WC67K-160t/4000	WC67K/E-160t/5000	WC67K/E-160t/6000	WC67K-200T/3200	WC67K-200T/4000	WC67K/E-200T/5000	WC67K/E-200T/6000	WC67K-250T/3200	WC67K-250T/4000
Bending force	**138 US tons (125 t)**	**176 US tons (160 t)**	**176 US tons (160 t)**	**176 US tons (160 t)**	**176 US tons (160 t)**	**176 US tons (160 t)**	**220 US tons (200 t)**	**220 US tons (200 t)**	**220 US tons (200 t)**	**220 US tons (200 t)**	**276 US tons (250 t)**	**276 US tons (250 t)**
Bending length	**19.7 ft · 236.2" (6,000 mm)**	**8.2 ft · 98.4" (2,500 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**	**16.4 ft · 196.9" (5,000 mm)**	**19.7 ft · 236.2" (6,000 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**	**16.4 ft · 196.9" (5,000 mm)**	**19.7 ft · 236.2" (6,000 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**
Distance between columns	189.0" (4,800 mm)	80.7" (2,050 mm)	98.8" (2,510 mm)	122.0" (3,100 mm)	149.6" (3,800 mm)	189.0" (4,800 mm)	98.8" (2,510 mm)	122.0" (3,100 mm)	149.6" (3,800 mm)	189.0" (4,800 mm)	102.4" (2,600 mm)	122.0" (3,100 mm)
Throat depth	12.6" (320 mm)	13.8" (350 mm)	13.8" (350 mm)	13.8" (350 mm)	13.8" (350 mm)	13.8" (350 mm)	13.8" (350 mm)	13.8" (350 mm)	13.8" (350 mm)	13.8" (350 mm)	15.7" (400 mm)	15.7" (400 mm)
Stroke	6.3" (160 mm)	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)	9.8" (250 mm)	9.8" (250 mm)
Daylight open height	16.9" (430 mm)	18.9" (480 mm)	18.9" (480 mm)	18.9" (480 mm)	18.9" (480 mm)	18.9" (480 mm)	18.9" (480 mm)	18.9" (480 mm)	18.9" (480 mm)	18.9" (480 mm)	22.8" (580 mm)	22.8" (580 mm)
Approach speed	5.12 in/s (130 mm/s)	4.33 in/s (110 mm/s)	4.33 in/s (110 mm/s)	4.33 in/s (110 mm/s)	4.72 in/s (120 mm/s)	4.72 in/s (120 mm/s)	3.94 in/s (100 mm/s)	3.94 in/s (100 mm/s)	3.94 in/s (100 mm/s)	3.94 in/s (100 mm/s)	3.94 in/s (100 mm/s)	3.94 in/s (100 mm/s)
Bending speed	0.28 in/s (7 mm/s)	0.28 in/s (7 mm/s)	0.28 in/s (7 mm/s)	0.28 in/s (7 mm/s)	0.28 in/s (7 mm/s)	0.28 in/s (7 mm/s)	0.33 in/s (8.5 mm/s)	0.33 in/s (8.5 mm/s)	0.33 in/s (8.5 mm/s)	0.33 in/s (8.5 mm/s)	0.31 in/s (8 mm/s)	0.31 in/s (8 mm/s)
Return speed	2.56 in/s (65 mm/s)	2.95 in/s (75 mm/s)	2.95 in/s (75 mm/s)	2.95 in/s (75 mm/s)	2.95 in/s (75 mm/s)	2.95 in/s (75 mm/s)	2.56 in/s (65 mm/s)	2.56 in/s (65 mm/s)	2.56 in/s (65 mm/s)	2.56 in/s (65 mm/s)	2.95 in/s (75 mm/s)	2.95 in/s (75 mm/s)
Back gauge X stroke · speed	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)	23.6" (600 mm) · 5.91 in/s (150 mm/s)
Main motor	10.1 HP (7.5 kW)	14.8 HP (11 kW)	14.8 HP (11 kW)	14.8 HP (11 kW)	14.8 HP (11 kW)	14.8 HP (11 kW)	20.1 HP (15 kW)	20.1 HP (15 kW)	20.1 HP (15 kW)	20.1 HP (15 kW)	24.8 HP (18.5 kW)	24.8 HP (18.5 kW)
Hydraulic oil tank	69 US gal (260 L)	69 US gal (260 L)	69 US gal (260 L)	69 US gal (260 L)	69 US gal (260 L)	69 US gal (260 L)	115 US gal (435 L)	115 US gal (435 L)	115 US gal (435 L)	115 US gal (435 L)	115 US gal (435 L)	115 US gal (435 L)
Dimensions L × W × H	236 × 63 × 96" (6,000 × 1,600 × 2,450 mm)	98 × 65 × 106" (2,500 × 1,650 × 2,700 mm)	126 × 65 × 110" (3,200 × 1,650 × 2,800 mm)	157 × 65 × 110" (4,000 × 1,650 × 2,800 mm)	197 × 69 × 122" (5,000 × 1,750 × 3,100 mm)	236 × 69 × 130" (6,000 × 1,750 × 3,300 mm)	126 × 65 × 110" (3,200 × 1,650 × 2,800 mm)	157 × 65 × 110" (4,000 × 1,650 × 2,800 mm)	197 × 77 × 122" (5,000 × 1,950 × 3,100 mm)	236 × 77 × 122" (6,000 × 1,950 × 3,100 mm)	130 × 83 × 124" (3,300 × 2,100 × 3,150 mm)	157 × 83 × 124" (4,000 × 2,100 × 3,150 mm)
Weight	32,187 lb (14,600 kg)	18,960 lb (8,600 kg)	21,605 lb (9,800 kg)	25,353 lb (11,500 kg)	29,762 lb (13,500 kg)	36,376 lb (16,500 kg)	25,133 lb (11,400 kg)	30,203 lb (13,700 kg)	36,156 lb (16,400 kg)	49,604 lb (22,500 kg)	34,172 lb (15,500 kg)	38,801 lb (17,600 kg)

TECHNICAL SPECIFICATIONS · 3 / 3

NC HYDRAULIC PRESS BRAKES, 33 – 441 US TONS × 5 – 20 FT — TORSION BAR

NC PRESS BRAKES · 30 – 400 T (CONTINUED)

34 models · 33 – 441 US tons · 5 – 20 ft

Model	WC67K/E-250T/5000	WC67K/E-250T/6000	WC67K-300T/3200	WC67K-300T/4000	WC67K/E-300T/5000	WC67K/E-300T/6000	WC67K/E-400T/3200	WC67K/E-400T/4000	WC67K/E-400T/5000	WC67K/E-400T/6000
Bending force	**276 US tons (250 t)**	**276 US tons (250 t)**	**331 US tons (300 t)**	**331 US tons (300 t)**	**331 US tons (300 t)**	**331 US tons (300 t)**	**441 US tons (400 t)**	**441 US tons (400 t)**	**441 US tons (400 t)**	**441 US tons (400 t)**
Bending length	**16.4 ft · 196.9″ (5,000 mm)**	**19.7 ft · 236.2″ (6,000 mm)**	**10.5 ft · 126.0″ (3,200 mm)**	**13.1 ft · 157.5″ (4,000 mm)**	**16.4 ft · 196.9″ (5,000 mm)**	**19.7 ft · 236.2″ (6,000 mm)**	**10.5 ft · 126.0″ (3,200 mm)**	**13.1 ft · 157.5″ (4,000 mm)**	**16.4 ft · 196.9″ (5,000 mm)**	**19.7 ft · 236.2″ (6,000 mm)**
Distance between columns	149.6″ (3,800 mm)	189.0″ (4,800 mm)	102.4″ (2,600 mm)	122.0″ (3,100 mm)	149.6″ (3,800 mm)	189.0″ (4,800 mm)	98.4″ (2,500 mm)	122.0″ (3,100 mm)	149.6″ (3,800 mm)	189.0″ (4,800 mm)
Throat depth	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)
Stroke	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)
Daylight open height	22.8″ (580 mm)	22.8″ (580 mm)	22.8″ (580 mm)	22.8″ (580 mm)	22.8″ (580 mm)	22.8″ (580 mm)	22.8″ (580 mm)	22.8″ (580 mm)	22.8″ (580 mm)	22.8″ (580 mm)
Approach speed	3.94 in/s (100 mm/s)	3.94 in/s (100 mm/s)	3.54 in/s (90 mm/s)	3.94 in/s (100 mm/s)	4.33 in/s (110 mm/s)	5.12 in/s (130 mm/s)	3.54 in/s (90 mm/s)	3.54 in/s (90 mm/s)	3.54 in/s (90 mm/s)	3.54 in/s (90 mm/s)
Bending speed	0.31 in/s (8 mm/s)	0.31 in/s (8 mm/s)	0.31 in/s (8 mm/s)	0.31 in/s (8 mm/s)	0.31 in/s (8 mm/s)	0.31 in/s (8 mm/s)	0.28 in/s (7 mm/s)	0.28 in/s (7 mm/s)	0.28 in/s (7 mm/s)	0.28 in/s (7 mm/s)
Return speed	2.95 in/s (75 mm/s)	2.95 in/s (75 mm/s)	2.95 in/s (75 mm/s)	2.95 in/s (75 mm/s)	2.95 in/s (75 mm/s)	2.95 in/s (75 mm/s)	2.95 in/s (75 mm/s)	2.95 in/s (75 mm/s)	2.95 in/s (75 mm/s)	2.95 in/s (75 mm/s)
Back gauge X stroke · speed	23.6″ (600 mm) · 5.91 in/s (150 mm/s)	23.6″ (600 mm) · 5.91 in/s (150 mm/s)	23.6″ (600 mm) · 5.91 in/s (150 mm/s)	23.6″ (600 mm) · 5.91 in/s (150 mm/s)	23.6″ (600 mm) · 5.91 in/s (150 mm/s)	23.6″ (600 mm) · 5.91 in/s (150 mm/s)	23.6″ (600 mm) · 5.91 in/s (150 mm/s)	23.6″ (600 mm) · 5.91 in/s (150 mm/s)	33.5″ (850 mm) · 5.91 in/s (150 mm/s)	33.5″ (850 mm) · 5.91 in/s (150 mm/s)
Main motor	24.8 HP (18.5 kW)	24.8 HP (18.5 kW)	24.8 HP (18.5 kW)	24.8 HP (18.5 kW)	24.8 HP (18.5 kW)	24.8 HP (18.5 kW)	29.5 HP (22 kW)	29.5 HP (22 kW)	29.5 HP (22 kW)	29.5 HP (22 kW)
Hydraulic oil tank	115 US gal (435 L)	143 US gal (540 L)	143 US gal (540 L)	143 US gal (540 L)	143 US gal (540 L)	143 US gal (540 L)	143 US gal (540 L)	143 US gal (540 L)	145 US gal (550 L)	145 US gal (550 L)
Dimensions L × W × H	197 × 83 × 126″ (5,000 × 2,100 × 3,200 mm)	236 × 83 × 126″ (6,000 × 2,100 × 3,200 mm)	126 × 87 × 126″ (3,200 × 2,200 × 3,200 mm)	157 × 87 × 126″ (4,000 × 2,200 × 3,200 mm)	197 × 87 × 126″ (5,000 × 2,200 × 3,200 mm)	236 × 87 × 126″ (6,000 × 2,200 × 3,200 mm)	130 × 94 × 126″ (3,300 × 2,400 × 3,200 mm)	157 × 94 × 126″ (4,000 × 2,400 × 3,200 mm)	197 × 94 × 126″ (5,000 × 2,400 × 3,200 mm)	236 × 94 × 126″ (6,000 × 2,400 × 3,200 mm)
Weight	46,297 lb (21,000 kg)	51,809 lb (23,500 kg)	37,699 lb (17,100 kg)	41,447 lb (18,800 kg)	52,911 lb (24,000 kg)	61,729 lb (28,000 kg)	44,754 lb (20,300 kg)	52,470 lb (23,800 kg)	61,509 lb (27,900 kg)	72,752 lb (33,000 kg)

Bending force in US tons (metric tons in brackets); the model number is the supplier's — metric tonnage × metric bending length. Capacities vary with the V-die opening, material and sheet length: check the bending chart or ask us for the tonnage your part needs. Dimensions are overall L (along the bed) × W × H with the standard front supports; weights are reference values.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HBV24 – HBV-2540 · 4 MODELS


HBV HYDRAULIC BENDING BRAKES, 5/32" × 24 – 48", 3/16" × 49" AND 1/8" × 100"



MODEL HBV · HBV-1250 HYDRAULIC PRESS BRAKE WITH TWO CYLINDERS AND FOOT PEDAL



HBV48 hydraulic bending brake with four-way V-block and foot valve



Back gauge hand wheel with counter

To 3/16" × 49", 1/8" × 100"

Small hydraulic brakes for brackets, clips and short parts in plate. The HBV24 and HBV48 push the top beam into a four-way V-block with 16.5 or 33 US tons for 5/32" (4 mm) plate over 24" or 48", controlled by a hydraulic foot valve; the beam unpins for closed bends and easy removal of the part, and a back gauge sets the flange from 4.1 to 21.7". The HBV-1250 and HBV-2540 are two-cylinder press brakes of 35 US tons for 3/16" over 49" and 1/8" over 100", with a 5.1" stroke, an 8.3" open height, a foot pedal and a back gauge set by hand wheel with a counter.

STANDARD FEATURES

- ✓ HBV24 / HBV48: 5/32" (4 mm) × 24" or 48"; 16.5 / 33 US tons; four-way V-block; hydraulic foot valve
- ✓ HBV-1250: 3/16" (5 mm) × 49-1/4"; HBV-2540: 1/8" (3 mm) × 100"; 35 US tons on two cylinders
- ✓ Back gauge 4.1 – 21.7" (HBV24 / 48) or 24-3/8" with hand wheel and counter (HBV-1250 / 2540)
- ✓ Stroke 5.1 – 5.9"

OPTIONAL EQUIPMENT

HBV24 · HBV48 — TECHNICAL SPECIFICATIONS

Model	HBV24	HBV48
Force	**16.5 US tons (15 t)**	**33 US tons (30 t)**
Bending width × thickness	**24" (610 mm) × 5/32" (4 mm)**	**48" (1,220 mm) × 5/32" (4 mm)**
Stroke	5.9" (150 mm)	5.9" (150 mm)
Back gauge	4.1 – 21.7" (105 – 550 mm)	4.1 – 21.7" (105 – 550 mm)
Control	Hydraulic foot valve	Hydraulic foot valve
Motor	**2 HP (1.5 kW)**	**4 HP (3 kW)**
Packing size L × W × H	60 × 36 × 56" (152 × 92 × 143 cm)	87 × 37 × 57" (220 × 93 × 146 cm)
Weight	**772 lb (350 kg)**	**1,124 lb (510 kg)**

TECHNICAL SPECIFICATIONS

HBV HYDRAULIC BENDING BRAKES, 5/32″ × 24 – 48″, 3/16″ × 49″ AND 1/8″ × 100″

HBV-1250 · HBV-2540

Hydraulic press brakes with two cylinders, 35 US tons, 49″ and 100″

Model	HBV-1250	HBV-2540
Force	**35.3 US tons (32 t)**	**35.3 US tons (32 t)**
Bending width × thickness	**49-1/4″ (1,250 mm) × 3/16″ (5 mm)**	**100″ (2,540 mm) × 1/8″ (3 mm)**
Stroke	5.1″ (130 mm)	5.1″ (130 mm)
Open height, max	8.3″ (210 mm)	8.3″ (210 mm)
Speed, working and return	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)
Back gauge	24-3/8″ (620 mm), hand wheel with counter	24-3/8″ (620 mm), hand wheel with counter
Motor	**4 HP (3 kW)**	**4 HP (3 kW)**
Packing size L × W × H	94 × 56 × 63″ (238 × 142 × 160 cm)	144 × 56 × 63″ (367 × 142 × 160 cm)
Weight	**2,646 lb (1,200 kg)**	**3,858 lb (1,750 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.