NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH VALUE LINE · BUILT IN CHINA TO NORTH AMERICAN STANDARDS · SOLD & SERVICED IN CANADA BY NOVOTECH

WELDING AUTOMATION

WELDING POSITIONERS · ROTARY TABLES AND LIFT POSITIONERS · WELDING TURNING ROLLS AND PIPE ROTATORS · COLUMN AND BOOM MANIPULATORS · WELDING TABLES AND DOWNDRAFT TABLES







China
MADE IN CHINA

24
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

VALUE-LINE WELDING AUTOMATION

CONTENTS

LIGHT AND BENCHTOP WELDING POSITIONERS

HB01 · HB05 · HB1 light welding positioners, 22 – 220 lb HB01 · HB05 · HB1 · 3 models 04

MRT-15 · WP-50 · WP-30T benchtop welding positioners, 33 – 110 lb MRT-15 · WP-50 · WP-30T · 3 models 05

WP-100T · WP-110 · WP-110T chuck welding positioners, 220 – 247 lb WP-100T · WP-110 · WP-110T · 3 models 07

TILTING WELDING POSITIONERS

WP-220 · WP-350 · WP-500 · WP-500T tilting welding positioners, 485 – 1,102 lb WP-220 – WP-500T · 4 models 09

HB3 · HB6 · HB12 tilting welding positioners, 661 – 2,646 lb HB3 · HB6 · HB12 · 3 models 11

ROTARY WELDING TABLES AND LIFT POSITIONERS

HBT3 – HBT200 rotary welding tables, 661 – 44,092 lb HBT3 – HBT200 · 8 models 12

HBJ10 – HBJ200 lift welding positioners, 2,205 – 44,092 lb HBJ10 – HBJ200 · 8 models 13

HEAVY WELDING POSITIONERS

WP-1000 · WP-2000 · WP-3000 heavy welding positioners, 3,307 – 8,818 lb WP-1000 · WP-2000 · WP-3000 · 3 models 15

HB30 – HB200 heavy welding positioners, 6,614 – 44,092 lb HB30 – HB200 · 5 models 17

HEADSTOCK, TAILSTOCK AND SPECIAL POSITIONERS

Headstock and tailstock positioners, built to order Headstock · head & tail lifting · fixed head & tail 18

L-type, hydraulic 3-axis and special welding positioners, built to order L-type · hydraulic 3-axis · special 19

WELDING CHUCKS AND TORCH HOLDERS

WPC welding chucks and WGS torch holders for the positioners WPC-200 – WGS540 · 6 models 20

LIGHT WELDING TURNING ROLLS

DZG1 · DZG3 light welding turning rolls, 2,205 – 6,614 lb DZG1 · DZG3 · 2 models 22

TRS welding turning rolls, 2,205 – 11,023 lb per set TRS1000 – TRS5000 · 4 models 23

ADJUSTABLE WELDING TURNING ROLLS

DKG2 – DKG100 bolt-adjustable welding turning rolls, 4,409 – 220,462 lb DKG2 – DKG100 · 8 models 25

DSK2 – DSK100 lead-screw adjustable welding turning rolls, 4,409 – 220,462 lb DSK2 – DSK100 · 8 models 26

SELF-ALIGNING WELDING TURNING ROLLS

DZG-5 – DZG-100 self-aligning welding turning rolls, 11,023 – 220,462 lb DZG-5 – DZG-100 · 7 models 27

PIPE ROTATORS AND FIT-UP ROTATORS

GGLJ pinch-type pipe rotators and hydraulic fit-up rotators, built to order GGLJ pinch-type · hydraulic fit-up 28

PIPE STANDS AND SUPPORTS

Pipe stands, pipe supports and pipe jacks for welding, to 19,800 lb WTR450 – PTR-1090A · 16 models 29

COLUMN AND BOOM WELDING MANIPULATORS

DLH0810 – DLH2020 small column and boom manipulators, 31.5 – 78.7″ lift DLH0810 – DLH2020 · 4 models 32

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR VALUE-LINE WELDING AUTOMATION

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Built in China to North American standards
- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee
  in-stock machines only
- Spare parts & technical support
  readily available in Canada
- Order today with just 10% down
  0% down financing available
- Installation and training available

NOVOTECH VALUE LINE

POSITIONERS, ROLLS AND MANIPULATORS FOR THE WELDING SHOP

NovoTech's value line is our own brand: machines built in China to our specification by a maker that exports metalworking machinery to more than 70 countries, inspected before they ship and sold under NovoTech's name with a CSA-approved panel on every 3-phase machine, a 1-year warranty and parts and technical support from Mississauga, Ontario, Canada.

Welding automation brings the seam to the welder: positioners tilt and turn the part so every weld is made flat, turning rolls rotate vessels, tanks and pipe under the torch, column and boom manipulators carry the welding head along the seam, and welding tables hold the parts square while downdraft tables draw off grinding dust and fumes.

HB01 · HB05 · HB1 · 3 MODELS

HB01 · HB05 · HB1 LIGHT WELDING POSITIONERS, 22 – 220 LB



MODEL HB · LIGHT WELDING POSITIONER WITH ITS CONTROL BOX, 10 – 100 KG WORKTABLE LOAD

22 – 220 lb

Small tilting positioners for the bench and the cell: a worktable of Ø7.1 to 14.2″ that rotates on a DC motor with stepless speed and tilts from 0 to 90°, so flanges, small pipe spools and fittings are welded in the flat position, by hand or with a torch in a holder.

STANDARD FEATURES

- Loads 22 lb (HB01), 110 lb (HB05) and 220 lb (HB1)
- Worktables Ø7.1″, Ø12.6″ and Ø14.2″ (180 / 320 / 360 mm)
- Rotation 1 – 8, 1 – 15 and 0.2 – 5 rpm; DC speed control
- Tilt 0 – 90°

OPTIONAL EQUIPMENT

HB01 · HB05 · HB1 — TECHNICAL SPECIFICATIONS

Model	HB01	HB05	HB1
Rated load	22 lb (10 kg)	110 lb (50 kg)	220 lb (100 kg)
Worktable diameter	Ø7.1″ (180 mm)	Ø12.6″ (320 mm)	Ø14.2″ (360 mm)
Tilt	0 – 90°	0 – 90°	0 – 90°
Rotation speed	1 – 8 rpm	1 – 15 rpm	0.2 – 5 rpm
Rotation motor	15 W	100 W	120 W
Speed control	DC	DC	DC

Metric values in brackets are the manufacturer's figures. Loads are the rated load of the machine (per set of drive and idler sections on turning rolls). Motors are three-phase, rotation speed set by variable-frequency drive (VFD) unless noted.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

MRT-15 · WP-50 · WP-30T · 3 MODELS


MRT-15 · WP-50 · WP-30T BENCHTOP WELDING POSITIONERS, 33 – 110 LB



MODEL BENCHTOP · WP-50 BENCHTOP WELDING POSITIONER WITH 3-JAW CHUCK AND DIGITAL SPEED DISPLAY



WP-30T benchtop welding positioner with foot pedal



MRT-15 multi-function rotary table with control box and foot pedal

33 – 110 lb

Small positioners for the bench that turn tube, flanges and small parts under the torch at a steady speed, started and stopped with the foot pedal. The MRT-15 is a rotary table with a 4″ 3-jaw chuck that works horizontal or vertical — for welding, grinding and cutting — at up to 18 rpm; the WP-50 has an 8″ table with a 3-jaw chuck, a digital speed display and gas purge through the centre for back-purging stainless tube; the WP-30T a 12-3/8″ table with a 2-9/16″ hollow bore and a hand-wheel tilt.

STANDARD FEATURES

- ✓ Loads 33 lb (MRT-15), 66 lb (WP-30T) and 110 lb (WP-50) horizontal
- ✓ MRT-15: 4″ 3-jaw chuck, 0 – 18 rpm, horizontal or vertical
- ✓ WP-50: Ø8″ table with 3-jaw chuck, 0 – 6 rpm with digital display, gas purge through the centre
- ✓ WP-30T: Ø12-3/8″ table, 2-9/16″ hollow bore, 0 – 6.5 rpm, hand-wheel tilt 0 – 90°
- ✓ Foot pedal on every model

OPTIONAL EQUIPMENT

- \+ 3-jaw chuck and torch holder (WP-30T)

MRT-15 · WP-50 · WP-30T — TECHNICAL SPECIFICATIONS

Model	MRT-15	WP-50	WP-30T
Load, horizontal / vertical	**33 / 22 lb (15 / 10 kg)**	**110 / 66 lb (50 / 30 kg)**	**66 / 44 lb (30 / 20 kg)**
Table / chuck	**4″ (100 mm) 3-jaw chuck, clamps Ø5/64 – 3-1/2″ (2 – 90 mm)**	**Ø8″ (200 mm) table with 3-jaw chuck, clamps Ø5/64 – 3-1/2″ (2 – 90 mm)**	**Ø12-3/8″ (315 mm) table, Ø2-9/16″ (65 mm) hollow bore**
Table height	–	11-1/2″ (295 mm)	15.4″ (390 mm)
Rotation speed	**0 – 18 rpm**	**0 – 6 rpm, digital display**	**0 – 6.5 rpm**
Tilt	**0 – 90°, by hand**	**0 – 90°, by hand**	**0 – 90°, hand wheel**
Motor	150 W	100 W	80 W
Features	Foot pedal; works horizontal or vertical for welding, grinding and cutting	Foot pedal; gas purge through the centre (Ø5/16″ / 8 mm hole, Ø3/8″ / 10 mm port)	Foot pedal; torch holder and chuck optional
Packing size L × W × H	15 × 15 × 13″ (37 × 37 × 32 cm)	20 × 12 × 19″ (50 × 30 × 49 cm)	20 × 19 × 20″ (52 × 48 × 51 cm)
Weight	**37 lb (17 kg)**	**49 lb (22 kg)**	**77 lb (35 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS


MRT-15 · WP-50 · WP-30T BENCHTOP WELDING POSITIONERS, 33 – 110 LB



MRT-15 in the vertical position

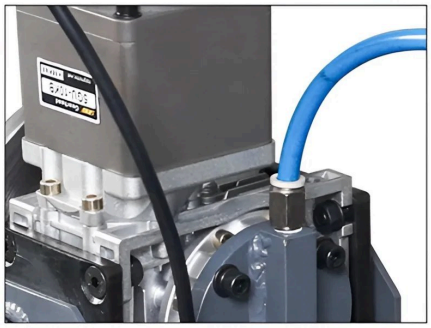

Gas inlet port for purging through the centre

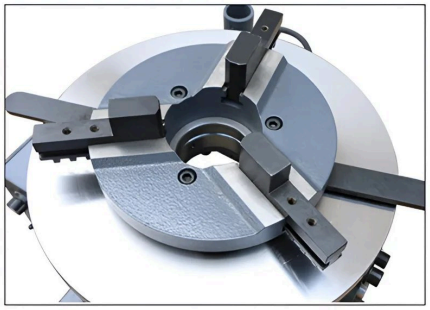

Chuck on the WP-30T table (optional)

WP-100T · WP-110 · WP-110T · 3 MODELS


WP-100T · WP-110 · WP-110T CHUCK WELDING POSITIONERS, 220 – 247 LB



MODEL CHUCK · WP-110 WELDING POSITIONER WITH 8" CHUCK AND FOOT PEDAL



WP-110T welding positioner with hollow chuck



WP-100T benchtop welding positioner with 8" chuck

220 – 247 lb

Positioners built around an 8" 3-jaw chuck for tube, pipe, flanges and shafts: 220 – 247 lb on the chuck, 0 – 6 or 0 – 8 rpm, foot pedal. The WP-100T is a benchtop positioner with a 2-3/8" hollow bore that tilts 0 – 90° by hand; the WP-110 and WP-110T stand on a pedestal base, lock at 0, 30, 60 or 90° and run forward, reverse and in auto mode — the WP-110T with a 2-9/16" hollow bore so long tube passes through the chuck.

STANDARD FEATURES

- 220 – 247 lb (100 – 112 kg) horizontal, 110 – 121 lb vertical
- 8" (200 mm) 3-jaw chuck; hollow bore 2-3/8" (WP-100T) and 2-9/16" (WP-110T)
- 0 – 6 rpm (WP-100T), 0 – 8 rpm (WP-110, WP-110T)
- WP-110 / WP-110T: tilt locked at 0, 30, 60 or 90°; forward / reverse; auto mode
- Foot pedal standard

OPTIONAL EQUIPMENT

WP-100T · WP-110 · WP-110T — TECHNICAL SPECIFICATIONS

Model	WP-100T	WP-110	WP-110T
Load, horizontal / vertical	**220 / 110 lb (100 / 50 kg)**	**247 / 121 lb (112 / 55 kg)**	**247 / 121 lb (112 / 55 kg)**
Table / chuck	**8" (200 mm) 3-jaw chuck; Ø2-3/8" (60 mm) hollow bore with reducer**	**8" (200 mm) 3-jaw chuck**	**8" (200 mm) 3-jaw chuck; Ø2-9/16" (65 mm) hollow bore**
Table height	16.5"	—	—
Rotation speed	**0 – 6 rpm**	**0 – 8 rpm**	**0 – 8 rpm**
Tilt	**0 – 90°, by hand**	**0°, 30°, 60° or 90°, pin-locked**	**0°, 30°, 60° or 90°, pin-locked**
Motor	120 W variable-speed AC	125 W	125 W
Features	Benchtop; foot pedal	Foot pedal; forward / reverse; auto mode	Foot pedal; forward / reverse; auto mode
Packing size L × W × H	28 × 22 × 18" (70 × 55 × 45 cm)	20 × 21 × 23" (50 × 53 × 58 cm)	20 × 21 × 23" (50 × 53 × 58 cm)
Weight	**243 lb (110 kg)**	**143 lb (65 kg)**	**143 lb (65 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

WP-100T · WP-110 · WP-110T CHUCK WELDING POSITIONERS, 220 – 247 LB



WP-100T in the horizontal position



Control panel: speed, foot pedal and auto mode, forward and reverse

WP-220 – WP-500T · 4 MODELS

WP-220 · WP-350 · WP-500 · WP-500T TILTING WELDING POSITIONERS, 485 – 1,102 LB



MODEL TILTING · WP-500 WELDING POSITIONER WITH MOTORIZED TILT



WP-220 tilting welding positioner with foot pedal



WP-350 tilting welding positioner

485 – 1,102 lb

Tilting turntable positioners for flanges, pipe-to-plate joints, hubs, tank heads and wheels: 0 – 5 rpm variable, a table that tilts from 0 to 135°, foot pedal. The WP-220 and WP-350 carry 485 and 772 lb on a Ø13" T-slotted table and tilt by hand; the WP-500 and WP-500T carry 1,102 lb on a Ø21.7" table with a motorized tilt, the WP-500T with a Ø6-11/16" hollow chuck for pipe.

STANDARD FEATURES

- 485 – 1,102 lb (220 – 500 kg) horizontal, 220 – 551 lb vertical
- Ø13" (WP-220, WP-350) and Ø21.7" (WP-500, WP-500T) tables
- 0 – 5 rpm, variable; foot pedal
- Tilt 0 – 135°: by hand (WP-220, WP-350), motorized (WP-500, WP-500T)
- WP-500T: Ø6-11/16" (170 mm) hollow chuck

OPTIONAL EQUIPMENT

WP-220 · WP-350 · WP-500 · WP-500T — TECHNICAL SPECIFICATIONS


Model	WP-220	WP-350	WP-500	WP-500T
Load, horizontal / vertical	**485 / 220 lb (220 / 100 kg)**	**772 / 265 lb (350 / 120 kg)**	**1,102 / 551 lb (500 / 250 kg)**	**1,102 / 551 lb (500 / 250 kg)**
Table / chuck	**Ø13" (330 mm) table**	**Ø13" (330 mm) table**	**Ø21.7" (550 mm) table**	**Ø21.7" (550 mm) table, Ø6-11/16" (170 mm) hollow chuck**
Table height	17.7" (450 mm)	18.9" (480 mm)	26" (660 mm)	26" (660 mm)
Rotation speed	**0 – 5 rpm, variable**	**0 – 5 rpm, variable**	**0 – 5 rpm, variable**	**0 – 5 rpm, variable**
Tilt	**0 – 135°, by hand**	**0 – 135°, by hand**	**0 – 135°, motorized**	**0 – 135°, motorized**
Motor	125 W	125 W	400 W rotation; tilt motor	400 W rotation; tilt motor
Packing size L × W × H	25 × 19 × 25" (64 × 49 × 63 cm)	25 × 17 × 25" (64 × 44 × 63 cm)	32 × 29 × 28" (82 × 73 × 71 cm)	32 × 29 × 28" (82 × 73 × 71 cm)
Weight	**75 lb (34 kg)**	**84 lb (38 kg)**	**485 lb (220 kg)**	**507 lb (230 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS


WP-220 · WP-350 · WP-500 · WP-500T TILTING WELDING POSITIONERS, 485 – 1,102 LB

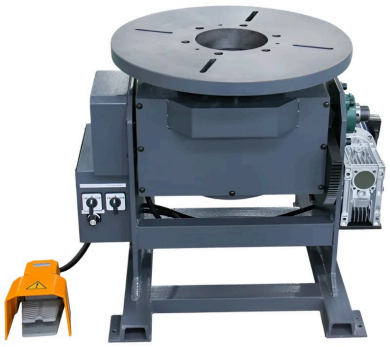

WP-500T welding positioner with Ø6-11/16" hollow chuck

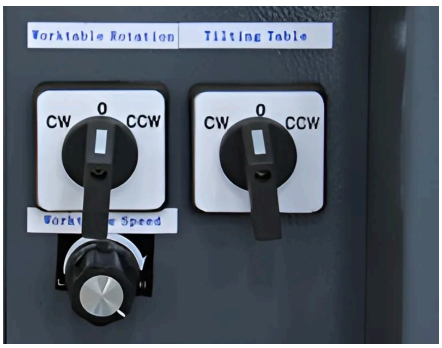

Control panel: table rotation, tilt and speed

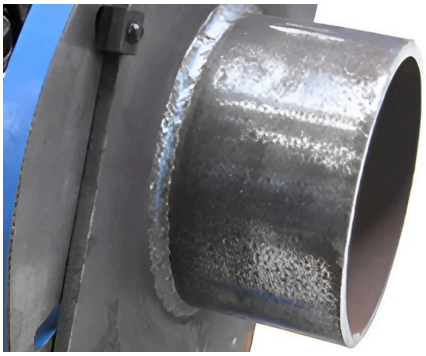

Pipe welded on a positioner

HB3 · HB6 · HB12 · 3 MODELS

HB3 · HB6 · HB12 TILTING WELDING POSITIONERS, 661 – 2,646 LB



MODEL HB · HB WELDING POSITIONER WITH GEARED TILTING AND THE PENDANT CONTROL BOX



HB welding positioner — the tilting sector gear and the worktable

661 – 2,646 lb

Geared tilting positioners: the worktable turns at a speed set by VFD for the welding travel speed and tilts by gear sector — by motor at a constant speed on the HB6 and HB12 — to bring the joint to the flat position. Rated with the part's centre of gravity up to 3.9″ from the table axis and 5.9 – 7.9″ above the table; long parts and parts with a high centre of gravity take the next size up. Foot switch, welding chuck and wireless control are options.

STANDARD FEATURES

- ✓ 661 / 1,323 / 2,646 lb (300 / 600 / 1,200 kg)
- ✓ Worktables Ø23.6″, Ø39.4″ and Ø47.2″ with T-slots
- ✓ Rotation 0.1 – 1 rpm (HB3, HB6) and 0.05 – 0.5 rpm (HB12), set by VFD
- ✓ Tilt 0 – 90° (HB3, HB6) and 0 – 120° (HB12); motorized tilt on the HB6 and HB12
- ✓ Options: single or double foot switch, welding chuck, wireless controller

OPTIONAL EQUIPMENT

- \+ Foot switch, single or double pedal
- \+ Welding chuck
- \+ Wireless controller

HB3 · HB6 · HB12 — TECHNICAL SPECIFICATIONS

Model	HB3	HB6	HB12
Rated load	**661 lb (300 kg)**	**1,323 lb (600 kg)**	**2,646 lb (1,200 kg)**
Eccentric distance, max centre of gravity off the table axis	3.9″ (100 mm)	3.9″ (100 mm)	3.9″ (100 mm)
Centre of gravity distance, max above the worktable	5.9″ (150 mm)	7.9″ (200 mm)	7.9″ (200 mm)
Worktable diameter	**Ø23.6″ (600 mm)**	**Ø39.4″ (1,000 mm)**	**Ø47.2″ (1,200 mm)**
Tilt	**0 – 90°**	**0 – 90°**	**0 – 120°**
Rotation speed	**0.1 – 1 rpm, VFD**	**0.1 – 1 rpm, VFD**	**0.05 – 0.5 rpm, VFD**
Rotation motor	**1/4 HP (0.18 kW)**	**1 HP (0.75 kW)**	**1 HP (0.75 kW)**
Tilting speed constant	—	0.8 rpm	0.5 rpm
Tilting motor	—	1 HP (0.75 kW)	1.5 HP (1.1 kW)

Metric values in brackets are the manufacturer's figures. Loads are the rated load of the machine (per set of drive and idler sections on turning rolls). Motors are three-phase, rotation speed set by variable-frequency drive (VFD) unless noted.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

HBT3 – HBT200 · 8 MODELS

HBT3 – HBT200 ROTARY WELDING TABLES, 661 – 44,092 LB



MODEL HBT · HBT ROTARY WELDING TABLE — A HORIZONTAL TURNTABLE WITH VFD SPEED CONTROL

661 – 44,092 lb

A horizontal turntable for circumferential welds on parts that stand upright — tanks, drums, rings, hubs and flanges — with the rotation speed set by VFD for the welding travel speed. Eight sizes from 661 lb on a Ø23.6″ table to 44,092 lb on Ø78.7″.

STANDARD FEATURES

- 661 – 44,092 lb (300 kg – 20 t)
- Worktables Ø23.6″ to Ø78.7″ (600 – 2,000 mm)
- Rotation 0.1 – 1 rpm (HBT3, HBT5), 0.05 – 0.5 rpm (HBT10 – HBT200), VFD
- Eccentric distance to 3.9″ (HBT3, HBT5) or 7.9″

OPTIONAL EQUIPMENT

HBT3 – HBT200 — TECHNICAL SPECIFICATIONS

Model	HBT3	HBT5	HBT10	HBT20	HBT30	HBT50	HBT100	HBT200
Rated load	**661 lb (300 kg)**	**1,102 lb (500 kg)**	**2,205 lb (1,000 kg)**	**4,409 lb (2,000 kg)**	**6,614 lb (3,000 kg)**	**11,023 lb (5,000 kg)**	**22,046 lb (10,000 kg)**	**44,092 lb (20,000 kg)**
Worktable diameter	**Ø23.6″ (600 mm)**	**Ø31.5″ (800 mm)**	**Ø39.4″ (1,000 mm)**	**Ø47.2″ (1,200 mm)**	**Ø55.1″ (1,400 mm)**	**Ø59.1″ (1,500 mm)**	**Ø70.9″ (1,800 mm)**	**Ø78.7″ (2,000 mm)**
Eccentric distance, max centre of gravity off the table axis	3.9″ (100 mm)	3.9″ (100 mm)	7.9″ (200 mm)	7.9″ (200 mm)	7.9″ (200 mm)	7.9″ (200 mm)	7.9″ (200 mm)	7.9″ (200 mm)
Rotation speed	**0.1 – 1 rpm**	**0.1 – 1 rpm**	**0.05 – 0.5 rpm**	**0.05 – 0.5 rpm**	**0.05 – 0.5 rpm**	**0.05 – 0.5 rpm**	**0.05 – 0.5 rpm**	**0.05 – 0.5 rpm**
Rotation motor	**1/4 HP (0.18 kW)**	**1/2 HP (0.37 kW)**	**1 HP (0.75 kW)**	**1 HP (0.75 kW)**	**1 HP (0.75 kW)**	**1 HP (0.75 kW) or 1.5 HP (1.1 kW)**	**1.5 HP (1.1 kW) or 2 HP (1.5 kW)**	**2 HP (1.5 kW)**
Speed control	Rotation speed by VFD	Rotation speed by VFD	Rotation speed by VFD	Rotation speed by VFD	Rotation speed by VFD	Rotation speed by VFD	Rotation speed by VFD	Rotation speed by VFD
Power supply	3-phase, 600 V 60 Hz in Canada (factory standard 380 V 50 Hz; other voltages to order)	3-phase, 600 V 60 Hz in Canada (factory standard 380 V 50 Hz; other voltages to order)	3-phase, 600 V 60 Hz in Canada (factory standard 380 V 50 Hz; other voltages to order)	3-phase, 600 V 60 Hz in Canada (factory standard 380 V 50 Hz; other voltages to order)	3-phase, 600 V 60 Hz in Canada (factory standard 380 V 50 Hz; other voltages to order)	3-phase, 600 V 60 Hz in Canada (factory standard 380 V 50 Hz; other voltages to order)	3-phase, 600 V 60 Hz in Canada (factory standard 380 V 50 Hz; other voltages to order)	3-phase, 600 V 60 Hz in Canada (factory standard 380 V 50 Hz; other voltages to order)

Metric values in brackets are the manufacturer's figures. Loads are the rated load of the machine (per set of drive and idler sections on turning rolls). Motors are three-phase, rotation speed set by variable-frequency drive (VFD) unless noted.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

HBJ10 – HBJ200 · 8 MODELS

HBJ10 – HBJ200 LIFT WELDING POSITIONERS, 2,205 – 44,092 LB



MODEL HBJ · HBJ LIFT WELDING POSITIONER — THE WORKTABLE RISES, TILTS AND TURNS

2,205 – 44,092 lb

Positioners that tilt, rotate and adjust in height: the worktable is raised or lowered by hand to put the work at the right height for the welder or the welding head, then tilts to 120 or 135° and turns by VFD. For pressure vessels, metallurgy, power plant, chemical machinery and steel structures, with manual or automatic welding.

STANDARD FEATURES

- ✓ 2,205 – 44,092 lb (1 – 20 t)
- ✓ Worktables Ø35.4" to Ø78.7" (900 – 2,000 mm)
- ✓ Tilt 0 – 135° (HBJ10, HBJ20) or 0 – 120°
- ✓ Rotation 0.12 – 1.2 rpm (HBJ10), 0.05 – 0.5 rpm (HBJ20 – HBJ60), 0.02 – 0.2 rpm (HBJ80 – HBJ200)
- ✓ Manual height adjustment

OPTIONAL EQUIPMENT

TECHNICAL SPECIFICATIONS

HBJ10 – HBJ200 LIFT WELDING POSITIONERS, 2,205 – 44,092 LB

HBJ10 – HBJ200

Lift welding positioners, 2,205 – 44,092 lb

Model	HBJ10	HBJ20	HBJ40	HBJ60	HBJ80	HBJ100	HBJ150	HBJ200
Rated load	**2,205 lb (1,000 kg)**	**4,409 lb (2,000 kg)**	**8,818 lb (4,000 kg)**	**13,228 lb (6,000 kg)**	**17,637 lb (8,000 kg)**	**22,046 lb (10,000 kg)**	**33,069 lb (15,000 kg)**	**44,092 lb (20,000 kg)**
Eccentric distance, max centre of gravity off the table axis	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)	7.9″ (200 mm)	7.9″ (200 mm)	7.9″ (200 mm)	7.9″ (200 mm)
Centre of gravity distance, max above the worktable	9.8″ (250 mm)	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)
Worktable diameter	**Ø35.4″ (900 mm)**	**Ø47.2″ (1,200 mm)**	**Ø55.1″ (1,400 mm)**	**Ø59.1″ (1,500 mm)**	**Ø63″ (1,600 mm)**	**Ø70.9″ (1,800 mm)**	**Ø70.9″ (1,800 mm)**	**Ø78.7″ (2,000 mm)**
Tilt	**0 – 135°**	**0 – 135°**	**0 – 120°**	**0 – 120°**	**0 – 120°**	**0 – 120°**	**0 – 120°**	**0 – 120°**
Rotation speed	**0.12 – 1.2 rpm**	**0.05 – 0.5 rpm**	**0.05 – 0.5 rpm**	**0.05 – 0.5 rpm**	**0.02 – 0.2 rpm**	**0.02 – 0.2 rpm**	**0.02 – 0.2 rpm**	**0.02 – 0.2 rpm**
Rotation motor	**1.5 HP (1.1 kW)**	**1.5 HP (1.1 kW) or 2 HP (1.5 kW)**	**2 HP (1.5 kW)**	**3 HP (2.2 kW)**	**3 HP (2.2 kW)**	**4 HP (3 kW)**	**4 HP (3 kW)**	**5.5 HP (4 kW)**
Tilting speed	0.67 rpm	0.23 rpm	0.23 rpm	0.14 rpm	0.14 rpm	0.14 rpm	0.1 rpm	0.1 rpm
Tilting motor	2 HP (1.5 kW)	2 HP (1.5 kW) or 3 HP (2.2 kW)	3 HP (2.2 kW)	4 HP (3 kW)	5.5 HP (4 kW)	7.5 HP (5.5 kW)	7.5 HP (5.5 kW)	10 HP (7.5 kW)
Height adjustment	Manual elevating	Manual elevating	Manual elevating	Manual elevating	Manual elevating	Manual elevating	Manual elevating	Manual elevating

Metric values in brackets are the manufacturer's figures. Loads are the rated load of the machine (per set of drive and idler sections on turning rolls). Motors are three-phase, rotation speed set by variable-frequency drive (VFD) unless noted.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

WP-1000 · WP-2000 · WP-3000 · 3 MODELS

WP-1000 · WP-2000 · WP-3000 HEAVY WELDING POSITIONERS, 3,307 – 8,818 LB



MODEL HEAVY · WP-3000 WELDING POSITIONER, 8,818 LB



WP-1000 welding positioner with power tilt



WP-2000 welding positioner with power tilt

3,307 – 8,818 lb

Heavy positioners for pressure vessels, large flanges, rings and weldments: 3,307 to 8,818 lb on tables of Ø39.4 to 47.2″, 0.1 – 1.2 rpm rotation and a motorized tilt through 135° in 57 seconds, run from a hand pendant and a foot pedal, with high-frequency protection for TIG welding. Rated with the load's centre of gravity up to 12″ from the table centre and 12″ above the table.

STANDARD FEATURES

- ✓ 3,307 / 5,512 / 8,818 lb (1,500 / 2,500 / 4,000 kg) horizontal
- ✓ Tables Ø39.4″, Ø43.3″ and Ø47.2″
- ✓ Rotation 0.1 – 1.2 rpm; tilt 0 – 135°, motorized, 57 s
- ✓ Hand pendant and foot pedal; high-frequency protected
- ✓ 1 – 2 HP (0.75 – 1.5 kW)

OPTIONAL EQUIPMENT

WP-1000 · WP-2000 · WP-3000 — TECHNICAL SPECIFICATIONS

Model	WP-1000	WP-2000	WP-3000
Load, horizontal / vertical	**3,307 / 2,205 lb (1,500 / 1,000 kg)**	**5,512 / 4,409 lb (2,500 / 2,000 kg)**	**8,818 / 5,952 lb (4,000 / 2,700 kg)**
Table / chuck	**Ø39.4″ (1,000 mm) table**	**Ø43.3″ (1,100 mm) table**	**Ø47.2″ (1,200 mm) table**
Table height	41.7″ (1,059 mm)	44″ (1,118 mm)	47.8″ (1,213 mm)
Load centre of gravity, max	12″ from the table centre and 12″ from the table face	12″ from the table centre and 12″ from the table face	12″ from the table centre and 12″ from the table face
Rotation speed	**0.1 – 1.2 rpm**	**0.1 – 1.2 rpm**	**0.1 – 1.2 rpm**
Tilt	**0 – 135°, motorized — 135° in 57 s**	**0 – 135°, motorized — 135° in 57 s**	**0 – 135°, motorized — 135° in 57 s**
Motor	1 HP (0.75 kW)	2 HP (1.5 kW)	2 HP (1.5 kW)
Control	Hand pendant and foot pedal; high-frequency protected	Hand pendant and foot pedal; high-frequency protected	Hand pendant and foot pedal; high-frequency protected
Packing size L × W × H	67 × 51 × 51″ (170 × 130 × 130 cm)	75 × 59 × 51″ (190 × 150 × 130 cm)	79 × 59 × 55″ (200 × 150 × 140 cm)
Weight	**2,579 lb (1,170 kg)**	**3,417 lb (1,550 kg)**	**3,946 lb (1,790 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

WP-1000 · WP-2000 · WP-3000 HEAVY WELDING POSITIONERS, 3,307 – 8,818 LB



Control box of the heavy positioners

HB30 – HB200 · 5 MODELS

HB30 – HB200 HEAVY WELDING POSITIONERS, 6,614 – 44,092 LB



MODEL HB · HB WELDING POSITIONER — TILTING WORKTABLE WITH T-SLOTS, ROTATION GEARBOX AND CONTROL BOX



Heavy HB welding positioners in final assembly

6,614 – 44,092 lb

Heavy tilting positioners for pressure vessels, tank heads, large flanges and weldments: worktables of Ø55.1 to 86.6″ turn at 0.05 – 0.5 or 0.03 – 0.3 rpm by VFD and tilt to 120° by motor through a gear sector, with the load's centre of gravity up to 7.9 – 9.8″ off the axis and 11.8 – 23.6″ above the table.

STANDARD FEATURES

- ✓ 6,614 – 44,092 lb (3 – 20 t)
- ✓ Worktables Ø55.1″ to Ø86.6″ (1,400 – 2,200 mm)
- ✓ Rotation 0.05 – 0.5 rpm (HB30 – HB100) and 0.03 – 0.3 rpm (HB150, HB200), VFD
- ✓ Motorized tilt 0 – 120°, constant speed
- ✓ Options: single or double foot switch, welding chuck, wireless controller

OPTIONAL EQUIPMENT

- + Foot switch, single or double pedal
- + Welding chuck
- + Wireless controller

HB30 – HB200 — TECHNICAL SPECIFICATIONS

Model	HB30	HB50	HB100	HB150	HB200
Rated load	**6,614 lb (3,000 kg)**	**11,023 lb (5,000 kg)**	**22,046 lb (10,000 kg)**	**33,069 lb (15,000 kg)**	**44,092 lb (20,000 kg)**
Eccentric distance, max centre of gravity off the table axis	7.9″ (200 mm)	7.9″ (200 mm)	7.9″ (200 mm)	9.8″ (250 mm)	9.8″ (250 mm)
Centre of gravity distance, max above the worktable	11.8″ (300 mm)	11.8″ (300 mm)	15.7″ (400 mm)	19.7″ (500 mm)	23.6″ (600 mm)
Worktable diameter	**Ø55.1″ (1,400 mm)**	**Ø59.1″ (1,500 mm)**	**Ø70.9″ (1,800 mm)**	**Ø78.7″ (2,000 mm)**	**Ø86.6″ (2,200 mm)**
Tilt	**0 – 120°**	**0 – 120°**	**0 – 120°**	**0 – 120°**	**0 – 120°**
Rotation speed	**0.05 – 0.5 rpm, VFD**	**0.05 – 0.5 rpm, VFD**	**0.05 – 0.5 rpm, VFD**	**0.03 – 0.3 rpm, VFD**	**0.03 – 0.3 rpm, VFD**
Rotation motor	**2 HP (1.5 kW)**	**3 HP (2.2 kW)**	**4 HP (3 kW)**	**5.5 HP (4 kW)**	**7.5 HP (5.5 kW)**
Tilting speed constant	0.3 rpm	0.14 rpm	0.14 rpm	0.14 rpm	0.14 rpm
Tilting motor	3 HP (2.2 kW)	4 HP (3 kW)	5.5 HP (4 kW)	7.5 HP (5.5 kW)	10 HP (7.5 kW)

Metric values in brackets are the manufacturer's figures. Loads are the rated load of the machine (per set of drive and idler sections on turning rolls). Motors are three-phase, rotation speed set by variable-frequency drive (VFD) unless noted.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

HEADSTOCK · HEAD & TAIL LIFTING · FIXED HEAD & TAIL

HEADSTOCK AND TAILSTOCK POSITIONERS, BUILT TO ORDER



MODEL HEADSTOCK · HEADSTOCK WELDING POSITIONER WITH A VERTICAL FACEPLATE



Headstock and tailstock lifting positioner pair



Fixed-height headstock and tailstock positioners

Built to order

Positioners that turn long parts — beams, columns, frames, shafts and vessels — about their own length between a headstock and a tailstock: a headstock on its own, fixed height or elevating (chuck optional); a head and tail pair that lifts, so the work comes down to a comfortable height after turning; and a fixed pair, both units anchored to the floor or the tailstock moving on rails to suit the part length. Load and centre height are built to the part.

STANDARD FEATURES

- ✓ Headstock positioner: fixed height or elevating; chuck optional
- ✓ Head & tail lifting positioner: lowers the work after rotating
- ✓ Fixed head & tail positioner: both fixed, or the tailstock on rails for different lengths
- ✓ Load and centre height built to order

OPTIONAL EQUIPMENT

HEADSTOCK AND TAILSTOCK POSITIONERS — TECHNICAL SPECIFICATIONS

Model	Headstock positioner	Head & tail lifting positioner	Fixed head & tail positioner
Type	Fixed height or elevating; chuck optional on the fixed-height type	Headstock and tailstock that lift; the worktable height is lowered after rotating, for easy operation	Both fixed to the floor, or the headstock fixed and the tailstock moving on rails to suit the part length
Load and height	Load and centre height built to order	Load and centre height built to order	Load and centre height built to order

Built to order: load, size and height are designed for the part — send us a drawing or photo of the work, its weight and the welds.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

L-TYPE · HYDRAULIC 3-AXIS · SPECIAL

L-TYPE, HYDRAULIC 3-AXIS AND SPECIAL WELDING POSITIONERS, BUILT TO ORDER



MODEL L-TYPE · L-TYPE WELDING POSITIONER — MOTOR-TILTED ARM AND A TURNING WORKTABLE



Three-axis hydraulic welding positioner — lift, tilt and rotation



Special welding positioner with a three-jaw welding chuck

Built to order

Positioners designed around the part: the L-type, whose worktable is tilted by motor and turned by VFD; the hydraulic 3-axis positioner, which lifts, rotates and tilts the work hydraulically — smaller, lighter and more compact than a motor-driven positioner of the same power; and special positioners, such as one with a centre hole and a three-jaw welding chuck.

STANDARD FEATURES

- ✓ L-type: motorized tilt, VFD rotation
- ✓ Hydraulic 3-axis: lift, rotation and tilt
- ✓ Special: centre hole, three-jaw welding chuck — or as your part needs

OPTIONAL EQUIPMENT

L-TYPE, HYDRAULIC AND SPECIAL POSITIONERS — TECHNICAL SPECIFICATIONS


Model	L-type positioner	Hydraulic 3-axis positioner	Special positioner
Movements	Worktable tilted by motor; rotation by VFD	Lift, rotation and tilt, all hydraulic	Designed to the customer's requirement
Notes	Designed for the customer's part; tilting positions the work accurately and reliably	Smaller, lighter and more compact than a motor-driven positioner of the same power	Example: positioner with a centre hole and a three-jaw welding chuck

Built to order: load, size and height are designed for the part — send us a drawing or photo of the work, its weight and the welds.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

WPC-200 – WGS540 · 6 MODELS

WPC WELDING CHUCKS AND WGS TORCH HOLDERS FOR THE POSITIONERS

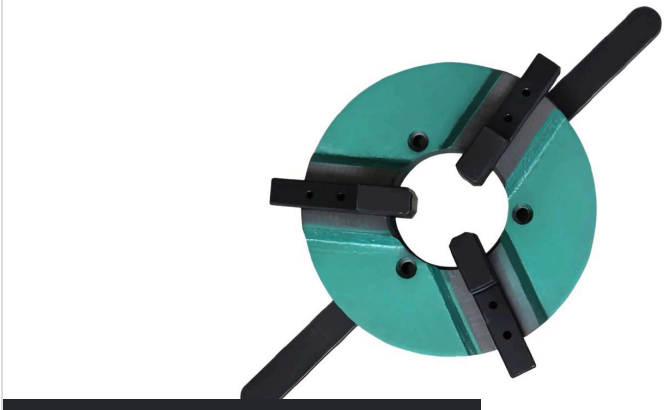

MODEL CHUCKS · WPC 3-JAW WELDING CHUCK



Welding torch holder on a positioner

Chucks and torch holders

Accessories for the positioners: WPC self-centring 3-jaw welding chucks that grip parts from Ø0.4″ inside to Ø15″ outside, and WGS torch holders that clamp the torch on an arm 8.5 to 21.3″ long and a post up to 59″ high, so the bead stays in one place while the part turns.

STANDARD FEATURES

- ✓ WPC-200 / 300 / 400: outside clamping Ø4.3 – 15″, inside Ø0.4 – 9.8″; centre holes Ø3.1 – 6.7″
- ✓ Clamping force 441 – 772 lb; part weight to 529 lb
- ✓ WGS215 / 370 / 540: arms 8.5, 14.6 and 21.3″; posts 11.8 – 59″

OPTIONAL EQUIPMENT

WPC-200 · WPC-300 · WPC-400 — TECHNICAL SPECIFICATIONS

Model	WPC-200	WPC-300	WPC-400
Clamping, outside	**Ø4.3 – 8.3″ (110 – 210 mm)**	**Ø6.7 – 11.8″ (170 – 300 mm)**	**Ø9.8 – 15″ (250 – 380 mm)**
Clamping, inside	**Ø0.4 – 5.1″ (10 – 130 mm)**	**Ø3.1 – 7.5″ (80 – 190 mm)**	**Ø4.7 – 9.8″ (120 – 250 mm)**
Centre hole	Ø3.1″ (80 mm)	Ø3.9″ (100 mm)	Ø6.7″ (170 mm)
Clamping force	441 lb (200 kg)	551 lb (250 kg)	772 lb (350 kg)
Load, max	**66 lb (30 kg)**	**265 lb (120 kg)**	**529 lb (240 kg)**

TECHNICAL SPECIFICATIONS

WPC WELDING CHUCKS AND WGS TORCH HOLDERS FOR THE POSITIONERS

WGS215 · WGS370 · WGS540

Adjustable welding torch holders

Model	WGS215	WGS370	WGS540
Horizontal arm	8.5" (215 mm)	14.6" (370 mm)	21.3" (540 mm)
Vertical post	11.8, 23.6, 39.4, 47.2 or 59" (300, 600, 1,000, 1,200 or 1,500 mm)	11.8, 23.6, 39.4, 47.2 or 59" (300, 600, 1,000, 1,200 or 1,500 mm)	11.8, 23.6, 39.4, 47.2 or 59" (300, 600, 1,000, 1,200 or 1,500 mm)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

DZG1 · DZG3 · 2 MODELS

DZG1 · DZG3 LIGHT WELDING TURNING ROLLS, 2,205 – 6,614 LB



MODEL DZG · LIGHT WELDING TURNING ROLLS — ONE DRIVE ROLL, ONE IDLER ROLL AND A FOOT SWITCH

2,205 – 6,614 lb

Light turning rolls for pipe and small vessels from Ø0.8 to 47.2″: a set is one drive roller and one idler roller with the electrical system and a foot switch, running on 220 V single-phase power at a variable surface speed.

STANDARD FEATURES

- 2,205 lb (DZG1) and 6,614 lb (DZG3) per set
- Work Ø0.8 – 31.5″ (DZG1) and Ø1.2 – 47.2″ (DZG3)
- Surface speed 3.1 – 43.3 and 3.9 – 74.8 in/min
- 120 W and 370 W motors, 220 V single-phase
- Drive roller, idler roller, electrics and foot switch

OPTIONAL EQUIPMENT

DZG1 · DZG3 — TECHNICAL SPECIFICATIONS

Model	DZG1	DZG3
Rated load	**2,205 lb (1,000 kg)**	**6,614 lb (3,000 kg)**
Rotation speed surface speed	**3.1 – 43.3 in/min (80 – 1,100 mm/min)**	**3.9 – 74.8 in/min (100 – 1,900 mm/min)**
Work diameter	**Ø0.8 – 31.5″ (20 – 800 mm)**	**Ø1.2 – 47.2″ (30 – 1,200 mm)**
Motor	**120 W, 220 V**	**370 W (1/2 HP), 220 V**
Wheels Ø × width	Ø9.8 × 2″ (250 × 50 mm)	Ø7.9 × 2″ (200 × 50 mm)
Drive roller, size	19.7 × 11.8 × 15.7″ (500 × 300 × 400 mm)	33.5 × 13 × 17.7″ (850 × 330 × 450 mm)
Idler roller, size	19.7 × 7.9 × 15.7″ (500 × 200 × 400 mm)	33.5 × 13 × 17.7″ (850 × 330 × 450 mm)
Power supply	AC 220 V, 50 / 60 Hz	AC 220 V, 50 / 60 Hz
Set	1 drive roller, 1 idler roller, electrical system and foot switch	1 drive roller, 1 idler roller, electrical system and foot switch

Metric values in brackets are the manufacturer's figures. Loads are the rated load of the machine (per set of drive and idler sections on turning rolls). Motors are three-phase, rotation speed set by variable-frequency drive (VFD) unless noted.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

TRS1000 – TRS5000 · 4 MODELS

TRS WELDING TURNING ROLLS, 2,205 – 11,023 LB PER SET



MODEL TRS · TRS1000 WELDING TURNING ROLLS — DRIVE AND IDLER WITH CONTROL BOX AND FOOT PEDAL



Pipe on welding turning rolls



TRS2200 welding turning rolls

2,205 – 11,023 lb

Turning rolls (welding rotators) turn pipe, tanks and vessels under a fixed torch for circumferential welds, and for cutting, grinding and painting: each set is a drive section with a variable-speed motor, a control box and a foot pedal, and an idler section placed to suit the length of the part. Four sizes carry 2,205 to 11,023 lb per set and work from Ø1-1/2 to 96", at surface speeds up to 56 – 143 in/min.

STANDARD FEATURES

- 2,205 / 2,646 / 4,850 / 11,023 lb (1,000 – 5,000 kg) per set
- Work Ø1-1/2 – 24" (TRS1000) to Ø12 – 96" (TRS5000)
- Surface speed variable, up to 56 – 143 in/min
- One drive and one idler section per set; control box and foot pedal
- Wheels Ø8 – 12"; 150 – 500 W motors

OPTIONAL EQUIPMENT

TRS1000 · TRS1200 · TRS2200 · TRS5000 — TECHNICAL SPECIFICATIONS

Model	TRS1000	TRS1200	TRS2200	TRS5000
Load per set	2,205 lb (1,000 kg)	2,646 lb (1,200 kg)	4,850 lb (2,200 kg)	11,023 lb (5,000 kg)
Work diameter	Ø1-1/2 – 24" (38 – 609 mm)	Ø7.9 – 31.5" (200 – 800 mm)	Ø4 – 60" (101 – 1,524 mm)	Ø12 – 96" (304 – 2,438 mm)
Surface speed	0 – 78 in/min (0 – 1,978 mm/min)	0 – 56 in/min (0 – 1,413 mm/min)	0 – 143 in/min (0 – 3,641 mm/min)	0 – 69 in/min (0 – 1,745 mm/min)
Wheels	Ø8 × 2-9/16" (203 × 65 mm)	Ø8 × 2-9/16" (203 × 65 mm)	Ø10 × 3" (254 × 76 mm)	Ø12 × 4" (305 × 100 mm)
Motor	150 W	250 W	500 W	500 W
Packing size L × W × H	26 × 22 × 20" (65 × 57 × 50 cm)	25 × 26 × 19" (63 × 66 × 48 cm)	40 × 32 × 20" (102 × 82 × 50 cm)	59 × 41 × 28" (150 × 105 × 70 cm)
Weight	198 lb (90 kg)	190 lb (86 kg)	485 lb (220 kg)	717 lb (325 kg)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS


TRS WELDING TURNING ROLLS, 2,205 – 11,023 LB PER SET



TRS5000 welding turning rolls with steel base

DKG2 – DKG100 · 8 MODELS

DKG2 – DKG100 BOLT-ADJUSTABLE WELDING TURNING ROLLS, 4,409 – 220,462 LB

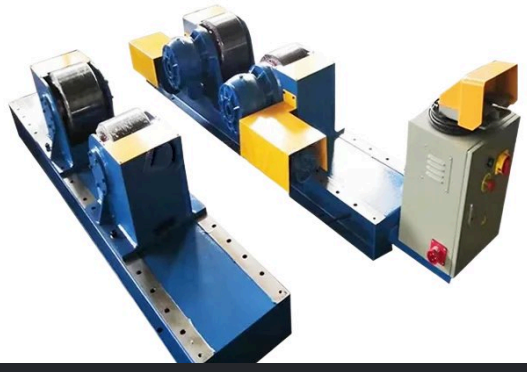

MODEL DKG · DKG BOLT-ADJUSTABLE WELDING TURNING ROLLS — DRIVE AND IDLER SECTIONS



DKG bolt-adjustable turning rolls, drive section

4,409 – 220,462 lb

Conventional turning rolls whose wheel spacing is changed by moving the wheel blocks on bolt positions along the frame, for work from Ø5.9 to 216.5″; both wheels of the drive section are driven, under AC frequency-converter control with a wide speed range. Special turning rolls are designed to the customer's requirement.

STANDARD FEATURES

- 4,409 – 220,462 lb (2 – 100 t) per set
- Work Ø5.9 – 70.9″ (DKG2) to Ø39.4 – 216.5″ (DKG100)
- Polyurethane wheels Ø7.9 – 21.7″
- Surface speed 3.9 – 39.4 in/min (6 – 60 m/h), VFD
- Two drive motors, 2 × 1/4 HP to 2 × 4 HP

OPTIONAL EQUIPMENT

DKG2 – DKG100 — TECHNICAL SPECIFICATIONS

Model	DKG2	DKG5	DKG10	DKG20	DKG40	DKG60	DKG80	DKG100
Rated load per set	**4,409 lb (2,000 kg)**	**11,023 lb (5,000 kg)**	**22,046 lb (10,000 kg)**	**44,092 lb (20,000 kg)**	**88,185 lb (40,000 kg)**	**132,277 lb (60,000 kg)**	**176,370 lb (80,000 kg)**	**220,462 lb (100,000 kg)**
Work diameter	**Ø5.9 – 70.9″ (150 – 1,800 mm)**	**Ø9.8 – 90.6″ (250 – 2,300 mm)**	**Ø12.6 – 110.2″ (320 – 2,800 mm)**	**Ø19.7 – 137.8″ (500 – 3,500 mm)**	**Ø23.6 – 165.4″ (600 – 4,200 mm)**	**Ø29.5 – 189″ (750 – 4,800 mm)**	**Ø33.5 – 196.9″ (850 – 5,000 mm)**	**Ø39.4 – 216.5″ (1,000 – 5,500 mm)**
Polyurethane wheel diameter	Ø7.9″ (200 mm)	Ø9.8″ (250 mm)	Ø11.8″ (300 mm)	Ø13.8″ (350 mm)	Ø15.7″ (400 mm)	Ø17.7″ (450 mm)	Ø19.7″ (500 mm)	Ø21.7″ (550 mm)
Polyurethane wheel width	3.1″ (80 mm)	5.5″ (140 mm)	6.7″ (170 mm)	7.9″ (200 mm)	7.9″ (200 mm)	2 × 7.1″ (2 × 180 mm)	2 × 7.9″ (2 × 200 mm)	2 × 8.7″ (2 × 220 mm)
Linear speed surface speed	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**
Motor	**2 × 1/4 HP (2 × 0.18 kW)**	**2 × 1/2 HP (2 × 0.37 kW)**	**2 × 3/4 HP (2 × 0.55 kW)**	**2 × 1 HP (2 × 0.75 kW)**	**2 × 1.5 HP (2 × 1.1 kW)**	**2 × 2 HP (2 × 1.5 kW)**	**2 × 3 HP (2 × 2.2 kW)**	**2 × 4 HP (2 × 3 kW)**
Speed control	VFD	VFD	VFD	VFD	VFD	VFD	VFD	VFD

Metric values in brackets are the manufacturer's figures. Loads are the rated load of the machine (per set of drive and idler sections on turning rolls). Motors are three-phase, rotation speed set by variable-frequency drive (VFD) unless noted.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DSK2 – DSK100 · 8 MODELS

DSK2 – DSK100 LEAD-SCREW ADJUSTABLE WELDING TURNING ROLLS, 4,409 – 220,462 LB



MODEL DSK · DSK LEAD-SCREW-ADJUSTABLE WELDING TURNING ROLLS WITH HAND WHEELS

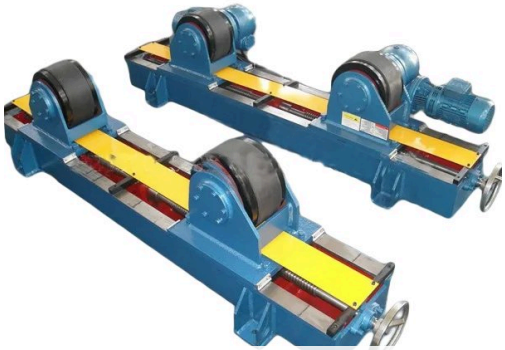

DSK lead-screw-adjustable turning rolls — the roll pairs move on the screw

4,409 – 220,462 lb

The same range as the bolt-adjustable rolls, with the wheel spacing set by a lead screw and hand wheel instead of bolt positions, so the rolls are changed over to a new diameter quickly; AC frequency-converter control. Special turning rolls are designed to the customer's requirement.

STANDARD FEATURES

- ✓ 4,409 – 220,462 lb (2 – 100 t) per set
- ✓ Wheel spacing set by lead screw and hand wheel
- ✓ Work Ø5.9 – 70.9″ (DSK2) to Ø39.4 – 216.5″ (DSK100)
- ✓ Surface speed 3.9 – 39.4 in/min (6 – 60 m/h), VFD
- ✓ Two drive motors, 2 × 1/4 HP to 2 × 4 HP

OPTIONAL EQUIPMENT

DSK2 – DSK100 — TECHNICAL SPECIFICATIONS

Model	DSK2	DSK5	DSK10	DSK20	DSK40	DSK60	DSK80	DSK100
Rated load per set	**4,409 lb (2,000 kg)**	**11,023 lb (5,000 kg)**	**22,046 lb (10,000 kg)**	**44,092 lb (20,000 kg)**	**88,185 lb (40,000 kg)**	**132,277 lb (60,000 kg)**	**176,370 lb (80,000 kg)**	**220,462 lb (100,000 kg)**
Work diameter	**Ø5.9 – 70.9″ (150 – 1,800 mm)**	**Ø9.8 – 90.6″ (250 – 2,300 mm)**	**Ø12.6 – 110.2″ (320 – 2,800 mm)**	**Ø19.7 – 137.8″ (500 – 3,500 mm)**	**Ø23.6 – 165.4″ (600 – 4,200 mm)**	**Ø29.5 – 189″ (750 – 4,800 mm)**	**Ø33.5 – 196.9″ (850 – 5,000 mm)**	**Ø39.4 – 216.5″ (1,000 – 5,500 mm)**
Polyurethane wheel diameter	Ø7.9″ (200 mm)	Ø9.8″ (250 mm)	Ø11.8″ (300 mm)	Ø13.8″ (350 mm)	Ø15.7″ (400 mm)	Ø17.7″ (450 mm)	Ø19.7″ (500 mm)	Ø21.7″ (550 mm)
Polyurethane wheel width	3.1″ (80 mm)	5.5″ (140 mm)	6.7″ (170 mm)	7.9″ (200 mm)	7.9″ (200 mm)	2 × 7.1″ (2 × 180 mm)	2 × 7.9″ (2 × 200 mm)	2 × 8.7″ (2 × 220 mm)
Linear speed surface speed	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**
Motor	**2 × 1/4 HP (2 × 0.18 kW)**	**2 × 1/2 HP (2 × 0.37 kW)**	**2 × 3/4 HP (2 × 0.55 kW)**	**2 × 1 HP (2 × 0.75 kW)**	**2 × 1.5 HP (2 × 1.1 kW)**	**2 × 2 HP (2 × 1.5 kW) or 2 × 3 HP (2 × 2.2 kW)**	**2 × 3 HP (2 × 2.2 kW) or 2 × 4 HP (2 × 3 kW)**	**2 × 4 HP (2 × 3 kW)**
Speed control	VFD	VFD	VFD	VFD	VFD	VFD	VFD	VFD

Metric values in brackets are the manufacturer's figures. Loads are the rated load of the machine (per set of drive and idler sections on turning rolls). Motors are three-phase, rotation speed set by variable-frequency drive (VFD) unless noted.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DZG-5 – DZG-100 · 7 MODELS

DZG-5 – DZG-100 SELF-ALIGNING WELDING TURNING ROLLS, 11,023 – 220,462 LB



MODEL DZG · DZG SELF-ALIGNING WELDING TURNING ROLLS — THE WHEEL PAIRS SWING TO THE VESSEL DIAMETER



DZG self-aligning turning rolls with their control boxes

11,023 – 220,462 lb

Self-aligning turning rolls: the wheel pairs swing on their bogies and set their angle to the vessel's diameter by themselves, so one set carries work from Ø9.8 to 216.5″ without resetting — the turning rolls of pressure vessel and pipeline makers, for handling and for automatic welding. Quiet, gentle turning with the speed set by VFD.

STANDARD FEATURES

- 11,023 – 220,462 lb (5 – 100 t) per set
- Work Ø9.8 – 90.6″ (DZG-5) to Ø39.4 – 216.5″ (DZG-100)
- Polyurethane wheels Ø9.8 – 19.7″; twin wheels on the DZG-80 and DZG-100
- Surface speed 3.9 – 39.4 in/min (6 – 60 m/h), VFD
- 1 – 7.5 HP (0.75 – 5.5 kW)

OPTIONAL EQUIPMENT

DZG-5 – DZG-100 — TECHNICAL SPECIFICATIONS

Model	DZG-5	DZG-10	DZG-20	DZG-40	DZG-60	DZG-80	DZG-100
Rated load per set	**11,023 lb (5,000 kg)**	**22,046 lb (10,000 kg)**	**44,092 lb (20,000 kg)**	**88,185 lb (40,000 kg)**	**132,277 lb (60,000 kg)**	**176,370 lb (80,000 kg)**	**220,462 lb (100,000 kg)**
Work diameter	**Ø9.8 – 90.6″ (250 – 2,300 mm)**	**Ø12.6 – 110.2″ (320 – 2,800 mm)**	**Ø19.7 – 137.8″ (500 – 3,500 mm)**	**Ø23.6 – 165.4″ (600 – 4,200 mm)**	**Ø29.5 – 189″ (750 – 4,800 mm)**	**Ø33.5 – 196.9″ (850 – 5,000 mm)**	**Ø39.4 – 216.5″ (1,000 – 5,500 mm)**
Polyurethane wheel diameter	Ø9.8″ (250 mm)	Ø11.8″ (300 mm)	Ø13.8″ (350 mm)	Ø15.7″ (400 mm)	Ø17.7″ (450 mm)	Ø19.7″ (500 mm)	Ø19.7″ (500 mm)
Polyurethane wheel width	3.9″ (100 mm)	4.7″ (120 mm)	5.9″ (150 mm)	6.3″ (160 mm)	7.1″ (180 mm)	2 × 7.1″ (2 × 180 mm)	2 × 7.1″ (2 × 180 mm)
Linear speed surface speed	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**	**3.9 – 39.4 in/min (6 – 60 m/h)**
Motor	**1 HP (0.75 kW)**	**1.5 HP (1.1 kW)**	**2 HP (1.5 kW)**	**4 HP (3 kW)**	**5.5 HP (4 kW)**	**5.5 HP (4 kW)**	**7.5 HP (5.5 kW)**
Speed control	VFD	VFD	VFD	VFD	VFD	VFD	VFD

Metric values in brackets are the manufacturer's figures. Loads are the rated load of the machine (per set of drive and idler sections on turning rolls). Motors are three-phase, rotation speed set by variable-frequency drive (VFD) unless noted.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

GGLJ PINCH-TYPE · HYDRAULIC FIT-UP

GGLJ PINCH-TYPE PIPE ROTATORS AND HYDRAULIC FIT-UP ROTATORS, BUILT TO ORDER



MODEL PIPE · GGLJ PINCH-TYPE PIPE ROTATOR TURNING AN ELBOW FOR FLANGE AND SEGMENT WELDING

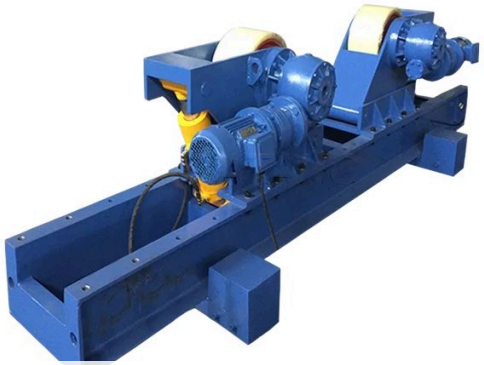

Hydraulic fit-up turning rolls — the lifting rolls align two shell sections

Built to order

Two rotators for jobs plain turning rolls do not do. The GGLJ pinch-type rotator holds a pipe between a driven lower roll and an upper roll and turns it around and over within an angle, for joining pipe segments and welding flanges, at 3.9 – 39.4 in/min set by VFD, for manual or automatic welding. The hydraulic fit-up rotator lines up two shell sections for the joint: two hydraulic swing-arm lifting rollers raise, lower and shift each section slightly until the seam is aligned, then the drive roller turns both for welding.

STANDARD FEATURES

- ✓ GGLJ: pinch rolls for pipe, elbows and flanges; 3.9 – 39.4 in/min (6 – 60 m/h), VFD
- ✓ Fit-up: 1 drive, 2 idler and 2 hydraulic lifting rollers on rails; the drive roller travels electrically
- ✓ Roller positions changed to suit the diameter; built to order

OPTIONAL EQUIPMENT

PIPE AND FIT-UP ROTATORS — TECHNICAL SPECIFICATIONS

Model	GGLJ pinch-type pipe rotator	Hydraulic fit-up rotator
Use	Turns pipe around and over within an angle, for joining pipe segments and welding flanges	Brings two shell sections into line for the joint, then turns them for welding
Rolls	The lower roll drives; an upper roll pinches the pipe	1 drive roller, 2 idler rollers and 2 hydraulic swing-arm lifting rollers
Speed	3.9 – 39.4 in/min (6 – 60 m/h), stepless by VFD	From the drive roller
Adjustment	—	All rollers move on rails — the drive roller electrically, the others by hand — to suit the diameter; the lifting rollers rise and fall by hydraulic pump with small left and right adjustment
Welding	Manual and automatic welding	—

Built to order: load, size and height are designed for the part — send us a drawing or photo of the work, its weight and the welds.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

WTR450 – PTR-1090A · 16 MODELS


PIPE STANDS, PIPE SUPPORTS AND PIPE JACKS FOR WELDING, TO 19,800 LB



MODEL PIPE · MR3000A PIPE STAND WITH DOUBLE HEIGHT ADJUSTMENT



Outboard support stand with screw height adjustment



MR7000D pipe stand with three-point legs

To 19,800 lb

Supports that hold the far end of a long pipe or vessel while it turns on a positioner or on turning rolls, and stands for fit-up and cutting: WTR outboard support stands with screw height adjustment for 992 – 9,921 lb; MR pipe stands with roller heads for 6,600 – 15,400 lb and Ø4 – 60" pipe, the MR3000A with double height adjustment and the MR7000D on three-point legs; MH5500 and MH9000 pipe supports; and folding pipe jacks with V, ball-transfer or roller heads and low PTR roller stands.

STANDARD FEATURES

- ✓ WTR450 / 2250 / 4500 outboard supports: 992 – 9,921 lb, Ø2 – 48", 8" screw height travel
- ✓ MR pipe stands: 6,600 – 15,400 lb, Ø4 – 60" pipe, polyurethane-covered steel wheels
- ✓ MH5500 / MH9000 pipe supports: 12,100 and 19,800 lb, 60" and 72" wide
- ✓ Folding pipe jacks: V-head 2,400 lb, ball-transfer and roller heads 1,000 lb, 28 – 51" high
- ✓ PTR roller stands for Ø1/2 – 36" pipe, 7-1/4 – 43" high, 1,100 lb

OPTIONAL EQUIPMENT

WTR450 · WTR2250 · WTR4500 — TECHNICAL SPECIFICATIONS

Model	WTR450	WTR2250	WTR4500
Load, max	**992 lb (450 kg)**	**4,960 lb (2,250 kg)**	**9,921 lb (4,500 kg)**
Work diameter	**Ø2 – 36" (50 – 915 mm)**	**Ø2 – 36" (50 – 916 mm)**	**Ø10 – 48" (254 – 1,219 mm)**
Wheels	Ø8 × 2-9/16" (203 × 65 mm)	Ø8 × 2-9/16" (203 × 65 mm)	Ø12 × 4" (305 × 100 mm)
Height	**25.7" (652 mm) min., screw travel 8" (205 mm)**	**28" (712 mm) min., screw travel 8" (205 mm)**	**34.9" (887 mm) min., screw travel 8" (205 mm)**
Packing size L × W × H	30 × 21 × 31" (77 × 54 × 79 cm)	31 × 21 × 33" (80 × 54 × 85 cm)	46 × 27 × 39" (116 × 68 × 100 cm)
Weight	**121 lb (55 kg)**	**143 lb (65 kg)**	**551 lb (250 kg)**

DETAILS, COMPONENTS AND OPTIONS

PIPE STANDS, PIPE SUPPORTS AND PIPE JACKS FOR WELDING, TO 19,800 LB



MH5500 pipe support



Folding pipe jack with V-head



PTR-185 low pipe roller stand

TECHNICAL SPECIFICATIONS

PIPE STANDS, PIPE SUPPORTS AND PIPE JACKS FOR WELDING, TO 19,800 LB

MR3000 · MR3000A · MR5000 · MR7000D · MH5500 · MH9000

Pipe stands and pipe supports, 6,600 – 19,800 lb

Model	MR3000	MR3000A	MR5000	MR7000D	MH5500	MH9000
Load, max	6,600 lb (3,000 kg)	6,600 lb (3,000 kg)	11,000 lb (5,000 kg)	15,400 lb (7,000 kg)	12,100 lb (5,500 kg)	19,800 lb (9,000 kg)
Work diameter	Ø4 – 48″ (101 – 1,219 mm)	Ø4 – 48″ (101 – 1,219 mm)	Ø4 – 60″ (101 – 1,524 mm)	Ø4 – 60″ (101 – 1,524 mm)	60″ (1,524 mm) wide	72″ (1,830 mm) wide
Wheels	Ø8″ (203 mm), polyurethane-covered steel	Ø8″ (203 mm), polyurethane-covered steel	Ø12″ (304 mm), polyurethane-covered steel	Ø12″ (304 mm), polyurethane-covered steel	–	–
Height	34 – 42″ (865 – 1,070 mm)	41 – 49″ (1,054 – 1,259 mm), double height adjustment	31 – 44″ (800 – 1,122 mm)	34 – 47″ (876 – 1,192 mm), three-point legs	36″ (915 mm)	18″ (460 mm)
Packing size L × W × H	54 × 39 × 38″ (137 × 100 × 96 cm)	54 × 39 × 45″ (137 × 100 × 115 cm)	64 × 39 × 39″ (163 × 100 × 100 cm)	70 × 39 × 42″ (177 × 100 × 107 cm)	64 × 39 × 42″ (163 × 98 × 107 cm)	76 × 28 × 24″ (194 × 71 × 61 cm)
Weight	265 lb (120 kg)	320 lb (145 kg)	507 lb (230 kg)	860 lb (390 kg)	198 lb (90 kg)	280 lb (127 kg)

PJV-1100 · PJV-450B · PJ-450SW · PTR-185 · PTR-610 · PTR-800 · PTR-1090A

Folding pipe jacks and pipe roller stands

Model	PJV-1100	PJV-450B	PJ-450SW	PTR-185	PTR-610	PTR-800	PTR-1090A
Head	V-head	Ball-transfer head	Roller head with steel wheels	Two rollers	Two rollers	Two rollers	Two rollers
Load, max	2,400 lb (1,100 kg)	1,000 lb (450 kg)	1,000 lb (450 kg)	1,100 lb (500 kg)	1,100 lb (500 kg)	1,100 lb (500 kg)	1,100 lb (500 kg)
Height	28 – 51″ (710 – 1,300 mm)	28 – 51″ (710 – 1,300 mm)	28 – 51″ (710 – 1,300 mm)	7-1/4″ (185 mm)	24″ (610 mm)	31″ (800 mm)	29 – 43″ (740 – 1,090 mm)
Pipe size	–	–	–	Ø1/2 – 36″ (12 – 910 mm)	Ø1/2 – 36″ (12 – 910 mm)	Ø1/2 – 36″ (12 – 910 mm)	Ø1/2 – 36″ (12 – 910 mm)
Packing size L × W × H	31 × 10 × 8″ (80 × 25 × 20 cm)	31 × 10 × 8″ (80 × 25 × 20 cm)	31 × 10 × 8″ (80 × 25 × 20 cm)	–	–	–	–
Weight	31 lb (14 kg)	33 lb (15 kg)	31 lb (14 kg)	46 lb (21 kg)	71 lb (32 kg)	73 lb (33 kg)	73 lb (33 kg)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

DLH0810 – DLH2020 · 4 MODELS

DLH0810 – DLH2020 SMALL COLUMN AND BOOM MANIPULATORS, 31.5 – 78.7" LIFT



MODEL DLH · SMALL COLUMN AND BOOM WELDING MANIPULATOR



Small column and boom manipulator with a welding head

Lift 31.5 – 78.7"

Small column and boom manipulators carry the welding head on a boom that rises 31.5 to 78.7" up the column and reaches out 39.4 to 78.7", feeding at the welding speed of 4.7 – 47.2 in/min; the column turns ±180° by hand and the trolley is moved by hand. Fixed, fixed with rotation or travelling with rotation; the boom welds inside and outside seams of small tanks and the longitudinal and circumferential seams of large ones.

STANDARD FEATURES

- ✓ Vertical travel 31.5 – 78.7" (800 – 2,000 mm); boom travel 39.4 – 78.7" (1,000 – 2,000 mm)
- ✓ Boom feed 4.7 – 47.2 in/min (0.12 – 1.2 m/min); elevating 3.3 ft/min (1 m/min)
- ✓ Column rotation ±180°, by hand; trolley moved by hand on a 39.4" (1,000 mm) gauge
- ✓ Options: arc auto-tracking, TV monitor, flux recovery

OPTIONAL EQUIPMENT

- \+ Arc auto-tracking
- \+ TV monitor
- \+ Flux recovery and conveying system

DLH0810 – DLH2020 — TECHNICAL SPECIFICATIONS

Model	DLH0810	DLH1015	DLH1520	DLH2020
Vertical travel boom elevation stroke	**31.5" (800 mm)**	**39.4" (1,000 mm)**	**59.1" (1,500 mm)**	**78.7" (2,000 mm)**
Boom travel horizontal stroke	**39.4" (1,000 mm)**	**59.1" (1,500 mm)**	**78.7" (2,000 mm)**	**78.7" (2,000 mm)**
Column rotation	±180°	±180°	±180°	±180°
Column rotation speed	**Manual**	**Manual**	**Manual**	**Manual**
Boom elevating speed	3.3 ft/min (1 m/min)	3.3 ft/min (1 m/min)	3.3 ft/min (1 m/min)	3.3 ft/min (1 m/min)
Boom feed speed welding speed	**4.7 – 47.2 in/min (0.12 – 1.2 m/min)**	**4.7 – 47.2 in/min (0.12 – 1.2 m/min)**	**4.7 – 47.2 in/min (0.12 – 1.2 m/min)**	**4.7 – 47.2 in/min (0.12 – 1.2 m/min)**
Carriage travel speed	Manual	Manual	Manual	Manual
Rail gauge trolley	39.4" (1,000 mm)	39.4" (1,000 mm)	39.4" (1,000 mm)	39.4" (1,000 mm)

Metric values in brackets are the manufacturer's figures. Loads are the rated load of the machine (per set of drive and idler sections on turning rolls). Motors are three-phase, rotation speed set by variable-frequency drive (VFD) unless noted.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DLH2030 · DLH3040 · DLH4050 · 3 MODELS

DLH2030 · DLH3040 · DLH4050 MEDIUM COLUMN AND BOOM MANIPULATORS, 78.7 – 157.5" LIFT



MODEL DLH · MEDIUM COLUMN AND BOOM WELDING MANIPULATOR WITH FLUX RECOVERY

Lift 78.7 – 157.5"

Medium column and boom manipulators for tanks and pressure vessels: the boom rises 78.7 to 157.5" and reaches 118.1 to 196.9", the column turns ±180° at 0.3 rpm and the carriage travels its rails at 8.2 ft/min. Fixed, fixed with rotation or travelling with rotation; the boom welds inside and outside seams of small tanks and the longitudinal and circumferential seams of large ones.

STANDARD FEATURES

- ✓ Vertical travel 78.7 – 157.5" (2,000 – 4,000 mm); boom travel 118.1 – 196.9" (3,000 – 5,000 mm)
- ✓ Boom feed 4.7 – 47.2 in/min; elevating 3.3 ft/min
- ✓ Motorized column rotation ±180°, 0.3 rpm; carriage 8.2 ft/min (2.5 m/min) on a 70.9" (1,800 mm) gauge
- ✓ Options: arc auto-tracking, TV monitor, flux recovery

OPTIONAL EQUIPMENT

- \+ Arc auto-tracking
- \+ TV monitor
- \+ Flux recovery and conveying system

DLH2030 · DLH3040 · DLH4050 — TECHNICAL SPECIFICATIONS

Model	DLH2030	DLH3040	DLH4050
Vertical travel boom elevation stroke	**78.7" (2,000 mm)**	**118.1" (3,000 mm)**	**157.5" (4,000 mm)**
Boom travel horizontal stroke	**118.1" (3,000 mm)**	**157.5" (4,000 mm)**	**196.9" (5,000 mm)**
Column rotation	±180°	±180°	±180°
Column rotation speed	**0.3 rpm**	**0.3 rpm**	**0.3 rpm**
Boom elevating speed	3.3 ft/min (1 m/min)	3.3 ft/min (1 m/min)	3.3 ft/min (1 m/min)
Boom feed speed welding speed	**4.7 – 47.2 in/min (0.12 – 1.2 m/min)**	**4.7 – 47.2 in/min (0.12 – 1.2 m/min)**	**4.7 – 47.2 in/min (0.12 – 1.2 m/min)**
Carriage travel speed	8.2 ft/min (2.5 m/min)	8.2 ft/min (2.5 m/min)	8.2 ft/min (2.5 m/min)
Rail gauge trolley	70.9" (1,800 mm)	70.9" (1,800 mm)	70.9" (1,800 mm)

Metric values in brackets are the manufacturer's figures. Loads are the rated load of the machine (per set of drive and idler sections on turning rolls). Motors are three-phase, rotation speed set by variable-frequency drive (VFD) unless noted.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DLH5060 · DLH6070 · DLH7080 · 3 MODELS

DLH5060 · DLH6070 · DLH7080 HEAVY COLUMN AND BOOM MANIPULATORS, 196.9 – 275.6″ LIFT



MODEL DLH · HEAVY COLUMN AND BOOM WELDING MANIPULATOR ON A TRAVELLING CARRIAGE

Lift 196.9 – 275.6″

Heavy column and boom manipulators for large vessels, wind towers and big tanks: the boom rises 196.9 to 275.6″ and reaches 236.2 to 315″, the column turns ±180° at 0.3 rpm and the carriage travels at 6.6 ft/min on a 78.7″ gauge. Fixed, fixed with rotation or travelling with rotation; the boom welds inside and outside seams of small tanks and the longitudinal and circumferential seams of large ones.

STANDARD FEATURES

- ✓ Vertical travel 196.9 – 275.6″ (5,000 – 7,000 mm); boom travel 236.2 – 315″ (6,000 – 8,000 mm)
- ✓ Boom feed 4.7 – 47.2 in/min; elevating 3.3 ft/min
- ✓ Motorized column rotation ±180°, 0.3 rpm; carriage 6.6 ft/min (2 m/min) on a 78.7″ (2,000 mm) gauge
- ✓ Options: arc auto-tracking, TV monitor, flux recovery

OPTIONAL EQUIPMENT

- + Arc auto-tracking
- + TV monitor
- + Flux recovery and conveying system

DLH5060 · DLH6070 · DLH7080 — TECHNICAL SPECIFICATIONS

Model	DLH5060	DLH6070	DLH7080
Vertical travel boom elevation stroke	**196.9″ (5,000 mm)**	**236.2″ (6,000 mm)**	**275.6″ (7,000 mm)**
Boom travel horizontal stroke	**236.2″ (6,000 mm)**	**275.6″ (7,000 mm)**	**315″ (8,000 mm)**
Column rotation	±180°	±180°	±180°
Column rotation speed	**0.3 rpm**	**0.3 rpm**	**0.3 rpm**
Boom elevating speed	3.3 ft/min (1 m/min)	3.3 ft/min (1 m/min)	3.3 ft/min (1 m/min)
Boom feed speed welding speed	**4.7 – 47.2 in/min (0.12 – 1.2 m/min)**	**4.7 – 47.2 in/min (0.12 – 1.2 m/min)**	**4.7 – 47.2 in/min (0.12 – 1.2 m/min)**
Carriage travel speed	6.6 ft/min (2 m/min)	6.6 ft/min (2 m/min)	6.6 ft/min (2 m/min)
Rail gauge trolley	78.7″ (2,000 mm)	78.7″ (2,000 mm)	78.7″ (2,000 mm)

Metric values in brackets are the manufacturer's figures. Loads are the rated load of the machine (per set of drive and idler sections on turning rolls). Motors are three-phase, rotation speed set by variable-frequency drive (VFD) unless noted.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

WT-36X24 · 1 MODEL

WT-36X24 MOBILE WELDING TABLE WITH CNC HOLE PATTERN



MODEL WT-36X24 · WT-36X24 MOBILE WELDING TABLE WITH CNC HOLE PATTERN AND DROP-DOWN TRAY

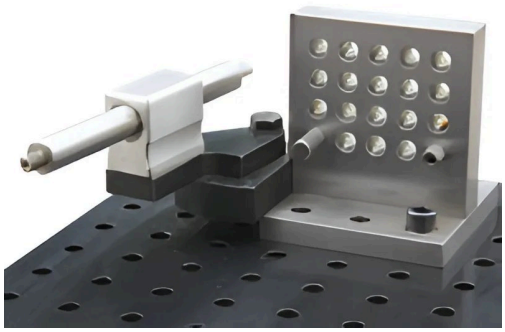

Tube notcher and fixtures on the welding table

36 × 24″ top

A mobile fixture table for the fabrication shop: a 36 × 24 × 5/8″ top, flat to 0.006″, with 216 holes of 5/8″ on a 2″ grid for clamps and fixtures, reversible and nitrided with a black-oxide finish against spatter and rust. It carries 1,500 lb and comes with a tube and pipe notcher, a drop-down working tray, shelves, leveling feet and casters.

STANDARD FEATURES

- Top 36 × 24 × 5/8″ (910 × 610 × 16 mm), flat to 0.006″ (0.15 mm)
- 216 holes Ø5/8″ (16 mm) on a 2″ (50 mm) grid
- Reversible top; nitrided black-oxide finish
- 1,500 lb (680 kg) load; leveling feet and casters
- Tube and pipe notcher, drop-down tray and shelves standard

OPTIONAL EQUIPMENT

WT-36X24 — TECHNICAL SPECIFICATIONS

Model	WT-36X24
Table top	**36 × 24 × 5/8″ (910 × 610 × 16 mm), flat to 0.006″ (0.15 mm), reversible, nitrided black-oxide finish**
Holes	**216 × Ø5/8″ (16 mm) on a 2″ (50 mm) grid**
Load, max	**1,499 lb (680 kg)**
Standard	Tube and pipe notcher, drop-down working tray, shelves, leveling feet and casters
Packing size L × W × H	40 × 28 × 43″ (102 × 72 × 108 cm)
Weight	**375 lb (170 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

MDT-4840 · MDT-6137 · MDT-6022 · 3 MODELS

MDT DOWNDRAFT TABLES FOR GRINDING, SANDING AND WELDING FUMES, 1,350 – 3,700 CFM



MODEL MDT · MDT-4840 DOWNDRAFT TABLE WITH THREE-STAGE FILTRATION



MDT-6137 downdraft table



MDT-6022 downdraft grinding table

1,350 – 3,700 CFM

Downdraft tables pull grinding dust, sanding dust and welding fumes down through the perforated top before they reach the operator. The MDT-4840 and MDT-6137 draw 1,350 CFM through three filter stages — an aluminum pre-filter, a cartridge filter and a HEPA filter — with compressed-air cleaning of the cartridges on the MDT-4840; the MDT-6022 is a 61 × 20″ grinding table with two fans moving 3,700 CFM through four panel filters.

STANDARD FEATURES

- MDT-4840: 46 × 38.7″ table; MDT-6137: 61 × 36.8″; MDT-6022: 61-3/16 × 20″
- 1,350 CFM with 3-stage filtration G2 / F7 / H13 (MDT-4840, MDT-6137)
- MDT-6022: 3,700 CFM through four panel filters; 1/8″ steel inserts; 78 dB or less
- Table loads 441 – 1,543 lb
- Motors 3/4 – 4 HP (0.55 – 3 kW)

OPTIONAL EQUIPMENT

MDT-4840 · MDT-6137 · MDT-6022 — TECHNICAL SPECIFICATIONS


Model	MDT-4840	MDT-6137	MDT-6022
Table	**46 × 38.7″ (1,168 × 982 mm)**	**61 × 36.8″ (1,550 × 935 mm)**	**61-3/16 × 20″ (1,555 × 510 mm)**
Air flow	**1,350 CFM at the base**	**1,350 CFM at the base**	**3,700 CFM (2 × 1,850 CFM)**
Filtration	**3 stages: aluminum pre-filter (G2), cartridge (F7), HEPA (H13)**	**3 stages: aluminum pre-filter (G2), cartridge (F7), HEPA (H13)**	**4 panel filters 19 × 15 × 1″, 300 micron**
Motor	2 HP (1.5 kW)	4 HP (3 kW)	3/4 HP (0.55 kW)
Table load, max	1,543 lb (700 kg)	1,543 lb (700 kg)	441 lb (200 kg)
Table height	38.8″ (985 mm)	38.8″ (985 mm)	29.5″ (750 mm)
Other	Compressed air 60 – 90 psi (4.1 – 6.2 bar) for filter cleaning	—	1/8″ steel table inserts, two swarf trays, ≤78 dB
Packing size L × W × H	61 × 46 × 82″ (156 × 117 × 208 cm)	79 × 46 × 80″ (201 × 117 × 203 cm)	70 × 30 × 39″ (178 × 75 × 100 cm)
Weight	**783 lb (355 kg)**	**1,036 lb (470 kg)**	**331 lb (150 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

MDT DOWNDRAFT TABLES FOR GRINDING, SANDING AND WELDING FUMES, 1,350 – 3,700 CFM

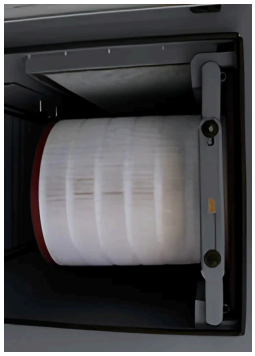

Cartridge filter of the downdraft table

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.