NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH VALUE LINE · BUILT IN CHINA TO NORTH AMERICAN STANDARDS · SOLD & SERVICED IN CANADA BY NOVOTECH

WOODWORKING MACHINERY

JOINTERS, THICKNESS PLANERS AND JOINTER-PLANERS · TABLE SAWS AND BAND SAWS · SLOT BORING MACHINES · WOOD LATHE · DUST COLLECTOR







China
MADE IN CHINA

8
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

VALUE-LINE WOODWORKING MACHINERY

CONTENTS

JOINTERS, THICKNESS PLANERS AND JOINTER-PLANERS

WJ jointers with spiral cutterhead, 6″ and 8″, and WJ10X40 10″ surface planer WJ-6x55 · WJ-8x76 · WJ10X40 · 3 models 04

TDM jointer-planer combinations, 10 – 16″ planing, thicknessing to 9″ TDM-260 · TDM-320 · TDM-410 · 3 models 07

WJP thickness planers with spiral cutterhead, 15″ and 20″ WJP-15B · WJP-15 · WJP-20 · 3 models 09

TABLE SAWS AND BAND SAWS

WTS10 10″ cabinet table saws, 30″ and 52″ rip — touch-screen S models WTS10-30 – WTS10-50S · 4 models 11

TBS-356 · TBS-457 band saws for wood, 14″ and 18″ TBS-356 · TBS-457 · 2 models 13

SLOT MORTISERS AND BORING MACHINES

MGX slot boring machines and WM-01 horizontal boring machine MGX16 · MGX20R · WM-01 · 3 models 14

WOOD LATHE

TL-406 12 × 16″ wood lathe TL-406 · 1 model 15

DUST COLLECTOR

DC900 dust collector, 940 CFM DC900 · 1 model 16

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR VALUE-LINE WOODWORKING MACHINERY

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

NOVOTECH VALUE LINE

MACHINES FOR THE CABINET, FURNITURE AND MILLWORK SHOP

NovoTech's value line is our own brand: machines built in China to our specification by a maker that exports metalworking machinery to more than 70 countries, inspected before they ship and sold under NovoTech's name with a CSA-approved panel on every 3-phase machine, a 1-year warranty and parts and technical support from Mississauga, Ontario, Canada.

Rough lumber is milled in a fixed order: the jointer flattens a face and squares an edge, the thickness planer brings the board to thickness, the table saw rips and crosscuts it and the band saw cuts curves and resaws. Slot boring machines cut the joinery, the wood lathe turns, and the dust collector keeps the shop clean.

WJ-6X55 · WJ-8X76 · WJ10X40 · 3 MODELS

WJ JOINTERS WITH SPIRAL CUTTERHEAD, 6" AND 8", AND WJ10X40 10" SURFACE PLANER



MODEL WJ · WJ-8X76 8" JOINTER WITH SPIRAL CUTTERHEAD ON CABINET STAND



WJ-6x55 6" jointer with spiral cutterhead on cabinet stand



Spiral cutterhead with indexable carbide inserts

6 – 10"

Jointers flatten one face of a rough board and square an edge to it before the board goes through the thickness planer. The WJ-6x55 and WJ-8x76 have spiral cutterheads with indexable carbide inserts — quieter, a cleaner surface on figured wood, and an insert turned to a fresh edge instead of a set of knives to regrind — long tables of 55-1/2" and 76" and a 36" fence that tilts 45 – 135°. The WJ10X40 is a 10" surface planer with a straight three-knife cutterhead at 6,500 rpm.

STANDARD FEATURES

- WJ-6x55: 6" cut, 55-1/2" tables; WJ-8x76: 8" cut, 76" tables
- Spiral cutterhead with indexable carbide inserts, 4,800 rpm
- Fence 36 × 5", tilts 45 – 135° with stops at 45°, 90° and 135°
- Cutting depth to 1/8" (3 mm)
- WJ10X40: 10" (260 mm) surface planer, three knives, 6,500 rpm, 3 HP

OPTIONAL EQUIPMENT

WJ-6X55 · WJ-8X76 — TECHNICAL SPECIFICATIONS

Model	WJ-6x55	WJ-8x76
Cutting width	**6" (153 mm)**	**8" (200 mm)**
Cutting depth, max	1/8" (3 mm)	1/8" (3 mm)
Stock, min	8" (200 mm) long, 1/2" (12 mm) thick	10" (254 mm) long, 1/2" (12 mm) thick
Cutterhead	**Spiral, 15 × 15 × 2.5 mm indexable carbide inserts, 4,800 rpm**	**Spiral, 14 × 14 × 2 mm indexable carbide inserts, 4,800 rpm**
Fence	36 × 5" (915 × 127 mm), tilts 45 – 135° with stops at 45°, 90° and 135°	36 × 5" (915 × 127 mm), tilts 45 – 135° with stops at 45°, 90° and 135°
Tables L × W	**55-1/2 × 6" (1,410 × 153 mm)**	**76 × 8" (1,930 × 203 mm)**
Packing size L × W × H	33 × 20 × 32" (83 × 50 × 82 cm) stand + 67 × 22 × 13" (170 × 57 × 34 cm) body	41 × 21 × 32" (103 × 54 × 82 cm) stand + 81 × 24 × 13" (206 × 62 × 34 cm) body
Weight	**397 lb (180 kg)**	**507 lb (230 kg)**

DETAILS, COMPONENTS AND OPTIONS

WJ JOINTERS WITH SPIRAL CUTTERHEAD, 6" AND 8", AND WJ10X40 10" SURFACE PLANER



WJ10X40 10" surface planer

TECHNICAL SPECIFICATIONS

WJ JOINTERS WITH SPIRAL CUTTERHEAD, 6" AND 8", AND WJ10X40 10" SURFACE PLANER

WJ10X40

Surface planer, 10"

Model	WJ10X40
Cutting width	**10" (260 mm)**
Cutting depth, max	3/16" (5 mm)
Cutterhead	**Straight, 3 knives, 6,500 rpm**
Fence	Tilts 0 – 45°
Tables L × W	**41-5/16" (1,050 mm) long**
Motor	3 HP (2.2 kW)
Packing size L × W × H	44 × 22 × 37" (113 × 55 × 93 cm)
Weight	**348 lb (158 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

TDM-260 · TDM-320 · TDM-410 · 3 MODELS

TDM JOINTER-PLANER COMBINATIONS, 10 – 16″ PLANING, THICKNESSING TO 9″



MODEL TDM · TDM-320 SURFACE PLANER AND THICKNESSER



TDM-260 surface planer and thicknesser



Planer-thicknesser opened for thicknessing

10 – 16″ planing

Two machines on one cutterblock: lift the infeed and outfeed tables and the jointer becomes a thickness planer, with a spiral-toothed infeed roller that feeds the board at 20 ft/min under the same cutterblock. Planing widths of 10.2″, 12.6″ and 16.1″ and thicknessing from 1/8″ up to 6.3 – 9.1″, on a closed steel stand with a fence that tilts 90 – 45° — the space-saving choice for the small shop.

STANDARD FEATURES

- ✓ Planing width 10.2″ (TDM-260), 12.6″ (TDM-320), 16.1″ (TDM-410)
- ✓ Thicknessing 0.12 – 6.3″ to 0.12 – 9.1″ (3 – 230 mm)
- ✓ Tables 41.3 – 70.9″ long; fence tilts 90 – 45°
- ✓ Feed 20 ft/min (6 m/min); spiral-toothed infeed roller
- ✓ 3 – 4 HP (2.2 – 3 kW)

OPTIONAL EQUIPMENT

TDM-260 · TDM-320 · TDM-410 — TECHNICAL SPECIFICATIONS

Model	TDM-260	TDM-320	TDM-410
Planing width	**10.2″ (260 mm)**	**12.6″ (320 mm)**	**16.1″ (410 mm)**
Table length	41.3″ (1,050 mm)	59″ (1,500 mm)	70.9″ (1,800 mm)
Cutting depth, max	1/8″ (3 mm)	3/16″ (5 mm)	3/16″ (5 mm)
Thicknessing height	**0.12 – 6.3″ (3 – 160 mm)**	**0.12 – 9.1″ (3 – 230 mm)**	**0.12 – 8.9″ (3 – 225 mm)**
Feed speed	20 ft/min (6 m/min)	20 ft/min (6 m/min)	20 ft/min (6 m/min)
Fence	Tilts 90 – 45°	43 × 6″ (1,100 × 150 mm), tilts 90 – 45°	Tilts 90 – 45°
Motor	**3 HP (2.2 kW)**	**3 HP (2.2 kW)**	**4 HP (3 kW)**
Packing size L × W × H	46 × 23 × 37″ (118 × 59 × 95 cm)	63 × 24 × 39″ (160 × 62 × 98 cm)	72 × 26 × 39″ (183 × 67 × 98 cm)
Weight	**437 lb (198 kg)**	**628 lb (285 kg)**	**926 lb (420 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

TDM JOINTER-PLANER COMBINATIONS, 10 – 16" PLANING, THICKNESSING TO 9"



Spiral-toothed infeed roller and cutterblock

WJP-15B · WJP-15 · WJP-20 · 3 MODELS

WJP THICKNESS PLANERS WITH SPIRAL CUTTERHEAD, 15" AND 20"



MODEL WJP · WJP-20 20" THICKNESS PLANER WITH SPIRAL CUTTERHEAD



WJP-15 15" thickness planer with spiral cutterhead



WJP-15B benchtop thickness planer

15 – 20"

Thickness planers bring boards to an even thickness with both faces parallel. All three have spiral cutterheads with carbide inserts and two feed speeds: the WJP-15B is a 15" benchtop planer with a 3 HP motor; the WJP-15 and WJP-20 are floor planers on a mobile base with table extensions, for stock up to 8" thick and 15" or 20" wide.

STANDARD FEATURES

- Cutting width 15" (WJP-15B, WJP-15) or 20" (WJP-20)
- Stock 3/16 – 8" thick (1/4 – 8-1/4" on the WJP-15B); up to 1/8" per pass
- Spiral cutterhead with carbide inserts; two feed speeds
- WJP-15 / WJP-20: floor models with mobile base and table extensions
- 320 – 838 lb (145 – 380 kg)

OPTIONAL EQUIPMENT

WJP-15B · WJP-15 · WJP-20 — TECHNICAL SPECIFICATIONS

Model	WJP-15B	WJP-15	WJP-20
Cutting width	**15" (381 mm)**	**15" (381 mm)**	**20" (500 mm)**
Stock thickness	**1/4 – 8-1/4" (6.35 – 210 mm)**	**3/16 – 8" (5 – 203 mm)**	**3/16 – 8" (5 – 200 mm)**
Cutting depth, max	1/8" (3 mm)	1/8" (3 mm)	1/8" (3 mm)
Cutterhead	**Spiral, 15 × 15 × 2.5 mm carbide inserts, 5,000 rpm**	**Spiral, 15 × 15 × 2.5 mm carbide inserts, 4,750 rpm**	**Spiral, 14 × 14 × 2 mm carbide inserts, 4,800 rpm**
Feed	Two feed speeds	Two feed speeds	Two feed speeds
Table with extensions	20-1/4 × 15" (515 × 381 mm)	42-1/8 × 15" (1,072 × 381 mm)	55-1/2 × 20" (1,410 × 508 mm)
Type	Benchtop, 3 HP	Floor model with mobile base	Floor model with mobile base
Packing size L × W × H	37 × 25 × 28" (94 × 64 × 72 cm)	36 × 29 × 51" (92 × 73 × 130 cm)	43 × 34 × 49" (109 × 87 × 125 cm)
Weight	**320 lb (145 kg)**	**602 lb (273 kg)**	**838 lb (380 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

WJP THICKNESS PLANERS WITH SPIRAL CUTTERHEAD, 15" AND 20"




Spiral cutterhead of the thickness planer

WTS10-30 – WTS10-50S · 4 MODELS

WTS10 10″ CABINET TABLE SAWS, 30″ AND 52″ RIP — TOUCH-SCREEN S MODELS



MODEL WTS10 · WTS10-50 10″ CABINET TABLE SAW WITH 52″ RIP FENCE

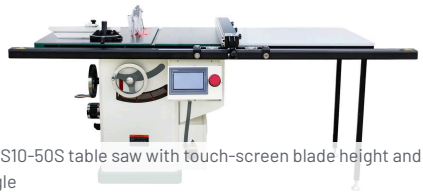

WTS10-50S table saw with touch-screen blade height and angle



Touch screen for blade height and angle

10″ blade, 30 – 52″ rip

10″ cabinet table saws with a cast-iron table, a 3 HP motor and 3-3/8″ of cut at 90°: the WTS10-30 rips 30″ to the right of the blade, the WTS10-50 52″ on a long fence rail with a table extension and legs. On the S models the blade height and tilt are set on a touch screen with a digital display instead of hand wheels. An 8″ dado stack up to 13/16″ wide fits, and a 4″ port connects the dust collector.

STANDARD FEATURES

- ✓ 10″ blade, 3,550 rpm; cut 3-3/8″ at 90°, 2-1/4″ at 45°
- ✓ Rip 30″ (WTS10-30) or 52″ (WTS10-50) right of the blade, 20″ left
- ✓ Cast-iron table 40 × 27″; blade tilts 45° left
- ✓ S models: touch screen sets the blade height and angle
- ✓ 8″ dado stack to 13/16″; 4″ dust port; 3 HP

OPTIONAL EQUIPMENT

- \+ Mortising attachment

WTS10-30 · WTS10-50 · WTS10-30S · WTS10-50S — TECHNICAL SPECIFICATIONS

Model	WTS10-30	WTS10-50	WTS10-30S	WTS10-50S
Blade	**10″ (254 mm), 3,550 rpm; dado 8″ (203 mm) to 13/16″ (20.6 mm) wide**	**10″ (254 mm), 3,550 rpm; dado 8″ (203 mm) to 13/16″ (20.6 mm) wide**	**10″ (254 mm), 3,550 rpm; dado 8″ (203 mm) to 13/16″ (20.6 mm) wide**	**10″ (254 mm), 3,550 rpm; dado 8″ (203 mm) to 13/16″ (20.6 mm) wide**
Depth of cut, 90° / 45°	**3-3/8 / 2-1/4″ (80 / 55 mm)**	**3-3/8 / 2-1/4″ (80 / 55 mm)**	**3-3/8 / 2-1/4″ (80 / 55 mm)**	**3-3/8 / 2-1/4″ (80 / 55 mm)**
Rip capacity, right / left of blade	**30 / 20″ (760 / 520 mm)**	**52 / 20″ (1,320 / 520 mm)**	**30 / 20″ (760 / 520 mm)**	**52 / 20″ (1,320 / 520 mm)**
Cast-iron table	40 × 27″ (1,025 × 690 mm)	40 × 27″ (1,025 × 690 mm)	40 × 27″ (1,025 × 690 mm)	40 × 27″ (1,025 × 690 mm)
Blade tilt	45° left	45° left	45° left	45° left
Blade height and angle	Hand wheels	Hand wheels	Touch screen with digital display	Touch screen with digital display
Motor	**3 HP (2.2 kW)**	**3 HP (2.2 kW)**	**3 HP (2.2 kW)**	**3 HP (2.2 kW)**
Dust port	4″ (100 mm)	4″ (100 mm)	4″ (100 mm)	4″ (100 mm)
Overall size L × W × H	64 × 37 × 41″ (1,630 × 930 × 1,040 mm)	84 × 37 × 41″ (2,138 × 930 × 1,040 mm)	64 × 38 × 41″ (1,630 × 970 × 1,040 mm)	84 × 38 × 41″ (2,138 × 970 × 1,040 mm)
Weight	**465 lb (211 kg)**	**496 lb (225 kg)**	**516 lb (234 kg)**	**547 lb (248 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

WTS10 10" CABINET TABLE SAWS, 30" AND 52" RIP — TOUCH-SCREEN S MODELS



Mortising attachment on the table saw (optional)

TBS-356 · TBS-457 · 2 MODELS

TBS-356 · TBS-457 BAND SAWS FOR WOOD, 14" AND 18"



MODEL TBS · TBS-457 18" BAND SAW FOR WOOD



TBS-356 14" band saw for wood

14 – 18"

Deluxe band saws for resawing and curve cutting: the TBS-356 is a 14" saw with 13" of resaw height and a 1.5 HP motor on 115 / 230 V; the TBS-457 an 18" saw with an 18.4" throat, 12" of resaw height and a 3 HP motor. Both have two blade speeds, a table that tilts 10° left and 45° right and a closed cabinet stand.

STANDARD FEATURES

- TBS-356: 14", 13.6" throat, 13" resaw, 1.5 HP, 115 / 230 V
- TBS-457: 18", 18.4" throat, 12" resaw, 3 HP
- Blades 1/8 – 3/4" (TBS-356) and 1/4 – 1-1/4" (TBS-457) wide
- Two blade speeds; table tilts 10° left and 45° right

OPTIONAL EQUIPMENT

TBS-356 · TBS-457 — TECHNICAL SPECIFICATIONS

Model	TBS-356	TBS-457
Resaw height	**13" (330 mm)**	**12" (305 mm)**
Throat	**13.6" (346 mm)**	**18.4" (467 mm)**
Blade	1/8 – 3/4" (3 – 19 mm) wide, 111" (2,819 mm) long	1/4 – 1-1/4" (6 – 32 mm) wide, 142" (3,607 mm) long
Table	16 × 21.5" (406 × 546 mm), tilts 10° left and 45° right	21 × 19" (533 × 483 mm), tilts 10° left and 45° right
Blade speeds	2 speeds: 1,250 / 2,620 ft/min (380 / 800 m/min)	2 speeds: 1,510 / 3,215 ft/min (460 / 980 m/min)
Motor	**1.5 HP (1.1 kW), 115 / 230 V**	**3 HP (2.2 kW)**
Size H × W × D	73 × 30 × 25" (1,850 × 762 × 635 mm)	76 × 38 × 27" (1,930 × 969 × 694 mm)
Packing size L × W × H	55 × 19 × 24" (139 × 48 × 60 cm)	79 × 24 × 41" (201 × 60 × 103 cm)
Weight	**267 lb (121 kg)**	**388 lb (176 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

MGX16 · MGX20R · WM-01 · 3 MODELS

MGX SLOT BORING MACHINES AND WM-01 HORIZONTAL BORING MACHINE



MODEL SLOT · MGX20R SLOT BORING MACHINE WITH SWIVELLING HEAD



MGX16 slot boring machine



WM-01 horizontal boring machine on stand

Slots and dowel holes

Slot mortisers and boring machines for joinery and furniture: the MGX16 and MGX20R bore slot mortises and dowel holes with the work clamped on the table while the motor table moves across, along and up — the MGX20R with two speeds and a head that swivels ±60° for angled slots; the WM-01 is a compact horizontal boring machine on a stand for dowel holes in panels and frames.

STANDARD FEATURES

- ✓ MGX16: 5/8″ chuck, 3 HP, travel 6.7 × 8.7 × 5.9″
- ✓ MGX20R: 3/4″ chuck, two speeds, head swivels ±60°, travel 8.5 × 10.2 × 5.7″
- ✓ WM-01: 1/2″ chuck, 1 HP, 3,450 rpm, on stand

OPTIONAL EQUIPMENT

MGX16 · MGX20R · WM-01 — TECHNICAL SPECIFICATIONS

Model	MGX16	MGX20R	WM-01
Drill chuck	**5/8″ (16 mm)**	**3/4″ (20 mm)**	**1/2″ (13 mm)**
Table	21.5 × 10.4″ (545 × 265 mm)	23.4 × 12.4″ (595 × 316 mm), work table fixed, motor table moves	8.3 – 14.2″ (210 – 360 mm)
Travel, cross / longitudinal / vertical	**6.7 / 8.7 / 5.9″ (170 / 220 / 150 mm)**	**8.5 / 10.2 / 5.7″ (215 / 260 / 145 mm)**	**3.3 / 3.1″ (85 / 80 mm)**
Spindle speed	2,800 rpm	1,400 / 2,800 rpm	3,450 rpm at 60 Hz
Head swivel	–	±60°	–
Motor	**3 HP (2.2 kW)**	**2 / 2.5 HP (1.5 / 1.9 kW), two speeds**	**1 HP (0.75 kW)**
Packing size L × W × H	34 × 26 × 52″ (86 × 66 × 133 cm)	42 × 35 × 52″ (106 × 88 × 133 cm)	37 × 22 × 22″ (93 × 57 × 56 cm)
Weight	**379 lb (172 kg)**	**529 lb (240 kg)**	**181 lb (82 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

TL-406 · 1 MODEL

TL-406 12 × 16″ WOOD LATHE



MODEL TL-406 · TL-406 12 × 16″ WOOD LATHE



TL-406 with the extension bed (optional)

12 × 16″

A benchtop wood lathe for bowls, spindles, pens and furniture parts: 12″ of swing over the bed and 16″ between centres, six speeds, a 1″ × 8 TPI spindle nose with MT-2 tapers in the headstock and the self-ejecting tailstock, a 12-position index head and a spindle lock. An extension bed lengthens it for longer spindles.

STANDARD FEATURES

- ✓ 12″ (305 mm) swing; 16″ (406 mm) between centres
- ✓ 6 speeds; 1/2 HP motor
- ✓ Spindle nose 1″ × 8 TPI; MT-2 headstock and tailstock; 2-1/2″ ram travel
- ✓ 12-position index head; spindle lock; self-ejecting tailstock

OPTIONAL EQUIPMENT

- \+ Bed extension

TL-406 — TECHNICAL SPECIFICATIONS

Model	TL-406
Swing over bed	**12″ (305 mm); 9.5″ (241 mm) over the tool rest base**
Between centres	**16″ (406 mm)**
Speeds	6
Headstock and tailstock	Spindle nose 1″ × 8 TPI, MT-2 / MT-2; 2-1/2″ (63 mm) ram travel; self-ejecting tailstock
Index head	12 positions; spindle lock
Motor	**1/2 HP (0.37 kW), 6.6 A**
Size H × W × D	32 × 10.5 × 19″ (813 × 267 × 483 mm)
Packing size L × W × H	34 × 18 × 11″ (86 × 46 × 29 cm)
Weight	**88 lb (40 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DC900 · 1 MODEL

DC900 DUST COLLECTOR, 940 CFM



MODEL DC900 · DC900 DUST COLLECTOR

940 CFM

A single-stage dust collector for one or two machines: 940 CFM from a 1.8 HP motor, two 4″ inlets, an 8.5 ft hose, an 11.7 cu ft collection bag and a 30-micron filter bag, on casters so it goes to the machine that is running.

STANDARD FEATURES

- 940 CFM (1,600 m^3/h); 4.8″ water (1,200 Pa)
- Two Ø4″ inlets; 4″ hose, 8.5 ft
- 11.7 cu ft bag; 30-micron filter
- 1.8 HP; 108 lb on casters

OPTIONAL EQUIPMENT

DC900 — TECHNICAL SPECIFICATIONS

Model	DC900
Air flow	**940 CFM (1,600 m^3/h); 4.8″ water (1,200 Pa)**
Inlets	Two Ø4″ (100 mm) ports; 4″ hose, 8.5 ft (2,600 mm)
Bag	11.7 cu ft (0.33 m^3) collection bag; 30-micron filter
Motor	**1.8 HP (1,350 W)**
Packing size L × W × H	35 × 19 × 18″ (90 × 49 × 46 cm)
Weight	**108 lb (49 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.