
NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH VALUE LINE · BUILT IN CHINA TO NORTH AMERICAN STANDARDS · SOLD & SERVICED IN CANADA BY NOVOTECH

FIBER LASER CUTTING MACHINES

NOVOTECH VALUE LINE · ULE WITH SHUTTLE TABLE, ULG GROUND-RAIL PLATE LASERS, ULET SHEET + TUBE · 10 × 5 TO 85 × 14.8 FT · 1.5 – 60 KW

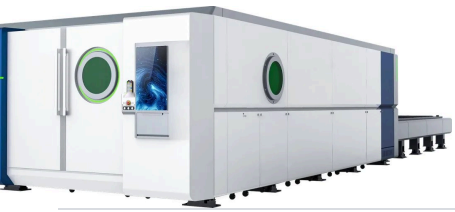





China
MADE IN CHINA

3
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

NOVOTECH FIBER LASERS

CONTENTS

SHEET LASERS WITH SHUTTLE TABLE

ULE fiber lasers with shuttle table, 10 × 5 to 41 × 8.5 ft, 3 – 40 kW ULE-3015E – 6020E · ULE-6026E – 12526E · 7 models 04

GROUND-RAIL PLATE LASERS

ULG ground-rail plate lasers, 42.7 or 85.3 ft × up to 14.8 ft, 12 – 60 kW ULG-13035A – 26045A · ULG-13035C – 26045C · 12 models 10

SHEET + TUBE LASERS

ULET sheet-and-tube fiber lasers with shuttle table, 10 × 5 to 41 × 8.5 ft plus tube to Ø13.8″, 1.5 – 40 kW ULET 3015 – 12526 · 8 table sizes 14

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR NOVOTECH FIBER LASERS

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

NOVOTECH VALUE LINE

PRODUCTION, PLATE AND SHEET + TUBE FIBER LASERS AT A PRICE A SMALL SHOP CAN JUSTIFY

A fiber laser cutting machine cuts sheet and plate from a DXF file with a focused beam — mild steel to 1" with 6 kW and to 2" and beyond with 20 to 30 kW — at speeds no plasma or punch can match, with a clean edge and no tooling. The ULE cuts inside a laser-safe cabin and swaps two tables in 15 seconds, from 10 × 5 to 41 × 8.5 ft and 3 to 40 kW. The ULG runs its gantry and cabin on floor rails over a plate table 42.7 or 85.3 ft long and up to 14.8 ft wide, with 12 to 60 kW. The ULET adds a pneumatic chuck for tube to Ø13.8" and 40 ft to the shuttle-table laser, so one machine cuts sheet and tube.

NovoTech Machine Tools sells, installs and supports sheet-metal and fabrication machinery across Canada from Mississauga, ON, Canada. The value line is our own brand: machines built in China to our specification with established components — Raycus, MAX or IPG sources, Raytools, BOCI or Precitec heads, Cypcut controls, Hiwin guides, YYC racks and Schneider electrics — inspected before they ship, with a CSA-approved panel, a 1-year warranty, operator training and parts and service from Mississauga, ON, Canada.

ULE-3015E – 6020E · ULE-6026E – 12526E · 7 MODELS


ULE FIBER LASERS WITH SHUTTLE TABLE, 10 × 5 TO 41 × 8.5 FT, 3 – 40 KW



MODEL ULE · NOVOTECH ULE FIBER LASER WITH SHUTTLE TABLE — 20 × 8.5 FT WORKING AREA, LASER-SAFE CABIN, FRONT CONSOLE



ULE exchange table: the second table runs out of the cabin on its rails, so the next sheet is loaded while the first is cut

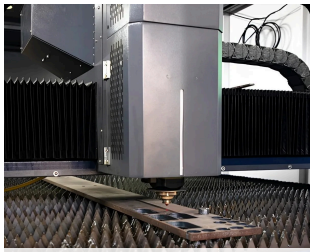

ULE cutting head over the slat table — gantry carriage, bellows covers and cable chain

The production laser: a cabin with laser-safe windows keeps the beam, sparks and fumes in, and two tables swap in 15 seconds so the operator loads one sheet while the other is cut. Four sizes from 10 × 5 to 20 × 6.7 ft take 3 to 20 kW with 11.8″ of Z travel; three large-format machines from 20 × 8.5 to 41 × 8.5 ft take 6 to 40 kW and 16.5″ of Z for heavy plate. 459 ft/min and 1.7 G, ±0.03 mm/m positioning, a bed flat to 0.05 mm per square metre and a twin-chain exchange that doubles the table load. Ready for a sheet storage tower and gantry loading.

STANDARD FEATURES

- ✓ 3 – 40 kW; 10 × 5 to 41 × 8.5 ft; shuttle tables, 15 s swap; 459 ft/min, 1.7 G; Z travel 11.8 – 16.5″
- ✓ Fiber laser source chosen at order — Raycus, MAX or IPG — with an autofocus cutting head (Raytools or BOCI) and capacitive height sensing
- ✓ Cypcut bus control with nesting, the cutting-parameter database and power-based speed adjustment; hand pendant
- ✓ Welded bed annealed and shot-blasted to relieve stress; Inovance or Delta servos, YYC racks, Hiwin linear guides, DESBOER gearboxes
- ✓ Zoned dust extraction under the table, automatic lubrication, Hanli water chiller, air-cooled electrical cabinet with Schneider components
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)
- ✓ 1-year warranty; installation, operator training, parts and remote diagnostics from Mississauga, ON, Canada

OPTIONAL EQUIPMENT


- + Precitec ProCutter cutting head; IPG source; higher power at order
- + Camera nesting over the table for remnants
- + Sheet storage tower and gantry loading / unloading (flexible manufacturing system)
- + Dust collector, air compressor and nitrogen generator sized to the machine
- + MES connection to the shop's production system
- + Custom voltage: 208, 240 or 480 V 3-phase

DETAILS, COMPONENTS AND OPTIONS · 1 / 3

ULE FIBER LASERS WITH SHUTTLE TABLE, 10 × 5 TO 41 × 8.5 FT, 3 – 40 KW



ULE fiber laser cutting machine — the enclosed cutting cabin with its viewing windows and the shuttle table at the end

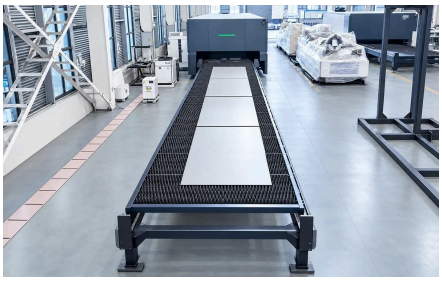

Sheets laid on the outside exchange table of a ULE, ready to go into the cabin




Taking the cut parts off the exchange table while the other table is in the cabin



ULE operator station — touchscreen CNC with the cutting database, emergency stop and hand pendant



ULE CNC console: the touchscreen with the camera view of the table and the cutting program

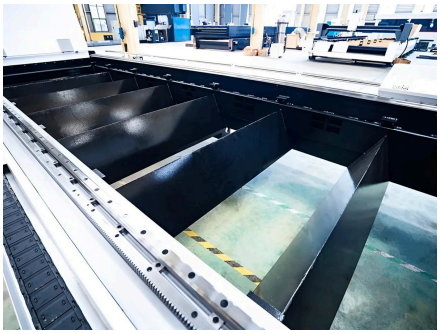

Inside the ULE bed — zoned extraction chambers under the table, rack and linear guide



Welded bed of the ULE — precision-welded and heat-treated, flat to 0.05 mm per square metre



Sheet on the replaceable support slats of the ULE table



ULE gantry with the cutting head, the cable carrier and the bellows over the motion guides

DETAILS, COMPONENTS AND OPTIONS · 2 / 3

ULE FIBER LASERS WITH SHUTTLE TABLE, 10 × 5 TO 41 × 8.5 FT, 3 – 40 KW




BOCI BLT autofocus cutting head — focus set from the material thickness, anti-collision protection



Cutting heads offered on the ULE — autofocus heads matched to the laser power




Raycus RFL-C6000 fiber laser source — 6 kW in the quoted ULE-3015 configuration

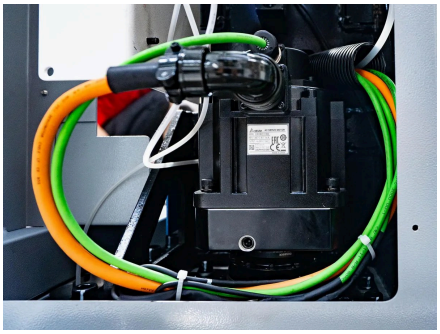

Servo motor and reducer driving the gantry




Precision-ground rack beside the linear guide rail

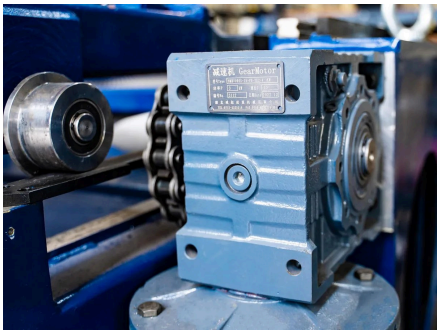

Worm gearmotor and chain sprocket of the table-exchange drive



Timed automatic lubrication pump — oils the racks and guides by running hours

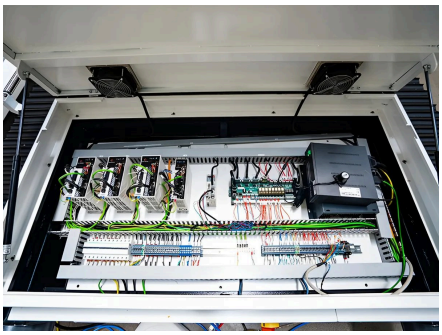

Electrical cabinet — Schneider components, servo drives and the CNC, two cooling fans



Air conditioner on the electrical cabinet — keeps the drives and the CNC at a steady temperature

DETAILS, COMPONENTS AND OPTIONS · 3 / 3

ULE FIBER LASERS WITH SHUTTLE TABLE, 10 × 5 TO 41 × 8.5 FT, 3 – 40 KW



Hanli 12000 water chiller, sized for a 12 kW source




Water chillers for the ULE, sized to the laser source



Single- and double-layer cutting nozzles, 0.8 to 4.0 mm bore — consumables



Automatic sheet loading beside an enclosed ULE — the vacuum loader lifts each sheet onto the roller table

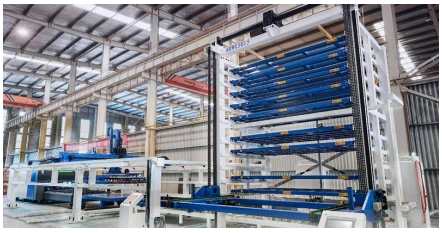

Sheet storage tower feeding a shuttle-table laser — flexible manufacturing system (optional)



Gantry loading and unloading with suction cups (optional)



Precitec ProCutter autofocus cutting head (optional)



IPG fiber laser sources (optional)



Die-cast crossbeam in aerospace-grade aluminum alloy (optional)

TECHNICAL SPECIFICATIONS · 1 / 2

ULE FIBER LASERS WITH SHUTTLE TABLE, 10 × 5 TO 41 × 8.5 FT, 3 – 40 KW

ULE SHUTTLE-TABLE FIBER LASERS · 3 – 20 KW

4 models · 10 × 5 to 20 × 6.7 ft · table swap in 15 s

Model	ULE-3015E	ULE-4015E	ULE-4020E	ULE-6020E
Working area	**10 × 5 ft (3,100 × 1,550 mm)**	**13.5 × 5 ft (4,100 × 1,550 mm)**	**13.5 × 6.7 ft (4,100 × 2,050 mm)**	**20 × 6.7 ft (6,100 × 2,050 mm)**
Laser power	3 – 20 kW	3 – 20 kW	3 – 20 kW	3 – 20 kW
Max. speed no load	459 ft/min (140 m/min)	459 ft/min (140 m/min)	459 ft/min (140 m/min)	459 ft/min (140 m/min)
Max. speed with Delta servos	328 ft/min (100 m/min)	328 ft/min (100 m/min)	—	—
Max. acceleration	1.7 G	1.7 G	1.7 G	1.7 G
Positioning accuracy	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)
Repeat accuracy	±0.02 mm/m (±0.0002″/ft)	±0.02 mm/m (±0.0002″/ft)	±0.02 mm/m (±0.0002″/ft)	±0.02 mm/m (±0.0002″/ft)
Z travel	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)
Beam clearance upper / lower table	3.9 / 9.8″ (100 / 250 mm)	3.9 / 9.8″ (100 / 250 mm)	3.9 / 9.8″ (100 / 250 mm)	3.9 / 9.8″ (100 / 250 mm)
Max. table load both tables, single chain	3,307 lb (1,500 kg)	4,189 lb (1,900 kg)	5,732 lb (2,600 kg)	8,818 lb (4,000 kg)
Max. table load, twin chain both tables	6,614 lb (3,000 kg)	8,378 lb (3,800 kg)	11,464 lb (5,200 kg)	17,637 lb (8,000 kg)
Table exchange	15 s	15 s	15 s	15 s
Dimensions L × W × H	28.9 × 9.7 × 7.5 ft (8,800 × 2,950 × 2,300 mm)	35.4 × 9.7 × 7.5 ft (10,800 × 2,950 × 2,300 mm)	35.4 × 11.5 × 7.5 ft (10,800 × 3,500 × 2,300 mm)	49.2 × 11.5 × 7.5 ft (15,000 × 3,500 × 2,300 mm)

TECHNICAL SPECIFICATIONS · 2 / 2

ULE FIBER LASERS WITH SHUTTLE TABLE, 10 × 5 TO 41 × 8.5 FT, 3 – 40 KW

ULE LARGE-FORMAT SHUTTLE-TABLE FIBER LASERS · 6 – 40 KW

3 models · 20 × 8.5 to 41 × 8.5 ft

Model	ULE-6026E	ULE-8026E	ULE-12526E
Working area	**20 × 8.5 ft (6,100 × 2,600 mm)**	**27 × 8.5 ft (8,100 × 2,600 mm)**	**41 × 8.5 ft (12,500 × 2,600 mm)**
Laser power	6 – 40 kW	6 – 40 kW	6 – 40 kW
Max. speed no load	459 ft/min (140 m/min)	459 ft/min (140 m/min)	459 ft/min (140 m/min)
Max. acceleration	1.7 G	1.7 G	1.7 G
Positioning accuracy	±0.0012″ (±0.03 mm)	±0.0016″ (±0.04 mm)	±0.0012″ (±0.03 mm) · Y axis ±0.0024″ (±0.06 mm)
Repeat accuracy	±0.0008″ (±0.02 mm)	±0.0008″ (±0.02 mm)	±0.0012″ (±0.03 mm)
Z travel	16.5″ (420 mm)	16.5″ (420 mm)	16.5″ (420 mm)
Beam clearance upper / lower table	4.7 / 14.2″ (120 / 360 mm)	4.7 / 14.2″ (120 / 360 mm)	4.7 / 14.2″ (120 / 360 mm)
Max. table load both tables, single chain	13,669 lb (6,200 kg)	18,078 lb (8,200 kg)	27,558 lb (12,500 kg)
Max. table load, twin chain both tables	27,337 lb (12,400 kg)	36,156 lb (16,400 kg)	55,115 lb (25,000 kg)
Table exchange	15 s	15 s	15 s
Dimensions L × W × H	49.2 × 13.9 × 8.9 ft (15,000 × 4,250 × 2,700 mm)	64 × 13.9 × 8.9 ft (19,500 × 4,250 × 2,700 mm)	90.2 × 13.9 × 8.9 ft (27,500 × 4,250 × 2,700 mm)

Laser source power is chosen at order (Raycus, MAX or IPG); the model number gives the nominal working area in decimetres (3015 = 3,000 × 1,500 mm). Speeds and accelerations are no-load values; the table load is the largest sheet the table carries, on the ULE for both shuttle tables together.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

ULG-13035A – 26045A · ULG-13035C – 26045C · 12 MODELS

ULG GROUND-RAIL PLATE LASERS, 42.7 OR 85.3 FT × UP TO 14.8 FT, 12 – 60 KW



MODEL ULG · NOVOTECH ULG GROUND-RAIL PLATE LASER — THE CABIN TRAVELS WITH THE GANTRY ON FLOOR RAILS, PLATE TABLE BEHIND, CONSOLE IN FRONT



ULG with a 59 × 14.8 ft (18 × 4.5 m) table and a 30 kW source installed in a heavy-equipment plant



ULG gantry and cutting head over the slat table — the gantry runs on its own ground rails

For plate too long, too wide or too heavy for a table machine: the ULG's gantry runs on rails set in the floor beside a separate plate-support table, so the table carries up to 202,000 lb (91.8 t) of plate without loading the motion axes. Tables 42.7 or 85.3 ft long and 11.5, 13.1 or 14.8 ft wide, other lengths to order; 12 to 60 kW for thick plate. Two gantries: the ULG-A runs to 262 ft/min and 1.1 G, the heavier ULG-C leaves 11.8" under the beam with a 60 kW source. Loaded by crane, with zoned extraction along the whole table — the laser for structural steel, tower, mining and heavy-equipment fabricators.

STANDARD FEATURES


- ✓ 12 – 60 kW; tables 42.7 or 85.3 ft × 11.5 – 14.8 ft, other lengths to order; table loads to 202,000 lb; to 262 ft/min, 1.1 G
- ✓ Gantry on ground rails, separate from the plate-support table — the plate load never reaches the motion axes
- ✓ Fiber laser source chosen at order — Raycus, MAX or IPG — with a high-power autofocus cutting head
- ✓ Bus CNC with edge finding, nesting, common-line cutting and remnant functions; touchscreen console
- ✓ Positioning ±0.03 mm/m over the whole table; transmission covers and automatic lubrication on the long axis
- ✓ Zoned fume extraction along the table; replaceable support slats
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)
- ✓ 1-year warranty; installation, operator training, parts and remote diagnostics from Mississauga, ON, Canada

OPTIONAL EQUIPMENT

- + Bevel cutting head
- + MES connection and industry file interfaces
- + Dust collector, compressor and gas supply sized to the machine
- + Custom voltage: 208, 240 or 480 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

ULG GROUND-RAIL PLATE LASERS, 42.7 OR 85.3 FT × UP TO 14.8 FT, 12 – 60 KW

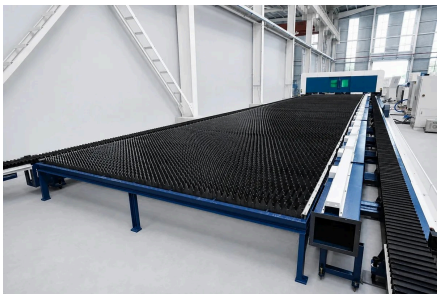

Ground rails and plate-support table set side by side — the motion axis never carries the plate load



Long plate-support table with replaceable slats, sources and chillers along the wall



Cutting head piercing plate — 12 to 60 kW source chosen at order



Heavy-plate parts and flanges cut on the ULG table, gantry carriage overhead



ULG operator console with the touchscreen CNC, nesting and remnant functions



Zoned fume-extraction duct along the plate table



Tower flanges and baseplates cut from thick plate on a ground-rail laser

TECHNICAL SPECIFICATIONS · 1 / 2

ULG GROUND-RAIL PLATE LASERS, 42.7 OR 85.3 FT × UP TO 14.8 FT, 12 – 60 KW

ULG-A GROUND-RAIL PLATE LASERS · 12 – 60 KW

6 models · 42.7 or 85.3 ft long, 11.5 – 14.8 ft wide · to 262 ft/min and 1.1 G

Model	ULG-13035A	ULG-13040A	ULG-13045A	ULG-26035A	ULG-26040A	ULG-26045A
Working area	**42.7 × 11.5 ft (13,000 × 3,500 mm)**	**42.7 × 13.1 ft (13,000 × 4,000 mm)**	**42.7 × 14.8 ft (13,000 × 4,500 mm)**	**85.3 × 11.5 ft (26,000 × 3,500 mm)**	**85.3 × 13.1 ft (26,000 × 4,000 mm)**	**85.3 × 14.8 ft (26,000 × 4,500 mm)**
Laser power	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW
Max. speed axes combined	262 ft/min (80 m/min)	230 ft/min (70 m/min)	197 ft/min (60 m/min)	262 ft/min (80 m/min)	230 ft/min (70 m/min)	197 ft/min (60 m/min)
Max. acceleration axes combined	1.1 G	1 G	0.85 G	1.1 G	1 G	0.85 G
Positioning accuracy	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)
Repeat accuracy	X ±0.0012″ (±0.03 mm) · Y ±0.0016″ (±0.04 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0016″ (±0.04 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0016″ (±0.04 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0024″ (±0.06 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0024″ (±0.06 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0024″ (±0.06 mm)
Z travel	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)
Clearance under the gantry	7.5″ (190 mm)	7.5″ (190 mm)	7.5″ (190 mm)	7.5″ (190 mm)	7.5″ (190 mm)	7.5″ (190 mm)
Max. table load	78,705 lb (35,700 kg)	89,948 lb (40,800 kg)	101,192 lb (45,900 kg)	157,410 lb (71,400 kg)	179,897 lb (81,600 kg)	202,384 lb (91,800 kg)
Dimensions L × W × H	53.1 × 17.4 × 6.4 ft (16,200 × 5,300 × 1,950 mm)	53.1 × 19 × 6.4 ft (16,200 × 5,800 × 1,950 mm)	53.1 × 20.7 × 6.4 ft (16,200 × 6,300 × 1,950 mm)	100.1 × 17.4 × 6.4 ft (30,500 × 5,300 × 1,950 mm)	102 × 19 × 6.4 ft (31,100 × 5,800 × 1,950 mm)	102 × 20.7 × 6.4 ft (31,100 × 6,300 × 1,950 mm)

TECHNICAL SPECIFICATIONS · 2 / 2

ULG GROUND-RAIL PLATE LASERS, 42.7 OR 85.3 FT × UP TO 14.8 FT, 12 – 60 KW

ULG-C GROUND-RAIL PLATE LASERS · 12 – 60 KW

6 models · heavier gantry, 11.8″ under the beam with a 60 kW source

Model	ULG-13035C	ULG-13040C	ULG-13045C	ULG-26035C	ULG-26040C	ULG-26045C
Working area	**42.7 × 11.5 ft (13,000 × 3,500 mm)**	**42.7 × 13.1 ft (13,000 × 4,000 mm)**	**42.7 × 14.8 ft (13,000 × 4,500 mm)**	**85.3 × 11.5 ft (26,000 × 3,500 mm)**	**85.3 × 13.1 ft (26,000 × 4,000 mm)**	**85.3 × 14.8 ft (26,000 × 4,500 mm)**
Laser power	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW
Max. speed axes combined	230 ft/min (70 m/min)	197 ft/min (60 m/min)	164 ft/min (50 m/min)	230 ft/min (70 m/min)	197 ft/min (60 m/min)	164 ft/min (50 m/min)
Max. acceleration axes combined	0.8 G	0.7 G	0.6 G	0.8 G	0.7 G	0.6 G
Positioning accuracy	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)
Repeat accuracy	X ±0.0012″ (±0.03 mm) · Y ±0.0020″ (±0.05 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0020″ (±0.05 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0020″ (±0.05 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0028″ (±0.07 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0028″ (±0.07 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0028″ (±0.07 mm)
Z travel	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)
Clearance under the gantry	7.5″ (190 mm) to 40 kW · 11.8″ (300 mm) at 60 kW	7.5″ (190 mm) to 40 kW · 11.8″ (300 mm) at 60 kW	7.5″ (190 mm) to 40 kW · 11.8″ (300 mm) at 60 kW	7.5″ (190 mm) to 40 kW · 11.8″ (300 mm) at 60 kW	7.5″ (190 mm) to 40 kW · 11.8″ (300 mm) at 60 kW	7.5″ (190 mm) to 40 kW · 11.8″ (300 mm) at 60 kW
Max. table load	78,705 lb (35,700 kg)	89,948 lb (40,800 kg)	101,192 lb (45,900 kg)	157,410 lb (71,400 kg)	179,897 lb (81,600 kg)	202,384 lb (91,800 kg)
Dimensions L × W × H	54 × 17.7 × 7.2 ft (16,450 × 5,400 × 2,200 mm)	54 × 19.4 × 7.2 ft (16,450 × 5,900 × 2,200 mm)	54 × 21 × 7.2 ft (16,450 × 6,390 × 2,200 mm)	100.7 × 17.7 × 7.2 ft (30,700 × 5,390 × 2,200 mm)	102 × 19.3 × 7.2 ft (31,100 × 5,890 × 2,200 mm)	102 × 21 × 7.2 ft (31,100 × 6,390 × 2,200 mm)

The model number gives the table in decimetres (13035 = 13,000 × 3,500 mm); other lengths are built to order — the photos show 59 ft (18 m) and 66 ft (20 m) machines. Laser power is chosen at order. Speeds and accelerations are no-load values with the axes combined; the table load is the largest plate the support table carries.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

ULET 3015 - 12526 · 8 TABLE SIZES

ULET SHEET-AND-TUBE FIBER LASERS WITH SHUTTLE TABLE, 10 × 5 TO 41 × 8.5 FT PLUS TUBE TO Ø13.8”, 1.5 – 40 KW



MODEL ULET · NOVOTECH ULET 6020 SHEET-AND-TUBE FIBER LASER — LASER-SAFE CABIN WITH VIEWING WINDOWS, THE OPERATOR CONSOLE ON THE FRONT



ULET from the side — one cabin over the sheet table and the tube unit, with sliding doors along its length



ULET with the long side door slid open — the sheet table and the gantry inside the cabin

Sheet and tube on one machine: the ULE cabin with its shuttle table for sheet, and at the end of the machine a pneumatic chuck — three times faster to clamp than an electric one — for round, square and rectangular tube to Ø8.7” or Ø13.8” and 40 ft long. Eight table sizes from 10 × 5 to 41 × 8.5 ft, 1.5 to 40 kW; the same source and head cut both, so a shop that cuts tube a few times a week does not need a second laser.

STANDARD FEATURES

- ✓ Sheet 10 × 5 to 41 × 8.5 ft; tube Ø8.7 / 13.8” chuck, 20 – 40 ft; 1.5 – 40 kW; 459 ft/min
- ✓ Fiber laser source chosen at order — Raycus, MAX or IPG — with an autofocus cutting head (Raytools or BOCI) and capacitive height sensing
- ✓ Cypcut bus control with nesting, the cutting-parameter database and power-based speed adjustment; hand pendant
- ✓ Welded bed annealed and shot-blasted to relieve stress; Inovance or Delta servos, YYC racks, Hiwin linear guides, DESBOER gearboxes
- ✓ Zoned dust extraction under the table, automatic lubrication, Hanli water chiller, air-cooled electrical cabinet with Schneider components
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)
- ✓ 1-year warranty; installation, operator training, parts and remote diagnostics from Mississauga, ON, Canada

OPTIONAL EQUIPMENT

- + Precitec ProCutter cutting head; IPG source; higher power at order
- + Camera nesting over the table for remnants
- + Sheet storage tower and gantry loading / unloading (flexible manufacturing system)
- + Dust collector, air compressor and nitrogen generator sized to the machine
- + Custom voltage: 208, 240 or 480 V 3-phase
- + Tube supports and unloading for 40 ft lengths

DETAILS, COMPONENTS AND OPTIONS · 1 / 2


ULET SHEET-AND-TUBE FIBER LASERS WITH SHUTTLE TABLE, 10 × 5 TO 41 × 8.5 FT PLUS TUBE TO Ø13.8”, 1.5 – 40 KW



ULET 6020 with a 12 kW source at the factory before shipping




Inside the cabin through the open door: the slat table, and at the far end the chuck of the tube unit

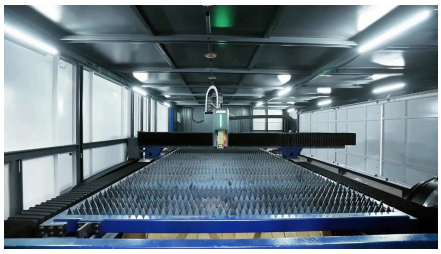


Gantry and cutting head over the sheet table, seen from the loading end




Sheet table and tube chuck under one cabin — the same gantry and head serve both

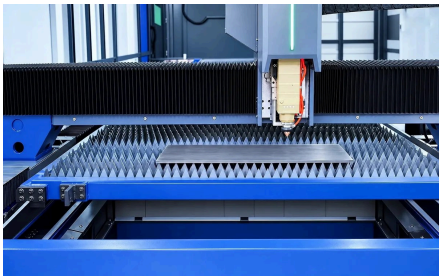


Cutting head over the sheet-support slats

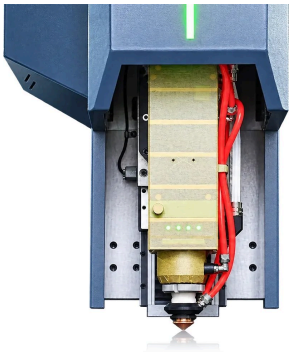


Autofocus cutting head on the Z axis of the gantry

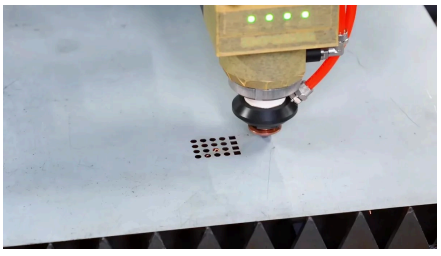

Cutting a pattern of round and square holes in thin carbon steel

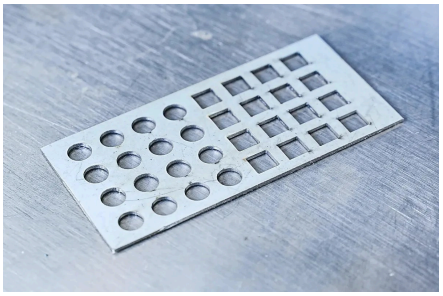


Thin sheet with round and square holes cut on the ULET

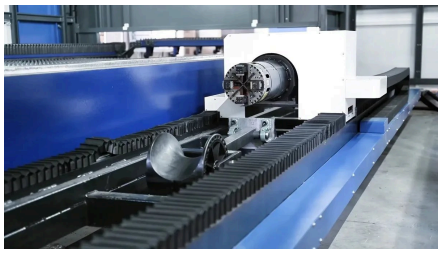


Tube unit at the end of the bed — the rear chuck runs on its own rack and guide rail

DETAILS, COMPONENTS AND OPTIONS · 2 / 2

ULET SHEET-AND-TUBE FIBER LASERS WITH SHUTTLE TABLE, 10 × 5 TO 41 × 8.5 FT PLUS TUBE TO Ø13.8”, 1.5 – 40 KW

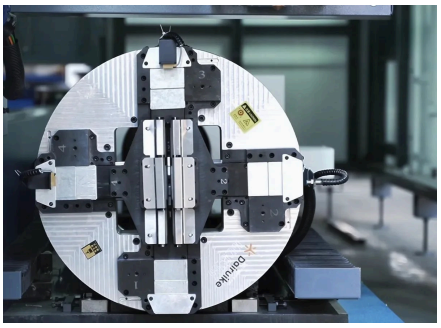


Pneumatic four-jaw chuck — self-centring on round, square and rectangular tube

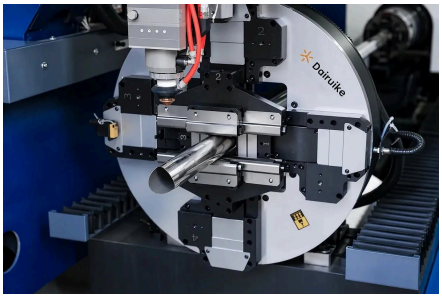

Cutting head over a stainless round tube held in the chuck



Tube cutting zone — the tube is cut in front of the chuck by the head on the gantry

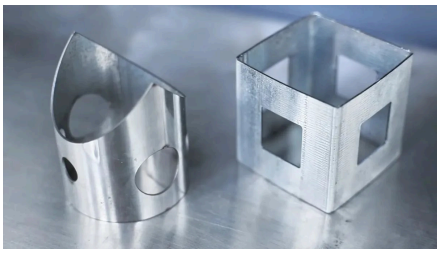

Round and square tube cut on the ULET — a saddle cut and window openings



Raycus fiber laser source, 1.5 to 40 kW

TECHNICAL SPECIFICATIONS

ULET SHEET-AND-TUBE FIBER LASERS WITH SHUTTLE TABLE, 10 × 5 TO 41 × 8.5 FT PLUS TUBE TO Ø13.8", 1.5 – 40 KW

ULET SHEET-AND-TUBE FIBER LASERS WITH SHUTTLE TABLE

8 table sizes · 10 × 5 to 41 × 8.5 ft · tube to Ø13.8" · 1.5 – 40 kW

Model	ULET series
Working area sheet	**10 × 5 ft to 41 × 8.5 ft (3,000 × 1,500 – 12,500 × 2,600 mm)**
Table sizes sheet	10 × 5, 13 × 5, 20 × 5, 13 × 6.6 and 20 × 6.6 ft; 20, 26 or 41 ft × 8.5 ft (3 × 1.5 to 12.5 × 2.6 m)
Tube capacity round / square	**Ø8.7" or Ø13.8" chuck (Ø220 / 350 mm); square tube to 12.6" (320 mm) on the large chuck**
Tube length	**20, 30 or 40 ft (6, 9 or 12 m)**
Laser power	1.5 – 40 kW
Max. speed no load	459 ft/min (140 m/min)
Max. acceleration	1 – 1.5 G
Positioning accuracy	±0.03 mm/m (±0.0004"/ft)
Repeat accuracy	±0.02 mm/m (±0.0002"/ft)
Chuck	pneumatic, three times faster than an electric chuck

Laser source power is chosen at order (Raycus, MAX or IPG); the model number gives the nominal working area in decimetres (3015 = 3,000 × 1,500 mm). Speeds and accelerations are no-load values; the table load is the largest sheet the table carries, on the ULE for both shuttle tables together.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.