
NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH VALUE LINE · BUILT IN CHINA TO NORTH AMERICAN STANDARDS · SOLD & SERVICED IN CANADA BY NOVOTECH

FIBER LASER CUTTING MACHINES

NOVOTECH VALUE LINE · ULF OPEN-TYPE, ULE ENCLOSED WITH EXCHANGE TABLE, ULG GROUND-RAIL, ULFT AND ULET SHEET + TUBE · 10 × 5 TO 85 × 14.8 FT · 1.5 – 60 KW

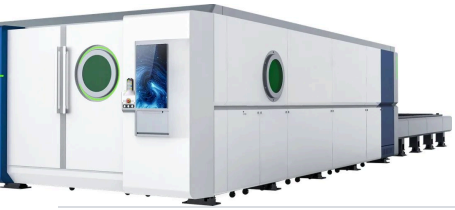





China
MADE IN CHINA

5
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

NOVOTECH FIBER LASERS

CONTENTS

SHEET LASERS

ULF open-type single-table fiber lasers, 10 × 5 to 85 × 10.5 ft, 1.5 – 60 kW — ULF-3015G – 6020G · ULF-3015E – 6022E · ULF-6026E – 26032E · 16 models — 04

ULE enclosed fiber lasers with exchange table, 10 × 5 to 41 × 8.5 ft, 3 – 40 kW — ULE-3015E – 6020E · ULE-6026E – 12526E · 7 models — 07

GROUND-RAIL PLATE LASERS

ULG ground-rail plate lasers, 42.7 or 85.3 ft × up to 14.8 ft, 12 – 60 kW — ULG-13035A – 26045A · ULG-13035C – 26045C · 12 models — 10

SHEET + TUBE LASERS

ULFT open-type sheet-and-tube fiber lasers, 10 × 5 to 85 × 10.5 ft plus tube to Ø13.8″, 1.5 – 60 kW — ULFT 3015 – 26032 · 13 table sizes — 13

ULET enclosed sheet-and-tube fiber lasers, 10 × 5 to 41 × 8.5 ft plus tube to Ø13.8″, 1.5 – 40 kW — ULET 3015 – 12526 · 8 table sizes — 15

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR NOVOTECH FIBER LASERS

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

NOVOTECH VALUE LINE


OPEN, ENCLOSED AND SHEET + TUBE FIBER LASERS AT A PRICE A SMALL SHOP CAN JUSTIFY

A fiber laser cutting machine cuts sheet and plate from a DXF file with a focused beam — mild steel to 1″ with 6 kW and to 2″ and beyond with 20 to 30 kW — at speeds no plasma or punch can match, with a clean edge and no tooling. The ULF is the open single-table laser: the G build from 1.5 to 6 kW, the heavier E build to 12 kW and 1.7 G, and large-format plate tables to 85 × 10.5 ft with up to 60 kW. The ULE puts the cutting area in a full enclosure and swaps two tables in 15 seconds, from 10 × 5 to 41 × 8.5 ft and 3 to 40 kW. The ULG runs its gantry on floor rails over a plate table 42.7 or 85.3 ft long and up to 14.8 ft wide, with 12 to 60 kW. The ULFT and ULET add a pneumatic chuck for tube to Ø13.8″ and 39 ft, so one machine cuts sheet and tube.

NovoTech Machine Tools sells, installs and supports sheet-metal and fabrication machinery across Canada from Mississauga, Ontario. The value line is our own brand: machines built in China to our specification with established components — Raycus, MAX or IPG sources, Raytools, BOCI or Precitec heads, Cypcut controls, Hiwin guides, YYC racks and Schneider electrics — inspected before they ship, with a CSA-approved panel, a 1-year warranty, operator training and parts and service from Mississauga.

ULF-3015G – 6020G · ULF-3015E – 6022E · ULF-6026E – 26032E · 16 MODELS


ULF OPEN-TYPE SINGLE-TABLE FIBER LASERS, 10 × 5 TO 85 × 10.5 FT, 1.5 – 60 KW

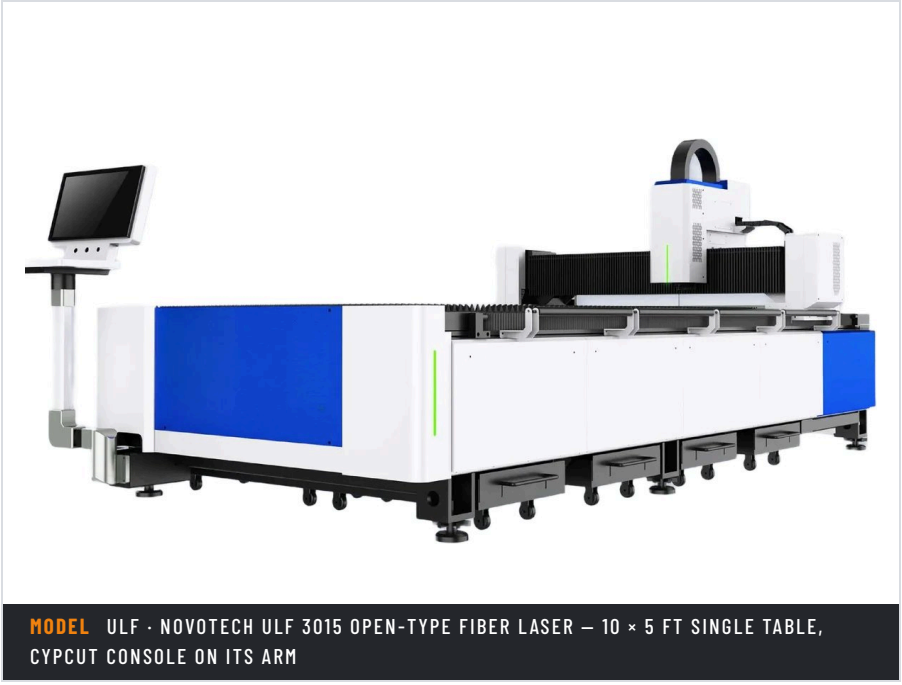

MODEL ULF · NOVOTECH ULF 3015 OPEN-TYPE FIBER LASER — 10 × 5 FT SINGLE TABLE, CYPCUT CONSOLE ON ITS ARM



Welded bed of the ULF — internal stiffeners, annealed and shot-blasted to relieve the welding stress

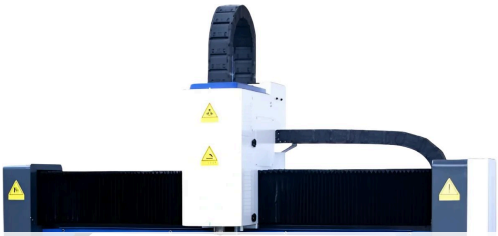

Cast-aluminum crossbeam of the ULF with the cutting-head carriage and cable chain

The open-type laser: a single table loaded from three sides, the source and cabinet built into the machine, and the price that makes a first fiber laser possible. The ULF-G takes 1.5 to 6 kW at 295 ft/min and 1.4 G on 10 × 5 to 20 × 6.7 ft tables — the machine for a shop that cuts sheet and light plate a few hours a day. The ULF-E is the heavier build: 1.5 to 12 kW, 459 ft/min, 1.7 G, tables to 7.2 ft wide and up to 6,600 lb of plate. The large-format ULF-E machines run 6 to 60 kW over plate tables from 20 × 8.5 to 85 × 10.5 ft for structural, trailer and heavy-equipment work, with up to 79,000 lb (36 t) on the table.

STANDARD FEATURES

- ✓ 1.5 – 60 kW; 10 × 5 to 85 × 10.5 ft; 295 – 459 ft/min, 1.4 – 1.7 G; table loads to 79,000 lb
- ✓ Fiber laser source chosen at order — Raycus, MAX or IPG — with an autofocus cutting head (Raytools or BOCI) and capacitive height sensing
- ✓ Cypcut bus control with nesting, the cutting-parameter database and power-based speed adjustment; hand pendant
- ✓ Welded bed annealed and shot-blasted to relieve stress; Inovance or Delta servos, YYC racks, Hiwin linear guides, DESBOER gearboxes
- ✓ Zoned dust extraction under the table, automatic lubrication, Hanli water chiller, air-cooled electrical cabinet with Schneider components
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)
- ✓ 1-year warranty; installation, operator training, parts and remote diagnostics from Mississauga, ON

OPTIONAL EQUIPMENT

- + Precitec ProCutter cutting head; IPG source; higher power at order
- + Camera nesting over the table for remnants
- + Sheet storage tower and gantry loading / unloading (flexible manufacturing system)
- + Dust collector, air compressor and nitrogen generator sized to the machine
- + Custom voltage: 208, 240 or 480 V 3-phase

TECHNICAL SPECIFICATIONS · 1 / 2

ULF OPEN-TYPE SINGLE-TABLE FIBER LASERS, 10 × 5 TO 85 × 10.5 FT, 1.5 – 60 KW

ULF-G OPEN-TYPE FIBER LASERS · 1.5 – 6 KW

5 models · 10 × 5 to 20 × 6.7 ft · single table

Model	ULF-3015G	ULF-4015G	ULF-6015G	ULF-4020G	ULF-6020G
Working area	**10.2 ft × 5 ft · 122 × 60″ (3,100 × 1,530 mm)**	**13.5 ft × 5 ft · 161 × 60″ (4,100 × 1,530 mm)**	**20 ft × 5 ft · 240 × 60″ (6,100 × 1,530 mm)**	**13.5 ft × 6.7 ft · 161 × 81″ (4,100 × 2,050 mm)**	**20 ft × 6.7 ft · 240 × 81″ (6,100 × 2,050 mm)**
Laser power	1.5 – 6 kW	1.5 – 6 kW	1.5 – 6 kW	1.5 – 6 kW	1.5 – 6 kW
Max. speed no load	295 ft/min (90 m/min)	295 ft/min (90 m/min)	295 ft/min (90 m/min)	295 ft/min (90 m/min)	295 ft/min (90 m/min)
Max. speed with Delta servos	230 ft/min (70 m/min)	230 ft/min (70 m/min)	230 ft/min (70 m/min)	230 ft/min (70 m/min)	230 ft/min (70 m/min)
Max. acceleration single axis	1.4 G	1.4 G	1.4 G	1.4 G	1.4 G
Positioning accuracy	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)
Repeat accuracy	±0.02 mm/m (±0.0002″/ft)	±0.02 mm/m (±0.0002″/ft)	±0.02 mm/m (±0.0002″/ft)	±0.02 mm/m (±0.0002″/ft)	±0.02 mm/m (±0.0002″/ft)
Z travel	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)
Max. table load	1,984 lb (900 kg)	2,646 lb (1,200 kg)	3,968 lb (1,800 kg)	3,527 lb (1,600 kg)	5,291 lb (2,400 kg)
Dimensions L × W × H	185 × 92 × 73″ (4,700 × 2,345 × 1,850 mm)	236 × 92 × 73″ (6,000 × 2,345 × 1,850 mm)	327 × 92 × 73″ (8,300 × 2,345 × 1,850 mm)	236 × 115 × 73″ (6,000 × 2,916 × 1,850 mm)	327 × 115 × 73″ (8,300 × 2,916 × 1,850 mm)

ULF-E OPEN-TYPE FIBER LASERS · 1.5 – 12 KW

5 models · 10 × 5 to 20 × 7.2 ft · heavier build, 1.7 G

Model	ULF-3015E	ULF-4015E	ULF-6015E	ULF-4022E	ULF-6022E
Working area	**10.2 ft × 5 ft · 122 × 60″ (3,100 × 1,530 mm)**	**13.5 ft × 5 ft · 161 × 60″ (4,100 × 1,530 mm)**	**20 ft × 5 ft · 240 × 60″ (6,100 × 1,530 mm)**	**13.5 ft × 7.2 ft · 161 × 87″ (4,100 × 2,200 mm)**	**20 ft × 7.2 ft · 240 × 87″ (6,100 × 2,200 mm)**
Laser power	1.5 – 12 kW	1.5 – 12 kW	1.5 – 12 kW	1.5 – 12 kW	1.5 – 12 kW
Max. speed no load	459 ft/min (140 m/min)	459 ft/min (140 m/min)	459 ft/min (140 m/min)	459 ft/min (140 m/min)	459 ft/min (140 m/min)
Max. speed with Delta servos	328 ft/min (100 m/min)	328 ft/min (100 m/min)	328 ft/min (100 m/min)	328 ft/min (100 m/min)	328 ft/min (100 m/min)
Max. acceleration axes combined	1.7 G	1.7 G	1.7 G	1.7 G	1.7 G
Max. table load	2,425 lb (1,100 kg)	3,307 lb (1,500 kg)	4,850 lb (2,200 kg)	4,409 lb (2,000 kg)	6,614 lb (3,000 kg)
Dimensions L × W × H	185 × 92 × 77″ (4,700 × 2,345 × 1,950 mm)	236 × 92 × 77″ (6,000 × 2,345 × 1,950 mm)	327 × 92 × 77″ (8,300 × 2,345 × 1,950 mm)	236 × 128 × 77″ (6,000 × 3,250 × 1,950 mm)	327 × 128 × 77″ (8,300 × 3,250 × 1,950 mm)

TECHNICAL SPECIFICATIONS · 2 / 2

ULF OPEN-TYPE SINGLE-TABLE FIBER LASERS, 10 × 5 TO 85 × 10.5 FT, 1.5 – 60 KW

ULF-E LARGE-FORMAT PLATE LASERS · 6 – 60 KW

6 models · 20 × 8.5 to 85 × 10.5 ft

Model	ULF-6026E	ULF-8026E	ULF-13026E	ULF-13032E	ULF-26026E	ULF-26032E
Working area	**20 ft × 8.5 ft (6,100 × 2,600 mm)**	**26.2 ft × 8.5 ft (8,000 × 2,600 mm)**	**42.7 ft × 8.5 ft (13,000 × 2,600 mm)**	**42.7 ft × 10.5 ft (13,000 × 3,200 mm)**	**85.3 ft × 8.5 ft (26,000 × 2,600 mm)**	**85.3 ft × 10.5 ft (26,000 × 3,200 mm)**
Laser power	6 – 60 kW	6 – 60 kW	6 – 60 kW	6 – 60 kW	6 – 60 kW	6 – 60 kW
Max. speed no load	459 ft/min (140 m/min)	459 ft/min (140 m/min)	459 ft/min (140 m/min)	459 ft/min (140 m/min)	459 ft/min (140 m/min)	459 ft/min (140 m/min)
Max. acceleration	1.7 G	1.7 G	1.7 G	1.4 G	1.7 G	1.4 G
Positioning accuracy	±0.0012″ (±0.03 mm)	±0.0016″ (±0.04 mm)	±0.0028″ (±0.07 mm)	±0.0028″ (±0.07 mm)	±0.0028″ (±0.07 mm per 10 m)	±0.0028″ (±0.07 mm per 10 m)
Repeat accuracy	±0.0008″ (±0.02 mm)	±0.0008″ (±0.02 mm)	±0.0012″ (±0.03 mm)	±0.0012″ (±0.03 mm)	±0.0020″ (±0.05 mm)	±0.0020″ (±0.05 mm)
Z travel	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	7.9″ (200 mm)	9.8″ (250 mm)	7.9″ (200 mm)
Max. table load	8,598 lb (3,900 kg)	11,464 lb (5,200 kg)	30,865 lb (14,000 kg)	39,683 lb (18,000 kg)	61,729 lb (28,000 kg)	79,366 lb (36,000 kg)
Dimensions L × W × H	28.5 × 12.5 × 6.7 ft (8,700 × 3,800 × 2,050 mm)	36.1 × 12.5 × 6.7 ft (11,000 × 3,800 × 2,050 mm)	53.5 × 12.3 × 8 ft (16,300 × 3,750 × 2,450 mm)	54.1 × 14.3 × 8 ft (16,500 × 4,350 × 2,450 mm)	101.7 × 12.3 × 8 ft (31,000 × 3,750 × 2,450 mm)	103.3 × 14.3 × 8 ft (31,500 × 4,350 × 2,450 mm)

Laser source power is chosen at order (Raycus, MAX or IPG); the model number gives the nominal working area in decimetres (3015 = 3,000 × 1,500 mm). Speeds and accelerations are no-load values; the table load is the largest sheet the table carries, on the ULE for both exchange tables together.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

ULE-3015E – 6020E · ULE-6026E – 12526E · 7 MODELS


ULE ENCLOSED FIBER LASERS WITH EXCHANGE TABLE, 10 × 5 TO 41 × 8.5 FT, 3 – 40 KW



MODEL ULE · NOVOTECH ULE ENCLOSED FIBER LASER WITH EXCHANGE TABLE — 20 × 8.5 FT WORKING AREA, FULL ENCLOSURE, FRONT CONSOLE



ULE operator station — touchscreen CNC with the cutting database, emergency stop and hand pendant

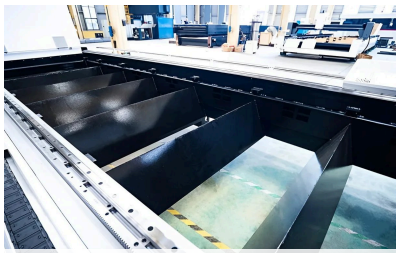

Inside the ULE bed — zoned extraction chambers under the table, rack and linear guide

The production laser: a full enclosure with laser-safe windows keeps the beam, sparks and fumes in, and two tables swap in 15 seconds so the operator loads one sheet while the other is cut. Four sizes from 10 × 5 to 20 × 6.7 ft take 3 to 20 kW with 11.8″ of Z travel; three large-format machines from 20 × 8.5 to 41 × 8.5 ft take 6 to 40 kW and 16.5″ of Z for heavy plate. 459 ft/min and 1.7 G, ±0.03 mm/m positioning, a bed flat to 0.05 mm per square metre and a twin-chain exchange that doubles the table load. Ready for a sheet storage tower and gantry loading.

STANDARD FEATURES

- ✓ 3 – 40 kW; 10 × 5 to 41 × 8.5 ft; exchange tables, 15 s swap; 459 ft/min, 1.7 G; Z travel 11.8 – 16.5″
- ✓ Fiber laser source chosen at order — Raycus, MAX or IPG — with an autofocus cutting head (Raytools or BOCI) and capacitive height sensing
- ✓ Cypcut bus control with nesting, the cutting-parameter database and power-based speed adjustment; hand pendant
- ✓ Welded bed annealed and shot-blasted to relieve stress; Inovance or Delta servos, YYC racks, Hiwin linear guides, DESBOER gearboxes
- ✓ Zoned dust extraction under the table, automatic lubrication, Hanli water chiller, air-cooled electrical cabinet with Schneider components
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)
- ✓ 1-year warranty; installation, operator training, parts and remote diagnostics from Mississauga, ON

OPTIONAL EQUIPMENT

- + Precitec ProCutter cutting head; IPG source; higher power at order
- + Camera nesting over the table for remnants
- + Sheet storage tower and gantry loading / unloading (flexible manufacturing system)
- + Dust collector, air compressor and nitrogen generator sized to the machine
- + Custom voltage: 208, 240 or 480 V 3-phase

TECHNICAL SPECIFICATIONS · 1 / 2

ULE ENCLOSED FIBER LASERS WITH EXCHANGE TABLE, 10 × 5 TO 41 × 8.5 FT, 3 – 40 KW

ULE ENCLOSED EXCHANGE-TABLE FIBER LASERS · 3 – 20 KW

4 models · 10 × 5 to 20 × 6.7 ft · table swap in 15 s

Model	ULE-3015E	ULE-4015E	ULE-4020E	ULE-6020E
Working area	**10.2 ft × 5.1 ft · 122 × 61″ (3,100 × 1,550 mm)**	**13.5 ft × 5.1 ft · 161 × 61″ (4,100 × 1,550 mm)**	**13.5 ft × 6.7 ft · 161 × 81″ (4,100 × 2,050 mm)**	**20 ft × 6.7 ft · 240 × 81″ (6,100 × 2,050 mm)**
Laser power	3 – 20 kW	3 – 20 kW	3 – 20 kW	3 – 20 kW
Max. speed no load	459 ft/min (140 m/min)	459 ft/min (140 m/min)	459 ft/min (140 m/min)	459 ft/min (140 m/min)
Max. speed with Delta servos	328 ft/min (100 m/min)	328 ft/min (100 m/min)	—	—
Max. acceleration	1.7 G	1.7 G	1.7 G	1.7 G
Positioning accuracy	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)
Repeat accuracy	±0.02 mm/m (±0.0002″/ft)	±0.02 mm/m (±0.0002″/ft)	±0.02 mm/m (±0.0002″/ft)	±0.02 mm/m (±0.0002″/ft)
Z travel	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)
Max. table load both tables, single chain	3,307 lb (1,500 kg)	4,189 lb (1,900 kg)	5,732 lb (2,600 kg)	8,818 lb (4,000 kg)
Max. table load, twin chain both tables	6,614 lb (3,000 kg)	8,378 lb (3,800 kg)	11,464 lb (5,200 kg)	17,637 lb (8,000 kg)
Table exchange	15 s	15 s	15 s	15 s
Dimensions L × W × H	28.9 × 9.7 × 7.5 ft (8,800 × 2,950 × 2,300 mm)	35.4 × 9.7 × 7.5 ft (10,800 × 2,950 × 2,300 mm)	35.4 × 11.5 × 7.5 ft (10,800 × 3,500 × 2,300 mm)	49.2 × 11.5 × 7.5 ft (15,000 × 3,500 × 2,300 mm)

TECHNICAL SPECIFICATIONS · 2 / 2

ULE ENCLOSED FIBER LASERS WITH EXCHANGE TABLE, 10 × 5 TO 41 × 8.5 FT, 3 – 40 KW

ULE LARGE-FORMAT EXCHANGE-TABLE FIBER LASERS · 6 – 40 KW

3 models · 20 × 8.5 to 41 × 8.5 ft

Model	ULE-6026E	ULE-8026E	ULE-12526E
Working area	**20 ft × 8.5 ft (6,100 × 2,600 mm)**	**26.6 ft × 8.5 ft (8,100 × 2,600 mm)**	**41 ft × 8.5 ft (12,500 × 2,600 mm)**
Laser power	6 – 40 kW	6 – 40 kW	6 – 40 kW
Max. speed no load	459 ft/min (140 m/min)	459 ft/min (140 m/min)	459 ft/min (140 m/min)
Max. acceleration	1.7 G	1.7 G	1.7 G
Positioning accuracy	±0.0012″ (±0.03 mm)	±0.0016″ (±0.04 mm)	±0.0012″ (±0.03 mm) · Y axis ±0.0024″ (±0.06 mm)
Repeat accuracy	±0.0008″ (±0.02 mm)	±0.0008″ (±0.02 mm)	±0.0012″ (±0.03 mm)
Z travel	16.5″ (420 mm)	16.5″ (420 mm)	16.5″ (420 mm)
Max. table load both tables, single chain	13,669 lb (6,200 kg)	18,078 lb (8,200 kg)	27,558 lb (12,500 kg)
Max. table load, twin chain both tables	27,337 lb (12,400 kg)	36,156 lb (16,400 kg)	55,115 lb (25,000 kg)
Table exchange	15 s	15 s	15 s
Dimensions L × W × H	49.2 × 13.9 × 8.9 ft (15,000 × 4,250 × 2,700 mm)	64 × 13.9 × 8.9 ft (19,500 × 4,250 × 2,700 mm)	90.2 × 13.9 × 8.9 ft (27,500 × 4,250 × 2,700 mm)

Laser source power is chosen at order (Raycus, MAX or IPG); the model number gives the nominal working area in decimetres (3015 = 3,000 × 1,500 mm). Speeds and accelerations are no-load values; the table load is the largest sheet the table carries, on the ULE for both exchange tables together.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

ULG-13035A – 26045A · ULG-13035C – 26045C · 12 MODELS

ULG GROUND-RAIL PLATE LASERS, 42.7 OR 85.3 FT × UP TO 14.8 FT, 12 – 60 KW



MODEL ULG · NOVOTECH ULG GROUND-RAIL PLATE LASER — ENCLOSED GANTRY CABIN RUNNING ON FLOOR RAILS, PLATE TABLE BEHIND, CONSOLE IN FRONT



ULG with a 59 × 14.8 ft (18 × 4.5 m) table and a 30 kW source installed in a heavy-equipment plant



ULG gantry and cutting head over the slat table — the gantry runs on its own ground rails

For plate too long, too wide or too heavy for a table machine: the ULG's gantry runs on rails set in the floor beside a separate plate-support table, so the table carries up to 202,000 lb (91.8 t) of plate without loading the motion axes. Tables 42.7 or 85.3 ft long and 11.5, 13.1 or 14.8 ft wide, other lengths to order; 12 to 60 kW for thick plate. Two gantries: the ULG-A runs to 262 ft/min and 1.1 G, the heavier ULG-C leaves 11.8" under the beam with a 60 kW source. Loaded by crane, with zoned extraction along the whole table — the laser for structural steel, tower, mining and heavy-equipment fabricators.

STANDARD FEATURES

- ✓ 12 – 60 kW; tables 42.7 or 85.3 ft × 11.5 – 14.8 ft, other lengths to order; table loads to 202,000 lb; to 262 ft/min, 1.1 G
- ✓ Gantry on ground rails, separate from the plate-support table — the plate load never reaches the motion axes
- ✓ Fiber laser source chosen at order — Raycus, MAX or IPG — with a high-power autofocus cutting head
- ✓ Bus CNC with edge finding, nesting, common-line cutting and remnant functions; touchscreen console
- ✓ Positioning ±0.03 mm/m over the whole table; transmission covers and automatic lubrication on the long axis
- ✓ Zoned fume extraction along the table; replaceable support slats
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)
- ✓ 1-year warranty; installation, operator training, parts and remote diagnostics from Mississauga, ON

OPTIONAL EQUIPMENT

- + Bevel cutting head
- + MES connection and industry file interfaces
- + Dust collector, compressor and gas supply sized to the machine
- + Custom voltage: 208, 240 or 480 V 3-phase

TECHNICAL SPECIFICATIONS · 1 / 2

ULG GROUND-RAIL PLATE LASERS, 42.7 OR 85.3 FT × UP TO 14.8 FT, 12 – 60 KW

ULG-A GROUND-RAIL PLATE LASERS · 12 – 60 KW

6 models · 42.7 or 85.3 ft long, 11.5 – 14.8 ft wide · to 262 ft/min and 1.1 G

Model	ULG-13035A	ULG-13040A	ULG-13045A	ULG-26035A	ULG-26040A	ULG-26045A
Working area	**42.7 ft × 11.5 ft (13,000 × 3,500 mm)**	**42.7 ft × 13.1 ft (13,000 × 4,000 mm)**	**42.7 ft × 14.8 ft (13,000 × 4,500 mm)**	**85.3 ft × 11.5 ft (26,000 × 3,500 mm)**	**85.3 ft × 13.1 ft (26,000 × 4,000 mm)**	**85.3 ft × 14.8 ft (26,000 × 4,500 mm)**
Laser power	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW
Max. speed axes combined	262 ft/min (80 m/min)	230 ft/min (70 m/min)	197 ft/min (60 m/min)	262 ft/min (80 m/min)	230 ft/min (70 m/min)	197 ft/min (60 m/min)
Max. acceleration axes combined	1.1 G	1 G	0.85 G	1.1 G	1 G	0.85 G
Positioning accuracy	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)
Repeat accuracy	X ±0.0012″ (±0.03 mm) · Y ±0.0016″ (±0.04 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0016″ (±0.04 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0016″ (±0.04 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0024″ (±0.06 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0024″ (±0.06 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0024″ (±0.06 mm)
Z travel	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)
Clearance under the gantry	7.5″ (190 mm)	7.5″ (190 mm)	7.5″ (190 mm)	7.5″ (190 mm)	7.5″ (190 mm)	7.5″ (190 mm)
Max. table load	78,705 lb (35,700 kg)	89,948 lb (40,800 kg)	101,192 lb (45,900 kg)	157,410 lb (71,400 kg)	179,897 lb (81,600 kg)	202,384 lb (91,800 kg)
Dimensions L × W × H	53.1 × 17.4 × 6.4 ft (16,200 × 5,300 × 1,950 mm)	53.1 × 19 × 6.4 ft (16,200 × 5,800 × 1,950 mm)	53.1 × 20.7 × 6.4 ft (16,200 × 6,300 × 1,950 mm)	100.1 × 17.4 × 6.4 ft (30,500 × 5,300 × 1,950 mm)	102 × 19 × 6.4 ft (31,100 × 5,800 × 1,950 mm)	102 × 20.7 × 6.4 ft (31,100 × 6,300 × 1,950 mm)

TECHNICAL SPECIFICATIONS · 2 / 2

ULG GROUND-RAIL PLATE LASERS, 42.7 OR 85.3 FT × UP TO 14.8 FT, 12 – 60 KW

ULG-C GROUND-RAIL PLATE LASERS · 12 – 60 KW

6 models · heavier gantry, 11.8″ under the beam with a 60 kW source

Model	ULG-13035C	ULG-13040C	ULG-13045C	ULG-26035C	ULG-26040C	ULG-26045C
Working area	**42.7 ft × 11.5 ft (13,000 × 3,500 mm)**	**42.7 ft × 13.1 ft (13,000 × 4,000 mm)**	**42.7 ft × 14.8 ft (13,000 × 4,500 mm)**	**85.3 ft × 11.5 ft (26,000 × 3,500 mm)**	**85.3 ft × 13.1 ft (26,000 × 4,000 mm)**	**85.3 ft × 14.8 ft (26,000 × 4,500 mm)**
Laser power	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW
Max. speed axes combined	230 ft/min (70 m/min)	197 ft/min (60 m/min)	164 ft/min (50 m/min)	230 ft/min (70 m/min)	197 ft/min (60 m/min)	164 ft/min (50 m/min)
Max. acceleration axes combined	0.8 G	0.7 G	0.6 G	0.8 G	0.7 G	0.6 G
Positioning accuracy	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)	±0.03 mm/m (±0.0004″/ft)
Repeat accuracy	X ±0.0012″ (±0.03 mm) · Y ±0.0020″ (±0.05 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0020″ (±0.05 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0020″ (±0.05 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0028″ (±0.07 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0028″ (±0.07 mm)	X ±0.0012″ (±0.03 mm) · Y ±0.0028″ (±0.07 mm)
Z travel	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)
Clearance under the gantry	7.5″ (190 mm) to 40 kW · 11.8″ (300 mm) at 60 kW	7.5″ (190 mm) to 40 kW · 11.8″ (300 mm) at 60 kW	7.5″ (190 mm) to 40 kW · 11.8″ (300 mm) at 60 kW	7.5″ (190 mm) to 40 kW · 11.8″ (300 mm) at 60 kW	7.5″ (190 mm) to 40 kW · 11.8″ (300 mm) at 60 kW	7.5″ (190 mm) to 40 kW · 11.8″ (300 mm) at 60 kW
Max. table load	78,705 lb (35,700 kg)	89,948 lb (40,800 kg)	101,192 lb (45,900 kg)	157,410 lb (71,400 kg)	179,897 lb (81,600 kg)	202,384 lb (91,800 kg)
Dimensions L × W × H	54 × 17.7 × 7.2 ft (16,450 × 5,400 × 2,200 mm)	54 × 19.4 × 7.2 ft (16,450 × 5,900 × 2,200 mm)	54 × 21 × 7.2 ft (16,450 × 6,390 × 2,200 mm)	100.7 × 17.7 × 7.2 ft (30,700 × 5,390 × 2,200 mm)	102 × 19.3 × 7.2 ft (31,100 × 5,890 × 2,200 mm)	102 × 21 × 7.2 ft (31,100 × 6,390 × 2,200 mm)

The model number gives the table in decimetres (13035 = 13,000 × 3,500 mm); other lengths are built to order — the photos show 59 ft (18 m) and 66 ft (20 m) machines. Laser power is chosen at order. Speeds and accelerations are no-load values with the axes combined; the table load is the largest plate the support table carries.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

ULFT 3015 - 26032 · 13 TABLE SIZES

ULFT OPEN-TYPE SHEET-AND-TUBE FIBER LASERS, 10 × 5 TO 85 × 10.5 FT PLUS TUBE TO Ø13.8″, 1.5 – 60 KW



MODEL ULFT · NOVOTECH ULFT OPEN-TYPE SHEET-AND-TUBE FIBER LASER — 10 × 5 FT TABLE AND A ROTARY CHUCK FOR TUBE ON ONE MACHINE



Pneumatic chuck of the tube unit — one-key self-centring, three times faster than an electric chuck



ULFT bed — hollow welded frame with fish-scale stiffeners, stress-relieved

Sheet and tube on one open-type machine: the ULF table for sheet and plate, and along its side a rotary pneumatic chuck and supports for round, square and rectangular tube to Ø8.7″ or Ø13.8″ in 20, 29.5 or 39 ft lengths. The same source and head cut both, so a shop that cuts a few tubes a week does not need a second laser. Thirteen table sizes from 10 × 5 to 85 × 10.5 ft, 1.5 to 60 kW, 459 ft/min.

STANDARD FEATURES

- ✓ Sheet 10 × 5 to 85 × 10.5 ft; tube Ø8.7 / 13.8″ chuck, 20 – 39 ft; 1.5 – 60 kW; 459 ft/min, 1 – 1.5 G
- ✓ Fiber laser source chosen at order — Raycus, MAX or IPG — with an autofocus cutting head (Raytools or BOCI) and capacitive height sensing
- ✓ Cypcut bus control with nesting, the cutting-parameter database and power-based speed adjustment; hand pendant
- ✓ Welded bed annealed and shot-blasted to relieve stress; Inovance or Delta servos, YYC racks, Hiwin linear guides, DESBOER gearboxes
- ✓ Zoned dust extraction under the table, automatic lubrication, Hanli water chiller, air-cooled electrical cabinet with Schneider components
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)
- ✓ 1-year warranty; installation, operator training, parts and remote diagnostics from Mississauga, ON

OPTIONAL EQUIPMENT

- + Precitec ProCutter cutting head; IPG source; higher power at order
- + Camera nesting over the table for remnants
- + Sheet storage tower and gantry loading / unloading (flexible manufacturing system)
- + Dust collector, air compressor and nitrogen generator sized to the machine
- + Custom voltage: 208, 240 or 480 V 3-phase
- + Tube supports and unloading for 39 ft lengths

TECHNICAL SPECIFICATIONS

ULFT OPEN-TYPE SHEET-AND-TUBE FIBER LASERS, 10 × 5 TO 85 × 10.5 FT PLUS TUBE TO Ø13.8", 1.5 – 60 KW

ULFT OPEN-TYPE SHEET-AND-TUBE FIBER LASERS

13 table sizes · 10 × 5 to 85 × 10.5 ft · tube to Ø13.8" · 1.5 – 60 kW

Model	ULFT series
Working area sheet	**10 × 5 ft to 85 × 10.5 ft (3,000 × 1,500 – 26,000 × 3,200 mm)**
Table sizes sheet	10 × 5, 13 × 5, 20 × 5, 13 × 6.6 and 20 × 6.6 ft; 20, 26, 43 or 85 ft × 8.5 or 10.5 ft (3 × 1.5 to 26 × 3.2 m)
Tube capacity round / square	**Ø8.7" or Ø13.8" chuck (Ø220 / 350 mm); square tube to 12.6" (320 mm) on the large chuck**
Tube length	**19.7, 29.5 or 39.4 ft (6, 9 or 12 m)**
Laser power	1.5 – 60 kW
Max. speed no load	459 ft/min (140 m/min)
Max. acceleration	1 – 1.5 G
Positioning accuracy	±0.03 mm/m (±0.0004"/ft)
Repeat accuracy	±0.02 mm/m (±0.0002"/ft)

Laser source power is chosen at order (Raycus, MAX or IPG); the model number gives the nominal working area in decimetres (3015 = 3,000 × 1,500 mm). Speeds and accelerations are no-load values; the table load is the largest sheet the table carries, on the ULE for both exchange tables together.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

ULET 3015 – 12526 · 8 TABLE SIZES

ULET ENCLOSED SHEET-AND-TUBE FIBER LASERS, 10 × 5 TO 41 × 8.5 FT PLUS TUBE TO Ø13.8″, 1.5 – 40 KW



MODEL ULET · NOVOTECH ULET ENCLOSED SHEET-AND-TUBE FIBER LASER — FULL ENCLOSURE WITH THE TUBE CHUCK AT THE END



Pneumatic chuck clamping a square tube



Crossbeam and Z axis of the ULET — manganese steel, heat-treated

The enclosed version of the sheet-and-tube laser: the ULE cabin with its exchange table for sheet, and at the end of the machine a pneumatic chuck — three times faster to clamp than an electric one — for round, square and rectangular tube to Ø8.7″ or Ø13.8″ and 39 ft long. Eight table sizes from 10 × 5 to 41 × 8.5 ft, 1.5 to 40 kW; quieter and cleaner than an open machine, for shops where the laser stands next to assembly or welding.

STANDARD FEATURES

- ✓ Enclosed sheet 10 × 5 to 41 × 8.5 ft; tube Ø8.7 / 13.8″ chuck, 20 – 39 ft; 1.5 – 40 kW; 459 ft/min
- ✓ Fiber laser source chosen at order — Raycus, MAX or IPG — with an autofocus cutting head (Raytools or BOCI) and capacitive height sensing
- ✓ Cypcut bus control with nesting, the cutting-parameter database and power-based speed adjustment; hand pendant
- ✓ Welded bed annealed and shot-blasted to relieve stress; Inovance or Delta servos, YYC racks, Hiwin linear guides, DESBOER gearboxes
- ✓ Zoned dust extraction under the table, automatic lubrication, Hanli water chiller, air-cooled electrical cabinet with Schneider components
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)
- ✓ 1-year warranty; installation, operator training, parts and remote diagnostics from Mississauga, ON

OPTIONAL EQUIPMENT

- + Precitec ProCutter cutting head; IPG source; higher power at order
- + Camera nesting over the table for remnants
- + Sheet storage tower and gantry loading / unloading (flexible manufacturing system)
- + Dust collector, air compressor and nitrogen generator sized to the machine
- + Custom voltage: 208, 240 or 480 V 3-phase
- + Tube supports and unloading for 39 ft lengths

TECHNICAL SPECIFICATIONS

ULET ENCLOSED SHEET-AND-TUBE FIBER LASERS, 10 × 5 TO 41 × 8.5 FT PLUS TUBE TO Ø13.8", 1.5 – 40 KW

ULET ENCLOSED SHEET-AND-TUBE FIBER LASERS

8 table sizes · 10 × 5 to 41 × 8.5 ft · tube to Ø13.8" · 1.5 – 40 kW

Model	ULET series
Working area sheet	**10 × 5 ft to 41 × 8.5 ft (3,000 × 1,500 – 12,500 × 2,600 mm)**
Table sizes sheet	10 × 5, 13 × 5, 20 × 5, 13 × 6.6 and 20 × 6.6 ft; 20, 26 or 41 ft × 8.5 ft (3 × 1.5 to 12.5 × 2.6 m)
Tube capacity round / square	**Ø8.7" or Ø13.8" chuck (Ø220 / 350 mm); square tube to 12.6" (320 mm) on the large chuck**
Tube length	**19.7, 29.5 or 39.4 ft (6, 9 or 12 m)**
Laser power	1.5 – 40 kW
Max. speed no load	459 ft/min (140 m/min)
Max. acceleration	1 – 1.5 G
Positioning accuracy	±0.03 mm/m (±0.0004"/ft)
Repeat accuracy	±0.02 mm/m (±0.0002"/ft)
Chuck	pneumatic, three times faster than an electric chuck

Laser source power is chosen at order (Raycus, MAX or IPG); the model number gives the nominal working area in decimetres (3015 = 3,000 × 1,500 mm). Speeds and accelerations are no-load values; the table load is the largest sheet the table carries, on the ULE for both exchange tables together.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.