BEKAMAK MACHINERY · SOLD & SERVICED IN CANADA BY NOVOTECH

BAND SAWS & CIRCULAR SAWS

CIRCULAR SAWS · PIVOT BAND SAWS · DOUBLE COLUMN BAND SAWS · GANTRY & VERTICAL BAND SAWS











Turkey
MADE IN TURKEY

25
MACHINE FAMILIES

1-Year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

BEKAMAK MACHINERY BY NOVOTECH

CONTENTS

CIRCULAR SAWS

TCT High-Tech Circular Saws BMDO XS 04
HSS Fully Automatic Circular Saws BMDO CS 06

PIVOT TYPE BAND SAWS

Semi-Automatic Double Miter Band Saws BMSY DG / DGH 07
Semi-Automatic Single Miter Band Saws BMSY 320G / 320GL 11
Semi-Automatic Band Saws for Straight Cutting BMSY 280 – 440 14
Automatic Single Miter Band Saws with Servo Feeding BMSO 320GS / 320GLS 16
Automatic Double Miter Band Saw with Servo Feeding BMSO 270DGS 18
Manual Double Miter Band Saws BMS 230DG / 270DG 10
Roller-Type Automatic Band Saws BMSO 230 – 440 13
Roller-Type Automatic Band Saws with Encoder BMSO 230E – 350E 15
Roller-Type Automatic Single Miter Band Saw BMSO 350GA 17

DOUBLE COLUMN BAND SAWS

Semi-Automatic Double Column Band Saws BMSY 330C – 1020C 19
Roller-Type Automatic Double Column Band Saws BMSO 330C – 825C 21
Semi-Automatic NC Double Miter Band Saws BMSY DG NC 24
Fully Automatic Servo-Feed Band Saws for Single Miter Cutting BMSO CGS NC 27
High-Tech Band Saws for Mass Production BMSO XS 30
Semi-Automatic Double Column Band Saws with Split Vise BMSY C SV 20
Semi-Automatic Single Miter Double Column Band Saws BMSY CGH 22
Fully Automatic Band Saws with Servo Feeding for Straight Cutting BMSO CS NC 26
Fully Automatic Servo-Feed Band Saw for Double Miter Cutting BMSO 440CDGS NC 29
Large Heavy-Duty Band Saws for Straight Cutting BMSY 1110C – 1515C 31

GANTRY BAND SAWS

Gantry Band Saw GANTRY 2200XS 32

VERTICAL BAND SAWS

Fully Automatic Cross Vertical Band Saw CROSS 0626VT 33
Block Cutting Vertical Band Saw VB 0814-8 36
Semi-Automatic Vertical Band Saws BMSY 460VG / 613VT 34

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR BEKAMAK MACHINERY

Sales, installation, parts and technical support across Canada

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario. Every machine in this catalogue is built by Bekamak and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

BEKAMAK · BURSA, TURKEY

ABOUT THE MANUFACTURER

Founded as a family business in 1984, Bekamak has grown into a pioneer that has taken the Turkish sawing machine industry onto the global stage. Since its first export to Germany in 1991, the company has been represented in nearly 80 countries, with a strong presence in Europe, Russia and the United States. Its circular saws and band saws, known for high efficiency across a wide range of products, are the preferred choice of Turkey's leading steel producers. Operating from a 215,000 sq ft (20,000 m^2) facility with 220 qualified employees, Bekamak is committed to continuous development, innovation and uncompromising quality.



Bekamak headquarters and production facility

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment.

BMDO 75XS · 100XS · 130XS · 150XS · CARBIDE-TIPPED (TCT) CIRCULAR SAWING

TCT HIGH-TECH CIRCULAR SAWS





BMDO 150XS

TCT high-tech circular saw

BMDO XS line

With integrated loading & unloading system


Mass production in continuous operation: the BMDO XS series produces cut-off pieces of steel and non-ferrous metals with material cross-sections up to 5-7/8" diameter. The BMDO XS is designed for TCT (tungsten carbide tipped) circular saw blades to cut solid bars at high speed with excellent precision, and it can also run HSS blades for cutting tubes. With its standard 31.5" servo feed stroke and 20 ft automatic loader, the BMDO XS is ideal for large-scale production of solid bars. Integrated loading and unloading systems, designed to work seamlessly with the machine, save valuable time and floor space.



Servo bar feeding



Touch-screen control panel

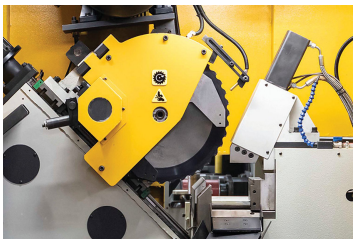

TCT saw blade & clamping

OPTIONAL FEATURES

- FX4002 Pro air filter
- 20 ft (6 m) automatic loader

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BMDO 75XS · 100XS · 130XS · 150XS · CARBIDE-TIPPED (TCT) CIRCULAR SAWING

TCT HIGH-TECH CIRCULAR SAWS (CONT.)

TECHNICAL DETAILS

Model		BMDO 75XS	BMDO 100XS	BMDO 130XS	BMDO 150XS
Cutting capacity — round (min-max)		3/8" – 3-1/8"	13/16" – 4-1/8"	13/16" – 5-1/8"	13/16" – 6-1/4"
Cutting capacity — square (min-max)		3/8" – 2"	13/16" – 2-3/4"	13/16" – 3-1/2"	1-3/4" – 4-3/8"
Vise opening		3-1/8"	4-1/8"	5-3/8"	7-1/8"
Stock table: bar length	FT	19.7 FT	19.7 FT	19.7 FT	19.7 FT
Stock table: bar length	in	236.2	236.2	236.2	236.2
Stock table: max. bar Ø		3-1/8"	3-7/8"	5-1/8"	5-7/8"
Stock table: number of bars		17	10	7	6
Incline loader dimensions (L × W × H)	in	221 × 65 × 49	243 × 85 × 49	243 × 73 × 50	247 × 85 × 63
Saw blade diameter		11-1/4"	14-1/4"	14-1/4" / 16-3/4"	18"
Saw blade kerf / body thickness	in	0.079 / 0.067	0.102 / 0.089	0.102 / 0.089	0.106 / 0.089
Saw blade arbor hole		1-1/4"	1-5/8"	1-5/8"	1-5/8"
Drive pin holes (qty / Ø / PCD, mm)		2/11/63 – 2/12/90 – 2/15/80	2/11/63 – 2/12/90 – 2/15/80	2/11/63 – 2/12/90 – 2/15/80	2/11/63 – 2/12/90 – 2/15/80
Blade speed	ft/min	131 – 919	131 – 656	131 – 656	131 – 656
Main motor	HP	10	20	20	20
Saw head feed motor	HP	2.7	2.7	2.7	2.7
Hydraulic motor	HP	3	3	3	3
Coolant pump	HP	0.3	0.3	0.3	0.3
Chip conveyor motor	HP	0.3	0.3	0.3	0.3
Cut-to-length feed motor	HP	2.7	2.7	2.7	2.7
Total power requirement	HP	20	30	30	30
Air pressure	psi	70	70	70	70
Air consumption		8.6 CFM	8.6 CFM	8.6 CFM	8.6 CFM
Hydraulic tank capacity	L	70	70	70	70
Oil mist tank capacity	L	1.5	1.5	1.5	1.5
Index mechanism		Servo feeder	Servo feeder	Servo feeder	Servo feeder
Material index drive		AC servo motor & ball screw	AC servo motor & ball screw	AC servo motor & ball screw	AC servo motor & ball screw
Feed stroke	in	31.5	31.5	31.5	31.5
Cut length range	in	0.4 – 393.7	0.4 – 393.7	0.4 – 393.7	0.4 – 393.7
Feeding speed	ft/min	0 – 2,461	0 – 2,461	0 – 2,461	0 – 2,461
Min. end trimming length	in	0.4	0.4	0.4	0.4
Remnant length	in	2.4	2.4	2.4	2.4
Machine dimensions (W × L × H)	in	121 × 105 × 101	134 × 105 × 106	134 × 105 × 106	134 × 105 × 106
Table height	in	35.4	35.4	35.4	35.4
Machine weight	lb	6,768	7,937	8,014	8,113

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

BMDO 80CS · BMDO 100CS · HSS CIRCULAR SAWING FOR PIPE & PROFILE

HSS FULLY AUTOMATIC CIRCULAR SAWS



MODEL **BMDO 100CS** HSS fully automatic circular saw with 20 ft automatic loading table

The BMDO CS series meets the expectations of customers who need fast cutting times in mass production of pipe and profile. Specially designed for HSS (high-speed steel) circular saw blades, the BMDO CS cuts quickly with excellent precision. With its servo feeding and 20 ft (6 m) automatic loading table, it is ideal for high-volume production.

TECHNICAL DETAILS

Model		BMDO 80CS	BMDO 100CS
Cutting capacity — round (min-max)		13/16" – 3-1/8"	13/16" – 3-7/8"
Clamp max. opening		3-3/8"	4-3/8"
Incline loader dimensions (L × W × H)	in	203 × 30 × 4	203 × 30 × 4
Saw blade diameter (max.)		10-1/4" – 13-3/4"	10-1/4" – 14-1/4"
Saw blade thickness (max.)	in	0.079 – 0.118	0.079 – 0.118
Blade speed	ft/min	72 – 427	72 – 427
Main motor	HP	7.4	7.4
Main servo motor	HP	2.7	2.7
Hydraulic motor	HP	2	2
Coolant motor	HP	0.3	0.3
Chip conveyor motor	HP	0.3	0.3
Feeder servo motor	HP	1.3	1.3
Feed length	FT	1.6 FT	3.3 FT
Feed length	in	19.7	39.4
Dimensions (L × W × H)	in	63 × 67 × 83	85 × 79 × 83
Working height	in	35.4	35.4
Weight	lb	3,142	3,968

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.


BMSY 230DG – 440DGH · DOUBLE-SIDED MITER CUTTING


SEMI-AUTOMATIC DOUBLE MITER BAND SAWS



MODEL **BMSY 440DGH** Semi-automatic double miter cutting band saw

Great performance on the smallest footprint. These models offer optimum performance for every sawing application.


Chip brush on blade wheel

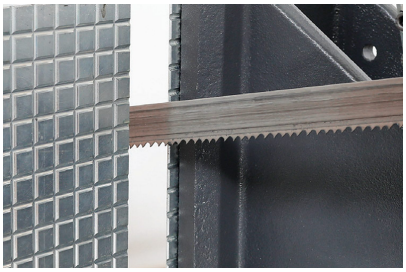
Bi-metal band blade with guard


Control panel with emergency stop

OPTIONAL FEATURES

- 10 ft (3 m) motorized roller table
- 10 ft (3 m) roller table
- Microspray device
- Laser line pointer

DG models (without H) do not have a hydraulic vise.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BMSY 230DG – 440DGH · DOUBLE-SIDED MITER CUTTING

SEMI-AUTOMATIC DOUBLE MITER BAND SAWS (CONT.)

TECHNICAL DETAILS — BMSY 320DGH TO 440DGH

Model		BMSY 440DGH	BMSY 360DGH	BMSY 360DGH ECO	BMSY 320DGH
Cutting capacity 0° — round		17-1/4"	14-1/4"	14-1/4"	12-1/2"
Cutting capacity 0° — rectangular (W × H)		17-1/4" × 24"	24" × 14-1/4"	20" × 14-1/4"	17-3/4" × 12-1/2"
Cutting capacity 0° — square		17-1/4"	14-1/4"	14-1/4"	12-1/2"
Cutting capacity +30° — round		17-1/4"	14-1/4"	14-1/4"	12-1/2"
Cutting capacity +30° — rectangular (W × H)		17-1/4" × 19-3/4"	21-3/4" × 14-1/4"	17-1/4" × 14-1/4"	15" × 12-1/2"
Cutting capacity +30° — square		17-1/4"	14-1/4"	14-1/4"	12-1/2"
Cutting capacity +45° — round		16-1/4"	14-1/4"	14-1/4"	12-1/2"
Cutting capacity +45° — rectangular (W × H)		17-1/4" × 16-1/4"	17-1/4" × 14-1/4"	15-1/4" × 14-1/4"	13" × 12-1/2"
Cutting capacity +45° — square		16-1/4"	14-1/4"	14-1/4"	12-1/2"
Cutting capacity +60° — round		12-1/2"	12-1/2"	9-7/8"	—
Cutting capacity +60° — rectangular (W × H)		17-1/4" × 9-7/8"	10-3/4" × 14-1/4"	8-5/8" × 14-1/4"	—
Cutting capacity +60° — square		10-3/4"	11"	8-5/8"	—
Cutting capacity -30° — round		17-1/4"	14-1/4"	14-1/4"	12-1/2"
Cutting capacity -30° — rectangular (W × H)		17-1/4" × 19-3/4"	21-3/4" × 14-1/4"	17-1/4" × 14-1/4"	15" × 12-1/2"
Cutting capacity -30° — square		17-1/4"	14-1/4"	14-1/4"	12-1/2"
Cutting capacity -45° — round		16-1/4"	14-1/4"	14-1/4"	12-1/2"
Cutting capacity -45° — rectangular (W × H)		17-1/4" × 16-1/4"	17-1/4" × 14-1/4"	15-1/4" × 14-1/4"	13-1/2" × 12-1/2"
Cutting capacity -45° — square		16-1/4"	14-1/4"	14-1/4"	11-3/4"
Cutting capacity -60° — round		12-1/2"	13"	11"	9"
Cutting capacity -60° — rectangular (W × H)		17-1/4" × 11"	11-3/4" × 14-1/4"	10-1/4" × 14-1/4"	9" × 8-5/8"
Cutting capacity -60° — square		11"	11-3/4"	10-1/4"	8-5/8"
Main motor	HP	4	4	4	3
Hydraulic pump motor	HP	0.7	0.7	0.5	0.5
Coolant pump	HP	0.2	0.2	0.2	0.2
Blade speed	ft/min	49 – 394	49 – 394	49 – 394	49 – 394
Band blade (W × T × L)	in	1-3/8 × 0.043 × 204-3/4	1-3/8 × 0.043 × 196-3/4	1-3/8 × 0.043 × 189	1-3/8 × 0.043 × 163-3/4
Working height	in	33.9	33.9	33.9	33.9
Weight	lb	3,616	3,241	3,197	2,271
Dimensions (L × W × H)	in	110 × 48 × 74	108 × 48 × 74	104 × 48 × 74	88 × 45 × 84

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

BMSY 230DG – 440DGH · DOUBLE-SIDED MITER CUTTING

SEMI-AUTOMATIC DOUBLE MITER BAND SAWS (CONT.)

TECHNICAL DETAILS — BMSY 230DG TO 270DGH

Model		BMSY 270DGH	BMSY 270DG	BMSY 230DGH	BMSY 230DG
Cutting capacity 0° — round		10-3/4"	10-3/4"	9"	9"
Cutting capacity 0° — rectangular (W × H)		13-3/4" × 8-5/8"	13-3/4" × 8-5/8"	12-1/2" × 5-1/8"	12-1/2" × 5-1/8"
Cutting capacity 0° — square		10-3/4"	10-3/4"	9"	9"
Cutting capacity +45° — round		9-1/2"	7-1/8"	8-1/4"	8-1/4"
Cutting capacity +45° — rectangular (W × H)		8-5/8" × 7-1/8"	8-5/8" × 7-1/8"	9" × 6-1/4"	9" × 6-1/4"
Cutting capacity +45° — square		7-1/8"	7-1/8"	7-1/2"	7-1/2"
Cutting capacity +60° — round		5-7/8"	5-7/8"	5-1/8"	5-1/8"
Cutting capacity +60° — rectangular (W × H)		5-7/8" × 3-7/8"	5-7/8" × 3-7/8"	5-1/8" × 3-7/8"	5-1/8" × 3-7/8"
Cutting capacity +60° — square		3-7/8"	3-7/8"	3-7/8"	3-7/8"
Cutting capacity -45° — round		7-7/8"	7-7/8"	7-1/8"	7-1/8"
Cutting capacity -45° — rectangular (W × H)		7-7/8" × 5-7/8"	7-7/8" × 5-7/8"	9" × 6-1/4"	9" × 3-1/2"
Cutting capacity -45° — square		6-3/4"	6-3/4"	5-7/8"	5-7/8"
Main motor	HP	2	2	1.3 – 1.7	1.3 – 1.7
Hydraulic pump motor	HP	0.5	0.5	0.5	0.5
Coolant pump	HP	0.2	0.2	0.2	0.2
Blade speed	ft/min	49 – 394	49 – 394	115 – 230	115 – 230
Band blade (W × T × L)	in	1-1/8 × 0.035 × 124-1/2	1-1/8 × 0.035 × 124-1/2	1-1/8 × 0.035 × 107-1/2	1-1/8 × 0.035 × 107-1/2
Working height	in	35.8	35.8	31.7	29.9
Weight	lb	1,157	1,049	1,025	948
Dimensions (L × W × H)	in	68 × 30 × 57	68 × 30 × 57	53 × 28 × 51	53 × 28 × 51

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

BMS 230DG · BMS 270DG · MANUAL DOUBLE-SIDED MITER CUTTING

MANUAL DOUBLE MITER BAND SAWS





Saw bow detail

MODEL **BMS 230DG** Manual double miter cutting band saw

OPTIONAL FEATURES

- 10 ft (3 m) material roller table
- Microspray device
- Inverter (variable blade speed)

TECHNICAL DETAILS

Model		BMS 230DG	BMS 270DG
Cutting capacity 0° — round		9″	10-3/4″
Cutting capacity 0° — rectangular (W × H)		12-1/2″ × 5-1/8″	13-3/4″ × 8-5/8″
Cutting capacity 0° — square		9″	10-3/4″
Cutting capacity +45° — round		8-1/4″	9-1/2″
Cutting capacity +45° — rectangular (W × H)		8-1/4″ × 6-1/4″	8-5/8″ × 7-1/8″
Cutting capacity +45° — square		7-1/2″	7-1/8″
Cutting capacity +60° — round		5-1/8″	5-7/8″
Cutting capacity +60° — rectangular (W × H)		5-1/8″ × 3-7/8″	5-7/8″ × 3-7/8″
Cutting capacity +60° — square		3-7/8″	3-7/8″
Cutting capacity -45° — round		7-1/8″	7-7/8″
Cutting capacity -45° — rectangular (W × H)		9″ × 3-1/2″	7-7/8″ × 5-7/8″
Cutting capacity -45° — square		5-7/8″	6-3/4″
Main motor	HP	1.3 – 1.7	2
Coolant pump	HP	0.2	0.2
Blade speed	ft/min	115 – 230	49 – 394
Band blade (W × T × L)	in	1-1/8 × 0.035 × 107-1/2	1-1/8 × 0.035 × 124-1/2
Working height	in	31.7	35.8
Weight	lb	915	1,025
Dimensions (L × W × H)	in	53 × 28 × 51	68 × 30 × 57

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BMSY 320G · BMSY 320GL · ONE-SIDED MITER CUTTING

SEMI-AUTOMATIC SINGLE MITER BAND SAWS





Saw head detail

MODEL **BMSY 320G** Semi-automatic single miter cutting band saw

OPTIONAL FEATURES

- Hydraulic top clamping
- Microspray device
- 10 ft (3 m) material roller table

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BMSY 320G · BMSY 320GL · ONE-SIDED MITER CUTTING

SEMI-AUTOMATIC SINGLE MITER BAND SAWS (CONT.)

TECHNICAL DETAILS

Model		BMSY 320G	BMSY 320GL
Cutting capacity 0° — round		12-1/2"	12-1/2"
Cutting capacity 0° — rectangular (W × H)		13-3/4" × 12-1/2"	24" × 12-1/2"
Cutting capacity 0° — square		12-1/2"	12-1/2"
Cutting capacity +15° — round		12-1/2"	–
Cutting capacity +15° — rectangular (W × H)		13-1/2" × 11-3/4"	–
Cutting capacity +15° — square		11-3/4"	–
Cutting capacity +30° — round		11-3/4"	12-1/2"
Cutting capacity +30° — rectangular (W × H)		11-3/4" × 7-7/8"	20" × 12-1/2"
Cutting capacity +30° — square		9-7/8"	12-1/2"
Cutting capacity +45° — round		10-1/4"	12-1/2"
Cutting capacity +45° — rectangular (W × H)		9-7/8" × 7-1/8"	14" × 12-1/2"
Cutting capacity +45° — square		7-1/8"	12-1/2"
Cutting capacity +60° — round		6-1/4"	11"
Cutting capacity +60° — rectangular (W × H)		5-7/8" × 5-7/8"	11" × 11"
Cutting capacity +60° — square		5-7/8"	11"
Main motor	HP	2	3
Hydraulic pump motor	HP	0.5	0.5
Coolant pump	HP	0.2	0.2
Blade speed	ft/min	49 – 394	49 – 394
Band blade (W × T × L)	in	1-1/8 × 0.035 × 144	1-3/8 × 0.043 × 163-3/4
Working height	in	29.1	29.1
Weight	lb	2,238	2,635
Dimensions (L × W × H)	in	75 × 47 × 53	83 × 47 × 53

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

BMSO 230 · 320 · 320L · 440 · AUTOMATIC STRAIGHT CUTTING WITH ROLLER FEED

ROLLER-TYPE AUTOMATIC BAND SAWS



MODEL **BMSO 320** Roller-type automatic band saw

OPTIONAL FEATURES

- Microspray device
- Hydraulic blade tension
- Chip conveyor
- Inverter (variable blade speed)
- 10 ft (3 m) material roller table

TECHNICAL DETAILS

Model		BMSO 230	BMSO 320	BMSO 320L	BMSO 440
Cutting capacity 0° — round		9″	12-½″	13″	17-¼″
Cutting capacity 0° — rectangular (W × H)		9-½″ × 9″	12-½″ × 11-¾″	19-¾″ × 12-½″	22″ × 17-¼″
Cutting capacity 0° — square		9″	11-¾″	12-½″	17-¼″
Main motor	HP	1.3 – 1.7	3	3	4
Hydraulic pump motor	HP	0.5	0.5	0.5	0.7
Coolant pump	HP	0.2	0.2	0.2	0.2
Feed motor	HP	0.3	0.3	0.3	–
Drive motor	HP	–	–	–	0.7
Chip conveyor motor	HP	–	0.3	–	0.3
Blade speed	ft/min	49 – 394	49 – 394	49 – 394	49 – 394
Band blade (W × T × L)	in	1-⅛ × 0.035 × 107-½	1-⅛ × 0.035 × 144	1-⅜ × 0.043 × 163-¾	1-⅜ × 0.043 × 204-¾
Working height	in	23.2	25.2	25.2	28.9
Weight	lb	1,168	1,698	1,896	3,175
Dimensions (L × W × H)	in	67 × 31 × 46	75 × 33 × 51	83 × 33 × 51	104 × 44 × 67

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BMSY 280 · 320 · 320L · 350M · 440 · STRAIGHT & 45° CUTTING

SEMI-AUTOMATIC BAND SAWS FOR STRAIGHT CUTTING



MODEL **BMSY 320L** Semi-automatic straight cutting band saw

OPTIONAL FEATURES

- Microspray device
- Chip conveyor
- Turntable
- Hydraulic top clamping
- 10 ft (3 m) material roller table
- 10 ft (3 m) motorized roller table

TECHNICAL DETAILS

Model		BMSY 280	BMSY 320	BMSY 320L	BMSY 350M	BMSY 440
Cutting capacity 0° — round		11″	12-½″	13″	13-¾″	17-¼″
Cutting capacity 0° — rectangular (W × H)		13-¾″ × 7-⅞″	17-¼″ × 8-⅝″	24″ × 12-¼″	22-½″ × 10-¼″	24″ × 17-¼″
Cutting capacity 0° — square		11″	12-½″	13″	13-¾″	17-¼″
Cutting capacity +45° — round		9-½″	11″	12-½″	13-¾″	16-¼″
Cutting capacity +45° — rectangular (W × H)		9-½″ × 7-⅛″	11″ × 7-⅞″	18″ × 7-⅛″	18″ × 7-⅛″	16-¼″ × 17-¼″
Cutting capacity +45° — square		8-¼″	10-¼″	12-½″	13-¾″	16-¼″
Main motor	HP	2	2	3	3	4
Hydraulic pump motor	HP	0.5	0.5	0.5	0.5	0.7
Coolant pump	HP	0.2	0.2	0.2	0.2	0.2
Blade speed	ft/min	49 – 394	49 – 394	49 – 394	49 – 394	49 – 394
Band blade (W × T × L)	in	1-⅛ × 0.035 × 133-¾	1-⅛ × 0.035 × 144	1-⅜ × 0.043 × 163-¾	1-⅜ × 0.043 × 163-¾	1-⅜ × 0.043 × 204-¾
Working height	in	25.2	25.2	25.2	25.2	28.9
Weight	lb	1,367	1,477	1,704	1,753	2,888
Dimensions (L × W × H)	in	71 × 33 × 51	75 × 33 × 51	83 × 33 × 51	91 × 33 × 51	102 × 35 × 67

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BMSO 230E · 320E · 350E · ENCODER-CONTROLLED FEED LENGTH

ROLLER-TYPE AUTOMATIC BAND SAWS WITH ENCODER



MODEL **BMSO 320E** Roller-type automatic band saw with encoder

OPTIONAL FEATURES

- Microspray device
- Hydraulic blade tension
- Chip conveyor
- 10 ft (3 m) material roller table

TECHNICAL DETAILS

Model		BMSO 230E	BMSO 320E	BMSO 350E
Cutting capacity 0° — round		9″	12-½″	13-¾″
Cutting capacity 0° — rectangular (W × H)		9-½″ × 9″	12-½″ × 12-½″	17-¾″ × 13-¾″
Cutting capacity 0° — square		9″	11-¾″	13-¾″
Main motor	HP	1.3 – 1.7	3	4
Hydraulic pump motor	HP	0.5	0.5	0.7
Coolant pump	HP	0.2	0.2	0.2
Feed motor	HP	0.3	0.3	0.3
Chip conveyor motor	HP	–	–	0.3
Blade speed	ft/min	115 – 230	49 – 394	49 – 394
Band blade (W × T × L)	in	1-⅛ × 0.035 × 107-½	1-⅛ × 0.035 × 144	1-⅜ × 0.043 × 189
Working height	in	23.2	25.2	26
Weight	lb	1,168	1,698	2,646
Dimensions (L × W × H)	in	67 × 31 × 46	75 × 33 × 51	110 × 35 × 55

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BMSO 320GS · BMSO 320GLS · SERVO FEED, ONE-SIDED MITER CUTTING

AUTOMATIC SINGLE MITER BAND SAWS WITH SERVO FEEDING



MODEL **BMSO 320GLS** Automatic single miter band saw with servo feeding

OPTIONAL FEATURES

- Microspray device
- Chip conveyor
- 10 ft (3 m) roller table
- Hydraulic top clamping

TECHNICAL DETAILS

Model		BMSO 320GS	BMSO 320GLS
Cutting capacity 0° — round		12-1/2"	12-1/2"
Cutting capacity 0° — rectangular (W × H)		13-3/4" × 12-1/2"	24" × 12-1/2"
Cutting capacity 0° — square		12-1/2"	12-1/2"
Cutting capacity -30° — round		12-1/2"	12-1/2"
Cutting capacity -30° — rectangular (W × H)		12-1/2" × 9-7/8"	20" × 12-1/2"
Cutting capacity -30° — square		11"	12-1/2"
Cutting capacity -45° — round		10-1/4"	12-1/2"
Cutting capacity -45° — rectangular (W × H)		12-1/2" × 7-1/2"	14-1/4" × 12-1/2"
Cutting capacity -45° — square		8-5/8"	12-1/2"
Cutting capacity -60° — round		6-3/4"	10-1/4"
Cutting capacity -60° — rectangular (W × H)		7-7/8" × 4-3/4"	10-1/4" × 8-5/8"
Cutting capacity -60° — square		5-7/8"	8-5/8"
Main motor	HP	3	3
Hydraulic pump motor	HP	1.5	1.5
Coolant pump	HP	0.2	0.2
Servo motor	HP	1.3	—
Blade speed	ft/min	49 – 394	49 – 394
Band blade (W × T × L)	in	1-1/8 × 0.035 × 144	1-3/8 × 0.043 × 163-3/4
Working height	in	33.5	29.1
Weight	lb	5,093	4,542
Dimensions (L × W × H)	in	83 × 83 × 71	91 × 93 × 69

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BMSO 350GA · AUTOMATIC ONE-SIDED MITER CUTTING WITH ROLLER FEED

ROLLER-TYPE AUTOMATIC SINGLE MITER BAND SAW



MODEL **BMSO 350GA** Roller-type automatic single miter band saw

OPTIONAL FEATURES

- Microspray device
- Chip conveyor
- 10 ft (3 m) material roller table

CUTTING CAPACITY — BMSO 350GA

Miter angle	Round	Rectangular (W × H)	Square
0°	13-3/4″	15-3/4″ × 13-3/4″	13-3/4″
+30°	12-1/2″	15-3/4″ × 9″	13-3/4″
+45°	12-1/2″	10-1/4″ × 14-1/4″	11″

TECHNICAL DETAILS

Model		BMSO 350GA
Main motor	HP	3
Hydraulic pump motor	HP	0.5
Coolant pump	HP	0.2
Feed motor	HP	0.3
Blade speed	ft/min	49 – 394
Band blade (W × T × L)	in	1-3/8 × 0.043 × 163-3/4
Working height	in	29.9
Weight	lb	2,315
Dimensions (L × W × H)	in	96 × 36 × 80

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BMSO 270DGS · SERVO FEED, DOUBLE-SIDED MITER CUTTING

AUTOMATIC DOUBLE MITER BAND SAW WITH SERVO FEEDING



MODEL **BMSO 270DGS** Automatic double miter band saw with servo feeding

CUTTING CAPACITY — BMSO 270DGS

Miter angle	Round	Rectangular (W × H)	Square
0°	10-3/4"	13-1/2" × 9-1/2"	10-3/4"
+30°	10-3/4"	10-3/4" × 9-7/8"	10-3/4"
+45°	9-7/8"	9" × 7-1/8"	7-1/8"
+60°	5-7/8"	5-7/8" × 3-7/8"	3-7/8"
-30°	10-1/4"	10-3/4" × 7-1/8"	8-5/8"
-45°	7-7/8"	8-1/4" × 3-7/8"	6-3/4"

TECHNICAL DETAILS

Model		BMSO 270DGS
Main motor	HP	2
Hydraulic pump motor	HP	1.5
Coolant pump	HP	0.2
Feed motor	HP	0.5
Blade speed	ft/min	49 – 394
Band blade (W × T × L)	in	1-1/8 × 0.035 × 124-1/2
Working height	in	33.3
Weight	lb	2,028
Dimensions (L × W × H)	in	94 × 75 × 63

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.


BMSY 330C – 1020C · STRAIGHT AND 45° MITER CUTTING

SEMI-AUTOMATIC DOUBLE COLUMN BAND SAWS



MODEL **BMSY 460C** Semi-automatic double column band saw


Vise & roller feed


Heavy-duty vise jaws


Control panel

OPTIONAL FEATURES

- Second vise
- Hexagonal vise
- Hydraulic blade tension
- 10 ft (3 m) motorized roller table
- Laser line pointer
- Hydraulic top clamping
- 10 ft (3 m) material roller table
- Turntable
- Chip conveyor
- Microspray device


TECHNICAL DETAILS

Model		BMSY 330C	BMSY 360C	BMSY 460C	BMSY 560C	BMSY 810C	BMSY 825C	BMSY 1020C
Cutting capacity 0° — round		13″	15″	18″	22″	32″	32-½″	40-¼″
Cutting capacity 0° — rectangular (W × H)		17-¾″ × 13″	20-½″ × 14-½″	25-½″ × 18″	29-½″ × 22″	33-½″ × 31″	37-½″ × 31″	40-¼″ × 40-¼″
Cutting capacity 0° — square		13″	14-½″	18″	22″	31″	31″	40-¼″
Cutting capacity +45° — round		7-⅞″	10-¼″	13-½″	15-¾″	19″	22″	23-½″
Cutting capacity +45° — rectangular (W × H)		7-⅞″ × 13″	10-¼″ × 14-½″	13-½″ × 18″	15-¾″ × 22″	19″ × 31″	22″ × 31″	23-½″ × 40-¼″
Cutting capacity +45° — square		7-⅞″	10-¼″	13-½″	15-¾″	19″	22″	23-½″
Main motor	HP	4	4	5.4	5.4	7.4	10	10
Hydraulic pump motor	HP	0.7	0.7	0.7	1.5	2	2	3
Coolant pump	HP	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Chip conveyor motor	HP	–	–	–	–	–	0.3	0.3
Blade speed	ft/min	49 – 394	49 – 394	49 – 394	49 – 394	49 – 394	49 – 394	49 – 394
Band blade (W × T × L)	in	1-⅜ × 0.043 × 196-¾	1-⅜ × 0.043 × 204-¾	1-⅝ × 0.051 × 226-½	1-⅝ × 0.051 × 236-¼	1-⅝ × 0.051 × 322-¾	2-⅛ × 0.063 × 330-¾	2-⅛ × 0.063 × 382
Working height	in	22.6	22.6	23	23	23	23.6	23.6
Weight	lb	2,535	2,932	3,351	4,409	6,790	7,275	14,771
Dimensions (L × W × H)	in	106 × 47 × 67	106 × 47 × 65	118 × 47 × 71	128 × 55 × 83	154 × 55 × 107	154 × 50 × 107	177 × 59 × 126

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BMSY 330C SV – 1020C SV · SPLIT VISE FOR SHORT REMNANTS

SEMI-AUTOMATIC DOUBLE COLUMN BAND SAWS WITH SPLIT VISE

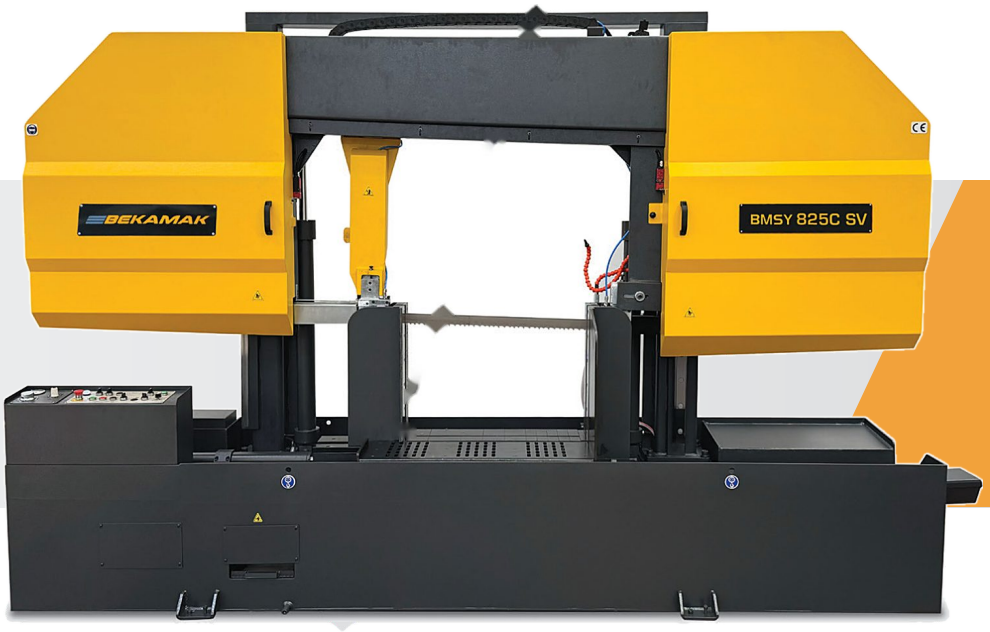

MODEL **BMSY 825C SV** Double column band saw with split vise

OPTIONAL FEATURES

- Hexagonal vise
- Laser line pointer
- Chip conveyor
- Hydraulic top clamping
- 10 ft (3 m) motorized roller table
- 10 ft (3 m) material roller table
- Microspray device

TECHNICAL DETAILS

Model		BMSY 330C SV	BMSY 360C SV	BMSY 460C SV	BMSY 560C SV	BMSY 810C SV	BMSY 825C SV	BMSY 1020C SV
Cutting capacity 0° — round		13″	15″	18″	22″	32″	32-1/2″	40-1/4″
Cutting capacity 0° — rectangular (W × H)		17-3/4″ × 13″	20-1/2″ × 15″	25-1/2″ × 18″	29-1/2″ × 22″	31″ × 32″	37-1/2″ × 31″	40-1/4″ × 40-1/4″
Cutting capacity 0° — square		13″	15″	18″	22″	31″	31″	40-1/4″
Main motor	HP	4	4	5.4	5.4	7.4	10	10
Hydraulic pump motor	HP	0.7	0.7	0.7	1.5	2	2	3
Coolant pump	HP	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Chip conveyor motor	HP	–	–	–	–	–	0.3	0.3
Blade speed	ft/min	49 – 394	49 – 394	49 – 394	49 – 394	49 – 394	49 – 394	49 – 394
Band blade (W × T × L)	in	1-3/8 × 0.043 × 196-3/4	1-3/8 × 0.043 × 204-3/4	1-5/8 × 0.051 × 226-1/2	1-5/8 × 0.051 × 236-1/4	1-5/8 × 0.051 × 322-3/4	2-1/8 × 0.063 × 330-3/4	2-1/8 × 0.063 × 382
Working height	in	22.6	22.6	23	23	23	23.6	21.1
Weight	lb	2,535	2,932	3,527	4,409	7,385	7,496	14,771
Dimensions (L × W × H)	in	106 × 47 × 67	106 × 47 × 65	118 × 47 × 71	128 × 39 × 83	154 × 55 × 107	154 × 50 × 107	177 × 59 × 126

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BMSO 330C · 460C · 560C · 825C · AUTOMATIC STRAIGHT CUTTING

ROLLER-TYPE AUTOMATIC DOUBLE COLUMN BAND SAWS



MODEL **BMSO 330C** Roller-type automatic double column band saw

OPTIONAL FEATURES

- Chip conveyor
- Laser line pointer
- 10 ft (3 m) material roller table
- Hydraulic blade tension
- Microspray coolant device

TECHNICAL DETAILS

Model		BMSO 330C	BMSO 460C	BMSO 560C	BMSO 825C
Cutting capacity 0° — round		13″	18″	22″	35-1/2″
Cutting capacity 0° — rectangular (W × H)		13-3/4″ × 13″	20-1/2″ × 18″	23-1/2″ × 22″	35-1/2″ × 31″
Cutting capacity 0° — square		13″	18″	22″	31″
Main motor	HP	4	5.4	5.4	10
Hydraulic pump motor	HP	0.7	0.7	1.5	2
Coolant pump	HP	0.2	0.2	0.2	0.2
Feed motor	HP	0.3	0.3	0.7	0.7
Chip conveyor motor	HP	—	0.3	0.3	0.3
Blade speed	ft/min	49 – 394	49 – 394	49 – 394	66 – 328
Band blade (W × T × L)	in	1-3/8 × 0.043 × 196-3/4	1-5/8 × 0.051 × 226-1/2	1-5/8 × 0.051 × 236-1/4	1-5/8 × 0.051 × 330-3/4
Working height	in	22.6	23	23	23.6
Weight	lb	2,756	3,638	4,630	7,716
Dimensions (L × W × H)	in	102 × 47 × 67	118 × 47 × 71	128 × 55 × 83	154 × 55 × 107

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BMSY 325CGH · 440CGH · 540CGH · 810CGH · ONE-SIDED MITER CUTTING

SEMI-AUTOMATIC SINGLE MITER DOUBLE COLUMN BAND SAWS



MODEL **BMSY 540CGH** Semi-automatic single miter double column band saw

OPTIONAL FEATURES

- Hydraulic top clamping
- Hydraulic blade tension
- Laser line pointer
- 10 ft (3 m) motorized roller table
- 10 ft (3 m) material roller table
- Microspray device
- Chip conveyor

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BMSY 325CGH · 440CGH · 540CGH · 810CGH · ONE-SIDED MITER CUTTING

SEMI-AUTOMATIC SINGLE MITER DOUBLE COLUMN BAND SAWS (CONT.)

TECHNICAL DETAILS

Model		BMSY 325CGH	BMSY 440CGH	BMSY 540CGH	BMSY 810CGH
Cutting capacity 0° — round		12-3/4"	17-3/4"	21-1/4"	32"
Cutting capacity 0° — rectangular (W × H)		17-1/4" × 12-1/2"	27-1/4" × 16-3/4"	29-1/2" × 21-1/4"	35-3/4" × 29-1/2"
Cutting capacity 0° — square		12-1/2"	16-3/4"	21-1/4"	30-1/4"
Cutting capacity +30° — round		12-3/4"	17-3/4"	21-1/4"	30"
Cutting capacity +30° — rectangular (W × H)		14-1/4" × 12-1/2"	22" × 16-3/4"	23-1/2" × 21-1/4"	29-1/2" × 29-1/4"
Cutting capacity +30° — square		12-1/2"	16-3/4"	21-1/4"	29-1/4"
Cutting capacity +45° — round		12"	17"	20"	23-1/2"
Cutting capacity +45° — rectangular (W × H)		10-3/4" × 12-1/2"	17" × 16-3/4"	17-3/4" × 21-1/4"	29-1/2" × 23-1/2"
Cutting capacity +45° — square		10-3/4"	16-3/4"	17-3/4"	23-1/2"
Cutting capacity +60° — round		7-1/8"	12-1/4"	10-3/4"	14-1/4"
Cutting capacity +60° — rectangular (W × H)		7-1/8" × 9-1/2"	10-1/4" × 16-3/4"	9-7/8" × 21-1/4"	29-1/2" × 14-1/4"
Cutting capacity +60° — square		7-1/8"	11-1/2"	9-7/8"	14-1/4"
Main motor	HP	3	5.4	5.4	7.4
Hydraulic pump motor	HP	0.7	0.7	1.5	2
Coolant pump	HP	0.2	0.2	0.2	0.2
Chip conveyor motor	HP	—	0.3	—	—
Blade speed	ft/min	66 – 328	49 – 394	49 – 394	49 – 394
Band blade (W × T × L)	in	1-3/8 × 0.043 × 169-1/4	1-5/8 × 0.051 × 250	1-5/8 × 0.051 × 236-1/4	1-5/8 × 0.051 × 330-3/4
Working height	in	25.6	26.6	28.1	28.5
Weight	lb	2,756	3,693	4,850	8,642
Dimensions (L × W × H)	in	95 × 41 × 63	118 × 51 × 76	118 × 51 × 87	157 × 63 × 109

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

BMSY 360CDGH NC – 750DG NC · DOUBLE-SIDED MITER CUTTING

SEMI-AUTOMATIC NC DOUBLE MITER BAND SAWS



MODEL **BMSY 650DG NC** Semi-automatic NC double miter band saw

High cutting performance with precise miter cuts. These semi-automatic double-sided miter band saws cut miters in both directions without the material having to be turned.

OPTIONAL FEATURES

- 10 ft (3 m) material roller table
- 10 ft (3 m) motorized roller table
- Hydraulic top clamping
- Hydraulic blade tension
- Microspray device
- Laser line pointer
- Chip conveyor

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BMSY 360CDGH NC – 750DG NC · DOUBLE-SIDED MITER CUTTING

SEMI-AUTOMATIC NC DOUBLE MITER BAND SAWS (CONT.)

TECHNICAL DETAILS

Model		BMSY 360CDGH NC	BMSY 440CDGH NC	BMSY 560DG NC	BMSY 650DG NC	BMSY 750DG NC
Cutting capacity 0° — round		14-1/4"	17-1/4"	22"	25-1/2"	27-1/2"
Cutting capacity 0° — rectangular (W × H)		25-1/4" × 14-1/4"	25-1/4" × 17-1/4"	33-1/2" × 20-3/4"	39-1/4" × 23-1/2"	51-1/4" × 29-1/2"
Cutting capacity 0° — square		14-1/4"	17-1/4"	21-1/4"	23-1/2"	29-1/2"
Cutting capacity +30° — round		14-1/4"	17-1/4"	22"	25-1/2"	31-1/2"
Cutting capacity +30° — rectangular (W × H)		20" × 14-1/4"	20" × 17-1/4"	26-1/2" × 21-1/4"	33" × 23-1/2"	42-1/4" × 29-1/2"
Cutting capacity +30° — square		14-1/4"	17-1/4"	21-1/4"	23-1/2"	29-1/2"
Cutting capacity +45° — round		14-1/4"	17-1/4"	20-1/2"	25-1/2"	27-1/2"
Cutting capacity +45° — rectangular (W × H)		15-1/4" × 14-1/4"	15-3/4" × 17-1/4"	20-1/2" × 21-1/4"	26" × 23-1/2"	33-1/2" × 29-1/2"
Cutting capacity +45° — square		14-1/4"	15-3/4"	20-1/2"	23-1/2"	29-1/2"
Cutting capacity +60° — round		12-1/4"	9-7/8"	—	—	—
Cutting capacity +60° — rectangular (W × H)		9-7/8" × 14-1/4"	9-7/8" × 17-1/4"	—	—	—
Cutting capacity +60° — square		10-3/4"	9-7/8"	—	—	—
Cutting capacity -30° — round		14-1/4"	17-1/4"	22"	25-1/2"	31-1/2"
Cutting capacity -30° — rectangular (W × H)		20" × 14-1/4"	20" × 17-1/4"	26-1/2" × 21-1/4"	33" × 23-1/2"	42-1/4" × 29-1/2"
Cutting capacity -30° — square		14-1/4"	17-1/4"	21-1/4"	23-1/2"	29-1/2"
Cutting capacity -45° — round		14-1/4"	15-1/4"	20-1/2"	25-1/2"	31-1/2"
Cutting capacity -45° — rectangular (W × H)		15-1/4" × 14-1/4"	15-1/4" × 17-1/4"	20-1/2" × 21-1/4"	26" × 23-1/2"	33-1/2" × 29-1/2"
Cutting capacity -45° — square		14-1/4"	15-1/4"	20-1/2"	23-1/2"	29-1/2"
Cutting capacity -60° — round		—	—	13-1/2"	17-1/4"	22-1/2"
Cutting capacity -60° — rectangular (W × H)		—	—	13-1/2" × 20-1/2"	17-1/4" × 23-1/2"	22-1/2" × 29-1/2"
Cutting capacity -60° — square		—	—	13-1/2"	17-1/4"	22-1/2"
Main motor	HP	4	5.4	5.4	10	15
Hydraulic pump motor	HP	1.5	1.5	1.5	5.4	5.4
Coolant pump	HP	0.2	0.2	0.2	0.2	0.3
Angle (miter) motor	HP	—	—	—	0.5	0.5
Chip brush motor	HP	—	—	—	0.2	0.2
Chip conveyor motor	HP	—	—	—	0.3	0.3
Blade speed	ft/min	49 – 394	49 – 394	49 – 394	49 – 394	49 – 394
Band blade (W × T × L)	in	1-3/8 × 0.043 × 196-3/4	1-5/8 × 0.051 × 248	1-5/8 × 0.051 × 275-1/2	2-1/8 × 0.063 × 330-3/4	2-1/8 × 0.063 × 410-3/4
Working height	in	31.5	33.9	34.4	34.6	36.2
Weight	lb	4,398	4,519	7,606	14,991	19,842
Dimensions (L × W × H)	in	118 × 47 × 75	124 × 73 × 83	152 × 67 × 96	186 × 89 × 108	217 × 91 × 128


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

BMSO 330CS NC – 1110CS NC · BALL-SCREW SERVO FEEDING

FULLY AUTOMATIC BAND SAWS WITH SERVO FEEDING FOR STRAIGHT CUTTING

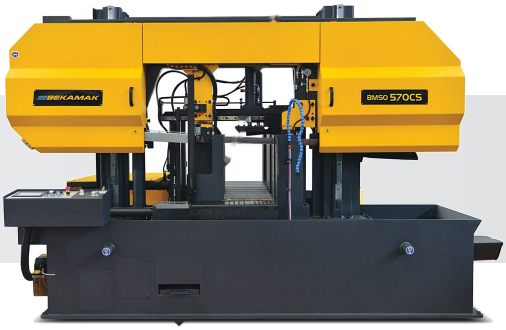

MODEL **BMSO 570CS NC** Fully automatic band saw with servo feeding

The Bekamak CS series is ideal for mass production and bundle cutting of solid material, tube and profile. The servo feeding system with ball screw reduces cutting tolerances to a near-zero error margin. The PLC-controlled, user-friendly colour touch screen stores 100 different cutting programs with 50 cutting steps each. Hydraulic top clamping and hexagonal vise options are also available for bundle cutting.

OPTIONAL FEATURES

- Deflection control
- Pallet-type chip conveyor
- Cutting speed display
- Hydraulic top clamping
- 10 ft (3 m) material roller table
- Microspray device
- Hydraulic blade tension
- Hexagonal vise

TECHNICAL DETAILS

Model		BMSO 330CS NC	BMSO 420CS NC	BMSO 560CS NC	BMSO 570CS NC	BMSO 820CS NC	BMSO 1110CS NC
Cutting capacity 0° – round		13″	16-1/2″	22″	22-1/2″	32-1/4″	43-3/4″
Cutting capacity 0° – rectangular (W × H)		14-1/4″ × 13″	16-1/2″ × 16-1/2″	23-1/2″ × 22″	23-1/2″ × 22-1/2″	33-1/2″ × 32-1/4″	–
Cutting capacity 0° – square		13″	16-1/2″	22″	22-1/2″	32-1/4″	43-3/4″
Main motor	HP	4	7.4	7.4	10	10	15
Hydraulic pump motor	HP	2	3	3	3	3	5.4
Coolant pump	HP	0.2	0.2	0.2	0.2	0.2	0.2
Feeder servo motor	HP	1.3	2	2	2	2.7	–
Chip conveyor motor	HP	0.3	0.3	0.3	0.3	0.3	0.3
Blade speed	ft/min	49 – 394	49 – 394	49 – 394	49 – 394	49 – 394	49 – 394
Band blade (W × T × L)	in	1-3/8 × 0.043 × 196-3/4	1-5/8 × 0.051 × 226-1/2	1-5/8 × 0.051 × 236-1/4	2-1/8 × 0.063 × 291-1/4	2-1/8 / 2-5/8 × 0.063 × 374	2-5/8 × 0.063 × 429-1/4
Working height	in	33.3	31.7	31.9	31.7	33.8	21.3
Weight	lb	5,886	7,275	9,921	13,007	21,275	33,400
Dimensions (L × W × H)	in	111 × 76 × 73	113 × 78 × 83	128 × 87 × 93	138 × 79 × 106	177 × 104 × 122	236 × 150 × 137
Pull table, 500 mm (20″) – weight	lb	–	–	–	–	–	6,173
Stand weight, 3 m (10 ft) section	lb	–	–	–	–	–	2,315
Stand weight, 1 m (3.3 ft) section	lb	–	–	–	–	–	1,728

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BMSO 325CGS NC · 440CGS NC · 540CGS NC · ONE-SIDED MITER CUTTING

FULLY AUTOMATIC SERVO-FEED BAND SAWS FOR SINGLE MITER CUTTING



MODEL **BMSO 440CGS NC** Fully automatic servo-feed single miter band saw

These models provide automatic cutting with one-sided angular cuts, delivering mass production for miter cutting.

OPTIONAL FEATURES

- Microspray device
- Hydraulic blade tension
- Laser line pointer
- 10 ft (3 m) material roller table
- Chip conveyor
- Hydraulic top clamping

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BMSO 325CGS NC · 440CGS NC · 540CGS NC · ONE-SIDED MITER CUTTING

FULLY AUTOMATIC SERVO-FEED BAND SAWS FOR SINGLE MITER CUTTING (CONT.)

TECHNICAL DETAILS

Model		BMSO 325CGS NC	BMSO 440CGS NC	BMSO 540CGS NC
Cutting capacity 0° — round		12-3/4"	17-1/4"	21-1/4"
Cutting capacity 0° — rectangular (W × H)		15-3/4" × 12-3/4"	24" × 17-1/4"	27-1/4" × 21-1/4"
Cutting capacity 0° — square		12-3/4"	17-1/4"	21-1/4"
Cutting capacity +30° — round		12-3/4"	17-1/4"	21-1/4"
Cutting capacity +30° — rectangular (W × H)		14-1/4" × 12-3/4"	21-1/4" × 17-1/4"	21-3/4" × 21-1/4"
Cutting capacity +30° — square		12-3/4"	17-1/4"	21-1/4"
Cutting capacity +45° — round		11-3/4"	17"	18-1/2"
Cutting capacity +45° — rectangular (W × H)		10-1/4" × 12-3/4"	15-3/4" × 17-1/4"	16-1/4" × 21-1/4"
Cutting capacity +45° — square		10-1/2"	17"	16-1/4"
Cutting capacity +60° — round		7-1/2"	12-1/4"	9-7/8"
Cutting capacity +60° — rectangular (W × H)		5-1/2" × 12-3/4"	9-5/8" × 17-1/4"	9-1/2" × 21-1/4"
Cutting capacity +60° — square		7-1/2"	10-1/4"	9-1/2"
Main motor	HP	3	5.4	5.4
Hydraulic pump motor	HP	2	3	3
Coolant pump	HP	0.2	0.2	0.2
Feeder servo motor	HP	1.3	2	2
Blade speed	ft/min	66 – 328	66 – 328	66 – 328
Band blade (W × T × L)	in	1-3/8 × 0.043 × 193	1-5/8 × 0.051 × 250	1-5/8 × 0.051 × 236-1/4
Working height	in	31.7	31.8	31.7
Weight	lb	4,101	7,937	9,237
Dimensions (L × W × H)	in	84 × 85 × 65	112 × 93 × 79	118 × 95 × 89

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

BMSO 440CDGS NC · DOUBLE-SIDED MITER CUTTING

FULLY AUTOMATIC SERVO-FEED BAND SAW FOR DOUBLE MITER CUTTING



MODEL **BMSO 440CDGS NC** Fully automatic double miter band saw with servo feeding and infeed roller table

High-tech, economical profile machining in straight and miter cutting. The BMSO 440CDGS NC cuts angles from 0 to 60° to the right and 0 to 45° to the left.

CUTTING CAPACITY — BMSO 440CDGS NC

Miter angle	Round	Rectangular (W × H)	Square
0°	17-1/4"	25-1/4" × 17-1/4"	17-1/4"
+30°	17-1/4"	23-3/4" × 17-1/4"	17-1/4"
+45°	17-1/4"	19-1/2" × 17-1/4"	17-1/4"
+60°	12-3/4"	12-3/4" × 17-1/4"	12-3/4"
-30°	17-1/4"	21-1/2" × 17-1/4"	17-1/4"
-45°	16-3/4"	16-3/4" × 17-1/4"	16-3/4"

TECHNICAL DETAILS

Model		BMSO 440CDGS NC
Main motor	HP	5.4
Hydraulic pump motor	HP	3
Coolant pump	HP	0.2
Feeder servo motor	HP	2.7
Blade speed	ft/min	49 – 394
Band blade (W × T × L)	in	1-5/8 × 0.051 × 250
Working height	in	33.7
Weight	lb	8,378
Dimensions (L × W × H)	in	142 × 118 × 87

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BMSO 335XS · 420XS · 570XS · 660XS · 825XS · BI-METAL & CARBIDE BLADES

HIGH-TECH BAND SAWS FOR MASS PRODUCTION



BMSO 825XS

High-tech band saw for mass production



BMSO 420XS

With full cover (optional)

Bekamak high-tech band saws have been developed for the optimal use of bi-metal and carbide blades and suit applications such as steel trading, steel production, forging mills, machine manufacturing and the automotive industry. Besides reducing blade costs, they significantly increase production speed and efficiency.

OPTIONAL FEATURES

- Hydraulic top clamping
- Microspray device
- Hexagonal vise

Full machine cover (as shown on the BMSO 420XS) is optional.


TECHNICAL DETAILS

Model		BMSO 335XS	BMSO 420XS	BMSO 570XS	BMSO 660XS	BMSO 825XS
Cutting capacity 0° – round		13-¼"	16-½"	22-½"	26"	32-½"
Cutting capacity 0° – rectangular (W × H)		13-¼" × 19-¾"	16-½" × 16-½"	23-½" × 22-½"	26" × 26"	32-½" × 33-½"
Cutting capacity 0° – square		13-¼"	16-½"	22-½"	–	32-½" × 32-½"
Main motor	HP	4	10	10	10	20
Hydraulic pump motor	HP	2	3	3	3	3
Coolant pump	HP	0.2	0.2	0.2	–	0.2
Feeder servo motor	HP	2.7	2	2.7	2.7	2.7
Bow servo motor	HP	2	2	2	2	2.7
Chip conveyor motor	HP	0.3	0.3	0.3	–	0.3
Blade speed	ft/min	49 – 394	49 – 394	49 – 394	49 – 394	49 – 394
Band blade (W × T × L)	in	1-⅝ × 0.051 × 207	1-⅝ × 0.051 × 226-½	2-⅛ × 0.063 × 291-¼	2-⅛ × 0.063 × 312	2-⅝ × 0.063 × 374
Working height	in	39.4	31.7	31.7	31.7	33.8
Stroke	in	51.2	–	–	–	–
Weight	lb	7,165	7,275	13,007	15,873	22,046
Dimensions (L × W × H)	in	101 × 114 × 85	113 × 78 × 83	138 × 79 × 106	82 × 154 × 109	177 × 104 × 122

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BMSY 1110C · 1113C · 1122C · 1313C · 1515C · LARGE-SECTION CUTTING

LARGE HEAVY-DUTY BAND SAWS FOR STRAIGHT CUTTING

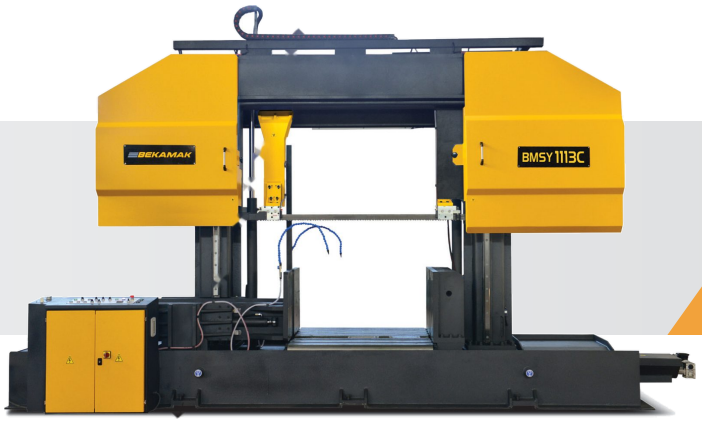

MODEL **BMSY 1113C** Large heavy-duty double column band saw

Large band saws with world-class cutting times in heavy material, featuring a robust body, solid bow, high-efficiency motor and planetary gearbox. They are also suitable for cutting profiles, tubes and solid materials of all grades, including difficult-to-cut materials such as titanium, Hastelloy and Inconel.

OPTIONAL FEATURES

- Second vise
- 10 ft (3 m) material roller table
- 10 ft (3 m) motorized roller table
- Laser line pointer
- Hydraulic top clamping
- Microspray device

BMSY 1515C is equipped with two coolant pumps (2 × 0.27 HP).

TECHNICAL DETAILS

Model		BMSY 1110C	BMSY 1113C	BMSY 1122C	BMSY 1313C	BMSY 1515C
Cutting capacity 0° — round		43-3/4"	43-3/4"	43-1/4"	51-1/4"	59"
Cutting capacity 0° — rectangular (W × H)		43-3/4" × 43-3/4"	43-3/4" × 51-1/4"	43-1/4" × 90-1/2"	51-1/4" × 51-1/4"	59-1/2" × 59"
Cutting capacity 0° — square		43-3/4"	43-3/4"	43-1/4"	51-1/4"	59"
Main motor	HP	15	15	20	15	20
Hydraulic pump motor	HP	5.4	10	10	10	10
Coolant pump	HP	0.3	0.3	0.3	0.3	0.3
Chip conveyor motor	HP	0.3	0.3	0.7	0.3	0.3
Blade speed	ft/min	66 – 328	66 – 328	49 – 394	49 – 394	33 – 230
Band blade (W × T × L)	in	2-5/8 × 0.063 × 413-1/2	2-5/8 × 0.063 × 429-1/4	3-1/8 × 0.063 × 515-3/4	2-5/8 × 0.063 × 476-1/2	3-1/8 × 0.063 × 523-1/2
Working height	in	21.5	21.5	31.1	21.5	25
Weight	lb	27,558	29,762	34,613	34,172	49,604
Dimensions (L × W × H)	in	189 × 59 × 117	209 × 59 × 117	303 × 89 × 154	236 × 93 × 157	264 × 94 × 183

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

GANTRY 2200XS · AUTOMATIC HEAVY-DUTY GANTRY-TYPE BAND SAW

GANTRY BAND SAW



Gantry band saw cutting a large forged ring

MODEL **GANTRY 2200XS**

This automatic, heavy-duty, high-performance band saw in gantry design is ideal for very large workpieces such as slabs, ingot molds, forged shafts, open-die forgings, marine crankshafts, turbine shafts and large tools made from all types of material, including difficult-to-cut alloys such as titanium, Hastelloy and Inconel.

TECHNICAL DETAILS

Model		GANTRY 2200XS
Cutting capacity 0° — round		86-½"
Cutting capacity 0° — rectangular (W × H)		86-½" × 94-½"
Cutting capacity 0° — square		86-½"
Main motor	HP	40
Hydraulic pump motor	HP	15
Hydraulic cooling pump	HP	2
Hydraulic chip brush pump	HP	2
Coolant radiator fan motor	HP	0.7
Coolant pump	HP	1.5
Bottom scraper chip conveyor motor	HP	0.7
Head spiral-type chip conveyor motor	HP	0.3
Drive servo motors (2 + 2 kW)	HP	5.4
Bow servo motors (3 + 3 kW)	HP	8
Blade speed	ft/min	49 – 262
Band blade (W × T × L)	in	3-⅛ × 0.063 × 706-¼
Working height	in	36.8
Stroke	FT	27.6 FT
Stroke	in	330.7
Weight	lb	203,134
Dimensions (L × W × H)	in	591 × 370 × 245

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

CROSS 0626VT · VERTICAL PLATE & BLOCK CUTTING

FULLY AUTOMATIC CROSS VERTICAL BAND SAW



MODEL **CROSS 0626VT** Fully automatic cross vertical band saw



Infeed & outfeed roller tables

This fully automated, high-capacity plate band saw is equipped with a vertical saw blade that moves parallel to the material, allowing precise cutting of billets, plates and other flat materials. It is specifically designed for challenging materials such as tool steels, titanium, Hastelloy and Inconel. The automatic feed mechanism ensures accurate positioning of blocks and plates for optimal cutting results.

TECHNICAL DETAILS

Model		CROSS 0626VT
Cutting capacity 0° — rectangular (W × H)		23-½" × 102-¼"
Cutting capacity 0° — square		15-¾"
Main motor	HP	10
Hydraulic motor	HP	3
Coolant pump	HP	1.5
Feeder motor	HP	2.7
Servo motor	HP	2.7
Chip brush motor	HP	0.2
Chip conveyor motor	HP	0.3
Blade speed	ft/min	49 – 246
Band blade (W × T × L)	in	2-⅛ × 0.063 × 473-¾
Working height	in	74.4
Weight	lb	22,928
Dimensions (L × W × H)	in	108 × 167 × 132

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BMSY 460VG (DOUBLE-SIDED MITER) · BMSY 613VT (STRAIGHT CUT)

SEMI-AUTOMATIC VERTICAL BAND SAWS



MODEL **BMSY 613VT** Semi-automatic vertical band saw for straight cutting

MODELS

BMSY 460VG — semi-automatic vertical band saw for double-sided miter cuts (+60° to –60°). **BMSY 613VT** — semi-automatic vertical band saw for straight cuts (shown).

OPTIONAL FEATURES

- Chip conveyor (BMSY 613VT)

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BMSY 460VG (DOUBLE-SIDED MITER) · BMSY 613VT (STRAIGHT CUT)

SEMI-AUTOMATIC VERTICAL BAND SAWS (CONT.)

TECHNICAL DETAILS

Model		BMSY 460VG	BMSY 613VT
Cutting capacity 0° — rectangular (W × H)		28″ × 18″	23-½″ × 23-½″
Cutting capacity 0° — square		18″	23-½″
Cutting capacity +30° — round		18″	—
Cutting capacity +30° — rectangular (W × H)		23-¼″ × 18″	—
Cutting capacity +30° — square		18″	—
Cutting capacity +45° — round		17-¾″	—
Cutting capacity +45° — rectangular (W × H)		17-¾″ × 18″	—
Cutting capacity +45° — square		17-¾″	—
Cutting capacity +60° — round		10-¾″	—
Cutting capacity +60° — rectangular (W × H)		10-¾″ × 18″	—
Cutting capacity +60° — square		10-¾″	—
Cutting capacity -30° — round		18″	—
Cutting capacity -30° — rectangular (W × H)		23-¼″ × 18″	—
Cutting capacity -30° — square		18″	—
Cutting capacity -45° — round		18″	—
Cutting capacity -45° — rectangular (W × H)		19″ × 18″	—
Cutting capacity -45° — square		18″	—
Cutting capacity -60° — round		12-¾″	—
Cutting capacity -60° — rectangular (W × H)		12-¾″ × 18″	—
Cutting capacity -60° — square		12-¾″	—
Main motor	HP	5.4	10
Hydraulic pump motor	HP	3	1.5
Coolant pump	HP	0.3	0.3
Servo motor	HP	—	2
Angle (miter) motor	HP	0.5	—
Chip conveyor motor	HP	0.3	0.3
Blade speed	ft/min	49 – 394	49 – 394
Band blade (W × T × L)	in	1-⅜ × 0.043 × 236-¼	2-⅛ × 0.063 × 243-½
Working height	in	45.7	51.7
Weight	lb	6,063	10,406
Dimensions (L × W × H)	in	128 × 114 × 110	126 × 115 × 118
Chip conveyor weight	lb	—	10,406

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

VB 0814-8 · VERTICAL BAND SAW FOR LARGE BLOCKS

BLOCK CUTTING VERTICAL BAND SAW



MODEL **VB 0814-8** Block cutting vertical band saw with chip conveyor

TECHNICAL DETAILS

Model		VB 0814-8
Cutting capacity 0° — rectangular (W × H)		32-1/4" × 55"
Main motor	HP	20
Hydraulic pump motor	HP	10
Coolant pump	HP	0.3
Chip conveyor motor	HP	0.3
Blade speed	ft/min	49 – 394
Band blade (W × T × L)	in	2-5/8 × 0.063 × 351-1/2
Working height	in	68.3
Max. cutting length	FT	26.2 FT
Max. cutting length	in	315
Outer table	FT	6.6 FT
Outer table	in	78.7
Inner table	FT	4.6 FT
Inner table	in	55.1
Weight	lb	112,436
Dimensions (L × W × H)	in	512 × 191 × 161

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

NovoTech MACHINE TOOLS Inc.

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga location.

PHONE
+1 647 526 5510

WEB & EMAIL
NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS
1365 Mid-Way Blvd, 26
Mississauga, ON L5T 2J5
Canada

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**









Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment.