NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

PLASTMAK · MADE IN TURKEY · SOLD & SERVICED IN CANADA BY NOVOTECH

ALUMINUM & VINYL (PVC) SAWS AND WINDOW MACHINERY

UPCUT SAWS · DOUBLE-HEAD MITER SAWS · GLAZING BEAD AND MITER SAWS · VINYL (PVC) WELDERS AND CORNER CLEANERS · CNC PROFILE CENTRES, COPY ROUTERS AND END MILLS · CORNER CRIMPING AND ASSEMBLY MACHINES · COMPLETE WINDOW PRODUCTION GROUPS



MODEL SC 4000S · DOUBLE-HEAD MITER SAW

MODEL SC 402 · AUTOMATIC UPCUT SAW

Turkey
MADE IN TURKEY

22
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

PLASTMAK WINDOW MACHINERY

CONTENTS

UPCUT SAWS FOR ALUMINUM AND VINYL (PVC)

SC 401 upcut saw for aluminum and PVC, Ø17-11/16″ blade, 0° – 180° SC 401 · 1 model 04

SC 402 · SC 403 automatic upcut saws, Ø21-5/8″ to Ø25-9/16″ blades SC 402 · SC 403 · 2 models 07

SC 450 roller-shutter box and lamella saw, Ø21-5/8″ blade, cuts 14-3/16″ wide SC 450 · 1 model 10

DOUBLE-HEAD, GLAZING BEAD AND MITER SAWS

SC 400S · SC 4000S double-head miter saws, cutting lengths to 171-5/8″ SC 400S · SC 4000S · 2 models 13

SC 301 · SC 301S glazing bead saws, beads 11-13/16″ – 100-3/8″ long SC 301 · SC 301S · 2 models 17

SC 431 · SC 441 · SC 451 overhead and bench miter saws, Ø11-13/16″ to Ø15-3/4″ blades SC 431 · SC 441 · SC 451 · 3 models 20

VINYL (PVC) WELDING AND CORNER CLEANING

SC 100 Gold Plus 4-corner PVC welder and Gold Plus Full welding & cleaning line, frames to 145-11/16 × 106-5/16″ SC 100 Gold Plus · Gold Plus Full · 2 models 23

SC 100 · SC 101 double- and single-head PVC welders, profiles to 6-5/16″ high SC 100 · SC 101 · 2 models 26

SC 6000 · SC 6000S CNC corner cleaners, profiles to 7-7/8″ high SC 6000 · SC 6000S · 2 models 29

SC 601 corner cleaning machine with 3 knives, profiles to 4-15/16″ wide SC 601 · 1 model 32

CNC PROFILE CENTRES, COPY ROUTERS AND END MILLS

SC 4550 9-axis profile machining and cutting centre, profiles to 21′ 4″ SC 4550 · 1 model 35

SC 5000 · SC 5000S 3-axis CNC drilling and milling machines, travel 15-3/8 × 7-7/8 × 7-7/8″ SC 5000 · SC 5000S · 2 models 38

SC 501 · 502S · 512 · 521S · 542 copy routers, travel 11 × 4-15/16 × 3-9/16″ SC 501 · 502S · 512 · 521S · 542 · 5 models 41

SC 211 · SC 211S end milling machines, cutters to Ø6-5/16″ SC 211 · SC 211S · 2 models 45

CORNER CRIMPING, ASSEMBLY MACHINES AND CONVEYORS

SC 902 hydraulic corner crimping machine for aluminum, profiles to 5-1/8″ high SC 902 · 1 model 48

Screwing machines and sash assembly machine, screws to #8 × 1-1/2″ Single screwing · double-head screwing · sash assembly · 3 machines 51

SC 221 · SC 551 portable notching and copy milling machines SC 221 · SC 551 · stand · 2 machines 54

SC 1000 digital measuring conveyor, 9′ 10″, ±.020″, and SC 1001 – 1003 roller conveyors SC 1000 · 1001 · 1002 · 1003 · 4 models 55

WINDOW PRODUCTION GROUPS

PVC single-head production group, 40 – 60 windows a shift 6 machines · 40 – 60 windows a shift 57

PVC double-head production group, 80 – 120 windows a shift 6 machines · 80 – 120 windows a shift 60

Aluminum double-head production group, 80 – 120 windows a shift 4 machines · 80 – 120 windows a shift 63

PVC window workshop set-up, 200 – 220 windows a shift 7 machines · 200 – 220 windows a shift 66

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR PLASTMAK ALUMINUM AND VINYL (PVC) WINDOW MACHINERY

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

PLASTMAK · BURSA, TURKEY

WINDOW AND DOOR MACHINERY FROM BURSA, TURKEY

Plastmak builds machines for aluminum and vinyl (PVC) window and door fabrication in Bursa, Turkey. Its roots go back to Anadolu Makina, a family business founded in 1968; the company has built window and door machinery as Plastmak since 2007 and exports about 80 % of its production to more than 60 countries. The range covers every step of a window shop: upcut, double-head, glazing bead and miter saws for aluminum extrusions and vinyl profiles; single-, double- and 4-corner vinyl welders and CNC corner cleaners; a 9-axis profile machining and cutting centre, 3-axis CNC drilling and milling machines, copy routers and end mills; a hydraulic corner crimper for aluminum, screwing and sash assembly machines, portable machines and conveyors; and complete production groups for 40 to 220 windows a shift.


NovoTech sells, installs and supports Plastmak machines in Canada from Mississauga, ON — the machines chosen for your profiles and your output, a CSA-approved panel, operator training, a 1-year warranty and parts and technical support in Canada.

SC 401 · 1 MODEL

SC 401 UPCUT SAW FOR ALUMINUM AND PVC, Ø17-11/16" BLADE, 0° – 180°



MODEL PLASTMAK SC 401 ALUMINUM AND PVC UPCUT SAW, Ø17-11/16" (450 MM) BLADE

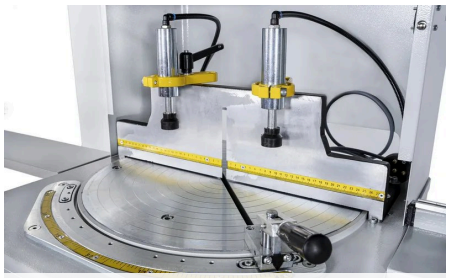

SC 401 turntable with pneumatic vertical and horizontal clamps



SC 401 turntable, 0° – 180° with quick stops

Ø17-11/16" (450 mm) blade · 0° – 180° · cuts 5-5/16 × 8-9/16" at 90°

The entry upcut saw for window shops and aluminum fabricators: the Ø17-11/16" (450 mm) diamond-tipped blade rises from under the table through the clamped profile, so the cut is guarded and burr-light, and the turntable sets any angle from 0° to 180° — with quick stops at 15°, 22.5°, 30°, 45°, 60° and 90° and a locking arm for the angles between. The blade rises 5-5/16" (135 mm) and cuts profiles up to 5-5/16" high and 8-9/16" wide at 90°. Its feed slows down when the blade meets aluminum, easing the load on the motor, and 8′ 2" (2.5 m) measuring and transport conveyors come standard on both sides.

STANDARD FEATURES

- ✓ Diamond-tipped Ø17-11/16" (450 mm) blade rising 5-5/16" (135 mm) through the table
- ✓ Turntable 0° – 180° with quick stops at 15°, 22.5°, 30°, 45°, 60° and 90°; locking arm for intermediate angles
- ✓ Blade feed slows in aluminum to reduce the load on the motor
- ✓ Pneumatic profile clamps; protective cover over the cutting area
- ✓ Measuring and transport conveyors 8′ 2" (2.5 m), right and left, standard
- ✓ Built to CE standards
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Cooling device for aluminum cutting
- + Hydro-check feed control for aluminum cutting
- + Roller conveyor
- + SC 1000 digital measuring conveyor
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

SC 401 UPCUT SAW FOR ALUMINUM AND PVC, Ø17-11/16" BLADE, 0° – 180°



SC 401 protective cover over the cutting area

TECHNICAL SPECIFICATIONS

SC 401 UPCUT SAW FOR ALUMINUM AND PVC, Ø17-11/16" BLADE, 0° – 180°

SC 401

Upcut saw, Ø17-11/16" (450 mm) blade

Model	SC 401
Cutting angle quick stops 15°, 22.5°, 30°, 45°, 60°, 90°	**0° – 180°**
Blade diamond-tipped	**Ø17-11/16" (450 mm)**
Blade bore	Ø1-1/4" (32 mm)
Blade rise through the table	5-5/16" (135 mm)
Capacity at 90° height × width	**5-5/16 × 8-9/16" (135 × 217 mm)**
Capacity at 45° height × width	5-5/16 × 6-3/16" (135 × 157 mm)
Motor	1.5 HP (1.1 kW)
Air consumption	1.4 CFM (41 l/min)
Conveyors measuring and transport	8' 2" (2.5 m) right and left
Weight	**276 lb (125 kg)**
Dimensions W × D × H	26 × 31 × 51" (660 × 790 × 1,300 mm)

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16". Air consumption is at 87 – 116 psi (6 – 8 bar). Weights are approximate. Cutting capacities are the largest profile, height × width, at the angle shown.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SC 402 · SC 403 · 2 MODELS

SC 402 · SC 403 AUTOMATIC UPCUT SAWS, Ø21-5/8" TO Ø25-9/16" BLADES



MODEL PLASTMAK SC 402 AUTOMATIC UPCUT SAW, Ø21-5/8" (550 MM) BLADE



Plastmak SC 403 automatic upcut saw, Ø" / Ø" (600 / 650 mm) b 25-9/16



SC 402 table: pneumatic clamps, angle scale and roller conveyor

Ø21-5/8" – Ø25-9/16" blades · –60° to +60° · cuts to 9-3/16 × 12-3/8"

Fully automatic upcut saws for aluminum and PVC production: the profile is clamped pneumatically from above and from the side, the blade rises through it under hydro-pneumatic control at the speed set for the profile, and an oil spray cools the cut. The head turns to fixed stops from –60° to +60° — 0°, 15°, 22.5°, 30°, 45° and 60° either way. The SC 402 runs a Ø21-5/8" (550 mm) blade and cuts profiles up to 7-1/16" high and 10-7/16" wide at 90°; the SC 403 takes a Ø23-5/8" (600 mm) blade, or Ø25-9/16" (650 mm) as an option, for profiles up to 9-3/16 × 12-3/8", behind a guard that moves front to back. Both come with 9′ 10" (3 m) roller conveyors on each side.

STANDARD FEATURES


- ✓ Hydro-pneumatic blade feed with hydro-checks; cutting speed set to the profile
- ✓ Fixed angle stops left and right: 0°, 15°, 22.5°, 30°, 45° and 60°
- ✓ Pneumatic vertical and horizontal clamps with adjustable pressure; two-hand safety start
- ✓ SC 402: Ø21-5/8" (550 mm) diamond-tipped blade, 3 HP (2.2 kW) saw motor
- ✓ SC 403: Ø23-5/8" (600 mm) blade, Ø25-9/16" (650 mm) optional; 4 HP (3 kW) saw motor; front-rear moving guard
- ✓ Oil spray cooling; roller conveyors 9′ 10" (3 m) right and left
- ✓ Built to CE standards
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Ø25-9/16" (650 mm) blade (SC 403)
- + SC 1000 digital measuring conveyor
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS


SC 402 · SC 403 AUTOMATIC UPCUT SAWS, Ø21-5/8" TO Ø25-9/16" BLADES

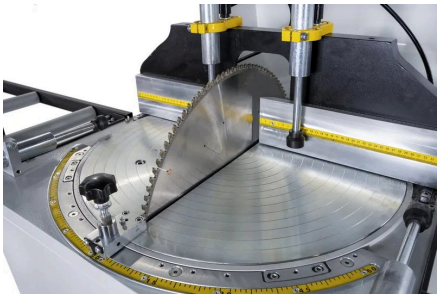

SC 402 blade rising through the table




SC 403 control panel and cutting table

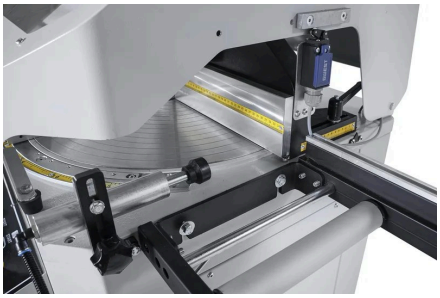

SC 403 horizontal clamp and roller conveyor



SC 403 blade at 45°, profile clamped from above and the side

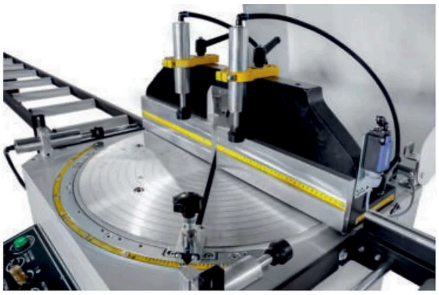

SC 403 front-rear moving guard

TECHNICAL SPECIFICATIONS

SC 402 · SC 403 AUTOMATIC UPCUT SAWS, Ø21-5/8" TO Ø25-9/16" BLADES

SC 402 · SC 403

Automatic upcut saws

Model	SC 402	SC 403
Cutting angle fixed stops 0°, ±15°, ±22.5°, ±30°, ±45°, ±60°	**–60° to +60°**	**–60° to +60°**
Blade diamond-tipped	**Ø21-5/8" (550 mm)**	**Ø23-5/8" (600 mm); Ø25-9/16" (650 mm) optional**
Blade bore	Ø1-1/4" (32 mm)	Ø1-9/16" (40 mm)
Capacity at 90° height × width	**7-1/16 × 10-7/16" (180 × 265 mm)**	**8-3/16 × 11-5/16" (208 × 288 mm); 9-3/16 × 12-3/8" (233 × 315 mm) with Ø650**
Capacity at 45° height × width	7-1/16 × 7-1/2" (180 × 190 mm)	8-3/16 × 8-1/16" (208 × 205 mm); 9-3/16 × 8-3/4" (233 × 223 mm) with Ø650
Capacity at 60° height × width	7-1/16 × 5-1/2" (180 × 140 mm)	8-3/16 × 5-11/16" (208 × 145 mm); 9-3/16 × 6-3/16" (233 × 157 mm) with Ø650
Saw motor	3 HP (2.2 kW)	4 HP (3 kW)
Total power	**4 HP (3 kW)**	**4 HP (3 kW)**
Air consumption	1.4 CFM (41 l/min)	1.4 CFM (41 l/min)
Roller conveyors	9′ 10" (3 m) right and left	9′ 10" (3 m) right and left
Weight	**441 lb (200 kg)**	**573 lb (260 kg)**
Dimensions W × D × H	32 × 35 × 52" (820 × 900 × 1,330 mm)	33 × 39 × 57" (850 × 985 × 1,450 mm)

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16". Air consumption is at 87 – 116 psi (6 – 8 bar). Weights are approximate. Cutting capacities are the largest profile, height × width, at the angle shown.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SC 450 · 1 MODEL


SC 450 ROLLER-SHUTTER BOX AND LAMELLA SAW, Ø21-5/8" BLADE, CUTS 14-3/16" WIDE



MODEL PLASTMAK SC 450 SHUTTER BOX AND LAMELLA SAW, Ø21-5/8" (550 MM) BLADE



SC 450 clamping pistons matched to the shutter box



SC 450 cutting a roller-shutter box

Ø21-5/8" (550 mm) blade · shutter boxes to 13-3/4" · cuts 14-3/16" wide

A saw for roller-shutter work: it cuts packs of aluminum or PVC shutter lamellas in one stroke, shutter boxes and side posts, and monoblock shutter boxes as a set. The Ø21-5/8" (550 mm) blade runs fast for a clean cut surface and travels on linear guides; the clamping pistons are matched to the part, L-shaped boxes up to 13-3/4" (350 mm) fit under them, and the blade cuts 14-3/16" (360 mm) wide. The cutting speed is adjustable, and 9′ 10" (3 m) roller conveyors carry the profiles on both sides.

STANDARD FEATURES

- ✓ Cuts packs of shutter lamellas, shutter boxes, side posts and monoblock boxes
- ✓ Ø21-5/8" (550 mm) blade at high speed for a clean cut surface; adjustable cutting speed
- ✓ Blade on a linear guide system for precise cuts
- ✓ Clamping pistons matched to the part; L-shaped boxes up to 13-3/4" (350 mm)
- ✓ Roller conveyors 2 × 9′ 10" (3 m)
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Cooling system
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

SC 450 ROLLER-SHUTTER BOX AND LAMELLA SAW, Ø21-5/8" BLADE, CUTS 14-3/16" WIDE



SC 450 pressure roller holding a pack of lamellas



SC 450 cutting table and controls

TECHNICAL SPECIFICATIONS

SC 450 ROLLER-SHUTTER BOX AND LAMELLA SAW, Ø21-5/8" BLADE, CUTS 14-3/16" WIDE

SC 450

Shutter box and lamella saw

Model	SC 450
Blade	**Ø21-5/8" (550 mm)**
Blade bore	Ø1-1/4" (32 mm)
Cutting width max.	**14-3/16" (360 mm)**
Shutter box L-shaped, max.	**13-3/4" (350 mm)**
Motor	4 HP (3 kW)
Air consumption	0.35 CFM (10 l/min)
Roller conveyors	2 × 9′ 10″ (3 m)
Weight	**761 lb (345 kg)**
Dimensions W × D × H	33 × 35 × 78″ (840 × 900 × 1,980 mm)

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16". Air consumption is at 87 – 116 psi (6 – 8 bar). Weights are approximate. Cutting capacities are the largest profile, height × width, at the angle shown.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SC 400S · SC 4000S · 2 MODELS

SC 400S · SC 4000S DOUBLE-HEAD MITER SAWS, CUTTING LENGTHS TO 171-5/8″

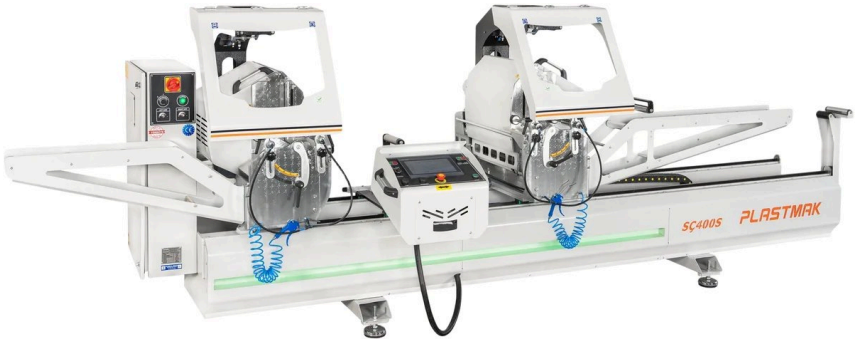

MODEL PLASTMAK SC 400S DOUBLE-HEAD SAW, 2 × Ø19-11/16″ (500 MM) BLADES



Plastmak SC 4000S servo double-head saw, 2 × Ø″ (600 mm) b 23-5/8



SC 400S saw head with guard and profile support

2 × Ø19-11/16″ or 2 × Ø23-5/8″ blades · lengths to 171-5/8″ · ±.020″

Double-head saws cut both ends of a window or door profile in one stroke, square or mitred, to the length set on the control: the right head runs on a servo-driven carriage, both heads tilt automatically to 90° or 45° inward, and an arm supports long profiles. The SC 400S has two Ø19-11/16″ (500 mm) blades, cuts 19-1/8″ to 131-7/8″ (485 – 3,350 mm) long to ±.039″ (±1 mm) and takes profiles up to 11-1/8″ high at 90°. The fully automatic SC 4000S has two Ø23-5/8″ (600 mm) blades on hydro-check-controlled feeds, cuts 21-5/8″ to 171-5/8″ (550 – 4,360 mm) to ±.020″ (±0.5 mm) and takes profiles up to 12-3/16″ high and 8-7/16″ wide. Cut lists arrive by USB; the SC 400S works with Ercom and Teknosoft barcode systems.

STANDARD FEATURES

- ✓ Heads set automatically to 90° and 45° inward; automatic cutting at 90°; wedge (block) slicing
- ✓ Servo-driven moving head; colour touch panel (10″ on the SC 4000S); unlimited cut-list memory, lists by USB; remote support
- ✓ SC 400S: 2 × Ø19-11/16″ (500 mm) blades rising 6-1/2″ (165 mm) — two 3-1/8″ (80 mm) profiles at once; ±.039″ (±1 mm)
- ✓ SC 4000S: 2 × Ø23-5/8″ (600 mm) blades rising 8-7/16″ (215 mm) — two 3-1/8″ profiles at once; hydro-check saw feed; ±.020″
- ✓ 2 vertical and 4 horizontal vises; profile supports right, left and between the heads; automatic support arm for long profiles
- ✓ Program for profiles longer than the bed: 19′ 8″ (6 m) on the SC 400S, 26′ 3″ (8 m) on the SC 4000S
- ✓ Spray blade cooling; multi-language software
- ✓ Built to CE standards
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Barcode printer (Ercom, Teknosoft)
- + Hydro-check saw feed (SC 400S)
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS · 1 / 2

SC 400S · SC 4000S DOUBLE-HEAD MITER SAWS, CUTTING LENGTHS TO 171-5/8”



SC 400S control console: touch panel, USB and Ethernet

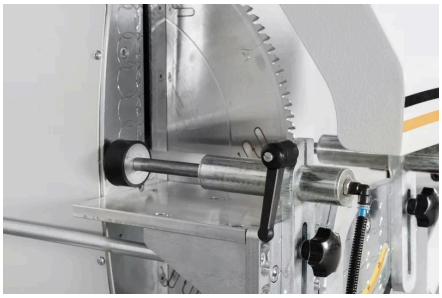


SC 400S vise at the saw head



SC 400S automatic support arm for long profiles



SC 400S short-piece cutting rail guard

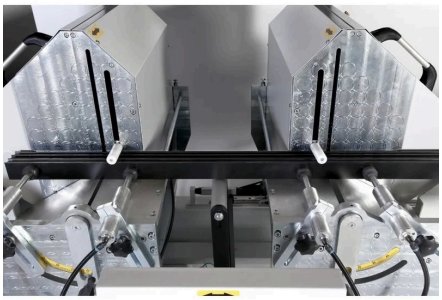


SC 4000S heads tilted to 45° inward



SC 4000S head tilting between 90° and 45°



SC 4000S head and 10” touch panel

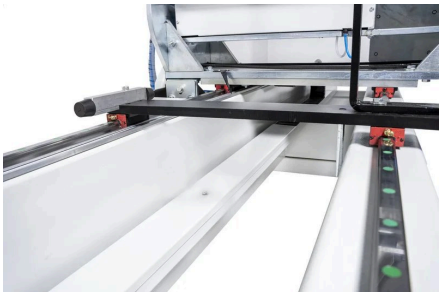


SC 4000S moving conveyor between the heads



SC 4000S top clamps for precise cuts

DETAILS, COMPONENTS AND OPTIONS · 2 / 2

SC 400S · SC 4000S DOUBLE-HEAD MITER SAWS, CUTTING LENGTHS TO 171-5/8”

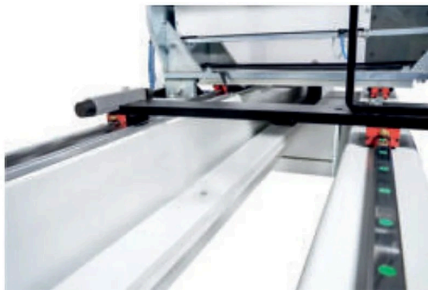

SC 4000S linear slide of the moving head

TECHNICAL SPECIFICATIONS

SC 400S · SC 4000S DOUBLE-HEAD MITER SAWS, CUTTING LENGTHS TO 171-5/8″

SC 400S · SC 4000S

Double-head miter saws

Model	SC 400S	SC 4000S
Cutting length min – max	**19-1/8″ – 131-7/8″ (485 – 3,350 mm)**	**21-5/8″ – 171-5/8″ (550 – 4,360 mm)**
Head tilt	90° and 45° inward, automatic	90° and 45° inward, automatic
Cutting accuracy	**±.039″ (±1 mm)**	**±.020″ (±0.5 mm)**
Blades	**2 × Ø19-11/16″ (500 mm)**	**2 × Ø23-5/8″ (600 mm)**
Blade bore	Ø1-1/4″ (32 mm)	Ø1-9/16″ (40 mm)
Blade rise	6-1/2″ (165 mm) — two 3-1/8″ (80 mm) profiles at once	8-7/16″ (215 mm) — two 3-1/8″ (80 mm) profiles at once
Capacity at 90° height × width	**11-1/8 × 6-1/2″ (282 × 165 mm)**	**12-3/16 × 8-7/16″ (310 × 215 mm)**
Capacity at 45° height × width	7-7/8 × 6-1/2″ (200 × 165 mm)	8-3/4 × 8-7/16″ (222 × 215 mm)
Saw motors	2 × 3 HP (2 × 2.2 kW)	2 × 4 HP (2 × 3 kW)
Total power	**8 HP (6 kW)**	**10.7 HP (8 kW)**
Air consumption	1.1 CFM (30 l/min)	1.1 CFM (30 l/min)
Weight	**1,951 lb (885 kg)**	**2,392 lb (1,085 kg)**
Dimensions L × W × H	252 × 40 × 62″ (6,398 × 1,010 × 1,580 mm)	290 × 44 × 62″ (7,375 × 1,110 × 1,580 mm)

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16″. Air consumption is at 87 – 116 psi (6 – 8 bar). Weights are approximate. Cutting capacities are the largest profile, height × width, at the angle shown.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SC 301 · SC 301S · 2 MODELS

SC 301 · SC 301S GLAZING BEAD SAWS, BEADS 11-13/16" – 100-3/8" LONG



MODEL PLASTMAK SC 301 GLAZING BEAD SAW



Plastmak SC 301S mouldless glazing bead saw



SC 301 adjustable universal mould

45° bead cutting · 11-13/16" – 100-3/8" · 12 beads without moulds (SC 301S)

Glazing beads are cut at 45° on both ends to the size of the glass opening. The SC 301 cuts PVC beads automatically with two Ø7-7/8" (200 mm) saws in an easily adjusted universal mould, with an 8′ 2″ (2.5 m) sheet-steel measuring conveyor for long frames. The SC 301S needs no moulds: a wheel holds 12 different bead profiles, two beads are cut at the same time, a nail adjustment mechanism and two nail saws finish the bead's clip, and 8′ 2″ (2.5 m) conveyors run on both sides — with a diamond saw and cooling it cuts aluminum beads too. Both take beads 11-13/16" to 100-3/8" (300 – 2,550 mm) long and up to 1-1/8" (28.3 mm) high.

STANDARD FEATURES


- ✓ 45° cutting of glazing beads; automatic cycle, adjustable cutting speed
- ✓ Pneumatic bead clamping
- ✓ SC 301: 2 × Ø7-7/8" (200 mm) saws, universal adjustable mould, measuring conveyor 8′ 2″ (2.5 m)
- ✓ SC 301S: profile wheel for 12 beads, 2 beads at once, 2 nail saws Ø3-15/16" (100 mm), conveyors 2 × 8′ 2″
- ✓ Built to CE standards
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Left conveyor (SC 301)
- + Nail saw (SC 301)
- + Diamond-tipped saw with cooling for aluminum beads (SC 301S)
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS


SC 301 · SC 301S GLAZING BEAD SAWS, BEADS 11-13/16" – 100-3/8" LONG

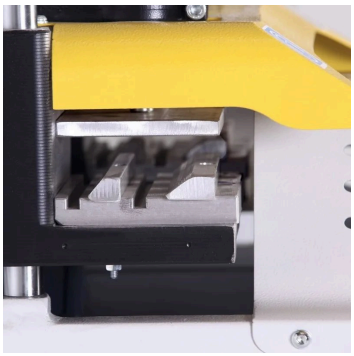


SC 301 twin saws cutting the bead at 45°

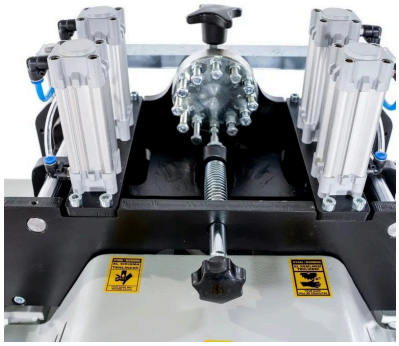


SC 301S wheel holding 12 bead profiles

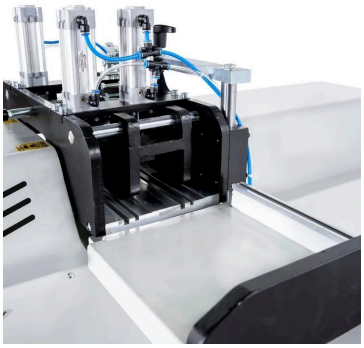

SC 301S pneumatic bead clamps

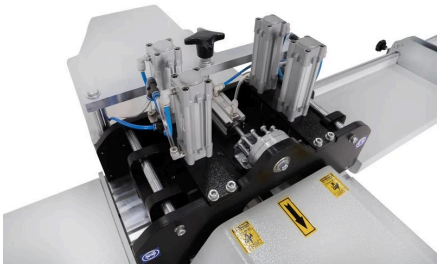

SC 301S cutting two beads at once

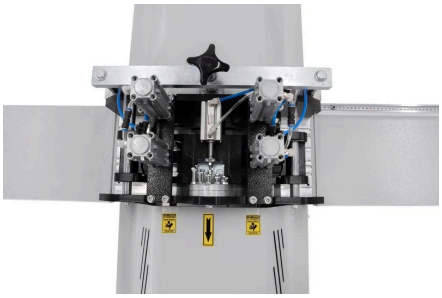

SC 301S cutting head from above

TECHNICAL SPECIFICATIONS

SC 301 · SC 301S GLAZING BEAD SAWS, BEADS 11-13/16" – 100-3/8" LONG

SC 301 · SC 301S

Glazing bead saws

Model	SC 301	SC 301S
Cutting angle	45°	45°
Bead length min – max	**11-13/16" – 100-3/8" (300 – 2,550 mm)**	**11-13/16" – 100-3/8" (300 – 2,550 mm)**
Bead height max.	**1-1/8" (28.3 mm)**	**1-1/8" (28.3 mm)**
Bead profiles	**Universal adjustable mould**	**12 on the profile wheel, no moulds; 2 beads at once**
Main saws	2 × Ø7-7/8" (200 mm)	2 × Ø7-7/8" (200 mm)
Nail saws	Optional	2 × Ø3-15/16" (100 mm)
Blade bore	Ø1-1/4" (32 mm)	Ø1-1/4" (32 mm)
Saw motors	2 × 1 HP (2 × 0.75 kW)	2 × 1.5 HP (2 × 1.1 kW)
Total power	**2 HP (1.5 kW)**	**3 HP (2.2 kW)**
Air consumption	0.35 CFM (10 l/min)	0.35 CFM (10 l/min)
Conveyors	Measuring conveyor 8′ 2″ (2.5 m)	2 × 8′ 2″ (2.5 m), right and left
Weight	**209 lb (95 kg)**	**320 lb (145 kg)**
Dimensions W × D × H	18 × 46 × 44″ (450 × 1,160 × 1,120 mm)	20 × 55 × 46″ (520 × 1,400 × 1,180 mm)

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16″. Air consumption is at 87 – 116 psi (6 – 8 bar). Weights are approximate. Cutting capacities are the largest profile, height × width, at the angle shown.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SC 431 · SC 441 · SC 451 · 3 MODELS

SC 431 · SC 441 · SC 451 OVERHEAD AND BENCH MITER SAWS, Ø11-13/16" TO Ø15-3/4" BLADES



MODEL PLASTMAK SC 431 OVERHEAD MITER SAW, Ø15-3/4" (400 MM) BLADE



11-13/16 Plastmak SC 441 bench miter saw, Ø" (300 mm) blade



15-3/4 Plastmak SC 451 bench miter saw, Ø" (400 mm) blade

Ø11-13/16" – Ø15-3/4" blades · –45° to +45° · cuts 4-3/4 × 7-1/16" (SC 431)

Top-down miter saws for aluminum and PVC profiles. The SC 431 stands on its own base with a pneumatic clamp and a Ø15-3/4" (400 mm) diamond blade that leaves burr-free aluminum cuts; it miters from –45° to +45° with quick stops at 90°, 75°, 60° and 45° and a locking arm between them, cuts profiles up to 4-3/4" high and 7-1/16" wide at 90°, and works with a 9′ 10" (3 m) roller conveyor. The SC 441 (Ø11-13/16", 300 mm) and SC 451 (Ø15-3/4", 400 mm) are bench saws for the workshop or the site: double springs and a guard for safe cuts, cutting on the top table, and fixed stops at 0°, 15°, 22.5°, 30° and 45° either way.

STANDARD FEATURES

- ✓ SC 431: Ø15-3/4" (400 mm) diamond blade, burr-free aluminum cuts; –45° to +45°, quick stops 90°, 75°, 60°, 45°
- ✓ SC 431: pneumatic profile clamp, table locking arm, roller conveyor 9′ 10" (3 m)
- ✓ SC 441 · SC 451: bench miter saws, Ø11-13/16" and Ø15-3/4" blades, –45° to +45°
- ✓ SC 441 · SC 451: double spring system and saw guard; fixed stops 0°, 15°, 22.5°, 30°, 45° left and right
- ✓ Built to CE standards
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Cooling device for aluminum cutting (SC 431)
- + Single-phase 220 V version (SC 431)
- + Lower cabinet, right / left measuring system, pneumatic clamping with cooling, diamond triple-chip saw (SC 441 · SC 451)
- + Portable stand (SC 441 · SC 451)
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

SC 431 · SC 441 · SC 451 OVERHEAD AND BENCH MITER SAWS, Ø11-13/16" TO Ø15-3/4" BLADES



SC 431 table, saw guard and pneumatic clamp



SC 431 saw head and roller conveyor

TECHNICAL SPECIFICATIONS

SC 431 · SC 441 · SC 451 OVERHEAD AND BENCH MITER SAWS, Ø11-13/16" TO Ø15-3/4" BLADES

SC 431 · SC 441 · SC 451

Overhead and bench miter saws

Model	SC 431	SC 441	SC 451
Type	**Overhead (top-down) miter saw on its stand, pneumatic clamping**	**Bench miter saw**	**Bench miter saw**
Blade	**Ø15-3/4" (400 mm)**	**Ø11-13/16" (300 mm)**	**Ø15-3/4" (400 mm)**
Blade bore	Ø1-1/4" (32 mm)	—	—
Miter range	**–45° to +45°**	**–45° to +45°**	**–45° to +45°**
Quick stops	90°, 75°, 60°, 45°	0°, 15°, 22.5°, 30°, 45° left and right	0°, 15°, 22.5°, 30°, 45° left and right
Capacity at 90° height × width	**4-3/4 × 7-1/16" (120 × 180 mm)**	**—**	**—**
Capacity at 45° height × width	4-3/4 × 4-15/16" (120 × 125 mm)	—	—
Cutting length with the conveyor	14-3/16" – 129-15/16" (360 – 3,300 mm)	—	—
Motor	2 HP (1.5 kW)	—	—
Air consumption	0.08 CFM (2.2 l/min)	—	—
Weight	**265 lb (120 kg)**	**—**	**—**
Dimensions W × D × H	26 × 31 × 53" (650 × 800 × 1,340 mm)	—	—

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16". Air consumption is at 87 – 116 psi (6 – 8 bar). Weights are approximate. Cutting capacities are the largest profile, height × width, at the angle shown.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SC 100 GOLD PLUS · GOLD PLUS FULL · 2 MODELS


SC 100 GOLD PLUS 4-CORNER PVC WELDER AND GOLD PLUS FULL WELDING & CLEANING LINE, FRAMES TO 145-11/16 × 106-5/16"



MODEL PLASTMAK SC 100 GOLD PLUS 4-CORNER PVC WELDING MACHINE



Plastmak SC 100 Gold Plus Full 4-corner welding and cleaning line



Gold Plus welding head on its linear rail

4 corners at once · frames to 145-11/16 × 106-5/16" · welding and cleaning line (Full)

The fastest way to weld a PVC window frame: the SC 100 Gold Plus welds all four corners at 90° at the same time. Its heads ride on linear rails, driven by servo motors through planetary gearboxes, and automatic carriers bring the profiles in; frames from 16-1/8 × 19-1/2" up to 145-11/16 × 106-5/16" (410 × 495 to 3,700 × 2,700 mm), profiles 1-9/16" to 7-7/8" high, with a 0.2 mm (.008") seam on every profile type. A barcode scanner and a 19" Windows screen recall each profile's temperatures and times. The Gold Plus Full adds a high-precision carrier robot and a CNC corner cleaner that recognises each frame itself — welding and cleaning in one line, four frames on it at once, with automatic colour / white separation.

STANDARD FEATURES

- ✓ Welds the four corners of a PVC frame at 90° at the same time; single-corner welding too
- ✓ Axes on servo motors with planetary gearboxes; linear-rail top presses; automatic carriers
- ✓ 0.2 mm (.008") weld seam possible on every profile type; U (threshold-less door) welding
- ✓ Heating temperature and time set independently by PID; welding, cooling and temperature stored per profile
- ✓ Barcode scanner and 19" Windows-based screen; quick mould change; roll-type Teflon changed in minutes
- ✓ Gold Plus Full: carrier robot arm and CNC corner cleaner that identifies each frame without the operator; 2-axis carrier arm feeding profiles; 4 frames on the line at once; automatic colour / white separation
- ✓ Built to CE standards
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Gasket press system (frames 20-1/2 × 20-1/2" to 143-11/16 × 104-5/16")
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

SC 100 GOLD PLUS 4-CORNER PVC WELDER AND GOLD PLUS FULL WELDING & CLEANING LINE, FRAMES TO 145-11/16 × 106-5/16"



Gold Plus heads and automatic carriers

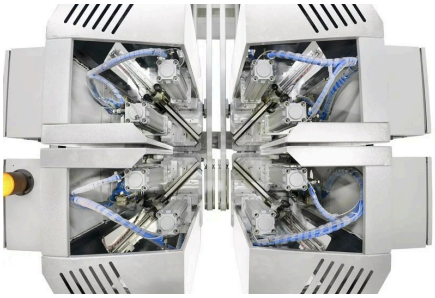

Gold Plus: the four heads seen from above




Gold Plus welding head with its top presses



Gold Plus heating plate and clamps




Gold Plus touch screen and barcode scanner

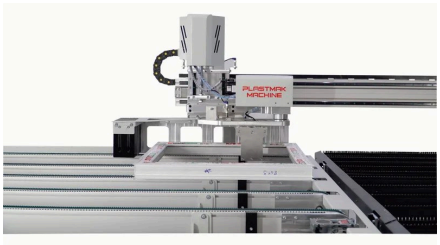

Gold Plus Full robotic carrier arm taking a welded frame to the cleaner



Gold Plus Full CNC corner cleaning station

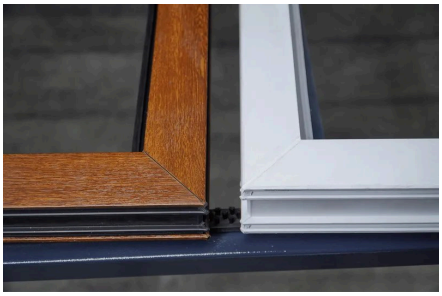

Welded corners of a laminated and a white PVC frame

TECHNICAL SPECIFICATIONS

SC 100 GOLD PLUS 4-CORNER PVC WELDER AND GOLD PLUS FULL WELDING & CLEANING LINE, FRAMES TO 145-11/16 × 106-5/16"

SC 100 GOLD PLUS · GOLD PLUS FULL

4-corner PVC welding

Model	SC 100 Gold Plus	SC 100 Gold Plus Full
Machine	**4-corner welding machine**	**4-corner welding machine, carrier robot and CNC corner cleaner in one line**
Welding angle	90°	90°
Profile height min – max	**1-9/16" – 7-7/8" (40 – 200 mm)**	**1-9/16" – 7-7/8" (40 – 200 mm)**
Profile width max.	**5-7/8" (150 mm)**	**5-7/8" (150 mm)**
Frame size, min. width × length	16-1/8 × 19-1/2" (410 × 495 mm); 20-1/2 × 20-1/2" (520 × 520 mm) with gasket press	—
Frame size, max. width × length	**145-11/16 × 106-5/16" (3,700 × 2,700 mm); 143-11/16 × 104-5/16" (3,650 × 2,650 mm) with gasket press**	**—**
Weld seam	0.2 mm (.008") seam possible on every profile	0.2 mm (.008") seam possible on every profile
Total power	**33.5 HP (25 kW)**	**45.6 HP (34 kW)**
Air consumption	6.4 CFM (180 l/min)	12.4 CFM (350 l/min)
Weight	**4,189 lb (1,900 kg)**	**8,267 lb (3,750 kg)**
Dimensions L × W × H	208 × 184 × 66" (5,280 × 4,670 × 1,670 mm)	531 × 217" (13,500 × 5,500 mm) line footprint

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16". Air consumption is at 87 – 116 psi (6 – 8 bar). Weights are approximate.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SC 100 · SC 101 · 2 MODELS

SC 100 · SC 101 DOUBLE- AND SINGLE-HEAD PVC WELDERS, PROFILES TO 6-5/16" HIGH



MODEL PLASTMAK SC 100 DOUBLE-HEAD PVC WELDING MACHINE



Plastmak SC 101 single-head PVC welding machine



SC 100 welding head

Two corners (SC 100) or one at 25° – 180° (SC 101) · profiles to 6-5/16" high

The welders of most PVC window shops. The SC 100 welds two corners at once: its right head is moved to the profile length and locked with a button, profiles from 13-3/8" to 126" (340 – 3,200 mm) long and 1-9/16" to 6-5/16" high, with a normal or a 0.2 mm (.008") seam on laminated profiles, and top-down centring on linear guides. The SC 101 welds one corner at any angle from 25° to 180° — for arches, bays and odd frames — with individually clamping top pistons, a moving left table and a foot pedal. Both are PLC-controlled with thermostatic heating plates set on a digital display, store temperature, time and pressure for each profile type, and change moulds quickly.

STANDARD FEATURES

- ✓ SC 100: two heads, right head positioned and locked by button; profiles 13-3/8" – 126" (340 – 3,200 mm) long
- ✓ SC 100: normal and 0.2 mm (.008") seams on laminated profiles; single-corner welding; top-down centring; linear guides
- ✓ SC 101: any angle from 25° to 180°; individually clamping top pistons; moving left table; foot-pedal clamping
- ✓ PLC control; thermostatic heating plates, temperature set on a digital display; temperature, time and pressure per profile
- ✓ Quick mould change; power supply protected against voltage surges
- ✓ Built to CE standards
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

SC 100 · SC 101 DOUBLE- AND SINGLE-HEAD PVC WELDERS, PROFILES TO 6-5/16" HIGH




SC 100 head and control panel

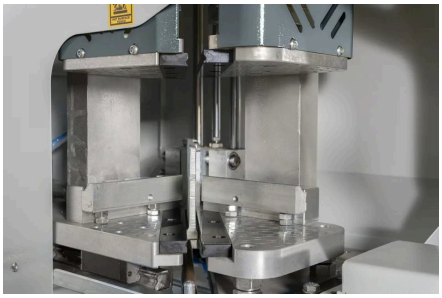

SC 100 heating plate between the profile clamps



SC 100 operation panel

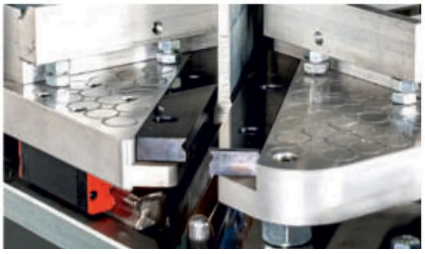

SC 100 linear guide of the moving head



SC 101 head with individual top clamps



SC 101 moulds and heating plate

TECHNICAL SPECIFICATIONS

SC 100 · SC 101 DOUBLE- AND SINGLE-HEAD PVC WELDERS, PROFILES TO 6-5/16" HIGH

SC 100 · SC 101

Double- and single-head PVC welding

Model	SC 100	SC 101
Heads	**2 (right head moves, locked by button)**	**1 (left table moves)**
Welding angle	**90°**	**25° – 180°**
Welded profile length min – max	**13-3/8" – 126" (340 – 3,200 mm)**	**–**
Profile height min – max	**1-9/16" – 6-5/16" (40 – 160 mm)**	**1-9/16" – 6-5/16" (40 – 160 mm)**
Profile width max.	6-1/2" (165 mm)	7-7/8" (200 mm)
Weld seam	Normal or 0.2 mm (.008") on laminated profiles	Normal or 0.2 mm (.008")
Control	PLC, digital heating-plate temperature	PLC, digital heating-plate temperature
Total power	**12.1 HP (9 kW)**	**5.4 HP (4 kW)**
Air consumption	2.5 CFM (70 l/min)	2.5 CFM (70 l/min)
Weight	**1,069 lb (485 kg)**	**298 lb (135 kg)**
Dimensions W × D × H	152 × 55 × 62" (3,870 × 1,400 × 1,570 mm)	24 × 25 × 55" (610 × 630 × 1,390 mm)

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16". Air consumption is at 87 – 116 psi (6 – 8 bar). Weights are approximate.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SC 6000 · SC 6000S · 2 MODELS

SC 6000 · SC 6000S CNC CORNER CLEANERS, PROFILES TO 7-7/8" HIGH



MODEL PLASTMAK SC 6000 SEMI-AUTOMATIC CNC CORNER CLEANER



Plastmak SC 6000S CNC corner cleaning machine



SC 6000 touch panel and profile carry tables

2 axes · 400 – 500 frames a shift (SC 6000) · 10 tools, DXF (SC 6000S)

After welding, every corner of a PVC frame carries a bead of melted plastic that has to come off. The SC 6000 cleans the bottom, top and outer faces of 90° corners with a Ø9-13/16" (250 mm) diamond-tipped saw, scrapers and a high-frequency spindle on two servo axes — 5 to 8 seconds a corner, 400 to 500 frames in an 8-hour shift; programs are written with a joystick, angles and radii come from circular interpolation, and a pedal centres the frame. The SC 6000S is the full CNC cleaner: 10 tools in separate groups clean top and bottom faces of white and laminated profiles, the inner and outer seal grooves and angled and radiused surfaces, it recognises the profile itself, and it imports DXF drawings through CAM Codex — 160 to 200 frames a shift.

STANDARD FEATURES


- ✓ Ø9-13/16" (250 mm) diamond-tipped saw and bearing-guided scrapers; high-frequency 18,000 rpm spindle
- ✓ SC 6000: 2 servo axes and 1 high-frequency motor; joystick programming of Y and Z; touch screen; foot-pedal centring
- ✓ SC 6000: 5 – 8 s a corner, 400 – 500 frames a shift; daily and monthly production report; sensor profile stop
- ✓ SC 6000S: 10 cleaning tools; seal grooves, angled and radiused surfaces; automatic profile recognition
- ✓ SC 6000S: 19" LCD screen, own software, DXF import and drawing with CAM Codex; automatic timed lubrication; linear slides
- ✓ Unlimited program memory; profile carry tables with brush tops that keep the profiles from scratching
- ✓ Built to CE standards
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- \+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS


SC 6000 · SC 6000S CNC CORNER CLEANERS, PROFILES TO 7-7/8" HIGH

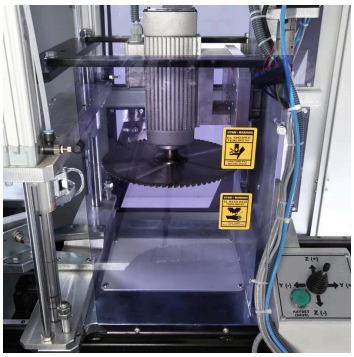


SC 6000 Ø9-13/16" (250 mm) saw behind its guard

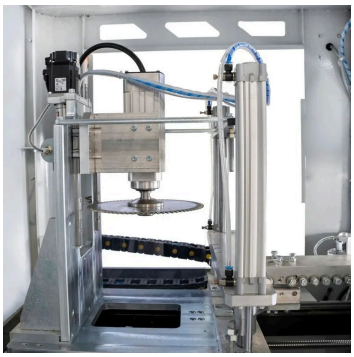


SC 6000 high-frequency spindle with the cleaning saw

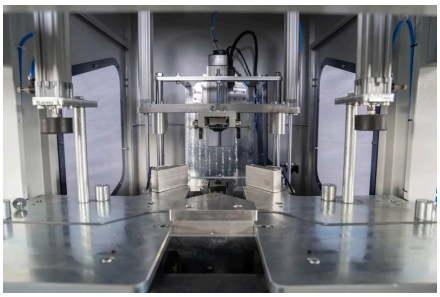

Inside the SC 6000: tools and profile stops

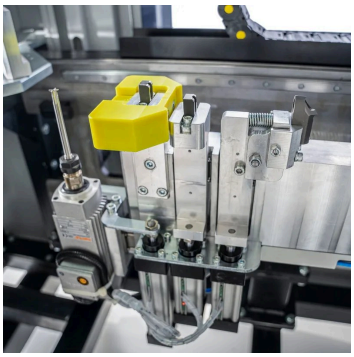


SC 6000S tool group

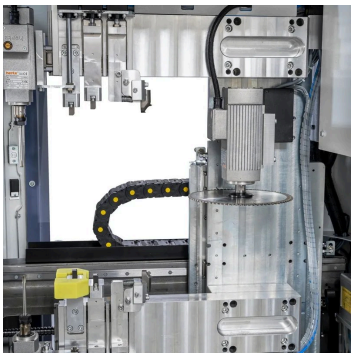

SC 6000S spindle and saw on the servo axes



Inside the SC 6000S

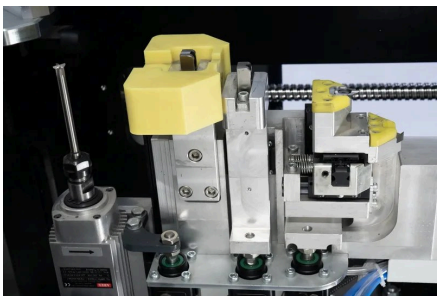

SC 6000S scraping tools



SC 6000S handwheel for setting the axes

TECHNICAL SPECIFICATIONS

SC 6000 · SC 6000S CNC CORNER CLEANERS, PROFILES TO 7-7/8" HIGH

SC 6000 · SC 6000S

CNC corner cleaning, 2 axes

Model	SC 6000	SC 6000S
Control	**PLC / NC, joystick programming, touch screen**	**CNC, 19" Windows screen, DXF import (CAM Codex)**
Output 8-hour shift	**400 – 500 frames a shift; 5 – 8 s a corner**	**160 – 200 frames a shift, all surfaces and seal grooves**
Cleaning tools	Saw, scrapers and cutters on 2 servo axes	10 tools in separate groups
Frame size min. A × B	from 13-3/4 × 13-3/4" (350 × 350 mm)	from 13-3/4 × 13-3/4" (350 × 350 mm)
Profile width max. a	**5-7/8" (150 mm)**	**4-3/4" (120 mm)**
Profile height max. h	**7-7/8" (200 mm)**	**5-7/8" (150 mm)**
Saw blade	Ø9-13/16" (250 mm) diamond-tipped, .079" (2 mm) thick	Ø9-13/16" (250 mm) diamond-tipped, .079" (2 mm) thick
Blade bore	Ø1-1/4" (32 mm)	Ø1-1/4" (32 mm)
Spindle	18,000 rpm, 300 Hz, 1.9 HP (1.4 kW)	18,000 rpm, 300 Hz, 2 HP (1.5 kW)
Total power	**4 HP (3 kW)**	**8 HP (6 kW)**
Air consumption	1.4 CFM (40 l/min)	4.2 CFM (120 l/min)
Weight	**882 lb (400 kg)**	**1,653 lb (750 kg)**
Dimensions W × D × H	41 × 55 × 62" (1,030 × 1,400 × 1,570 mm)	49 × 73 × 83" (1,250 × 1,850 × 2,100 mm)

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16". Air consumption is at 87 – 116 psi (6 – 8 bar). Weights are approximate.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SC 601 · 1 MODEL


SC 601 CORNER CLEANING MACHINE WITH 3 KNIVES, PROFILES TO 4-15/16" WIDE



MODEL PLASTMAK SC 601 CORNER CLEANING MACHINE WITH 3 KNIVES



SC 601 knife stack and profile stops



SC 601 knife cleaning the corner of a laminated profile

3 knives · profiles to 4-15/16" wide, 1-9/16" – 3-9/16" high

The PLC-controlled corner cleaner for shops that weld on an SC 100 or SC 101: the welded corner is pushed against the square, centred automatically, and three knives and bearing-guided scrapers clean the corner and its top and bottom faces in one cycle. Frame and sash profiles are told apart automatically, and on acrylic-coated profiles surface and corner cleaning can be run separately. Profiles up to 4-15/16" (125 mm) wide and 1-9/16" to 3-9/16" (40 – 90 mm) high.

STANDARD FEATURES


- ✓ Cleans the corner and the top and bottom faces after welding
- ✓ 3 different knives; bearing-guided scraping system
- ✓ Automatic squaring against the stop and automatic centring of the profile
- ✓ Automatic frame / sash separation; surface and corner cleaning separately for acrylic profiles
- ✓ Fully automatic PLC operation
- ✓ Built to CE standards
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- \+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

SC 601 CORNER CLEANING MACHINE WITH 3 KNIVES, PROFILES TO 4-15/16" WIDE

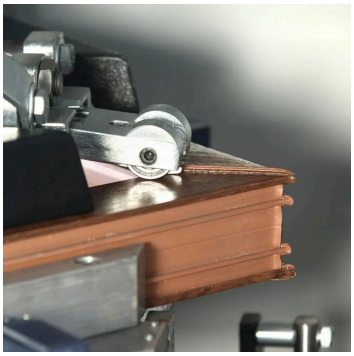

SC 601 bearing-guided scraper on the profile surface

TECHNICAL SPECIFICATIONS

SC 601 CORNER CLEANING MACHINE WITH 3 KNIVES, PROFILES TO 4-15/16" WIDE

SC 601

Corner cleaning machine, 3 knives

Model	SC 601
Cleaning	**Corners, top and bottom faces; frame and sash profiles told apart automatically**
Profile width max. a	**4-15/16" (125 mm)**
Profile height min – max h	**1-9/16" – 3-9/16" (40 – 90 mm)**
Knives	3
Cutter max.	Ø8-1/4" (210 mm)
Cutter bore	Ø1-1/4" (32 mm)
Motor	1.5 HP (1.1 kW)
Total power	**2 HP (1.5 kW)**
Air consumption	0.35 CFM (10 l/min)
Weight	**397 lb (180 kg)**
Dimensions W × D × H	30 × 39 × 59" (770 × 980 × 1,510 mm)

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16". Air consumption is at 87 – 116 psi (6 – 8 bar). Weights are approximate.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SC 4550 · 1 MODEL


SC 4550 9-AXIS PROFILE MACHINING AND CUTTING CENTRE, PROFILES TO 21’ 4”



MODEL PLASTMAK SC 4550 9-AXIS ALUMINUM AND PVC PROFILE MACHINING AND CUTTING CENTRE

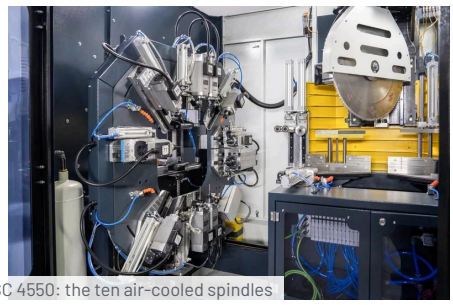

SC 4550: the ten air-cooled spindles

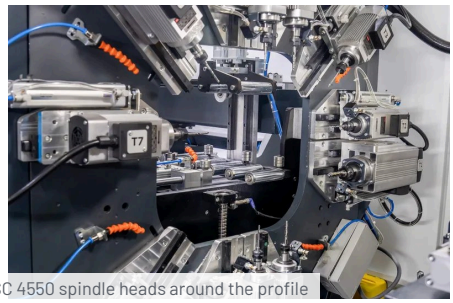

SC 4550 spindle heads around the profile

9 axes · 10 spindles · profiles 78-3/4” – 255-7/8” · saw 30° – 150°

A complete machining line for aluminum and PVC profiles: seven profiles wait in the magazine, the length of each is measured automatically, a 3-axis holding station clamps it, and ten high-speed air-cooled spindles groove, drill, mark and mill it before a servo-controlled Ø21-5/8” (550 mm) saw cuts it at any angle from 30° to 150° to ±0.1°. Profiles from 78-3/4” to 255-7/8” (2,000 – 6,500 mm), axes averaging 394 ft/min (120 m/min). Finished parts wait on a station and leave on a belt conveyor with a printed barcode label; offcuts go to the collection cart by conveyor. A 23.8” touch screen runs Windows-based software; jobs arrive by USB, the machine can be watched online and is backed by a UPS.

STANDARD FEATURES


- ✓ Grooving, drilling, marking and cutting at different angles on aluminum and PVC profiles
- ✓ 10 high-speed air-cooled spindle motors for aluminum; precision 3-axis profile holding station
- ✓ Profile magazine for 7 profiles; automatic profile length detection
- ✓ Servo-controlled Ø21-5/8” (550 mm) cutting unit, 30° – 150°, ±0.1°
- ✓ Waiting station for processed profiles; outlet belt conveyor; barcode printer; automatic waste conveyor to the cart
- ✓ 23.8” touch screen, Windows-based software; USB data transfer; online remote monitoring and remote support; UPS
- ✓ Built to CE standards
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Compatibility with CAM programs
- + Optional profile length
- + Safety barrier (sensor)
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

SC 4550 9-AXIS PROFILE MACHINING AND CUTTING CENTRE, PROFILES TO 21’ 4”

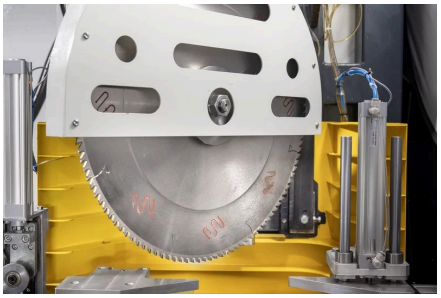

SC 4550 Ø21-5/8” (550 mm) servo cutting unit



SC 4550 barcode printer and UPS



SC 4550 outlet conveyor with belt system



SC 4550 waiting station for processed profiles

TECHNICAL SPECIFICATIONS

SC 4550 9-AXIS PROFILE MACHINING AND CUTTING CENTRE, PROFILES TO 21′ 4″

SC 4550

Profile machining and cutting centre, 9 axes

Model	SC 4550
Axes	**9**
Profile length min – max	**78-3/4″ – 255-7/8″ (2,000 – 6,500 mm) — 6′ 7″ to 21′ 4″**
Spindles	**10 high-speed air-cooled spindle motors for aluminum**
Spindle head travel X / Y / Z	11-13/16 / 12-5/8 / 10-1/4″ (300 / 320 / 260 mm)
Axis speed	394 ft/min (120 m/min) average
Profile magazine	7 profiles
Cutting unit	**Servo-controlled, 30° – 150°, ±0.1°**
Saw blade	Ø21-5/8″ (550 mm)
Blade bore	Ø1-1/4″ (32 mm)
Total power	**51 HP (38 kW)**
Air consumption	17.7 CFM (500 l/min)
Weight	**8,267 lb (3,750 kg)**
Dimensions L × W × H	535 × 109 × 87″ (13,600 × 2,760 × 2,200 mm)

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16″. Air consumption is at 87 – 116 psi (6 – 8 bar). Weights are approximate.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SC 5000 · SC 5000S · 2 MODELS

SC 5000 · SC 5000S 3-AXIS CNC DRILLING AND MILLING MACHINES, TRAVEL 15-3/8 × 7-7/8 × 7-7/8″



MODEL PLASTMAK SC 5000 3-AXIS CNC DRILLING AND MILLING MACHINE FOR PVC



Plastmak SC 5000S 3-axis CNC drilling and milling machine for aluminum and PVC



SC 5000 touch screen

3 axes · 3 spindles at 18,000 rpm · travel 15-3/8 × 7-7/8 × 7-7/8″

Three-axis CNC machines that do the hardware work of a window on one station: lock and handle places, hinge and espagnolette slots, barrel holes, triple drilling and drainage slots, with three spindles at 18,000 rpm on servo axes travelling 15-3/8 × 7-7/8 × 7-7/8″ (390 × 200 × 200 mm). The SC 5000 is for PVC — door, sash and sliding work, point-to-point programming, inside drainage slots, measuring arms with stops and laser centring. The SC 5000S takes aluminum and PVC: three independent 1.9 HP spindles, a 19″ Windows screen with DXF import and CAM Codex, on-screen simulation, cooling for aluminum, an automatic safety cover and a wider working area; switching between aluminum and PVC on the touch screen changes every speed by itself.

STANDARD FEATURES

- ✓ Door, sash, handle-cylinder (barrel) and triple drilling on one station; drainage slots
- ✓ 3 spindles at 18,000 rpm on X, Y and Z servo axes, travel 15-3/8 × 7-7/8 × 7-7/8″ (390 × 200 × 200 mm)
- ✓ Right and left measuring arms with stops; laser centring; unlimited memory
- ✓ SC 5000: PVC profiles, easy point-to-point programming
- ✓ SC 5000S: aluminum and PVC; 19″ Windows screen, DXF import and drawing with CAM Codex; process simulation on screen
- ✓ SC 5000S: cooling for aluminum; aluminum / PVC switch on the touch screen; linear guides; automatic lubrication; automatic safety cover; remote support
- ✓ Built to CE standards
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- \+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

SC 5000 · SC 5000S 3-AXIS CNC DRILLING AND MILLING MACHINES, TRAVEL 15-3/8 × 7-7/8 × 7-7/8"



SC 5000 spindles and profile clamps



Inside the SC 5000




SC 5000 spindle motors on the servo axes




SC 5000S 19" Windows screen with DXF drawing




SC 5000S working area and screen

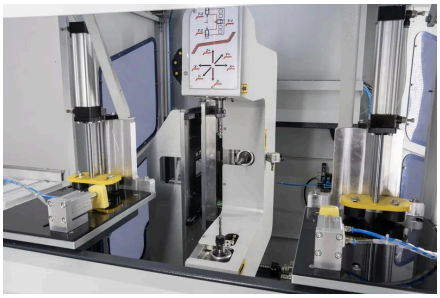


SC 5000S three independent spindles

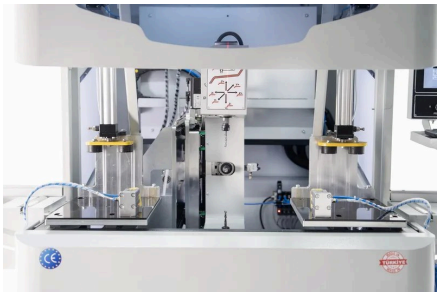

Inside the SC 5000S

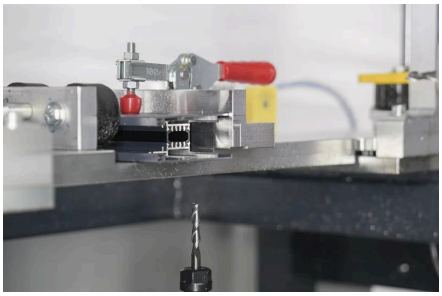

SC 5000S profile clamp and cutter

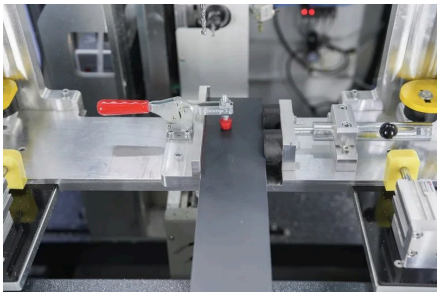

SC 5000S profile clamps on the wide table

TECHNICAL SPECIFICATIONS

SC 5000 · SC 5000S 3-AXIS CNC DRILLING AND MILLING MACHINES, TRAVEL 15-3/8 × 7-7/8 × 7-7/8″

SC 5000 · SC 5000S

3-axis CNC drilling and milling

Model	SC 5000	SC 5000S
Profiles	**PVC**	**Aluminum and PVC**
Axis travel X / Y / Z	**15-3/8 / 7-7/8 / 7-7/8″ (390 / 200 / 200 mm)**	**15-3/8 / 7-7/8 / 7-7/8″ (390 / 200 / 200 mm)**
Spindles	**3 motors: 1 + 0.7 + 0.7 HP (0.75 + 0.55 + 0.55 kW), 18,000 rpm**	**3 independent: 3 × 1.9 HP (3 × 1.4 kW), 18,000 rpm**
Router cutter / shank	Ø3/16″ / Ø5/16″ (5 / 8 mm)	Ø3/16″ / Ø5/16″ (5 / 8 mm)
Routing length min.	3-1/8″ (80 mm)	3-1/8″ (80 mm)
Control	Point-to-point programming, laser centring	19″ Windows screen, DXF import (CAM Codex), simulation
Total power	**8 HP (6 kW)**	**8 HP (6 kW)**
Air consumption	0.32 CFM (9 l/min)	0.32 CFM (9 l/min)
Weight	**783 lb (355 kg)**	**1,653 lb (750 kg)**
Dimensions W × D × H	94 × 44 × 76″ (2,400 × 1,130 × 1,940 mm)	52 × 66 × 75″ (1,330 × 1,670 × 1,900 mm)

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16″. Air consumption is at 87 – 116 psi (6 – 8 bar). Weights are approximate.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SC 501 · 502S · 512 · 521S · 542 · 5 MODELS

SC 501 · 502S · 512 · 521S · 542 COPY ROUTERS, TRAVEL 11 × 4-15/16 × 3-9/16″



MODEL PLASTMAK SC 501 COPY ROUTER WITH TRIPLE DRILLING UNIT



Plastmak SC 502S high-frequency copy router



Plastmak SC 512 high-frequency 3-hole copy router

Travel 11 × 4-15/16 × 3-9/16″ · 12,000 – 18,000 rpm · triple drilling (501 · 502S · 512)

A copy router follows a template with a stylus while the router cuts the same shape into the profile — the quick, simple way to make lock, handle and hinge cut-outs and drainage slots in series. On the SC 501 (PVC, 12,000 rpm), SC 502S and SC 512 (aluminum and PVC, 18,000 rpm) the copy head works on the vertical axis and a triple drilling unit on the horizontal one, each able to run on its own; a universal template comes with them and special templates can be made. The SC 521S opens water drainage slots with three independent 18,000 rpm routers that can work angled, over a table that moves right and left. The SC 542 is the aluminum router: an 18,000 rpm spindle, oil cooling and a template system made for aluminum handle, lock and hardware slots. All travel 11 × 4-15/16 × 3-9/16″ (280 × 125 × 90 mm).

STANDARD FEATURES

- ✓ Copy head on the vertical axis, triple drilling unit on the horizontal axis (SC 501 · 502S · 512); each works on its own
- ✓ Universal template; templates made to order
- ✓ Water drainage slots, also angled (SC 501 · 502S · 521S)
- ✓ High-frequency 18,000 rpm routers (SC 502S · 512 · 521S · 542); cooling on the SC 512, oil cooling on the SC 542
- ✓ SC 521S: three routers working separately or together, pneumatic clamping, fully automatic cycle
- ✓ Right conveyor 3′ 3″ (1 m) on the SC 502S, 512 and 542; dual support system on the SC 502S
- ✓ Built to CE standards
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Optional templates
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS · 1 / 2


SC 501 · 502S · 512 · 521S · 542 COPY ROUTERS, TRAVEL 11 × 4-15/16 × 3-9/16″



Plastmak SC 521S triple water drainage slot router




Plastmak SC 542 high-frequency aluminum copy router

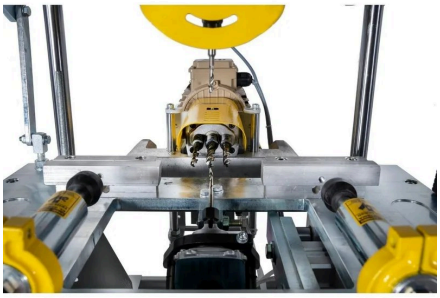

SC 501 triple drilling unit



SC 501 copy head and profile clamps

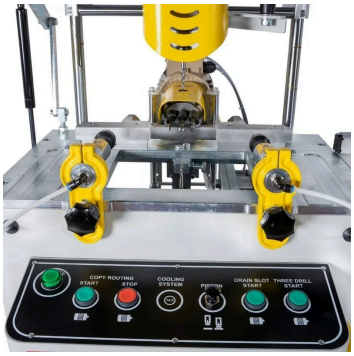

SC 502S controls: copy routing, cooling, drainage slot and triple drilling



SC 502S universal template



SC 502S router head and clamps



SC 512 router head, triple drilling and cooling



SC 521S three drainage-slot routers

DETAILS, COMPONENTS AND OPTIONS · 2 / 2


SC 501 · 502S · 512 · 521S · 542 COPY ROUTERS, TRAVEL 11 × 4-15/16 × 3-9/16″




SC 521S routers over the moving table




SC 542 18,000 rpm spindle

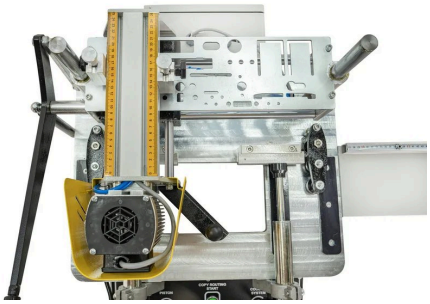


SC 542 template system for aluminum hardware cut-outs

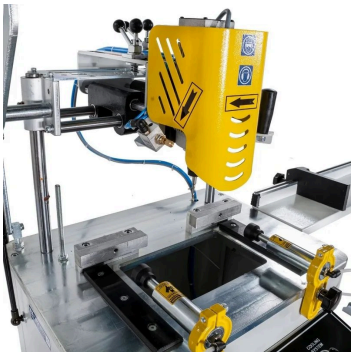

SC 542 router head over the profile clamps

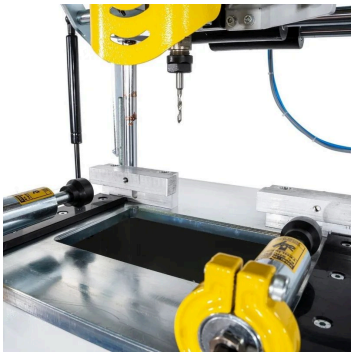

SC 542 pneumatic profile clamp

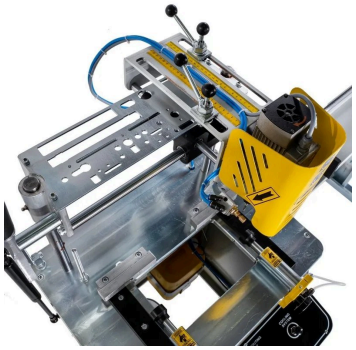

SC 542 copy head and template from above

TECHNICAL SPECIFICATIONS

SC 501 · 502S · 512 · 521S · 542 COPY ROUTERS, TRAVEL 11 × 4-15/16 × 3-9/16″

SC 501 · 502S · 512 · 521S · 542

Copy routers

Model	SC 501	SC 502S	SC 512	SC 521S	SC 542
Profiles	PVC	Aluminum and PVC	Aluminum and PVC	PVC	Aluminum
Jobs	Lock places, hinge slots, handle holes, drainage slots	Lock places, hinge slots, handle holes, drainage slots	Lock places, hinge slots, handle holes	Water drainage slots, 3 routers	Handles, locks and hardware slots
Router speed	12,000 rpm	18,000 rpm	18,000 rpm	18,000 rpm	18,000 rpm
Router motor	2 × 1.2 HP (2 × 0.9 kW)	1.2 + 1 HP (0.9 + 0.75 kW)	1 HP (0.75 kW)	3 × 1 HP (3 × 0.75 kW)	1.9 HP (1.4 kW)
Router travel X / Y / Z	11 / 4-15/16 / 3-9/16″ (280 / 125 / 90 mm)	11 / 4-15/16 / 3-9/16″ (280 / 125 / 90 mm)	11 / 4-15/16 / 3-9/16″ (280 / 125 / 90 mm)	11 / 4-15/16 / 3-9/16″ (280 / 125 / 90 mm)	11 / 4-15/16 / 3-9/16″ (280 / 125 / 90 mm)
Router cutter / shank	Ø3/16″ / Ø5/16″ (5 / 8 mm)	Ø3/16″ / Ø5/16″ (5 / 8 mm)	Ø3/16″ / Ø5/16″ (5 / 8 mm)	Ø3/16″ / Ø5/16″ (5 / 8 mm)	Ø3/16″ / Ø5/16″ (5 / 8 mm)
Routing length min.	3-1/8″ (80 mm)	3-1/8″ (80 mm)	3-1/8″ (80 mm)	3-1/8″ (80 mm)	3-1/8″ (80 mm)
Triple drilling unit	1 HP (0.75 kW); drills to Ø7/16″ / Ø1/2″ (11 / 12 mm)	1 HP (0.75 kW); drills to Ø7/16″ / Ø1/2″ (11 / 12 mm)	1 HP (0.75 kW); drills to Ø7/16″ / Ø1/2″ (11 / 12 mm)	—	—
Total power	**3.4 HP (2.5 kW)**	**4 HP (3 kW)**	**2 HP (1.5 kW)**	**4 HP (3 kW)**	**1.9 HP (1.4 kW)**
Air consumption	0.32 CFM (9 l/min)	0.32 CFM (9 l/min)	0.32 CFM (9 l/min)	0.32 CFM (9 l/min)	0.32 CFM (9 l/min)
Conveyor	—	Right, 3′ 3″ (1 m)	Right, 3′ 3″ (1 m)	Table moves right and left	Right, 3′ 3″ (1 m)
Weight	**254 lb (115 kg)**	**287 lb (130 kg)**	**243 lb (110 kg)**	**309 lb (140 kg)**	**198 lb (90 kg)**
Dimensions W × D × H	26 × 35 × 48″ (650 × 900 × 1,220 mm)	28 × 38 × 49″ (710 × 960 × 1,250 mm)	26 × 35 × 48″ (650 × 900 × 1,220 mm)	29 × 35 × 58″ (740 × 900 × 1,475 mm)	25 × 36 × 57″ (631 × 920 × 1,443 mm)

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16″. Air consumption is at 87 – 116 psi (6 – 8 bar). Weights are approximate.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SC 211 · SC 211S · 2 MODELS

SC 211 · SC 211S END MILLING MACHINES, CUTTERS TO Ø6-5/16"



MODEL PLASTMAK SC 211 END MILLING MACHINE WITH 2-KNIFE CUTTER SET



Plastmak SC 211S end milling machine with serial blade change



SC 211 cutter area and controls

Cutters to Ø6-5/16" · stack to 3-9/16" + 7-7/8" · ±45° (SC 211S)

An end milling machine shapes the end of a mullion (transom) to the contour of the frame profile it butts against, so the joint closes tight. The SC 211 mills PVC and aluminum mullions with a stack of cutters up to Ø5-1/2" (140 mm) and 3-9/16" (90 mm) high: two vertical and one horizontal vise hold the profile, a pneumatic cylinder moves the milling motor, and a separator button switches between profile series. The heavier SC 211S mills aluminum to high quality from –45° to +45° on mechanical stops, with cutters up to Ø6-5/16" (160 mm) and a second 7-7/8" (200 mm) stack; a whole cutter group changes with one button and three more wait on the rack, the support adjusts to four profiles, the feed is hydro-pneumatic and a boron-oil spray cools the cut.

STANDARD FEATURES

- ✓ End milling of mullion (transom) connections on PVC and aluminum profiles
- ✓ SC 211: 2 vertical and 1 horizontal vise, pneumatic profile clamping; milling motor moved by a pneumatic cylinder
- ✓ SC 211: easy series change with the separator button (60 – 70 series)
- ✓ SC 211S: –45° to +45° with mechanical angle stops; cutter groups changed with a single button; rack for 3 groups
- ✓ SC 211S: support adjustable for four profiles; hydro-pneumatic cutting speed; boron-oil spray
- ✓ Built to CE standards
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Hydro-check feed (SC 211)
- + Cooling system (SC 211)
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS


SC 211 · SC 211S END MILLING MACHINES, CUTTERS TO Ø6-5/16"




SC 211 two vertical and one horizontal vise



SC 211 cutter stack and profile stop

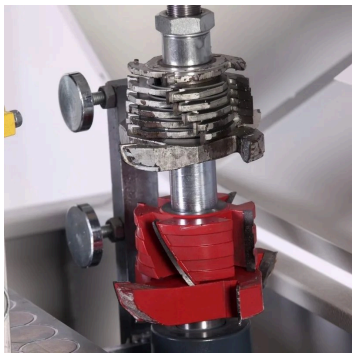

SC 211 cutter stack for the mullion end

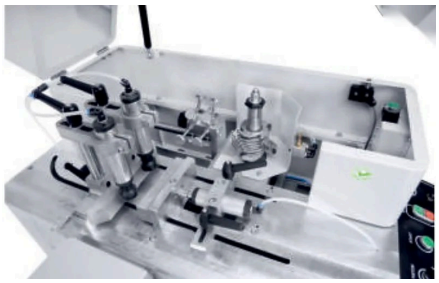

SC 211S blade group changed with a single button

TECHNICAL SPECIFICATIONS

SC 211 · SC 211S END MILLING MACHINES, CUTTERS TO Ø6-5/16"

SC 211 · SC 211S

End milling machines

Model	SC 211	SC 211S
Profiles	**PVC and aluminum**	**Aluminum and PVC**
Milling angle	**To 30°**	**–45° to +45°, mechanical stops**
Cutter max.	**Ø5-1/2" (140 mm)**	**Ø6-5/16" (160 mm)**
Cutter bore	Ø1-3/16" (30 mm)	Ø1-3/16" (30 mm)
Cutter stack height max.	3-9/16" (90 mm)	3-9/16" + 7-7/8" (90 + 200 mm)
Cutter change	Series switch button (60 – 70 series)	Whole cutter group by one button; rack for 3 groups
Motor	**1.5 HP (1.1 kW)**	**1.5 HP (1.1 kW)**
Air consumption	0.35 CFM (10 l/min)	0.35 CFM (10 l/min)
Weight	**220 lb (100 kg)**	**342 lb (155 kg)**
Dimensions W × D × H	27 × 24 × 48" (690 × 600 × 1,220 mm)	41 × 26 × 49" (1,030 × 670 × 1,245 mm)

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16". Air consumption is at 87 – 116 psi (6 – 8 bar). Weights are approximate.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SC 902 · 1 MODEL

SC 902 HYDRAULIC CORNER CRIMPING MACHINE FOR ALUMINUM, PROFILES TO 5-1/8" HIGH



MODEL PLASTMAK SC 902 HYDRAULIC CORNER CRIMPING MACHINE FOR ALUMINUM

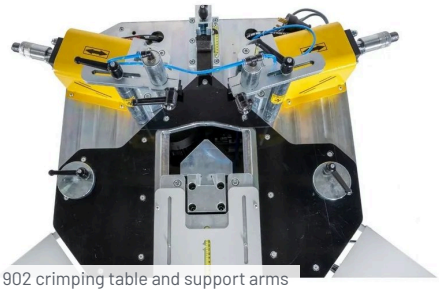

SC 902 crimping table and support arms



SC 902 knife holders, 4 right and 4 left

4 + 4 hydraulic knives · profiles to 5-1/8" high · 2 × 3,307 lbf

Aluminum window and door frames are joined at the corner with a cleat inside the profile; the corner crimper presses knives into the profile walls over the cleat and locks the 90° joint. On the SC 902 both knife movements are hydraulic, 4 knives on the right and 4 on the left, with millimetre scales for knife height and advance, a pneumatic centring miter wedge, and a release button for fine adjustment. Two foot pedals work the hydraulic press and the profile clamp, plexiglass protects the profile faces, and arms on both sides carry the frame. Profiles up to 5-1/8" (130 mm) high.

STANDARD FEATURES


- ✓ Hydraulic movement of both knife sets; 4 right and 4 left knives
- ✓ Millimetre scales for knife height and advance; release button for precise adjustment
- ✓ Pneumatic centring miter wedge; 2 foot pedals for the hydraulic press and the profile clamp
- ✓ Plexiglass sheet protects the profile faces; right and left support arms
- ✓ Built to CE standards
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS


SC 902 HYDRAULIC CORNER CRIMPING MACHINE FOR ALUMINUM, PROFILES TO 5-1/8" HIGH

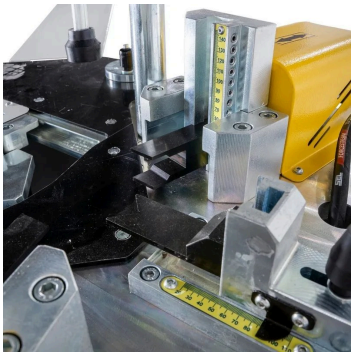

SC 902 crimping knives

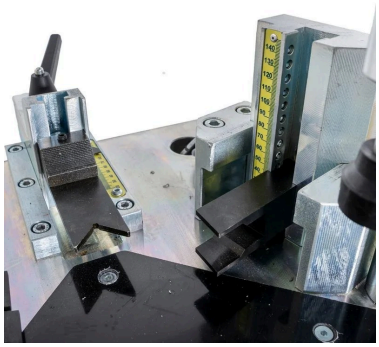

SC 902 millimetre scale for knife height and advance

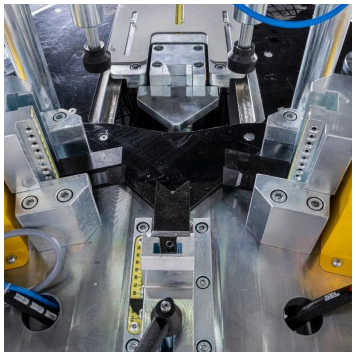

SC 902 pneumatic centring miter wedge



SC 902 hydraulic knife cylinder

TECHNICAL SPECIFICATIONS

SC 902 HYDRAULIC CORNER CRIMPING MACHINE FOR ALUMINUM, PROFILES TO 5-1/8" HIGH

SC 902

Hydraulic corner crimping machine

Model	SC 902
Profiles	**Aluminum, 90° corners**
Profile height max. H	**5-1/8" (130 mm)**
Knives	**4 right and 4 left, hydraulic**
Crimping force	**2 × 3,307 lbf (2 × 1,500 kgf) at 102 psi (7 bar)**
Hydraulic pressure max.	1,450 psi (100 bar)
Total power	**3 HP (2.2 kW)**
Air consumption	0.71 CFM (20 l/min)
Weight	**794 lb (360 kg)**
Dimensions W × D × H	43 × 37 × 50" (1,090 × 930 × 1,280 mm)

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16". Air consumption is at 87 – 116 psi (6 – 8 bar). Weights are approximate.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SINGLE SCREWING · DOUBLE-HEAD SCREWING · SASH ASSEMBLY · 3 MACHINES

SCREWING MACHINES AND SASH ASSEMBLY MACHINE, SCREWS TO #8 × 1-1/2″



MODEL PLASTMAK SINGLE SCREWING MACHINE WITH ROLLER TABLES



Plastmak double-head screwing machine with support tables



Plastmak sash assembly machine with laser alignment and automatic screwing

Screws #7 × 5/8″ to #8 × 1-1/2″ · double-opening sash in 3.5 min

Assembly stations for the steps after the frame is welded or crimped. The single screwing machine drives screws from #7 × 5/8″ to #8 × 1-1/2″ (3.9 × 16 to 4.2 × 38 mm) with a pneumatic motor and stable torque control, its working range set between 1-9/16″ and 4-3/4″ (40 – 120 mm) and its cycle started by a foot pedal — compact enough to slot into a line, fed by an automatic screw feeder. The double-head screwing machine drives two screws at once into PVC and aluminum profiles. The sash assembly machine fits single and double opening hardware in series without moulds or templates: laser alignment, automatic measuring and screwing, a three-arm drilling unit, a hinge template and an espagnolette groove cutter — 3.5 minutes on average for a double opening window.

STANDARD FEATURES

- ✓ Single screwing: pneumatic screwing system with precise torque control; adjustable working range (A – B); foot pedal
- ✓ Single screwing: works with an automatic screw feeding unit; compact, ergonomic and easy to maintain
- ✓ Double-head screwing: two pneumatic screwing motors driving at the same time, PVC and aluminum profiles
- ✓ Sash assembly: series work on different profiles, single and double opening hardware, no moulds or templates
- ✓ Sash assembly: fully automatic laser-aligned screwing; automatic measuring; triple-arm drilling with support plate
- ✓ Sash assembly: semi-automatic hinge template; espagnolette grooving cutter; lit hardware shelf; corner-turning scissors
- ✓ Compressed air required; RAL 7035 grey

DETAILS, COMPONENTS AND OPTIONS

SCREWING MACHINES AND SASH ASSEMBLY MACHINE, SCREWS TO #8 × 1-1/2″



Pneumatic screwing motor

TECHNICAL SPECIFICATIONS

SCREWING MACHINES AND SASH ASSEMBLY MACHINE, SCREWS TO #8 × 1-1/2″

SCREWING AND SASH ASSEMBLY

Pneumatic screwing stations and a sash hardware assembly machine

Model	Single screwing machine	Double-head screwing machine	Sash assembly machine
Job	**Screwing at one station**	**Screwing with two heads at once, PVC and aluminum**	**Fitting and screwing sash hardware, single and double opening**
Working range min – max	A and B 1-9/16″ – 4-3/4″ (40 – 120 mm)	—	—
Screw size	**#7 × 5/8″ to #8 × 1-1/2″ (3.9 × 16 to 4.2 × 38 mm)**	**to #8 × 1-1/2″ (4.2 × 38 mm)**	**—**
Screwing motor	Pneumatic, 0.7 HP, 3,000 rpm, stall torque 5 lb·ft	2 × pneumatic, 0.7 HP, 3,000 rpm, stall torque 5 lb·ft	Automatic screwing with laser alignment
Cycle	**Foot pedal**	**—**	**Double opening window: 3.5 min on average**
Air	90 – 120 psi, 1/4″ inlet	90 – 120 psi, 1/4″ inlet	90 – 120 psi
Weight	**276 lb**	**463 lb**	**—**
Dimensions L × W × H	43 × 22 × 79″	35 × 30 × 79″	—
Colour	—	RAL 7035	RAL 7035

Figures as listed in NovoTech's Plastmak catalogue. Air supply 87 – 116 psi (6 – 8 bar). Weights are approximate.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SC 221 · SC 551 · STAND · 2 MACHINES

SC 221 · SC 551 PORTABLE NOTCHING AND COPY MILLING MACHINES



MODEL PLASTMAK SC 221 PORTABLE NOTCHING AND MILLING MACHINE



Plastmak SC 551 portable copy milling machine



Two-shelf steel stand for the portable machines

Mullion notching (SC 221) · copy milling of hardware slots (SC 551)

Bench machines for small shops, site work and the jobs a production line does not cover. The SC 221 notches the ends of aluminum and PVC mullions (transoms) to fit the frame, holding the profile in vertical and horizontal vises, with a single-phase motor. The SC 551 copy-mills lock, handle, hinge and espagnolette slots and grooves of any size in aluminum and PVC profiles, from a copy template made for the job — or, against its stop, grooves of many kinds without a template. A two-shelf steel stand carries them, and a lower cabinet and an air system are available for both.

STANDARD FEATURES

- ✓ SC 221: mullion (transom) notching of aluminum and PVC profiles; vertical and horizontal vises; single-phase motor
- ✓ SC 551: lock, handle, hinge and espagnolette slots and grooves of any size, aluminum and PVC
- ✓ SC 551: copy device suited to your job; grooving independent of the copy template with the help of the stop
- ✓ Two-shelf steel stand for the portable machines

OPTIONAL EQUIPMENT

- \+ Lower cabinet
- \+ Pneumatic (air) system

SC 221 · SC 551 · STAND — TECHNICAL SPECIFICATIONS

Model	SC 221	SC 551	Portable stand
Job	**Mullion (transom) notching of aluminum and PVC profiles**	**Lock, handle, hinge and espagnolette slots and grooves of any size**	**Two-shelf steel stand for the portable machines**
Working	Vertical and horizontal vises	Copy template made for your job; grooving against the stop without a template	—
Motor	Single-phase	—	—
Options	Lower cabinet; pneumatic system	Lower cabinet; pneumatic system	—

Air supply 87 – 116 psi (6 – 8 bar). Weights are approximate.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SC 1000 · 1001 · 1002 · 1003 · 4 MODELS

SC 1000 DIGITAL MEASURING CONVEYOR, 9′ 10″, ±.020″, AND SC 1001 – 1003 ROLLER CONVEYORS



MODEL PLASTMAK SC 1000 DIGITAL MEASURING CONVEYOR, 9′ 10″ (3 M)



SC 1000 touch screen and measuring stop



Plastmak SC 1001 aluminum roller conveyor

Measuring length 9′ 10″ (3 m) · ±.020″ (±0.5 mm) · roller and sheet conveyors

Conveyors carry long profiles to and from the saws and machines at table height. The SC 1000 is a digital measuring conveyor: 9′ 10″ (3 m) long, it sets its stop to the length entered on the touch screen to ±.020″ (±0.5 mm), retracts the stop at one push so the cut piece comes out freely, calibrates easily and fits any of the saws, on a 220 V single-phase supply. The SC 1001 (aluminum rollers), SC 1002 (plastic rollers, kind to finished profiles) and SC 1003 (sheet-metal track) are plain support conveyors on height-adjustable legs.

STANDARD FEATURES

- ✓ SC 1000: 9′ 10″ (3 m) digital measuring conveyor, ±.020″ (±0.5 mm), touch screen
- ✓ SC 1000: stop retracts at one push to free the cut piece; easy to fit to all the machines; easy calibration
- ✓ SC 1000: works on a 220 V single-phase supply
- ✓ SC 1001: aluminum roller track · SC 1002: plastic roller track · SC 1003: sheet-metal profile track
- ✓ Height-adjustable legs

OPTIONAL EQUIPMENT

- \+ Bluetooth measuring station (SC 1000)

SC 1000 · 1001 · 1002 · 1003 — TECHNICAL SPECIFICATIONS

Model	SC 1000	SC 1001	SC 1002	SC 1003
Type	Digital measuring conveyor with stop	Aluminum roller conveyor	Plastic roller conveyor	Sheet-metal conveyor
Measuring length	9′ 10″ (3 m)	–	–	–
Accuracy	±.020″ (±0.5 mm)	–	–	–
Control	Touch screen; stop retracts at one push to free the cut piece	–	–	–
Supply	220 V single-phase	–	–	–
Legs	–	Height-adjustable	Height-adjustable	Height-adjustable

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16″.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

SC 1000 DIGITAL MEASURING CONVEYOR, 9’ 10”, ±.020”, AND SC 1001 – 1003 ROLLER CONVEYORS



Plastmak SC 1002 plastic roller conveyor



Plastmak SC 1003 sheet-metal conveyor

6 MACHINES · 40 – 60 WINDOWS A SHIFT

PVC SINGLE-HEAD PRODUCTION GROUP, 40 – 60 WINDOWS A SHIFT



MODEL PVC SINGLE-HEAD GROUP: SC 401 SAW, SC 501 COPY ROUTER, SC 101 WELDER, SC 301 BEAD SAW, SC 211 END MILL, SC 601 CORNER CLEANER



Plastmak SC 401 aluminum and PVC upcut saw, Ø" (450 mm) 17-11/16 blade



Plastmak SC 501 copy router with triple drilling unit

6 machines · 40 – 60 windows in an 8-hour shift

The starting set for a PVC window shop, built around single-head machines for a continuous flow: the SC 401 upcut saw cuts the profiles, the SC 501 copy router opens lock places, handle holes and drainage slots, the SC 101 welds the corners one at a time, the SC 601 cleans them, the SC 211 end-mills the mullions and the SC 301 cuts the glazing beads. Together they make 40 to 60 windows in an 8-hour shift.

STANDARD FEATURES

- Cutting: SC 401 upcut saw, Ø17-11/16" (450 mm), 0° – 180°
- Copy routing, triple drilling and drainage slots: SC 501
- Welding: SC 101 single-head welder, 25° – 180° · corner cleaning: SC 601, 3 knives
- Mullion end milling: SC 211 · glazing beads: SC 301
- Machines can be changed or added — ask us for a layout of your shop

PVC SINGLE-HEAD GROUP — TECHNICAL SPECIFICATIONS

Model	SC 401	SC 501	SC 101	SC 301	SC 211	SC 601
Job	**Upcut saw**	**Copy router with triple drilling**	**Single-head welder**	**Glazing bead saw**	**End milling machine**	**Corner cleaner, 3 knives**
Capacity	Ø17-11/16" blade, 0° – 180°	Travel 11 × 4-15/16 × 3-9/16"	25° – 180°, profiles to 6-5/16" high	Beads to 100-3/8"	Cutters to Ø5-1/2"	Profiles to 4-15/16" wide
Power	1.5 HP (1.1 kW)	3.4 HP (2.5 kW)	5.4 HP (4 kW)	2 HP (1.5 kW)	1.5 HP (1.1 kW)	2 HP (1.5 kW)
Air consumption	1.4 CFM (41 l/min)	0.32 CFM (9 l/min)	2.5 CFM (70 l/min)	0.35 CFM (10 l/min)	0.35 CFM (10 l/min)	0.35 CFM (10 l/min)
Weight	276 lb (125 kg)	254 lb (115 kg)	298 lb (135 kg)	209 lb (95 kg)	220 lb (100 kg)	397 lb (180 kg)

DETAILS, COMPONENTS AND OPTIONS

PVC SINGLE-HEAD PRODUCTION GROUP, 40 – 60 WINDOWS A SHIFT



Plastmak SC 101 single-head PVC welding machine



Plastmak SC 301 glazing bead saw



Plastmak SC 211 end milling machine with 2-knife cutter set



Plastmak SC 601 corner cleaning machine with 3 knives

TECHNICAL SPECIFICATIONS

PVC SINGLE-HEAD PRODUCTION GROUP, 40 – 60 WINDOWS A SHIFT

PVC SINGLE-HEAD GROUP — THE WHOLE GROUP

Sums of the machines above

Model	PVC single-head group
Output	**40 – 60 windows in an 8-hour shift**
Machines	6
Installed power	**15.7 HP (11.7 kW)**
Air consumption	5.3 CFM (150 l/min)
Machine weight	**1,653 lb (750 kg)**

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16". Air consumption is at 87 – 116 psi (6 – 8 bar). Weights are approximate. Group figures are the sums of the machines' own figures.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

6 MACHINES · 80 – 120 WINDOWS A SHIFT

PVC DOUBLE-HEAD PRODUCTION GROUP, 80 – 120 WINDOWS A SHIFT



MODEL PVC DOUBLE-HEAD GROUP: SC 400S SAW, SC 501 COPY ROUTER, SC 100 WELDER, SC 301 BEAD SAW, SC 211 END MILL, SC 601 CORNER CLEANER



Plastmak SC 400S double-head saw, 2 × Ø19-11/16" (500 mm) blades



Plastmak SC 501 copy router with triple drilling unit

6 machines · 80 – 120 windows in an 8-hour shift

The same flow with double-head machines for higher volumes: the SC 400S double-head saw cuts both ends of each profile in one stroke and the SC 100 welds two corners at a time, with the SC 501 copy router, SC 601 corner cleaner, SC 211 end mill and SC 301 bead saw around them — 80 to 120 windows in an 8-hour shift.

STANDARD FEATURES

- Cutting: SC 400S double-head saw, 2 × Ø19-11/16" (500 mm)
- Copy routing, triple drilling and drainage slots: SC 501
- Welding: SC 100 double-head welder · corner cleaning: SC 601
- Mullion end milling: SC 211 · glazing beads: SC 301
- Machines can be changed or added — ask us for a layout of your shop

PVC DOUBLE-HEAD GROUP — TECHNICAL SPECIFICATIONS

Model	SC 400S	SC 501	SC 100	SC 301	SC 211	SC 601
Job	**Double-head saw**	**Copy router with triple drilling**	**Double-head welder**	**Glazing bead saw**	**End milling machine**	**Corner cleaner, 3 knives**
Capacity	2 × Ø19-11/16" blades, 19-1/8" – 131-7/8"	Travel 11 × 4-15/16 × 3-9/16"	Profiles 13-3/8" – 126" long	Beads to 100-3/8"	Cutters to Ø5-1/2"	Profiles to 4-15/16" wide
Power	8 HP (6 kW)	3.4 HP (2.5 kW)	12.1 HP (9 kW)	2 HP (1.5 kW)	1.5 HP (1.1 kW)	2 HP (1.5 kW)
Air consumption	1.1 CFM (30 l/min)	0.32 CFM (9 l/min)	2.5 CFM (70 l/min)	0.35 CFM (10 l/min)	0.35 CFM (10 l/min)	0.35 CFM (10 l/min)
Weight	1,951 lb (885 kg)	254 lb (115 kg)	1,069 lb (485 kg)	209 lb (95 kg)	220 lb (100 kg)	397 lb (180 kg)

DETAILS, COMPONENTS AND OPTIONS

PVC DOUBLE-HEAD PRODUCTION GROUP, 80 – 120 WINDOWS A SHIFT



Plastmak SC 100 double-head PVC welding machine



Plastmak SC 301 glazing bead saw



Plastmak SC 211 end milling machine with 2-knife cutter set



Plastmak SC 601 corner cleaning machine with 3 knives

TECHNICAL SPECIFICATIONS

PVC DOUBLE-HEAD PRODUCTION GROUP, 80 – 120 WINDOWS A SHIFT

PVC DOUBLE-HEAD GROUP — THE WHOLE GROUP

Sums of the machines above

Model	PVC double-head group
Output	**80 – 120 windows in an 8-hour shift**
Machines	6
Installed power	**29 HP (21.6 kW)**
Air consumption	4.9 CFM (139 l/min)
Machine weight	**4,101 lb (1,860 kg)**

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16". Air consumption is at 87 – 116 psi (6 – 8 bar). Weights are approximate. Group figures are the sums of the machines' own figures.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

4 MACHINES · 80 – 120 WINDOWS A SHIFT

ALUMINUM DOUBLE-HEAD PRODUCTION GROUP, 80 – 120 WINDOWS A SHIFT



MODEL ALUMINUM DOUBLE-HEAD GROUP: SC 4000S SAW, SC 5000S CNC, SC 211S END MILL, SC 902 CORNER CRIMPER



Plastmak SC 4000S servo double-head saw, 2 × Ø" (600 mm) 23-5/8



Plastmak SC 5000S 3-axis CNC drilling and milling machine for aluminum and PVC

4 machines · 80 – 120 windows in an 8-hour shift

A group for aluminum windows and doors, built around a double-head saw and a 3-axis CNC: the SC 4000S cuts the profiles, the SC 5000S drills and mills the hardware places, the SC 211S end-mills the mullions and the SC 902 crimps the corners — 80 to 120 windows in an 8-hour shift.

STANDARD FEATURES

- Cutting: SC 4000S servo double-head saw, 2 × Ø23-5/8" (600 mm)
- Drilling and milling: SC 5000S 3-axis CNC for aluminum and PVC
- Mullion end milling: SC 211S, ±45° · corner crimping: SC 902 hydraulic
- Machines can be changed or added — ask us for a layout of your shop

ALUMINUM DOUBLE-HEAD GROUP — TECHNICAL SPECIFICATIONS

Model	SC 4000S	SC 5000S	SC 211S	SC 902
Job	Double-head saw	3-axis CNC drilling and milling	End milling machine	Hydraulic corner crimper
Capacity	2 × Ø23-5/8" blades, 21-5/8" – 171-5/8"	Travel 15-3/8 × 7-7/8 × 7-7/8"	Cutters to Ø6-5/16", ±45°	Profiles to 5-1/8" high
Power	10.7 HP (8 kW)	8 HP (6 kW)	1.5 HP (1.1 kW)	3 HP (2.2 kW)
Air consumption	1.1 CFM (30 l/min)	0.32 CFM (9 l/min)	0.35 CFM (10 l/min)	0.71 CFM (20 l/min)
Weight	2,392 lb (1,085 kg)	1,653 lb (750 kg)	342 lb (155 kg)	794 lb (360 kg)

DETAILS, COMPONENTS AND OPTIONS

ALUMINUM DOUBLE-HEAD PRODUCTION GROUP, 80 – 120 WINDOWS A SHIFT



Plastmak SC 211S end milling machine with serial blade change



Plastmak SC 902 hydraulic corner crimping machine for aluminum

TECHNICAL SPECIFICATIONS

ALUMINUM DOUBLE-HEAD PRODUCTION GROUP, 80 – 120 WINDOWS A SHIFT

ALUMINUM DOUBLE-HEAD GROUP — THE WHOLE GROUP

Sums of the machines above

Model	Aluminum double-head group
Output	**80 – 120 windows in an 8-hour shift**
Machines	4
Installed power	**23.2 HP (17.3 kW)**
Air consumption	2.4 CFM (69 l/min)
Machine weight	**5,181 lb (2,350 kg)**

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16". Air consumption is at 87 – 116 psi (6 – 8 bar). Weights are approximate. Group figures are the sums of the machines' own figures.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

7 MACHINES · 200 – 220 WINDOWS A SHIFT

PVC WINDOW WORKSHOP SET-UP, 200 – 220 WINDOWS A SHIFT



MODEL PVC WINDOW WORKSHOP: SC 801 COMPRESSOR, SC 400S SAW, SC 5000 CNC, SC 100 WELDER, SC 6000 CORNER CLEANER, SC 211S END MILL, SC 301S BEAD SAW



SC 801 air compressor, 130 gal (500 l)



19-11/16 SC 400S double-head saw, 2 × Ø" (500 mm) blades

7 machines · 200 – 220 windows in an 8-hour shift

A complete PVC window workshop laid out as a production loop: compressed air from the SC 801, double-head cutting on the SC 400S, CNC drilling and milling on the SC 5000, double-corner welding on the SC 100, CNC corner cleaning on the SC 6000, end milling on the SC 211S and bead cutting on the SC 301S — 200 to 220 windows in an 8-hour shift.

STANDARD FEATURES

- Compressed air: SC 801 compressor, 130 gal (500 l)
- Cutting: SC 400S double-head saw · CNC drilling and milling: SC 5000
- Welding: SC 100 double-head welder · corner cleaning: SC 6000 CNC
- Mullion end milling: SC 211S · glazing beads: SC 301S, 12 beads without moulds
- Laid out as a loop so the profiles travel the shortest way — ask us for a layout of your shop

PVC WINDOW WORKSHOP — TECHNICAL SPECIFICATIONS

Model	SC 801	SC 400S	SC 5000	SC 100	SC 6000	SC 211S	SC 301S
Job	Air compressor	Double-head saw	3-axis CNC drilling and milling	Double-head welder	CNC corner cleaner	End milling machine	Mouldless glazing bead saw
Capacity	130 gal (500 l) tank	2 × Ø19-11/16" blades, 19-1/8" – 131-7/8"	Travel 15-3/8 × 7-7/8 × 7-7/8"	Profiles 13-3/8" – 126" long	400 – 500 frames a shift	Cutters to Ø6-5/16", ±45°	12 beads, to 100-3/8"
Power	–	8 HP (6 kW)	8 HP (6 kW)	12.1 HP (9 kW)	4 HP (3 kW)	1.5 HP (1.1 kW)	3 HP (2.2 kW)
Air consumption	–	1.1 CFM (30 l/min)	0.32 CFM (9 l/min)	2.5 CFM (70 l/min)	1.4 CFM (40 l/min)	0.35 CFM (10 l/min)	0.35 CFM (10 l/min)
Weight	–	1,951 lb (885 kg)	783 lb (355 kg)	1,069 lb (485 kg)	882 lb (400 kg)	342 lb (155 kg)	320 lb (145 kg)

DETAILS, COMPONENTS AND OPTIONS

PVC WINDOW WORKSHOP SET-UP, 200 – 220 WINDOWS A SHIFT



Plastmak SC 5000 3-axis CNC drilling and milling machine for PVC



Plastmak SC 100 double-head PVC welding machine



Plastmak SC 6000 semi-automatic CNC corner cleaner



Plastmak SC 211S end milling machine with serial blade change



Plastmak SC 301S mouldless glazing bead saw

TECHNICAL SPECIFICATIONS

PVC WINDOW WORKSHOP SET-UP, 200 – 220 WINDOWS A SHIFT

PVC WINDOW WORKSHOP — THE WHOLE GROUP

Sums of the machines above (without the compressor)

Model	PVC window workshop
Output	**200 – 220 windows in an 8-hour shift**
Machines	7
Installed power	**36.6 HP (27.3 kW)**
Air consumption	6.0 CFM (169 l/min)
Machine weight	**5,346 lb (2,425 kg)**

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded, lengths to the nearest 1/16". Air consumption is at 87 – 116 psi (6 – 8 bar). Weights are approximate. Group figures are the sums of the machines' own figures.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by Plastmak
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.