
NovoTech MACHINE TOOLS Inc.

TOOLING CATALOGUE · INCH EDITION

EUROSTAMP TOOLING · MADE IN ITALY · SOLD & SERVICED IN CANADA BY NOVOTECH

PRESS BRAKE TOOLING

Punches, dies, holders, adapters and clamps for Amada-Promecam (European), Trumpf, Wila, Bystronic and American-style press brakes — every dimension in millimetres and inches

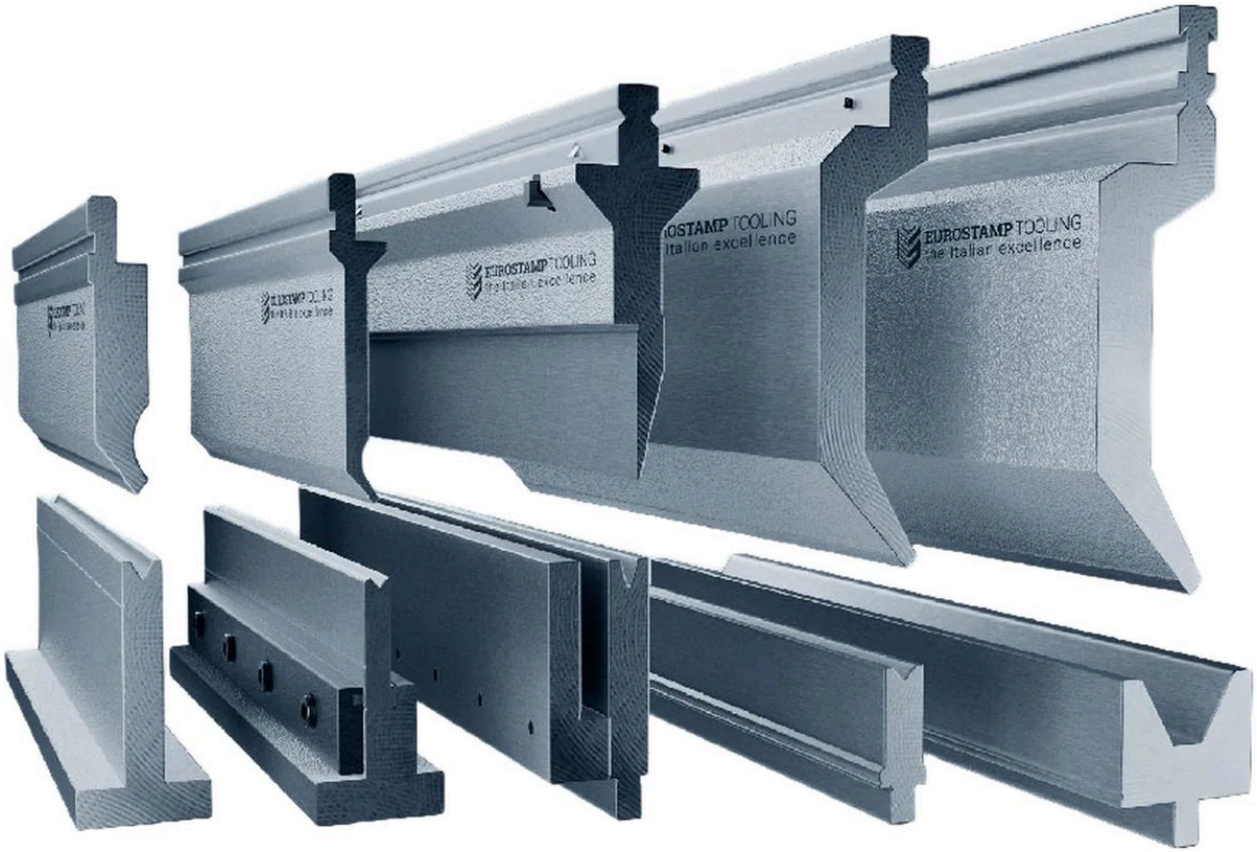

EUROSTAMP TOOLING

Manufactured by Eurostamp S.r.l., Gragnano Trebbiense, Italy

Since 1970
PRESS BRAKE TOOLING

700+
TOOLS IN THIS CATALOGUE


mm + in
EVERY DIMENSION

Canada
QUOTES, STOCK & SUPPORT

NOVOTECH × EUROSTAMP

HOW TO READ THIS EDITION

This is EUROSTAMP's own catalogue, page for page, in English only, with the inch values added by NovoTech. Every metric number keeps its place and the imperial value stands under or beside it, parallel to it, in the same type.

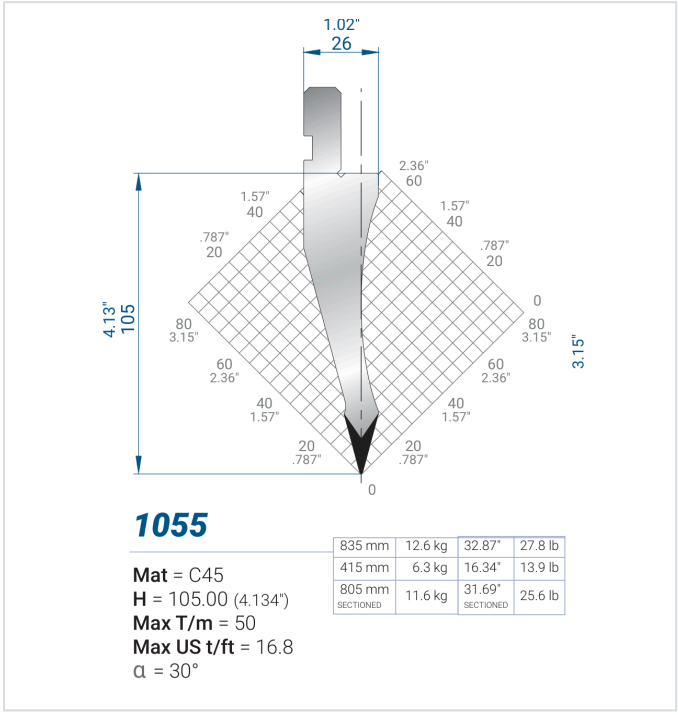

Punch 1055 on page 36: dimensions, the squared scale under the tool, the specification lines and the length box, each in millimetres and inches.

WHAT WAS ADDED

- **Dimensions** on the drawings: the inch value under the millimetres, or beside them where there is no room — 105 / 4.13", R 0.5 (.020"). Two decimals from one inch up, three below; decimal points throughout.
- **The squared scale** round each punch: every numbered mark with its inch value — 20 / .79", 40 / 1.57".
- **Specification lines**: height and radius in inches — H = 105.00 (4.134") — and a **Max US t/ft** line under every Max T/m.
- **Length boxes**: every length in inches and every weight in pounds, in a twin box beside the metric one or inside the same cells — 835 mm / 32.87", 12.6 kg / 27.8 lb. **SECTIONED** marks a sectioned set, **HORN** a piece with a horn.
- **Page 6 in inches**: the air-bending chart in inches and US tons per foot, in front of EUROSTAMP's metric page 6.
- **American-style tooling** (.500" tang): punches and dies on pages 272 – 277, and on page 278 the Z1 intermediate that takes American-style punches on European-style press brakes; drawings in inches with the millimetres added.
- The page numbers are EUROSTAMP's, so the product index on pages 8 – 13 still leads to every code.

CLAMPING STYLES IN THIS CATALOGUE

Style	Pages
Amada-Promecam (European) style	14 – 89
— ESH same-height series	77 – 89
Trumpf style	90 – 145
Wila style	146 – 169
Bystronic style	170 – 189
Radius, offset, nylon and urethane tools; EUROGRIP clamping; intermediates, clamps, adapters, tangs, adjustable dies, accessories and special tools	190 – 269
American style (.500" tang)	272 – 278

Running text is set again in English, with inch values beside the millimetres. EUROSTAMP's page 6 stainless chart prints 208 t/m for V 50 / 8 mm; the chart's formula gives 128, which both versions of page 6 now show.

MAX T/M IN US TONS PER FOOT

t/m	US t/ft	t/m	US t/ft	t/m	US t/ft
25	8.4	**30**	10.1	**35**	11.8
40	13.4	**50**	16.8	**60**	20.2
65	21.8	**70**	23.5	**80**	26.9
85	28.6	**90**	30.2	**100**	33.6
120	40.3	**125**	42.0	**150**	50.4
160	53.8	**180**	60.5	**200**	67.2
250	84.0	**300**	100.8	**340**	114.2
400	134.4				

Max T/m is the load the tool takes per metre of its length: × 0.336 gives US tons per foot. Never load a short piece of tool with the full press force.

ORDERING — send NovoTech the codes, lengths and quantities you need, with your press brake make and model. We check the clamping, quote, ship and support the tooling from Mississauga, ON, Canada: +1 647 526 5510 · info@NovoTechMachineTools.com



EUROSTAMP TOOLING
the Italian excellence

EUROSTAMP Tooling means quality, expertise and precision.

Since 1970 we have been making press brake tooling of outstanding accuracy for customers who demand the highest performance and reliability.

Eurostamp Tooling,
the Italian Excellence

WHO WE ARE

EUROSTAMP has been making press brake tooling since 1970. We are proud to build punches, dies and bending equipment that are accurate, reliable and made to the highest quality standards. Our modern machine shop and our large stock let us meet every requirement, including special requests.

Our tools are made from C45 medium-carbon steel, plain or tempered, and from Italian chrome-molybdenum steel. Every working surface is induction hardened to 55 – 60 HRC, up to 3 mm (.118") deep.

We also offer a wide range of press brake accessories: upper and lower adapters, and manual and pneumatic clamping systems. Our in-house engineering department designs custom bending solutions quickly and accurately.

OUR PHILOSOPHY

EUROSTAMP Tooling is an Italian company with an international outlook. From the start we chose to focus entirely on designing and making press brake tooling, and we have invested in state-of-the-art technology for every step of our production.

Our production team brings a craftsman's care to detail, precision and quality control. We work with the best Italian suppliers of raw materials and keep investing in new equipment and in a large, well-organized warehouse, so finished tools are ready to ship.


We invest in training our production and engineering staff and in research and development, because we believe the best way to serve our customers is to exceed their expectations with innovative solutions and first-class support before and after the sale. Our sales team works every day alongside production and engineering to bring this approach to customers around the world.



OUR EXPERTISE

Our specialists control every stage of production, from choosing the alloys and raw steels to milling, hardening and grinding each part. We use 100% Italian steel for the highest accuracy and mechanical properties.

AIR BENDING FORCE CALCULATION – INCH

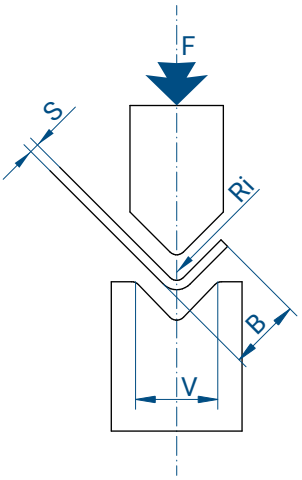


S	Sheet thickness (in)	**Ri**	Inside radius (in)
V	V opening (in)	**R**	Aluminum: 28 – 36 ksi
F	Force (US tons per foot)	**R**	Mild steel: 57 – 64 ksi
B	Shortest flange (in)	**R**	Stainless steel: 92 – 100 ksi

$$\mathbf{F} = \frac{S^2 \times 12 \times R}{1.4 \times V} = \text{..... US tons/ft}$$

S and V in inches, R in ksi

SHEET THICKNESS / V OPENING RATIO – INCH

S	Sheet thickness (in)	.020 – .098	.118 – .315	.354 – .394	.472 and up
V	V opening	6 S	8 S	10 S	12 S

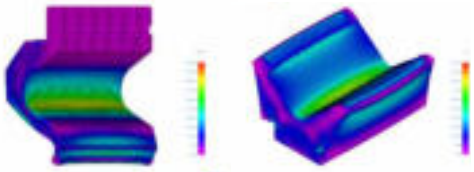

AIR BENDING TABLE – MILD STEEL

S			in	.020	.024	.031	.039	.047	.059	.079	.098	.118	.157	.177	.197	.236	.315	.394	.472	.591	.787	.984	1.18
.236	.157	.039		1.0	1.3	2.4	3.7																
.315	.217	.051			1.3	1.7	2.7	4.0	6.7														
.394	.276	.063				1.3	2.4	3.4	5.7														
.472	.335	.079					2.0	2.7	5.0	7.4													
.551	.394	.091						2.4	4.4	6.4													
.630	.433	.102						2.0	3.7	5.7	9.4												
.709	.531	.118							3.4	5.0	8.4	11											
.787	.551	.130							3.0	4.4	7.4	10											
.984	.689	.157								3.7	6.0	8.1	14										
1.26	.866	.197									4.7	6.4	11	15	17								
1.57	1.10	.256										5.0	9.1	11	14	20	36						
1.97	1.38	.315											7.1	9.1	11	16	29						
2.48	1.77	.394											5.7	7.1	8.7	13	23	35					
3.15	2.17	.512													7.1	10	18	29	40				
3.94	2.80	.630														8.1	14	23	32	50			
4.92	3.50	.787																18	26	40	72		
6.30	4.45	1.02																14	20	32	57		
7.87	5.51	1.30																	18	25	45	71	
9.84	6.89	1.61																			36	57	81
V	B	Ri																				F	

US tons/ft


AIR BENDING TABLE – STAINLESS STEEL

S			in	.020	.024	.031	.035	.039	.047	.059	.079	.098	.118	.157	.197	.236	.315	.394	.472	.591	.787	.984	1.18
.236	.157	.039		1.7	2.0	3.7	4.4	5.7															
.315	.217	.051			2.0	2.7	3.4	4.0	6.0														
.394	.276	.063				2.4	2.7	3.7	5.0														
.472	.335	.079					2.4	2.7	4.0	6.7	11												
.551	.394	.091							3.7	5.7	9.7												
.630	.433	.102							3.0	5.0	8.7	13											
.709	.531	.118								4.4	7.7	12	17										
.787	.551	.130								4.0	6.7	10	15										
.984	.689	.157									5.7	8.4	12	22									
1.26	.866	.197										6.4	9.7	17	26								
1.57	1.10	.256											7.7	14	21	30							
1.97	1.38	.315												11	17	24	43						
2.48	1.77	.394												8.7	13	19	34	55					
3.15	2.17	.512													11	15	27	43	63				
3.94	2.80	.630														12	22	34	48				
4.92	3.50	.787															17	27	39	60			
6.30	4.45	1.02																21	30	47	84		
7.87	5.51	1.30																	28	38	70	106	
9.84	6.89	1.61																		56	86	121	
V	B	Ri																				F	

US tons/ft

S, V, B and Ri in inches; F in US tons per foot of bend length. Converted from EUROSTAMP's metric chart on the next page (1 mm = .03937 in, 1 metric t/m = 0.336 US t/ft).

AIR BENDING FORCE CALCULATION – METRIC

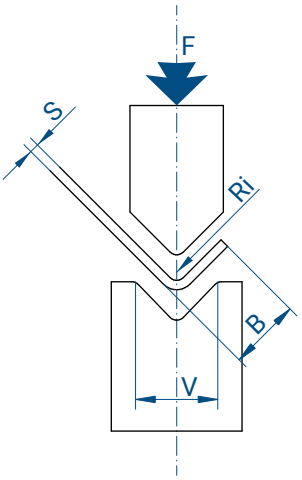


S	Sheet thickness (mm)	**Ri**	Inside radius (mm)
V	V opening (mm)	**R**	Aluminum: 20 – 25 kg/mm²
F	Force (metric tons per meter)	**R**	Mild steel: 40 – 45 kg/mm²
B	Shortest flange (mm)	**R**	Stainless steel: 65 – 70 kg/mm²

$$\mathbf{F} = \frac{S^2 \times 2 \times R}{1.4 \times V} = \text{.....} \text{ ton/m}$$

SHEET THICKNESS / V OPENING RATIO – METRIC

S	Sheet thickness (mm)	0.5 – 2.5	3 – 8	9 – 10	12 and up
V	V opening	6 S	8 S	10 S	12 S

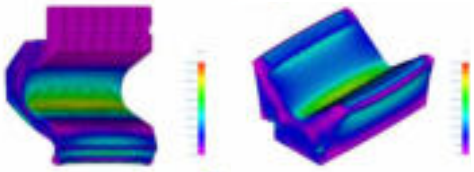

AIR BENDING TABLE – MILD STEEL


S	mm	0.5	0.6	0.8	1	1.2	1.5	2	2.5	3	4	4.5	5	6	8	10	12	15	20	25	30
6	4	1	3	4	7	11															
8	5.5	1.3		4	5	8	12	20													
10	7	1.6			4	7	10	17													
12	8.5	2				6	8	15	22												
14	10	2.3					7	13	19												
16	11	2.6					6	11	17	28											
18	13.5	3						10	15	25	34										
20	14	3.3						9	13	22	30										
25	17.5	4							11	18	24	43									
32	22	5								14	19	34	44	52							
40	28	6.5									15	27	34	42	60	107					
50	35	8										21	27	33	48	85					
63	45	10										17	21	26	38	68	105				
80	55	13												21	30	53	85	120			
100	71	16													24	43	67	96	150		
125	89	20															53	78	120	215	
160	113	26															42	60	95	170	
200	140	33																55	75	135	210
250	175	41																		108	170	240
V	B	Ri																			F

t/m

AIR BENDING TABLE – STAINLESS STEEL

S	mm	0.5	0.6	0.8	0.9	1	1.2	1.5	2	2.5	3	4	5	6	8	10	12	15	20	25	30
6	4	1	5	6	11	13	17														
8	5.5	1.3		6	8	10	12	18													
10	7	1.6			7	8	11	15													
12	8.5	2				7	8	12	20	33											
14	10	2.3						11	17	29											
16	11	2.6						9	15	26	39										
18	13.5	3							13	23	35	51									
20	14	3.3							12	20	30	45									
25	17.5	4								17	25	36	65								
32	22	5									19	29	51	78							
40	28	6.5										23	41	63	90						
50	35	8											32	50	72	128					
63	45	10											26	39	57	102	163				
80	55	13												32	45	81	129	187			
100	71	16													36	65	101	144			
125	89	20														51	80	117	180		
160	113	26															63	90	141	250	
200	140	33																83	114	208	315
250	175	41																		167	255	360
V	B	Ri																			F


t/m

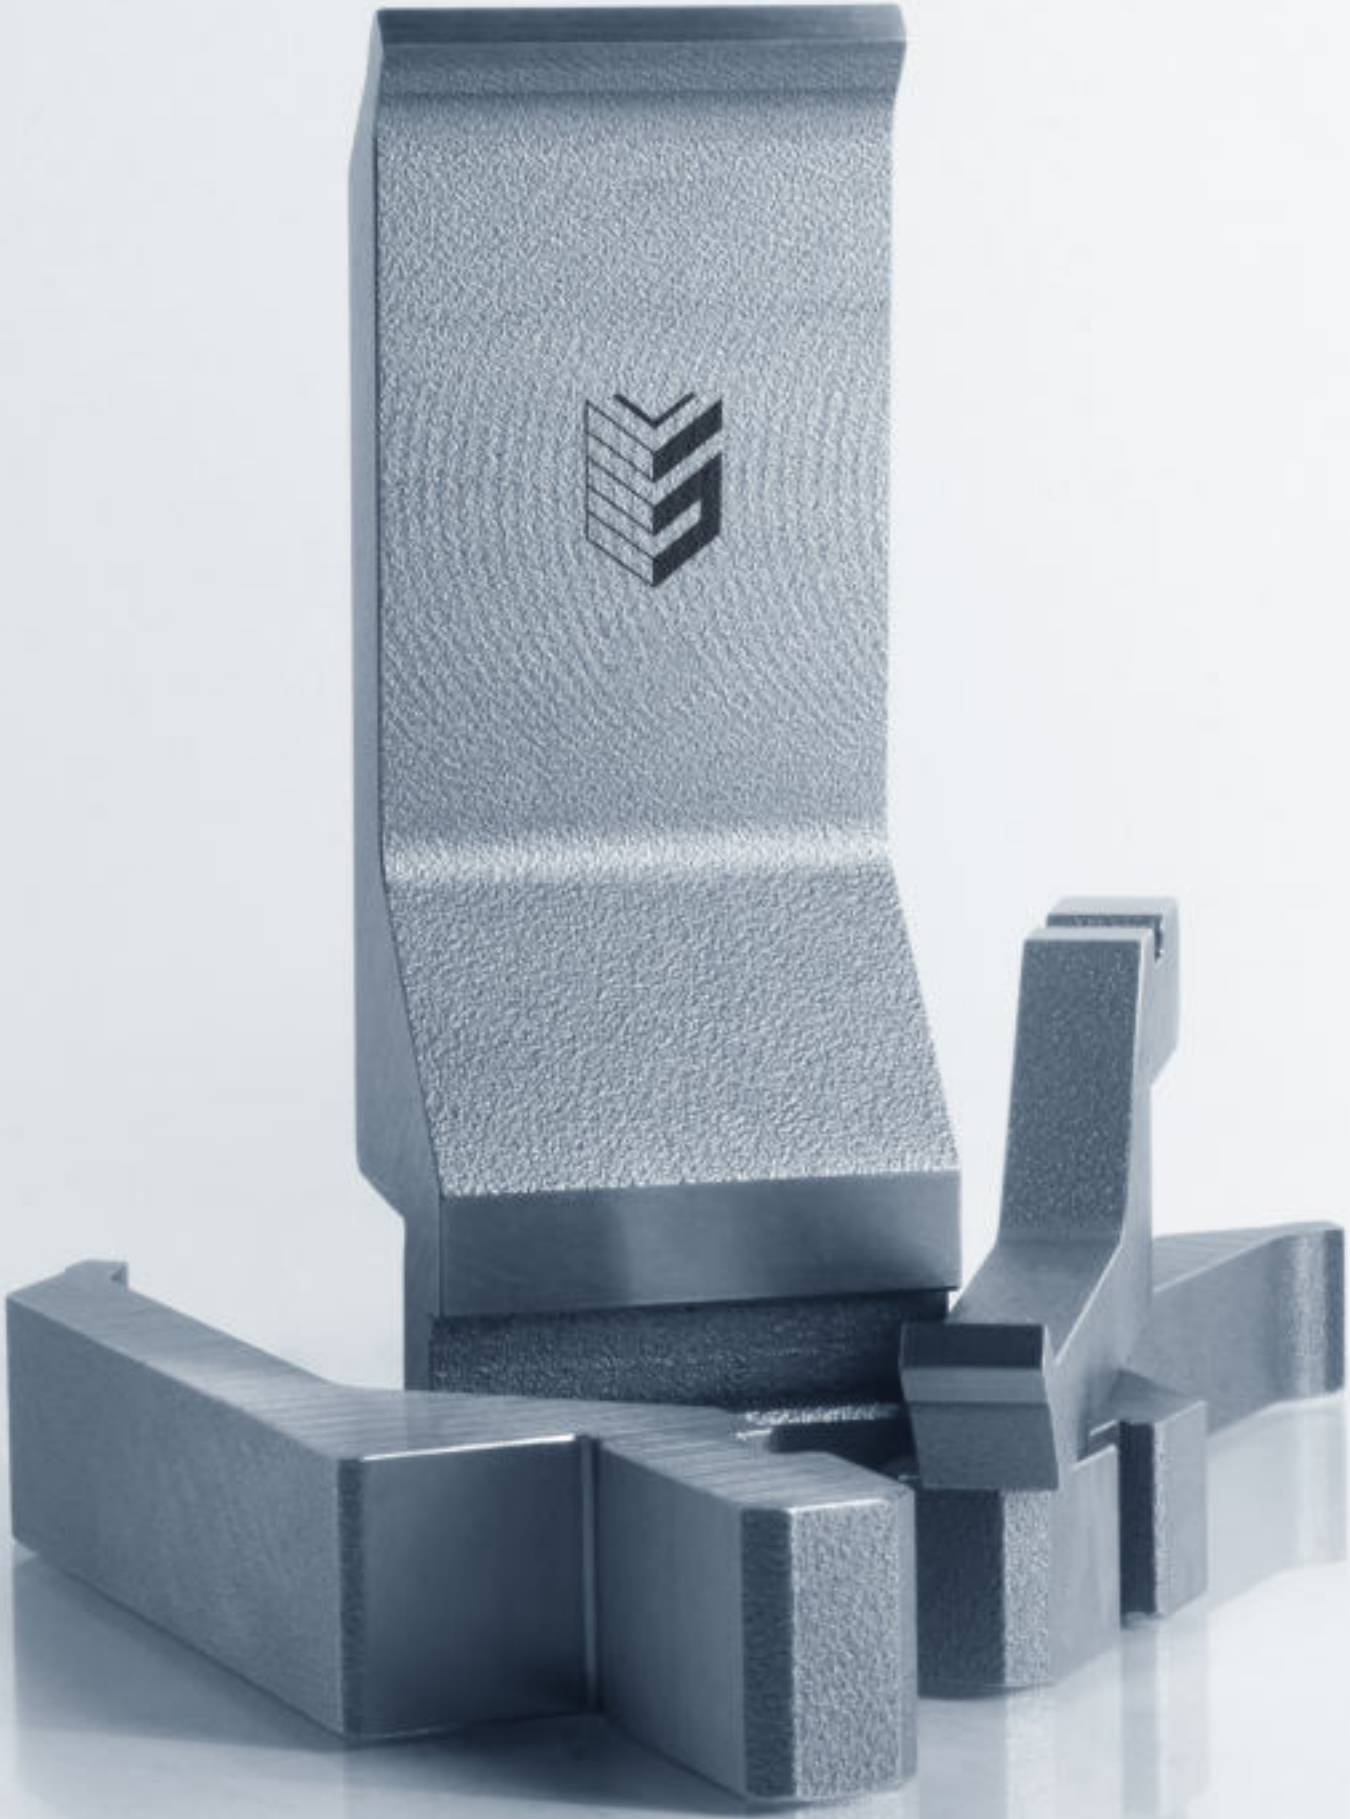

PRODUCT INDEX

CODE	PAGE	CODE	PAGE	CODE	PAGE	CODE	PAGE
1011	18	1084	23	1162	30	1249	143
1011S	17	1086	37	1163	30	1250	144
1012	18	1090	192	1171	27	1251	145
1014	20	1091	193	1172	27	1252	189
1015	21	1096	192	1173	22	1253	188
1017	22	1100	197	1175	20	1254	188
1018	22	1101	197	1177	26	1260	26
1020	20	1102	197	1178	38	1262	20
1022	24	1103	197	1180	196	1264	19
1023	24	1104	197	1181	196	1266	21
1024	33	1105	198	1182	196	1268	22
1025	33	1106	198	1183	196	1270	23
1026	29	1107	198	1184	196	1271	31
1027	29	1108	198	1185	196	1272	31
1029	19	1109	198	1186	196	1273	193
1030	24	1110	199	1187	196	1274	206
1031	23	1111	199	1190	30	1275	206
1032	31	1112	199	1191	30	1276	206
1033	38	1113	199	1192	38	1277	206
1034	34	1114	200	1193	35	1278	209
1035	34	1115	200	1194	35	1279	209
1036	192	1116	201	1195	75	1280	209
1037	197	1117	201	1196	75	1281	26
1038	198	1118	201	1197	76	1282	34
1039	199	1130	205	1198	203	1283	31
1040	199	1131	205	1216	177	1284	32
1041	200	1132	205	1218	177	1289	35
1042	200	1133	205	1220	179	1290	24
1043	202	1134	206	1221	180	1291	25
1047	34	1135	206	1225	179	1292	37
1047S	17	1136	206	1226	179	1293	32
1049	19	1137	206	1227	174	1294	98
1052	36	1138	207	1229	174	1295	104
1053	33	1139	207	1230	175	1296	195
1054	33	1140	207	1231	175	1297	195
1055	36	1141	207	1232	175	1298	176
1056	35	1142	208	1233	99	1299	178
1057	36	1143	208	1234	101	1300	178
1061	21	1144	208	1235	100	1301	25
1062	21	1145	208	1236	103	1302	104
1063	18	1146	208	1237	105	1303	102
1065	18	1147	208	1238	105	1305	194
1065S	17	1148	208	1239	193	1306	194
1081	19	1150	203	1240	194	1308	106
1082	23	1155	195	1242	203	1309	28

CODE	PAGE	CODE	PAGE	CODE	PAGE	CODE	PAGE
1310	28	1346	84	2054	46	3016	56
1311	38	1347	85	2055	46	3017	56
1312	28	1348	85	2056	47	3018	56
1313	106	1349	85	2057	47	3019	58
1314	100	2013	44	2058	43	3020	58
1315	98	2014	44	2059	43	3021	58
1316	107	2015	45	2060	43	3022	58
1317	101	2016	45	2067	48	3023	58
1318	103	2017	45	2081	53	3024	58
1319	102	2018	42	2082	52	3025	58
1320	99	2019	42	2083	52	3026	59
1321	177	2020	49	2084	54	3027	59
1322	28	2021	49	2086	54	3028	59
1323	150	2022	49	2087	54	3029	59
1324	150	2023	49	2088	53	3030	59
1325	156	2024	49	2089	52	3031	59
1326	155	2025	50	2101	212	3032	59
1327	155	2026	50	2102	212	3037/6	73
1328	150	2027	50	2103	212	3037/8	73
1329	152	2030	48	2104	212	3038	72
1330	152	2031	47	2105	212	3038PN	74
1331	153	2032	44	2106	212	3039	73
1332	151	2033	45	2107	212	3039PN	74
1333	151	2034	48	2108	212	3040	72
1334	154	2035	42	2109	210	3040PN	74
1335	154	2036	211	2110	210	3041	72
1336	154	2037	211	2111	210	3041PN	74
1337	156	2038	211	2112	210	3042	60
1338	29	2039	42	2113	210	3043	60
1339	29	2040	211	2114	210	3044	60
1340	83	2041	44	2115	210	3045	60
1341	83	2046	44	2116	210	3046	60
1342	83	2047	45	2117	53	3047	60
1343	83	2050	46	2118	53	3048	60
1344	84	2052	46	2119	211	3055	61
1345	84	2053	46	3015	56	3056	61

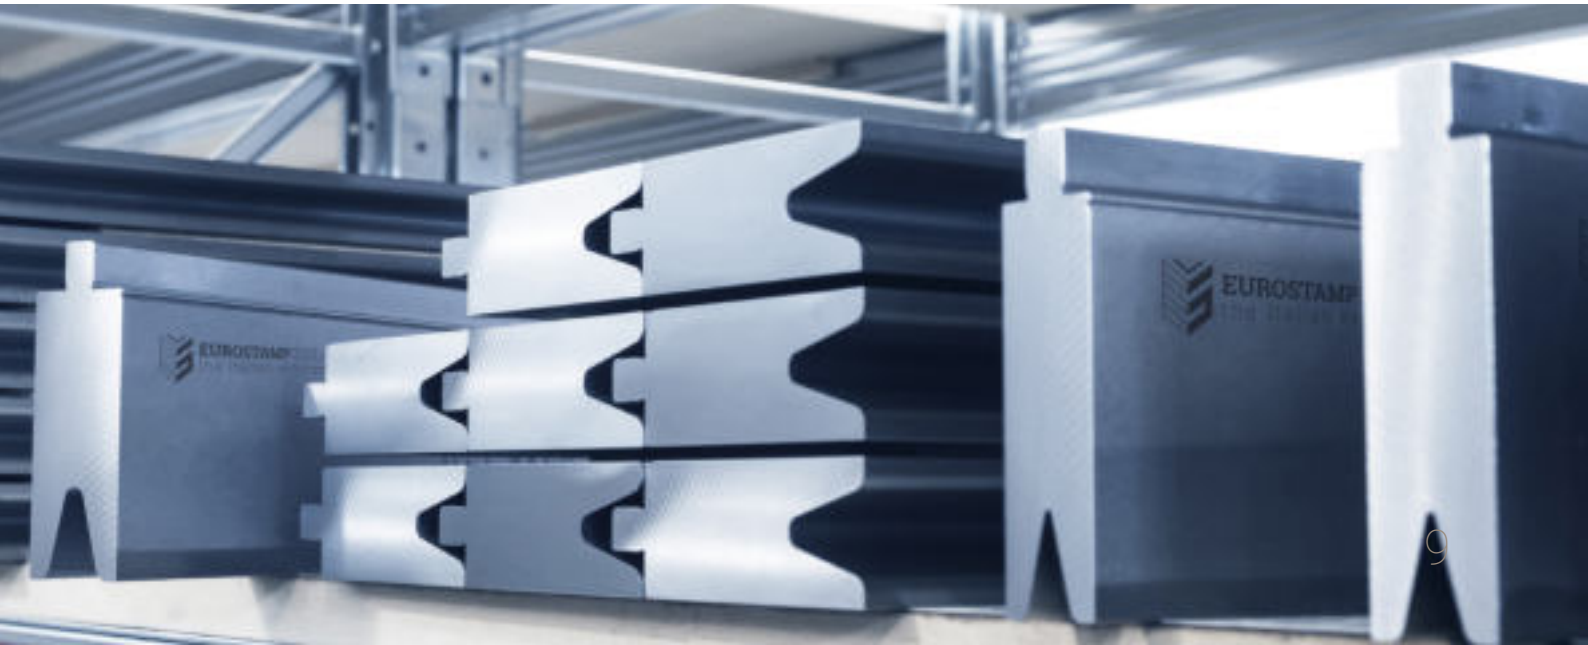

CODE	PAGE	CODE	PAGE	CODE	PAGE	CODE	PAGE
3057	61	3093	62	3135	133	3171	70
3058	61	3094	62	3136	134	3172	70
3059	63	3095	62	3137	134	3173	66
3060	63	3096	62	3138	134	3174	144
3061	63	3097	62	3139	134	3175	145
3062	63	3098	62	3140	135	3176	75
3063	63	3099	62	3141	135	3177	75
3064	63	3106	182	3142	135	3178	76
3065	63	3107	183	3143	136	3179	185
3066	64	3108	183	3144	136	3190	251
3067	64	3109	183	3145	137	3191	251
3068	64	3110	183	3146	137	3192	252
3069	64	3111	184	3147	137	3193	69
3070	64	3112	184	3148	137	3194	69
3071	64	3113	185	3149	138	3195	69
3072	64	3114	185	3150	138	3196	69
3073	65	3115	186	3151	138	3197	69
3074	65	3116	186	3152	139	3198	69
3075	65	3117	186	3153	139	3199	69
3076	65	3118	187	3154	139	3200	116
3077	65	3119	187	3155	139	3201	116
3078	65	3120	187	3156	140	3202	116
3079	65	3121	187	3157	143	3203	116
3080	56	3122	187	3158	68	3204	117
3081	56	3123	130	3159	68	3205	117
3082	56	3124	130	3160	68	3206	125
3083	61	3125	130	3161	68	3207	125
3084	61	3126	130	3162	68	3208	125
3085	61	3127	131	3163	68	3209	125
3086	57	3128	131	3164	68	3210	126
3087	57	3129	131	3165	68	3211	126
3088	57	3130	131	3166	70	3212	126
3089	57	3131	132	3167	70	3213	126
3090	57	3132	132	3168	70	3214	127
3091	57	3133	132	3169	70	3215	117
3092	57	3134	133	3170	70	3216	117



CODE	PAGE	CODE	PAGE	CODE	PAGE	CODE	PAGE
3217	118	3262	168	4008	240	4222	235
3218	118	3263	169	4009	238	4223	235
3219	122	3264	169	4010	256	4224	235
3220	122	3265	169	4011	256	4225	235
3221	123	3270	160	4012	256	4226	236
3222	123	3271	160	4013	256	4227	236
3223	124	3272	160	4014	256	4228	236
3224	124	3273	161	4015	256	4229	245
3225	118	3274	161	4016	237	4272	245
3226	118	3275	161	4020	237	4273	245
3227	119	3276	164	4021	238	4274	202
3228	119	3280	165	4031	241	4275	195
3229	119	3281	165	4032	241	4277	42
3230	120	3282	165	4033	247	4281	239
3231	120	3283	166	4034	247	4282	236
3232	120	3284	166	4040	247	4301	246
3233	121	3285	167	4041	247	4302	246
3234	121	3286	167	4050	247	4303	246
3235	127	3320	87	4073	235	4304	246
3236	128	3321	87	4090	240	4305	246
3237	128	3322	87	4143	243	4306	256
3238	128	3323	87	4144	243	4307	256
3239	128	3324	88	4145	243	4308	254
3240	129	3325	88	4146	243	4309	254
3241	182	3326	88	4191	243	4313	74
3242	182	3327	89	4192	243	4314	254
3243	252	3328	89	4193	244	4318	257
3244	119	3329	89	4199	239	4319	257
3250	162	3330	89	4214	244	4330	141
3251	162	3334	215	4215	244	4349	239
3252	162	3335	215	4216	244	4361	245
3253	163	3336	215	4217	244	4362	245
3254	163	4000	242	4218	244	4379	254
3255	163	4001	242	4219	239	4380	254
3260	168	4002	242	4220	239	4383	257
3261	168	4007	240	4221	235	4384	258



CODE	PAGE	CODE	PAGE	CODE	PAGE	CODE	PAGE
4381	234	4410	232	8021	250	8216	108
4389	219	4411	236	8022	250	8218	108
4390	221	4414	224	8100	249	8219	108
4392	228	4419	223	8101	249	9010	248
4393	225	5011	238	8102	249	9011	248
4394	233	5012	237	8106	250	9012	248
4395	234	5013	237	8107	249	9013	248
4396	234	7290	51	8201	269	9014	253
4397	234	8010	249	8202	269	9015	253
4398	231	8011	249	8205	269	9016	253
4399	230	8012	249	8210	108	9017	253
4400	222	8013	249	8211	108	9018	253
4404	226	8014	250	8212	108	9019	253
4405	229	8016	250	8213	108	9020	248
4408	226	8017	250	8214	108	ACARM1NE0005	260
4409	220	8020	250	8215	108	CARRELLO0005	260





EUROSTAMP TOOLING
the Italian excellence

AMADA PROMECAM STYLE

EUROPEAN STYLE

The upper and lower tools in this section fit these press brakes:

ACL, Accurpress, AM Machinery, Amada, Atlantic, Adira, Baykal, BL, Boschert, Boutillon, Bystronic-Beyeler Euro-B, Coastone, Colgar, Dener, Deratech, Durmazlar, Ermaksan, Farina, Gade, Gasparini, Gizelis, Haco, Hindustan, Iturrospe, Jfy, JMT, LFK, Metfab, MVD, Oriance, Prima Power, Promecam, Rico, RPC, Salvagnini, Schiavi, SMD, Sorg, Somo, Vicla, Vimercati, Warcom, Yangli, Yawei and Ysd — and every other press brake with European-style (Amada-Promecam) clamping.


With the matching upper and lower adapters, they also fit press brakes with other clamping systems.






SEE PAGE 40 FOR DIE SEGMENTATION DIAGRAM


STANDARD LENGTHS

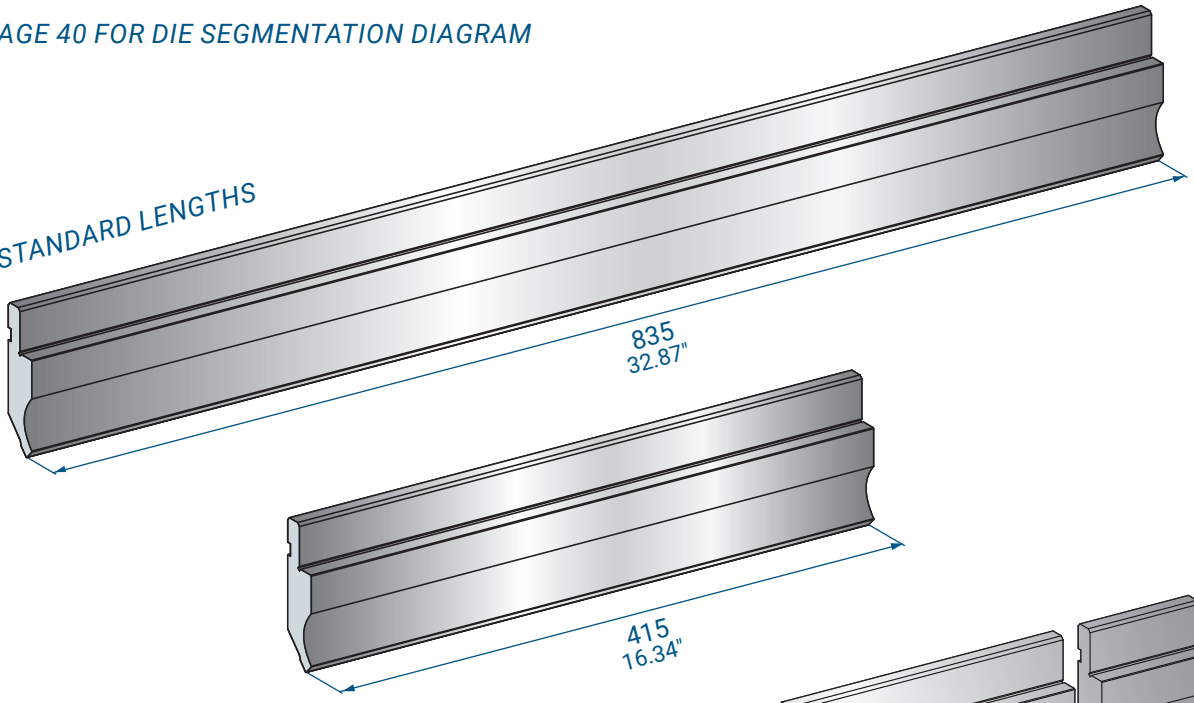


STANDARD SEGMENTATION

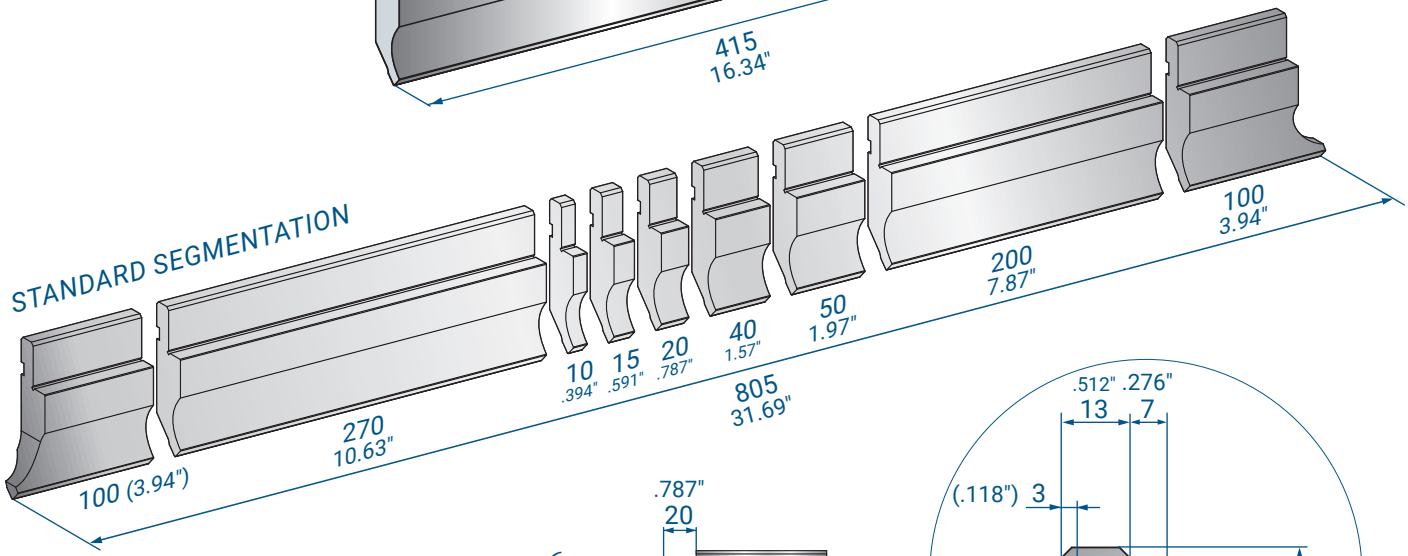


STANDARD HORN




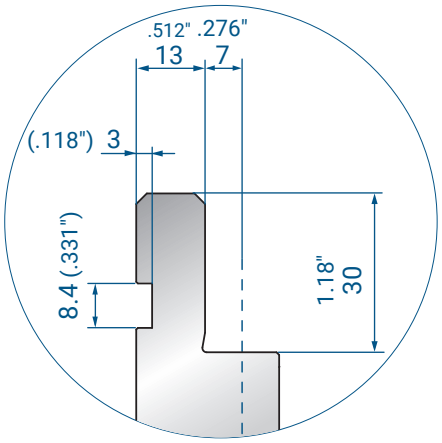


MODIFICATIONS ON REQUEST

SPECIAL HORNS

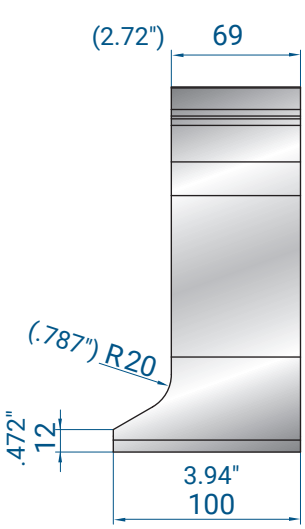

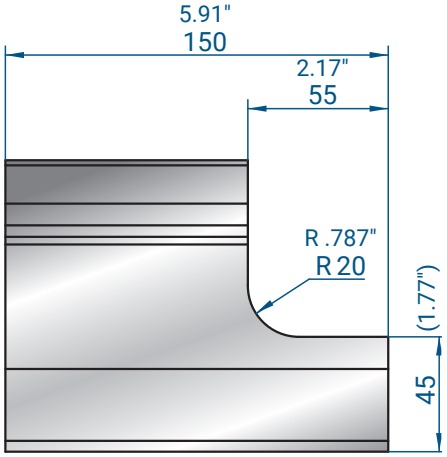

MOVING HORNS

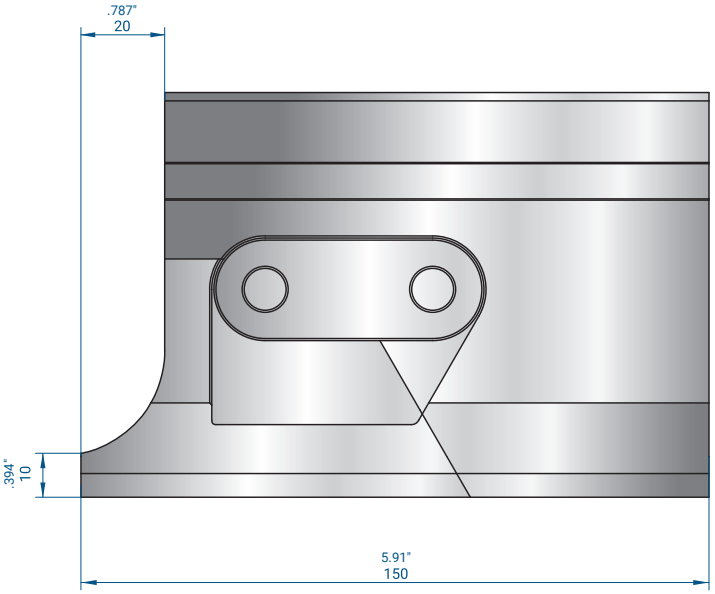

PUNCH | MOVING HORNS

1011 1011S


2 × 150 mm	3.5 kg
2 × 5.91"	7.7 lb


1065 1065S

2 × 150 mm	3.5 kg
2 × 5.91"	7.7 lb

1047 1047S

2 × 150 mm	4.0 kg
2 × 5.91"	8.8 lb

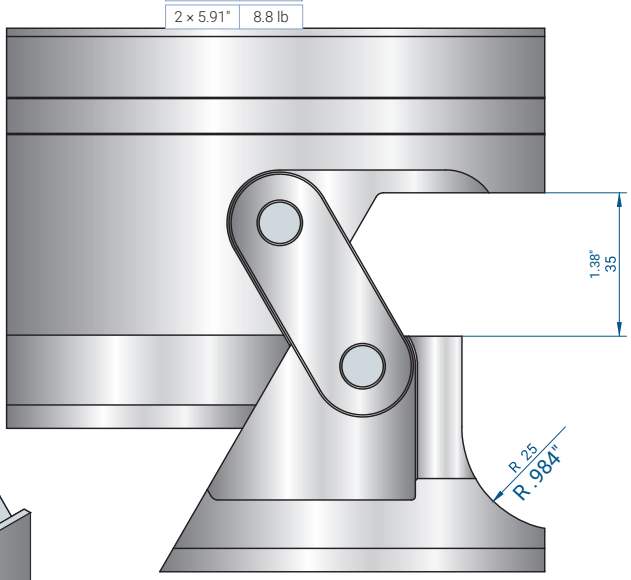

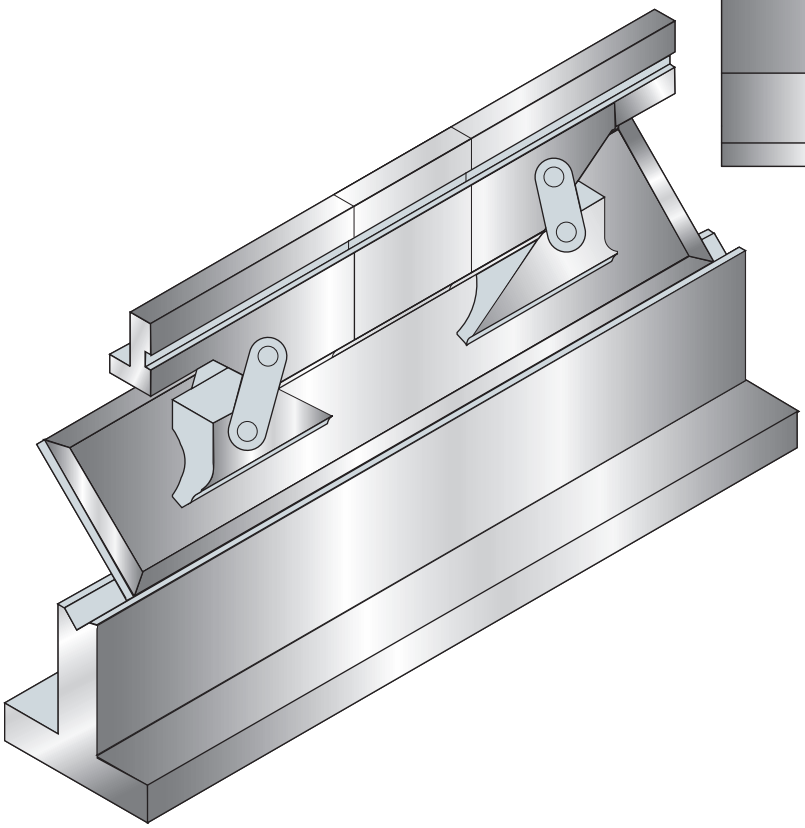








SPECIAL SEGMENTATION



RADIUS MODIFICATION

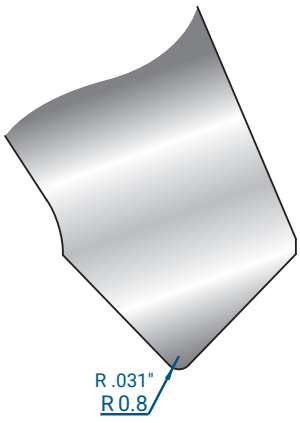

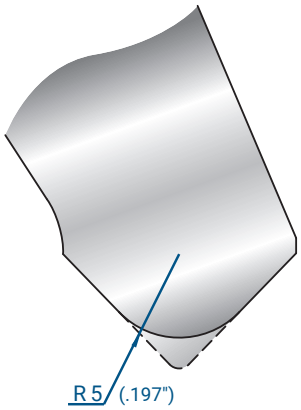


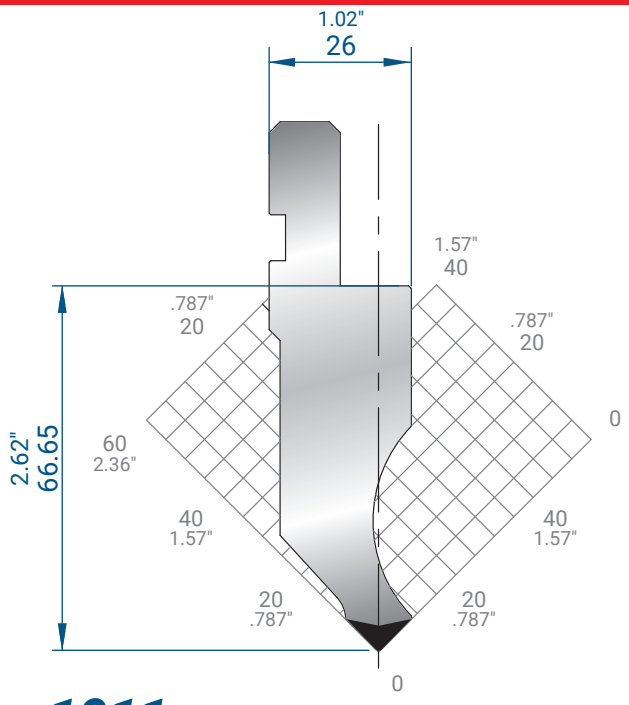

1011

835 mm	10.5 kg	32.87"	23.1 lb
415 mm	5.2 kg	16.34"	11.5 lb
805 mm SECTIONED	9.7 kg	31.69" SECTIONED	21.4 lb


Mat = C45
H = 66.65 (2.624")
Max T/m = 100
Max US t/ft = 33.6
α = 88°
R = 0.8 (.031")

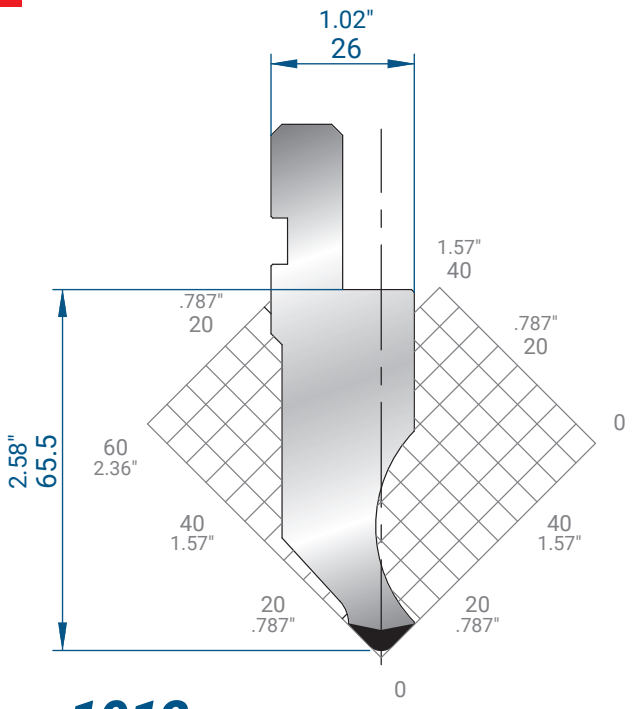

1012

835 mm	10.4 kg	32.87"	22.9 lb
415 mm	5.2 kg	16.34"	11.5 lb
805 mm SECTIONED	9.6 kg	31.69" SECTIONED	21.2 lb


Mat = C45
H = 65.50 (2.579")
Max T/m = 100
Max US t/ft = 33.6
α = 88°
R = 3 (.118")

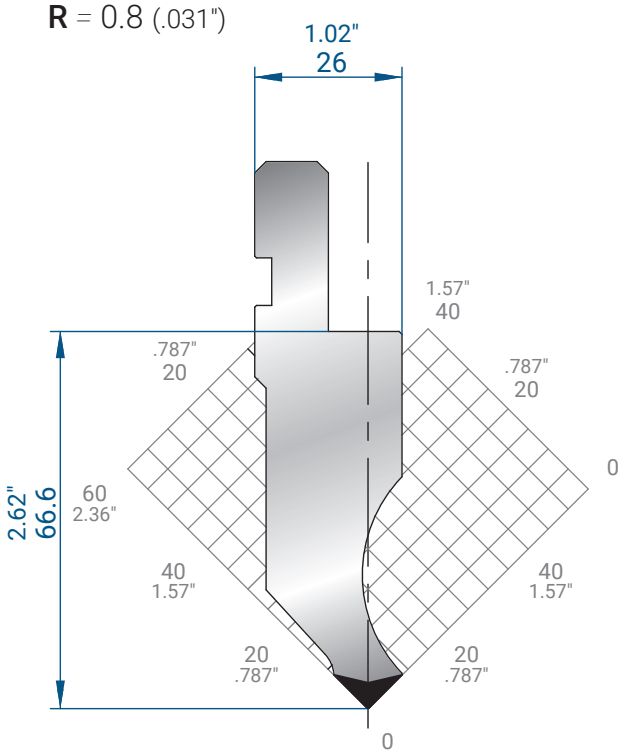

1065

835 mm	10.5 kg	32.87"	23.1 lb
415 mm	5.2 kg	16.34"	11.5 lb
805 mm SECTIONED	9.7 kg	31.69" SECTIONED	21.4 lb

Mat = C45
H = 66.60 (2.622")
Max T/m = 100
Max US t/ft = 33.6
α = 88°
R = 0.25 (.010")

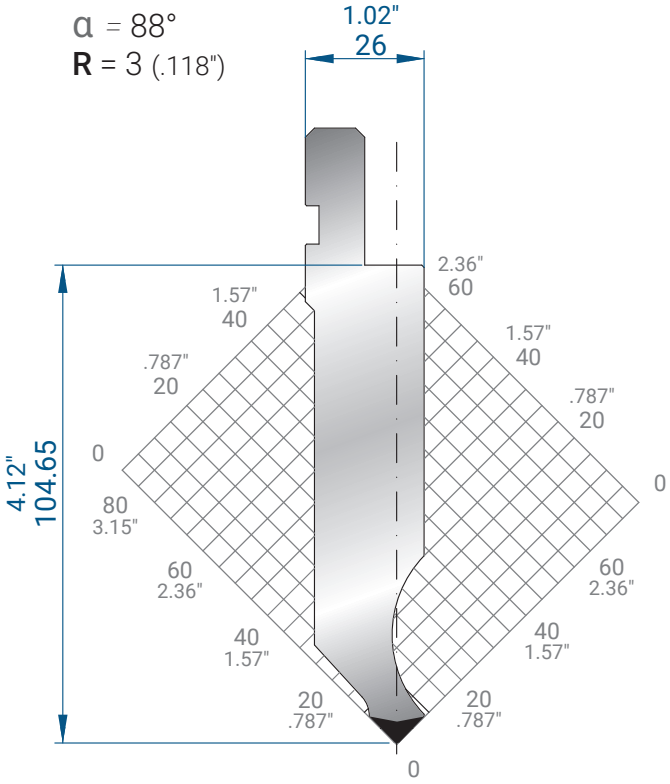


1063

835 mm	16.4 kg
415 mm	8.2 kg
805 mm SECTIONED	15.1 kg

32.87"	36.2 lb
16.34"	18.1 lb
31.69" SECTIONED	33.3 lb


Mat = C45
H = 104.65 (4.120")
Max T/m = 100
Max US t/ft = 33.6
α = 88°
R = 0.8 (.031")

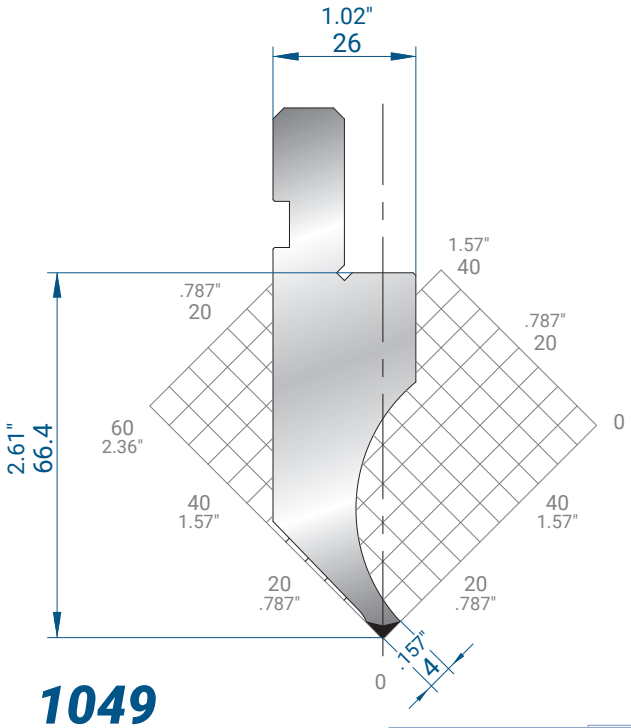

1049

835 mm	9.9 kg	32.87"	21.8 lb
415 mm	4.9 kg	16.34"	10.8 lb
805 mm SECTIONED	9.1 kg	31.69" SECTIONED	20.1 lb


Mat = C45
tempered
H = 66.40 (2.614")
Max T/m = 35
Max US t/ft = 11.8
α = 88°
R = 0.6 (.024")

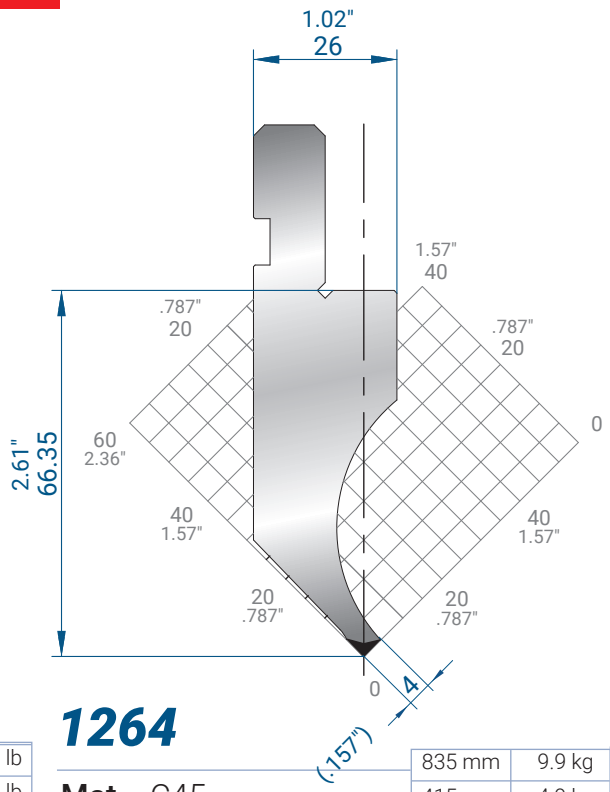

1264

835 mm	9.9 kg	32.87"	21.8 lb
415 mm	4.9 kg	16.34"	10.8 lb
805 mm SECTIONED	9.1 kg	31.69" SECTIONED	20.1 lb


Mat = C45
tempered
H = 66.35 (2.612")
Max T/m = 35
Max US t/ft = 11.8
α = 88°
R = 0.25 (.010")

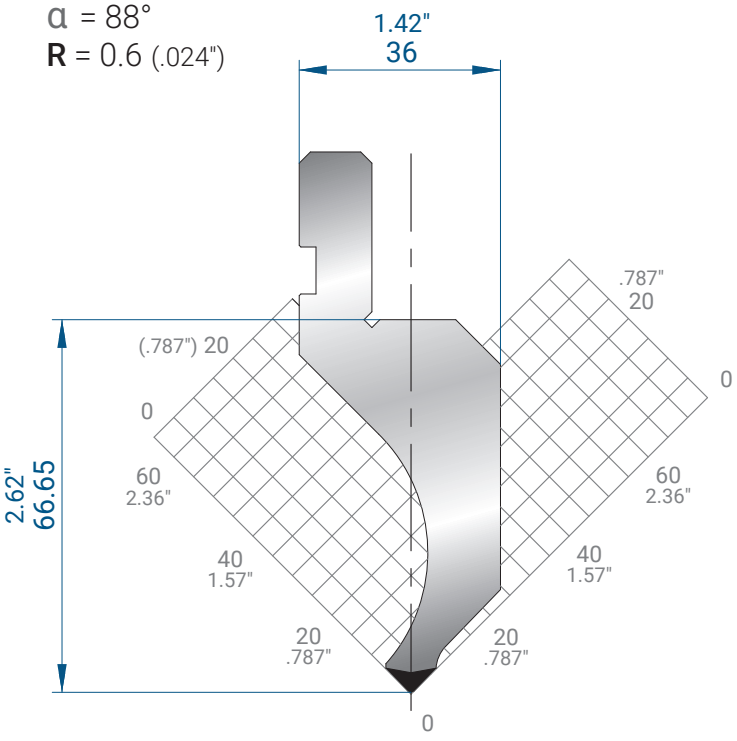

1081

835 mm	10.1 kg	32.87"	22.3 lb
415 mm	5.0 kg	16.34"	11.0 lb
805 mm SECTIONED	9.3 kg	31.69" SECTIONED	20.5 lb


Mat = C45
H = 66.65 (2.624")
Max T/m = 60
Max US t/ft = 20.2
α = 88°
R = 0.8 (.031")

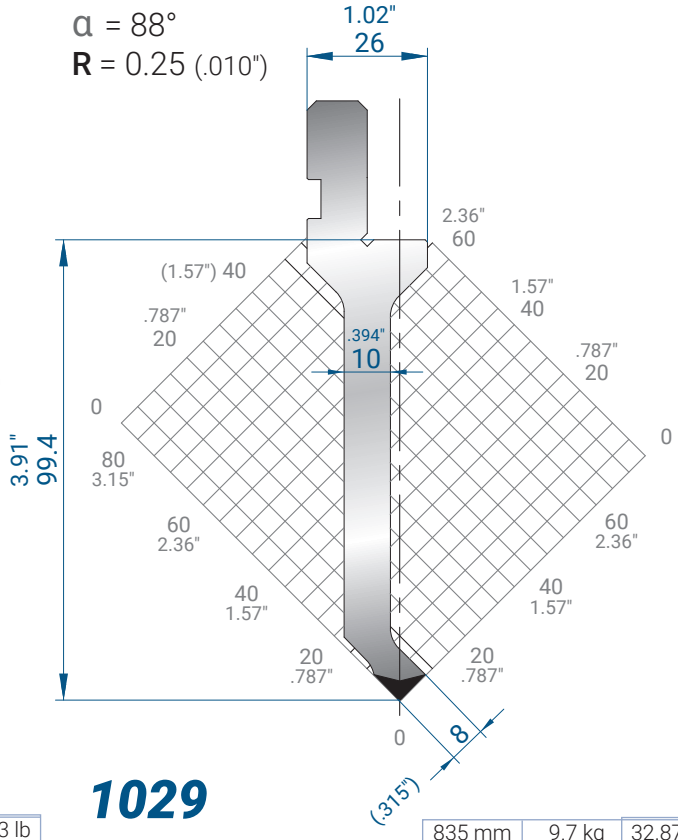

1029

835 mm	9.7 kg	32.87"	21.4 lb
415 mm	4.8 kg	16.34"	10.6 lb
805 mm SECTIONED	8.9 kg	31.69" SECTIONED	19.6 lb


Mat = C45
H = 99.40 (3.913")
Max T/m = 50
Max US t/ft = 16.8
α = 88°
R = 0.6 (.024")

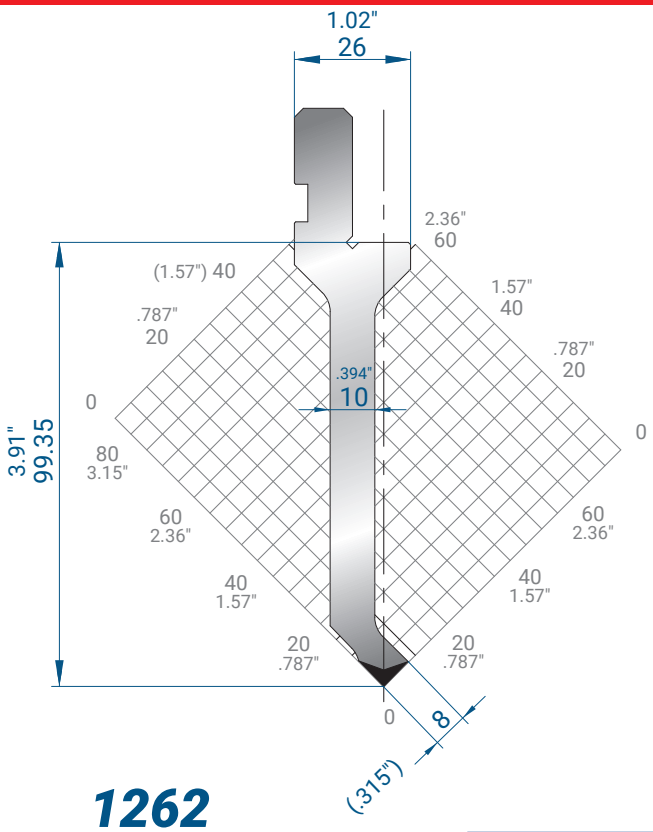

1262

835 mm 32.87"	9.7 kg 21.4 lb
415 mm 16.34"	4.8 kg 10.6 lb
805 mm 31.69" SECTIONED	8.9 kg 19.6 lb


Mat = C45
H = 99.35 (3.911")
Max T/m = 50
Max US t/ft = 16.8
α = 88°
R = 0.25 (.010")

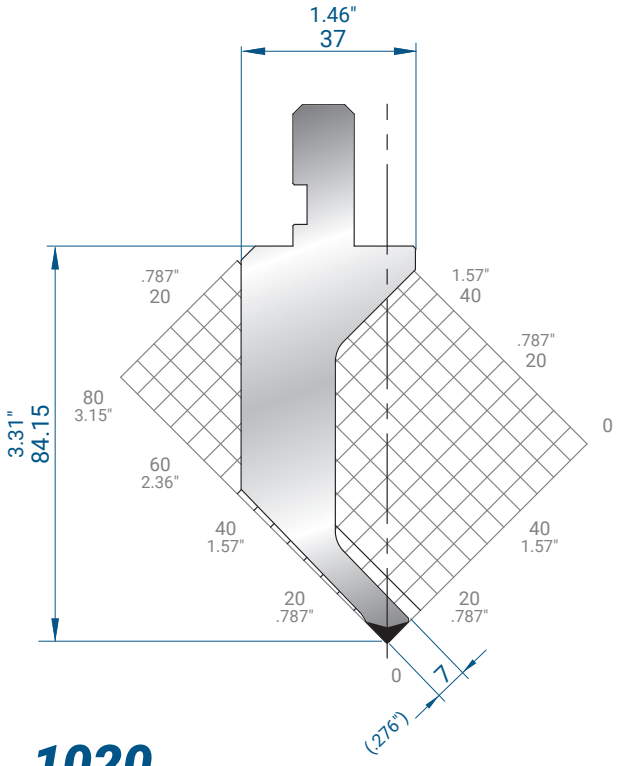

1020

835 mm 32.87"	12.8 kg 28.2 lb
415 mm 16.34"	6.4 kg 14.1 lb
805 mm 31.69" SECTIONED	11.8 kg 26.0 lb


Mat = 42CrMo4
tempered
H = 84.15 (3.313")
Max T/m = 20
Max US t/ft = 6.7
α = 88°
R = 0.6 (.024")

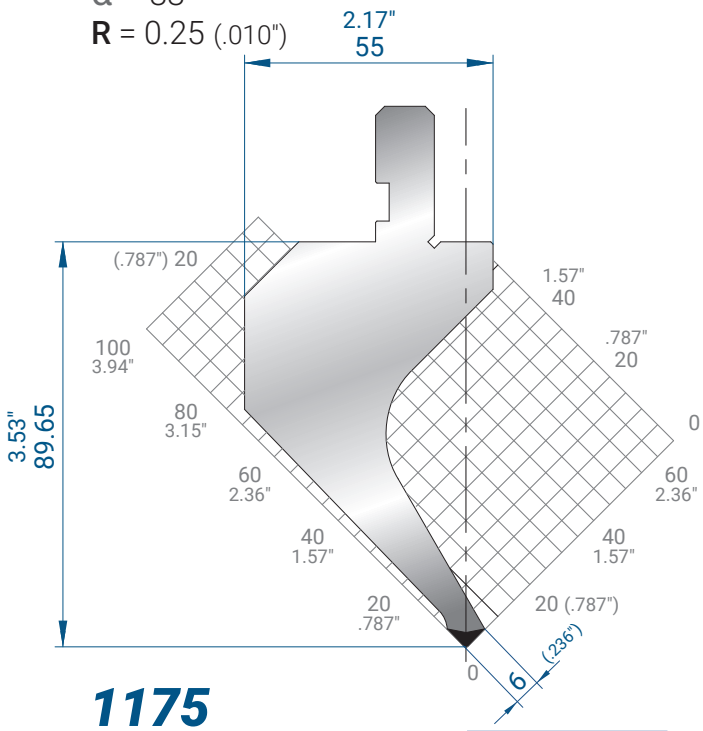

1175

835 mm 32.87"	18.4 kg 40.6 lb
415 mm 16.34"	9.1 kg 20.1 lb
805 mm 31.69" SECTIONED	16.9 kg 37.3 lb


Mat = C45
tempered
H = 89.65 (3.530")
Max T/m = 50
Max US t/ft = 16.8
α = 88°
R = 0.8 (.031")

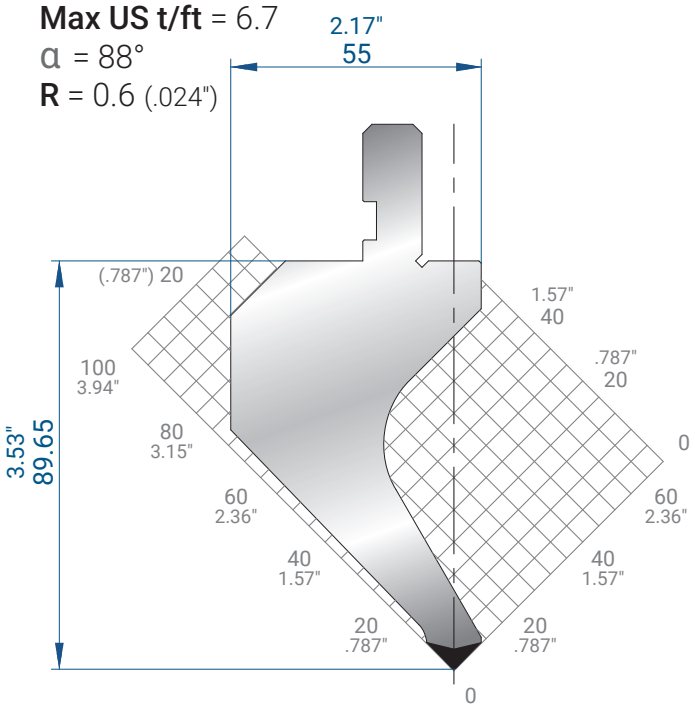

1014

835 mm 32.87"	19.5 kg 43.0 lb
415 mm 16.34"	9.7 kg 21.4 lb
805 mm 31.69" SECTIONED	17.9 kg 39.5 lb


Mat = C45
H = 89.65 (3.530")
Max T/m = 60
Max US t/ft = 20.2
α = 88°
R = 0.8 (.031")

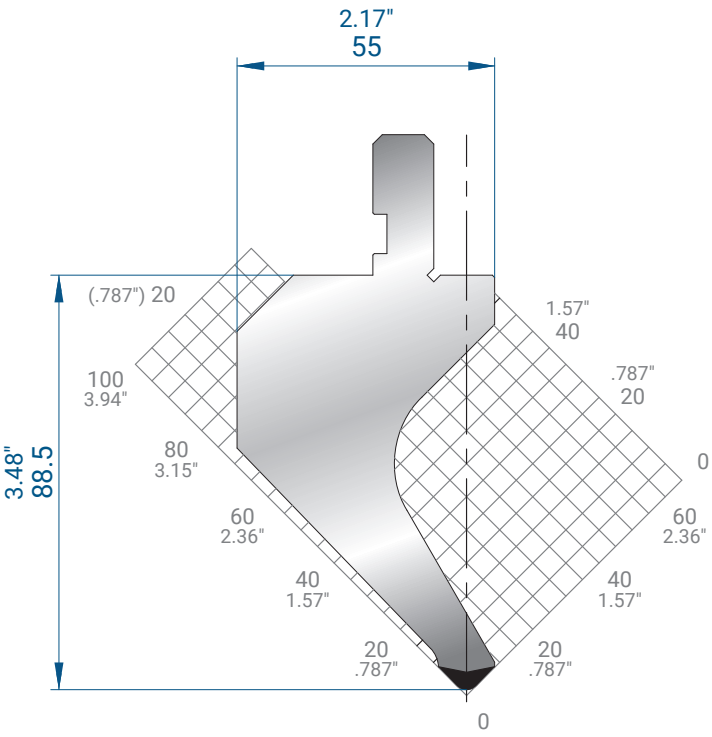

1015

Mat = C45
H = 88.50 (3.484")
Max T/m = 60
Max US t/ft = 20.2
α = 88°
R = 3 (.118")


835 mm 32.87"	19.4 kg 42.8 lb
415 mm 16.34"	9.6 kg 21.2 lb
805 mm 31.69" SECTIONED	17.8 kg 39.2 lb

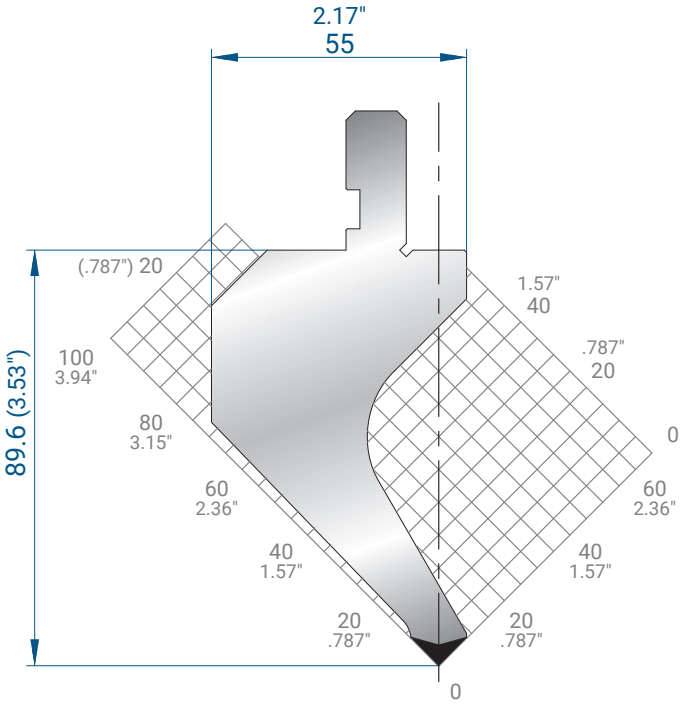

1266

Mat = C45
H = 89.60 (3.528")
Max T/m = 60
Max US t/ft = 20.2
α = 88°
R = 0.25 (.010")


835 mm 32.87"	19.4 kg 42.8 lb
415 mm 16.34"	9.7 kg 21.4 lb
805 mm 31.69" SECTIONED	17.9 kg 39.5 lb

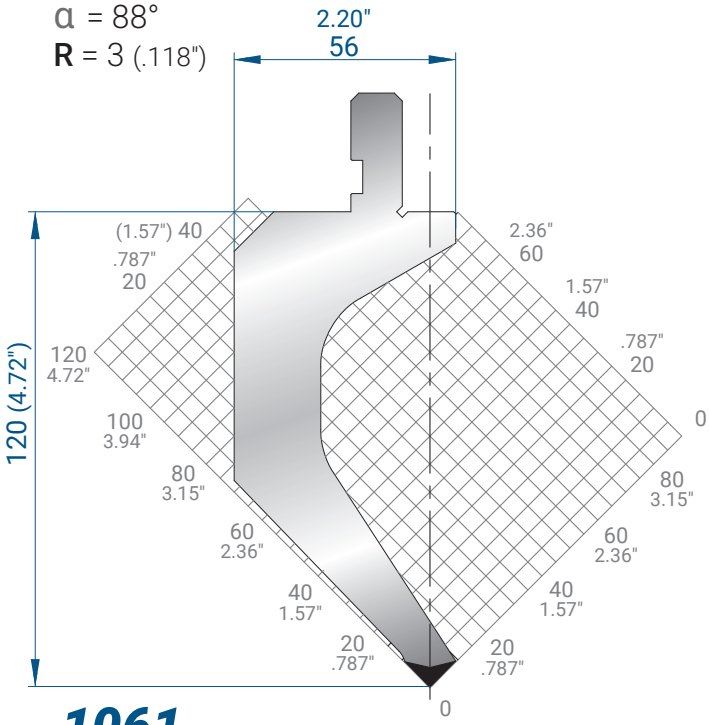

1061

Mat = C45
tempered
H = 120 (4.724")
Max T/m = 50
Max US t/ft = 16.8
α = 88°
R = 0.8 (.031")


835 mm 32.87"	22.0 kg 48.5 lb
415 mm 16.34"	10.9 kg 24.0 lb
805 mm 31.69" SECTIONED	20.2 kg 44.5 lb

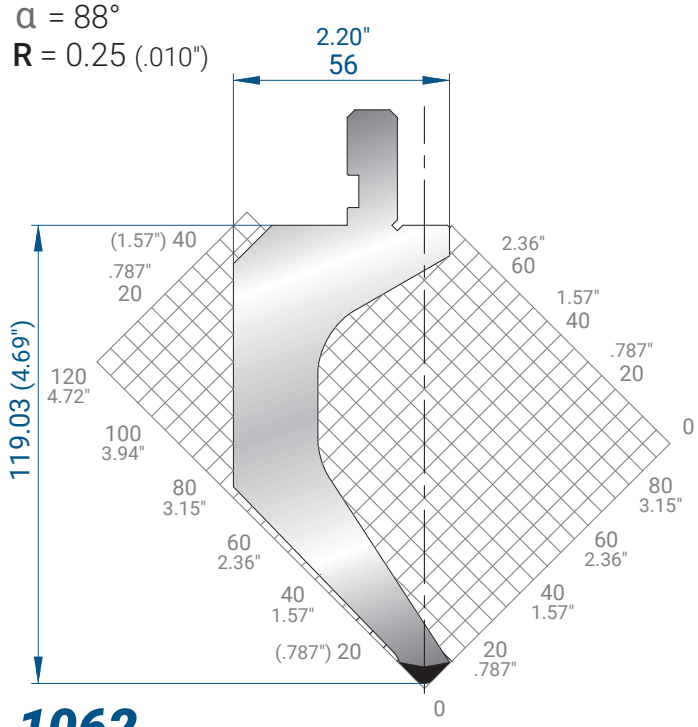

1062

Mat = C45
tempered
H = 119.03 (4.686")
Max T/m = 50
Max US t/ft = 16.8
α = 88°
R = 3 (.118")


835 mm 32.87"	22.0 kg 48.5 lb
415 mm 16.34"	10.9 kg 24.0 lb
805 mm 31.69" SECTIONED	20.2 kg 44.5 lb

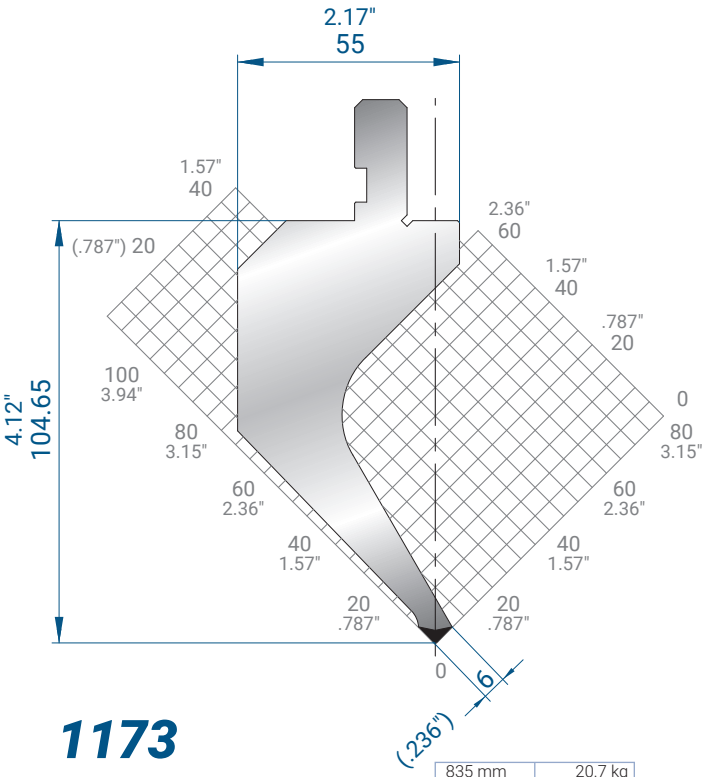

1173

835 mm 32.87"	20.7 kg 45.6 lb
415 mm 16.34"	10.3 kg 22.7 lb
805 mm 31.69" SECTIONED	19.0 kg 41.9 lb


Mat = C45
tempered
H = 104.65 (4.120")
Max T/m = 50
Max US t/ft = 16.8
α = 88°
R = 0.8 (.031")

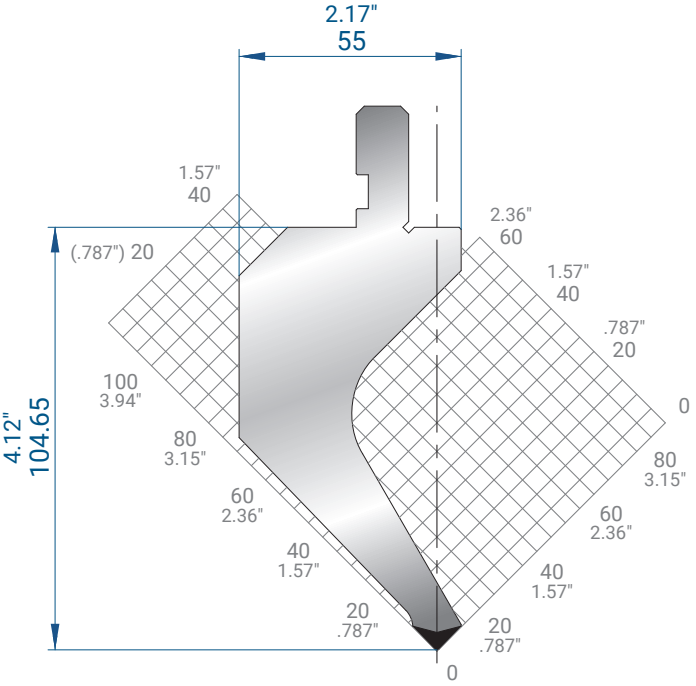

1017

835 mm 32.87"	21.9 kg 48.3 lb
415 mm 16.34"	10.9 kg 24.0 lb
805 mm 31.69" SECTIONED	21.1 kg 46.5 lb


Mat = C45
H = 104.65 (4.120")
Max T/m = 50
Max US t/ft = 16.8
α = 88°
R = 0.8 (.031")

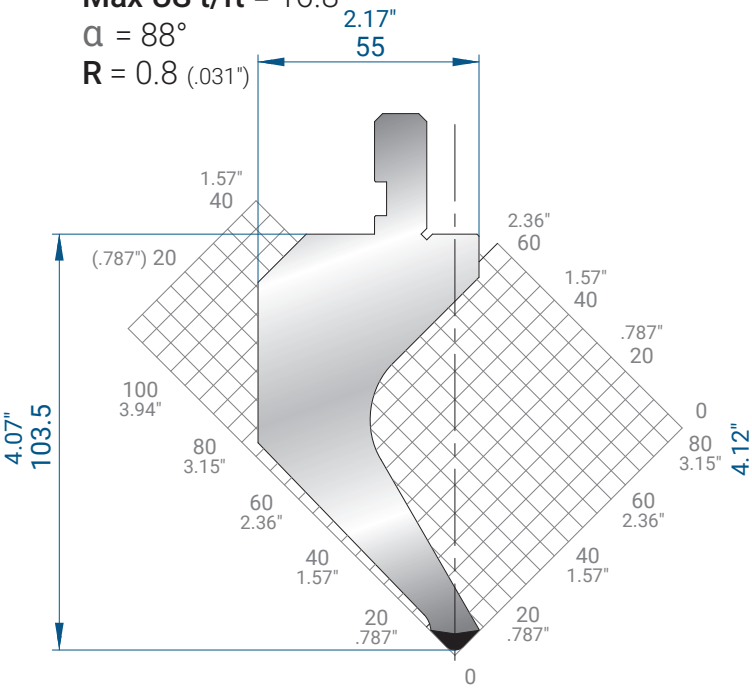

1018

835 mm 32.87"	21.8 kg 48.1 lb
415 mm 16.34"	10.8 kg 23.8 lb
805 mm 31.69" SECTIONED	20.0 kg 44.1 lb


Mat = C45
H = 103.50 (4.075")
Max T/m = 50
Max US t/ft = 16.8
α = 88°
R = 3 (.118")

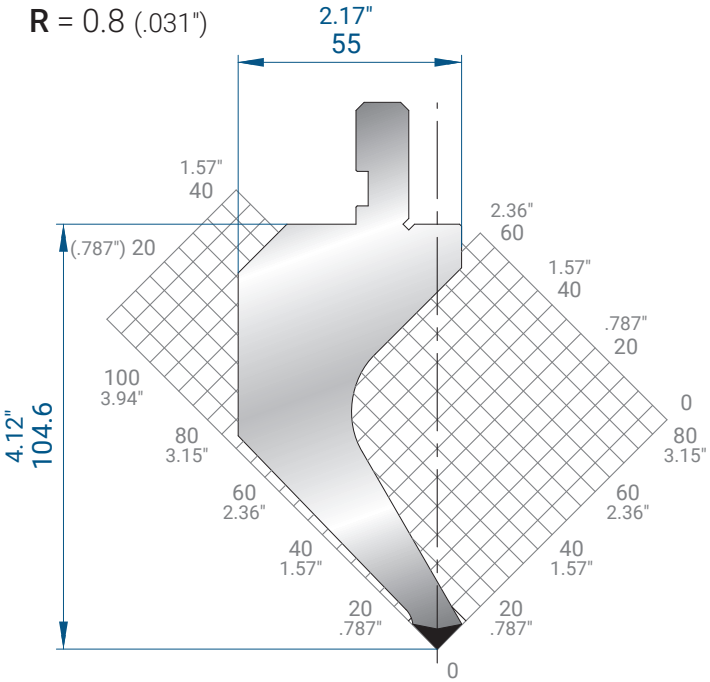

1268

835 mm 32.87"	21.8 kg 48.1 lb
415 mm 16.34"	10.8 kg 23.8 lb
805 mm 31.69" SECTIONED	20.0 kg 44.1 lb

Mat = C45
H = 104.60 (4.118")
Max T/m = 50
Max US t/ft = 16.8
α = 88°
R = 0.25 (.010")

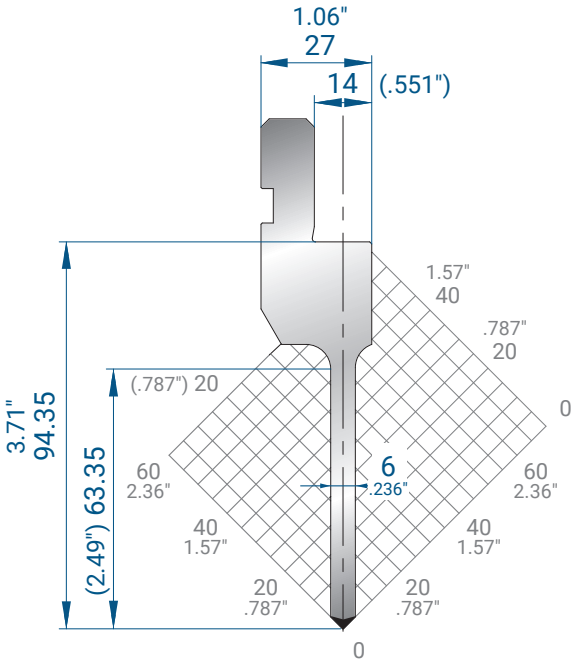


1270

835 mm	9.4 kg	
415 mm	4.7 kg	
805 mm SECTIONED	8.6 kg	

32.87"	20.7 lb
16.34"	10.4 lb
31.69" SECTIONED	19.0 lb


Mat = C45
tempered
H = 94.35 (3.715")
Max T/m = 50
Max US t/ft = 16.8
α = 88°
R = 0.25 (.010")

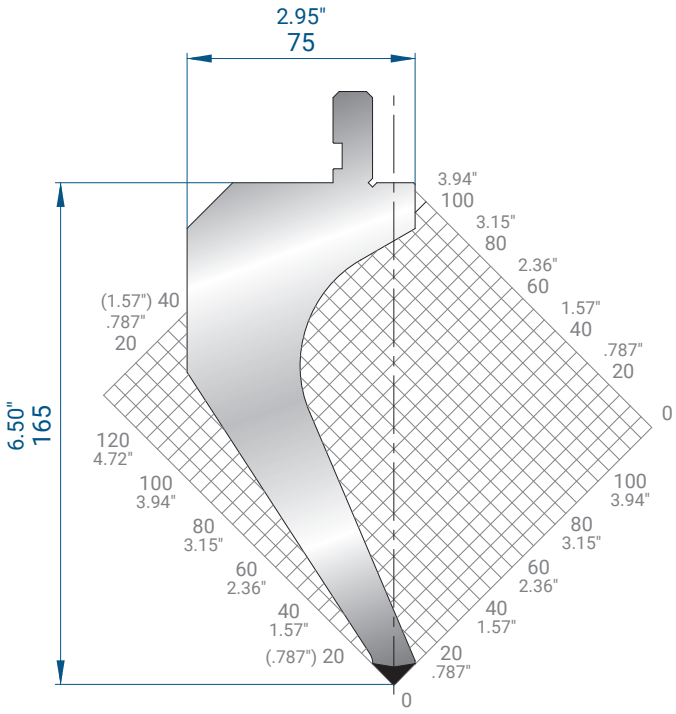

1031

835 mm	39.2 kg	32.87"	86.4 lb
415 mm	19.5 kg	16.34"	43.0 lb
805 mm SECTIONED	36.0 kg	31.69" SECTIONED	79.4 lb

Mat = C45
H = 165 (6.496")
Max T/m = 60
Max US t/ft = 20.2
α = 88°
R = 0.8 (.031")

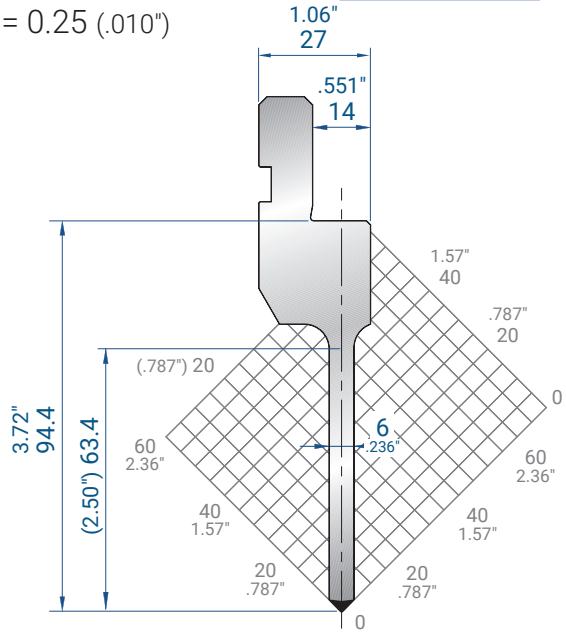


1084

835 mm	9.4 kg	
415 mm	4.7 kg	
805 mm SECTIONED	8.6 kg	

32.87"	20.7 lb
16.34"	10.4 lb
31.69" SECTIONED	19.0 lb


Mat = C45
tempered
H = 94.40 (3.717")
Max T/m = 50
Max US t/ft = 16.8
α = 88°
R = 0.6 (.024")

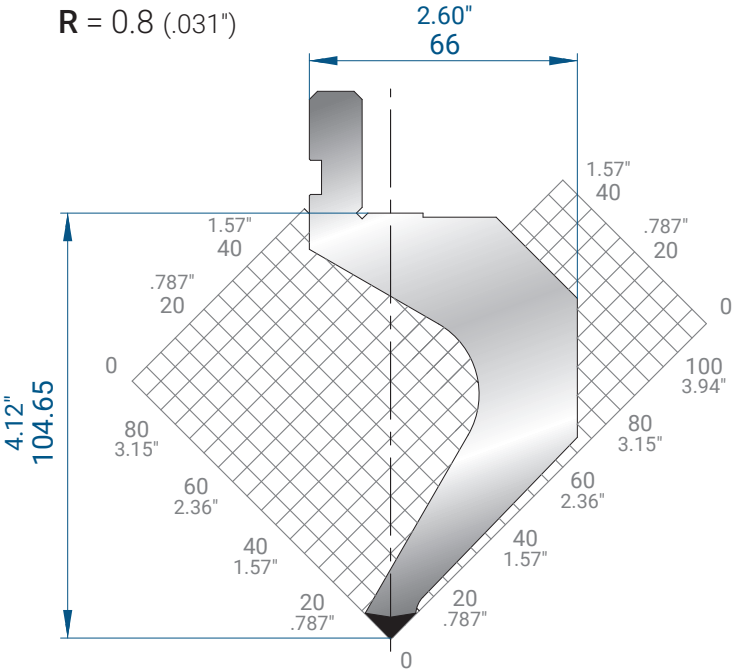

1082

835 mm	21.1 kg	32.87"	46.5 lb
415 mm	10.5 kg	16.34"	23.1 lb
805 mm SECTIONED	19.4 kg	31.69" SECTIONED	42.8 lb

Mat = C45
H = 104.65 (4.120")
Max T/m = 45
Max US t/ft = 15.1
α = 88°
R = 0.8 (.031")

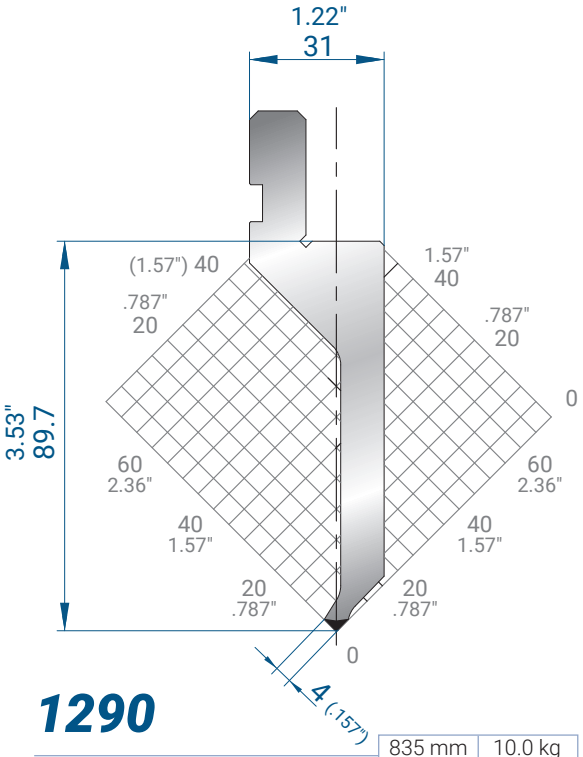


1290

Mat = C45
tempered
H = 89.70 (3.531")
Max T/m = 30
Max US t/ft = 10.1
α = 88°
R = 0.6 (.024")

835 mm	10.0 kg
415 mm	5.0 kg
805 mm SECTIONED	9.3 kg


32.87"	22.0 lb
16.34"	11.0 lb
31.69" SECTIONED	20.5 lb

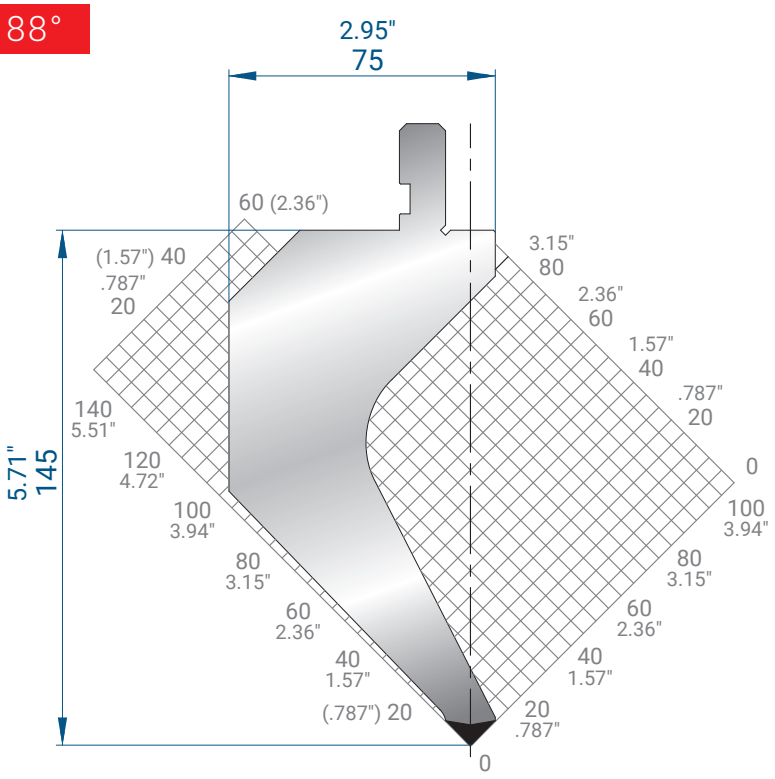

1030

Mat = C45
H = 145 (5.709")
Max T/m = 80
Max US t/ft = 26.9
α = 88°
R = 0.8 (.031")

835 mm	39.3 kg	32.87"	86.6 lb
415 mm	19.5 kg	16.34"	43.0 lb
805 mm SECTIONED	36.1 kg	31.69" SECTIONED	79.6 lb

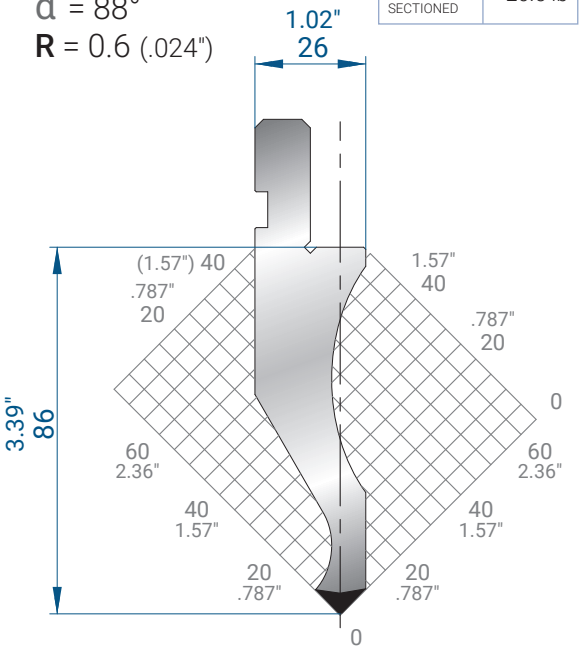


1022

Mat = C45
H = 86 (3.386")
Max T/m = 100
Max US t/ft = 33.6
α = 88°
R = 0.8 (.031")

835 mm	10.9 kg
415 mm	5.4 kg
805 mm SECTIONED	10.0 kg


32.87"	24.0 lb
16.34"	11.9 lb
31.69" SECTIONED	22.0 lb

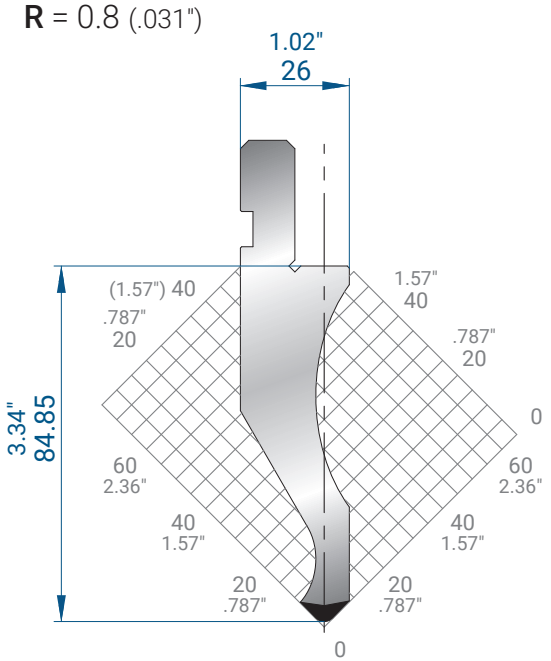

1023

Mat = C45
H = 84.85 (3.341")
Max T/m = 100
Max US t/ft = 33.6
α = 88°
R = 3 (.118")

835 mm	10.9 kg	32.87"	24.0 lb
415 mm	5.4 kg	16.34"	11.9 lb
805 mm SECTIONED	10.0 kg	31.69" SECTIONED	22.0 lb

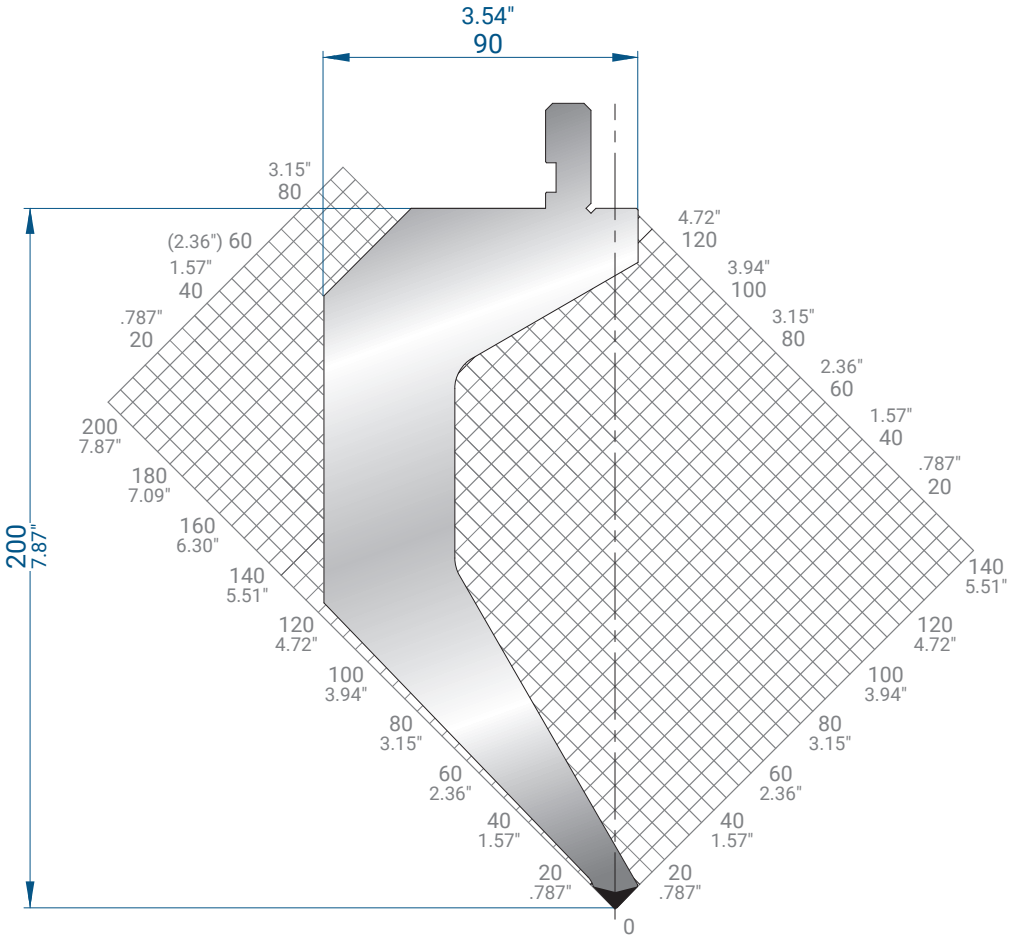


1291

Mat = C45
tempered
H = 200 (7.874")
Max T/m = 85
Max US t/ft = 28.6
α = 88°
R = 0.8 (.031")

505 mm	32.4 kg
805 mm SECTIONED	49.2 kg

19.88"	71.4 lb
31.69" SECTIONED	108 lb

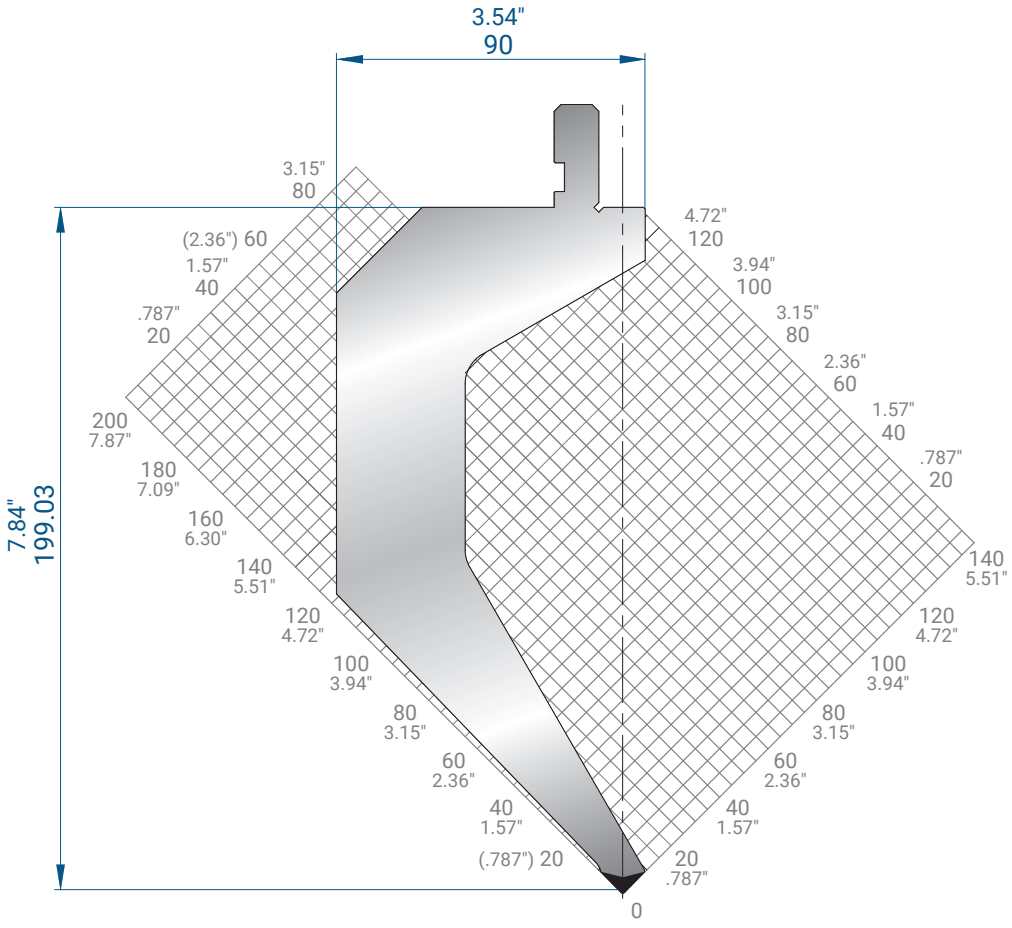


1301

Mat = C45
tempered
H = 199.03 (7.836")
Max T/m = 85
Max US t/ft = 28.6
α = 88°
R = 3 (.118")

505 mm	32.4 kg
805 mm SECTIONED	49.2 kg


19.88"	71.4 lb
31.69" SECTIONED	108 lb

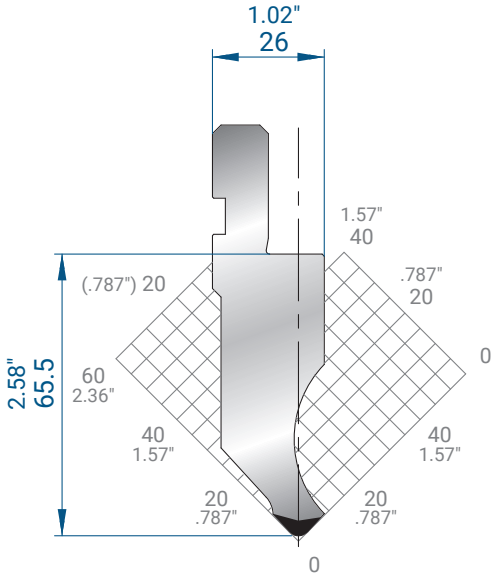

1177

Mat = C45
H = 65.50 (2.579")
Max T/m = 100
Max US t/ft = 33.6
α = 85°
R = 3 (.118")

835 mm	10.4 kg	32.87"	22.9 lb
415 mm	5.2 kg	16.34"	11.5 lb
805 mm SECTIONED	9.6 kg	31.69" SECTIONED	21.2 lb

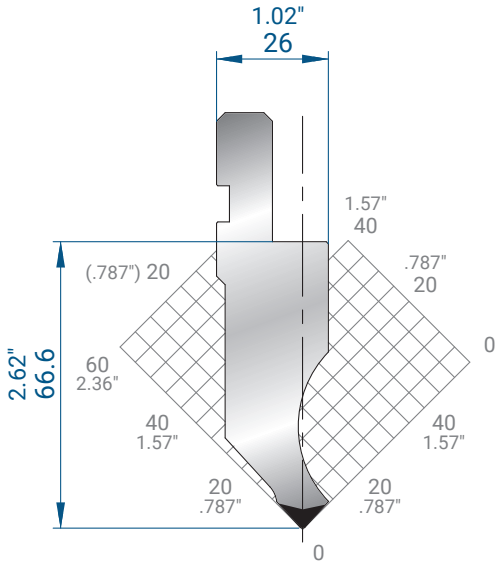


1260

Mat = C45
H = 66.60 (2.622")
Max T/m = 100
Max US t/ft = 33.6
α = 85°
R = 0.8 (.031")

835 mm	10.4 kg
415 mm	5.2 kg
805 mm SECTIONED	9.6 kg


32.87"	22.9 lb
16.34"	11.5 lb
31.69" SECTIONED	21.2 lb

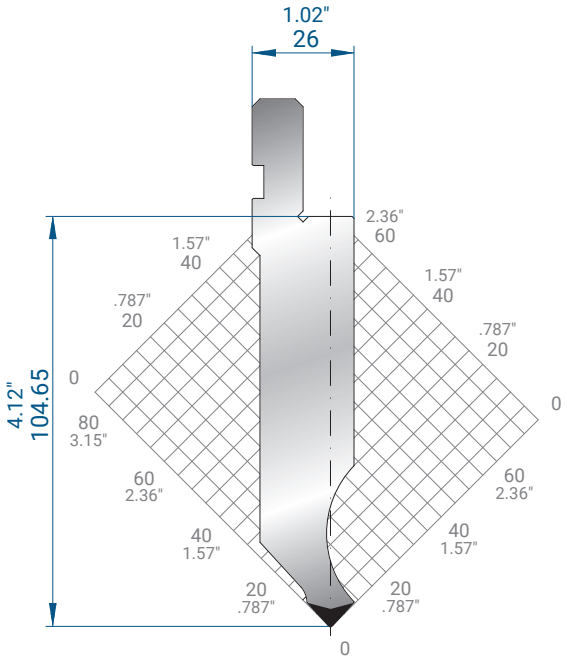

1281

Mat = C45
H = 104.65 (4.120")
Max T/m = 100
Max US t/ft = 33.6
α = 85°
R = 0.8 (.031")

835 mm	16.4 kg	32.87"	36.2 lb
415 mm	8.2 kg	16.34"	18.1 lb
805 mm SECTIONED	15.1 kg	31.69" SECTIONED	33.3 lb

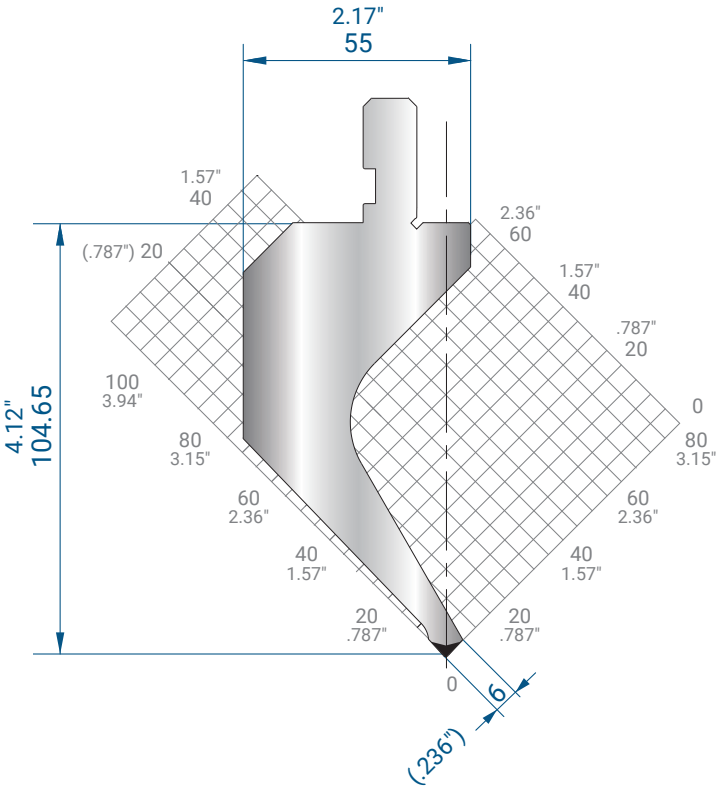

1171

Mat = C45
H = 104.65 (4.120")
Max T/m = 50
Max US t/ft = 16.8
α = 85°
R = 0.8 (.031")


835 mm	20.7 kg	32.87"	45.6 lb
415 mm	10.3 kg	16.34"	22.7 lb
805 mm SECTIONED	19.0 kg	31.69" SECTIONED	41.9 lb


1172

Mat = C45
H = 104.60 (4.118")
Max T/m = 50
Max US t/ft = 16.8
α = 85°
R = 0.8 (.031")

835 mm	21.4 kg
415 mm	10.7 kg
805 mm SECTIONED	19.7 kg

32.87"	47.2 lb
16.34"	23.6 lb
31.69" SECTIONED	43.4 lb

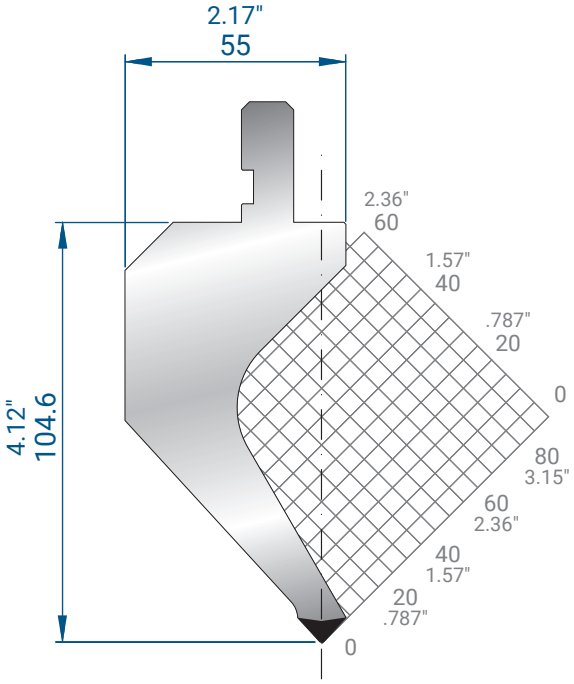


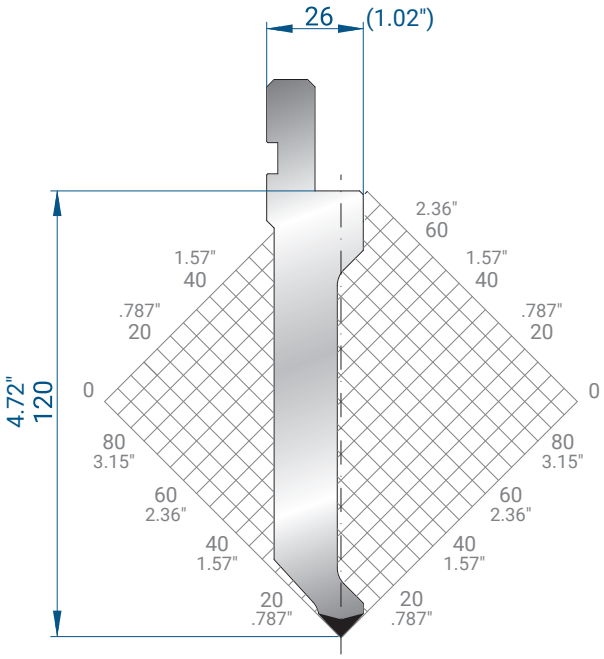

1309

835 mm	15.9 kg	32.87"	35.1 lb
415 mm	7.9 kg	16.34"	17.4 lb
805 mm SECTIONED	14.7 kg	31.69" SECTIONED	32.4 lb


Mat = C45
H = 120.00 (4.724")
Max T/m = 70
Max US t/ft = 23.5
α = 85°
R = 0.8 (.031")

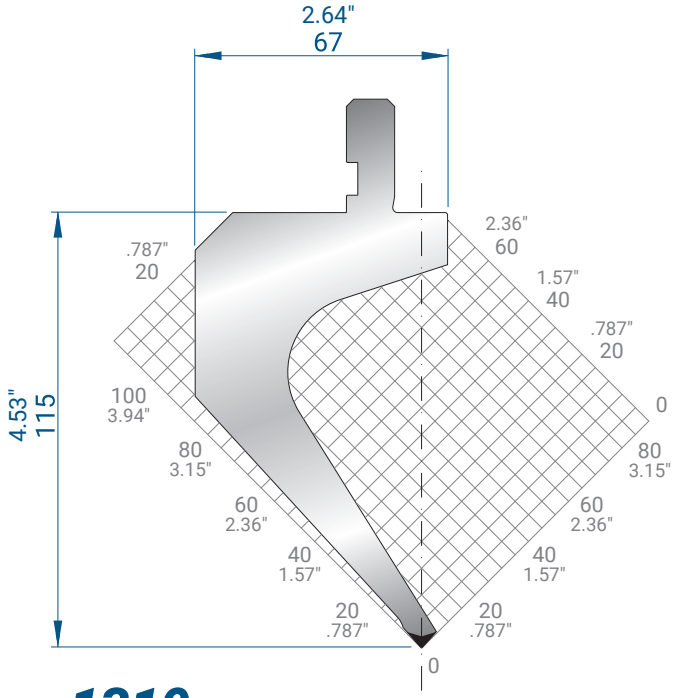

1310

835 mm	22.7 kg	32.87"	50.0 lb
415 mm	11.3 kg	16.34"	24.9 lb
805 mm SECTIONED	20.8 kg	31.69" SECTIONED	45.9 lb


Mat = 42CrMo4
tempered
H = 115.00 (4.528")
Max T/m = 35
Max US t/ft = 11.8
α = 85°
R = 0.8

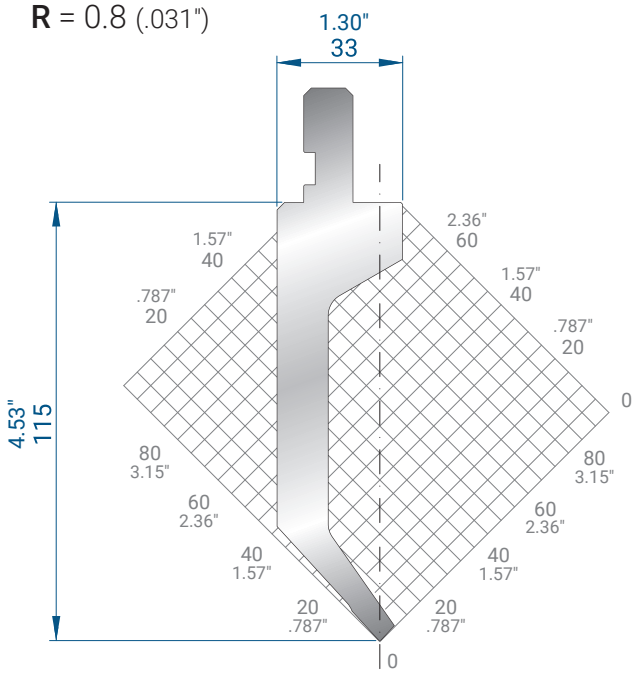

1312

835 mm	14.3 kg	32.87"	31.5 lb
415 mm	7.1 kg	16.34"	15.7 lb
805 mm SECTIONED	13.1 kg	31.69" SECTIONED	28.9 lb

Mat = 42CrMo4
tempered
H = 115.00 (4.528")
Max T/m = 20
Max US t/ft = 6.7
α = 85°
R = 0.6 (.024")

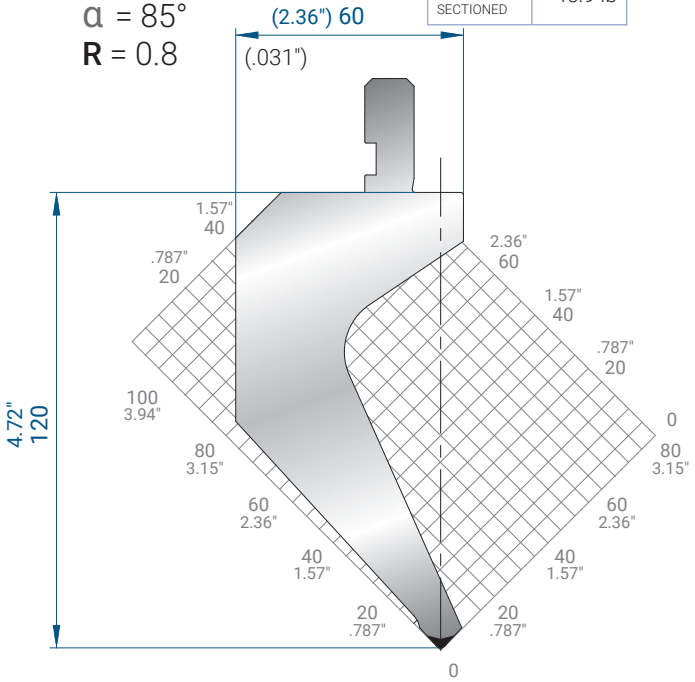


1322

835 mm	26.6 kg	32.87"	58.6 lb
415 mm	13.2 kg	16.34"	29.1 lb
805 mm SECTIONED	24.5 kg	31.69" SECTIONED	54.0 lb

Mat = 42CrMo4
tempered
H = 120.00 (4.724")
Max T/m = 100
Max US t/ft = 33.6
α = 85°
R = 1.5 (.059")

PUNCHES - 75°

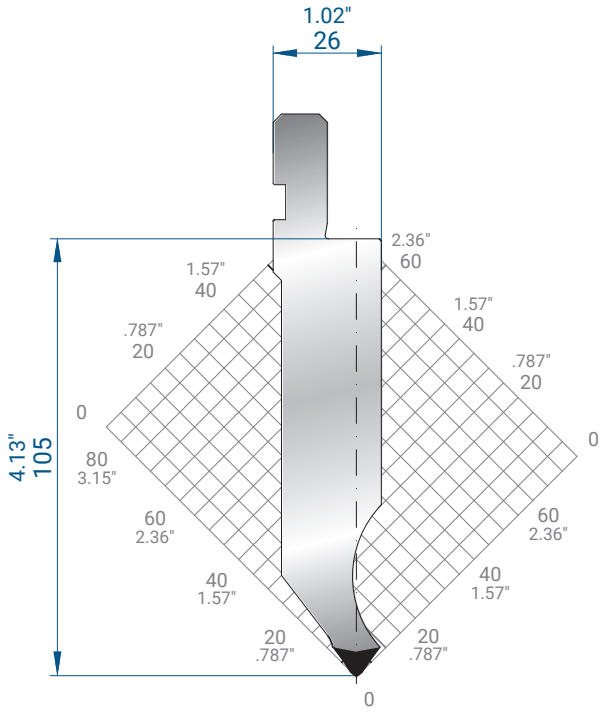


1338

Mat = 42CrMo4 *tempered*
H = 105 (4.134")
Max T/m = 100
Max US t/ft = 33.6
α = 75°
R = 0.8 (.031")

835 mm	16.4 kg
415 mm	8.1 kg
805 mm SECTIONED	15.0 kg

32.87"	36.2 lb
16.34"	17.9 lb
31.69" SECTIONED	33.1 lb

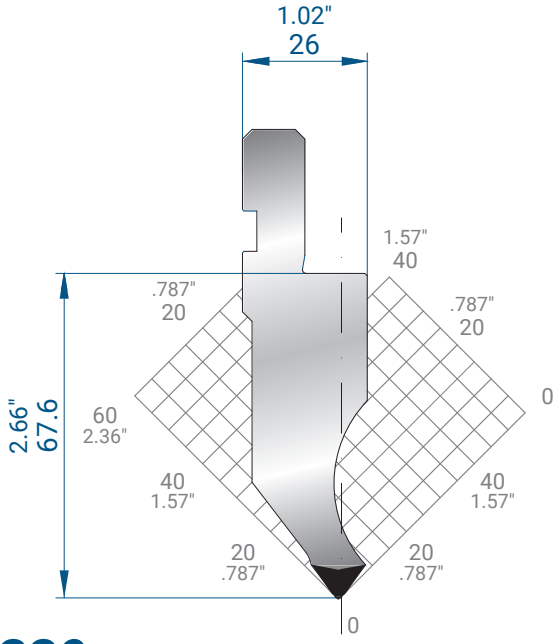


1339

Mat = 42CrMo4 *tempered*
H = 67.6 (2.661")
Max T/m = 100
Max US t/ft = 33.6
α = 75°
R = 0.8 (.031")

835 mm	10.5 kg	32.87"	23.1 lb
415 mm	5.2 kg	16.34"	11.5 lb
805 mm SECTIONED	9.7 kg	31.69" SECTIONED	21.4 lb

PUNCHES - 60°

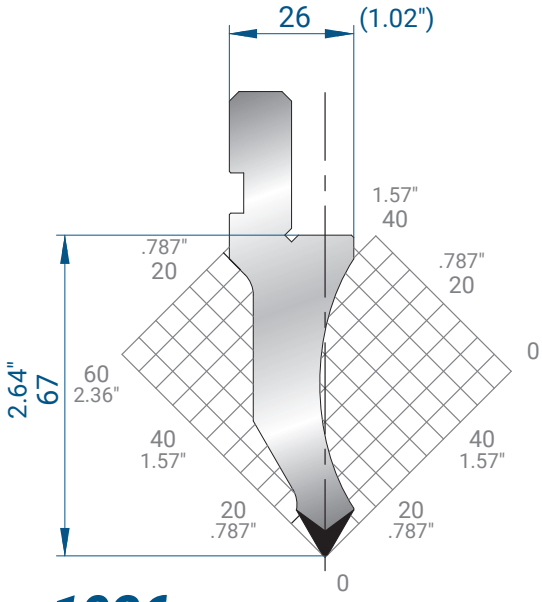


1026

Mat = C45
H = 67.00 (2.638")
Max T/m = 80
Max US t/ft = 26.9
α = 60°
R = 0.8 (.031")

835 mm	8.6 kg
415 mm	4.3 kg
805 mm SECTIONED	7.9 kg


32.87"	19.0 lb
16.34"	9.5 lb
31.69" SECTIONED	17.4 lb

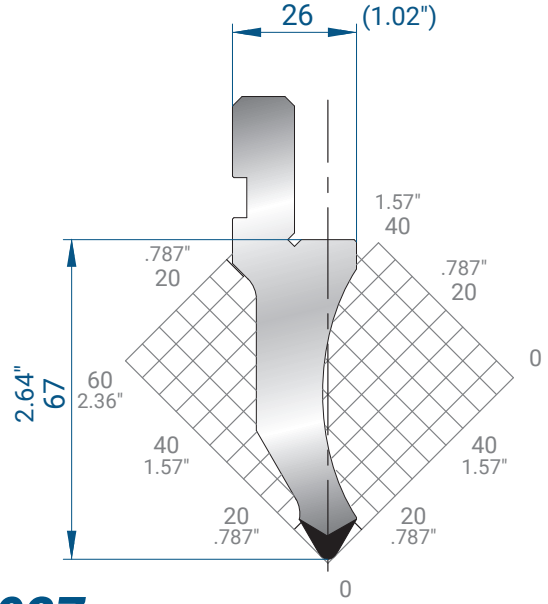

1027

Mat = C45
H = 67.00 (2.638")
Max T/m = 80
Max US t/ft = 26.9
α = 60°
R = 2 (.079")

835 mm	8.8 kg	32.87"	19.4 lb
415 mm	4.4 kg	16.34"	9.7 lb
805 mm SECTIONED	8.1 kg	31.69" SECTIONED	17.9 lb

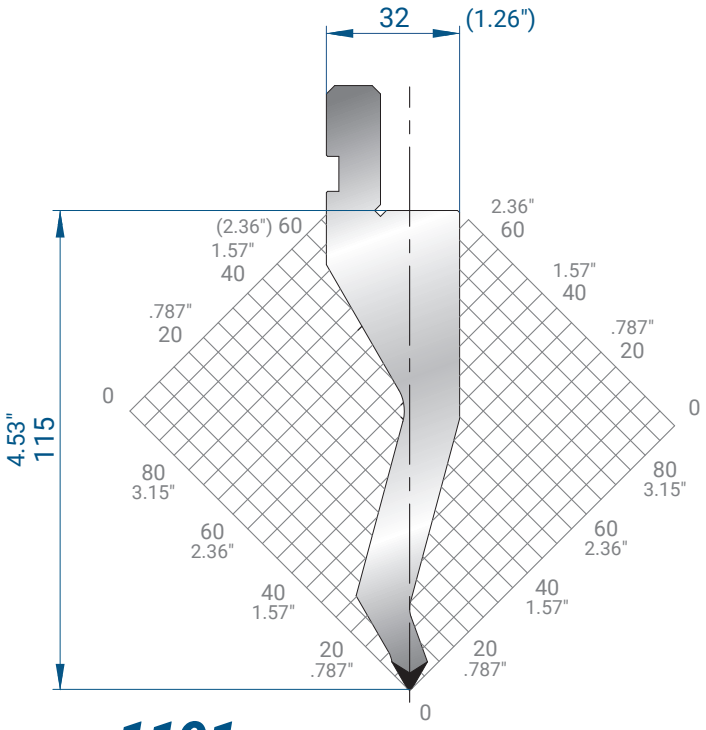


1191

835 mm	15.2 kg
415 mm	7.6 kg
805 mm SECTIONED	14.0 kg

32.87"	33.5 lb
16.34"	16.8 lb
31.69" SECTIONED	30.9 lb

Mat = C45
H = 115.00 (4.528")
Max T/m = 60
Max US t/ft = 20.2
α = 60°
R = 0.8 (.031")

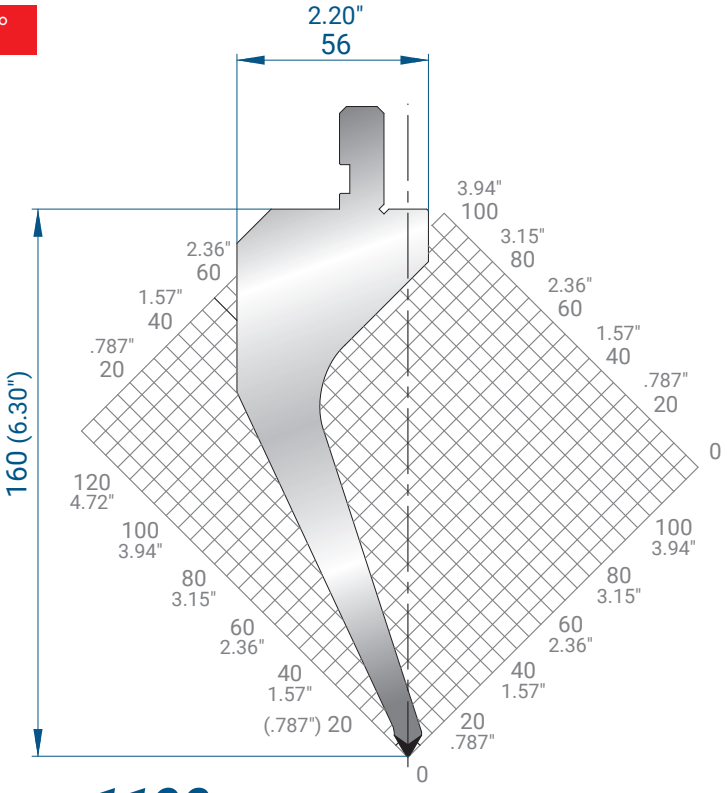


1190

835 mm	26.9 kg
415 mm	13.4 kg
805 mm SECTIONED	24.7 kg

32.87"	59.3 lb
16.34"	29.5 lb
31.69" SECTIONED	54.5 lb

Mat = C45
tempered
H = 160.00 (6.299")
Max T/m = 40
Max US t/ft = 13.4
α = 60°
R = 0.8 (.031")

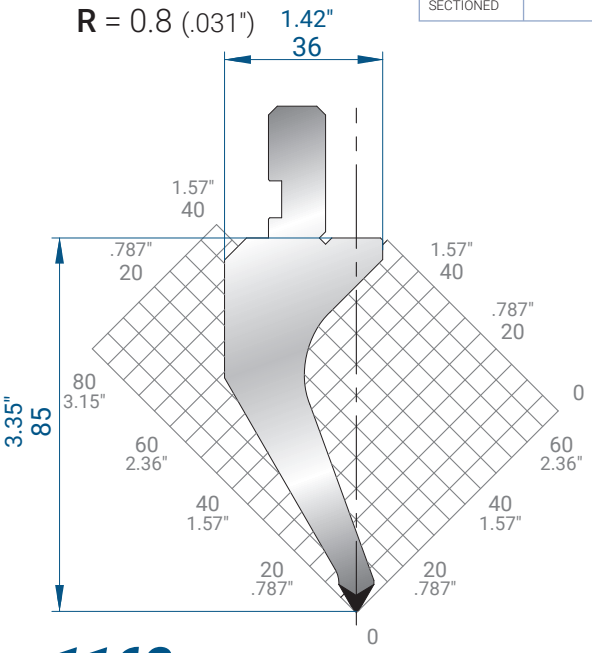


1162

835 mm	11.7 kg
415 mm	5.8 kg
805 mm SECTIONED	10.7 kg

32.87"	25.8 lb
16.34"	12.8 lb
31.69" SECTIONED	23.6 lb

Mat = 42CrMo4
tempered
H = 85.00 (3.346")
Max T/m = 40
Max US t/ft = 13.4
α = 60°
R = 0.8 (.031")

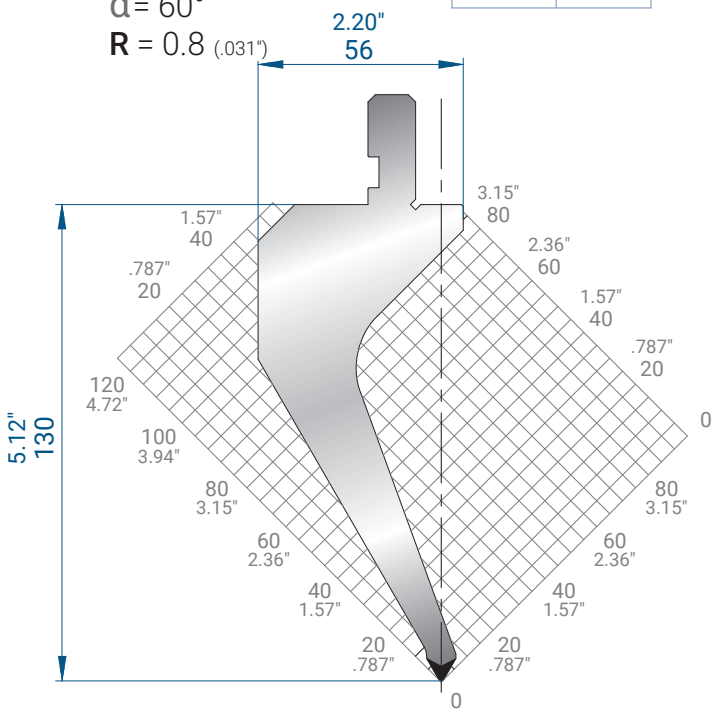


1163

835 mm	22.3 kg
415 mm	11.1 kg
805 mm SECTIONED	20.5 kg

32.87"	49.2 lb
16.34"	24.5 lb
31.69" SECTIONED	45.2 lb


Mat = C45
tempered
H = 130.00 (5.118")
Max T/m = 40
Max US t/ft = 13.4
α = 60°
R = 0.8 (.031")

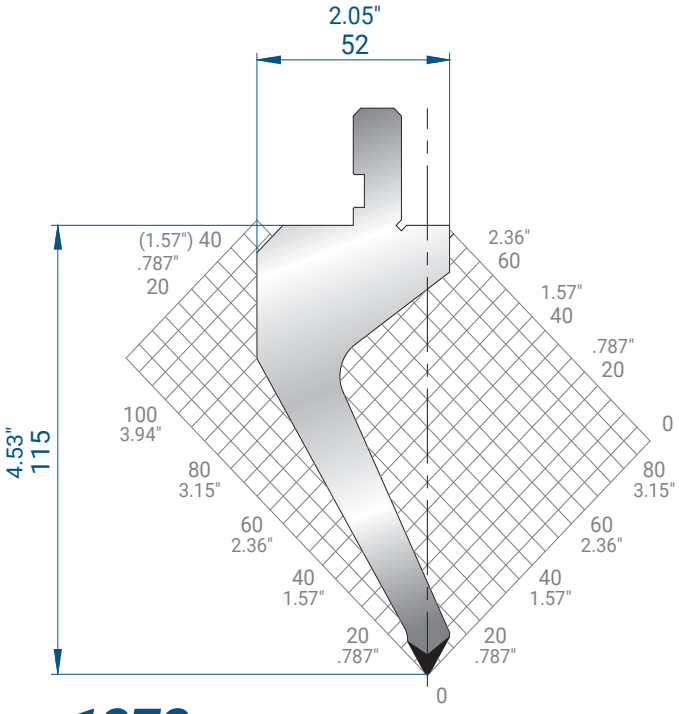

1272

835 mm	19.2 kg	32.87"	42.3 lb
415 mm	9.6 kg	16.34"	21.2 lb
805 mm SECTIONED	17.7 kg	31.69" SECTIONED	39.0 lb


Mat = C45 *tempered*
H = 115.00 (4.528")
Max T/m = 40
Max US t/ft = 13.4
α = 60°
R = 0.8 (.031")

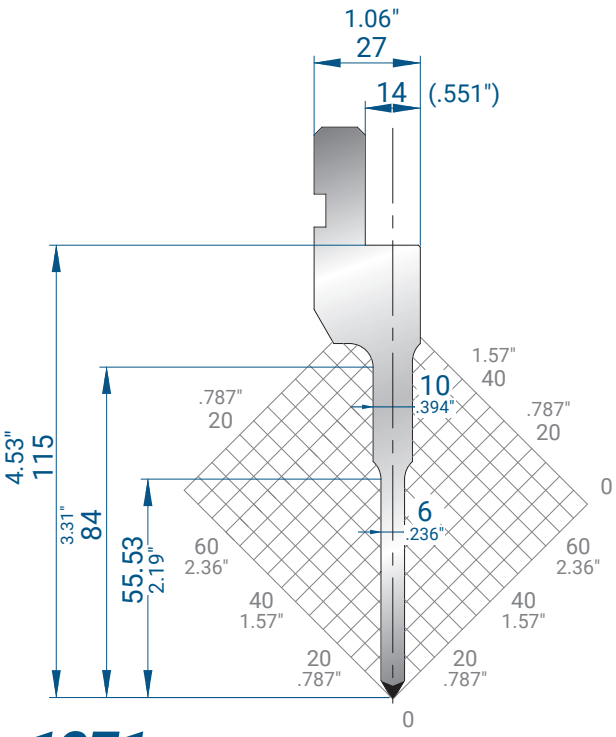

1271

835 mm	11.0 kg	32.87"	24.3 lb
415 mm	5.5 kg	16.34"	12.1 lb
805 mm SECTIONED	10.1 kg	31.69" SECTIONED	22.3 lb


Mat = C45 *tempered*
H = 115.00 (4.528")
Max T/m = 50
Max US t/ft = 16.8
α = 60°
R = 0.8 (.031")

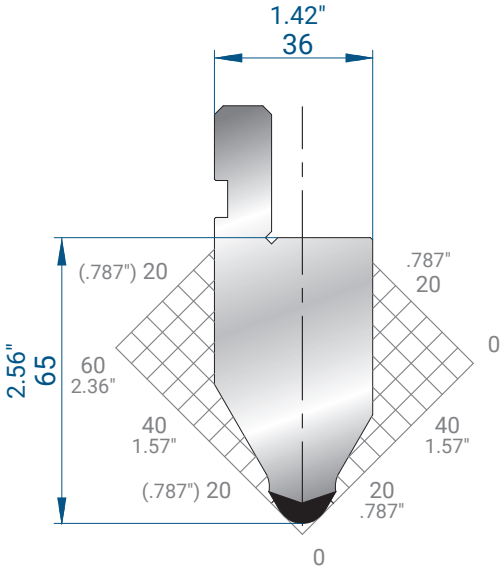

1032

835 mm	14.8 kg	32.87"	32.6 lb
415 mm	7.3 kg	16.34"	16.1 lb
805 mm SECTIONED	13.6 kg	31.69" SECTIONED	30.0 lb


Mat = C45
H = 65.00 (2.559")
Max T/m = 120
Max US t/ft = 40.3
α = 60°
R = 6 (.236")

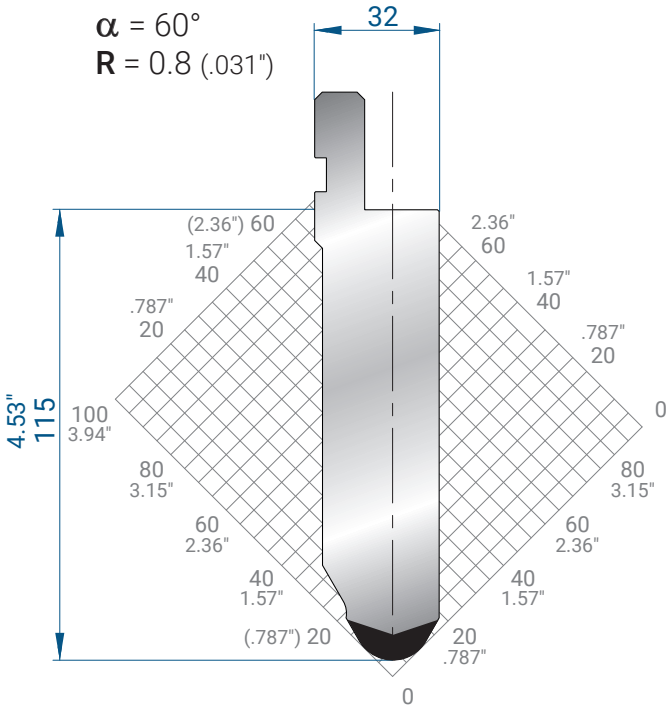

1283

835 mm	23.8 kg	32.87"	52.5 lb
415 mm	11.8 kg	16.34"	26.0 lb
805 mm SECTIONED	21.9 kg	31.69" SECTIONED	48.3 lb

Mat = C45
H = 115.00 (4.528")
Max T/m = 150
Max US t/ft = 50.4
α = 60°
R = 10 (.394")

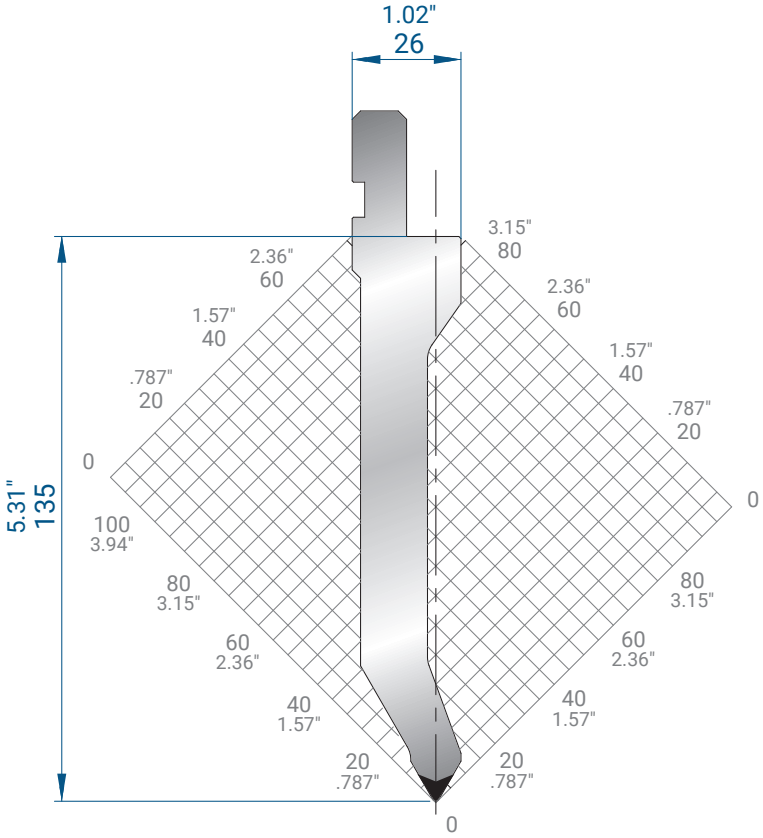

1284

Mat = C45
H = 135.00 (5.315")
Max T/m = 70
Max US t/ft = 23.5
α = 60°
R = 0.8 (.031")

835 mm	16.8 kg
415 mm	8.4 kg
805 mm SECTIONED	15.5 kg


32.87"	37.0 lb
16.34"	18.5 lb
31.69" SECTIONED	34.2 lb


1293

835 mm	40.7 kg
415 mm	20.2 kg
805 mm SECTIONED	37.4 kg

32.87"	89.7 lb
16.34"	44.5 lb
31.69" SECTIONED	82.5 lb

Mat = C45
H = 200.00
Max T/m = 150
Max US t/ft = 50.4
α = 60°
R = 8

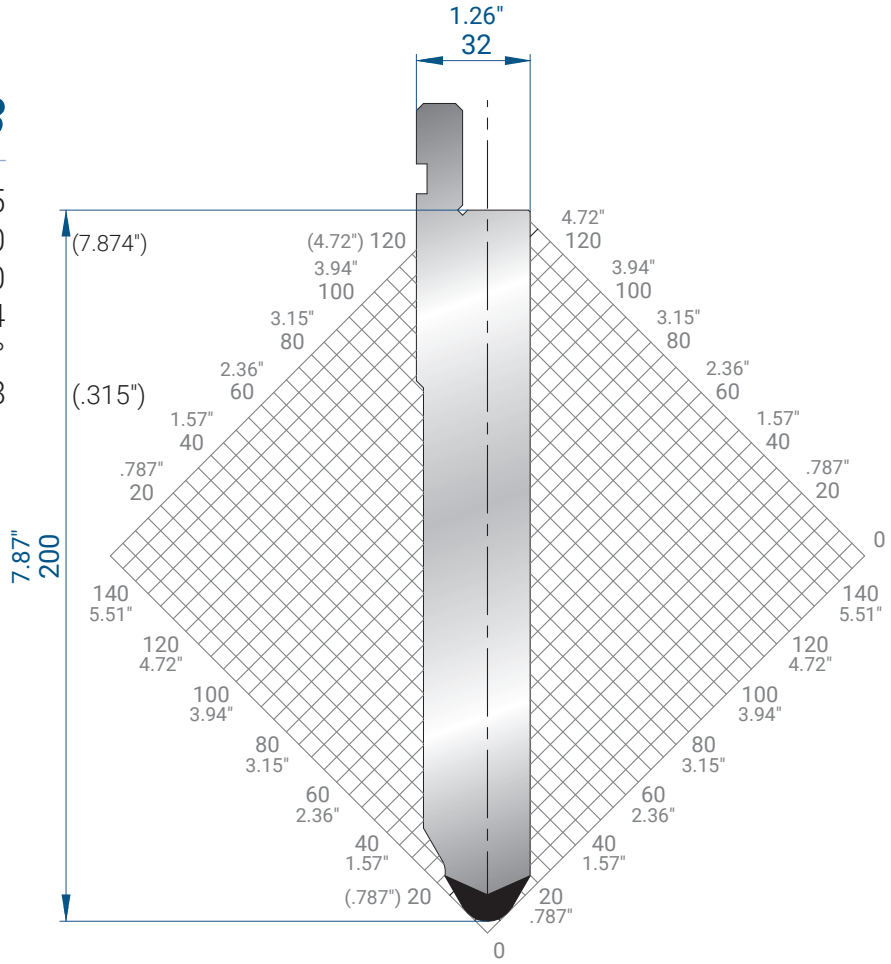


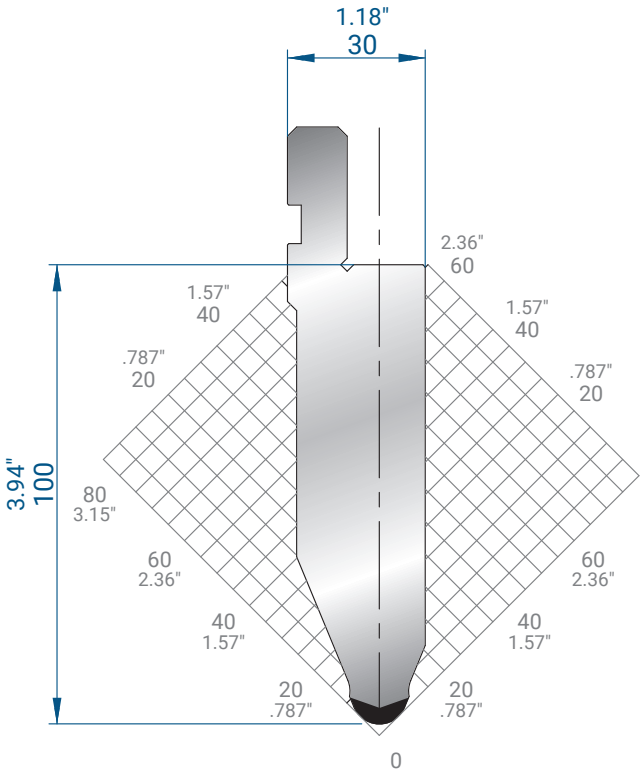

1053

835 mm	18.7 kg	32.87"	41.2 lb
415 mm	9.3 kg	16.34"	20.5 lb
805 mm SECTIONED	17.2 kg	31.69" SECTIONED	37.9 lb

Mat = C45
H = 100.00 (3.937")
Max T/m = 100
Max US t/ft = 33.6
α = 45°
R = 6 (.236")

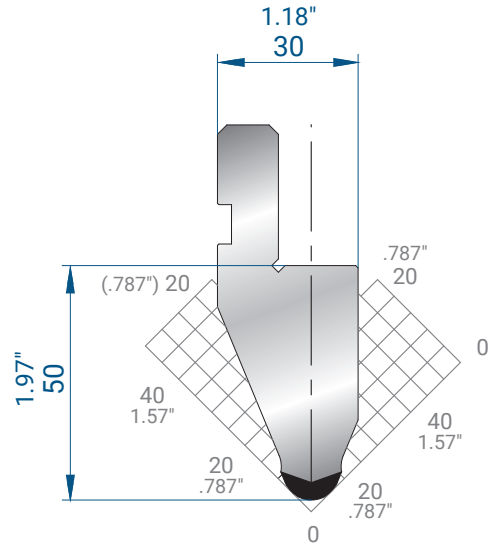


1054

835 mm	9.5 kg
415 mm	4.7 kg
805 mm SECTIONED	8.8 kg

32.87"	20.9 lb
16.34"	10.4 lb
31.69" SECTIONED	19.4 lb


Mat = C45
H = 50.00 (1.969")
Max T/m = 100
Max US t/ft = 33.6
α = 45°
R = 6 (.236")

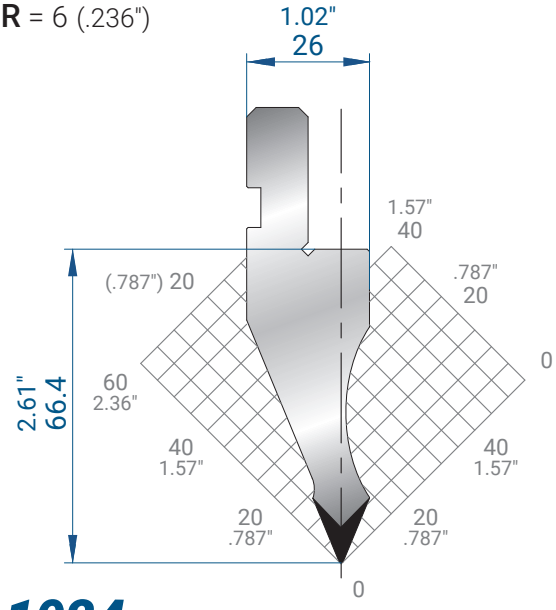

1024

835 mm	9.2 kg	32.87"	20.3 lb
415 mm	4.6 kg	16.34"	10.1 lb
805 mm SECTIONED	8.4 kg	31.69" SECTIONED	18.5 lb

Mat = C45
H = 66.40 (2.614")
Max T/m = 80
Max US t/ft = 26.9
α = 45°
R = 0.5 (.020")

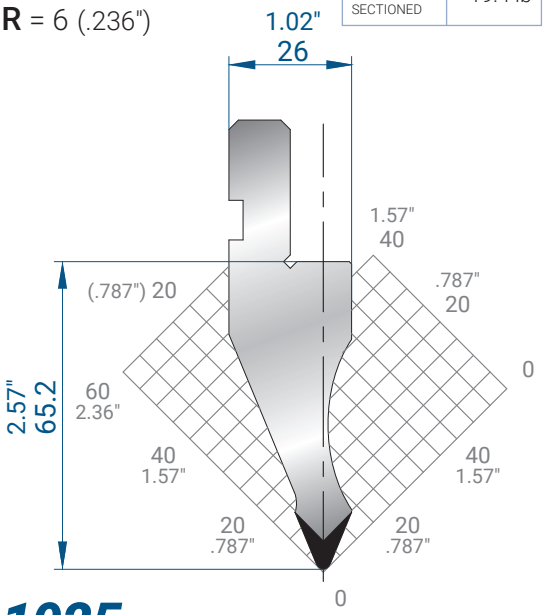


1025

835 mm	9.2 kg
415 mm	4.6 kg
805 mm SECTIONED	8.5 kg

32.87"	20.3 lb
16.34"	10.1 lb
31.69" SECTIONED	18.7 lb


Mat = C45
H = 65.20 (2.567")
Max T/m = 80
Max US t/ft = 26.9
α = 45°
R = 1.5 (.059")

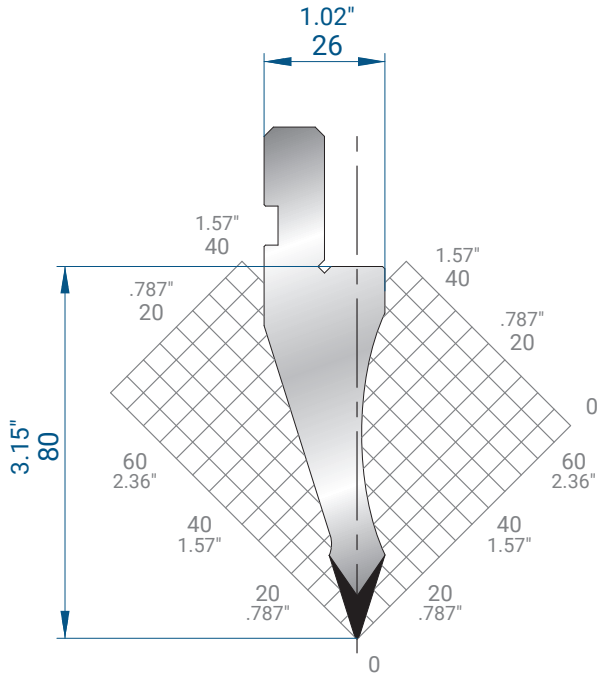

1035

835 mm	10.0 kg	32.87"	22.0 lb
415 mm	5.0 kg	16.34"	11.0 lb
805 mm SECTIONED	9.2 kg	31.69" SECTIONED	20.3 lb


Mat = C45
H = 80.00 (3.150")
Max T/m = 70
Max US t/ft = 23.5
α = 35°
R = 0.5 (.020")

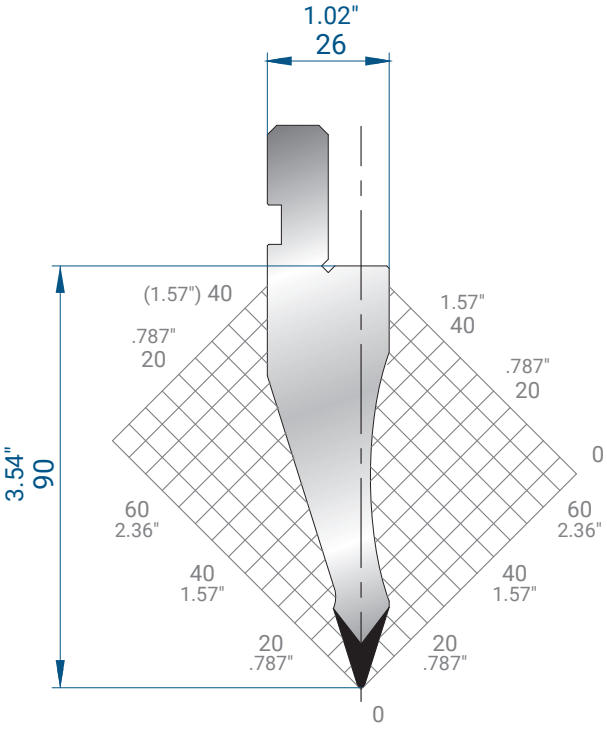

1047

835 mm	12.0 kg	32.87"	26.5 lb
415 mm	6.0 kg	16.34"	13.2 lb
805 mm SECTIONED	11.1 kg	31.69" SECTIONED	24.5 lb

Mat = C45
H = 90.00 (3.543")
Max T/m = 70
Max US t/ft = 23.5
α = 35°
R = 0.8 (.031")

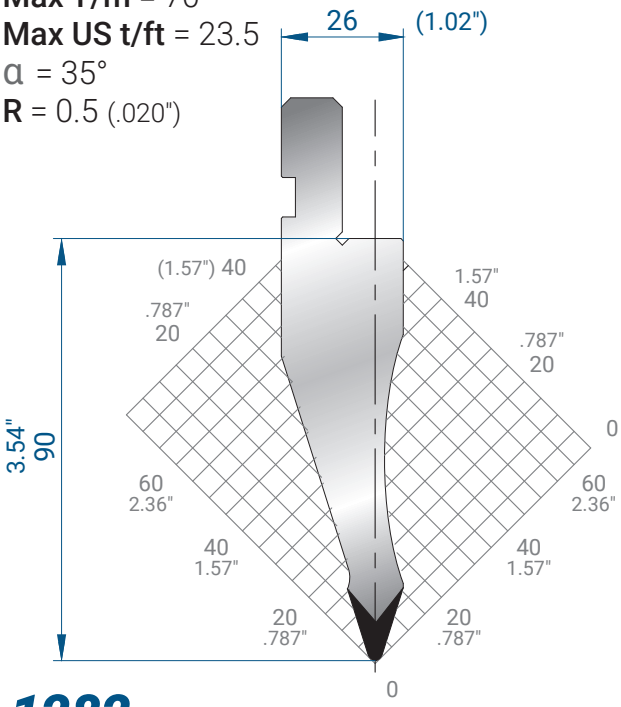


1282

835 mm	12.3 kg
415 mm	6.1 kg
805 mm SECTIONED	11.3 kg

32.87"	27.1 lb
16.34"	13.4 lb
31.69" SECTIONED	24.9 lb

Mat = C45
H = 90.00 (3.543")
Max T/m = 70
Max US t/ft = 23.5
α = 35°
R = 1.5 (.059")

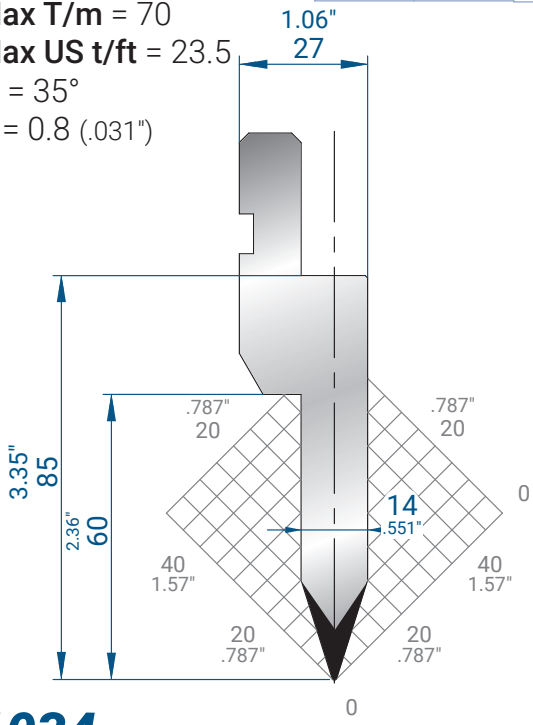


1034

835 mm	11.1 kg
415 mm	5.6 kg
805 mm SECTIONED	10.3 kg

32.87"	24.5 lb
16.34"	12.3 lb
31.69" SECTIONED	22.7 lb

Mat = C45
H = 85.00 (3.346")
Max T/m = 100
Max US t/ft = 33.6
α = 35°
P = 0.8

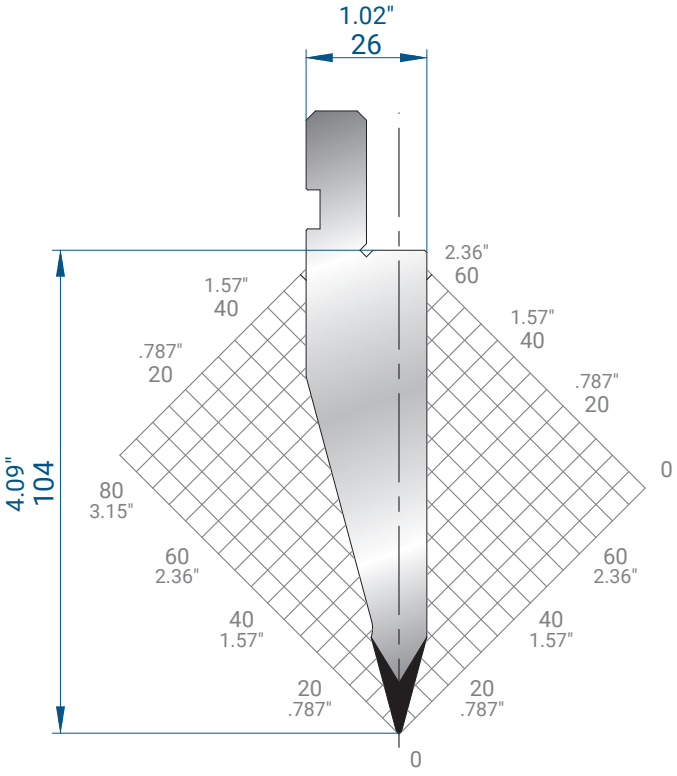

1193


835 mm	14.6 kg	32.87"	32.2 lb
415 mm	7.3 kg	16.34"	16.1 lb
805 mm SECTIONED	13.4 kg	31.69" SECTIONED	29.5 lb

Mat = C45
H = 104.00 (4.094")
Max T/m = 100
Max US t/ft = 33.6
α = 30°
R = 0.6 (.024")

1289

835 mm	15.5 kg	32.87"	34.2 lb
415 mm	7.7 kg	16.34"	17.0 lb
805 mm SECTIONED	14.2 kg	31.69" SECTIONED	31.3 lb


Mat = C45
H = 104.00 (4.094")
Max T/m = 100
Max US t/ft = 33.6
α = 30°
R = 3 (.118")

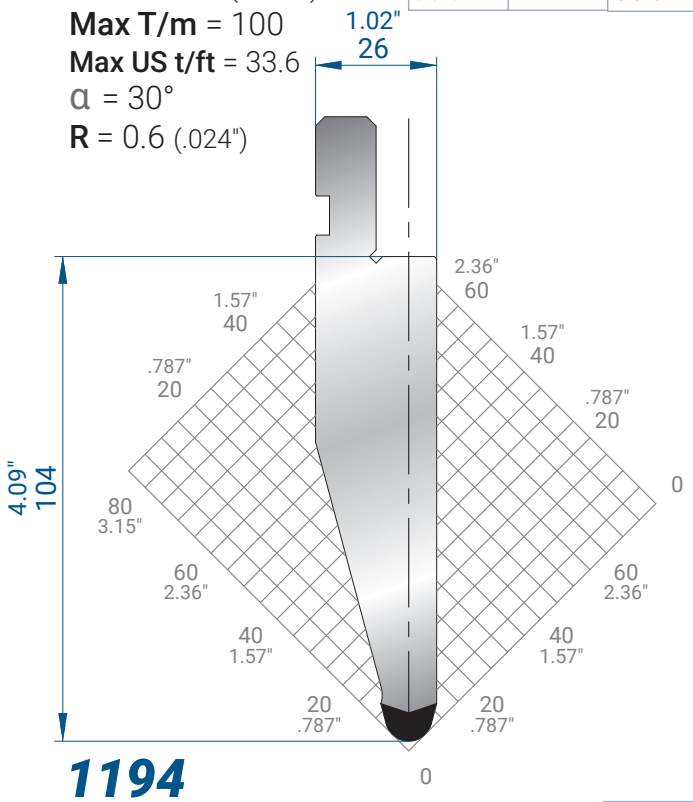

1194

835 mm	16.4 kg	32.87"	36.2 lb
415 mm	8.1 kg	16.34"	17.9 lb
805 mm SECTIONED	15.1 kg	31.69" SECTIONED	33.3 lb


Mat = C45
H = 104.00 (4.094")
Max T/m = 100
Max US t/ft = 33.6
α = 30°
R = 5 (.197")

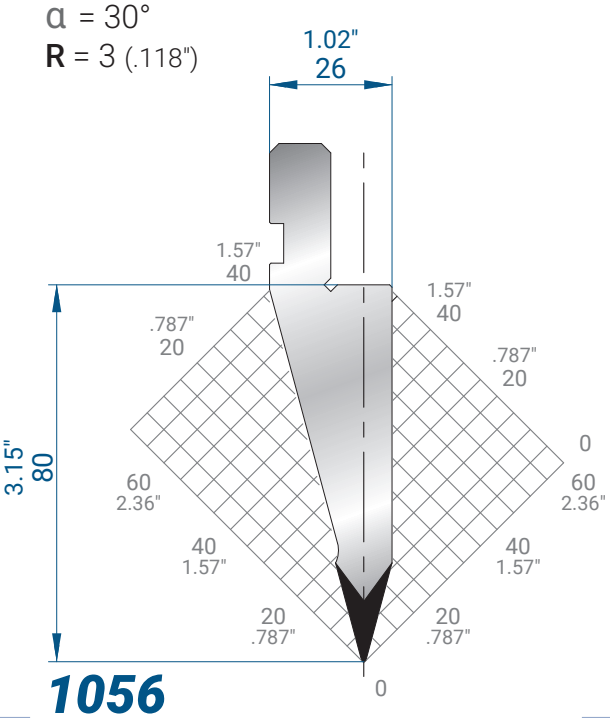

1056

835 mm	10.3 kg	32.87"	22.7 lb
415 mm	5.1 kg	16.34"	11.2 lb
805 mm SECTIONED	9.5 kg	31.69" SECTIONED	20.9 lb


Mat = C45
H = 80.00 (3.150")
Max T/m = 100
Max US t/ft = 33.6
α = 30°
R = 0.5 (.020")

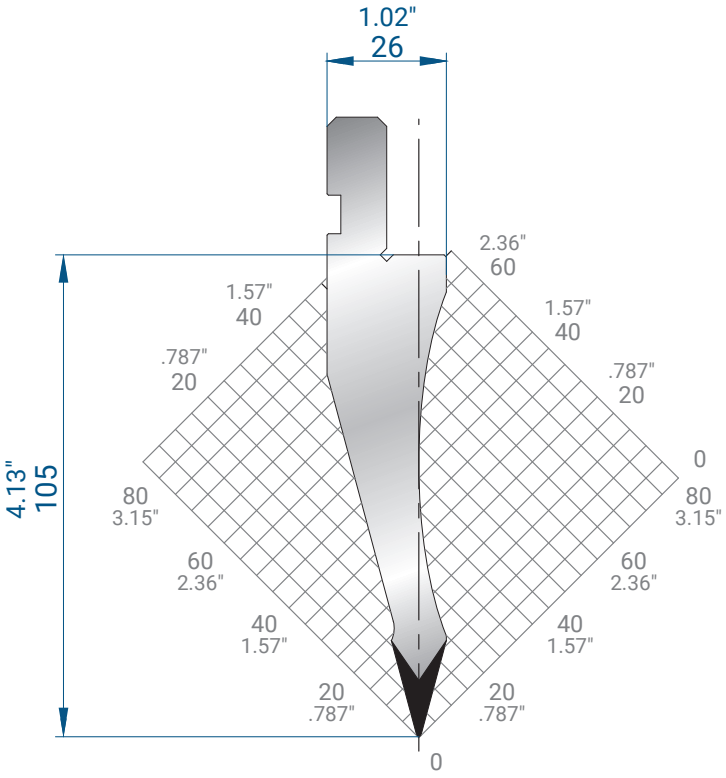

1055

835 mm	12.6 kg	32.87"	27.8 lb
415 mm	6.3 kg	16.34"	13.9 lb
805 mm SECTIONED	11.6 kg	31.69" SECTIONED	25.6 lb

Mat = C45
H = 105.00 (4.134")
Max T/m = 50
Max US t/ft = 16.8
α = 30°
R = 0.5 (.020")

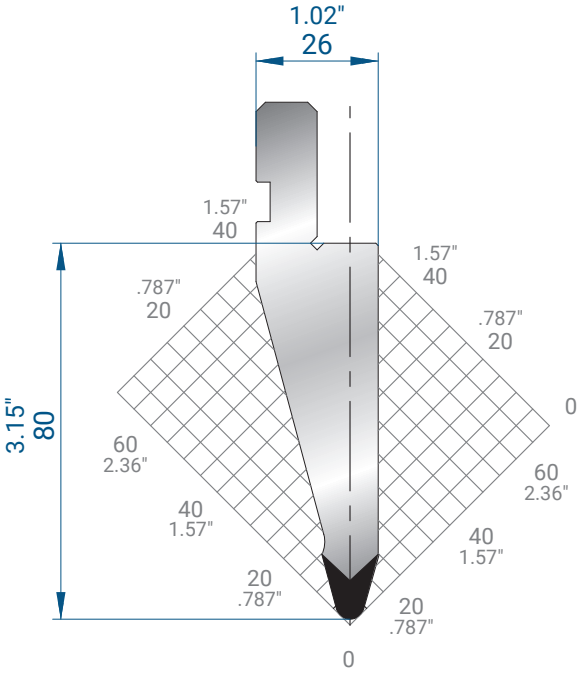


1057

835 mm	11.4 kg
415 mm	5.7 kg
805 mm SECTIONED	10.5 kg

32.87"	25.1 lb
16.34"	12.6 lb
31.69" SECTIONED	23.1 lb

Mat = C45
H = 80.00 (3.150")
Max T/m = 100
Max US t/ft = 33.6
α = 30°
R = 3 (.118")

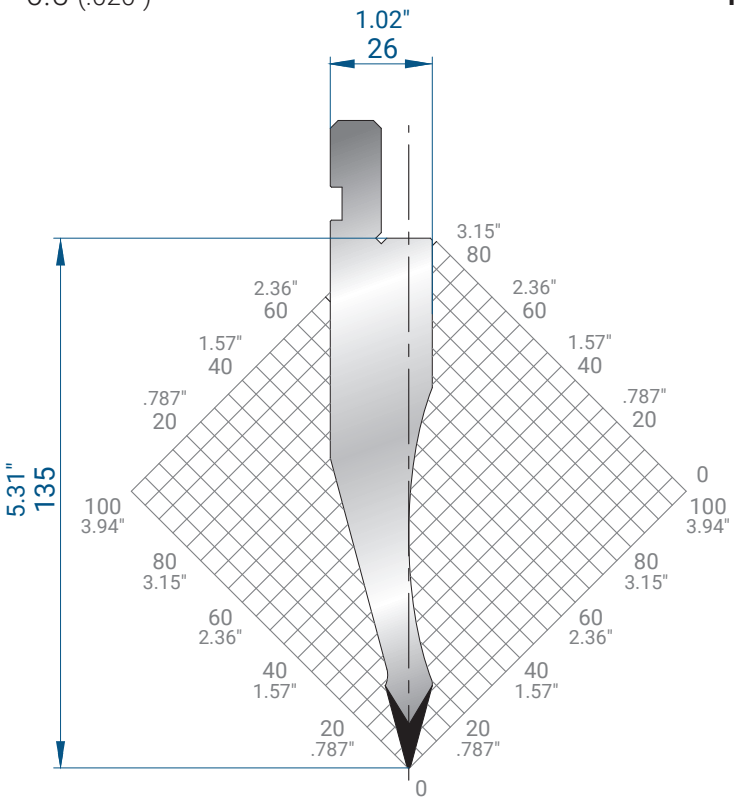


1052

835 mm	17.0 kg
415 mm	8.5 kg
805 mm SECTIONED	15.6 kg

32.87"	37.5 lb
16.34"	18.7 lb
31.69" SECTIONED	34.4 lb

Mat = C45
H = 135.00 (5.315")
Max T/m = 50
Max US t/ft = 16.8
α = 30°
R = 0.5 (.020")

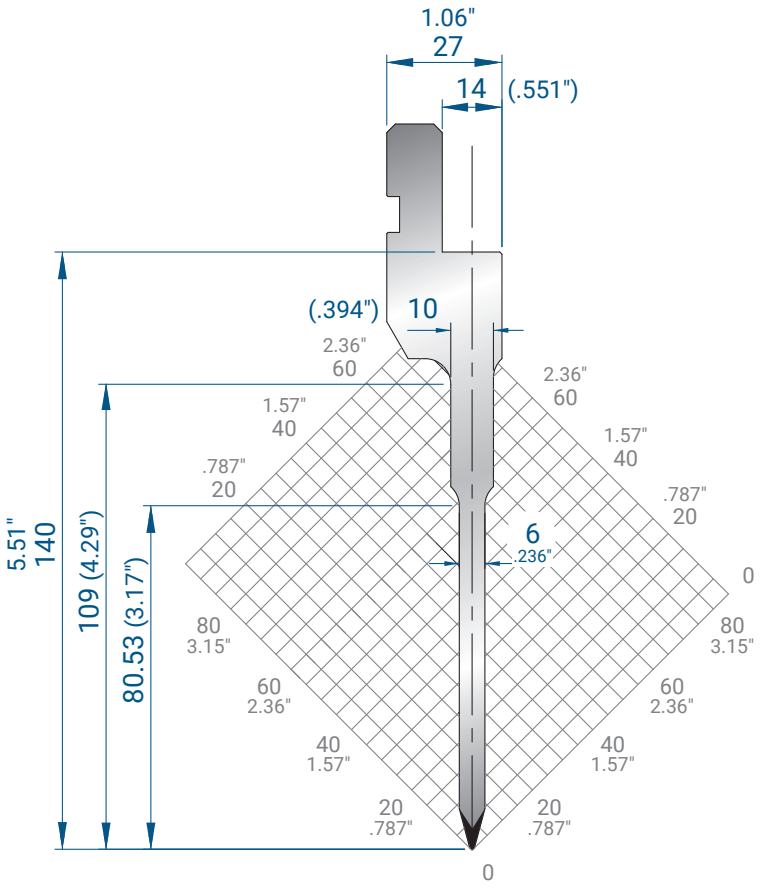


1086

Mat = C45
tempered
H = 140.00 (5.512")
Max T/m = 40
Max US t/ft = 13.4
α = 30°
R = 0.6 (.024")

835 mm	11.9 kg
415 mm	5.9 kg
805 mm SECTIONED	10.9 kg

32.87"	26.2 lb
16.34"	13.0 lb
31.69" SECTIONED	24.0 lb

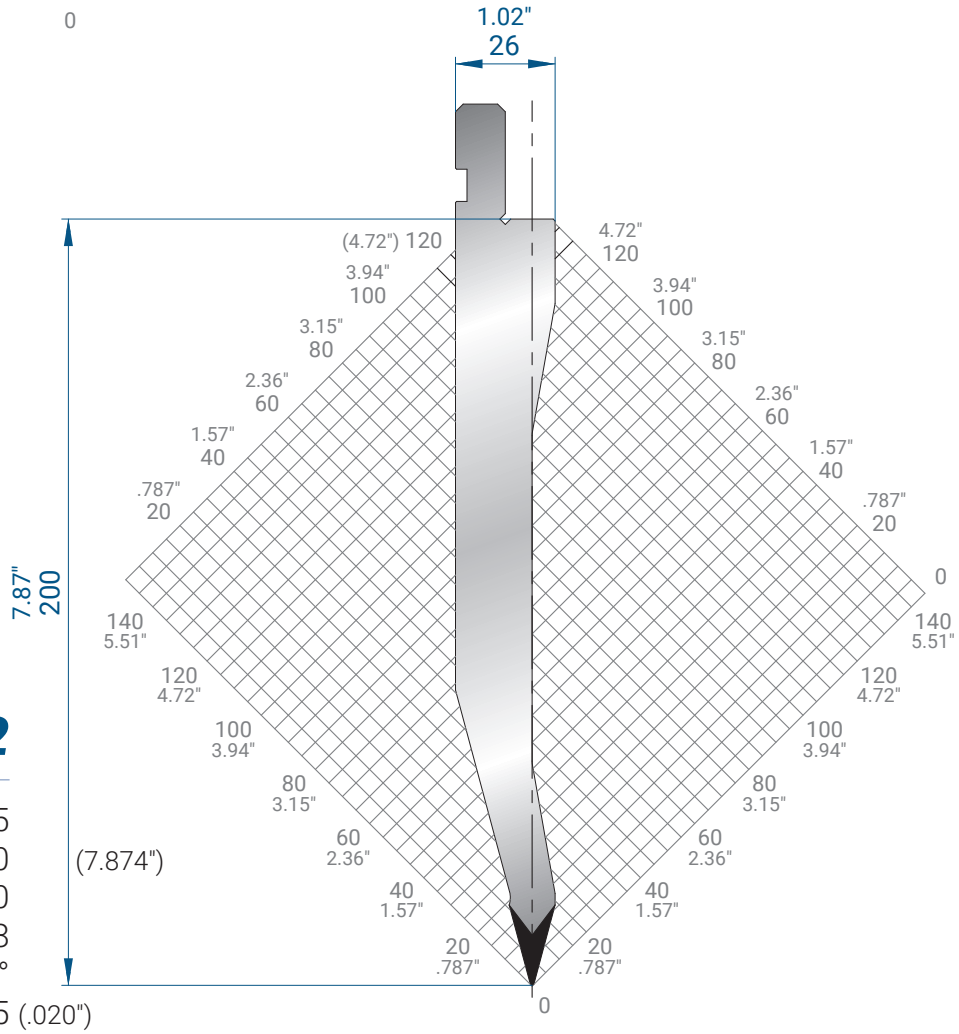


1292

Mat = C45
H = 200.00
Max T/m = 50
Max US t/ft = 16.8
α = 30°
R = 0.5 (.020")

32.87"	55.6 lb
16.34"	27.6 lb
31.69" SECTIONED	50.9 lb


835 mm	25.2 kg
415 mm	12.5 kg
805 mm SECTIONED	23.1 kg

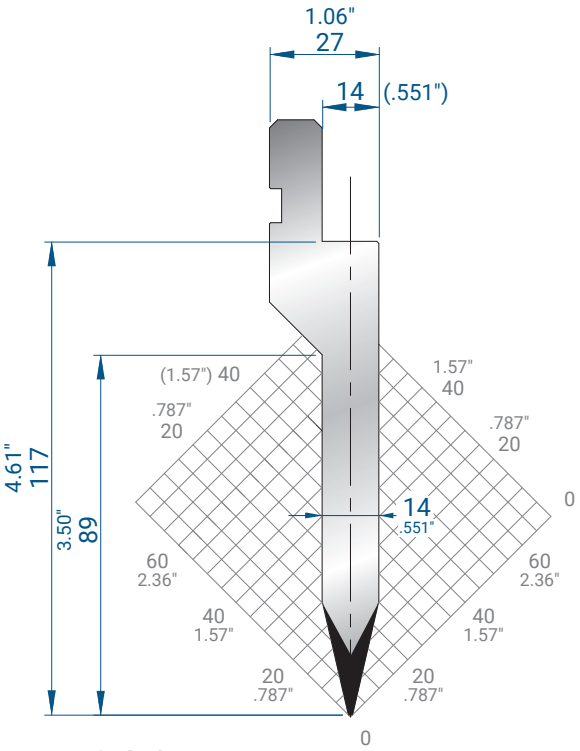

1033

835 mm 32.87"	13.7 kg 30.2 lb
415 mm 16.34"	6.8 kg 15.0 lb
805 mm 31.69" SECTIONED	12.6 kg 27.8 lb


Mat = C45
H = 117.00 (4.606")
Max T/m = 100
Max US t/ft = 33.6
α = 26°
P = 1

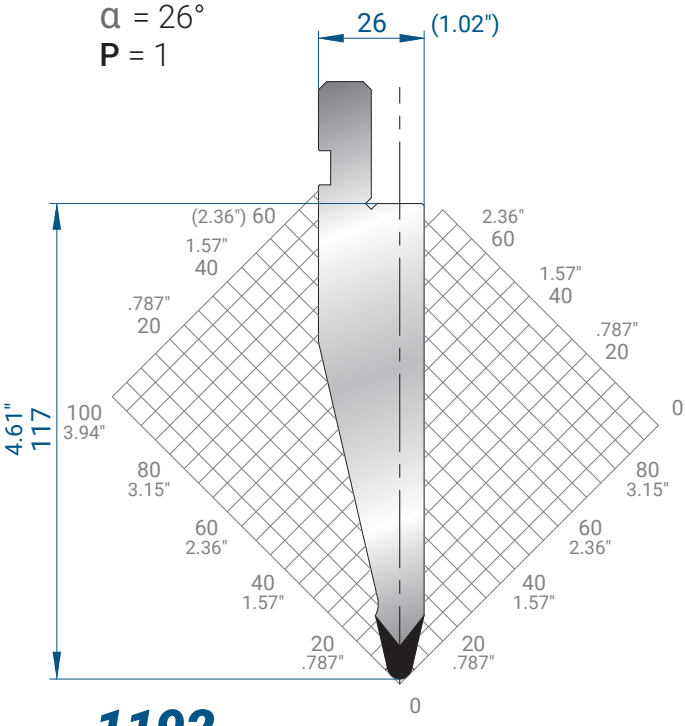

1192

835 mm 32.87"	17.0 kg 37.5 lb
415 mm 16.34"	8.5 kg 18.7 lb
805 mm 31.69" SECTIONED	15.6 kg 34.4 lb


Mat = C45
H = 117.00 (4.606")
Max T/m = 100
Max US t/ft = 33.6
α = 26°
R = 3 (.118")

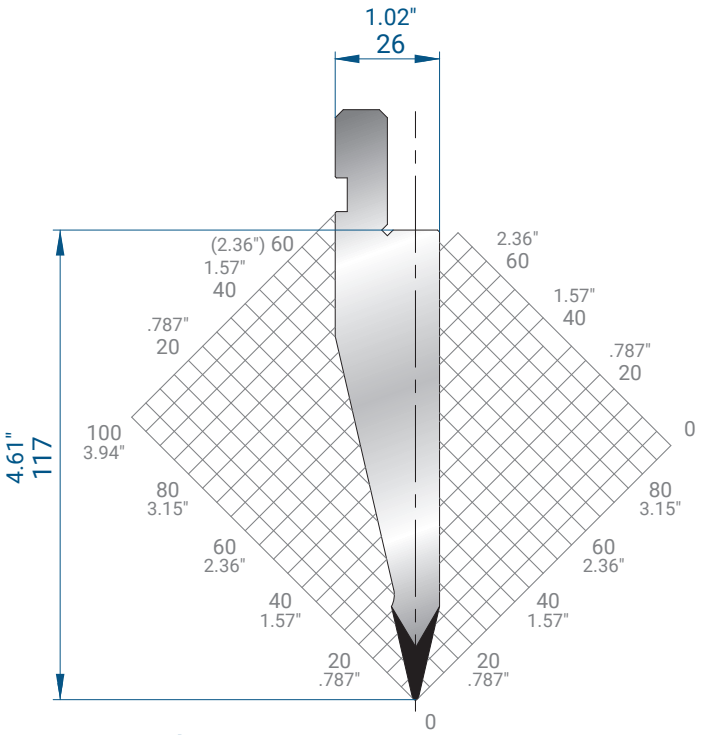

1178

835 mm 32.87"	15.9 kg 35.1 lb
415 mm 16.34"	7.9 kg 17.4 lb
805 mm 31.69" SECTIONED	14.6 kg 32.2 lb

Mat = C45
H = 117.00 (4.606")
Max T/m = 100
Max US t/ft = 33.6
α = 26°
R = 0.8 (.031")

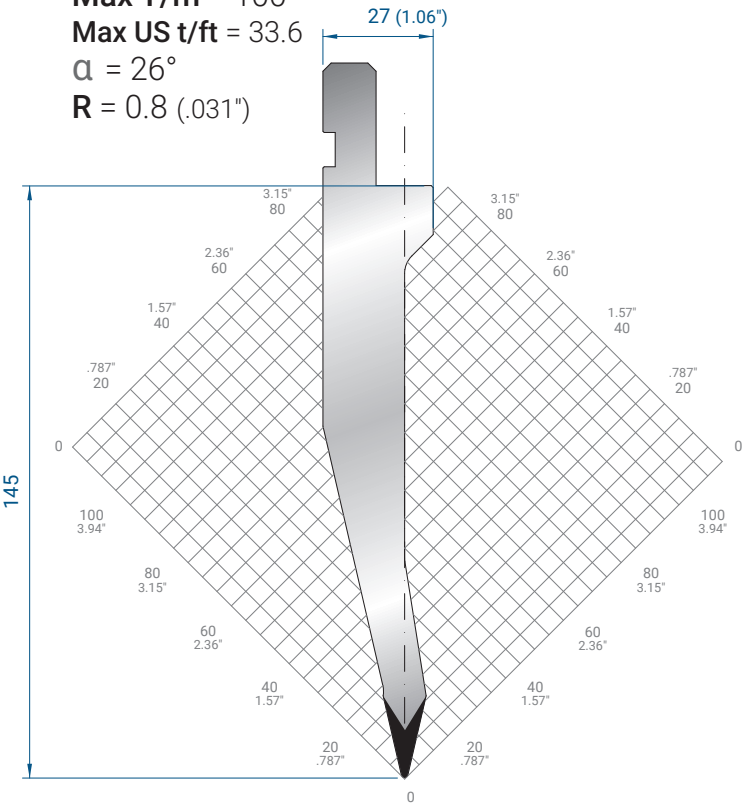


1311

tempered
H = 145.00 (5.709")
Max T/m = 100
Max US t/ft = 33.6
α = 26°
R = 0.8 (.031")

835 mm 32.87"	16.8 kg 37.0 lb
415 mm 16.34"	8.3 kg 18.3 lb
805 mm 31.69" SECTIONED	15.3 kg 33.7 lb



SEE PAGE 16 FOR PUNCHES SEGMENTATION DIAGRAM

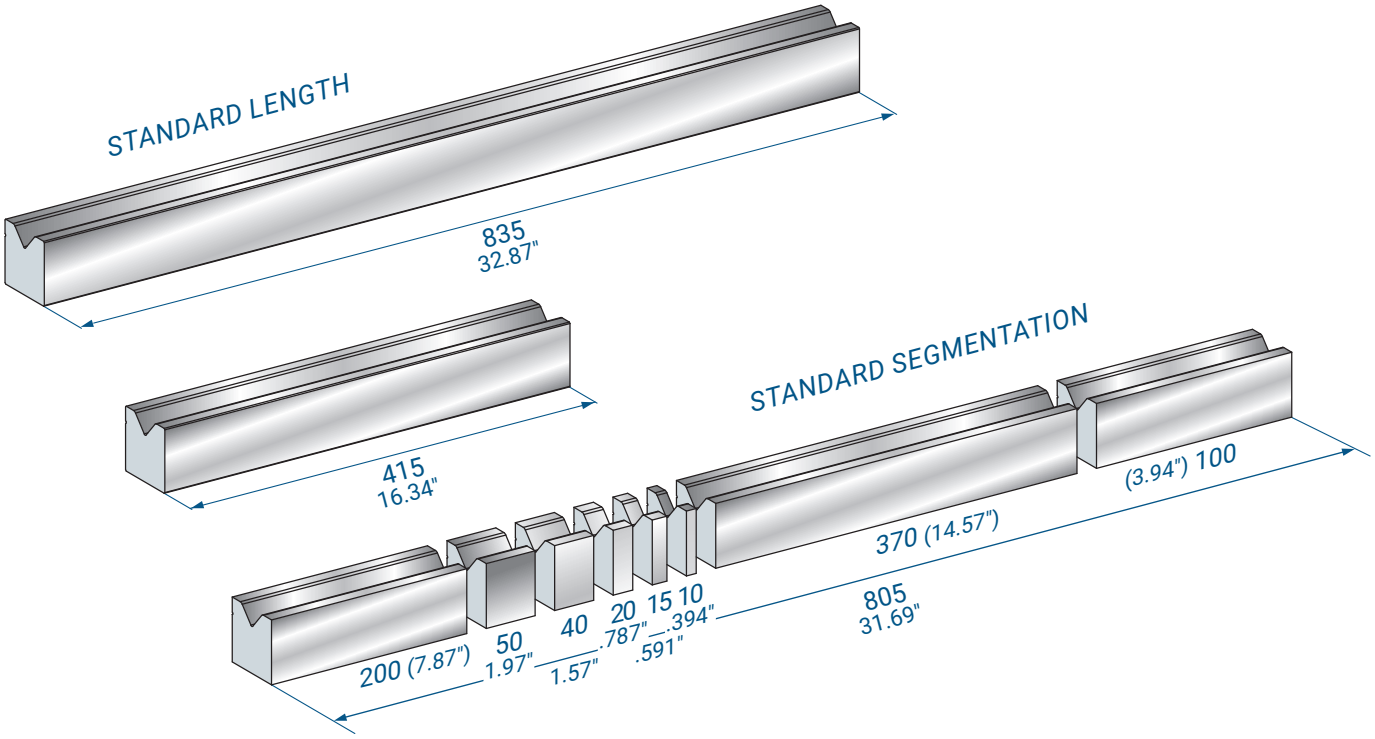


INDUCTION HARDENED



INDUCTION HARDENED




INDUCTION HARDENED



INDUCTION HARDENED





INDUCTION HARDENED




MODIFICATIONS ON REQUEST

SPECIAL SEGMENTATION

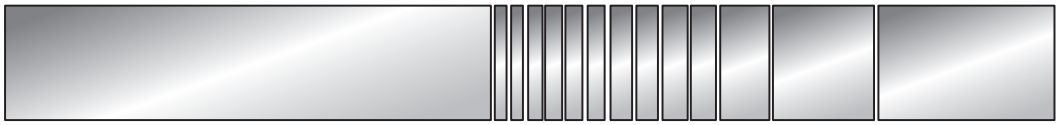

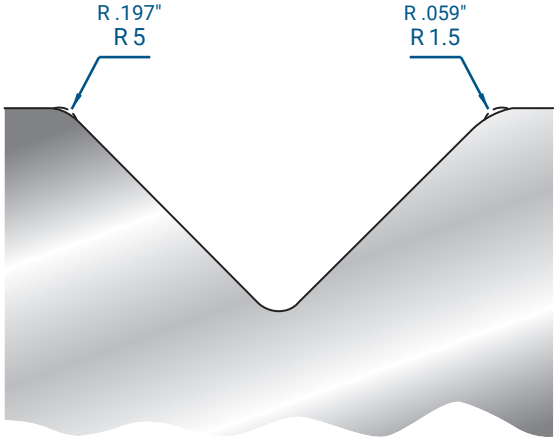


RADIUS MODIFICATION

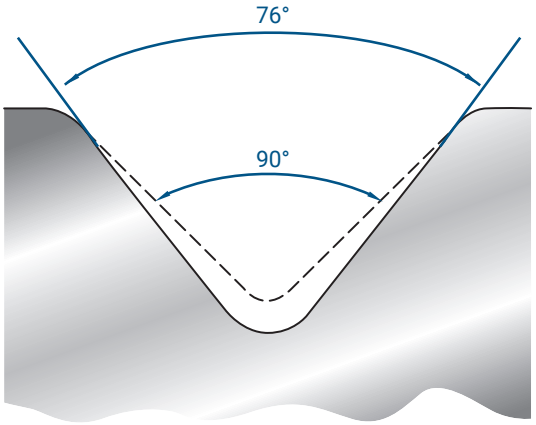

ANGLE MODIFICATION




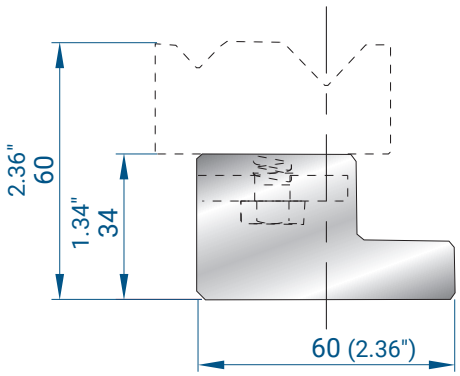

2018

Mat = C45


830 mm	9.3 kg	32.68"	20.5 lb
410 mm	4.6 kg	16.14"	10.1 lb

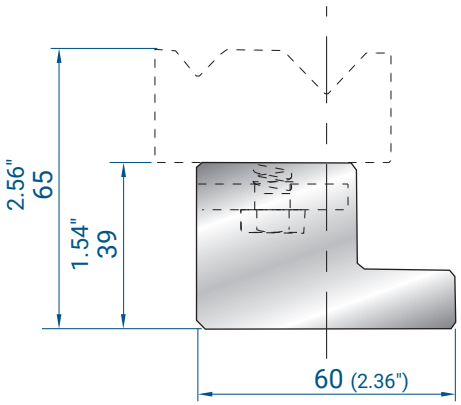

2039

Mat = C45


830 mm	10.4 kg	32.68"	22.9 lb
410 mm	5.1 kg	16.14"	11.2 lb

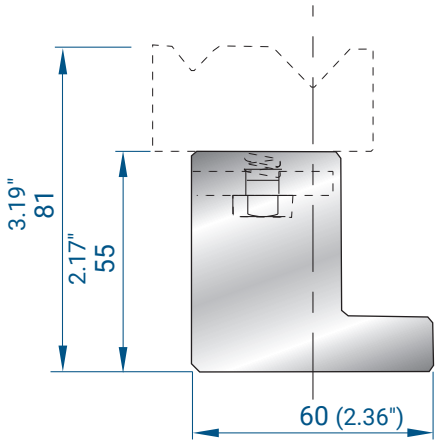

2019

Mat = C45


830 mm	13.2 kg	32.68"	29.1 lb
410 mm	6.5 kg	16.14"	14.3 lb

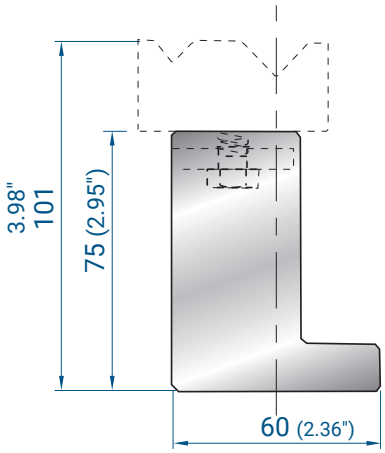

2035

Mat = C45

830 mm	18.0 kg	32.68"	39.7 lb
410 mm	8.9 kg	16.14"	19.6 lb



4277


SPRING + WASHER + SCREW

DIE HOLDERS FOR SELF CENTERING DIES

DIE HOLDERS FOR SELF-CENTERING DIES

MUST BE INSTALLED ON SUPPORT MODEL:


2018 - 2019 -2035 - 2039

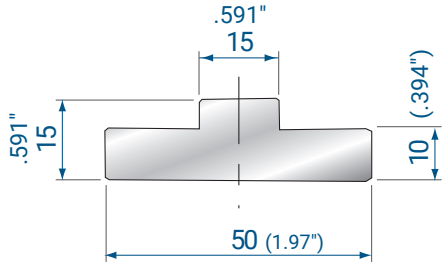

2058

Mat = C45

830 mm	3.7 kg	32.68"	8.2 lb
410 mm	1.8 kg	16.14"	4.0 lb

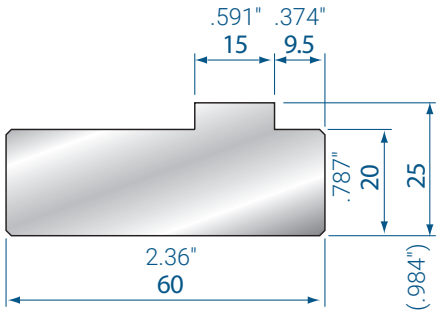


2059

Mat = C45

830 mm	8.3 kg
410 mm	4.1 kg

32.68"	18.3 lb
16.14"	9.0 lb

FIXED BAR FOR SELF-CENTERING DIES

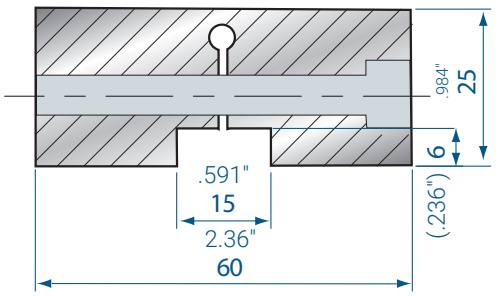


2060


Mat = C45

15 mm	0.2 kg	.59"	0.4 lb

ASSEMBLY EXAMPLE



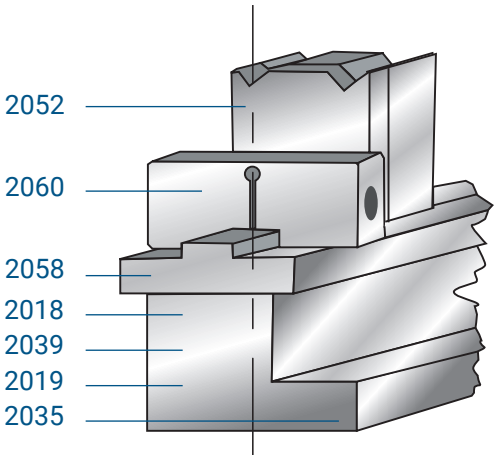


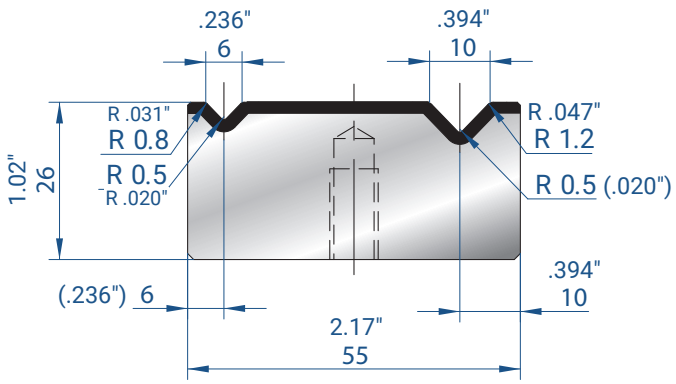

2046

835 mm	9.1 kg	32.87"	20.1 lb
415 mm	4.5 kg	16.34"	9.9 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°

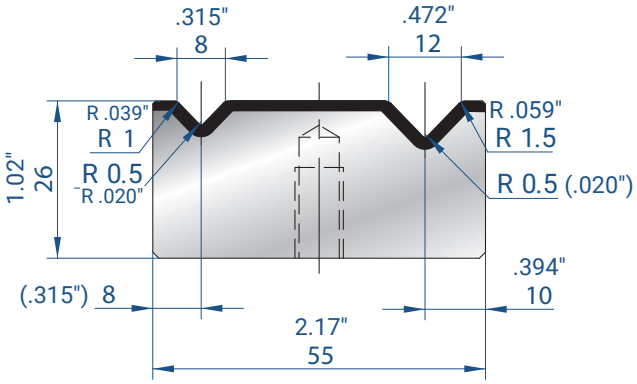

2041

835 mm	9.0 kg	32.87"	19.8 lb
415 mm	4.5 kg	16.34"	9.9 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°

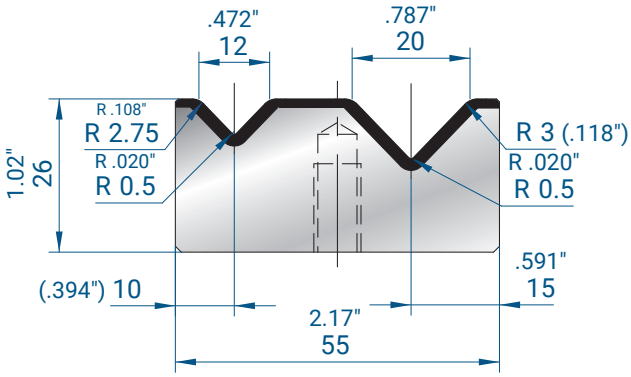

2013

835 mm	8.4 kg	32.87"	18.5 lb
415 mm	4.2 kg	16.34"	9.3 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°

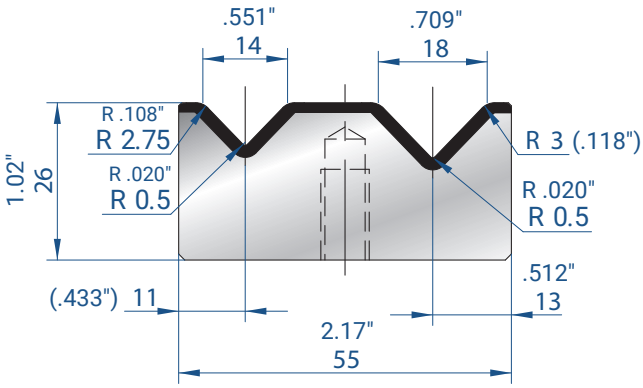

2032

32.87"	18.5 lb		
16.34"	9.3 lb		
835 mm	8.4 kg		
415 mm	4.2 kg		

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°

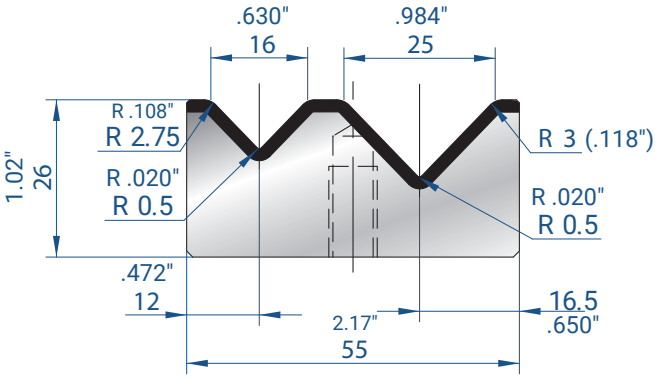


2014

835 mm	7.8 kg		
415 mm	3.9 kg		
32.87"	17.2 lb		
16.34"	8.6 lb		

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°


2V DIES - 60°

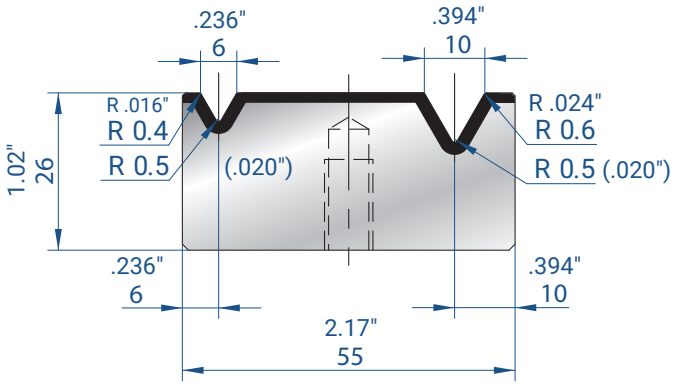

2015

835 mm	8.9 kg	32.87"	19.6 lb
415 mm	4.4 kg	16.34"	9.7 lb


Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°

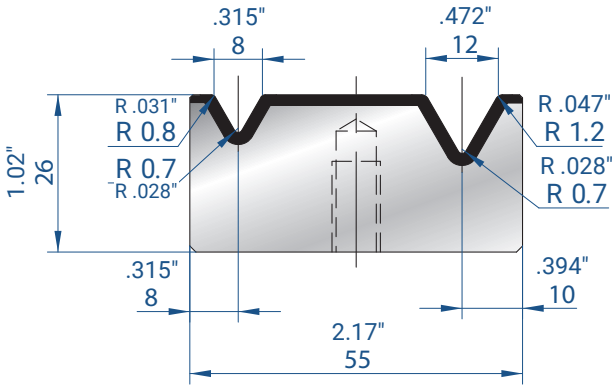

2016

835 mm	8.7 kg	32.87"	19.2 lb
415 mm	4.3 kg	16.34"	9.5 lb


Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°

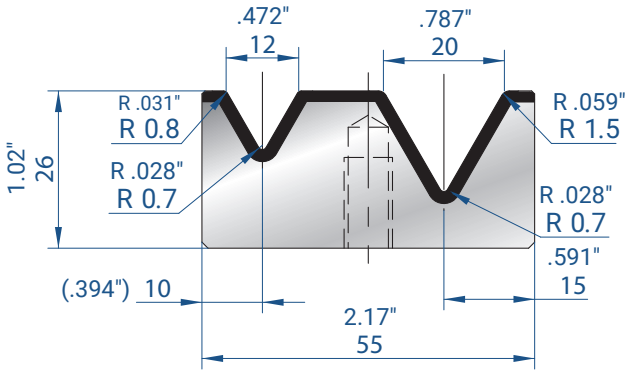

2033

835 mm	7.8 kg	32.87"	17.2 lb
415 mm	3.9 kg	16.34"	8.6 lb

Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°

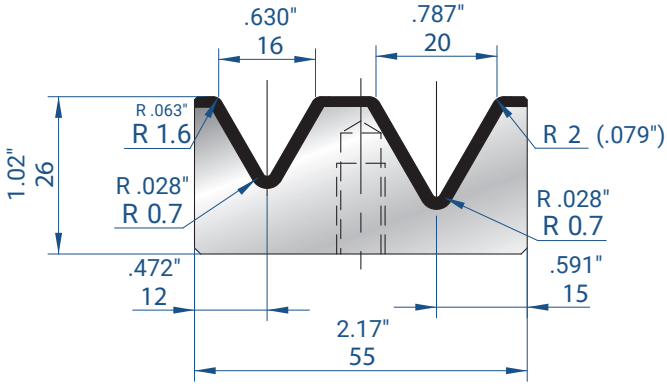


2017

835 mm	7.5 kg	32.87"	16.5 lb
415 mm	3.7 kg	16.34"	8.2 lb

Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°


2V DIES - 30°

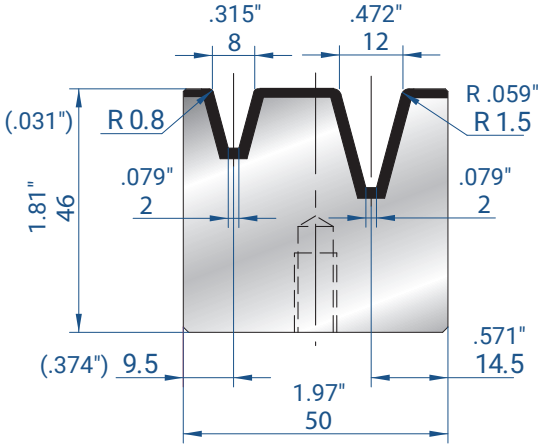

2047

835 mm	13.8 kg	32.87"	30.4 lb
415 mm	6.9 kg	16.34"	15.2 lb


Mat = C45
Max T/m = 40
Max US t/ft = 13.4
α = 30°

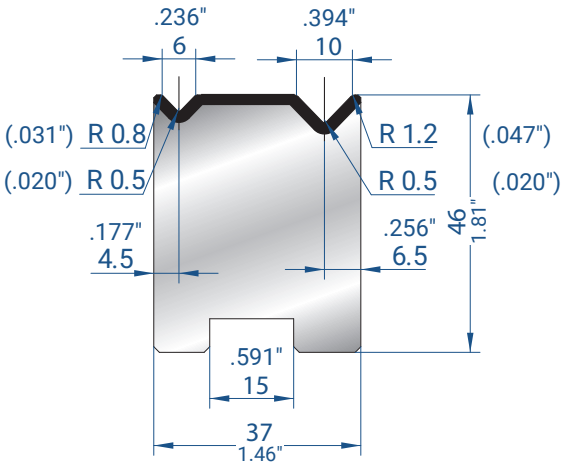

2050

835 mm	10.3 kg	32.87"	22.7 lb
415 mm	5.1 kg	16.34"	11.2 lb
805 mm SECTIONED	9.9 kg	31.69" SECTIONED	21.8 lb


Mat = C45
Max T/m = 80
Max US t/ft = 26.9
α = 88°

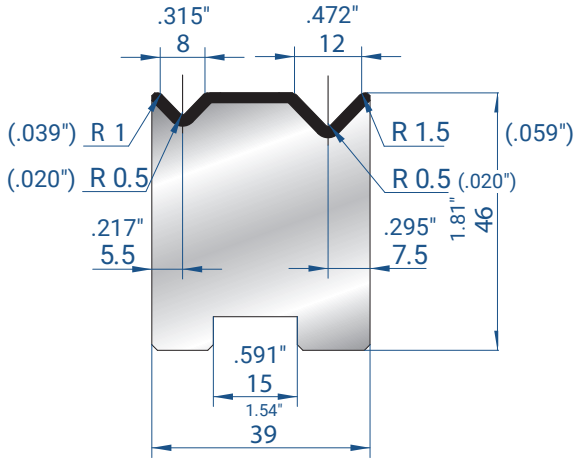

2052

835 mm	10.8 kg	32.87"	23.8 lb
415 mm	5.4 kg	16.34"	11.9 lb
805 mm SECTIONED	10.4 kg	31.69" SECTIONED	22.9 lb


Mat = C45
Max T/m = 80
Max US t/ft = 26.9
α = 88°

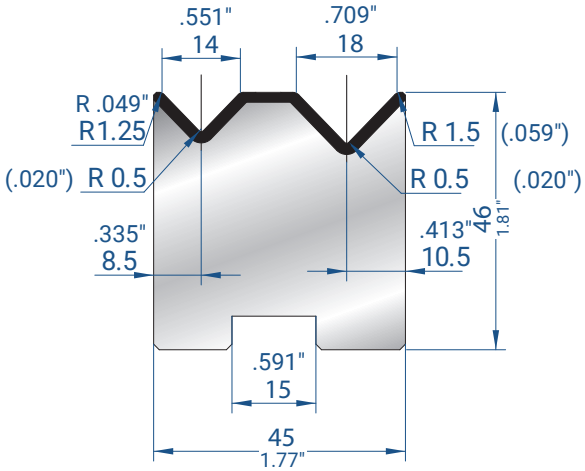

2053

835 mm	12.1 kg	32.87"	26.7 lb
415 mm	6.0 kg	16.34"	13.2 lb
805 mm SECTIONED	11.6 kg	31.69" SECTIONED	25.6 lb


Mat = C45
Max T/m = 80
Max US t/ft = 26.9
α = 88°

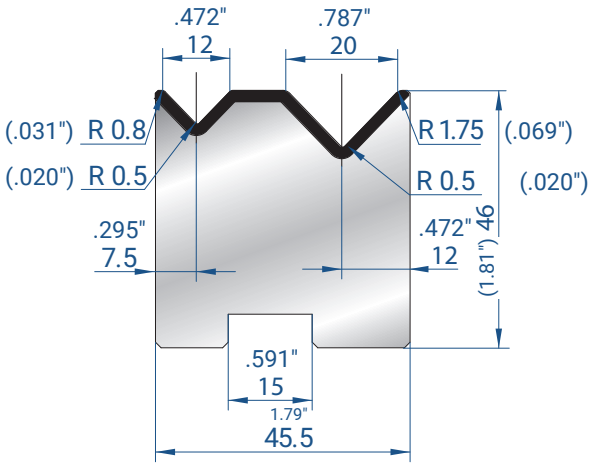

2054

835 mm	12.1 kg	32.87"	26.7 lb
415 mm	6.0 kg	16.34"	13.2 lb
805 mm SECTIONED	11.7 kg	31.69" SECTIONED	25.8 lb

Mat = C45
Max T/m = 80
Max US t/ft = 26.9
α = 88°

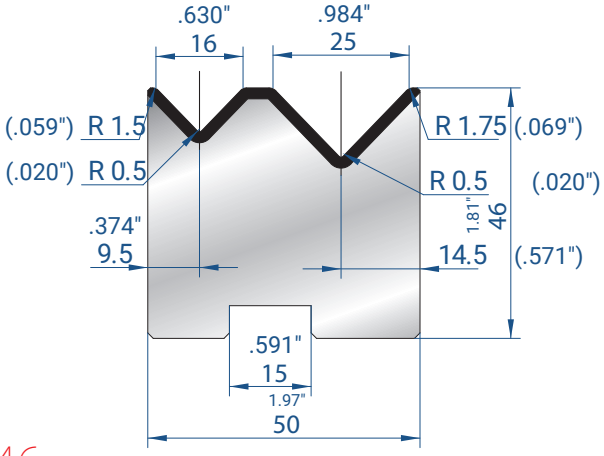



2055

835 mm	13.0 kg	32.87"	28.7 lb
415 mm	6.4 kg	16.34"	14.1 lb
805 mm SECTIONED	12.5 kg	31.69" SECTIONED	27.6 lb

Mat = C45
Max T/m = 80
Max US t/ft = 26.9
α = 88°

2V SELF-CENTERING DIES - 30°

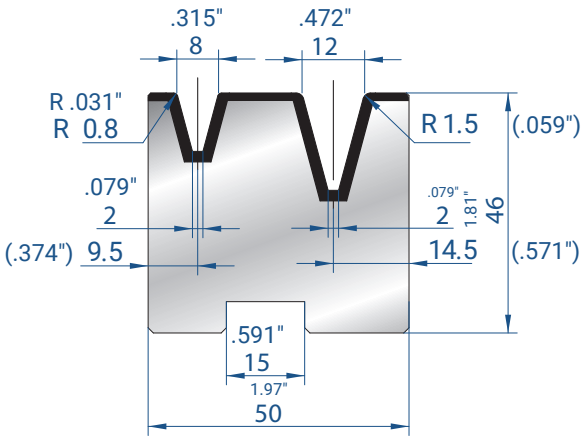

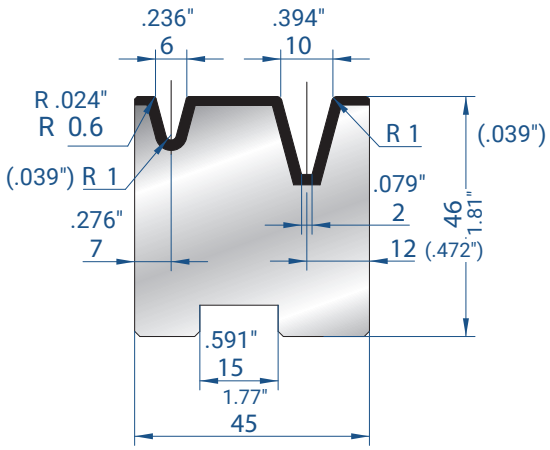

2056

Mat = C45
Max T/m = 40
Max US t/ft = 13.4
α = 30°


835 mm	13.2 kg	32.87"	29.1 lb
415 mm	6.6 kg	16.34"	14.6 lb
805 mm SECTIONED	12.7 kg	31.69" SECTIONED	28.0 lb

2057

Mat = C45
Max T/m = 40
Max US t/ft = 13.4
α = 30°

835 mm	12.1 kg	32.87"	26.7 lb
415 mm	6.0 kg	16.34"	13.2 lb
805 mm SECTIONED	11.7 kg	31.69" SECTIONED	25.8 lb


3U DIES

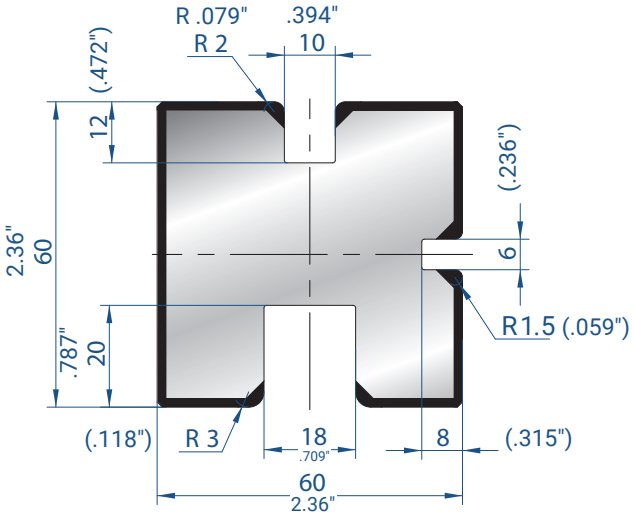


2031

Mat = C45
Max T/m = 100
Max US t/ft = 33.6

835 mm	20.0 kg	32.87"	44.1 lb
415 mm	10.0 kg	16.34"	22.0 lb
805 mm SECTIONED	19.3 kg	31.69" SECTIONED	42.5 lb

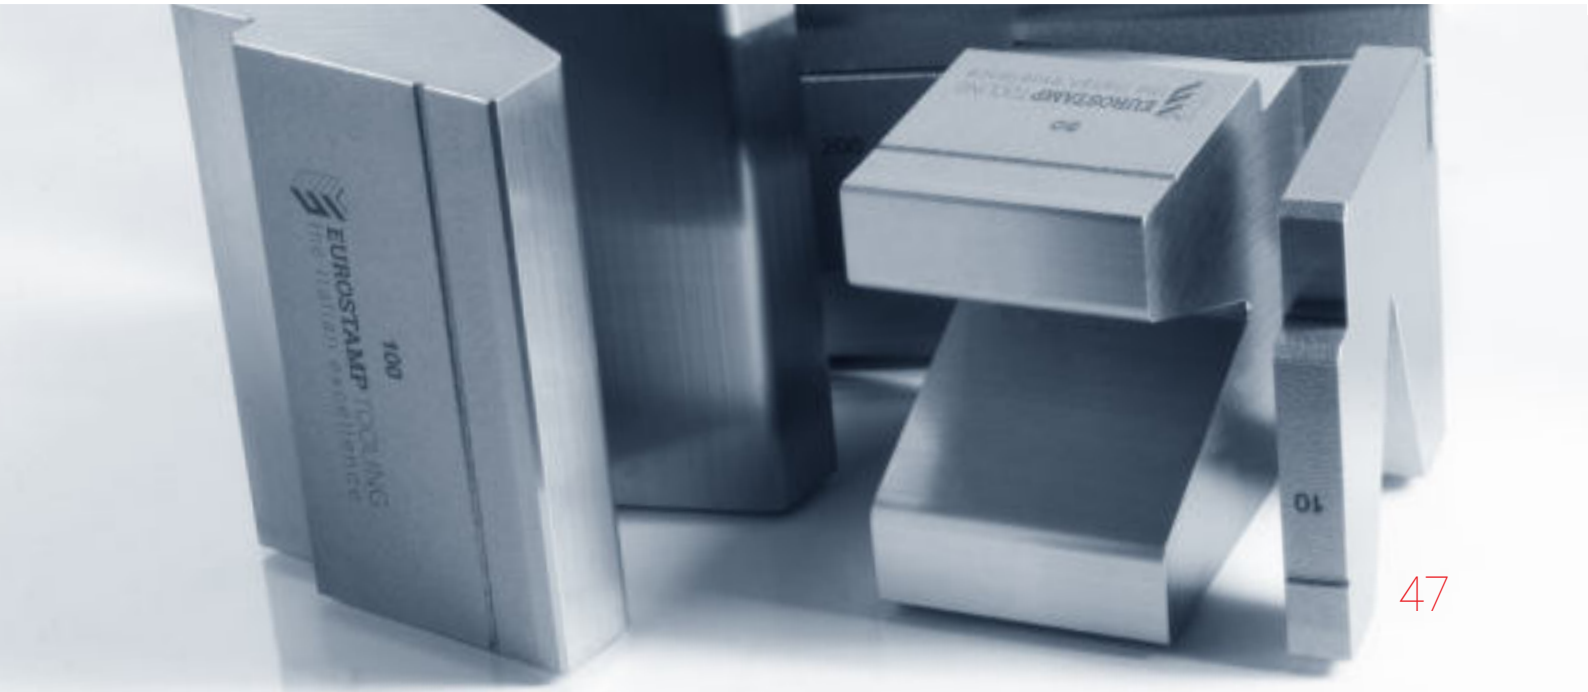

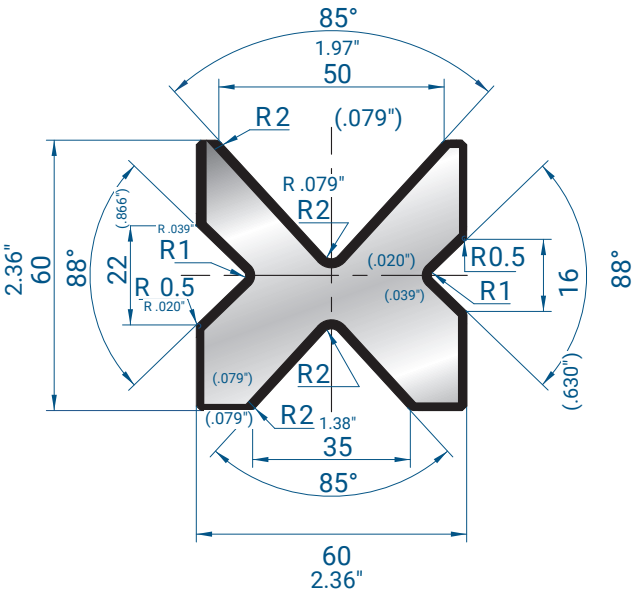


2030

Mat = C45
Max T/m = 80
Max US t/ft = 26.9
α = 85° - 88°

835 mm	15.7 kg
415 mm	7.8 kg
805 mm SECTIONED	15.1 kg


32.87"	34.6 lb
16.34"	17.2 lb
31.69" SECTIONED	33.3 lb

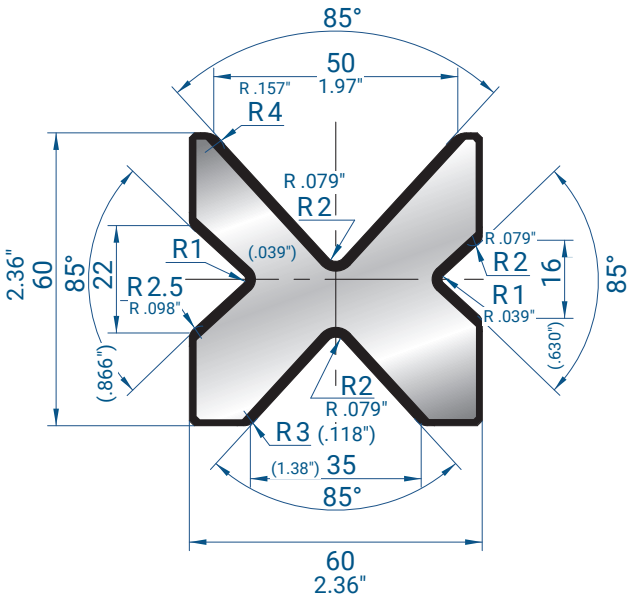

2067

Mat = C45
Max T/m = 80
Max US t/ft = 26.9
α = 85°


835 mm	15.6 kg	32.87"	34.4 lb
415 mm	7.7 kg	16.34"	17.0 lb
805 mm SECTIONED	15.0 kg	31.69" SECTIONED	33.1 lb

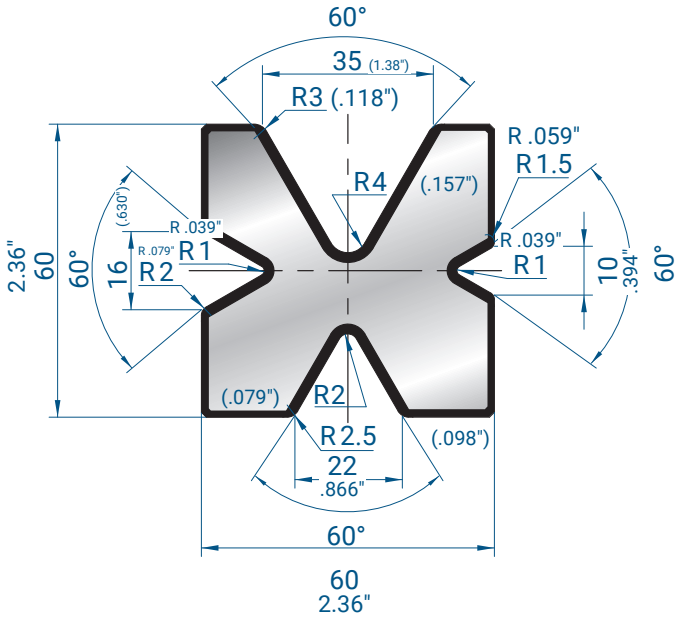

2034

Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°


835 mm	17.8 kg	32.87"	39.2 lb
415 mm	8.8 kg	16.34"	19.4 lb
805 mm SECTIONED	17.1 kg	31.69" SECTIONED	37.7 lb

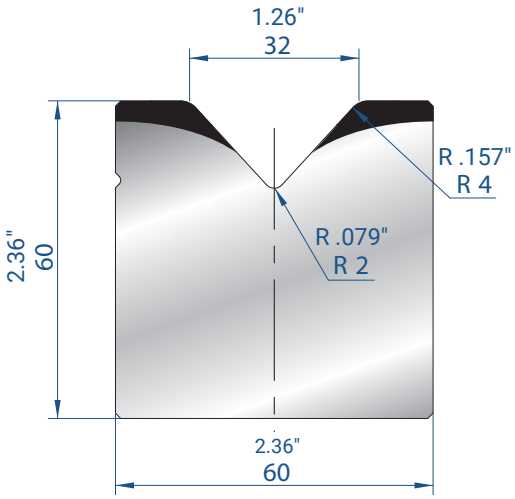

2020

835 mm	21.7 kg	32.87"	47.8 lb
415 mm	10.8 kg	16.34"	23.8 lb
805 mm SECTIONED	20.9 kg	31.69" SECTIONED	46.1 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 85°

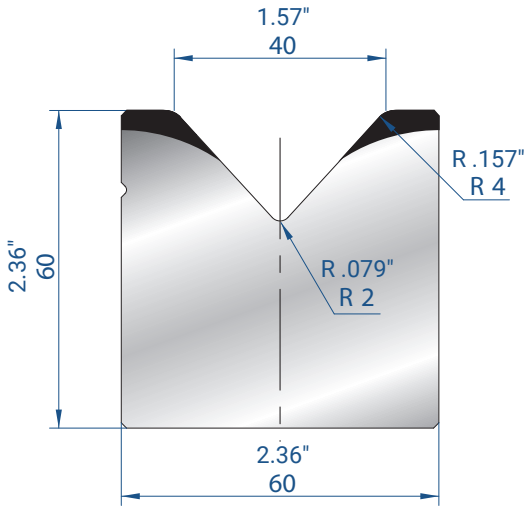

2021

835 mm	20.7 kg	32.87"	45.6 lb
415 mm	10.3 kg	16.34"	22.7 lb
805 mm SECTIONED	19.9 kg	31.69" SECTIONED	43.9 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 85°

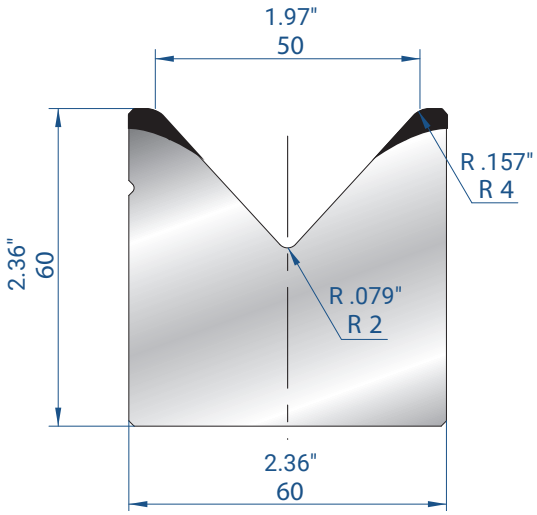

2022

835 mm	19.1 kg	32.87"	42.1 lb
415 mm	9.5 kg	16.34"	20.9 lb
805 mm SECTIONED	18.4 kg	31.69" SECTIONED	40.6 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 85°

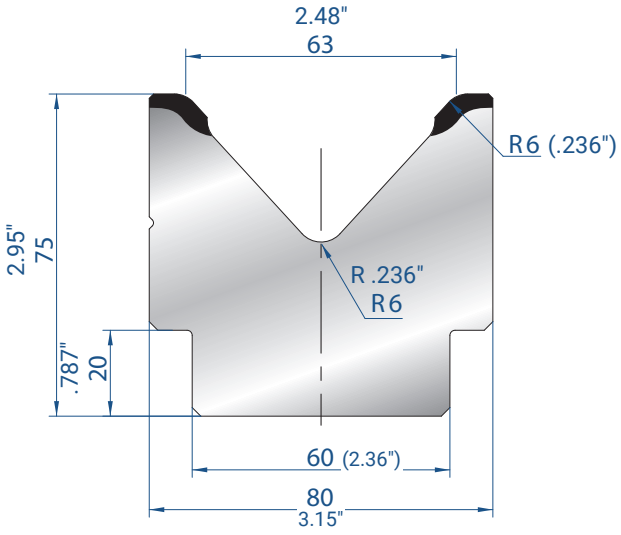

2023

835 mm	28.5 kg	32.87"	62.8 lb
415 mm	14.2 kg	16.34"	31.3 lb
805 mm SECTIONED	27.5 kg	31.69" SECTIONED	60.6 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 85°

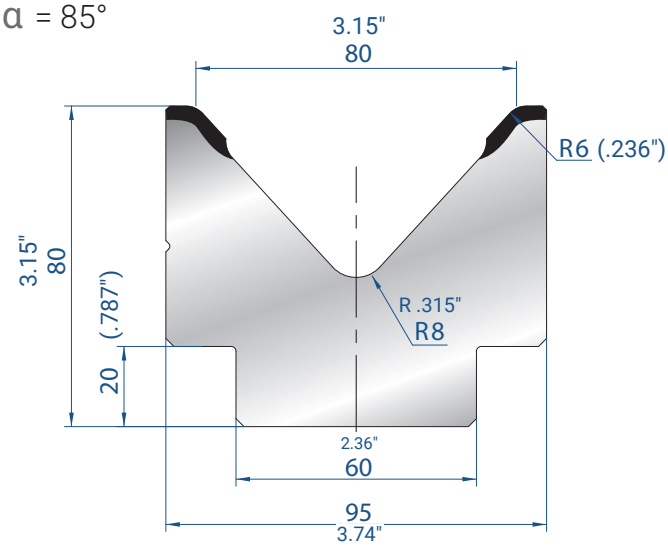

2024

835 mm	32.5 kg	32.87"	71.7 lb
415 mm	16.1 kg	16.34"	35.5 lb
805 mm SECTIONED	31.3 kg	31.69" SECTIONED	69.0 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 85°

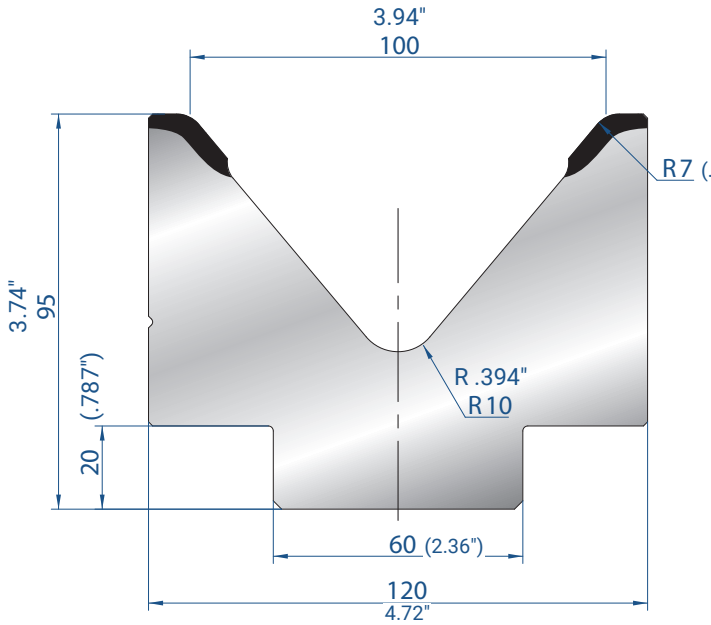

2025

Mat = C45
Max T/m = 120
Max US t/ft = 40.3
α = 80°


835 mm	45.7 kg	32.87"	101 lb
415 mm	22.7 kg	16.34"	50.0 lb
805 mm SECTIONED	44.1 kg	31.69" SECTIONED	97.2 lb

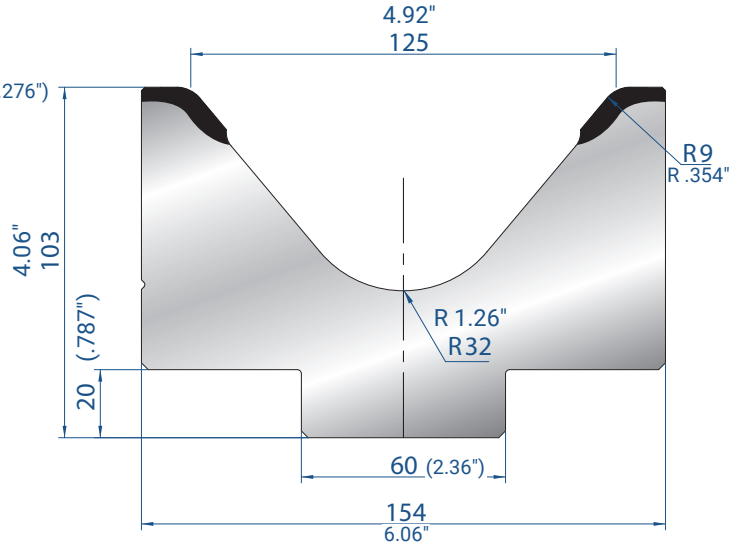

2026

Mat = C45
Max T/m = 120
Max US t/ft = 40.3
α = 80°

835 mm	60.9 kg	32.87"	134 lb
415 mm	30.3 kg	16.34"	66.8 lb
805 mm SECTIONED	58.7 kg	31.69" SECTIONED	129 lb

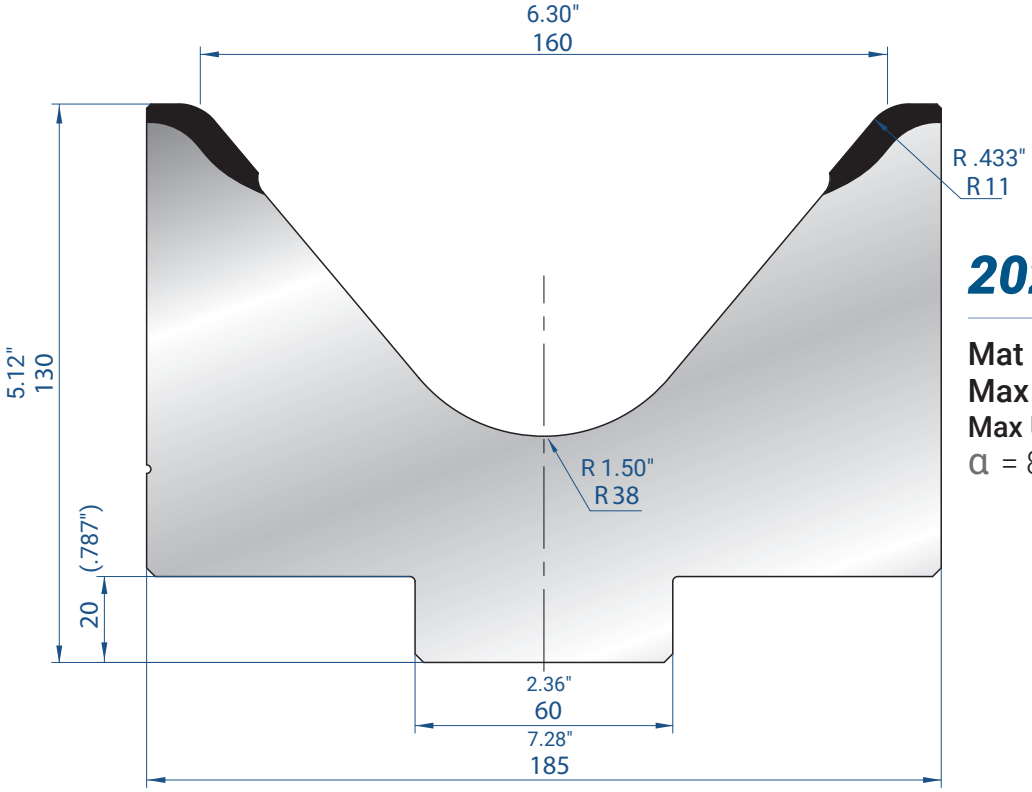


2027

Mat = C45
Max T/m = 120
Max US t/ft = 40.3
α = 80°

835 mm	91.3 kg
415 mm	45.4 kg
805 mm SECTIONED	88.0 kg


32.87"	201 lb
16.34"	100 lb
31.69" SECTIONED	194 lb



8106

32.87"	6.4 lb
835 mm	2.9 kg

SQUARE BAR 15 × 15 MM (.59 × .59")

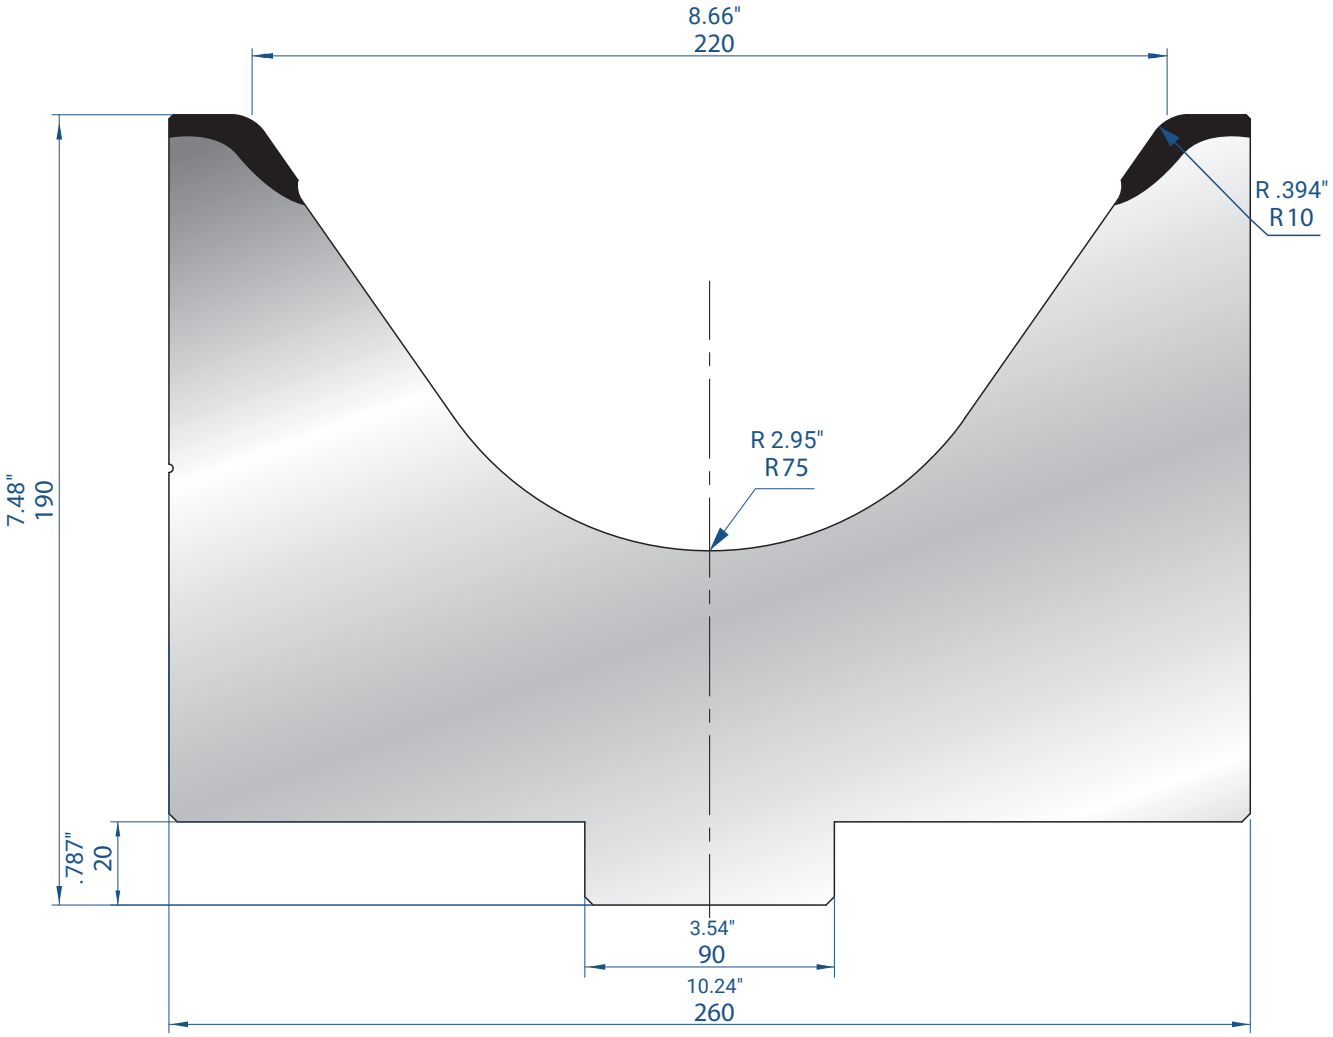


7290

505 mm	121.2 kg	19.88"	267 lb

Mat = C45

tempered
Max T/m = 200
Max US t/ft = 67.2
α = 70°


AVAILABLE ONLY
LENGTH 505 MM (19.88")

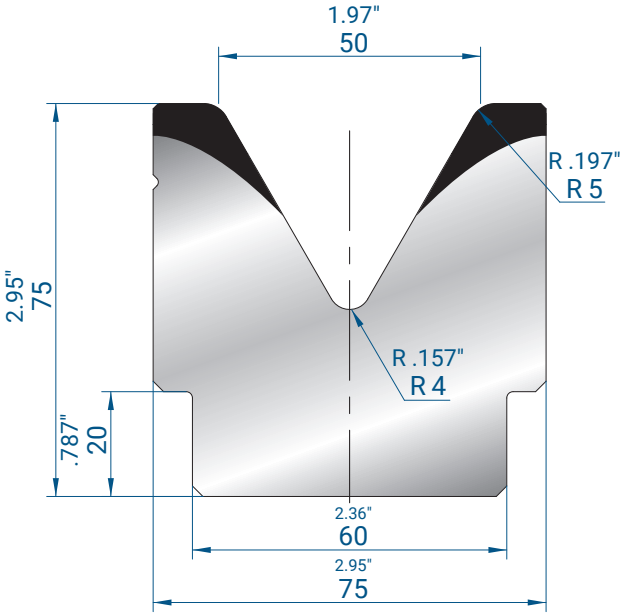

2082

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 60°

835 mm	27.7 kg	32.87"	61.1 lb
415 mm	13.8 kg	16.34"	30.4 lb
805 mm SECTIONED	26.7 kg	31.69" SECTIONED	58.9 lb

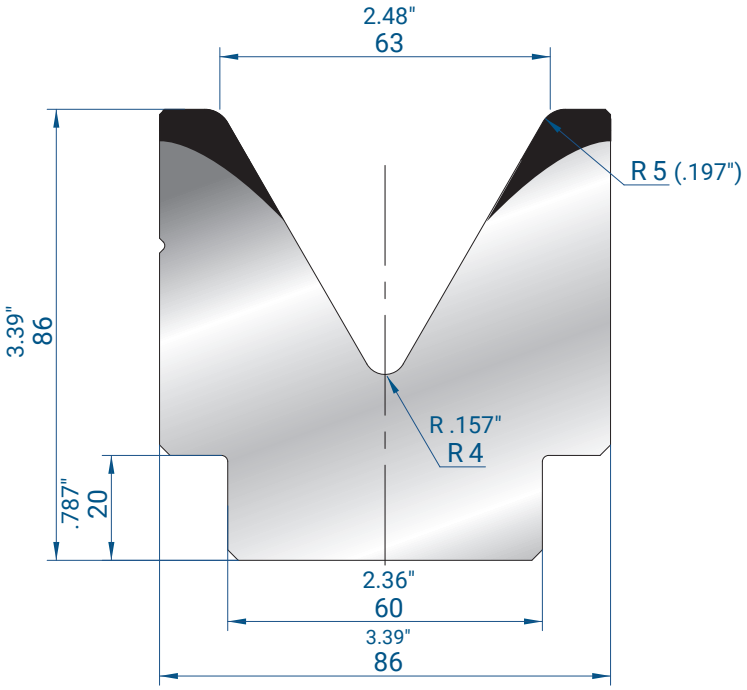


2083

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 60°

835 mm	33.7 kg
415 mm	16.8 kg
805 mm SECTIONED	32.5 kg

32.87"	74.3 lb
16.34"	37.0 lb
31.69" SECTIONED	71.7 lb

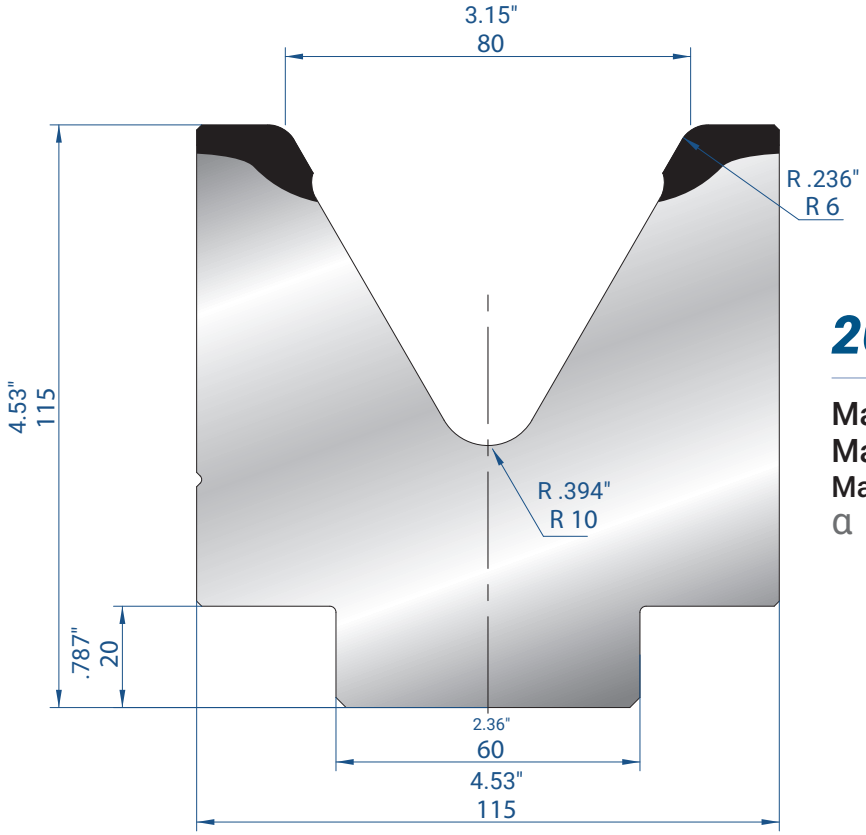


2089

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 60°

835 mm	59.7 kg
415 mm	29.7 kg
805 mm SECTIONED	57.6 kg


32.87"	132 lb
16.34"	65.5 lb
31.69" SECTIONED	127 lb

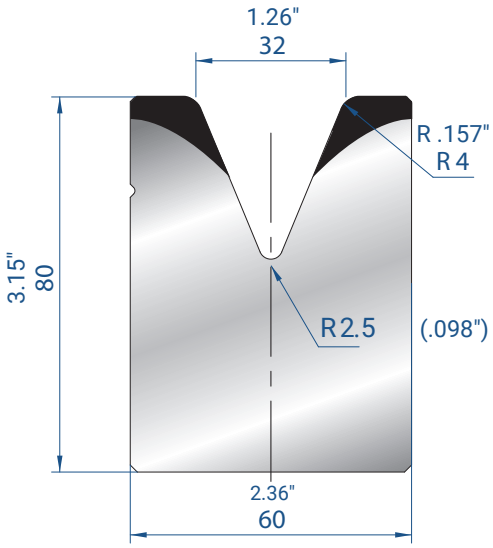

2088

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 45°


835 mm	27.4 kg	32.87"	60.4 lb
415 mm	13.6 kg	16.34"	30.0 lb
805 mm SECTIONED	26.4 kg	31.69" SECTIONED	58.2 lb

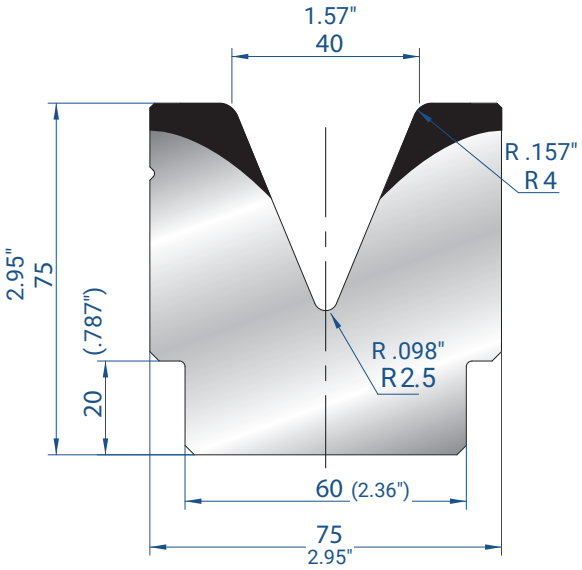

2081

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 45°


835 mm	28.5 kg	32.87"	62.8 lb
415 mm	14.2 kg	16.34"	31.3 lb
805 mm SECTIONED	27.5 kg	31.69" SECTIONED	60.6 lb

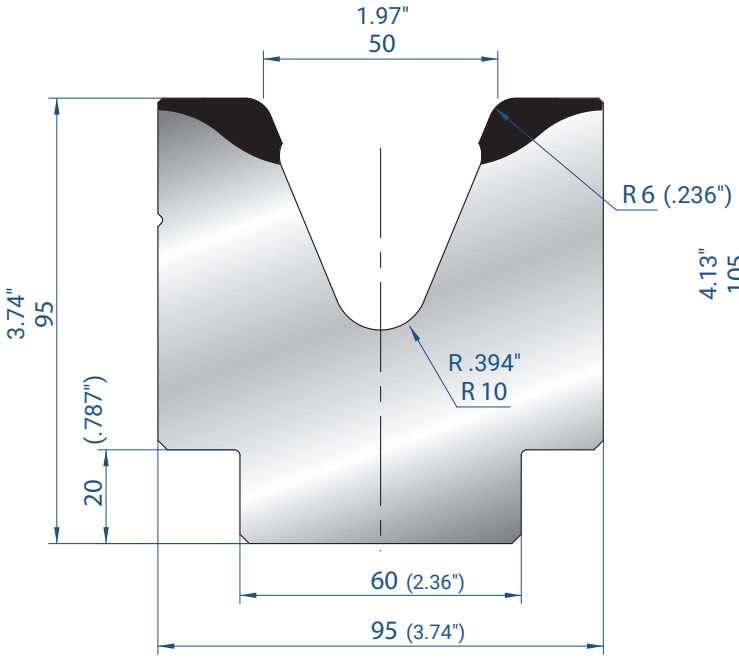

2118

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 45°

835 mm	43.8 kg	32.87"	96.6 lb
415 mm	21.8 kg	16.34"	48.1 lb
805 mm SECTIONED	42.2 kg	31.69" SECTIONED	93.0 lb

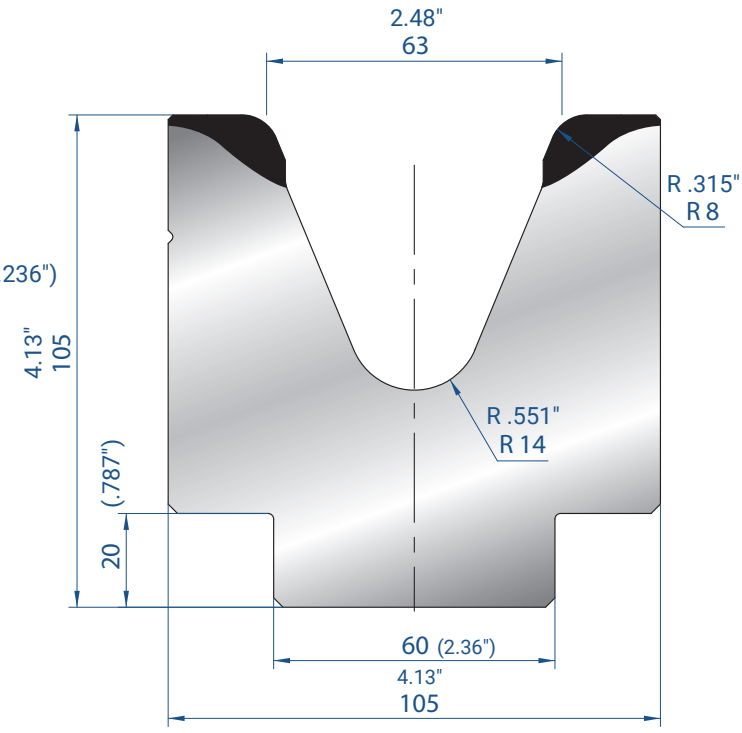


2117

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 45°

835 mm	50.1 kg	32.87"	110 lb
415 mm	24.9 kg	16.34"	54.9 lb
805 mm SECTIONED	48.3 kg	31.69" SECTIONED	106 lb

1V DIES - 45°

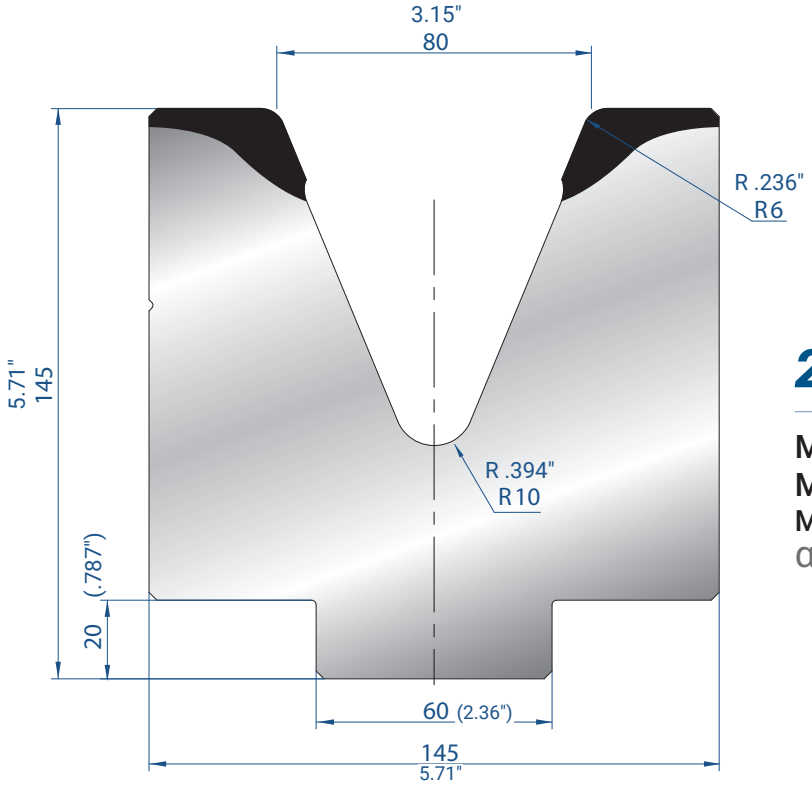



2084

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 45°

835 mm	99.6 kg	32.87"	220 lb
415 mm	49.5 kg	16.34"	109 lb
805 mm SECTIONED	96.0 kg	31.69" SECTIONED	212 lb

1V DIES - 30°

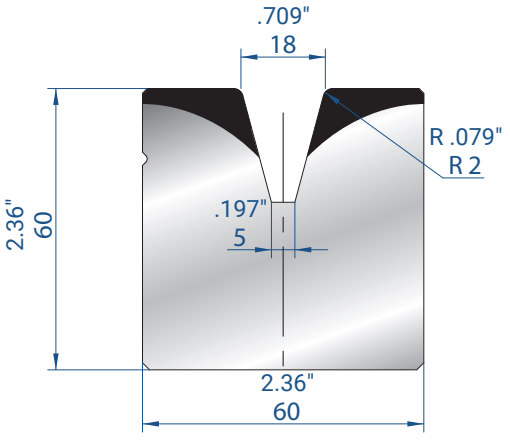

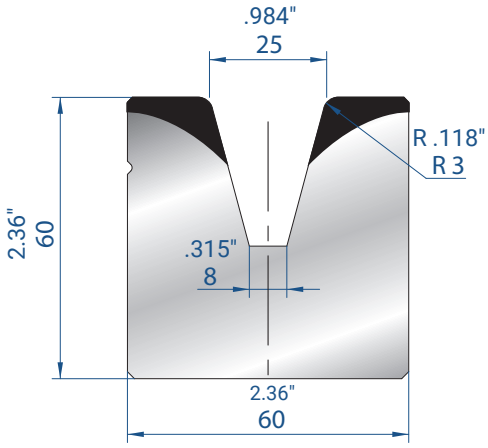

2086

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 30°


835 mm	21.7 kg	32.87"	47.8 lb
415 mm	10.8 kg	16.34"	23.8 lb
805 mm SECTIONED	20.9 kg	31.69" SECTIONED	46.1 lb

2087

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 30°

835 mm	20.1 kg	32.87"	44.3 lb
415 mm	10.0 kg	16.34"	22.0 lb
805 mm SECTIONED	19.4 kg	31.69" SECTIONED	42.8 lb



EUROSTAMP

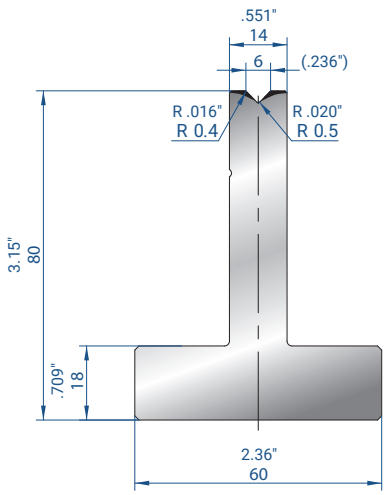

3080

835 mm 32.87"	12.7 kg 28.0 lb
415 mm 16.34"	6.3 kg 13.9 lb
805 mm 31.69" SECTIONED	12.2 kg 26.9 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°

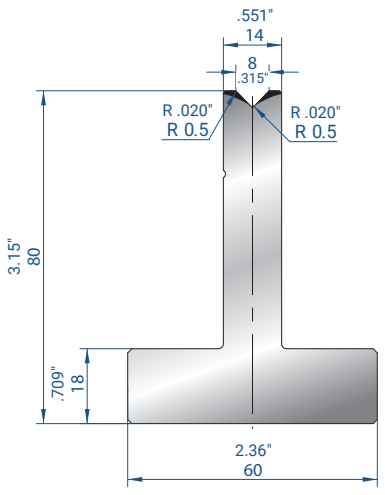

3081

835 mm 32.87"	12.6 kg 27.8 lb
415 mm 16.34"	6.3 kg 13.9 lb
805 mm 31.69" SECTIONED	12.2 kg 26.9 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°

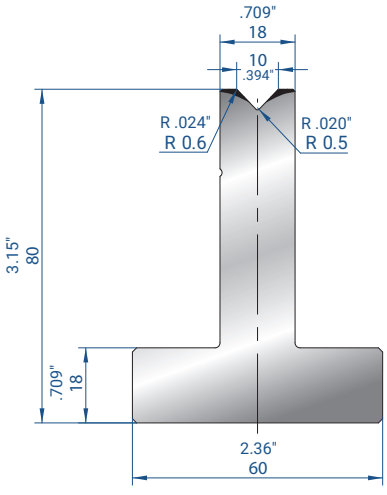

3082

835 mm 32.87"	14.2 kg 31.3 lb
415 mm 16.34"	7.0 kg 15.4 lb
805 mm 31.69" SECTIONED	13.7 kg 30.2 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°

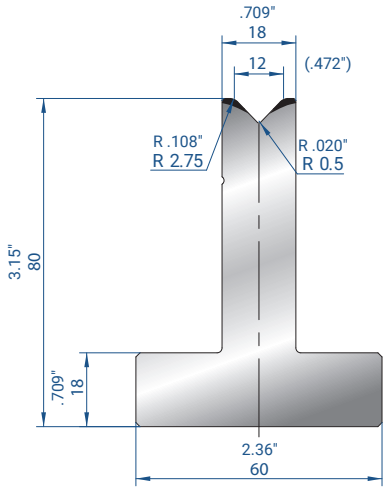

3015

835 mm 32.87"	14.1 kg 31.1 lb
415 mm 16.34"	7.0 kg 15.4 lb
805 mm 31.69" SECTIONED	13.6 kg 30.0 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°

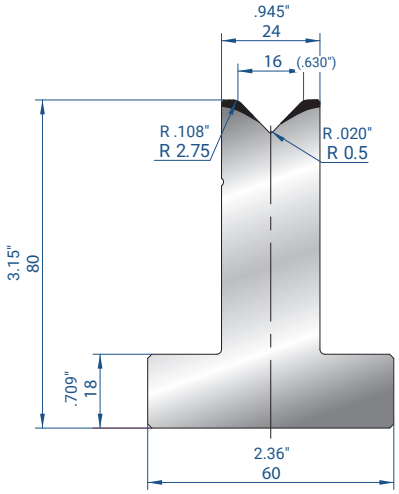

3016

835 mm 32.87"	16.3 kg 35.9 lb
415 mm 16.34"	8.1 kg 17.9 lb
805 mm 31.69" SECTIONED	15.8 kg 34.8 lb

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°

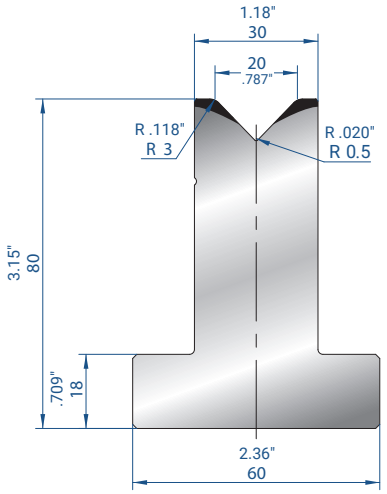

3017


835 mm 32.87"	18.5 kg 40.8 lb
415 mm 16.34"	9.2 kg 20.3 lb
805 mm 31.69" SECTIONED	17.9 kg 39.5 lb

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°


3018

835 mm 32.87"	20.2 kg 44.5 lb
415 mm 16.34"	10.0 kg 22.0 lb
805 mm 31.69" SECTIONED	19.5 kg 43.0 lb

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°

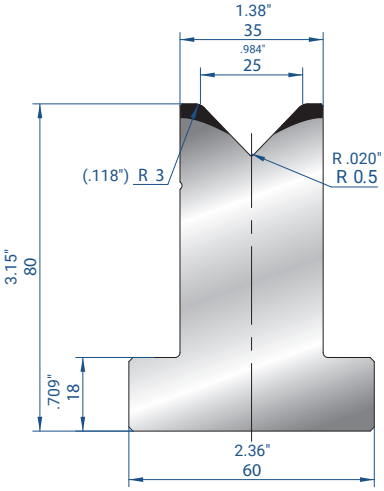


T DIES H80 - 85°

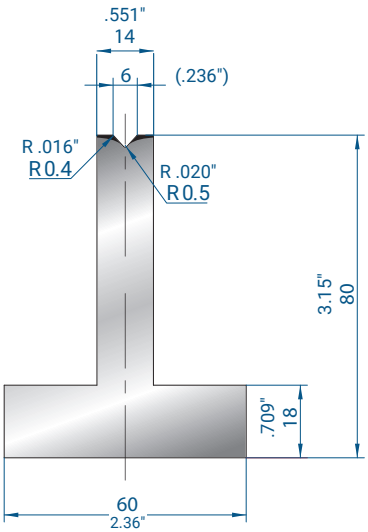

3086

835 mm 32.87"	12.7 kg 28.0 lb
415 mm 16.34"	6.3 kg 13.9 lb
805 mm 31.69" SECTIONED	12.2 kg 26.9 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 85°

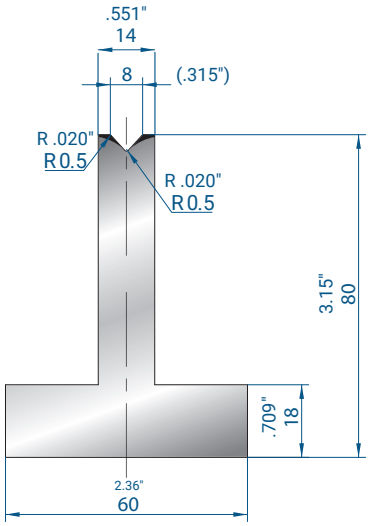

3087

835 mm 32.87"	12.6 kg 27.8 lb
415 mm 16.34"	6.3 kg 13.9 lb
805 mm 31.69" SECTIONED	12.2 kg 26.9 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 85°

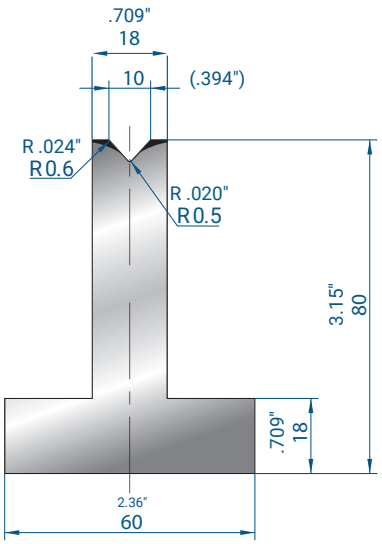

3088

835 mm 32.87"	14.2 kg 31.3 lb
415 mm 16.34"	7.0 kg 15.4 lb
805 mm 31.69" SECTIONED	13.7 kg 30.2 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 85°

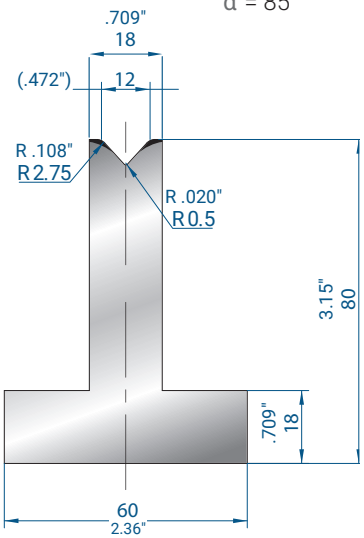

3089

835 mm 32.87"	14.1 kg 31.1 lb
415 mm 16.34"	7.0 kg 15.4 lb
805 mm 31.69" SECTIONED	13.6 kg 30.0 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 85°

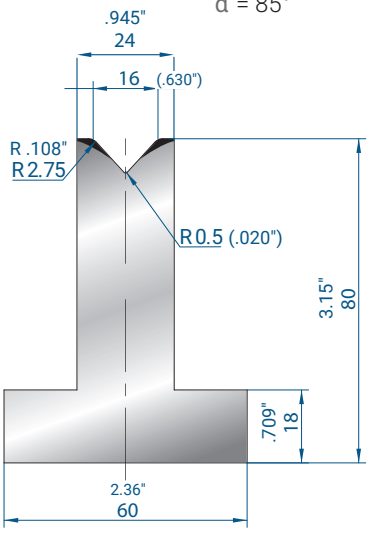

3090

835 mm 32.87"	16.3 kg 35.9 lb
415 mm 16.34"	8.1 kg 17.9 lb
805 mm 31.69" SECTIONED	15.7 kg 34.6 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 85°

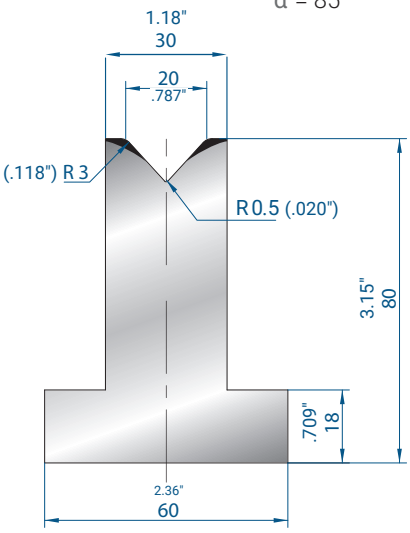

3091

835 mm 32.87"	18.5 kg 40.8 lb
415 mm 16.34"	9.2 kg 20.3 lb
805 mm 31.69" SECTIONED	17.8 kg 39.2 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 85°

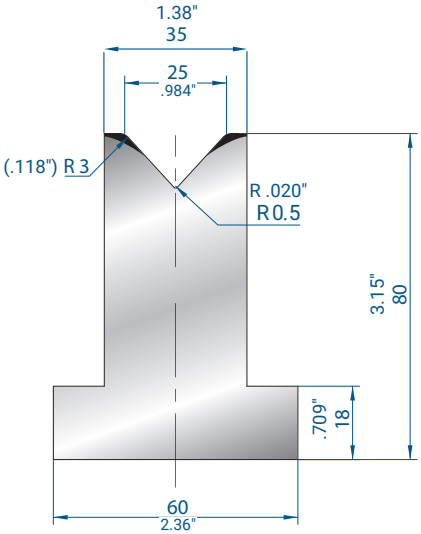

3092

835 mm 32.87"	20.1 kg 44.3 lb
415 mm 16.34"	10.0 kg 22.0 lb
805 mm 31.69" SECTIONED	19.4 kg 42.8 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 85°

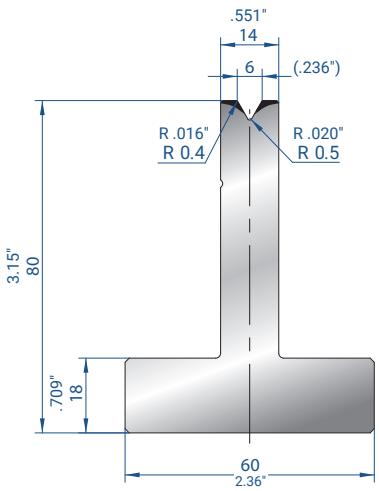

3019

835 mm 32.87"	12.6 kg 27.8 lb
415 mm 16.34"	6.3 kg 13.9 lb
805 mm 31.69" SECTIONED	12.2 kg 26.9 lb


Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°

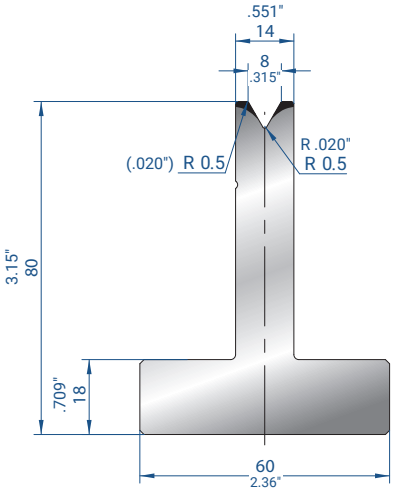

3020

835 mm 32.87"	12.5 kg 27.6 lb
415 mm 16.34"	6.2 kg 13.7 lb
805 mm 31.69" SECTIONED	12.1 kg 26.7 lb


Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°

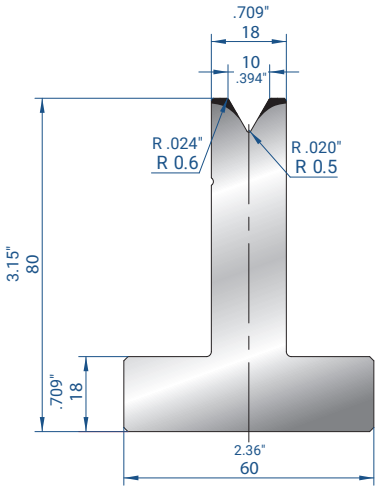

3021

835 mm 32.87"	14.1 kg 31.1 lb
415 mm 16.34"	7.0 kg 15.4 lb
805 mm 31.69" SECTIONED	13.6 kg 30.0 lb


Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°

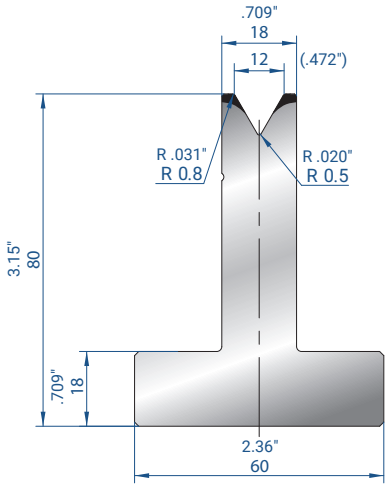

3022

835 mm 32.87"	13.9 kg 30.6 lb
415 mm 16.34"	6.9 kg 15.2 lb
805 mm 31.69" SECTIONED	13.4 kg 29.5 lb


Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°

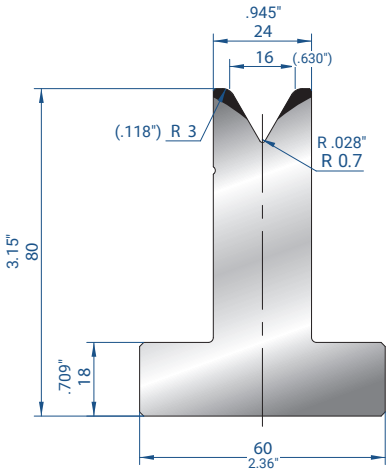

3023

835 mm 32.87"	16.1 kg 35.5 lb
415 mm 16.34"	8.0 kg 17.6 lb
805 mm 31.69" SECTIONED	15.5 kg 34.2 lb

Mat = C45
Max T/m = 75
Max US t/ft = 25.2
α = 60°

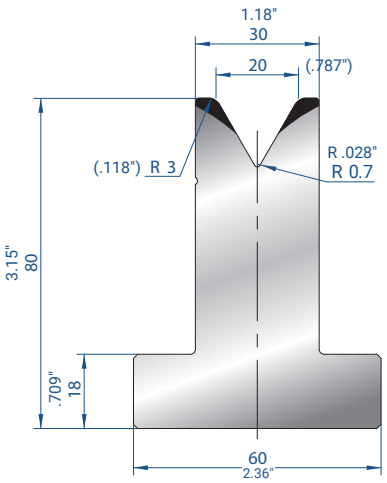

3024

835 mm 32.87"	18.1 kg 39.9 lb
415 mm 16.34"	9.0 kg 19.8 lb
805 mm 31.69" SECTIONED	17.4 kg 38.4 lb


Mat = C45
Max T/m = 70
Max US t/ft = 23.5
α = 60°




3025

835 mm 32.87"	19.5 kg 43.0 lb
415 mm 16.34"	9.7 kg 21.4 lb
805 mm 31.69" SECTIONED	18.8 kg 41.4 lb

Mat = C45
Max T/m = 65
Max US t/ft = 21.8
α = 60°

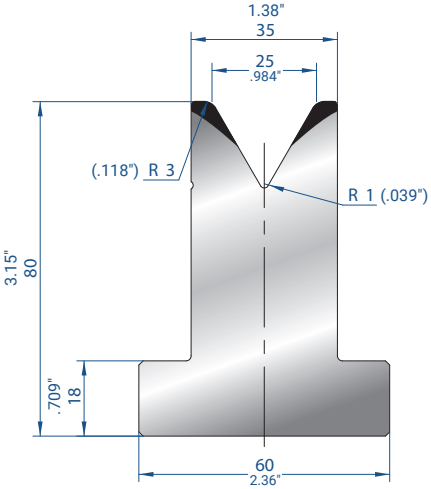


T DIES H80 - 45°

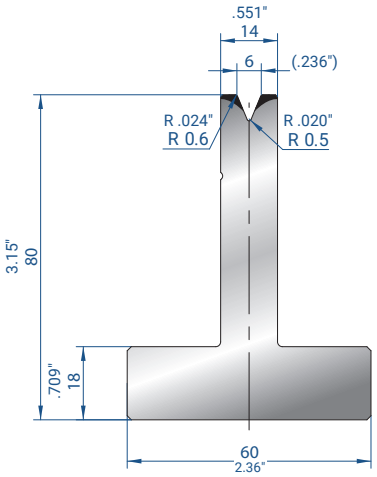

3026

835 mm 32.87"	12.6 kg 27.8 lb
415 mm 16.34"	6.3 kg 13.9 lb
805 mm 31.69" SECTIONED	12.1 kg 26.7 lb


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 45°

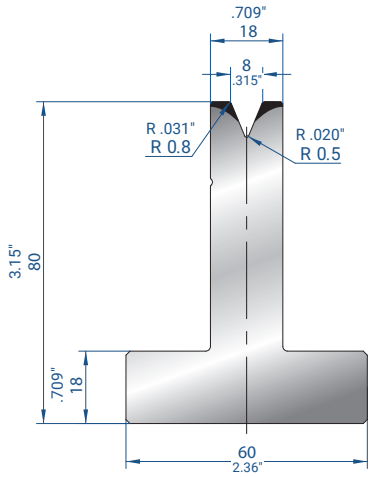

3027

835 mm 32.87"	14.1 kg 31.1 lb
415 mm 16.34"	7.0 kg 15.4 lb
805 mm 31.69" SECTIONED	13.6 kg 30.0 lb


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 45°

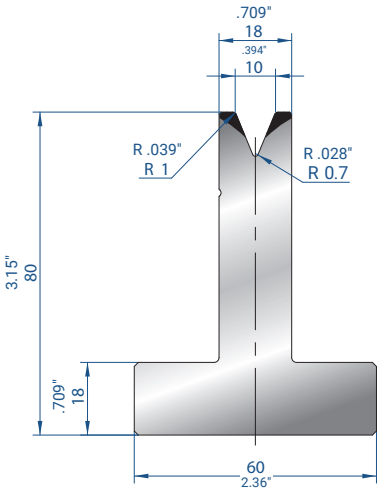

3028

835 mm 32.87"	14.0 kg 30.9 lb
415 mm 16.34"	6.9 kg 15.2 lb
805 mm 31.69" SECTIONED	13.5 kg 29.8 lb


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 45°

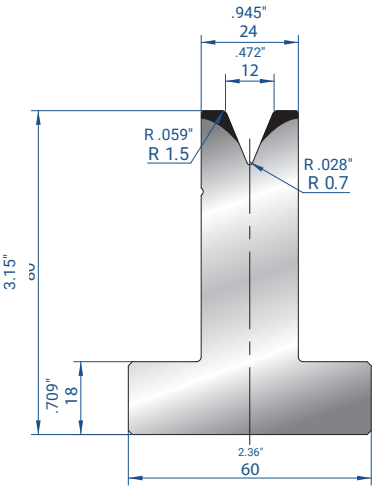

3029

835 mm 32.87"	16.2 kg 35.7 lb
415 mm 16.34"	8.1 kg 17.9 lb
805 mm 31.69" SECTIONED	15.6 kg 34.4 lb


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 45°

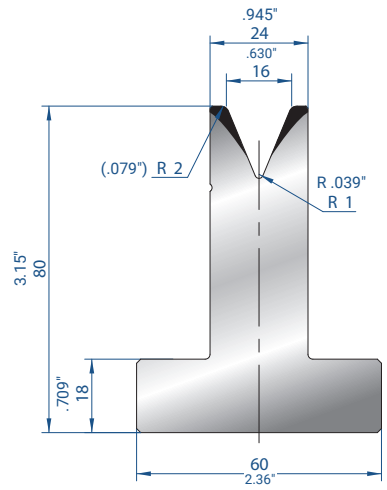

3030

835 mm 32.87"	15.8 kg 34.8 lb
415 mm 16.34"	7.8 kg 17.2 lb
805 mm 31.69" SECTIONED	15.2 kg 33.5 lb


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 45°

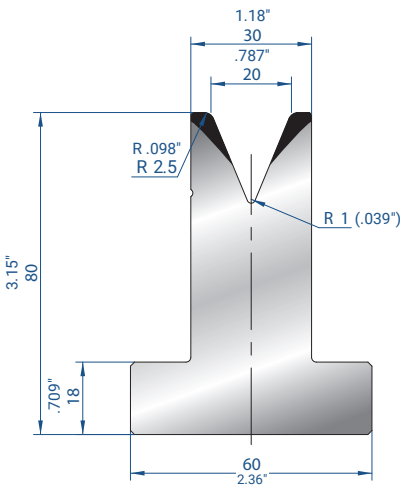

3031

835 mm 32.87"	17.6 kg 38.8 lb
415 mm 16.34"	8.8 kg 19.4 lb
805 mm 31.69" SECTIONED	17.0 kg 37.5 lb


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 45°

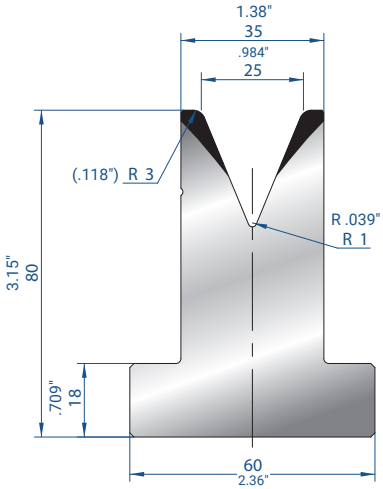

3032

835 mm 32.87"	18.8 kg 41.4 lb
415 mm 16.34"	9.3 kg 20.5 lb
805 mm 31.69" SECTIONED	18.1 kg 39.9 lb


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 45°

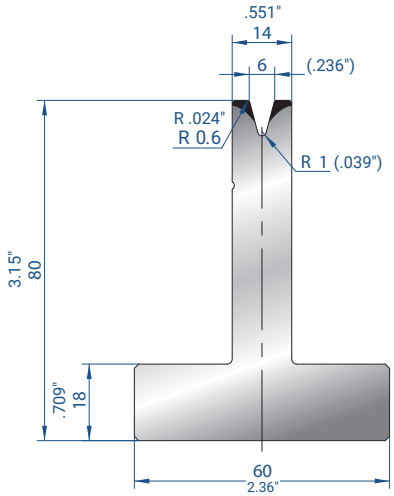

3042

835 mm 32.87"	12.5 kg 27.6 lb
415 mm 16.34"	6.2 kg 13.7 lb
805 mm 31.69" SECTIONED	12.1 kg 26.7 lb


Mat = C45
Max T/m = 35
Max US t/ft = 11.8
α = 30°

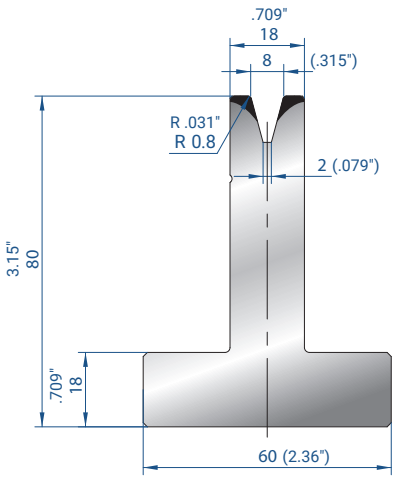

3043

835 mm 32.87"	14.0 kg 30.9 lb
415 mm 16.34"	6.9 kg 15.2 lb
805 mm 31.69" SECTIONED	13.5 kg 29.8 lb


Mat = C45
Max T/m = 40
Max US t/ft = 13.4
α = 30°

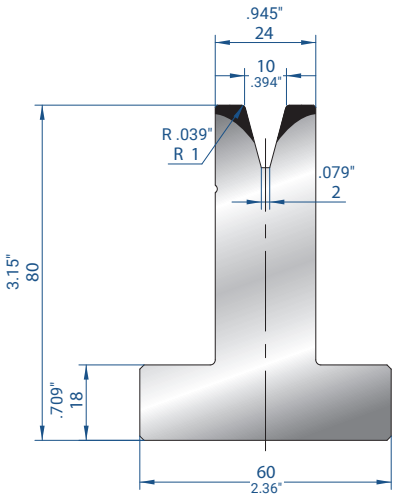

3044

835 mm 32.87"	16.2 kg 35.7 lb
415 mm 16.34"	8.0 kg 17.6 lb
805 mm 31.69" SECTIONED	15.6 kg 34.4 lb


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 30°

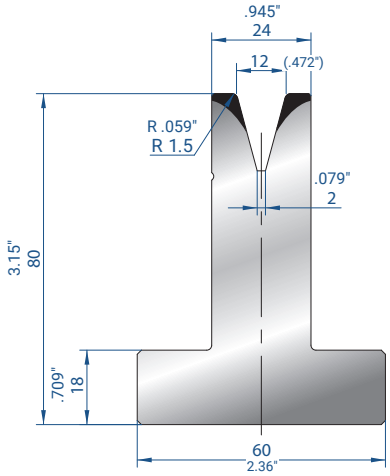

3045

835 mm 32.87"	15.9 kg 35.1 lb
415 mm 16.34"	7.9 kg 17.4 lb
805 mm 31.69" SECTIONED	13.4 kg 29.5 lb


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 30°

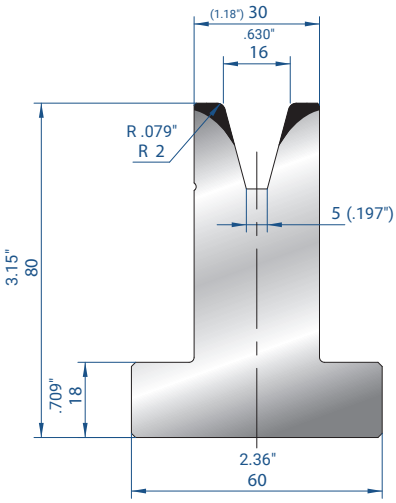

3046

835 mm 32.87"	17.8 kg 39.2 lb
415 mm 16.34"	8.8 kg 19.4 lb
805 mm 31.69" SECTIONED	17.2 kg 37.9 lb


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 30°

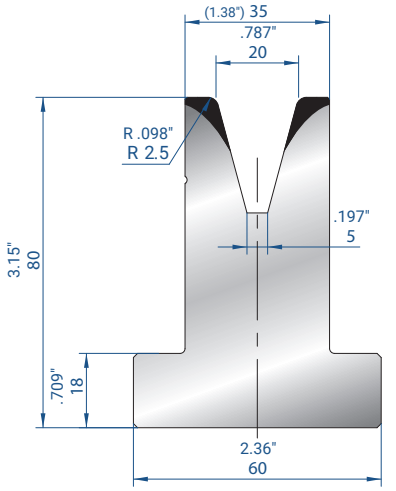

3047

835 mm 32.87"	18.9 kg 41.7 lb
415 mm 16.34"	9.4 kg 20.7 lb
805 mm 31.69" SECTIONED	18.3 kg 40.3 lb

Mat = C45
Max T/m = 55
Max US t/ft = 18.5
α = 30°

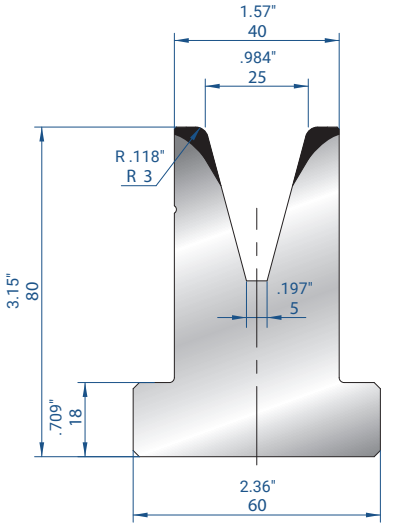


3048

835 mm 32.87"	19.6 kg 43.2 lb
415 mm 16.34"	9.7 kg 21.4 lb
805 mm 31.69" SECTIONED	18.9 kg 41.7 lb

Mat = C45
Max T/m = 55
Max US t/ft = 18.5
α = 30°


T DIES H120 - 88°

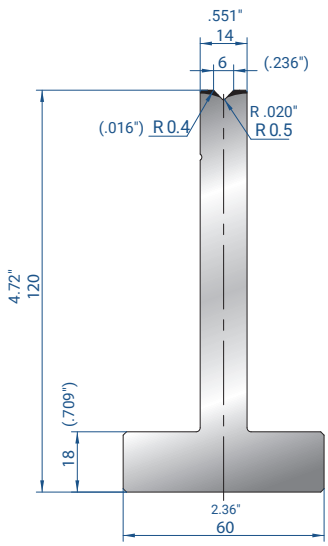

3083

835 mm 32.87"	16.3 kg 35.9 lb
415 mm 16.34"	8.1 kg 17.9 lb
805 mm 31.69" SECTIONED	15.7 kg 34.6 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°

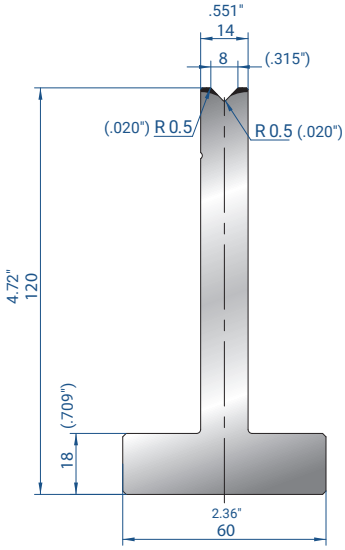

3084

835 mm 32.87"	16.3 kg 35.9 lb
415 mm 16.34"	8.1 kg 17.9 lb
805 mm 31.69" SECTIONED	15.7 kg 34.6 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°

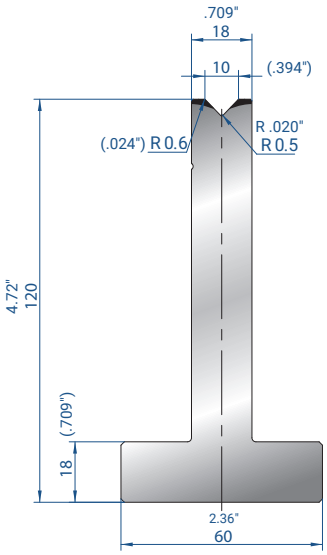

3085

835 mm 32.87"	18.9 kg 41.7 lb
415 mm 16.34"	9.4 kg 20.7 lb
805 mm 31.69" SECTIONED	18.2 kg 40.1 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°

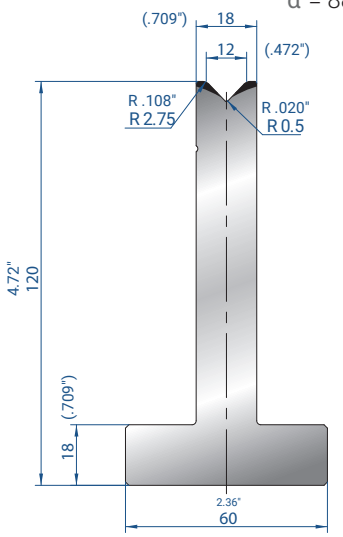

3055

835 mm 32.87"	18.8 kg 41.4 lb
415 mm 16.34"	9.3 kg 20.5 lb
805 mm 31.69" SECTIONED	18.1 kg 39.9 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°

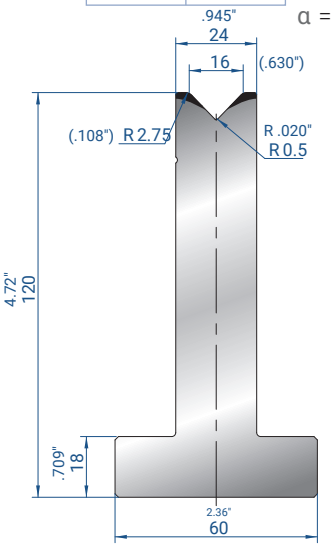

3056

835 mm 32.87"	22.6 kg 49.8 lb
415 mm 16.34"	11.2 kg 24.7 lb
805 mm 31.69" SECTIONED	21.8 kg 48.1 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°

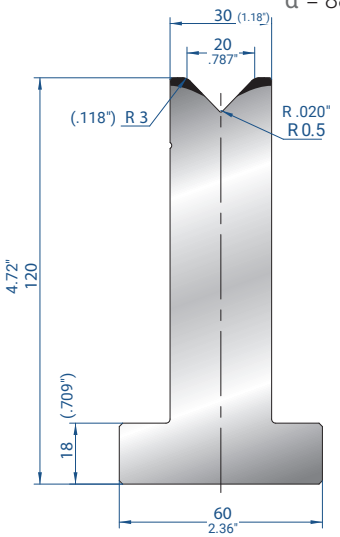

3057

835 mm 32.87"	26.4 kg 58.2 lb
415 mm 16.34"	13.1 kg 28.9 lb
805 mm 31.69" SECTIONED	25.4 kg 56.0 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°

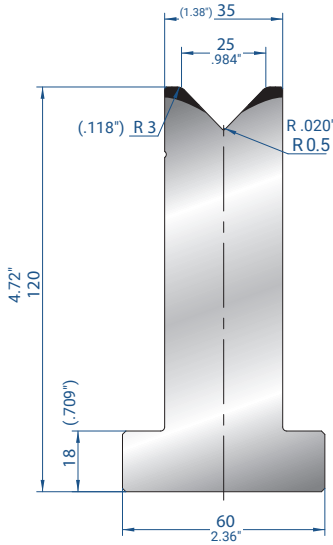

3058

835 mm 32.87"	29.3 kg 64.6 lb
415 mm 16.34"	14.6 kg 32.2 lb
805 mm 31.69" SECTIONED	28.3 kg 62.4 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°

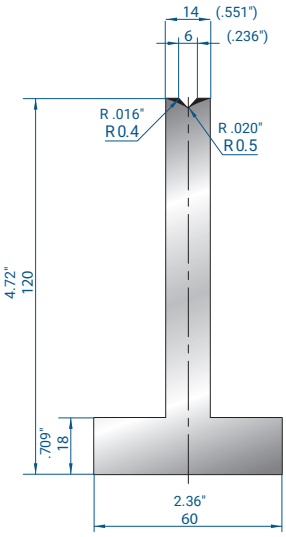

3093

835 mm 32.87"	16.3 kg 35.9 lb
415 mm 16.34"	8.1 kg 17.9 lb
805 mm 31.69" SECTIONED	15.7 kg 34.6 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 85°

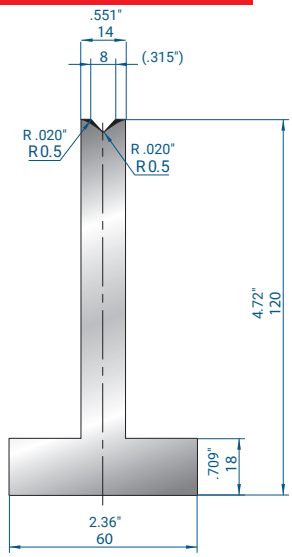

3094

835 mm 32.87"	16.3 kg 35.9 lb
415 mm 16.34"	8.1 kg 17.9 lb
805 mm 31.69" SECTIONED	15.7 kg 34.6 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 85°

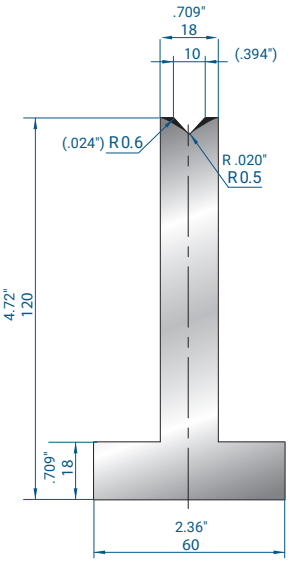

3095

835 mm 32.87"	18.9 kg 41.7 lb
415 mm 16.34"	9.4 kg 20.7 lb
805 mm 31.69" SECTIONED	18.2 kg 40.1 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 85°

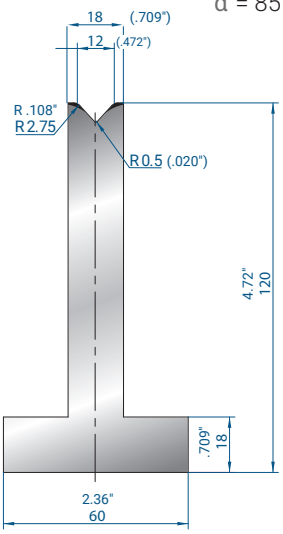

3096

835 mm 32.87"	18.8 kg 41.4 lb
415 mm 16.34"	9.3 kg 20.5 lb
805 mm 31.69" SECTIONED	18.1 kg 39.9 lb


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 85°

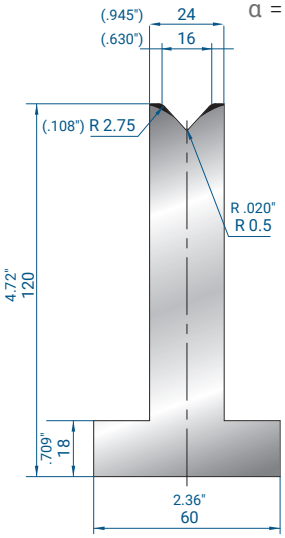

3097

835 mm 32.87"	22.6 kg 49.8 lb
415 mm 16.34"	11.2 kg 24.7 lb
805 mm 31.69" SECTIONED	21.8 kg 48.1 lb

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 85°

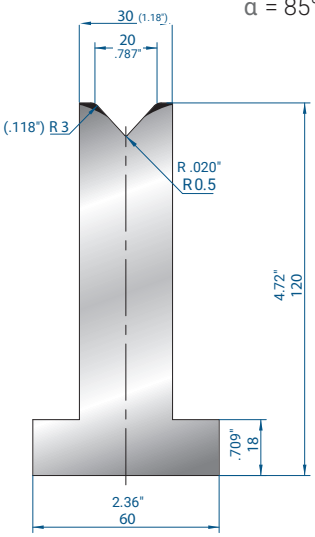

3098


835 mm 32.87"	26.3 kg 58.0 lb
415 mm 16.34"	13.1 kg 28.9 lb
805 mm 31.69" SECTIONED	25.4 kg 56.0 lb

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 85°


3099

835 mm 32.87"	29.3 kg 64.6 lb
415 mm 16.34"	14.6 kg 32.2 lb
805 mm 31.69" SECTIONED	28.3 kg 62.4 lb

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 85°

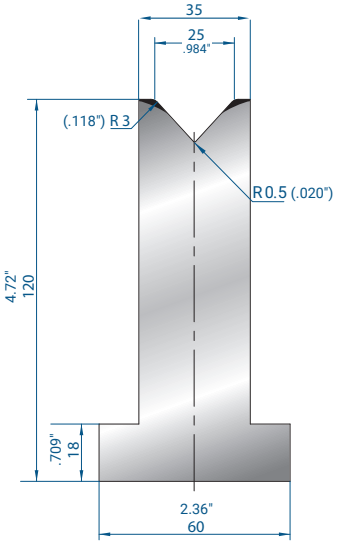


T DIES H120 - 60°

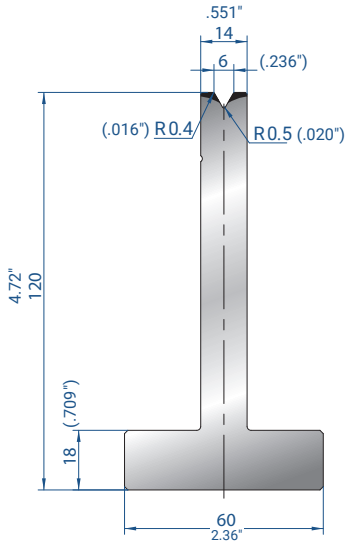

3059

835 mm 32.87"	16.3 kg 35.9 lb
415 mm 16.34"	8.1 kg 17.9 lb
805 mm 31.69" SECTIONED	15.7 kg 34.6 lb


Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°

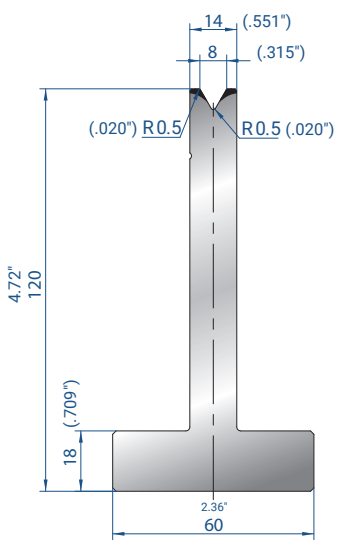

3060

835 mm 32.87"	16.2 kg 35.7 lb
415 mm 16.34"	8.1 kg 17.9 lb
805 mm 31.69" SECTIONED	15.6 kg 34.4 lb


Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°

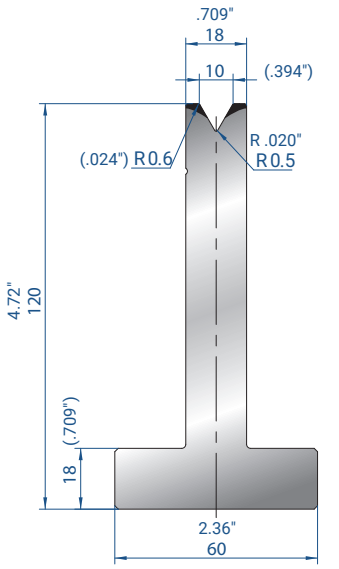

3061

835 mm 32.87"	18.8 kg 41.4 lb
415 mm 16.34"	9.3 kg 20.5 lb
805 mm 31.69" SECTIONED	18.1 kg 39.9 lb


Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°

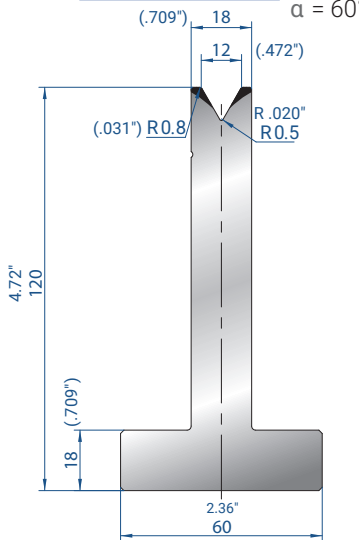

3062

835 mm 32.87"	18.7 kg 41.2 lb
415 mm 16.34"	9.3 kg 20.5 lb
805 mm 31.69" SECTIONED	18.0 kg 39.7 lb


Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°

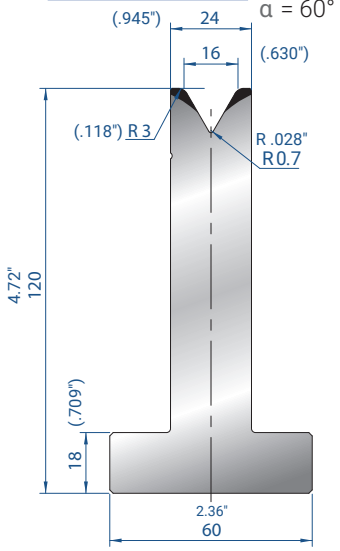

3063

835 mm 32.87"	22.3 kg 49.2 lb
415 mm 16.34"	11.1 kg 24.5 lb
805 mm 31.69" SECTIONED	21.5 kg 47.4 lb


Mat = C45
Max T/m = 75
Max US t/ft = 25.2
α = 60°

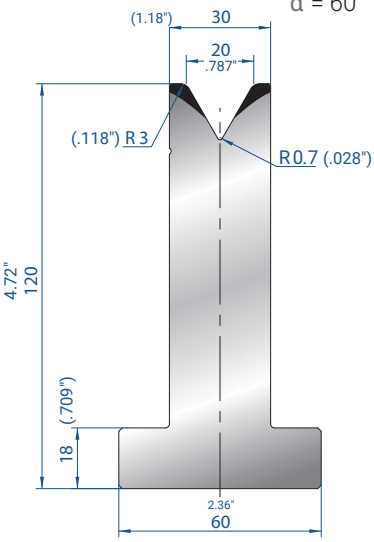

3064

835 mm 32.87"	25.9 kg 57.1 lb
415 mm 16.34"	12.9 kg 28.4 lb
805 mm 31.69" SECTIONED	25.0 kg 55.1 lb


Mat = C45
Max T/m = 70
Max US t/ft = 23.5
α = 60°

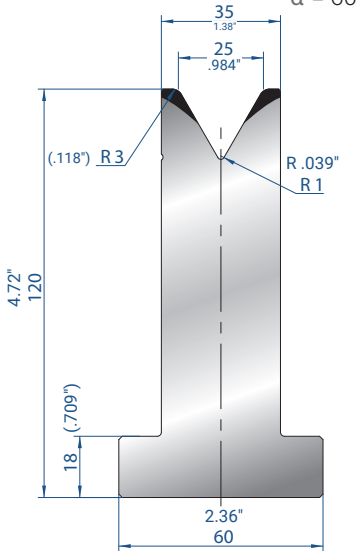

3065

835 mm 32.87"	28.6 kg 63.1 lb
415 mm 16.34"	14.2 kg 31.3 lb
805 mm 31.69" SECTIONED	27.6 kg 60.8 lb


Mat = C45
Max T/m = 65
Max US t/ft = 21.8
α = 60°

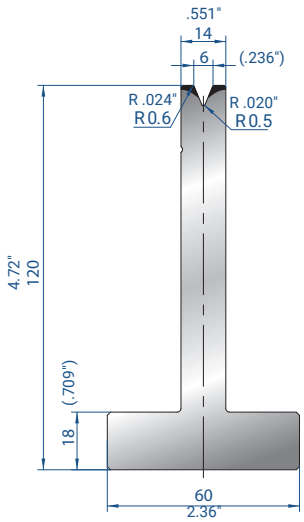

3066

835 mm 32.87"	16.2 kg 35.7 lb
415 mm 16.34"	8.1 kg 17.9 lb
805 mm 31.69" SECTIONED	15.7 kg 34.6 lb


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 45°

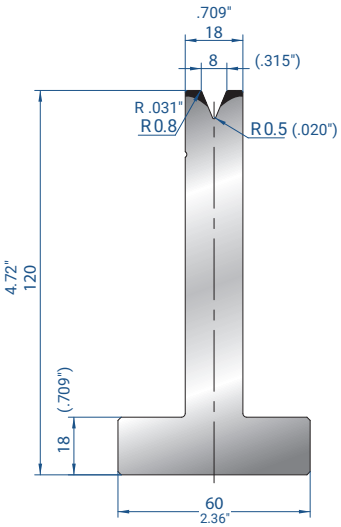

3067

835 mm 32.87"	18.8 kg 41.4 lb
415 mm 16.34"	9.3 kg 20.5 lb
805 mm 31.69" SECTIONED	18.1 kg 39.9 lb


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 45°

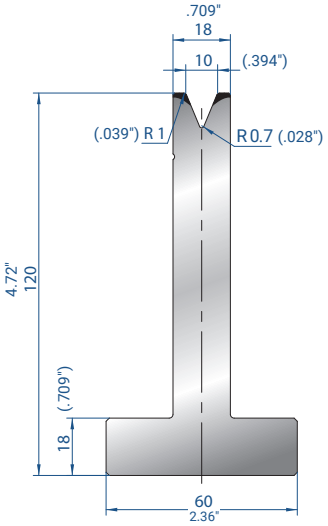

3068

835 mm 32.87"	18.7 kg 41.2 lb
415 mm 16.34"	9.3 kg 20.5 lb
805 mm 31.69" SECTIONED	18.0 kg 39.7 lb


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 45°

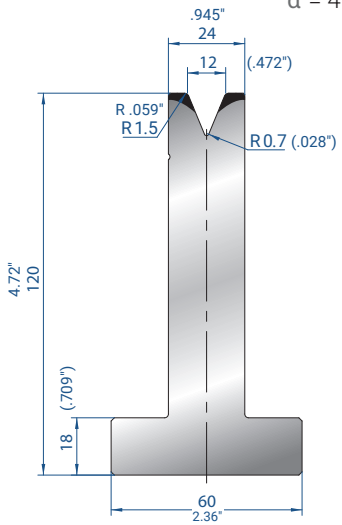

3069

835 mm 32.87"	22.5 kg 49.6 lb
415 mm 16.34"	11.2 kg 24.7 lb
805 mm 31.69" SECTIONED	21.7 kg 47.8 lb


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 45°

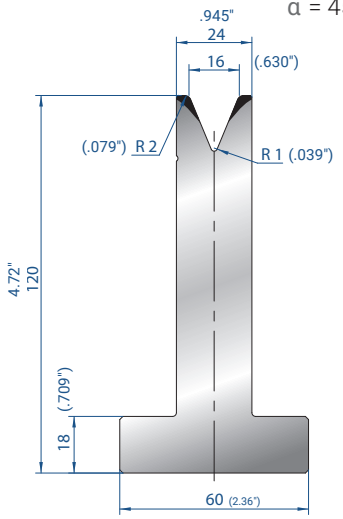

3070

835 mm 32.87"	22.1 kg 48.7 lb
415 mm 16.34"	11.0 kg 24.3 lb
805 mm 31.69" SECTIONED	21.3 kg 47.0 lb

Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 45°

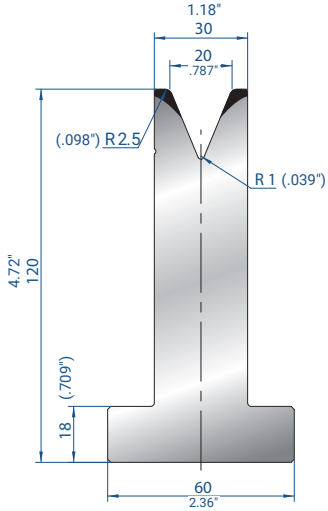

3071

835 mm 32.87"	25.5 kg 56.2 lb
415 mm 16.34"	12.7 kg 28.0 lb
805 mm 31.69" SECTIONED	24.6 kg 54.2 lb


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 45°




3072

835 mm 32.87"	27.9 kg 61.5 lb
415 mm 16.34"	13.9 kg 30.6 lb
805 mm 31.69" SECTIONED	26.9 kg 59.3 lb

Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 45°

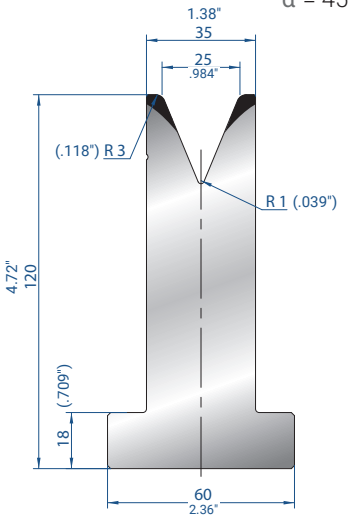


T DIES H120 - 30°

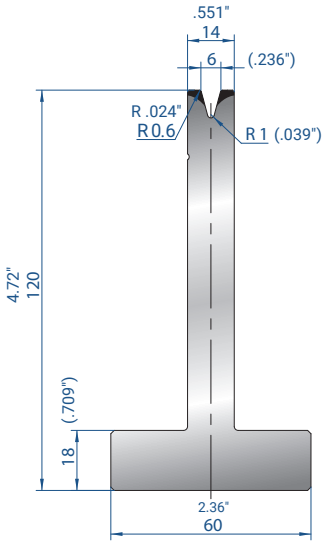

3073

835 mm 32.87"	16.2 kg 35.7 lb
415 mm 16.34"	8.0 kg 17.6 lb
805 mm 31.69" SECTIONED	15.6 kg 34.4 lb


Mat = C45
Max T/m = 35
Max US t/ft = 11.8
α = 30°

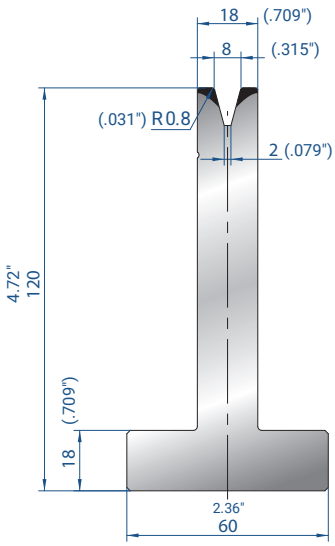

3074

835 mm 32.87"	18.7 kg 41.2 lb
415 mm 16.34"	9.3 kg 20.5 lb
805 mm 31.69" SECTIONED	18.0 kg 39.7 lb


Mat = C45
Max T/m = 40
Max US t/ft = 13.4
α = 30°

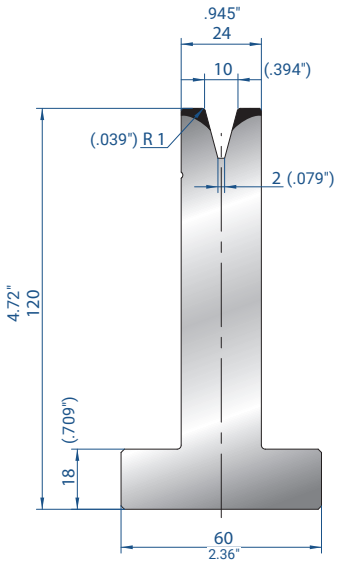

3075

835 mm 32.87"	22.5 kg 49.6 lb
415 mm 16.34"	11.2 kg 24.7 lb
805 mm 31.69" SECTIONED	21.7 kg 47.8 lb


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 30°

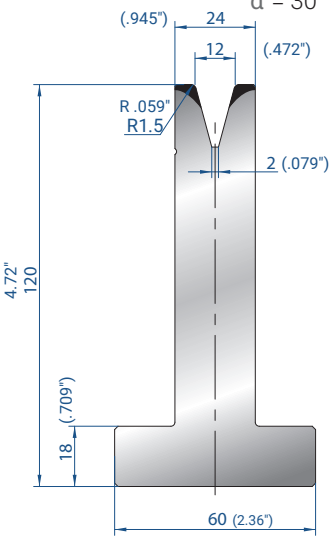

3076

835 mm 32.87"	22.2 kg 48.9 lb
415 mm 16.34"	11.0 kg 24.3 lb
805 mm 31.69" SECTIONED	21.4 kg 47.2 lb


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 30°

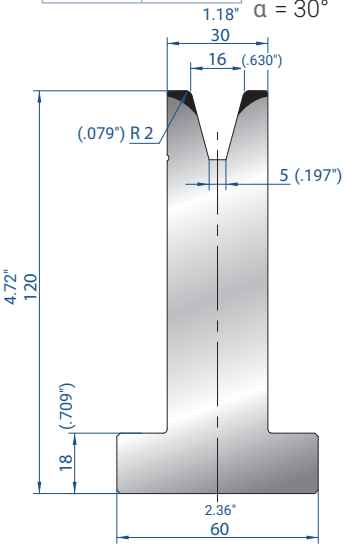

3077

835 mm 32.87"	25.6 kg 56.4 lb
415 mm 16.34"	12.7 kg 28.0 lb
805 mm 31.69" SECTIONED	24.7 kg 54.5 lb


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 30°

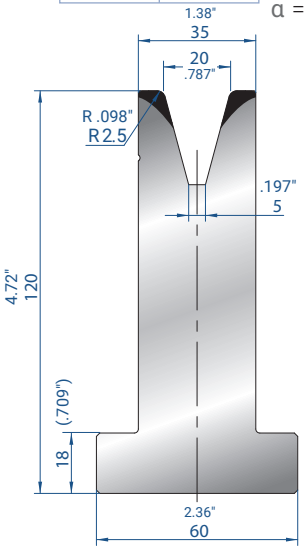

3078

835 mm 32.87"	28.1 kg 61.9 lb
415 mm 16.34"	14.0 kg 30.9 lb
805 mm 31.69" SECTIONED	27.1 kg 59.7 lb


Mat = C45
Max T/m = 55
Max US t/ft = 18.5
α = 30°

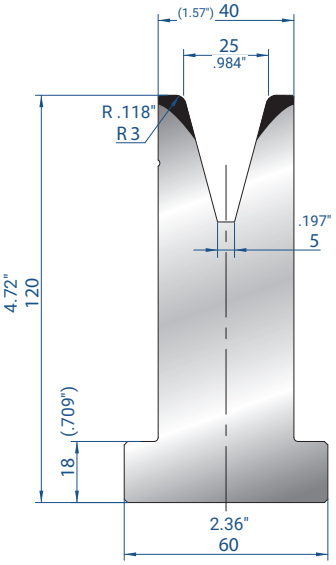

3079

835 mm 32.87"	30.1 kg 66.4 lb
415 mm 16.34"	14.9 kg 32.8 lb
805 mm 31.69" SECTIONED	29.0 kg 63.9 lb


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 30°

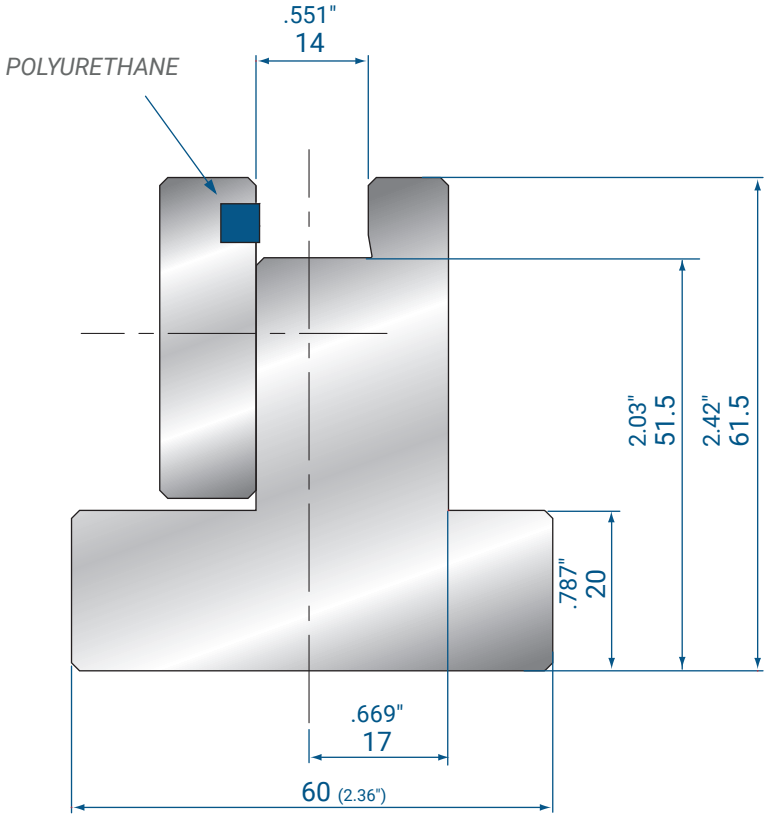


3173

835 mm	16.4 kg	32.87"	36.2 lb
415 mm	8.1 kg	16.34"	17.9 lb


ASSEMBLY EXAMPLE

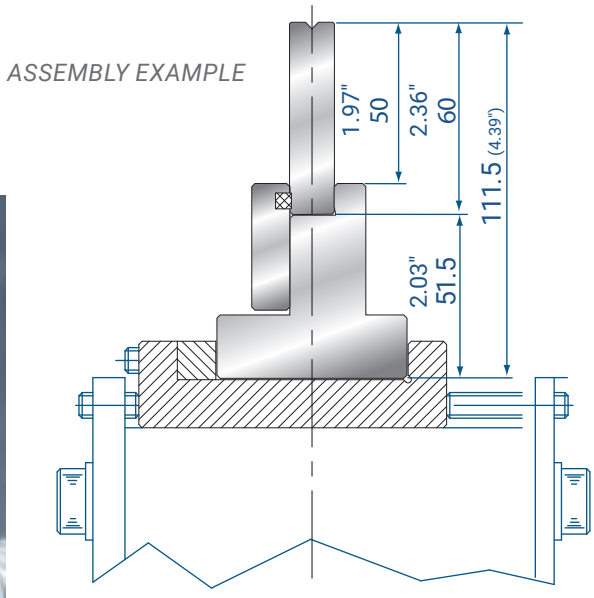



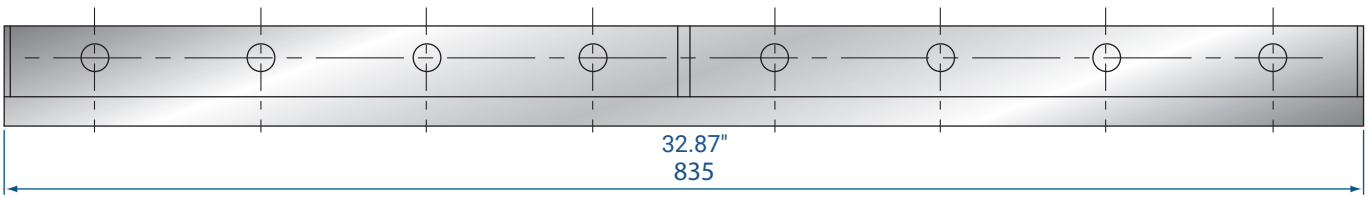



3173

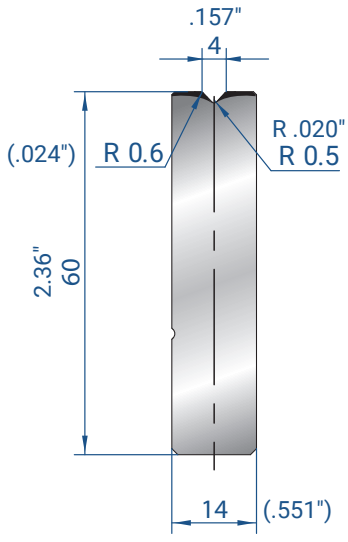

3158

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°


835 mm 32.87"	5.5 kg 12.1 lb
415 mm 16.34"	2.7 kg 6.0 lb
805 mm 31.69" SECTIONED	5.3 kg 11.7 lb

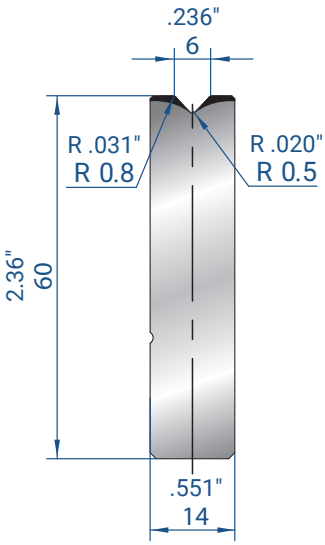

3159

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°


835 mm 32.87"	5.4 kg 11.9 lb
415 mm 16.34"	2.7 kg 6.0 lb
805 mm 31.69" SECTIONED	5.2 kg 11.5 lb

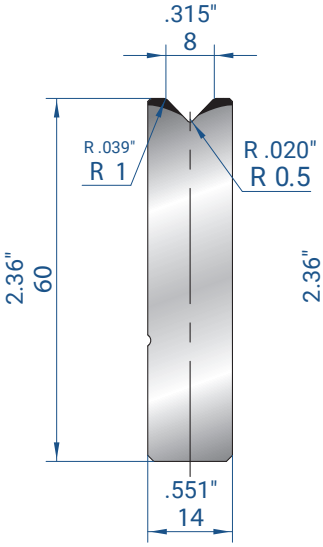

3160

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°


835 mm 32.87"	5.4 kg 11.9 lb
415 mm 16.34"	2.7 kg 6.0 lb
805 mm 31.69" SECTIONED	5.2 kg 11.5 lb

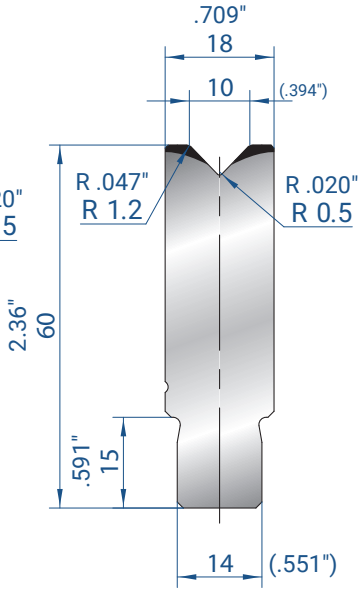

3161

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°


835 mm 32.87"	6.5 kg 14.3 lb
415 mm 16.34"	3.2 kg 7.1 lb
805 mm 31.69" SECTIONED	6.3 kg 13.9 lb

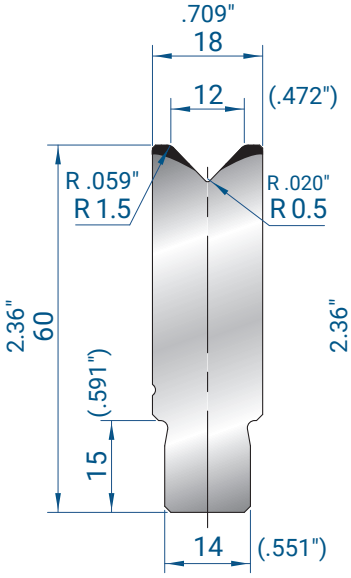

3162

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°


835 mm 32.87"	6.4 kg 14.1 lb
415 mm 16.34"	3.2 kg 7.1 lb
805 mm 31.69" SECTIONED	6.2 kg 13.7 lb

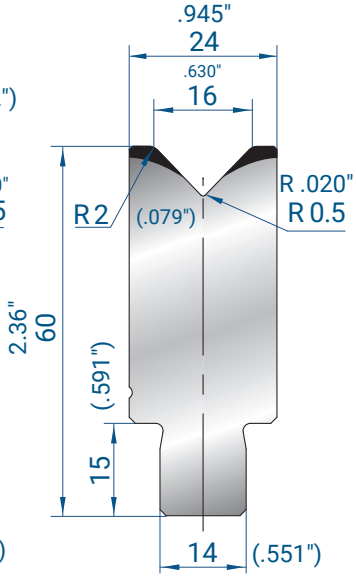

3163

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°


835 mm 32.87"	8.0 kg 17.6 lb
415 mm 16.34"	4.0 kg 8.8 lb
805 mm 31.69" SECTIONED	7.7 kg 17.0 lb

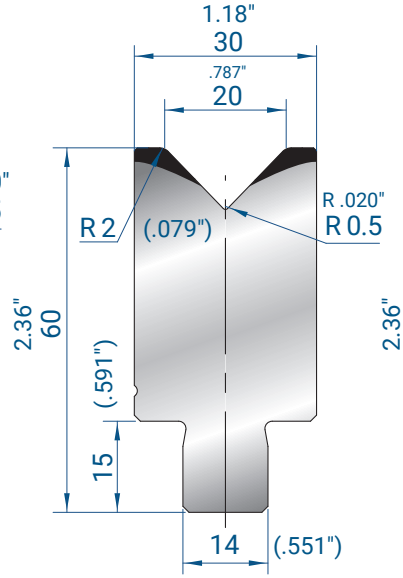

3164

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°


835 mm 32.87"	9.5 kg 20.9 lb
415 mm 16.34"	4.7 kg 10.4 lb
805 mm 31.69" SECTIONED	9.2 kg 20.3 lb

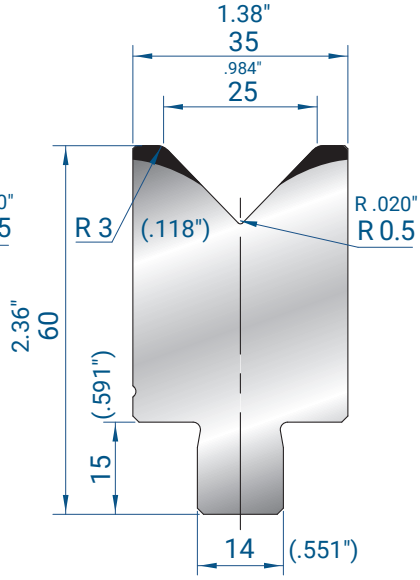

3165

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°


835 mm 32.87"	10.6 kg 23.4 lb
415 mm 16.34"	5.3 kg 11.7 lb
805 mm 31.69" SECTIONED	10.2 kg 22.5 lb

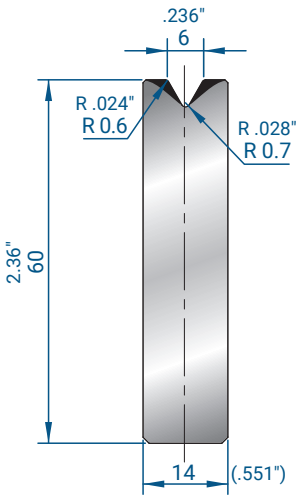

3193

Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°


835 mm 32.87"	5.4 kg 11.9 lb
415 mm 16.34"	2.7 kg 6.0 lb
805 mm 31.69" SECTIONED	5.2 kg 11.5 lb

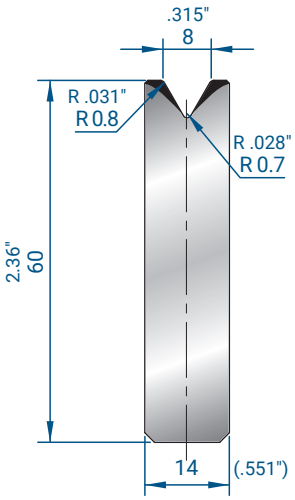

3194

Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°


835 mm 32.87"	5.3 kg 11.7 lb
415 mm 16.34"	2.6 kg 5.7 lb
805 mm 31.69" SECTIONED	5.1 kg 11.2 lb

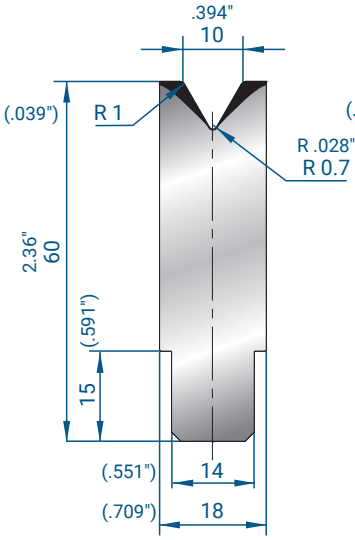

3195

Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°


835 mm 32.87"	6.4 kg 14.1 lb
415 mm 16.34"	3.2 kg 7.1 lb
805 mm 31.69" SECTIONED	6.1 kg 13.4 lb

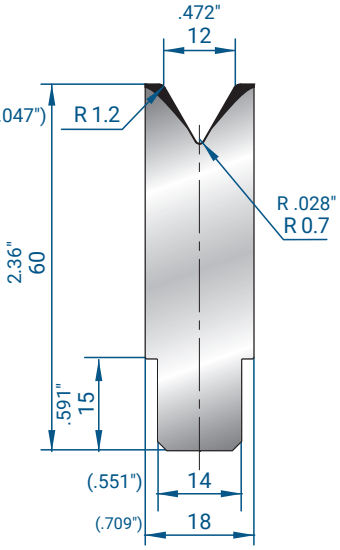

3196

Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°


835 mm 32.87"	6.3 kg 13.9 lb
415 mm 16.34"	3.1 kg 6.8 lb
805 mm 31.69" SECTIONED	6.0 kg 13.2 lb

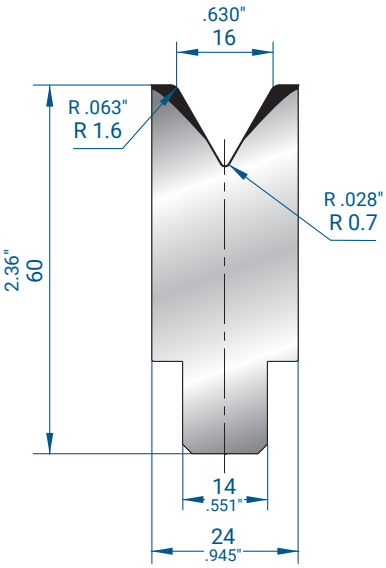

3197

Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°


835 mm 32.87"	7.7 kg 17.0 lb
415 mm 16.34"	3.8 kg 8.4 lb
805 mm 31.69" SECTIONED	7.4 kg 16.3 lb

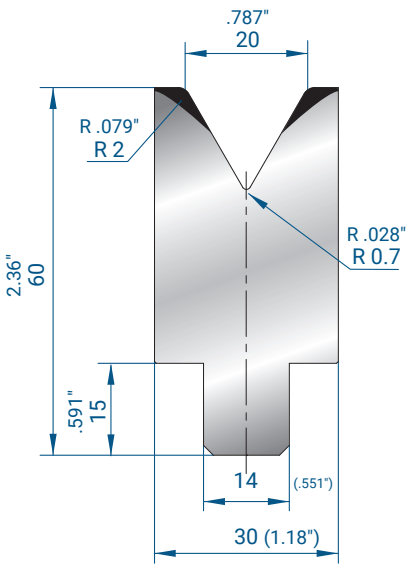

3198

Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°


835 mm 32.87"	9.1 kg 20.1 lb
415 mm 16.34"	4.5 kg 9.9 lb
805 mm 31.69" SECTIONED	8.7 kg 19.2 lb

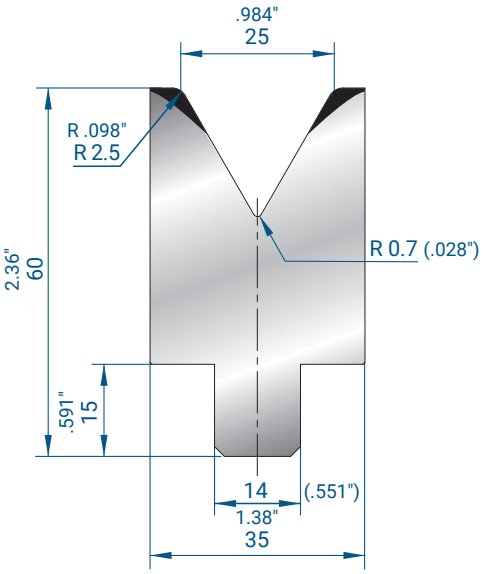

3199

Mat = C45
Max T/m = 60
Max US t/ft = 20.2
α = 60°


835 mm 32.87"	9.9 kg 21.8 lb
415 mm 16.34"	4.9 kg 10.8 lb
805 mm 31.69" SECTIONED	9.5 kg 20.9 lb

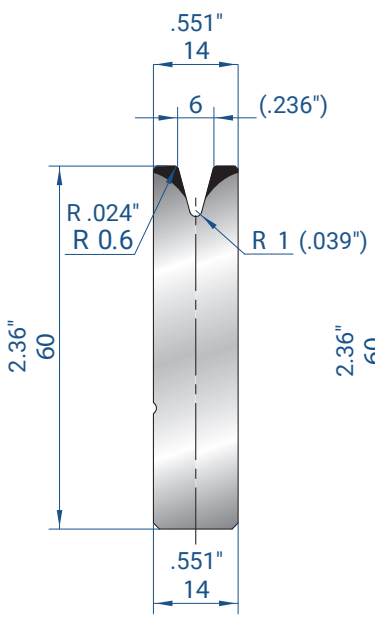

3166

Mat = C45
Max T/m = 35
Max US t/ft = 11.8
α = 30°


835 mm 32.87"	5.3 kg 11.7 lb
415 mm 16.34"	2.6 kg 5.7 lb
805 mm 31.69" SECTIONED	5.1 kg 11.2 lb

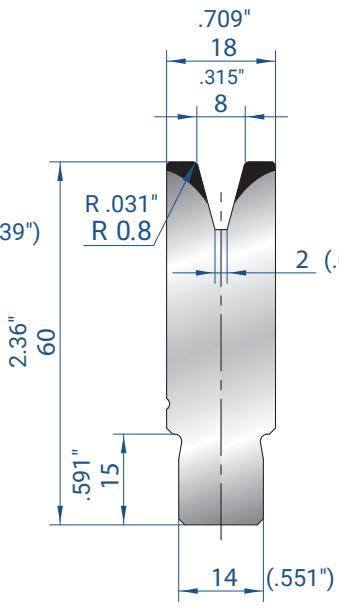

3167

Mat = C45
Max T/m = 40
Max US t/ft = 13.4
α = 30°


835 mm 32.87"	6.3 kg 13.9 lb
415 mm 16.34"	3.1 kg 6.8 lb
805 mm 31.69" SECTIONED	6.1 kg 13.4 lb

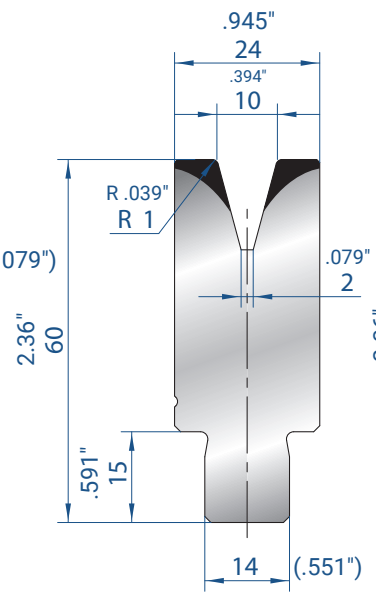

3168

Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 30°


835 mm 32.87"	7.8 kg 17.2 lb
415 mm 16.34"	3.9 kg 8.6 lb
805 mm 31.69" SECTIONED	7.5 kg 16.5 lb

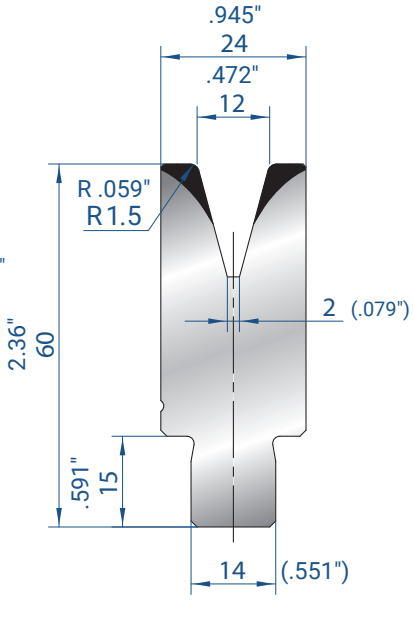

3169

Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 30°


835 mm 32.87"	7.6 kg 16.8 lb
415 mm 16.34"	3.8 kg 8.4 lb
805 mm 31.69" SECTIONED	7.3 kg 16.1 lb

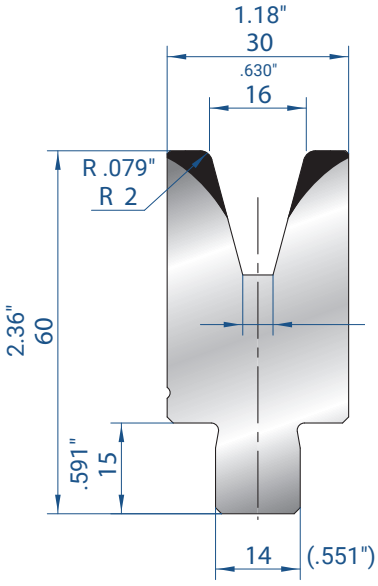

3170

Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 30°


835 mm 32.87"	8.7 kg 19.2 lb
415 mm 16.34"	4.4 kg 9.7 lb
805 mm 31.69" SECTIONED	8.5 kg 18.7 lb

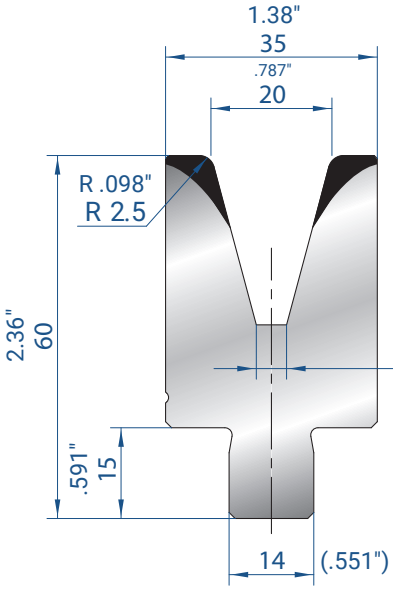

3171

Mat = C45
Max T/m = 55
Max US t/ft = 18.5
α = 30°

835 mm 32.87"	9.4 kg 20.7 lb
415 mm 16.34"	4.7 kg 10.4 lb
805 mm 31.69" SECTIONED	9.0 kg 19.8 lb

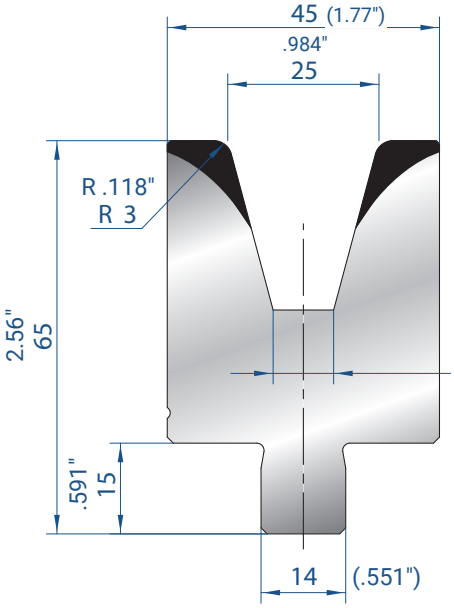


3172

Mat = C45
Max T/m = 55
Max US t/ft = 18.5
α =30°

835 mm 32.87"	12.9 kg 28.4 lb
415 mm 16.34"	6.4 kg 14.1 lb
805 mm 31.69" SECTIONED	12.4 kg 27.3 lb



EUROSTAMP TOOLING
the Italian excellence
3040
A 26°
R 3
H 135
V 12
L 415
100 T/m

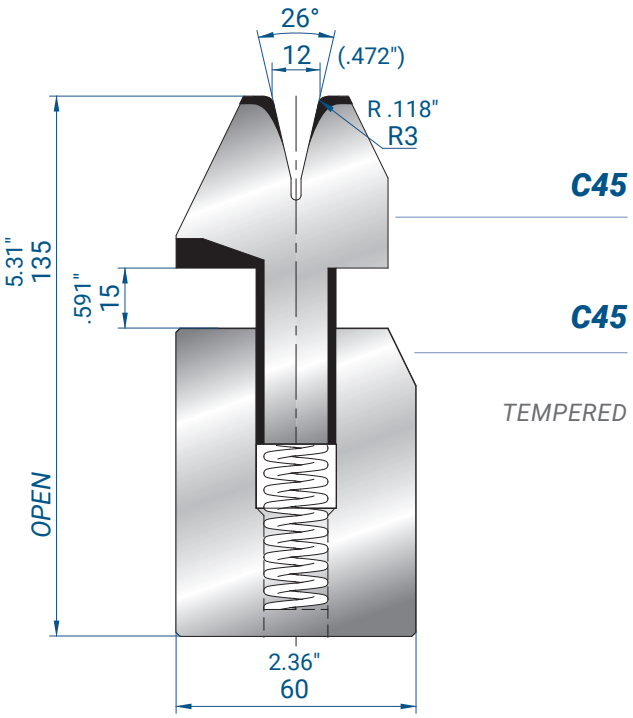

3040

835 mm	40.7 kg	32.87"	89.7 lb
415 mm	20.2 kg	16.34"	44.5 lb


Sheet metal thickness =
Min 1.5 – Max 3 mm (.059 – .118")
Max T/m = 100
Max US t/ft = 33.6

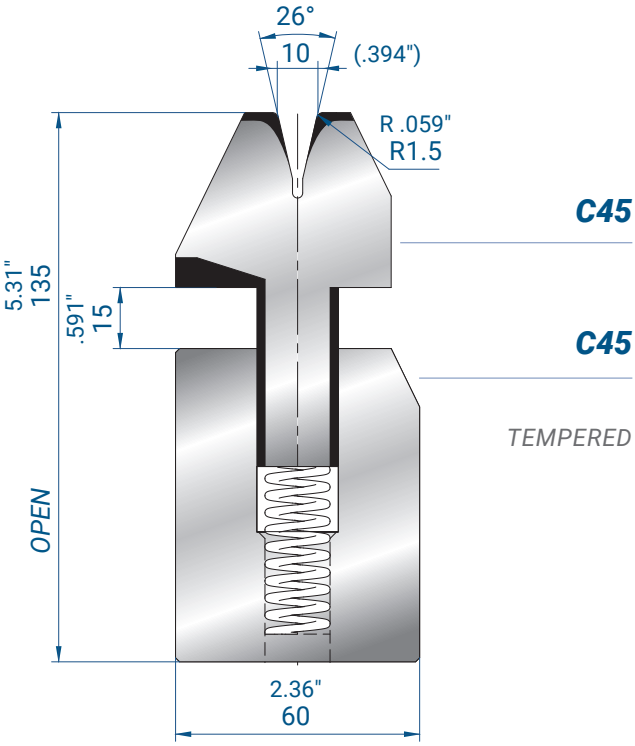

3038

835 mm	41.1 kg	32.87"	90.6 lb
415 mm	20.4 kg	16.34"	45.0 lb


Sheet metal thickness =
Min 1.5 – Max 2.5 mm (.059 – .098")
Max T/m = 100
Max US t/ft = 33.6

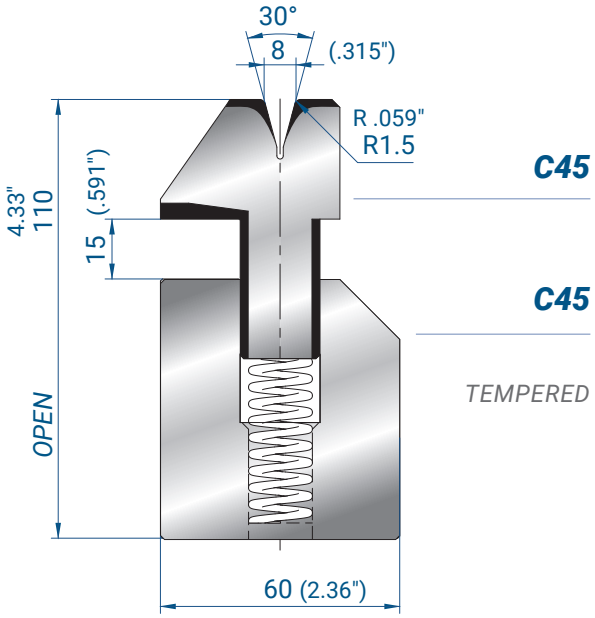


3041

835 mm	31.4 kg	32.87"	69.2 lb
415 mm	15.6 kg	16.34"	34.4 lb

Sheet metal thickness = Max 1.5 mm (.059")
Max T/m = 80
Max US t/ft = 26.9

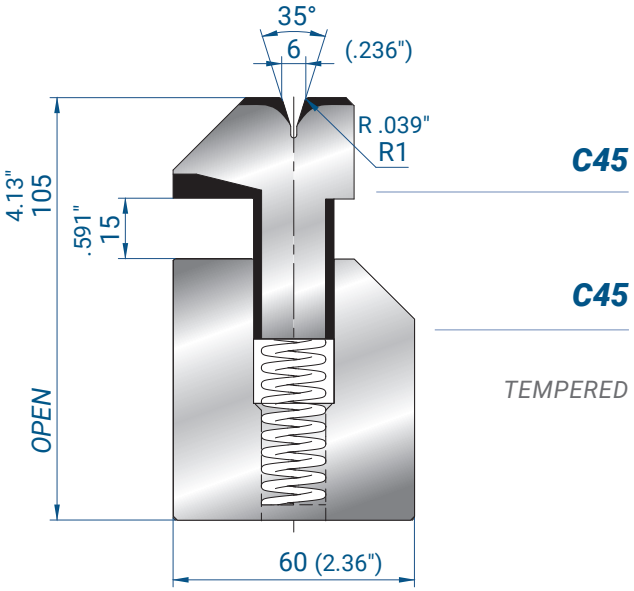

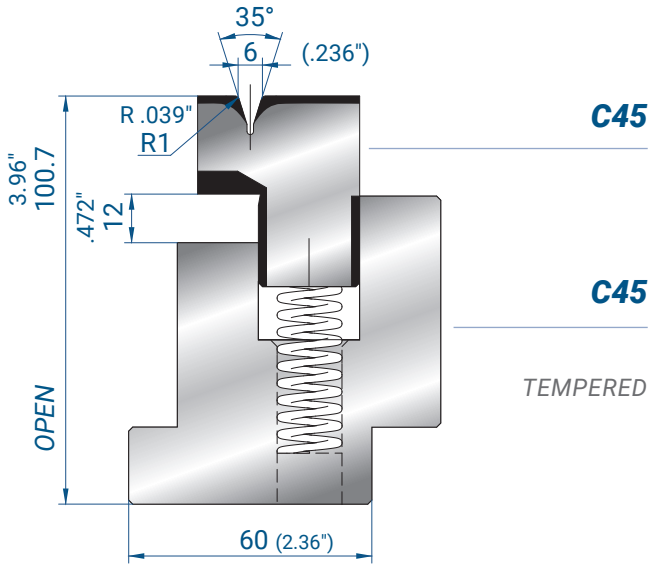

3039


835 mm	30.5 kg	32.87"	67.2 lb
415 mm	15.2 kg	16.34"	33.5 lb

Sheet metal thickness = Max 1.0 mm (.039")
Max T/m = 80
Max US t/ft = 26.9

3037/6

835 mm	33.9 kg	32.87"	74.7 lb
415 mm	16.9 kg	16.34"	37.3 lb

Sheet metal thickness = Max 1.0 mm (.039")
Max T/m = 60
Max US t/ft = 20.2

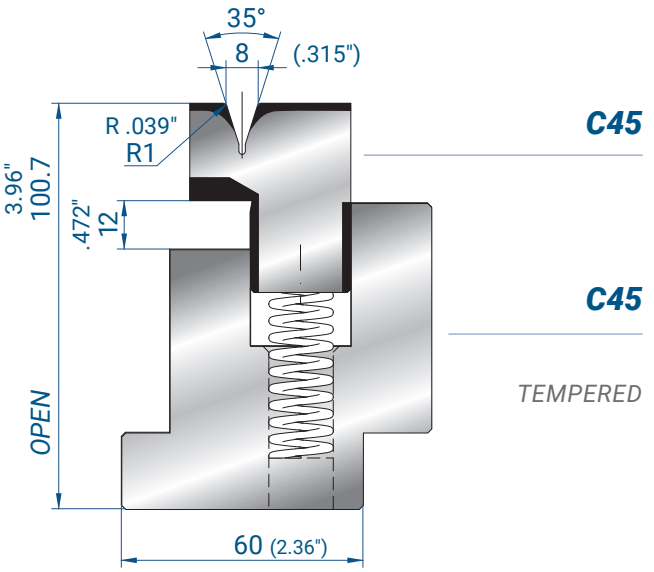


3037/8

835 mm	33.8 kg	32.87"	74.5 lb
415 mm	16.8 kg	16.34"	37.0 lb

Sheet metal thickness = Max 1.2 mm (.047")
Max T/m = 60
Max US t/ft = 20.2

HEMMING FORCE

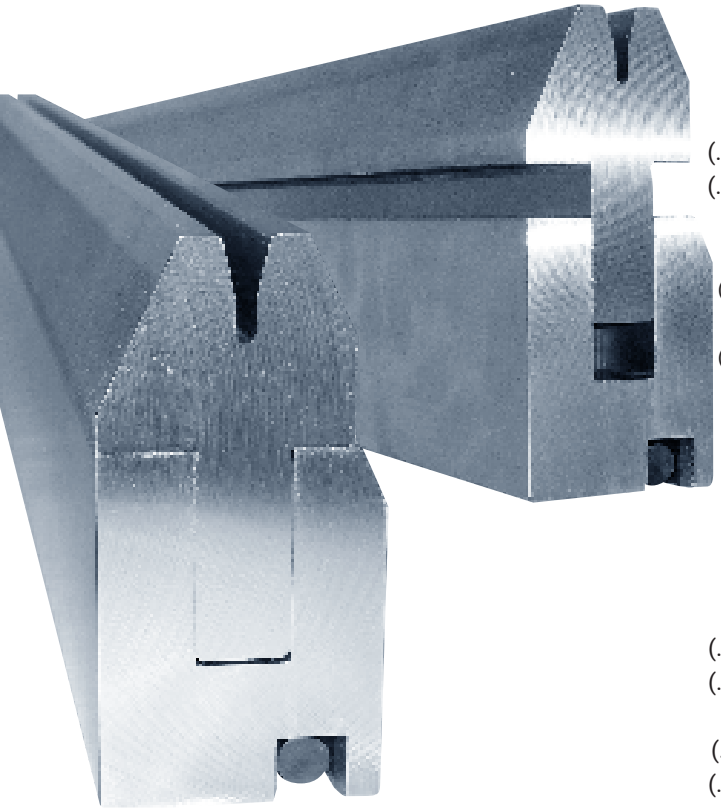


Mild steel, tensile strength 45 kg/mm² (64 ksi)

	S mm	A mm	Ton /M	2xS	Ton /M	
(.024")	0.6	3 (.118")	9 (.354")	1.2 (.047")	23	(.906")
(.031")	0.8	3 (.118")	12 (.472")	1.6 (.063")	32	(1.26")
	1 (.039")	3.5 (.138")	15 (.591")	2 (.079")	40	(1.57")
(.049")	1.25	3.5 (.138")	17 (.669")	2.5 (.098")	50	(1.97")
(.059")	1.5	4.6 (.181")	22 (.866")	3 (.118")	63	(2.48")
	2 (.079")	5.5 (.217")	30 (1.18")	4 (.157")	80	(3.15")
(.098")	2.5	6.5 (.256")	55 (2.17")	5 (.197")	90	(3.54")
	3 .118"	8 .315"	70 2.76"	6 .236"	100	(3.94")

Stainless steel, tensile strength 70 kg/mm² (100 ksi)

	S mm	A mm	Ton /M	2xS	Ton /M	
(.024")	0.6	3 (.118")	15 (.591")	1.2 (.047")	35	(1.38")
(.031")	0.8	3 (.118")	20 (.787")	1.6 (.063")	50	(1.97")
	1 (.039")	3.5 (.138")	25 (.984")	2 (.079")	60	(2.36")
(.049")	1.25	3.5 (.138")	26 (1.02")	2.5 (.098")	80	(3.15")
(.059")	1.5	4.6 (.181")	38 (1.50")	3 (.118")	95	(3.74")
	2 .079"	5.5 .217"	50 1.97"	4 .157"	130	(5.12")

PNEUMATIC FLATTENING HEMMING TOOLS

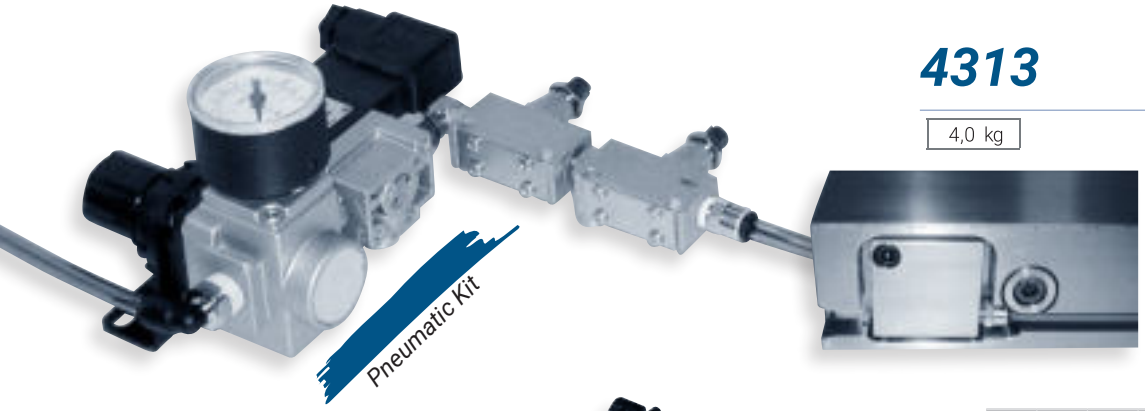

4313


4,0 kg

PNEUMATIC KIT

REQUIRED FOR INSTALLING PNEUMATIC SYSTEMS



	V	A	R	H open	Max T/M	
3038 PN	10 .394"	26°	1.5 (.059")	135 (5.31")	100	(3.94")
			835 mm	41.1 kg	32.87"	90.6 lb
			415 mm	20.4 kg	16.34"	45.0 lb
3039 PN	6 .236"	35°	1 .039"	105 (4.13")	80	(3.15")
			835 mm	30.5 kg	32.87"	67.2 lb
			415 mm	15.2 kg	16.34"	33.5 lb
3040 PN	12 .472"	26°	3 .118"	135 (5.31")	100	(3.94")
			835 mm	40.7 kg	32.87"	89.7 lb
			415 mm	20.2 kg	16.34"	44.5 lb
3041 PN	8 .315"	30°	1.5 .059"	110 (4.33")	80	(3.15")
			835 mm	31.4 kg	32.87"	69.2 lb
			415 mm	15.6 kg	16.34"	34.4 lb

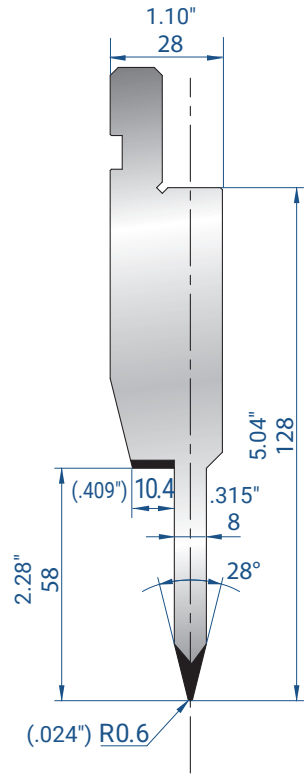

1195


Mat = C45

tempered
Max T/m = 80
Max US t/ft = 26.9

835 mm 32.87"	17.4 kg 38.4 lb
415 mm 16.34"	8.7 kg 19.2 lb
805 mm 31.69" SECTIONED	16.0 kg 35.3 lb

Thickness

Max 1.2 mm (.047")
Mild steel

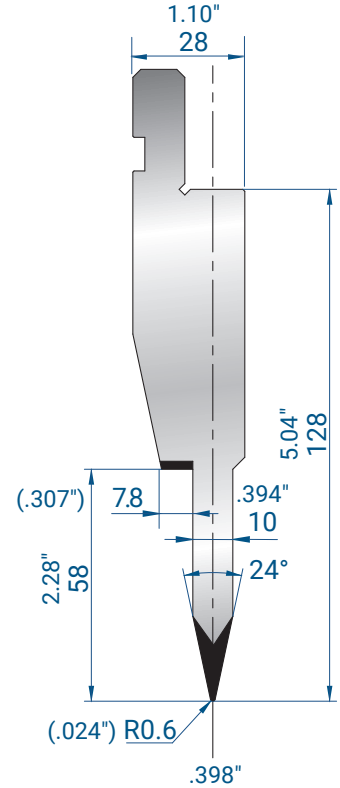

1196


Mat = C45

tempered
Max T/m = 80
Max US t/ft = 26.9

835 mm 32.87"	17.5 kg 38.6 lb
415 mm 16.34"	8.7 kg 19.2 lb
805 mm 31.69" SECTIONED	16.1 kg 35.5 lb

Thickness

Max 1.5 mm (.059")
Mild steel

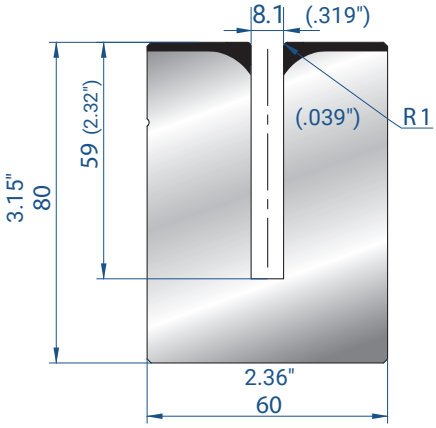


3176

Mat = C45

tempered
Max T/m = 50
Max US t/ft = 16.8

835 mm 32.87"	28.2 kg 62.2 lb
415 mm 16.34"	14.0 kg 30.9 lb
805 mm 31.69" SECTIONED	27.2 kg 60.0 lb

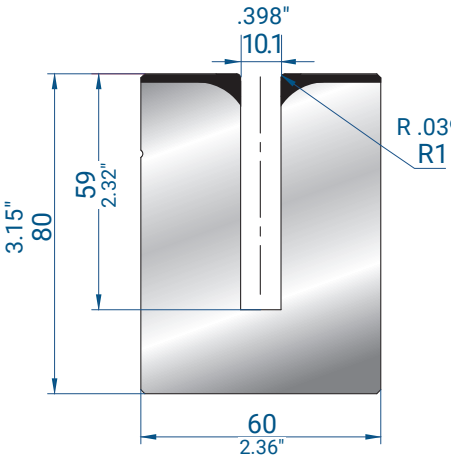


3177

Mat = C45

tempered
Max T/m = 50
Max US t/ft = 16.8

835 mm 32.87"	27.5 kg 60.6 lb
415 mm 16.34"	13.7 kg 30.2 lb
805 mm 31.69" SECTIONED	26.5 kg 58.4 lb



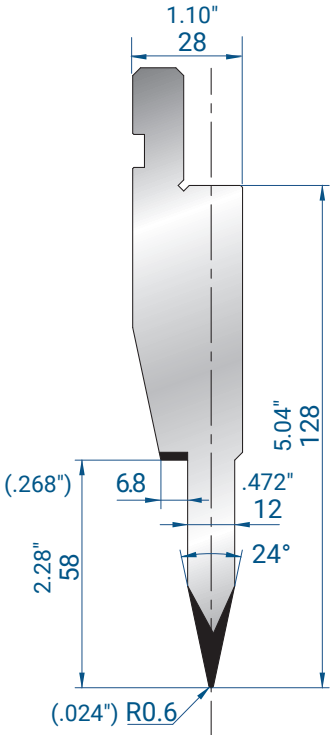

1197


Mat = C45

tempered
Max T/m = 80
Max US t/ft = 26.9

835 mm 32.87"	18.0 kg 39.7 lb
415 mm 16.34"	8.9 kg 19.6 lb
805 mm 31.69" SECTIONED	16.5 kg 36.4 lb

Thickness

Max 1.5 mm (.059")
Mild steel

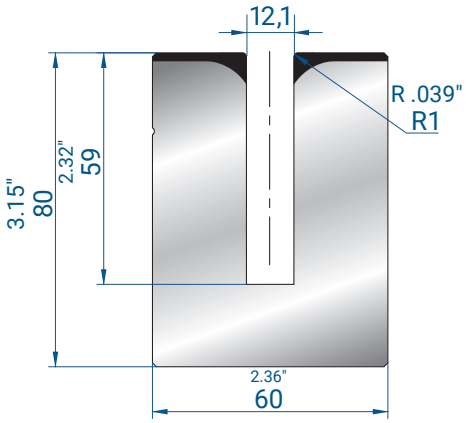


3178


Mat = C45


tempered
Max T/m = 50
Max US t/ft = 16.8

835 mm 32.87"	26.7 kg 58.9 lb
415 mm 16.34"	13.3 kg 29.3 lb
805 mm 31.69" SECTIONED	25.7 kg 56.7 lb

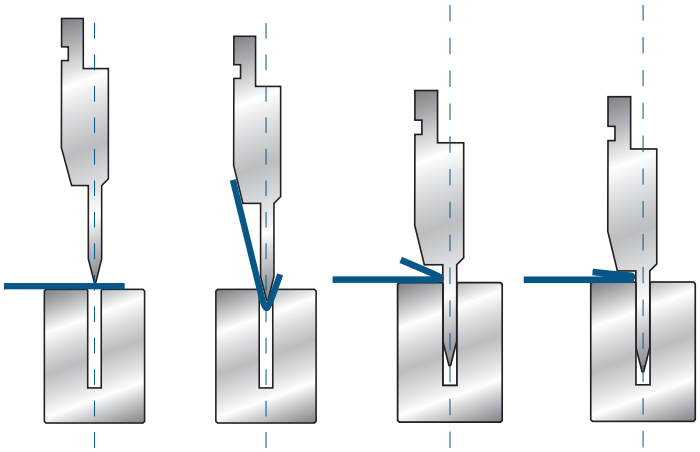



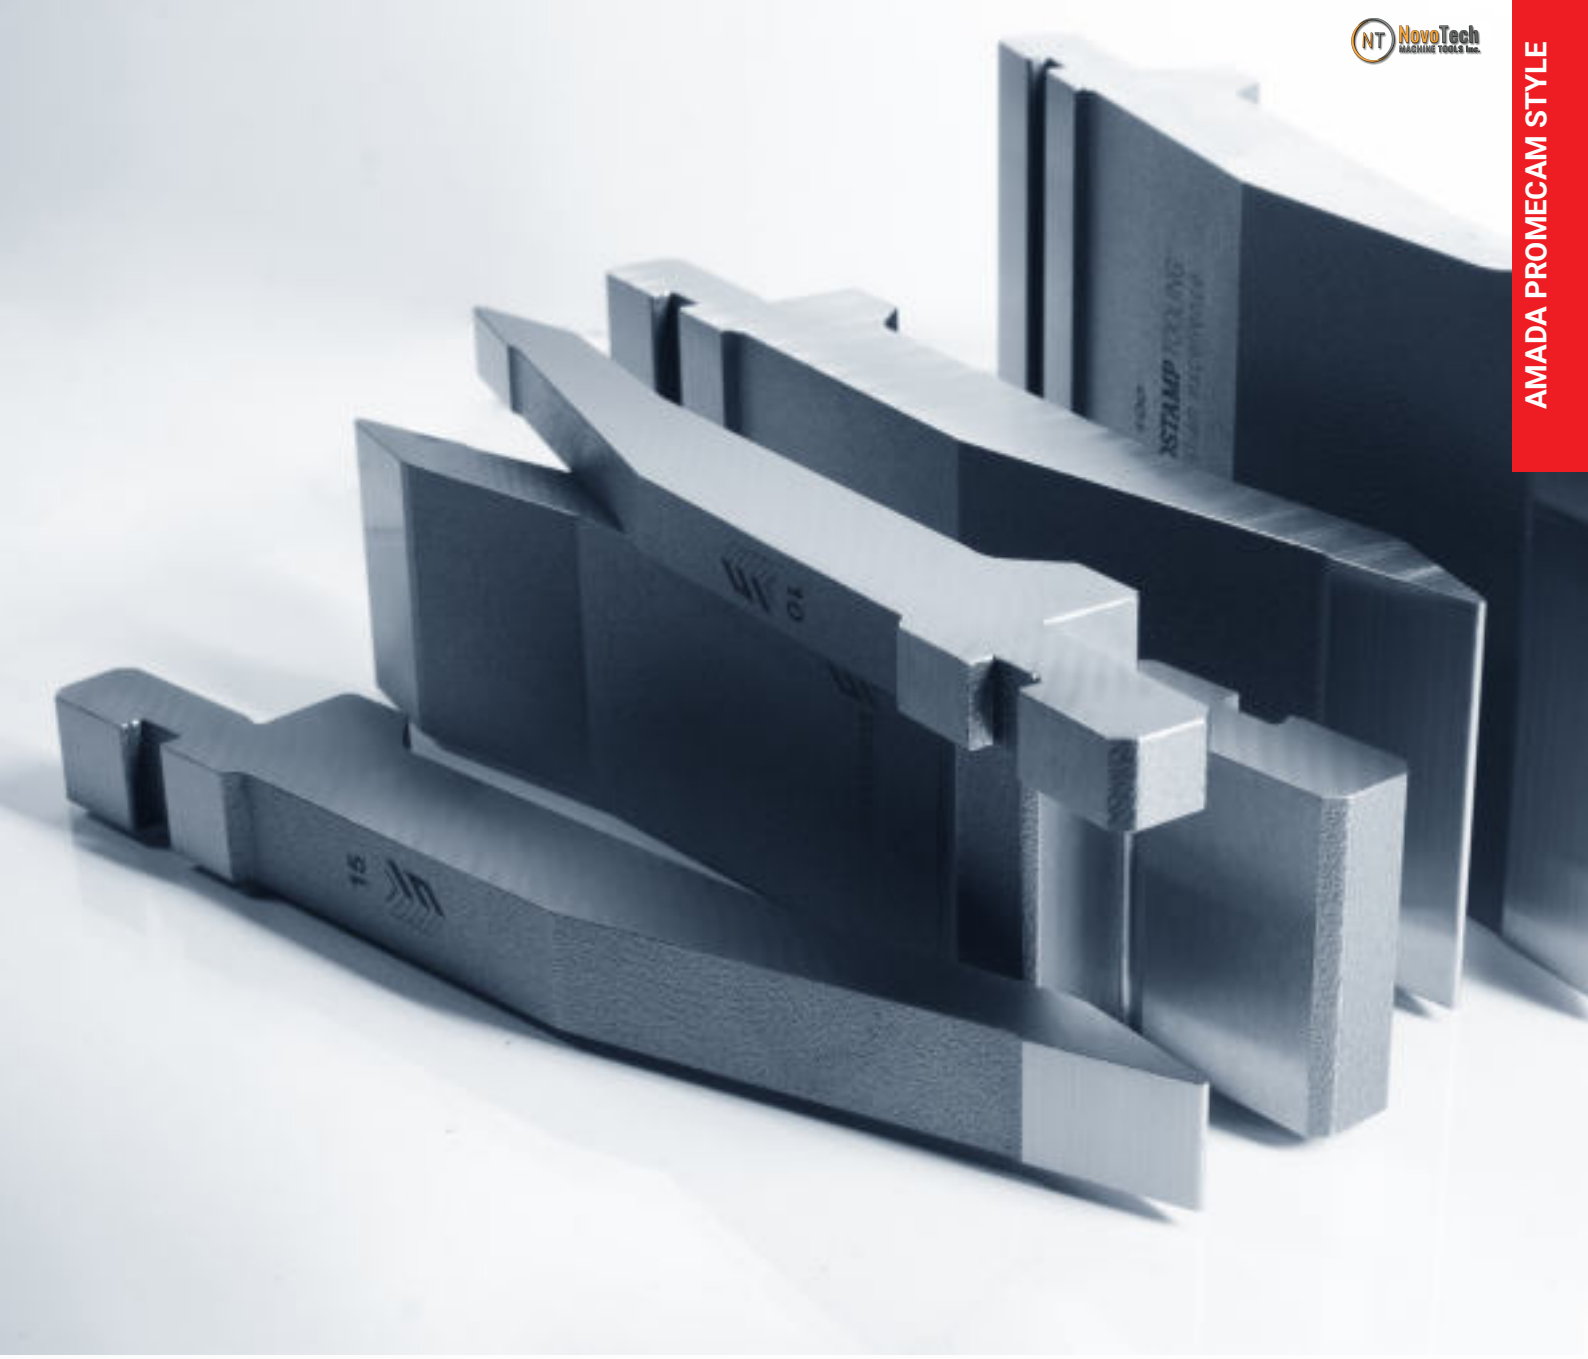

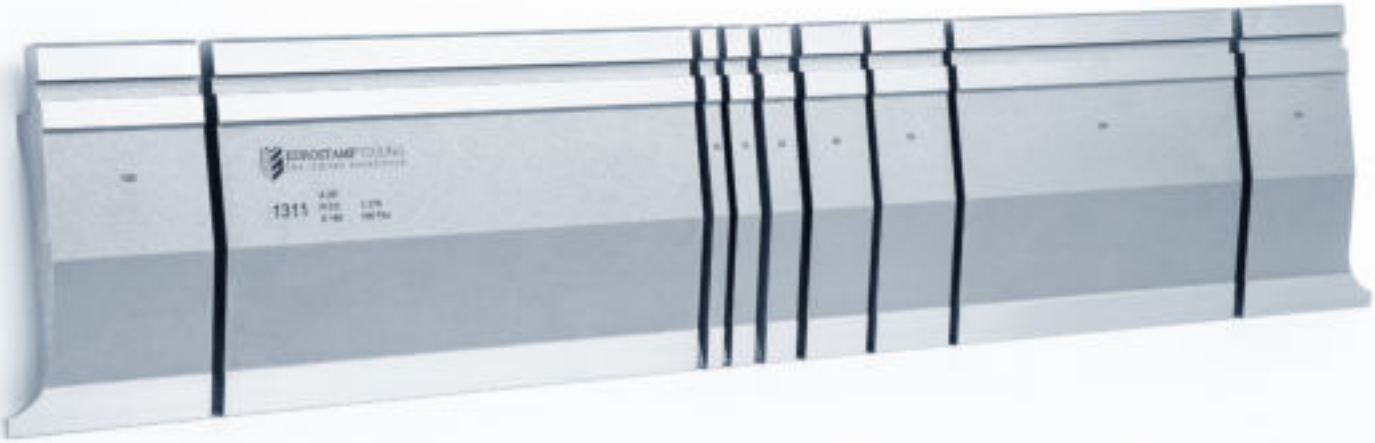


EUROSTAMP TOOLING
the Italian excellence
ESH
EUROSTAMP SAME HEIGHT


ESH SERIES TOOLS
(EUROSTAMP Same Height)

EUROSTAMP HAS ADDED A COMPLETE NEW SERIES OF UPPER AND LOWER TOOLS FOR EUROPEAN-STYLE (AMADA-PROMECAM) CLAMPING.

COMMON FEATURES


Every tool in the series is made from premium CrMo steel. Its high tensile strength, 950 – 1,050 N/mm² (138 – 152 ksi), lets the same tool section carry higher tonnage.

Punches and dies are hardened differently, each for the best performance in the way it works.

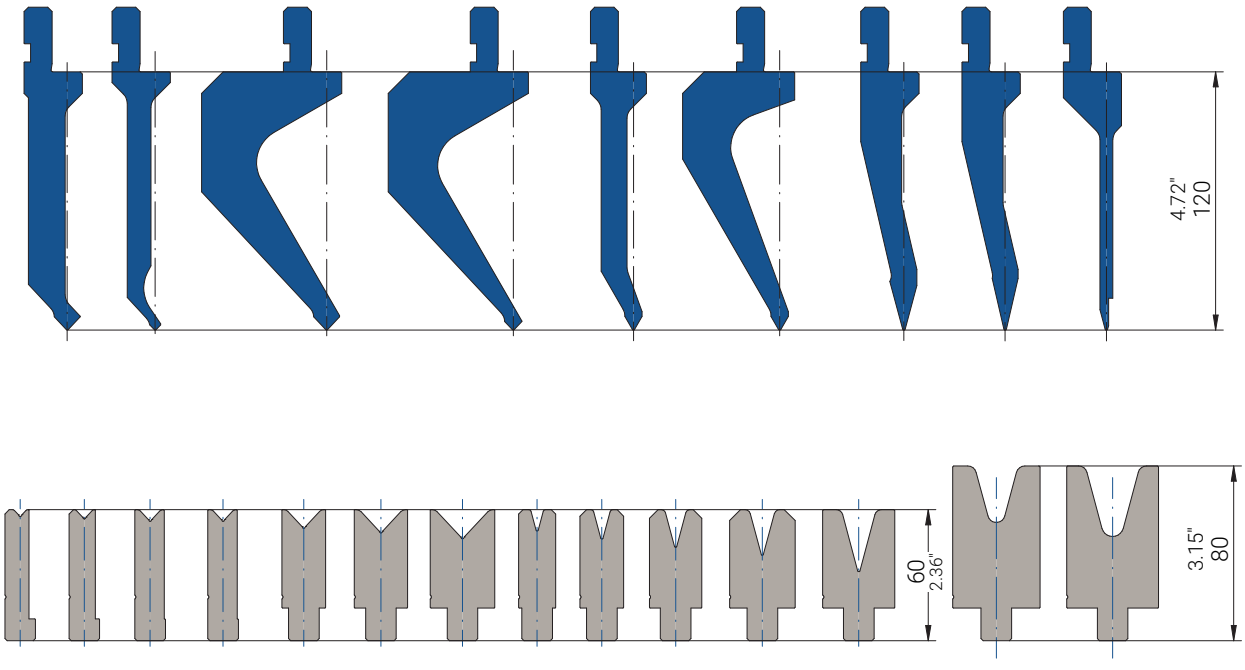

UPPER TOOL INNOVATIONS

- Punch tips are induction hardened to 55 – 58 HRC, to an average depth of more than 3 mm (.118"): a very hard tip radius and working surface that last longer.
- Angles of 86°, 60°, 30° and 26°.
- Punch profiles redesigned for maximum flexibility, so more part profiles can be formed.
- A working height of 120 mm (4.72") suits the daylight and stroke of most press brakes on the market.
- Every punch in the range has the same working height, so any punches can be set up in stages (bending stations) to form complex parts with 90° bends.

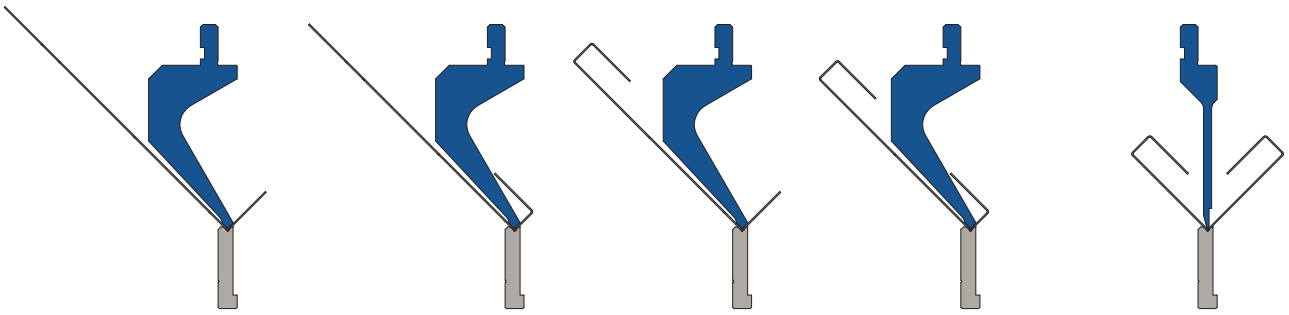

LOWER TOOL INNOVATIONS — INSERT DIES


The die inserts are gas nitrided: the whole surface, not only the shoulders, gets a thin nitride layer up to 65 HRC. The harder surface protects the V shoulders against wear from the sheet, reduces wear on the sides of the V and keeps zinc and other particles from sticking to them, which prevents galling.

The dies are then phosphate coated, which gives them their black color and protects them against corrosion.

Die inserts come in 86° and 30°, with V openings from 6 to 25 mm (.236" – .984").

The die insert profiles have been redesigned for today's work:


- Large shoulder radii, to reduce marking of the sheet.
- Narrow-V die inserts have a slimmer body for more complex parts, such as short offset bends (often needed on thin sheet).
- Chamfered outside corners reduce the risk of hitting burrs or distortions close to the bend line.

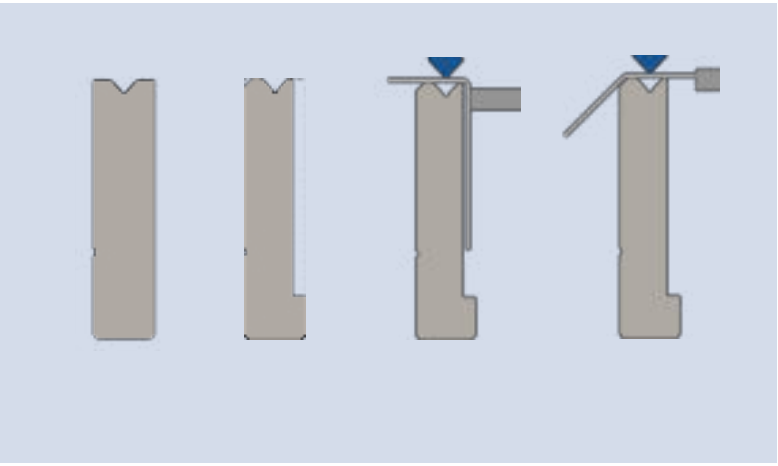

OPTIONAL TREATMENT (EXTRA CHARGE)


On request, punches can also be phosphate coated: a crystalline phosphate layer that protects the surface against corrosion and helps lubrication. The cost depends on the total weight.

NEW STANDARD SECTIONING

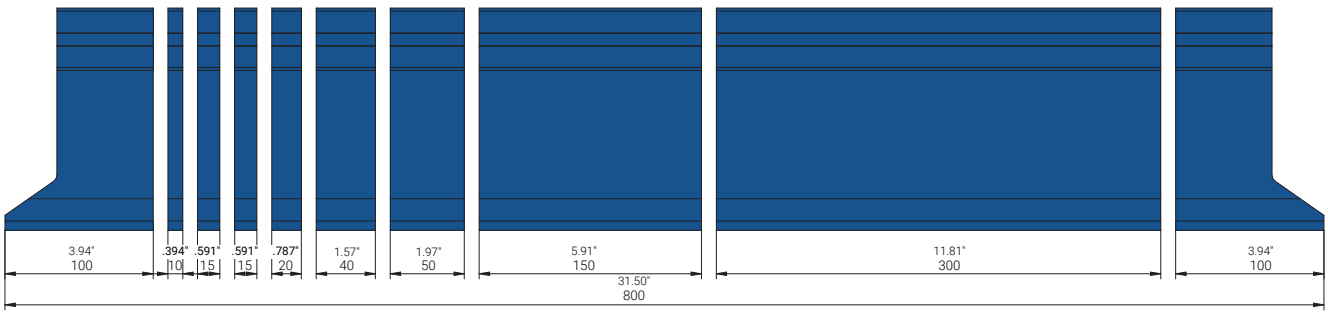

UPPER TOOLS (TOTAL LENGTH 800 MM / 31.50"):

100 mm LH horn – 10 – 15 – 15 – 20 – 40 – 50 – 150 – 300 mm – 100 mm RH horn
(3.94" LH horn – .394 – .591 – .591 – .787 – 1.57 – 1.97 – 5.91 – 11.81" – 3.94" RH horn)

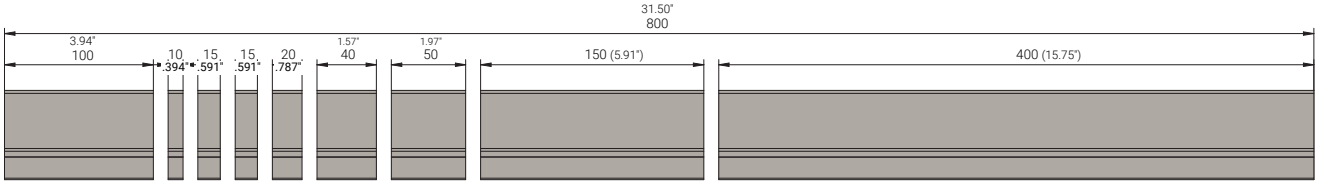


LOWER TOOLS (TOTAL LENGTH 800 MM / 31.50"):


100 – 10 – 15 – 15 – 20 – 40 – 50 – 150 – 400 mm
(3.94 – .394 – .591 – .591 – .787 – 1.57 – 1.97 – 5.91 – 15.75")

STANDARD ESH HORN


UPPER TOOLS
STANDARD LENGTH 100 MM (3.94")

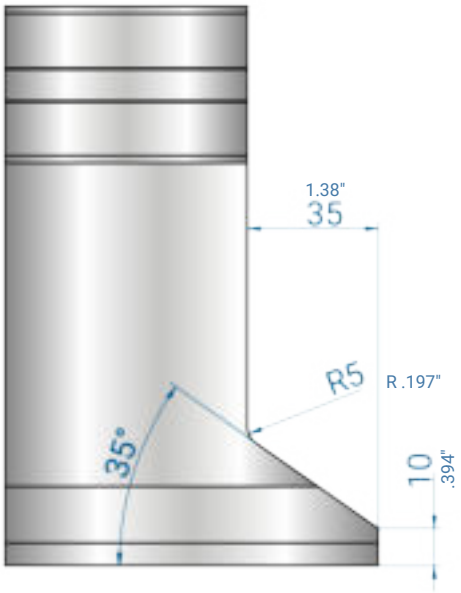


1340, 1343, 1344, 1345, 1346

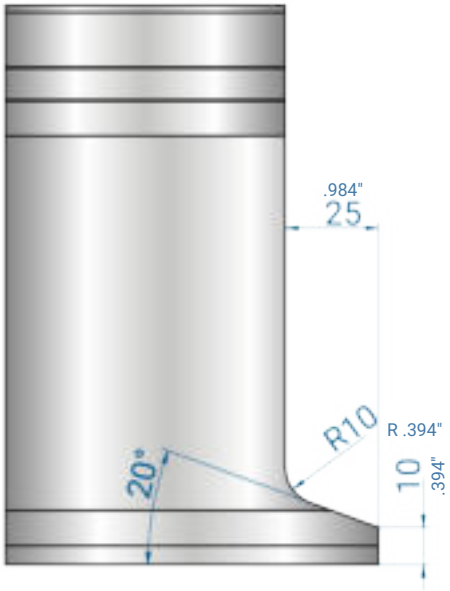

1341, 1342, 1349

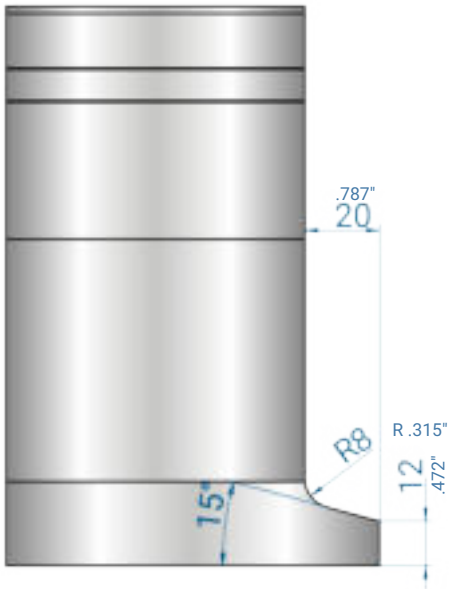

1347, 1348

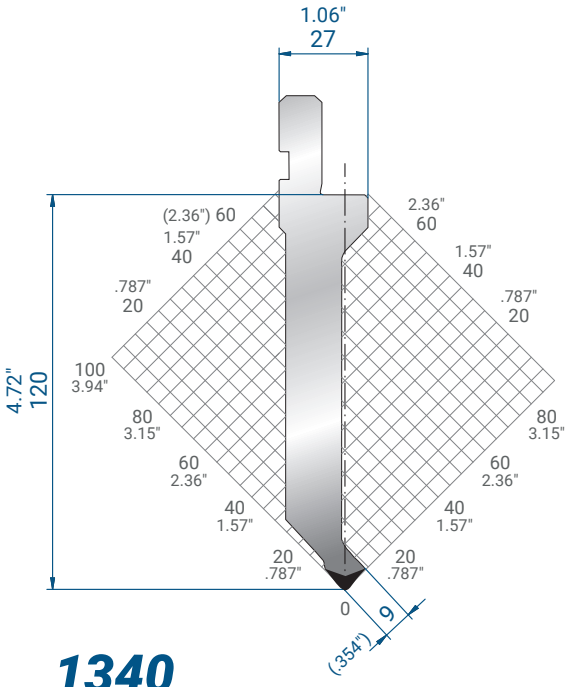


1340

Mat = CrMo Steel
tempered
H = 120 mm (4.72")
Max T/m = 100
Max US t/ft = 33.6
α = 86°
R = 0.6 (.024")

835 mm	15.6 kg
415 mm	7.8 kg
800 mm SECTIONED	13.8 kg


32.87"	34.4 lb
16.34"	17.2 lb
31.50" SECTIONED	30.4 lb

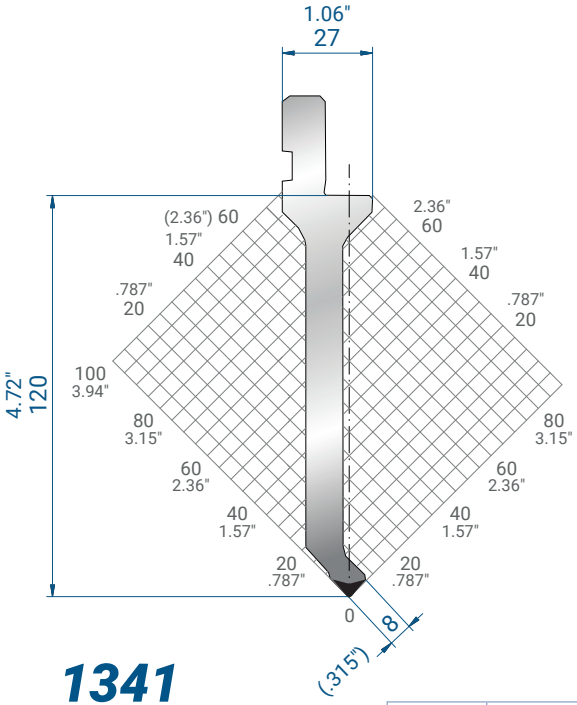

1341

Mat = CrMo Steel
tempered
H = 120 mm (4.72")
Max T/m = 50
Max US t/ft = 16.8
α = 86°
R = 0.6

835 mm	11.7 kg	32.87"	25.8 lb
415 mm	5.8 kg	16.34"	12.8 lb
800 mm SECTIONED	10.6 kg	31.50" SECTIONED	23.4 lb

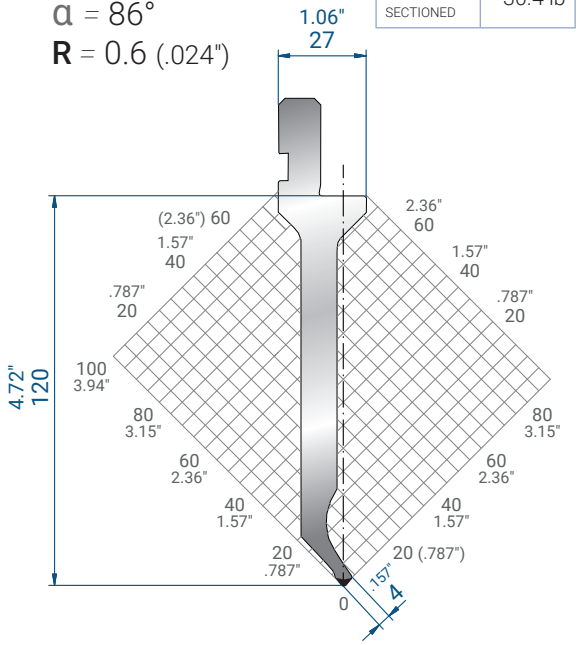


1342

Mat = CrMo Steel
tempered
H = 120 mm (4.72")
Max T/m = 30
Max US t/ft = 10.1
α = 86°
R = 0.6 (.024")

835 mm	11.2 kg
415 mm	5.5 kg
800 mm SECTIONED	10.0 kg

32.87"	24.7 lb
16.34"	12.1 lb
31.50" SECTIONED	22.0 lb

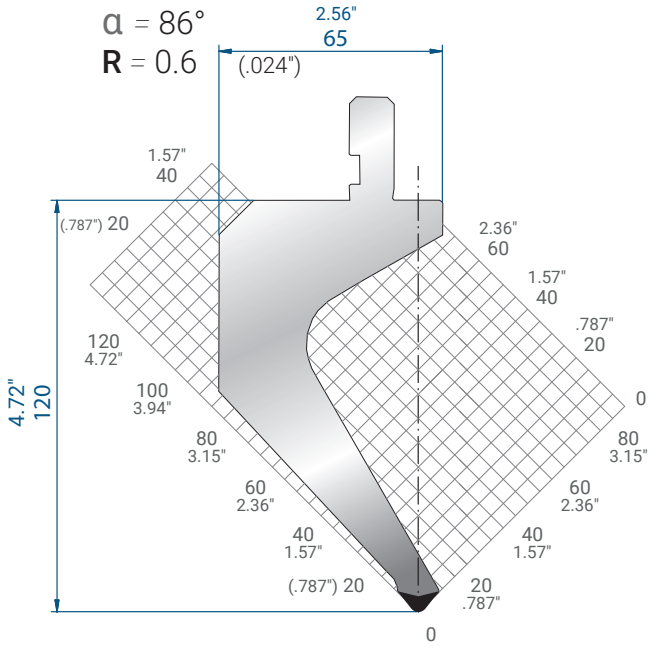


1343

Mat = CrMo Steel
tempered
H = 120 mm (4.72")
Max T/m = 50
Max US t/ft = 16.8
α = 86°
R = 0.6 (.024")

835 mm	26.6 kg	32.87"	58.6 lb
415 mm	12.5 kg	16.34"	27.6 lb
800 mm SECTIONED	22.2 kg	31.50" SECTIONED	48.9 lb

PUNCHES - 86°

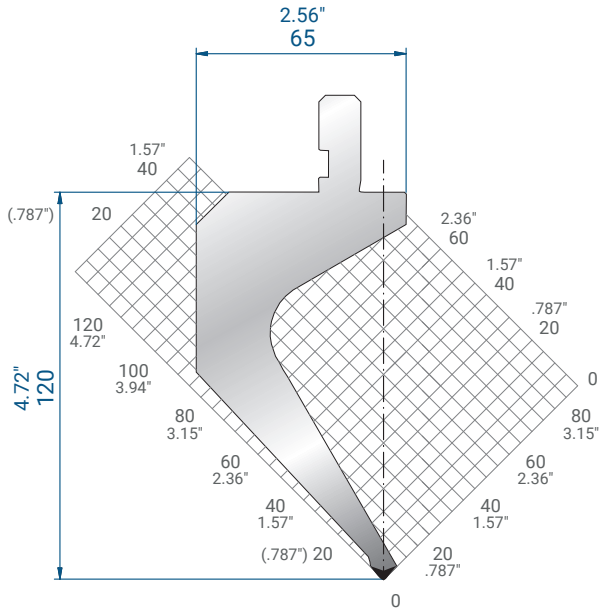


1344

Mat = CrMo Steel
tempered
H = 120 mm (4.72")
Max T/m = 45
Max US t/ft = 15.1
α = 86°
R = 0.6 (.024")

835 mm	23.4 kg
415 mm	11.7 kg
800 mm SECTIONED	20.6 kg

32.87"	51.6 lb
16.34"	25.8 lb
31.50" SECTIONED	45.4 lb

PUNCHES - 60°

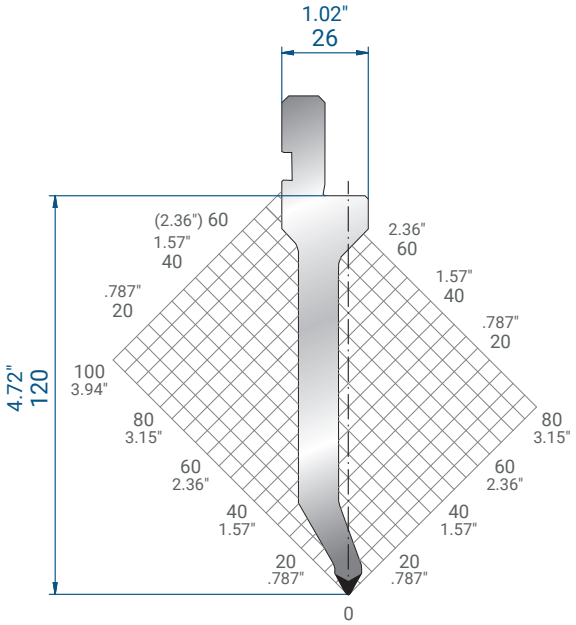


1345

Mat = CrMo Steel
tempered
H = 120 mm (4.72")
Max T/m = 70
Max US t/ft = 23.5
α = 60°
R = 0.6 (.024")

835 mm	12.4 kg
415 mm	6.2 kg
800 mm SECTIONED	11.0 kg

32.87"	27.3 lb
16.34"	13.7 lb
31.50" SECTIONED	24.3 lb

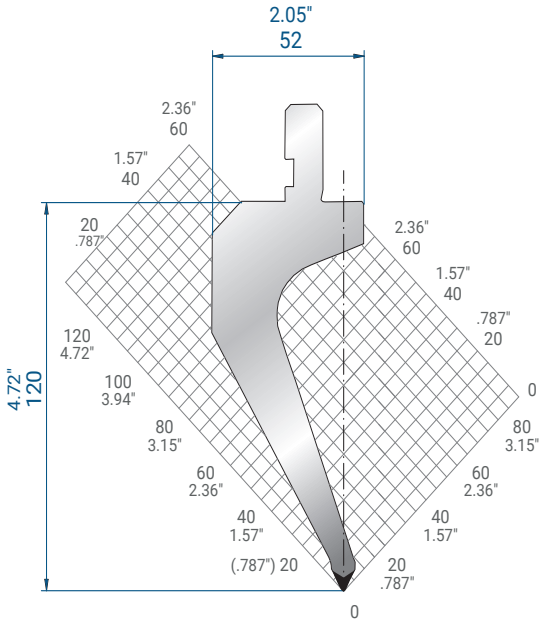


1346


Mat = CrMo Steel
tempered
H = 120 mm (4.72")
Max T/m = 70
Max US t/ft = 23.5
α = 60°
R = 0.6 (.024")

835 mm	19.2 kg
415 mm	9.6 kg
800 mm SECTIONED	16.9 kg

32.87"	42.3 lb
16.34"	21.2 lb
31.50" SECTIONED	37.3 lb

PUNCHES - 30°

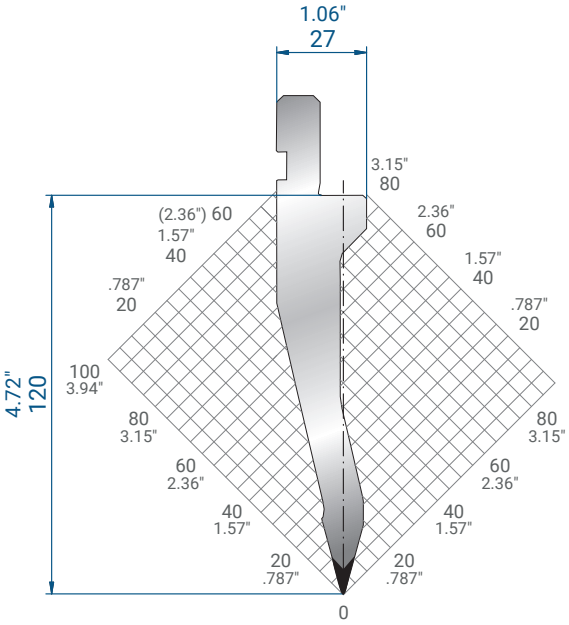

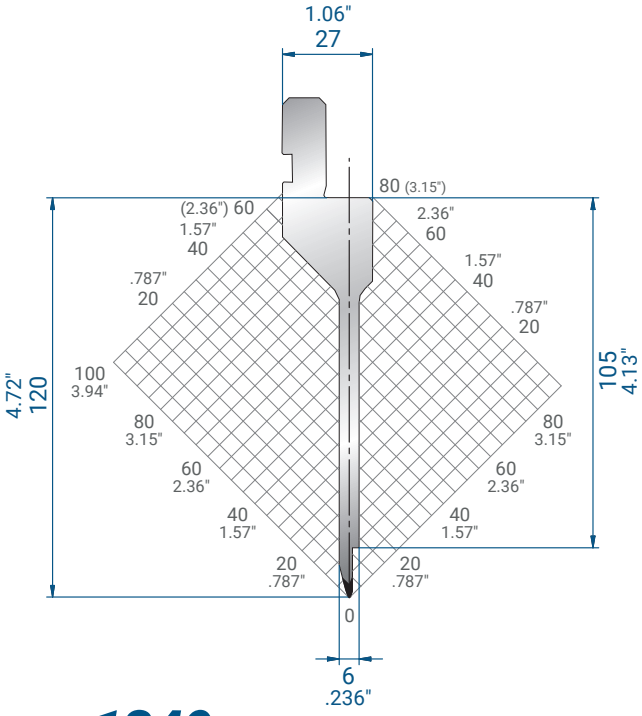

1347

Mat = CrMo Steel
tempered
H = 120 mm (4.72")
Max T/m = 100
Max US t/ft = 33.6
α = 30°
R = 0.6 (.024")

835 mm	14.0 kg
415 mm	7.0 kg
800 mm SECTIONED	12.8 kg


32.87"	30.9 lb
16.34"	15.4 lb
31.50" SECTIONED	28.2 lb

1349

Mat = CrMo Steel
tempered
H = 120 mm (4.72")
Max T/m = 45
Max US t/ft = 15.1
α = 30°
R = 0.6 (.024")

835 mm	13.9 kg	32.87"	30.6 lb
415 mm	4.9 kg	16.34"	10.8 lb
800 mm SECTIONED	8.8 kg	31.50" SECTIONED	19.4 lb

PUNCHES - 26°

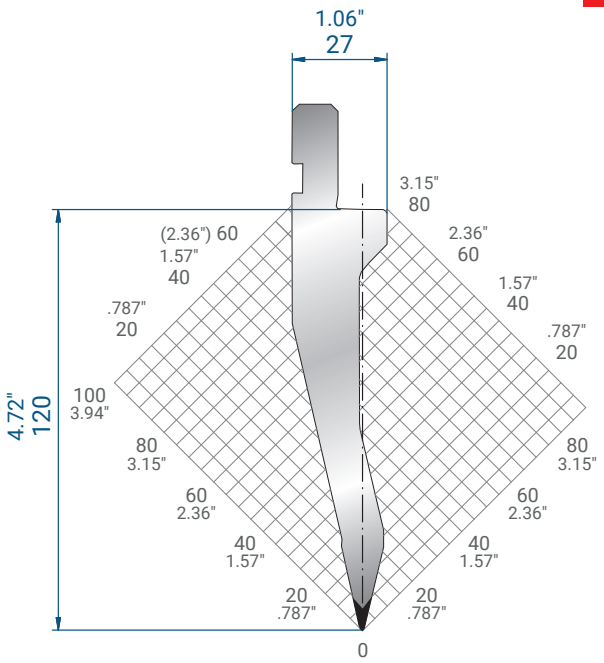


1348

Mat = CrMo Steel
tempered
H = 120 mm (4.72")
Max T/m = 100
Max US t/ft = 33.6
α = 26°
R = 0.6 (.024")

835 mm	13.9 kg
415 mm	6.9 kg
800 mm SECTIONED	12.7 kg

32.87"	30.6 lb
16.34"	15.2 lb
31.50" SECTIONED	28.0 lb

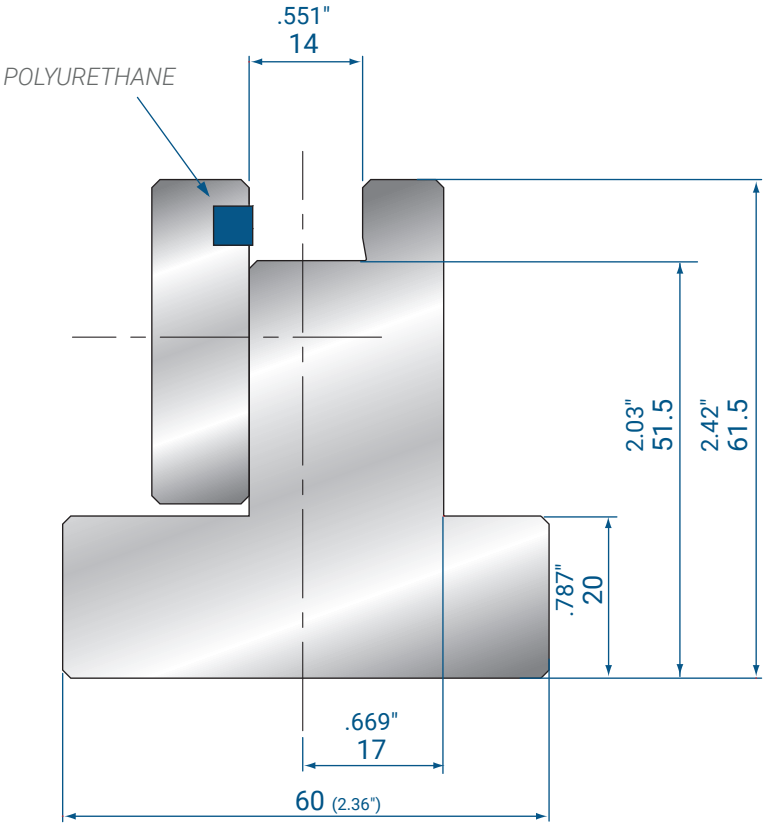



3173


835 mm	17.0 kg	32.87"	37.5 lb
415 mm	8.0 kg	16.34"	17.6 lb



ASSEMBLY EXAMPLE

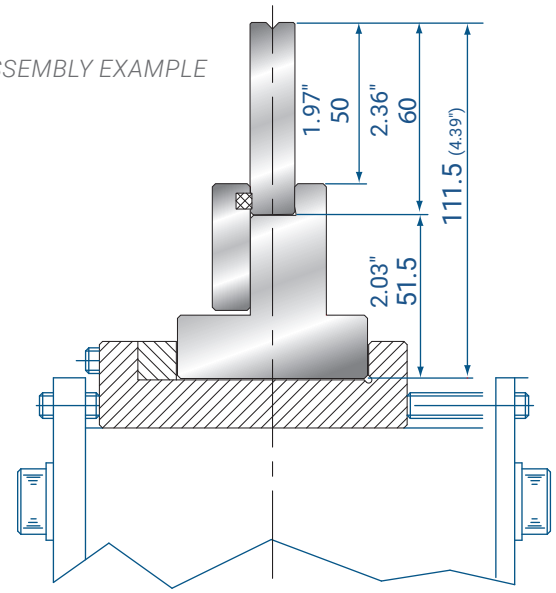

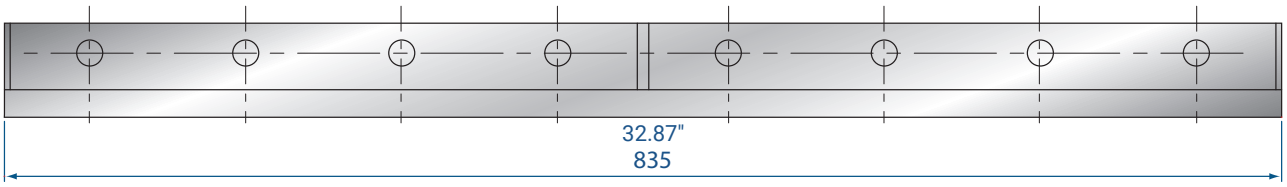

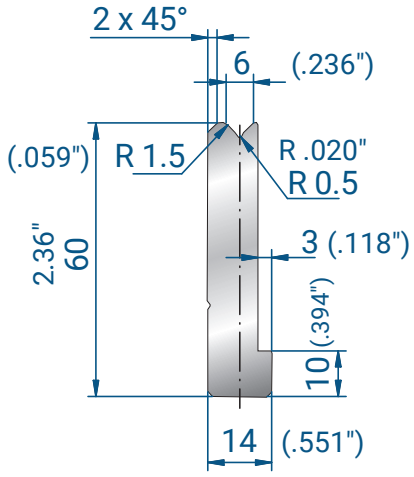


3320 - V6


835 mm	4.4 kg
415 mm	2.2 kg
800 mm SECTIONED	4.2 kg

32.87"	9.7 lb
16.34"	4.9 lb
31.50" SECTIONED	9.3 lb

Mat = CrMo Steel

nitrided and phosphatized
H = 60 mm (2.36")
Max T/m = 80
Max US t/ft = 26.9
α = 86°
R = 1.5 (.059")

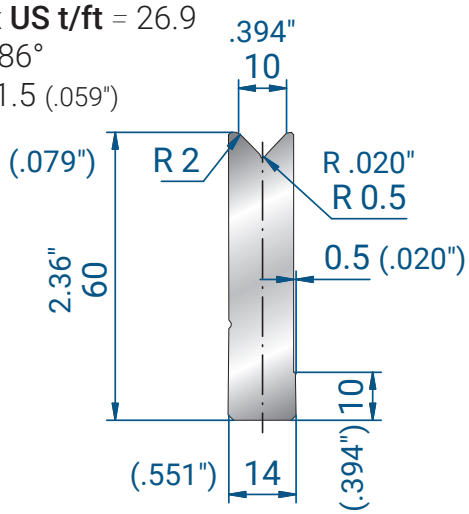

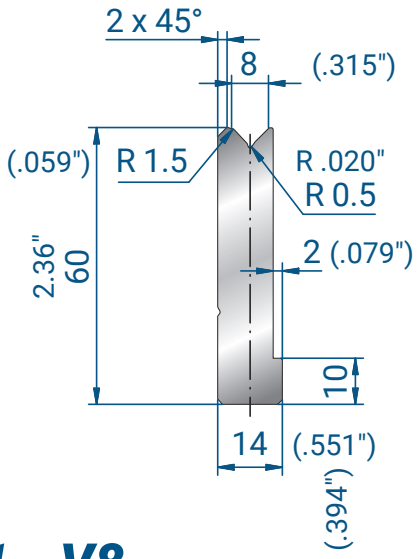


3321 - V8

835 mm	4.7 kg	32.87"	10.4 lb
415 mm	2.3 kg	16.34"	5.1 lb
800 mm SECTIONED	4.5 kg	31.50" SECTIONED	9.9 lb

Mat = CrMo Steel

nitrided and phosphatized
H = 60 mm (2.36")
Max T/m = 90
Max US t/ft = 30.2
α = 86°
R = 1.5 (.059")

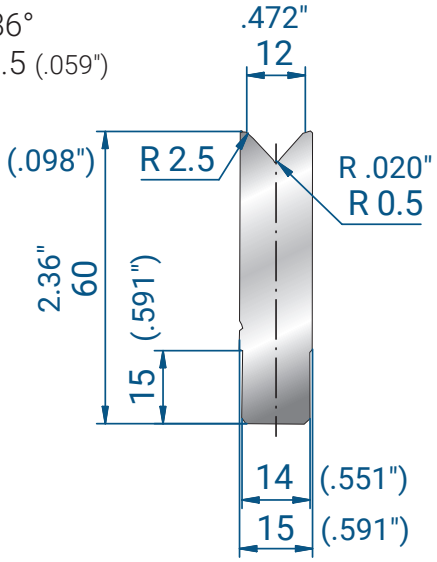

3322 - V10

835 mm	5.1 kg
415 mm	2.5 kg
800 mm SECTIONED	4.9 kg

32.87"	11.2 lb
16.34"	5.5 lb
31.50" SECTIONED	10.8 lb

Mat = CrMo Steel


nitrided and phosphatized
H = 60 mm (2.36")
Max T/m = 100
Max US t/ft = 33.6
α = 86°
R = 2 (.079")

3323 - V12

835 mm	5.5 kg	32.87"	12.1 lb
415 mm	2.7 kg	16.34"	6.0 lb
800 mm SECTIONED	5.3 kg	31.50" SECTIONED	11.7 lb

Mat = CrMo Steel

nitrided and phosphatized
H = 60 mm (2.36")
Max T/m = 100
Max US t/ft = 33.6
α = 86°
R = 2.5 (.098")

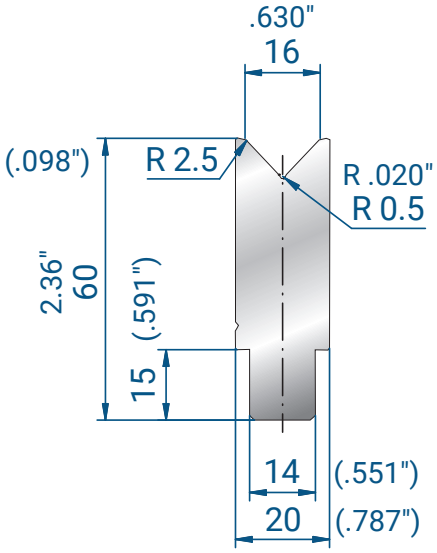


3324 - V16

Mat = CrMo Steel

nitrided and phosphatized
H = 60 mm (2.36")
Max T/m = 100
Max US t/ft = 33.6
α = 86°
R = 2.5 (.098")

835 mm	6.8 kg
415 mm	3.4 kg
800 mm SECTIONED	6.5 kg

32.87"	15.0 lb
16.34"	7.5 lb
31.50" SECTIONED	14.3 lb

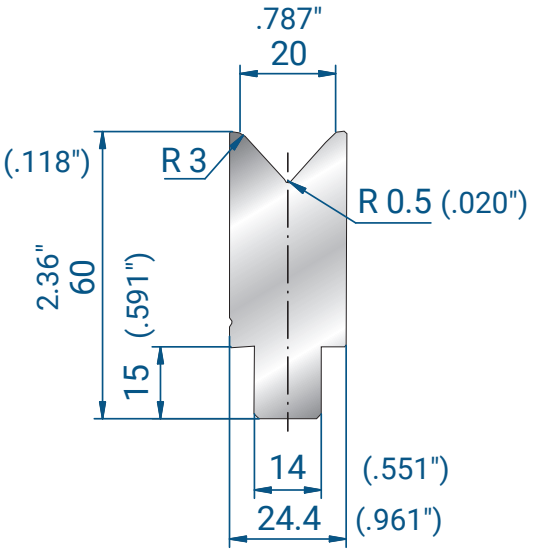


3325 - V20

Mat = CrMo Steel

nitrided and phosphatized
H = 60 mm (2.36")
Max T/m = 100
Max US t/ft = 33.6
α = 86°
R = 3 (.118")

835 mm	7.8 kg
415 mm	3.9 kg
800 mm SECTIONED	7.5 kg

32.87"	17.2 lb
16.34"	8.6 lb
31.50" SECTIONED	16.5 lb

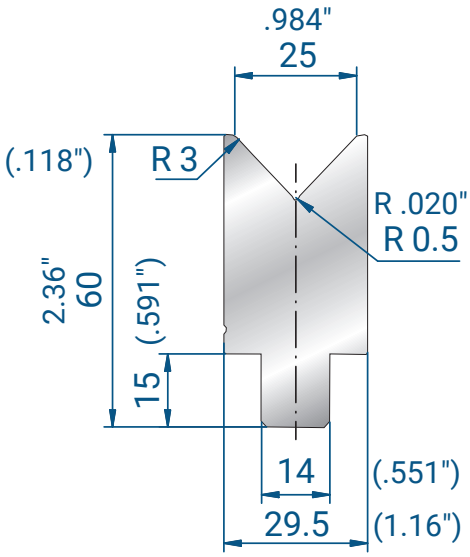


3326 - V25

Mat = CrMo Steel

nitrided and phosphatized
H = 60 mm (2.36")
Max T/m = 100
Max US t/ft = 33.6
α = 86°
R = 3 (.118")

835 mm	8.9 kg
415 mm	4.4 kg
800 mm SECTIONED	8.6 kg

32.87"	19.6 lb
16.34"	9.7 lb
31.50" SECTIONED	19.0 lb

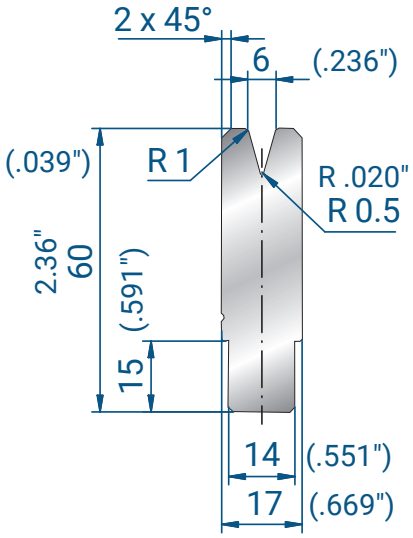


3327 - V6

835 mm	6.1 kg
415 mm	3.0 kg
800 mm SECTIONED	5.9 kg

32.87"	13.4 lb
16.34"	6.6 lb
31.50" SECTIONED	13.0 lb

Mat = CrMo Steel

nitrided and phosphatized
H = 60 mm (2.36")
Max T/m = 50
Max US t/ft = 16.8
α = 30°
R = 1 (.039")

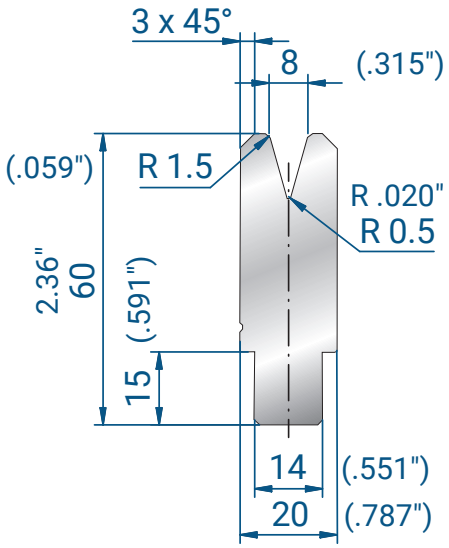


3328 - V8

835 mm	6.8 kg	32.87"	15.0 lb
415 mm	3.4 kg	16.34"	7.5 lb
800 mm SECTIONED	6.5 kg	31.50" SECTIONED	14.3 lb

Mat = CrMo Steel

nitrided and phosphatized
H = 60 mm (2.36")
Max T/m = 60
Max US t/ft = 20.2
α = 30°
R = 1.5 (.059")

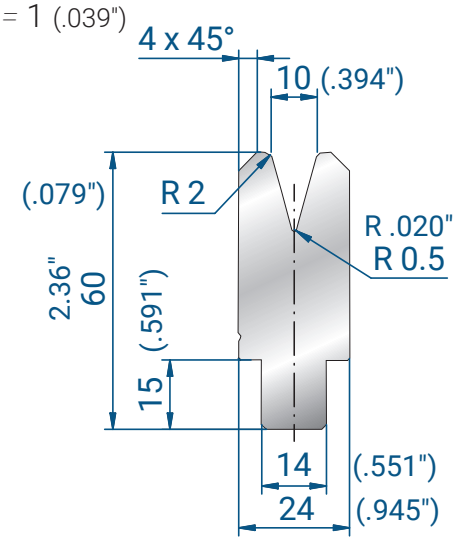


3329 - V10

835 mm	7.7 kg
415 mm	3.8 kg
800 mm SECTIONED	7.4 kg

32.87"	17.0 lb
16.34"	8.4 lb
31.50" SECTIONED	16.3 lb

Mat = CrMo Steel

nitrided and phosphatized
H = 60 mm (2.36")
Max T/m = 70
Max US t/ft = 23.5
α = 30°
R = 2 (.079")

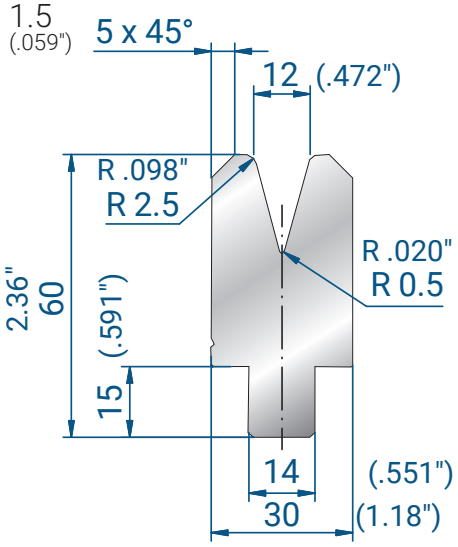

3330 - V12

835 mm	9.1 kg	32.87"	20.1 lb
415 mm	4.5 kg	16.34"	9.9 lb
800 mm SECTIONED	8.8 kg	31.50" SECTIONED	19.4 lb

Mat = CrMo Steel

nitrided and phosphatized
H = 60 mm (2.36")
Max T/m = 80
Max US t/ft = 26.9
α = 30°
R = 2.5 (.098")

EUROSTAMP TOOLING
the Italian excellence

TRUMPF STYLE

The upper and lower tools in this section fit these press brakes:

Trumpf, LVD, Darley, Safan and other press brakes with New Standard (NSCL) clamping.


With the matching upper and lower adapters, they also fit press brakes with other clamping systems.






SEE PAGE 111 FOR DIE SEGMENTATION DIAGRAM

STANDARD LENGTHS

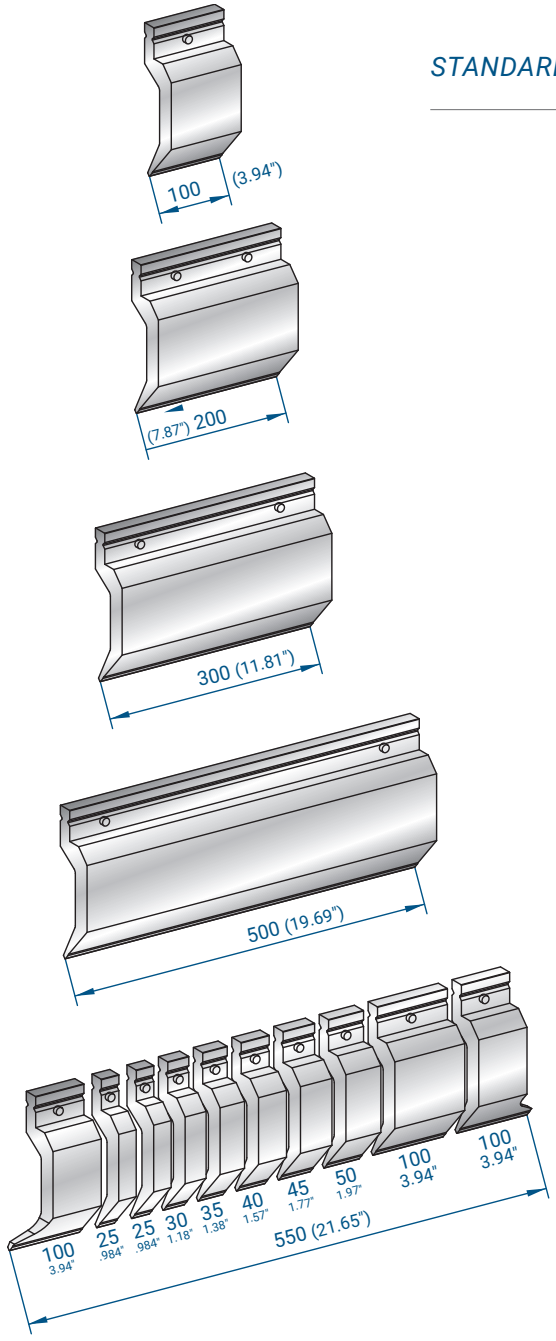





SAFETY BUTTON FITTED AS STANDARD ON ALL TOOLS WEIGHING UP TO 13.5 KG (29.8 LB)

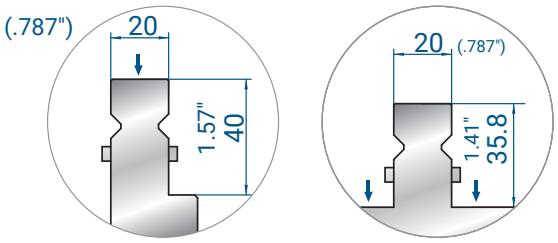

MILLED HORN

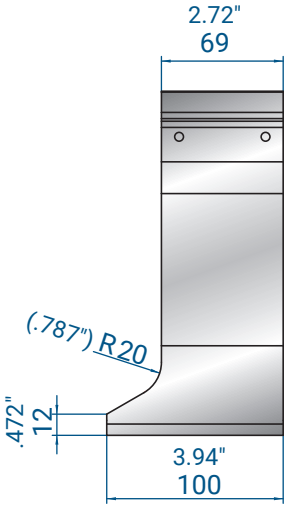

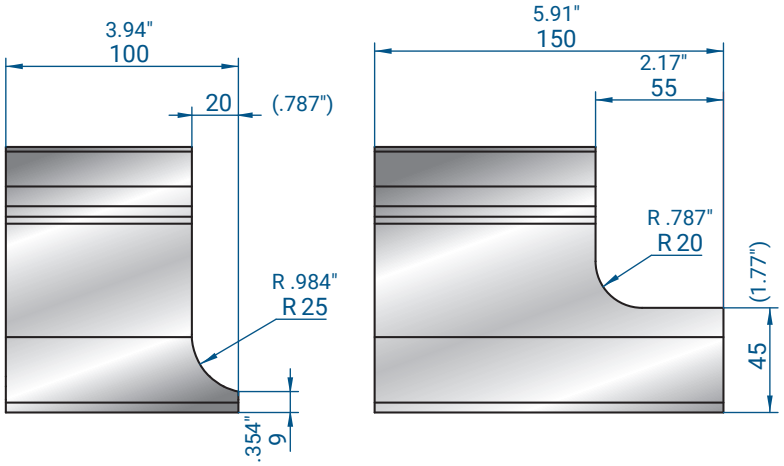


SPECIAL HORNS



SPECIAL SEGMENTATION

RADIUS MODIFICATION

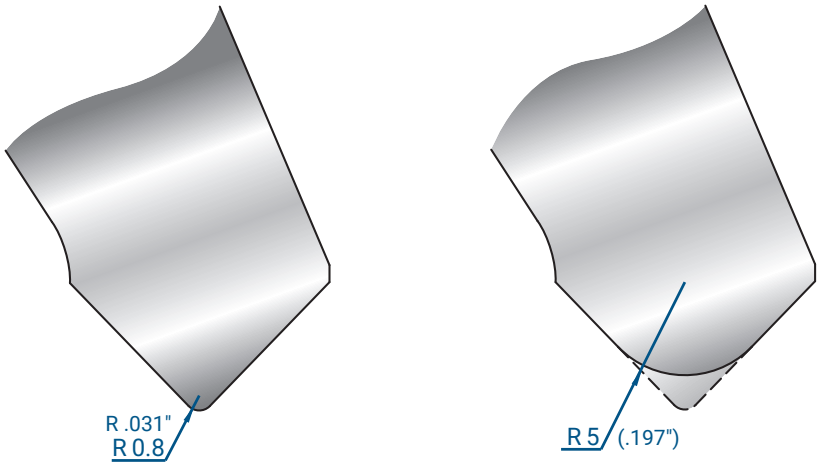

SEGMENTATION FOR PUNCHES

1233 - 1234 - 1235 - 1236
1237 - 1238 - 1295
1302 - 1308 - 1313 - 1314
1316 - 1317 - 1318


550 21.65"				
1050 41.34"		1 X 200 7.87"	1 X 300 11.81"	
1250 49.21"		2 X 200 7.87"	1 X 300 11.81"	
2050 80.71"		1 X 200 7.87"	1 X 300 11.81"	2 X 500 19.69"
2550 100.39"		1 X 200 7.87"	1 X 300 11.81"	3 X 500 19.69"
3050 120.08"		1 X 200 7.87"	1 X 300 11.81"	4 X 500 19.69"
4050 159.45"		1 X 200 7.87"	1 X 300 11.81"	6 X 500 19.69"

SEGMENTATION FOR DIE MODELS - FROM PAGE 113 TO PAGE 115

SEGMENTATION FOR PUNCHES

1294 - 1303 - 1319 - 1320

550
21.65"



1050
41.34"



1 X 200
7.87"

1 X 300
11.81"

1250
49.21"



2 X 200
7.87"

1 X 300
11.81"

2050
80.71"



3 X 200
7.87"

3 X 300
11.81"

2550
100.39"



4 X 200
7.87"

4 X 300
11.81"

3050
120.08"



5 X 200
7.87"

5 X 300
11.81"

4050
159.45"



7 X 200
7.87"

7 X 300
11.81"

SEGMENTATION FOR DIE MODELS - FROM PAGE 113 TO PAGE 115


SEGMENTATION FOR PUNCHES

1315

550
21.65"



1050
41.34"

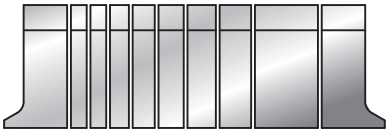

1250
49.21"



2050
80.71"



2550
100.39"




3050
120.08"




4050
159.45"



SEGMENTATION FOR DIE MODELS - FROM PAGE 113 TO PAGE 115

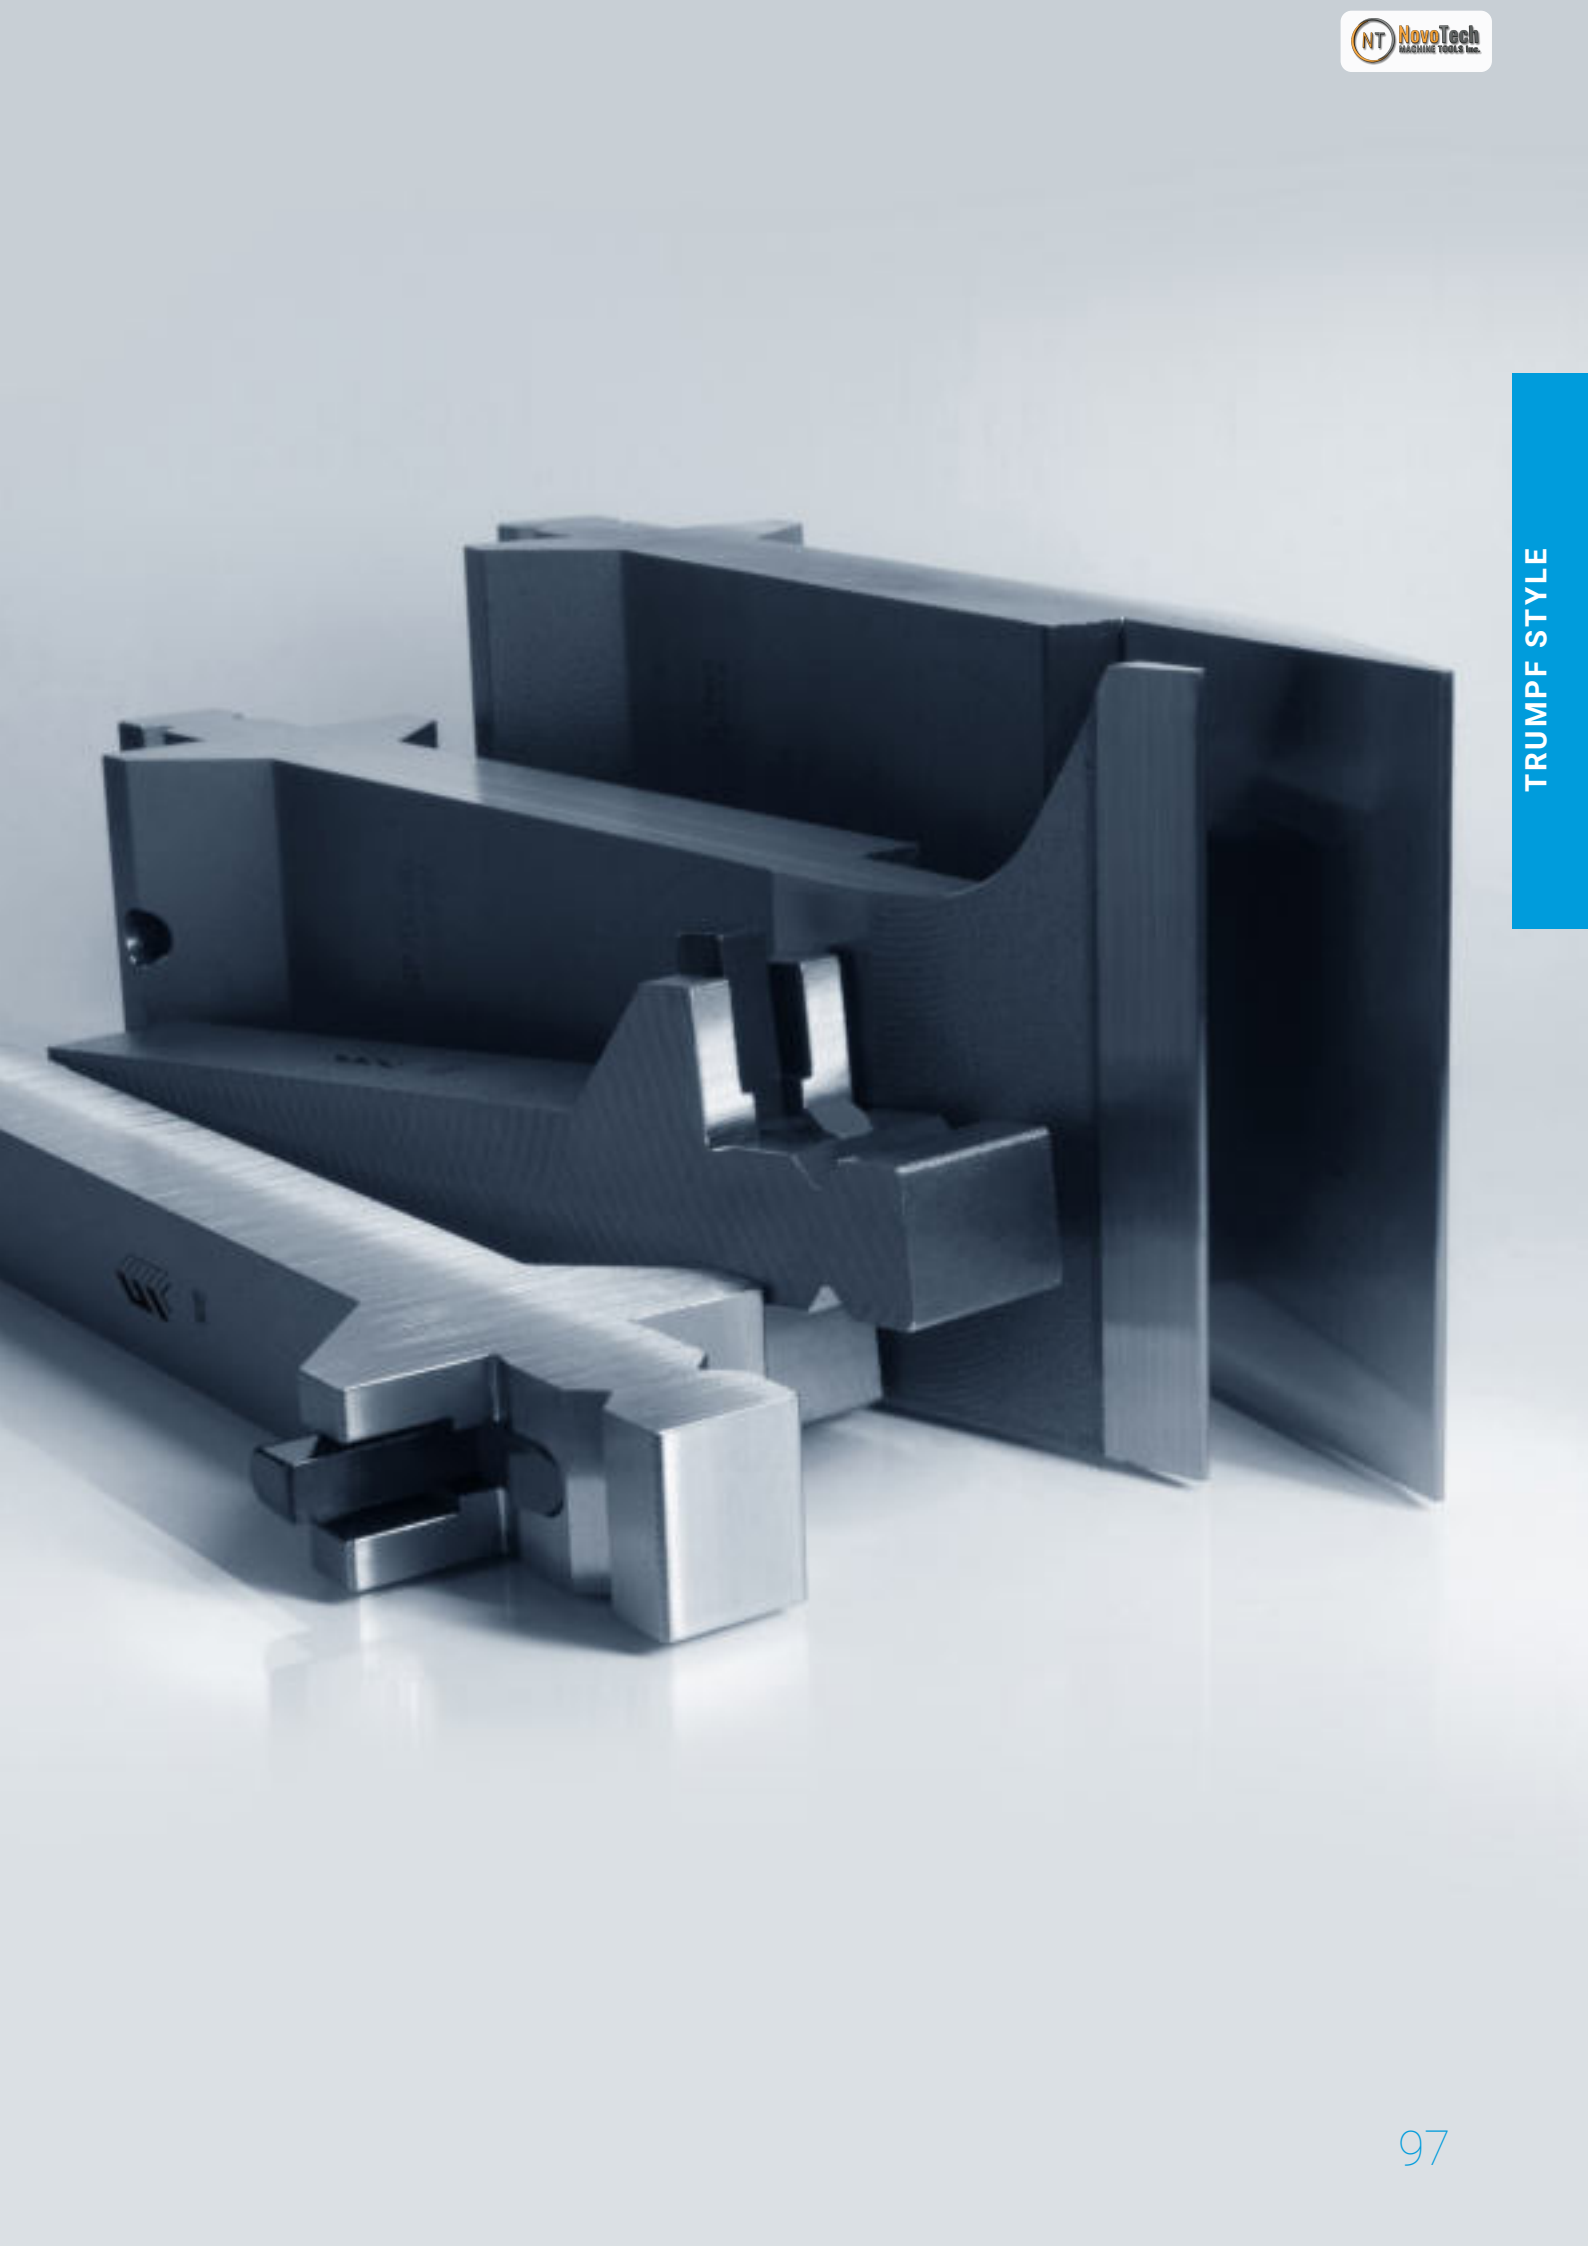

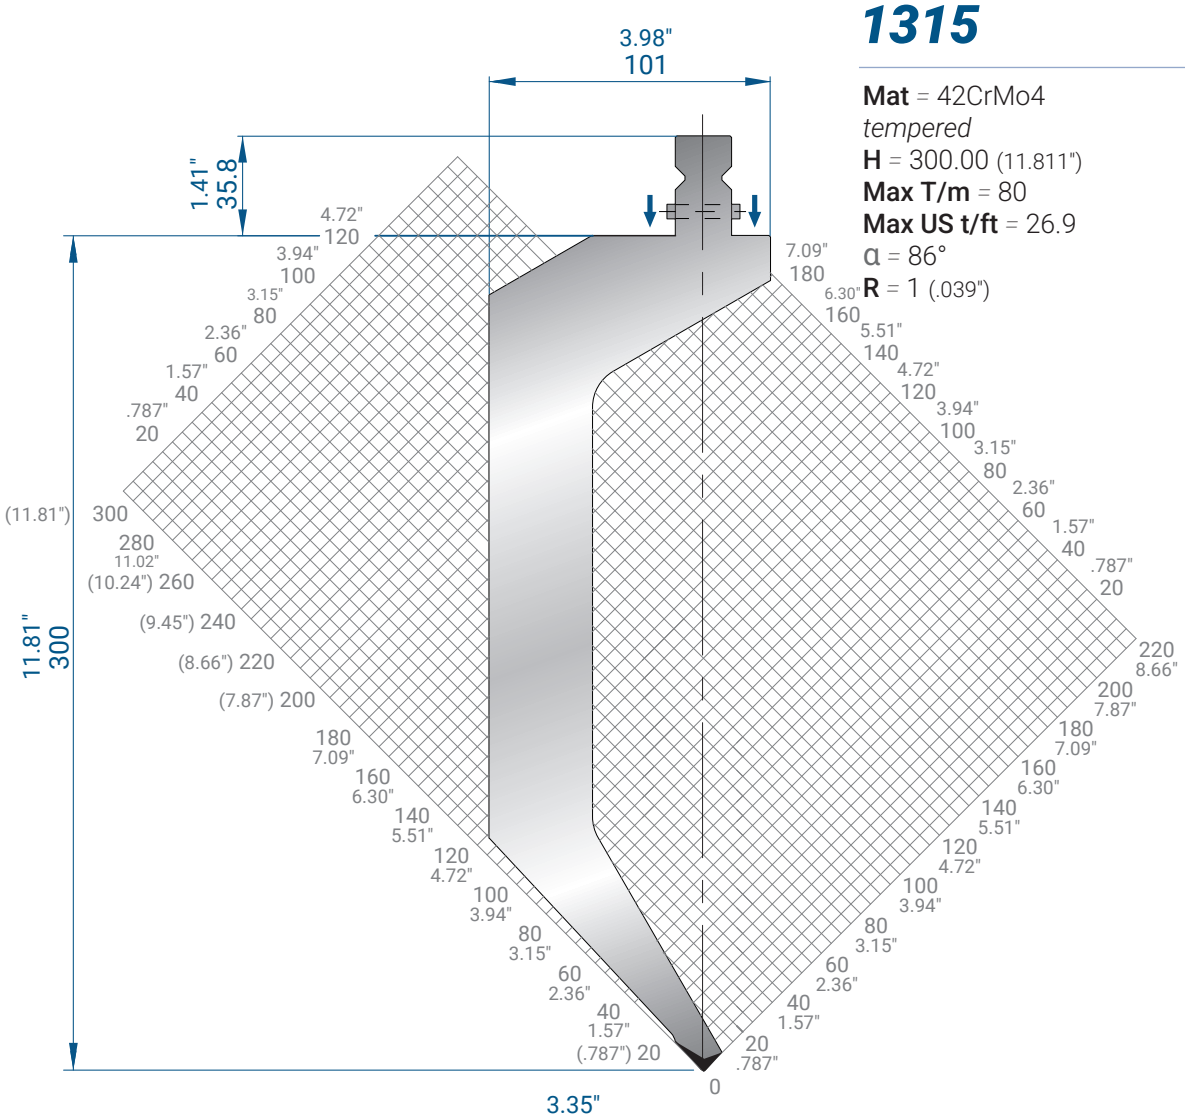


1315

Mat = 42CrMo4
tempered
H = 300.00 (11.811")
Max T/m = 80
Max US t/ft = 26.9
α = 86°
R = 1 (.039")

200 mm 7.87"	19.6 kg 43.2 lb
100 mm 3.94" HORN	6.6 kg 14.6 lb
550 mm 21.65" SECTIONED	48.0 kg 106 lb
100 mm 3.94"	9.8 kg 21.6 lb
50 mm 1.97"	4.9 kg 10.8 lb
45 mm 1.77"	4.4 kg 9.7 lb
40 mm 1.57"	3.9 kg 8.6 lb
35 mm 1.38"	3.4 kg 7.5 lb
30 mm 1.18"	2.9 kg 6.4 lb
25 mm .98"	2.5 kg 5.5 lb

SHOULDER LOAD

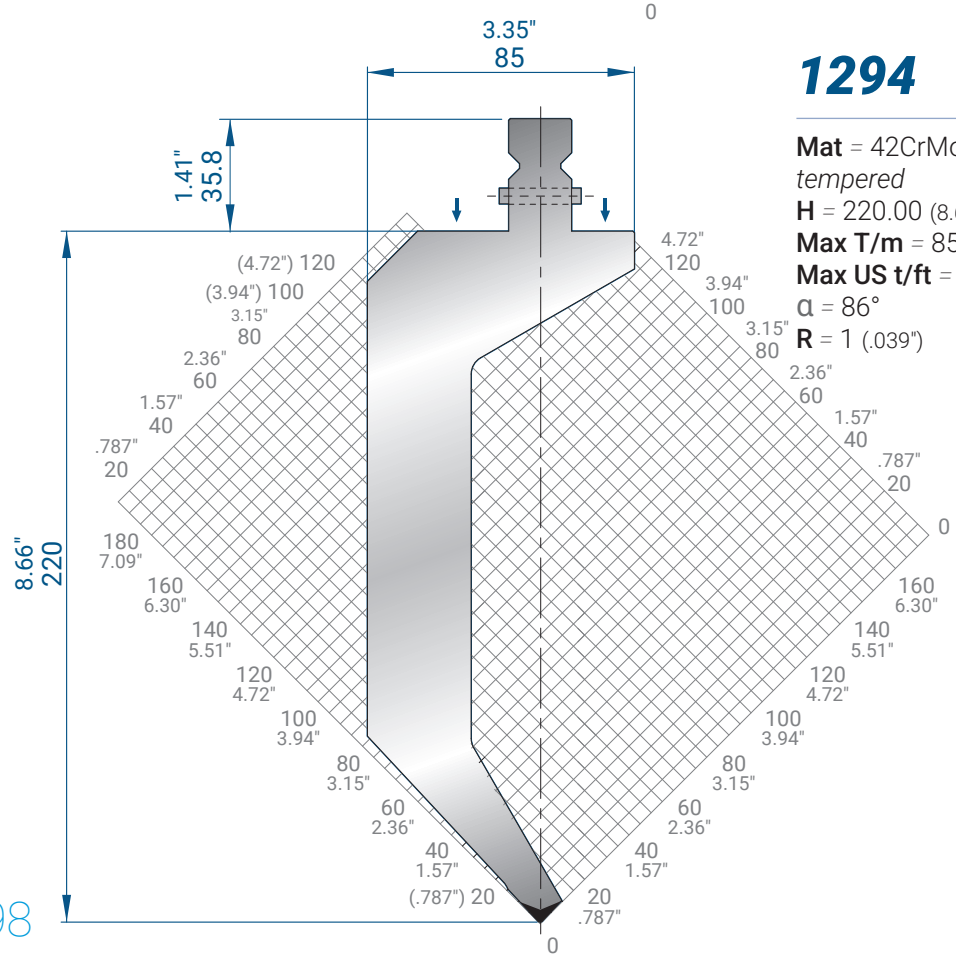


1294

Mat = 42CrMo4
tempered
H = 220.00 (8.661")
Max T/m = 85
Max US t/ft = 28.6
α = 86°
R = 1 (.039")

500 mm 19.69"	33.6 kg 74.1 lb
300 mm 11.81"	20.1 kg 44.3 lb
200 mm 7.87"	13.4 kg 29.5 lb
100 mm 3.94"	6.7 kg 14.8 lb
500 mm 19.69" SECTIONED	29.6 kg 65.3 lb
100 mm 3.94" HORN	4.7 kg 10.4 lb
50 mm 1.97"	3.4 kg 7.5 lb
45 mm 1.77"	3.0 kg 6.6 lb
40 mm 1.57"	2.7 kg 6.0 lb
35 mm 1.38"	2.4 kg 5.3 lb
30 mm 1.18"	2.0 kg 4.4 lb
25 mm .98"	1.7 kg 3.7 lb

SHOULDER LOAD

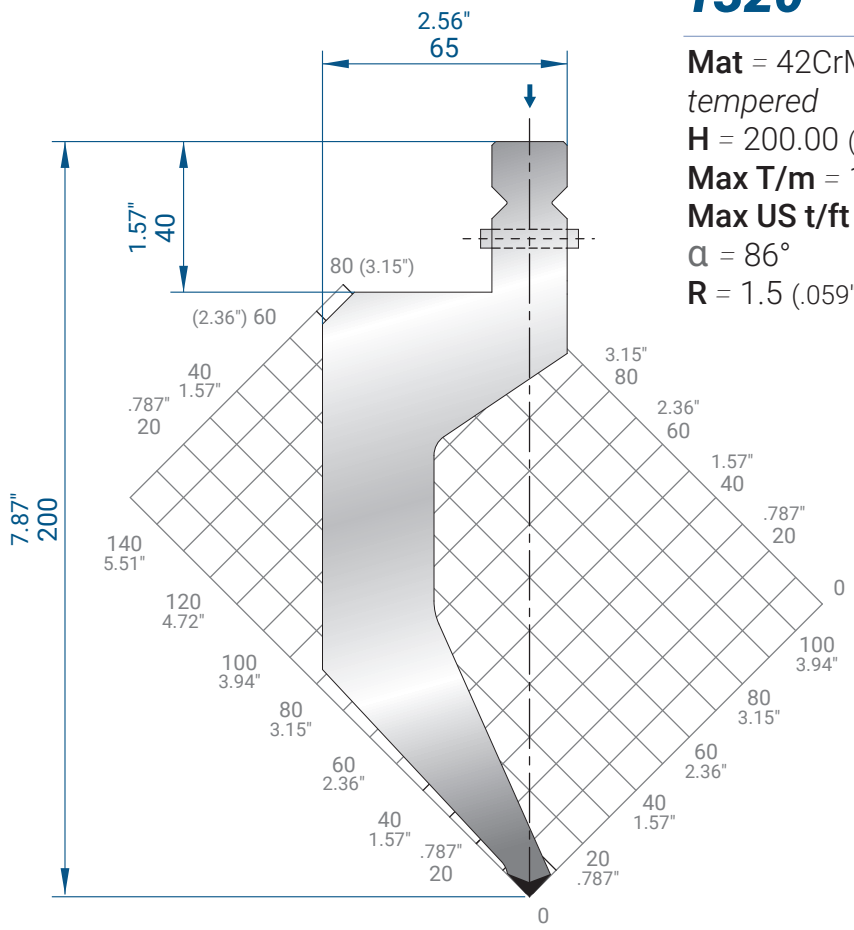


1320

Mat = 42CrMo4
tempered
H = 200.00 (7.874")
Max T/m = 100
Max US t/ft = 33.6
α = 86°
R = 1.5 (.059")

500 mm	23.6 kg
300 mm	14.1 kg
200 mm	9.4 kg
100 mm	4.7 kg
550 mm SECTIONED	23.2 kg
100 mm HORN	3.3 kg
50 mm	2.4 kg
45 mm	2.1 kg
40 mm	1.9 kg
35 mm	1.7 kg
30 mm	1.4 kg
25 mm	1.2 kg

19.69"	52.0 lb
11.81"	31.1 lb
7.87"	20.7 lb
3.94"	10.4 lb
21.65" SECTIONED	51.1 lb
3.94" HORN	7.3 lb
1.97"	5.3 lb
1.77"	4.6 lb
1.57"	4.2 lb
1.38"	3.7 lb
1.18"	3.1 lb
.98"	2.6 lb

(⬇) *HEAD LOAD*

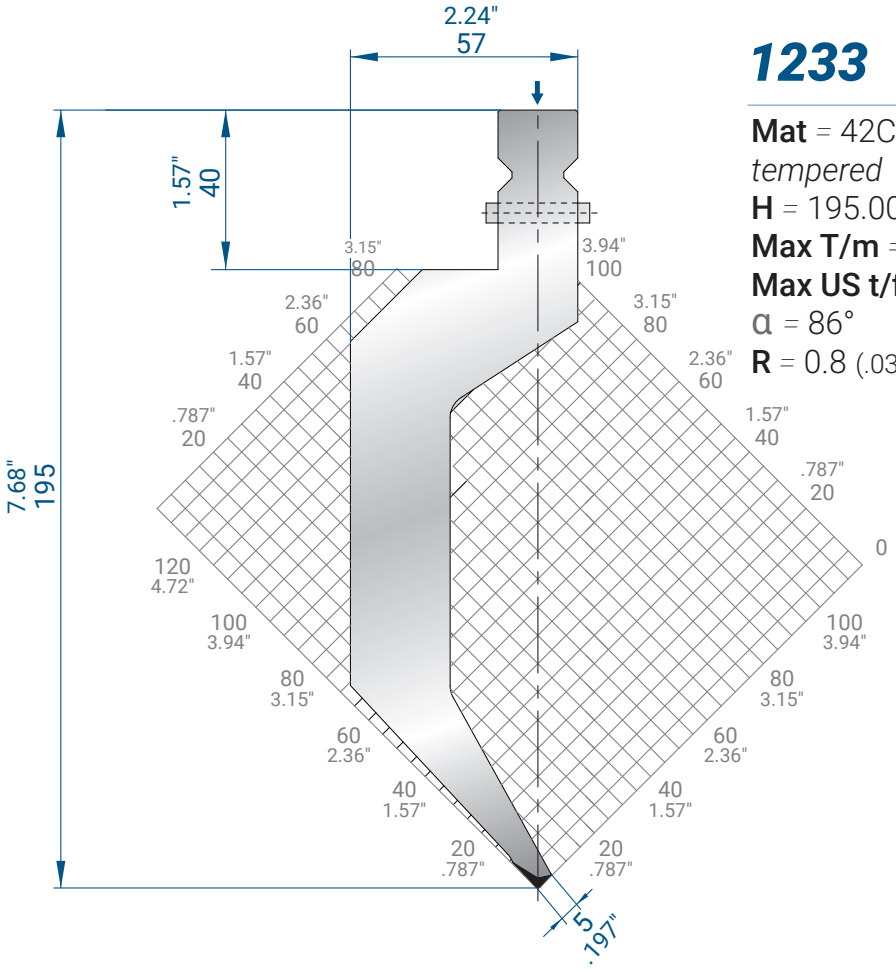


1233

Mat = 42CrMo4
tempered
H = 195.00 (7.677")
Max T/m = 40
Max US t/ft = 13.4
α = 86°
R = 0.8 (.031")

500 mm	18.4 kg	19.69"	40.6 lb
300 mm	11.0 kg	11.81"	24.3 lb
200 mm	7.4 kg	7.87"	16.3 lb
100 mm	3.7 kg	3.94"	8.2 lb
550 mm SECTIONED	18.1 kg	21.65" SECTIONED	39.9 lb
100 mm HORN	2.6 kg	3.94" HORN	5.7 lb
50 mm	1.8 kg	1.97"	4.0 lb
45 mm	1.7 kg	1.77"	3.7 lb
40 mm	1.5 kg	1.57"	3.3 lb
35 mm	1.3 kg	1.38"	2.9 lb
30 mm	1.1 kg	1.18"	2.4 lb
25 mm	0.9 kg	.98"	2.0 lb

(⬇) *HEAD LOAD*

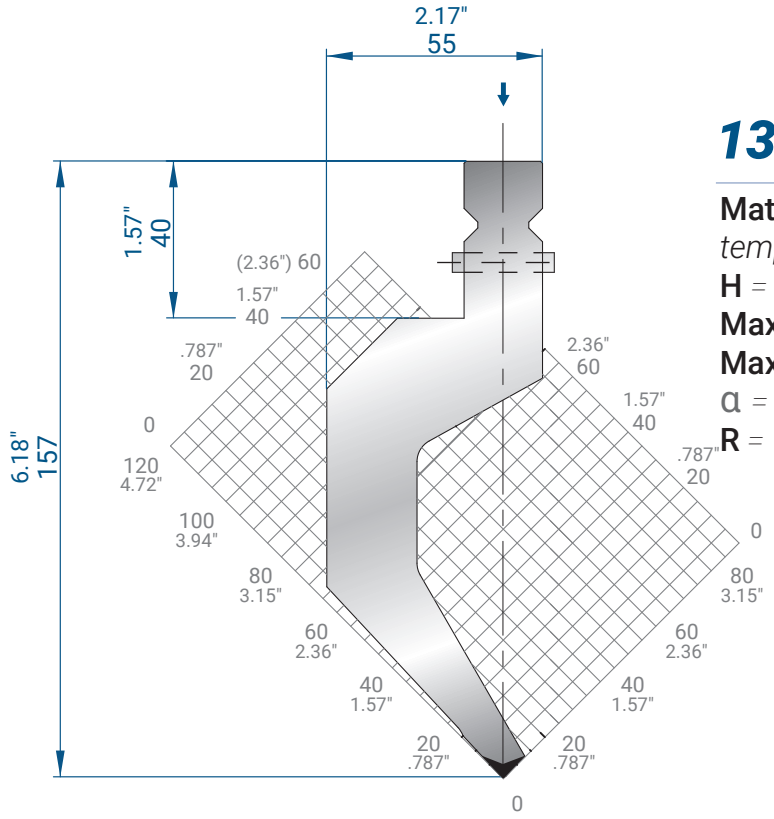


1314

Mat = 42CrMo4
tempered
H = 157.00 (6.181")
Max T/m = 80
Max US t/ft = 26.9
α = 86°
R = 1 (.039")

500 mm	14.6 kg
300 mm	8.8 kg
200 mm	5.9 kg
100 mm	2.9 kg
550 mm SECTIONED	13.0 kg
100 mm HORN	2.1 kg
50 mm	1.5 kg
45 mm	1.3 kg
40 mm	1.2 kg
35 mm	1.0 kg
30 mm	0.9 kg
25 mm	0.7 kg

19.69"	32.2 lb
11.81"	19.4 lb
7.87"	13.0 lb
3.94"	6.4 lb
21.65" SECTIONED	28.7 lb
3.94" HORN	4.6 lb
1.97"	3.3 lb
1.77"	2.9 lb
1.57"	2.6 lb
1.38"	2.2 lb
1.18"	2.0 lb
.98"	1.5 lb

HEAD LOAD

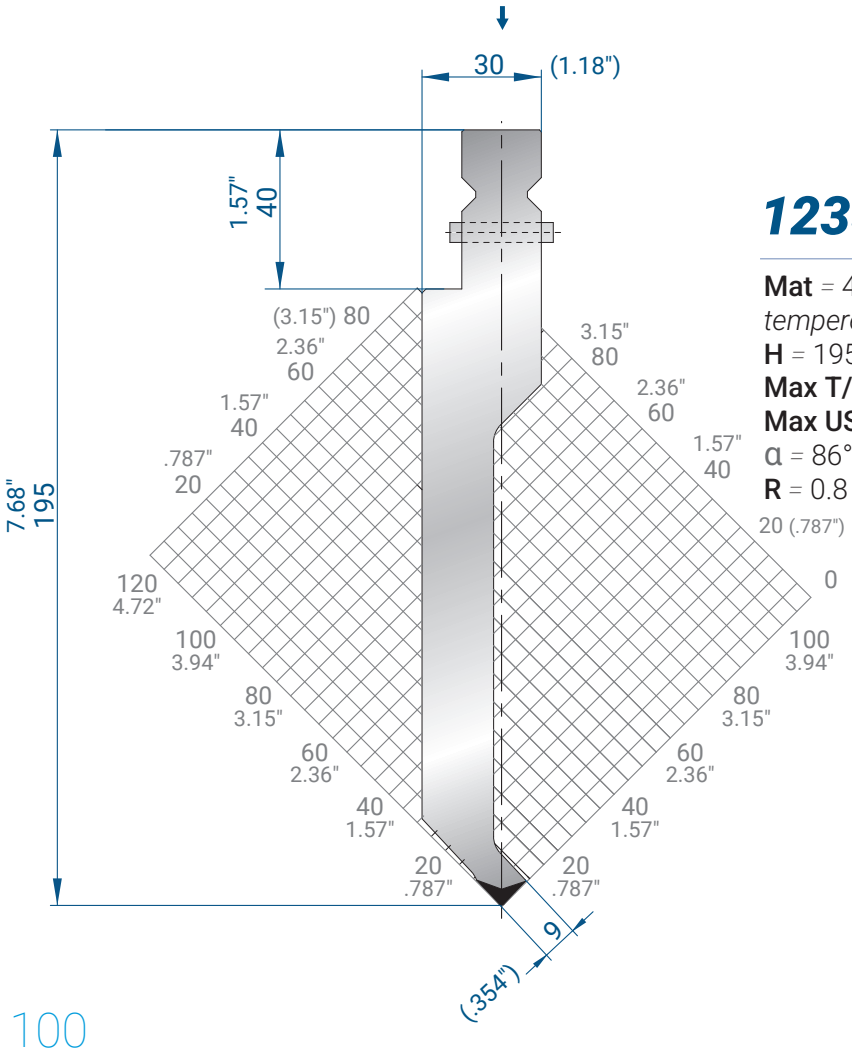


1235

Mat = 42CrMo4
tempered
H = 195.00 (7.677")
Max T/m = 100
Max US t/ft = 33.6
α = 86°
R = 0.8 (.031")

500 mm	14.8 kg
300 mm	8.9 kg
200 mm	5.9 kg
100 mm	3.0 kg
550 mm SECTIONED	14.5 kg
100 mm HORN	2.1 kg
50 mm	1.5 kg
45 mm	1.3 kg
40 mm	1.2 kg
35 mm	1.0 kg
30 mm	0.9 kg
25 mm	0.7 kg

19.69"	32.6 lb
11.81"	19.6 lb
7.87"	13.0 lb
3.94"	6.6 lb
21.65" SECTIONED	32.0 lb
3.94" HORN	4.6 lb
1.97"	3.3 lb
1.77"	2.9 lb
1.57"	2.6 lb
1.38"	2.2 lb
1.18"	2.0 lb
.98"	1.5 lb

HEAD LOAD

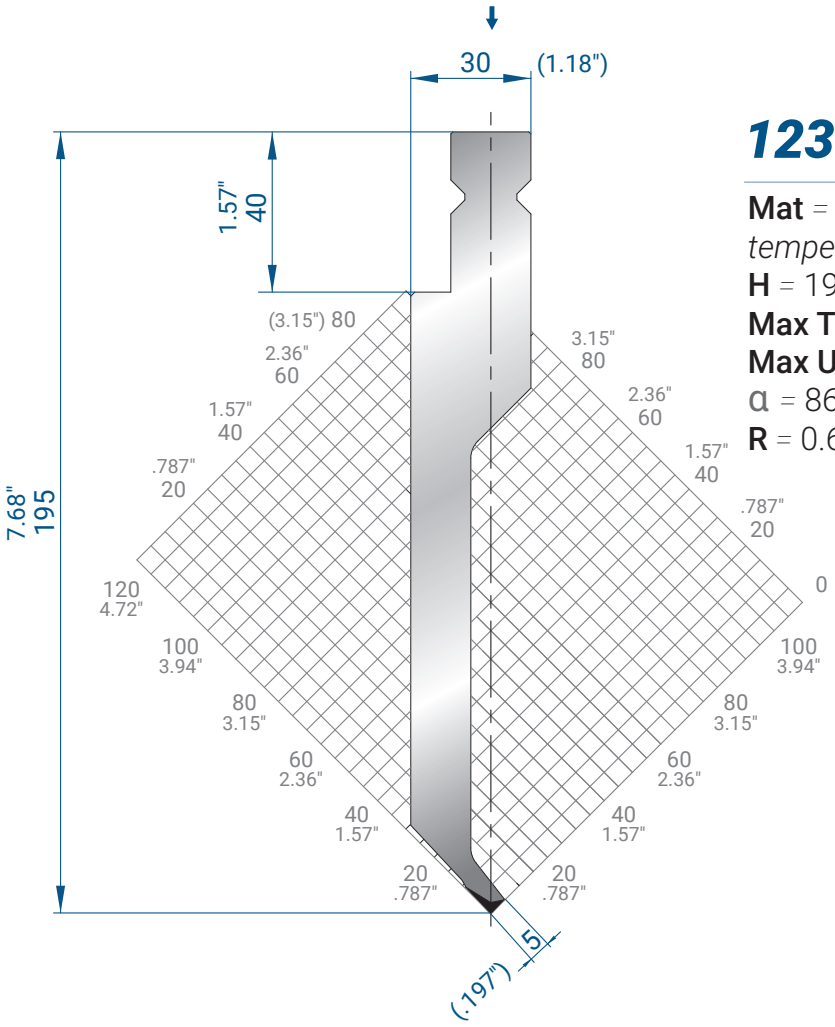


1234

Mat = 42CrMo4
tempered
H = 195.00 (7.677")
Max T/m = 30
Max US t/ft = 10.1
α = 86°
R = 0.6 (.024")

HEAD LOAD

500 mm	13.3 kg
300 mm	8.0 kg
200 mm	5.3 kg
100 mm	2.7 kg
550 mm SECTIONED	13.1 kg
100 mm HORN	1.9 kg
50 mm	1.3 kg
45 mm	1.2 kg
40 mm	1.1 kg
35 mm	0.9 kg
30 mm	0.8 kg
25 mm	0.7 kg

19.69"	29.3 lb
11.81"	17.6 lb
7.87"	11.7 lb
3.94"	6.0 lb
21.65" SECTIONED	28.9 lb
3.94" HORN	4.2 lb
1.97"	2.9 lb
1.77"	2.6 lb
1.57"	2.4 lb
1.38"	2.0 lb
1.18"	1.8 lb
.98"	1.5 lb

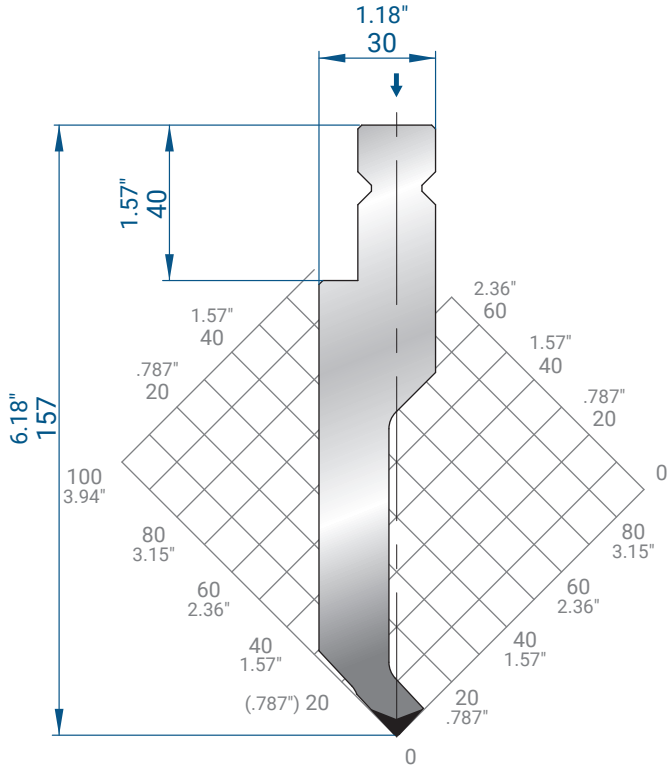


1317

Mat = 42CrMo4
tempered
H = 157.00 (6.181")
Max T/m = 100
Max US t/ft = 33.6
α = 86°
R = 1 (.039")

HEAD LOAD

500 mm	12.1 kg	19.69"	26.7 lb
300 mm	7.3 kg	11.81"	16.1 lb
200 mm	4.8 kg	7.87"	10.6 lb
100 mm	2.4 kg	3.94"	5.3 lb
550 mm SECTIONED	11.9 kg	21.65" SECTIONED	26.2 lb
100 mm HORN	1.8 kg	3.94" HORN	4.0 lb
50 mm	1.2 kg	1.97"	2.6 lb
45 mm	1.1 kg	1.77"	2.4 lb
40 mm	1.0 kg	1.57"	2.2 lb
35 mm	0.8 kg	1.38"	1.8 lb
30 mm	0.7 kg	1.18"	1.5 lb
25 mm	0.6 kg	.98"	1.3 lb

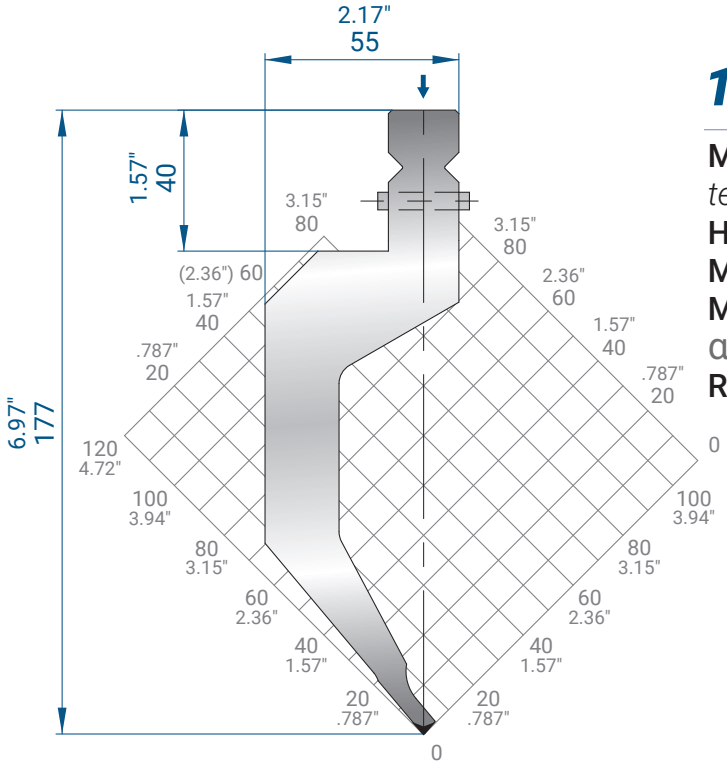


1319

Mat = 42CrMo4
tempered
H = 177.00 (6.969")
Max T/m = 40
Max US t/ft = 13.4
α = 80°
R = 0.5 (.020")

500 mm	15.4 kg	19.69"	34.0 lb
300 mm	9.2 kg	11.81"	20.3 lb
200 mm	6.2 kg	7.87"	13.7 lb
100 mm	3.1 kg	3.94"	6.8 lb
550 mm SECTIONED	15.1 kg	21.65" SECTIONED	33.3 lb
100 mm HORN	2.2 kg	3.94" HORN	4.9 lb
50 mm	1.5 kg	1.97"	3.3 lb
45 mm	1.4 kg	1.77"	3.1 lb
40 mm	1.2 kg	1.57"	2.6 lb
35 mm	1.1 kg	1.38"	2.4 lb
30 mm	0.9 kg	1.18"	2.0 lb
25 mm	0.8 kg	.98"	1.8 lb

HEAD LOAD

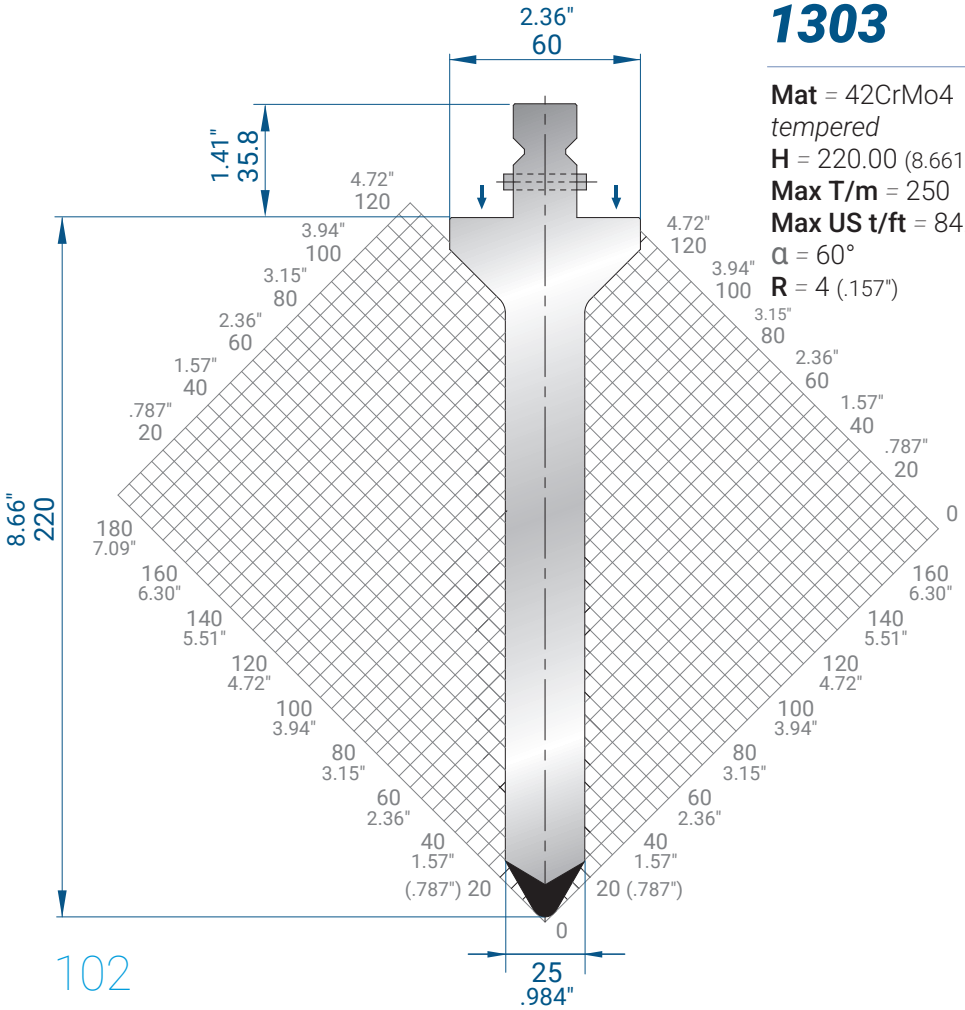


1303

Mat = 42CrMo4
tempered
H = 220.00 (8.661")
Max T/m = 250
Max US t/ft = 84.0
α = 60°
R = 4 (.157")

500 mm	26.1 kg	19.69"	57.5 lb
300 mm	15.6 kg	11.81"	34.4 lb
200 mm	10.4 kg	7.87"	22.9 lb
100 mm	5.2 kg	3.94"	11.5 lb
550 mm SECTIONED	25.6 kg	21.65" SECTIONED	56.4 lb
100 mm HORN	3.7 kg	3.94" HORN	8.2 lb
50 mm	2.6 kg	1.97"	5.7 lb
45 mm	2.3 kg	1.77"	5.1 lb
40 mm	2.1 kg	1.57"	4.6 lb
35 mm	1.8 kg	1.38"	4.0 lb
30 mm	1.6 kg	1.18"	3.5 lb
25 mm	1.3 kg	.98"	2.9 lb

SHOULDER LOAD

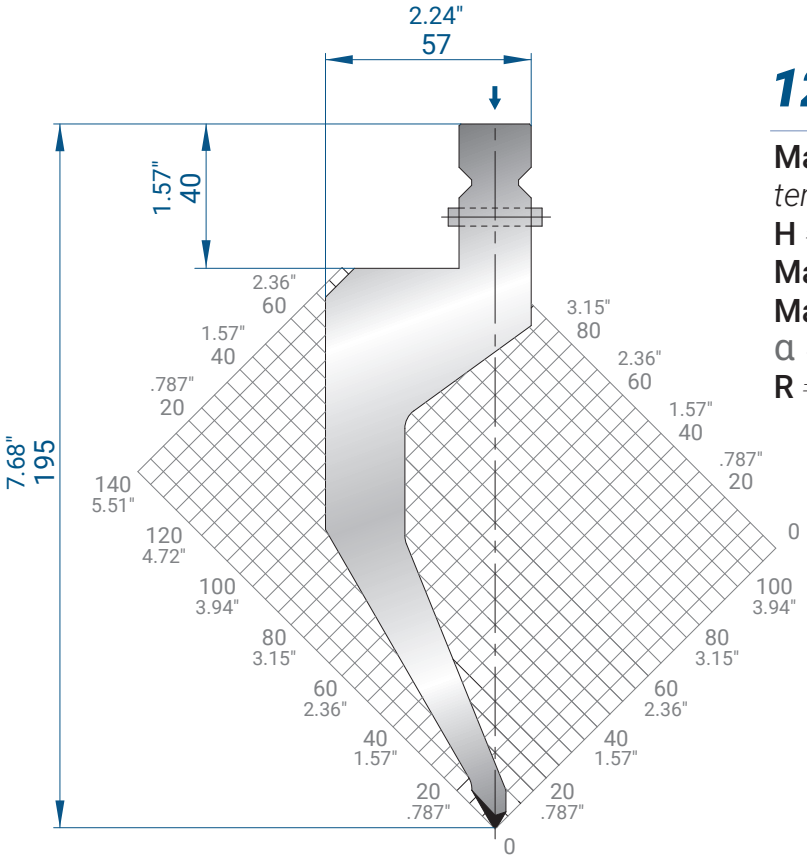


1236

Mat = 42CrMo4
tempered
H = 195.00 (7.677")
Max T/m = 40
Max US t/ft = 13.4
α = 60°
R = 0.8 (.031")

500 mm	17.4 kg
300 mm	10.4 kg
200 mm	7.0 kg
100 mm	3.5 kg
550 mm SECTIONED	17.1 kg
100 mm HORN	2.4 kg
50 mm	1.7 kg
45 mm	1.6 kg
40 mm	1.4 kg
35 mm	1.2 kg
30 mm	1.0 kg
25 mm	0.9kg

19.69"	38.4 lb
11.81"	22.9 lb
7.87"	15.4 lb
3.94"	7.7 lb
21.65" SECTIONED	37.7 lb
3.94" HORN	5.3 lb
1.97"	3.7 lb
1.77"	3.5 lb
1.57"	3.1 lb
1.38"	2.6 lb
1.18"	2.2 lb
.98"	2.0 lb

HEAD LOAD

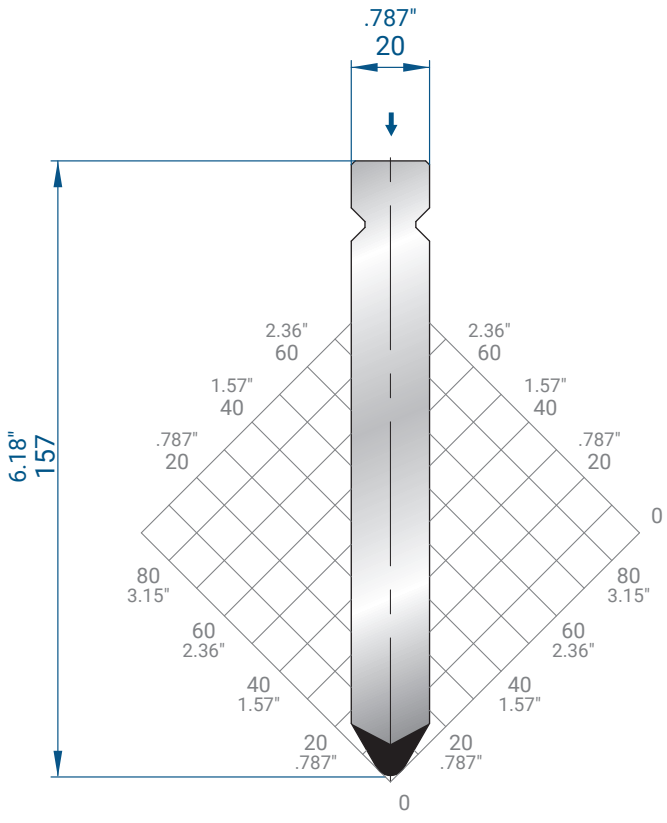


1318

Mat = 42CrMo4
tempered
H = 157.00 (6.181")
Max T/m = 180
Max US t/ft = 60.5
α = 60°
R = 4 (.157")

500 mm	11.8 kg	19.69"	26.0 lb
300 mm	7.0 kg	11.81"	15.4 lb
200 mm	4.7 kg	7.87"	10.4 lb
100 mm	2.4 kg	3.94"	5.3 lb
550 mm SECTIONED	11.6 kg	21.65" SECTIONED	25.6 lb
100 mm HORN	1.7 kg	3.94" HORN	3.7 lb
50 mm	1.2 kg	1.97"	2.6 lb
45 mm	1.1 kg	1.77"	2.4 lb
40 mm	0.9 kg	1.57"	2.0 lb
35 mm	0.8 kg	1.38"	1.8 lb
30 mm	0.7 kg	1.18"	1.5 lb
25 mm	0.6 kg	.98"	1.3 lb

HEAD LOAD

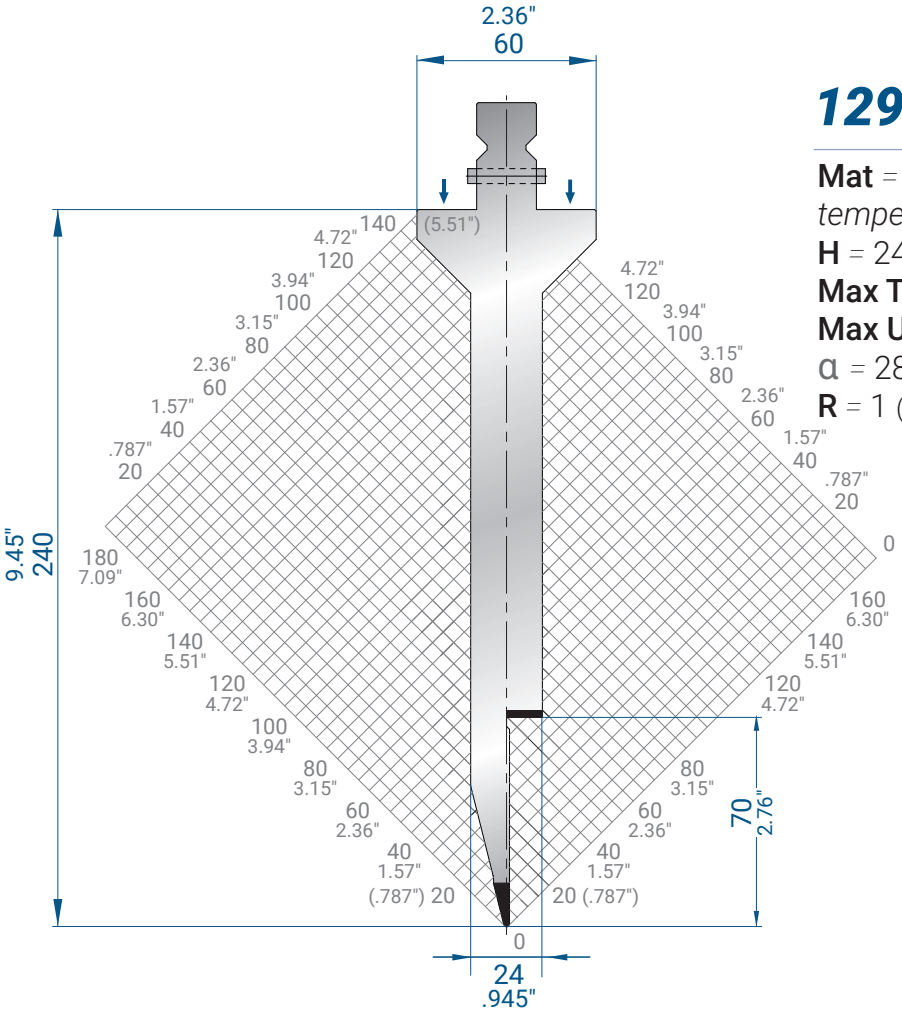


1295

Mat = 42CrMo4
tempered
H = 240.00 (9.449")
Max T/m = 40
Max US t/ft = 13.4
α = 28°
R = 1 (.039")

500 mm	23.8 kg
300 mm	14.3 kg
200 mm	9.5 kg
100 mm	4.8 kg
550 mm SECTIONED	23.3 kg
100 mm HORN	3.3 kg
50 mm	2.4 kg
45 mm	2.1 kg
40 mm	1.9 kg
35 mm	1.7 kg
30 mm	1.4 kg
25 mm	1.2 kg

19.69"	52.5 lb
11.81"	31.5 lb
7.87"	20.9 lb
3.94"	10.6 lb
21.65" SECTIONED	51.4 lb
3.94" HORN	7.3 lb
1.97"	5.3 lb
1.77"	4.6 lb
1.57"	4.2 lb
1.38"	3.7 lb
1.18"	3.1 lb
.98"	2.6 lb

(↓)
SHOULDER LOAD

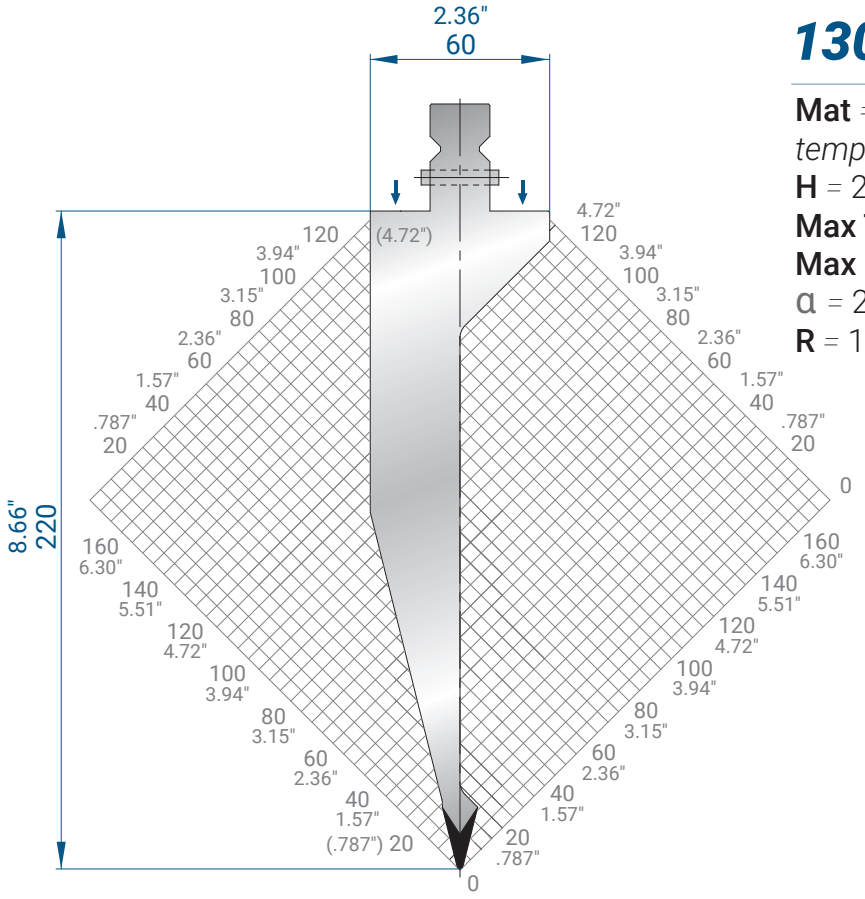


1302

Mat = 42CrMo4
tempered
H = 220.00 (8.661")
Max T/m = 80
Max US t/ft = 26.9
α = 28°
R = 1 (.039")

500 mm	24.9 kg
300 mm	14.9 kg
200 mm	10.0 kg
100 mm	5.0 kg
550 mm SECTIONED	24.4 kg
100 mm HORN	3.5 kg
50 mm	2.5 kg
45 mm	2.2 kg
40 mm	2.0 kg
35 mm	1.7 kg
30 mm	1.5 kg
25 mm	1.3 kg

19.69"	54.9 lb
11.81"	32.8 lb
7.87"	22.0 lb
3.94"	11.0 lb
21.65" SECTIONED	53.8 lb
3.94" HORN	7.7 lb
1.97"	5.5 lb
1.77"	4.9 lb
1.57"	4.4 lb
1.38"	3.7 lb
1.18"	3.3 lb
.98"	2.9 lb

(↓)
SHOULDER LOAD

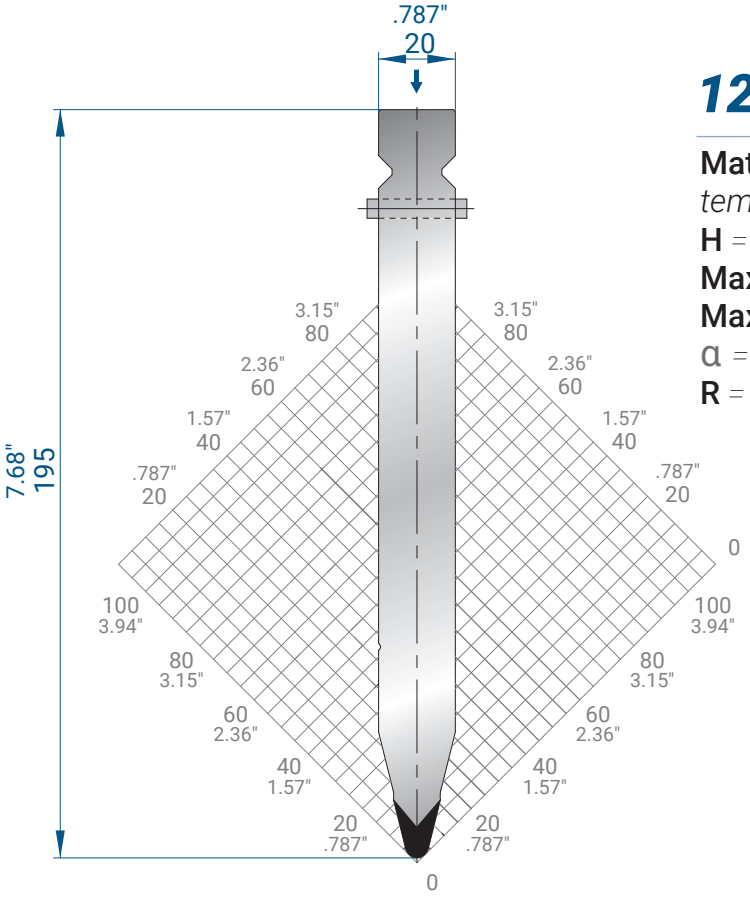


1237

Mat = 42CrMo4
tempered
H = 195.00 (7.677")
Max T/m = 160
Max US t/ft = 53.8
α = 28°
R = 3 (.118")

500 mm	14.1 kg
300 mm	8.5 kg
200 mm	5.7 kg
100 mm	2.8 kg
500 mm SECTIONED	13.9 kg
100 mm HORN	2.0 kg
50 mm	1.4 kg
45 mm	1.3 kg
40 mm	1.1 kg
35 mm	1.0 kg
30 mm	0.8 kg
25 mm	0.7 kg

19.69"	31.1 lb
11.81"	18.7 lb
7.87"	12.6 lb
3.94"	6.2 lb
19.69" SECTIONED	30.6 lb
3.94" HORN	4.4 lb
1.97"	3.1 lb
1.77"	2.9 lb
1.57"	2.4 lb
1.38"	2.2 lb
1.18"	1.8 lb
.98"	1.5 lb

HEAD LOAD

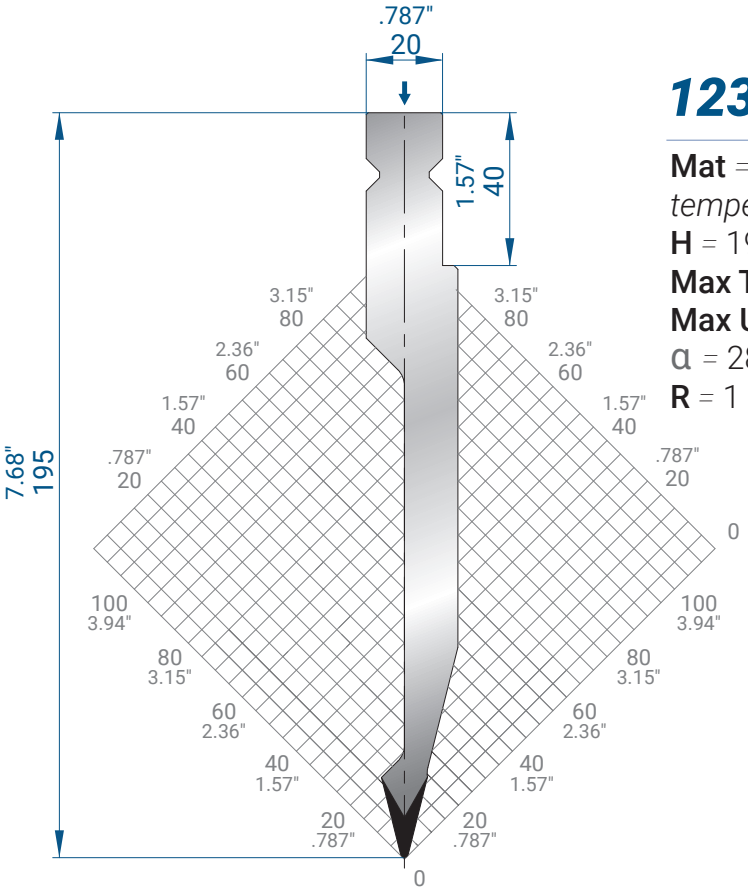


1238

Mat = 42CrMo4
tempered
H = 195.00 (7.677")
Max T/m = 80
Max US t/ft = 26.9
α = 28°
R = 1 (.039")

500 mm	11.4 kg	19.69"	25.1 lb
300 mm	6.8 kg	11.81"	15.0 lb
200 mm	4.5 kg	7.87"	9.9 lb
100 mm	2.3 kg	3.94"	5.1 lb
550 mm SECTIONED	11.1 kg	21.65" SECTIONED	24.5 lb
100 mm HORN	1.6 kg	3.94" HORN	3.5 lb
50 mm	1.1 kg	1.97"	2.4 lb
45 mm	1.0 kg	1.77"	2.2 lb
40 mm	0.9 kg	1.57"	2.0 lb
35 mm	0.8 kg	1.38"	1.8 lb
30 mm	0.7 kg	1.18"	1.5 lb
25 mm	0.6 kg	.98"	1.3 lb

HEAD LOAD

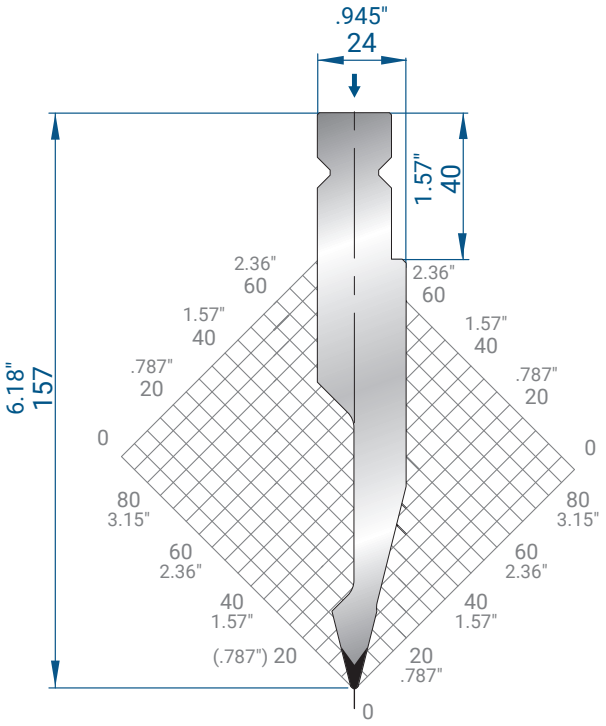


1313

Mat = 42CrMo4
tempered
H = 157.00 (6.181")
Max T/m = 80
Max US t/ft = 26.9
α = 28°
R = 1 (.039")

500 mm	9.8 kg
300 mm	5.9 kg
200 mm	3.9 kg
100 mm	2.0 kg
550 mm SECTIONED	9.7 kg
100 mm HORN	1.4 kg
50 mm	1.0 kg
45 mm	0.9 kg
40 mm	0.8 kg
35 mm	0.7 kg
30 mm	0.6 kg
25mm	0.5 kg

19.69"	21.6 lb
11.81"	13.0 lb
7.87"	8.6 lb
3.94"	4.4 lb
21.65" SECTIONED	21.4 lb
3.94" HORN	3.1 lb
1.97"	2.2 lb
1.77"	2.0 lb
1.57"	1.8 lb
1.38"	1.5 lb
1.18"	1.3 lb
.98"	1.1 lb

HEAD LOAD

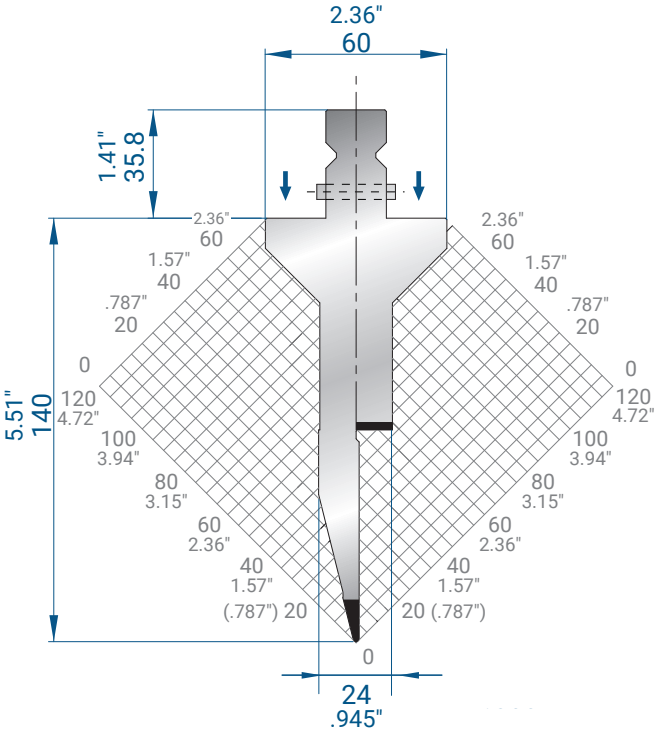


1308

Mat = 42CrMo4
tempered
H = 140.00 (5.512")
Max T/m = 40
Max US t/ft = 13.4
α = 28°
R = 1 (.039")

500 mm	14.4 kg
300 mm	8.7 kg
200 mm	5.8 kg
100 mm	2.9 kg
550 mm SECTIONED	14.1 kg
100 mm HORN	2.0 kg
50 mm	1.4 kg
45 mm	1.3 kg
40 mm	1.2 kg
35 mm	1.0 kg
30 mm	0.9 kg
25 mm	0.7 kg

19.69"	31.7 lb
11.81"	19.2 lb
7.87"	12.8 lb
3.94"	6.4 lb
21.65" SECTIONED	31.1 lb
3.94" HORN	4.4 lb
1.97"	3.1 lb
1.77"	2.9 lb
1.57"	2.6 lb
1.38"	2.2 lb
1.18"	2.0 lb
.98"	1.5 lb

SHOULDER LOAD

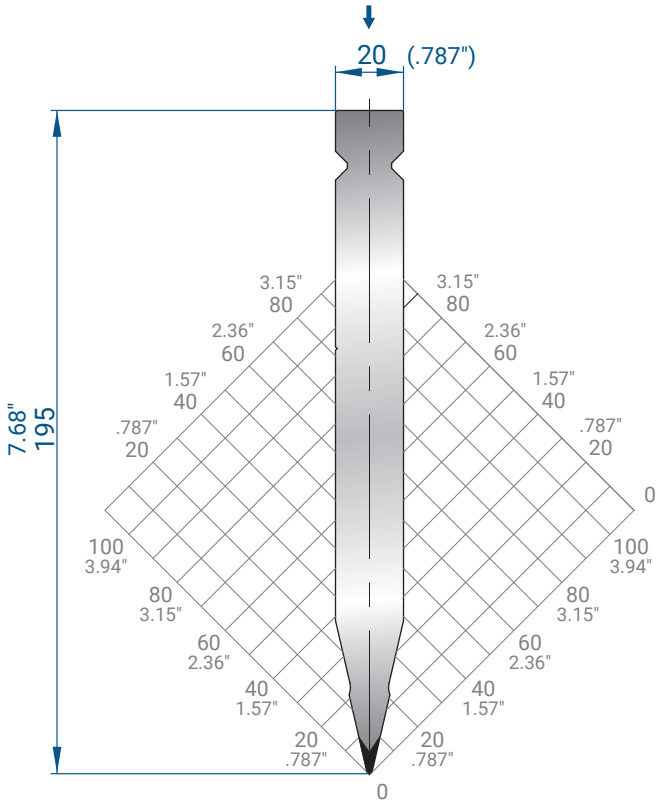

1316


Mat = 42CrMo4
tempered
H = 195.00 (7.677")
Max T/m = 100
Max US t/ft = 33.6
α = 26°
R = 0.8 (.031")

HEAD LOAD

500 mm	13.5 kg
300 mm	8.1 kg
200 mm	5.4 kg
100 mm	2.7 kg
550 mm SECTIONED	13.2 kg
100 mm HORN	1.9 kg
50 mm	1.4 kg
45 mm	1.2 kg
40 mm	1.1 kg
35 mm	0.9 kg
30 mm	0.8 kg
25 mm	0.7 kg


19.69"	29.8 lb
11.81"	17.9 lb
7.87"	11.9 lb
3.94"	6.0 lb
21.65" SECTIONED	29.1 lb
3.94" HORN	4.2 lb
1.97"	3.1 lb
1.77"	2.6 lb
1.57"	2.4 lb
1.38"	2.0 lb
1.18"	1.8 lb
.98"	1.5 lb

TRUMPF STYLE

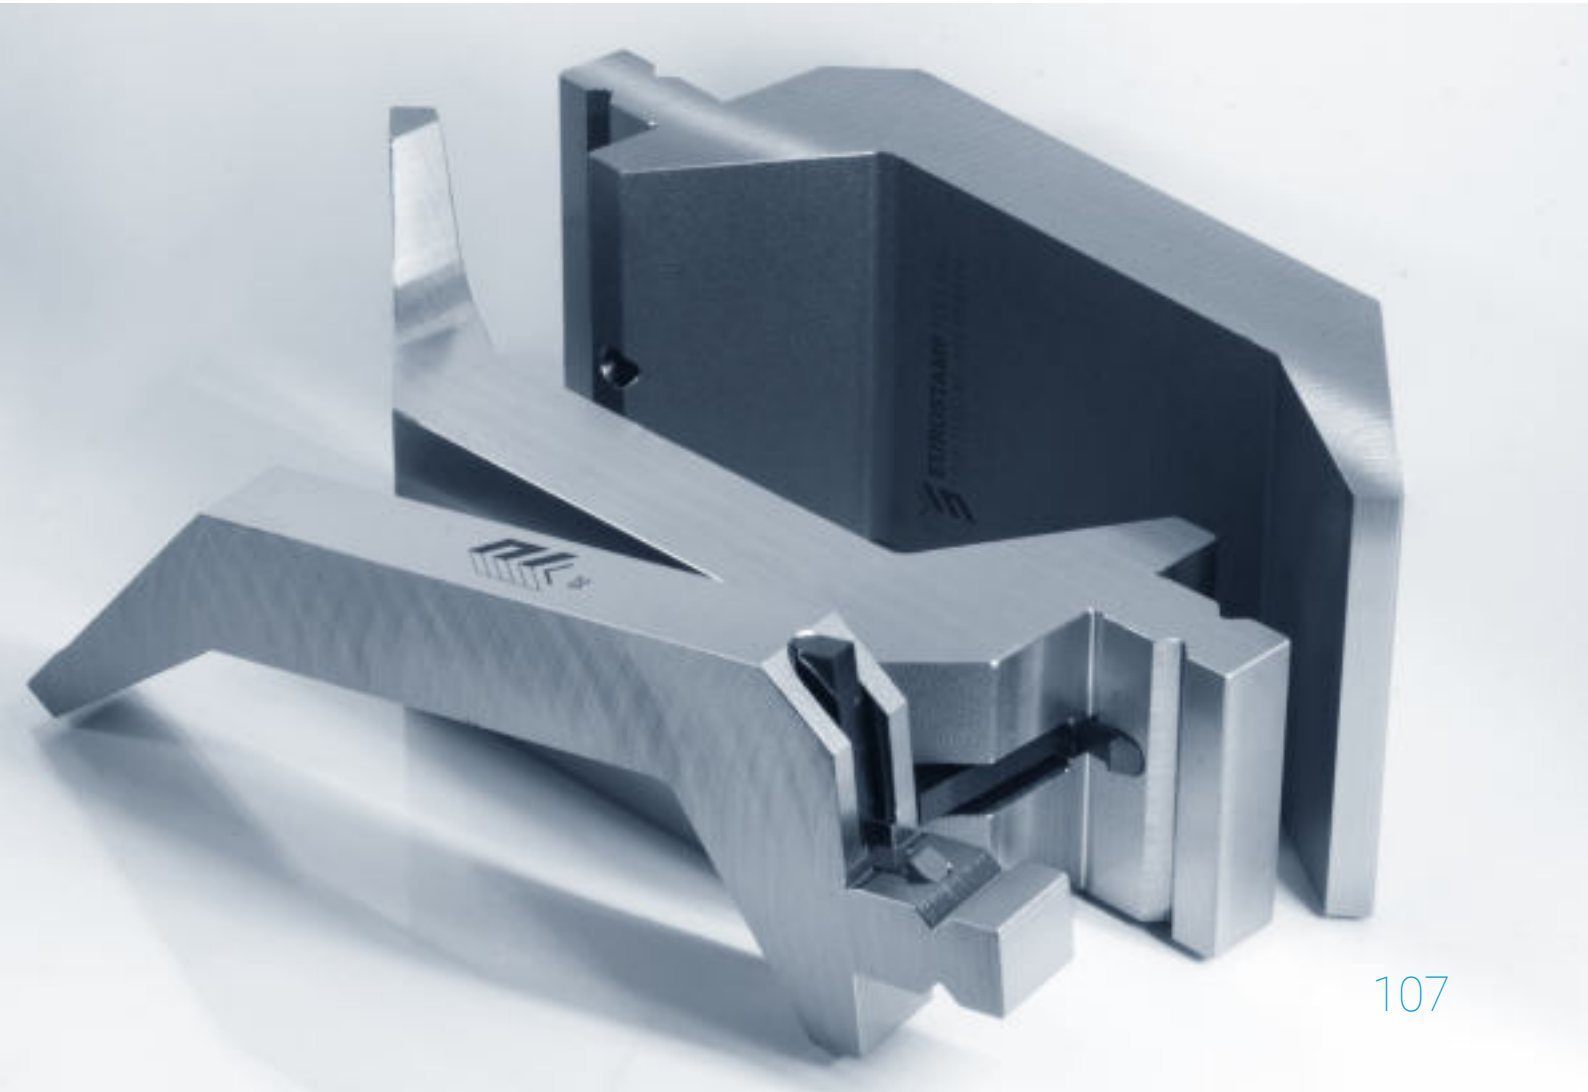


8210

MILLING FOR SAFETY BUTTON




8211

CODES
1237-1240-1316-1318




8218

CODES
1238-1249-1250-1251-1313



8212


CODES
1234-1235-1317-4191



8213


CODES
1295-1302-1303-1308-4361






8214

CODES
1233-1314-1319




8216

CODES
1294-1320



8215


CODES
1236

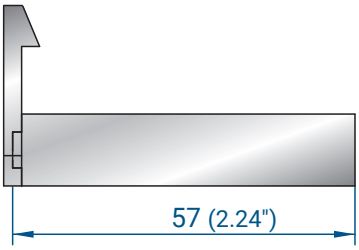

8219


CODES
1315



EUROSTAMP TOOLING
1313

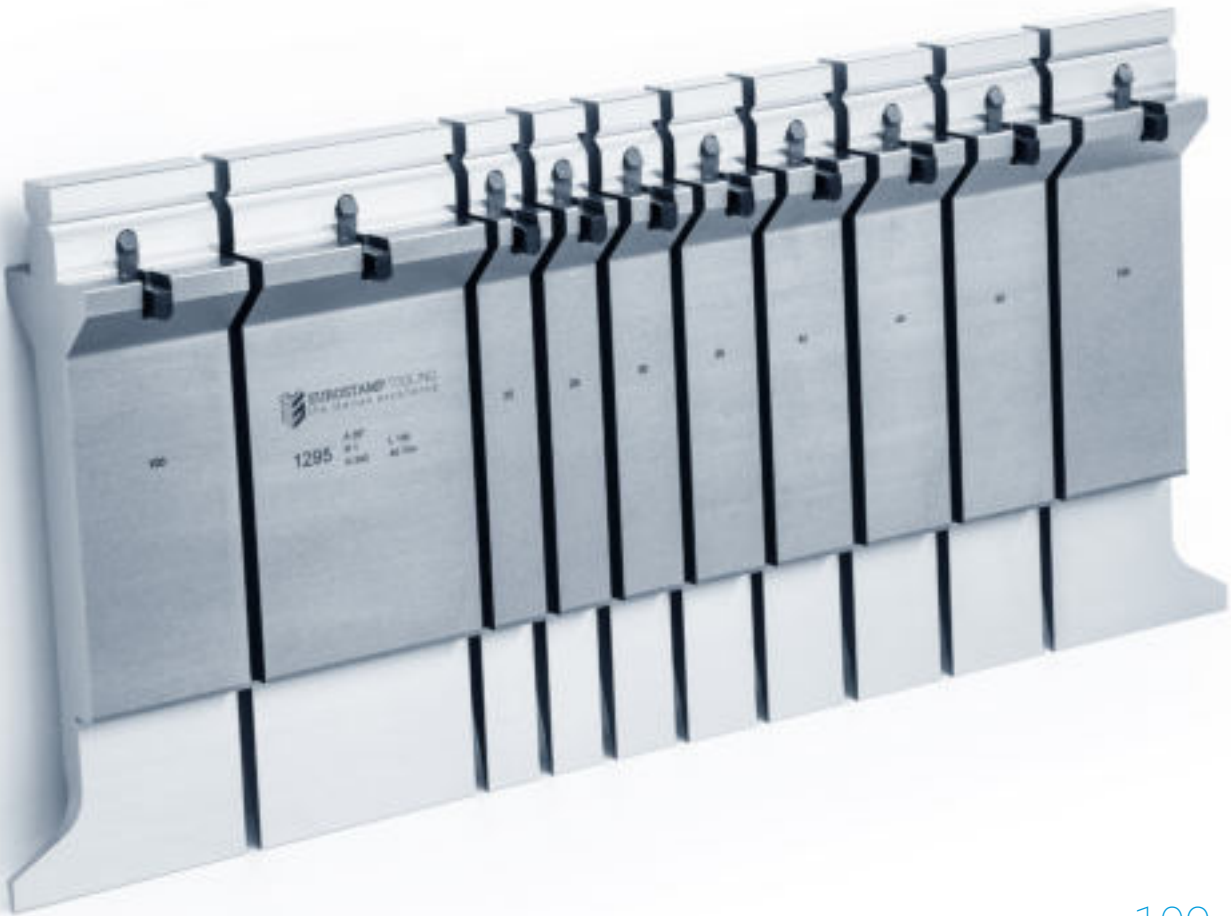
1295



EUROSTAMP TOOLING
the Italian excellence
3244
A 84°
R 1.6
H 100
V 14
L 200
90 T/m
25
40
25

SEE PAGE 92 FOR PUNCHES SEGMENTATION DIAGRAM

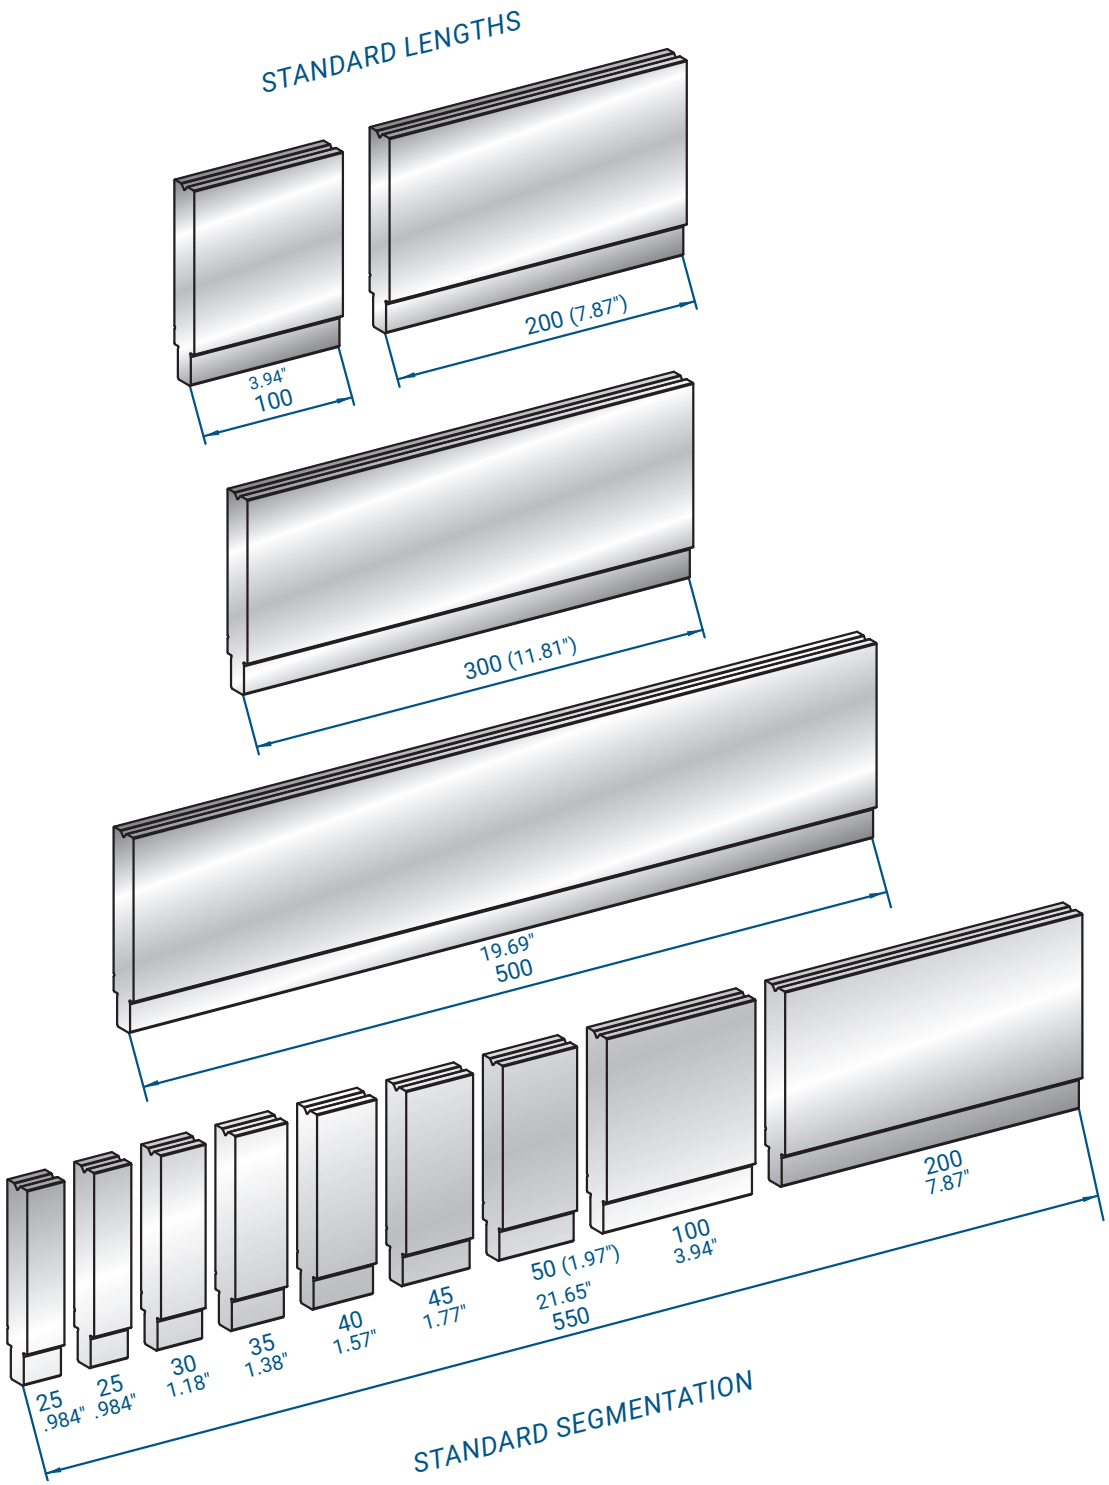


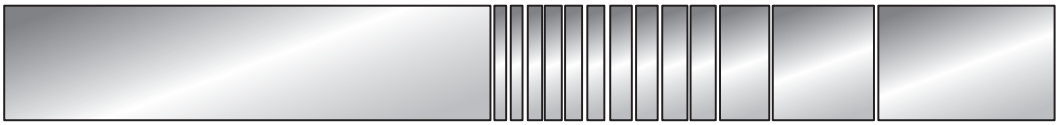

SPECIAL SEGMENTATION

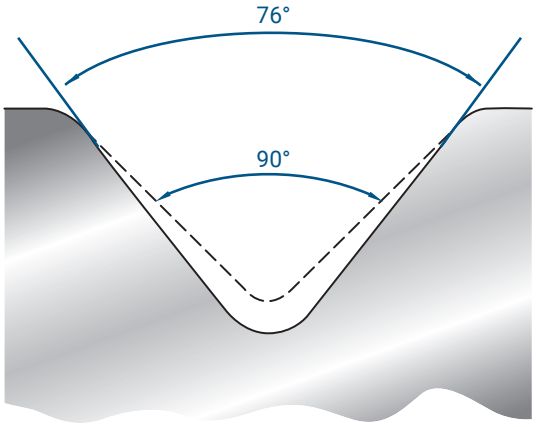


ANGLE MODIFICATION

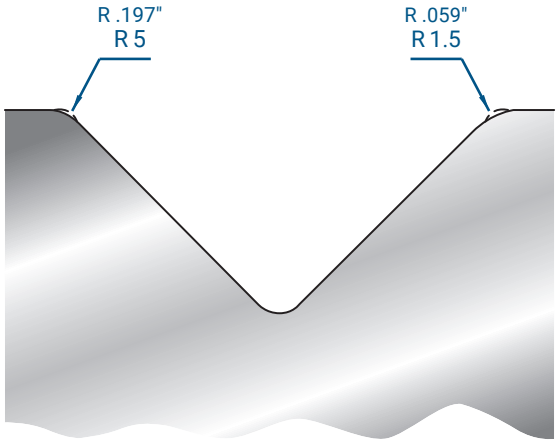

RADIUS MODIFICATION

SEGMENTATION FOR DIE MODELS


3135 - 3222
3223 - 3224

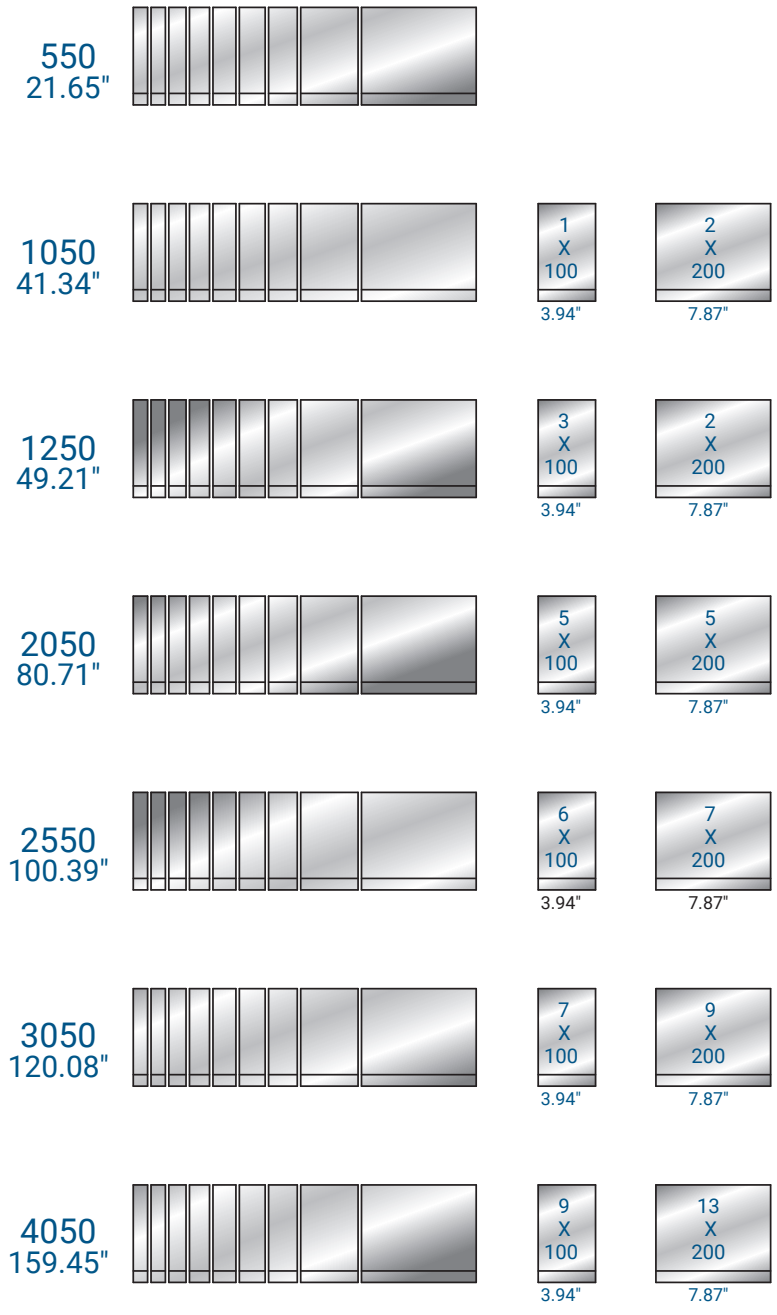

SEGMENTATION FOR PUNCHES - FROM PAGE 94 TO PAGE 96


SEGMENTATION FOR DIE MODELS

3218 - 3219 - 3220 - 3221 - 3132 - 3133 - 3134

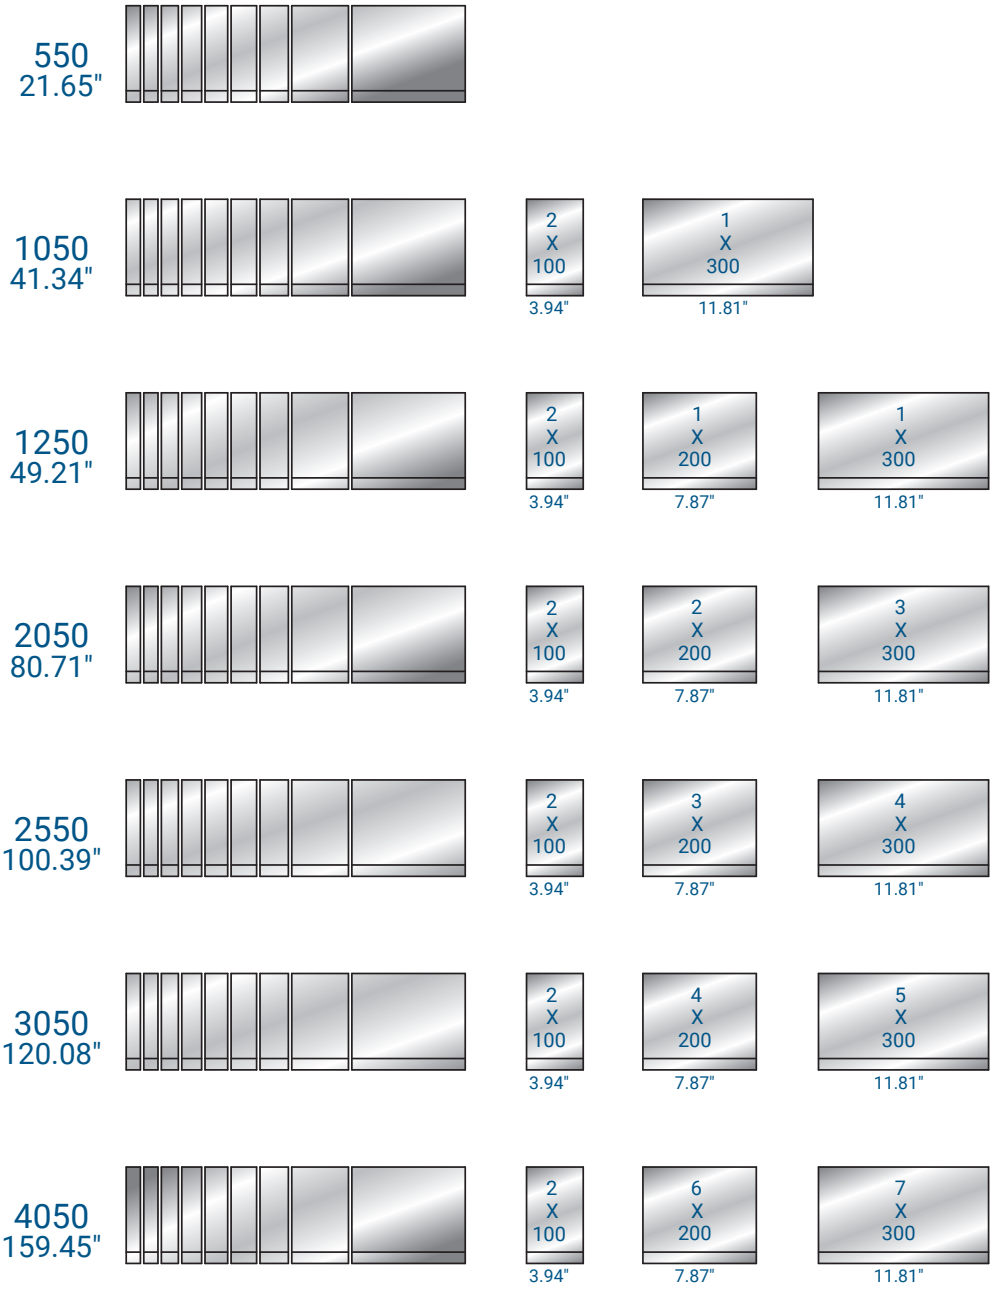


SEGMENTATION FOR PUNCHES - FROM PAGE 94 TO PAGE 96

SEGMENTATION FOR OTHER DIE MODELS

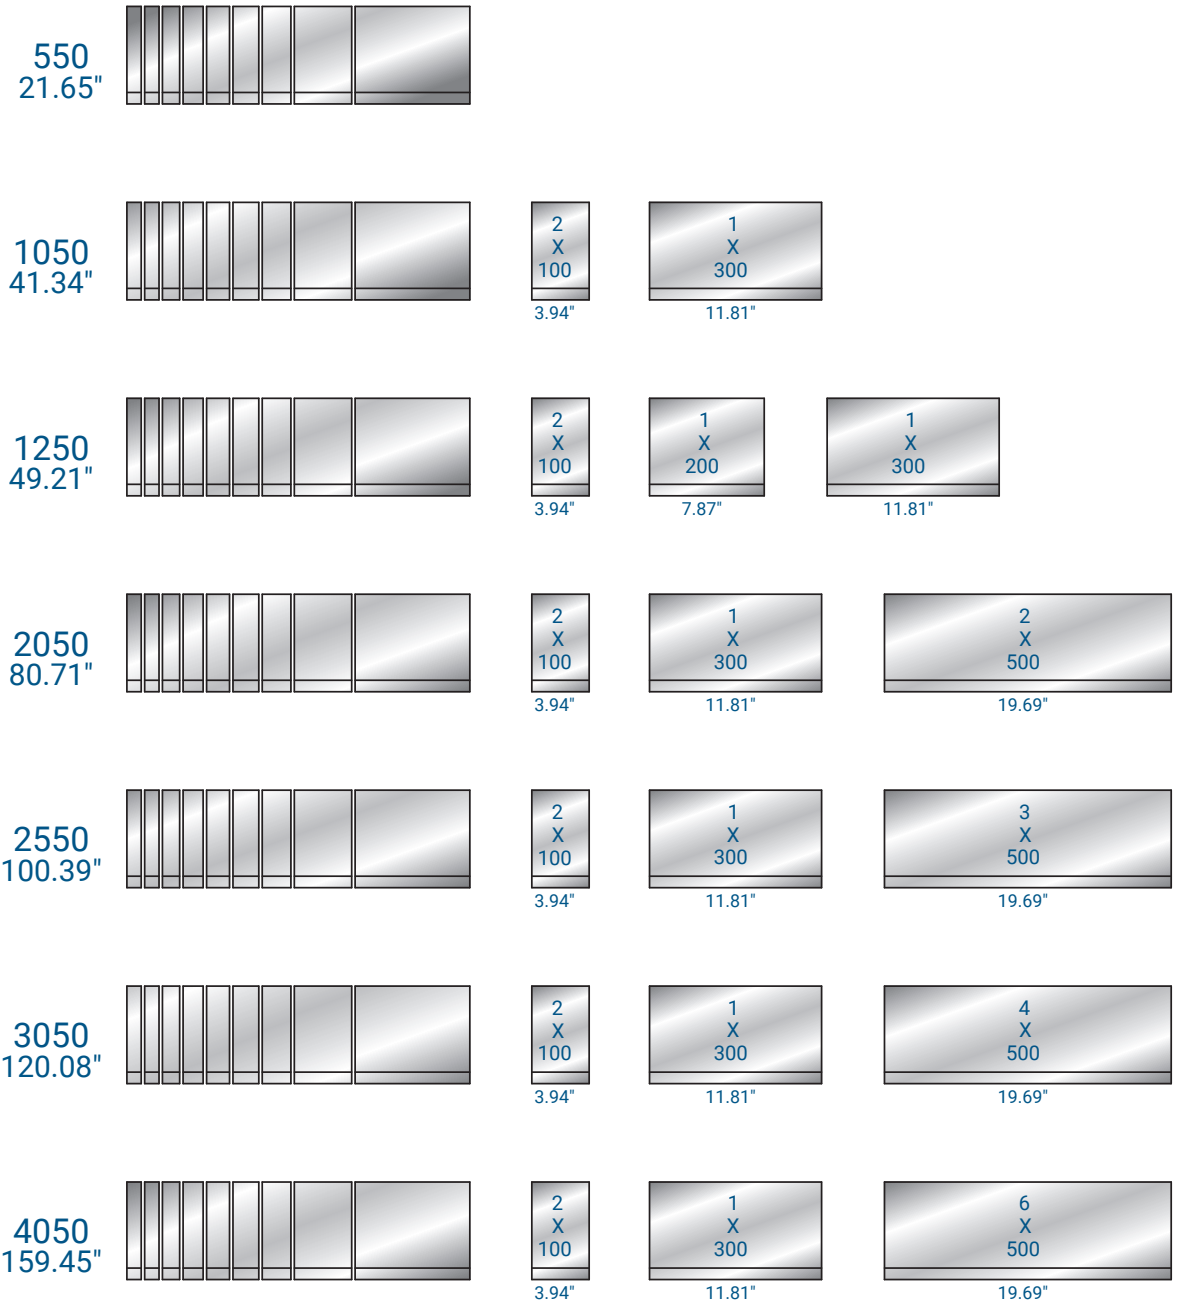

SEGMENTATION FOR PUNCHES - FROM PAGE 94 TO PAGE 96

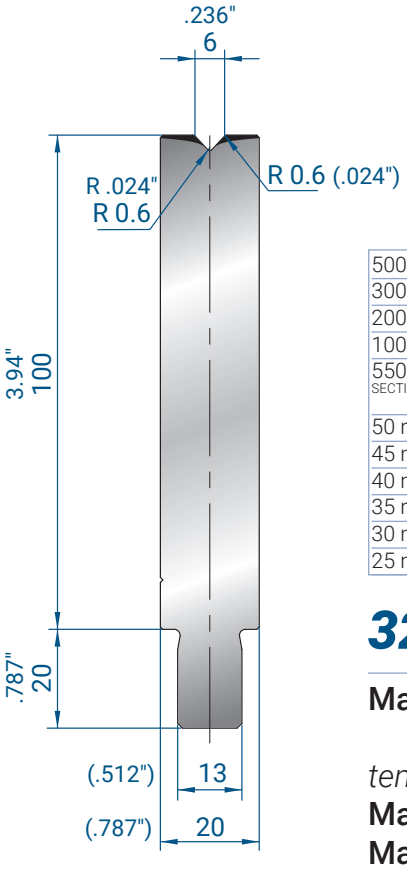


500 mm	8.8 kg	19.69"	19.4 lb
300 mm	5.3 kg	11.81"	11.7 lb
200 mm	3.6 kg	7.87"	7.9 lb
100 mm	1.8 kg	3.94"	4.0 lb
550 mm SECTIONED	9.7 kg	21.65" SECTIONED	21.4 lb
50 mm	0.9 kg	1.97"	2.0 lb
45 mm	0.8 kg	1.77"	1.8 lb
40 mm	0.7 kg	1.57"	1.5 lb
35 mm	0.6 kg	1.38"	1.3 lb
30 mm	0.5 kg	1.18"	1.1 lb
25 mm	0.4 kg	.98"	0.9 lb

3200

Mat = 42CrMo4

tempered
Max T/m = 100
Max US t/ft = 33.6
α = 86°

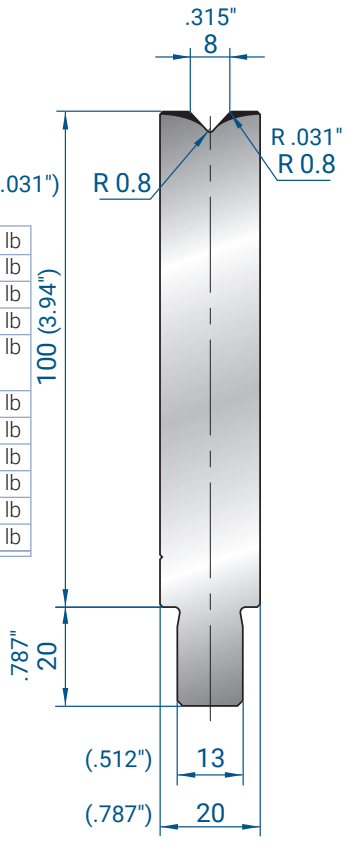


19.69"	19.4 lb
11.81"	11.7 lb
7.87"	7.7 lb
3.94"	4.0 lb
21.65" SECTIONED	21.2 lb
1.97"	2.0 lb
1.77"	1.8 lb
1.57"	1.5 lb
1.38"	1.3 lb
1.18"	1.1 lb
.98"	0.9 lb

500 mm	8.8 kg
300 mm	5.3 kg
200 mm	3.5 kg
100 mm	1.8 kg
550 mm SECTIONED	9.6 kg
50 mm	0.9 kg
45 mm	0.8 kg
40 mm	0.7 kg
35 mm	0.6 kg
30 mm	0.5 kg
25 mm	0.4 kg

3201

Mat = 42CrMo4

tempered
Max T/m = 100
Max US t/ft = 33.6
α = 86°

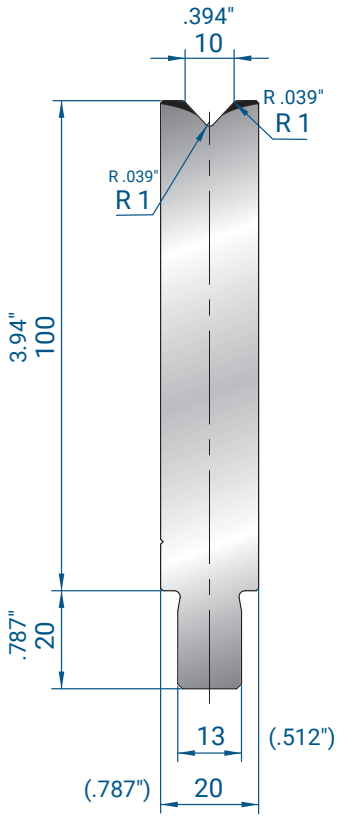


19.69"	19.2 lb
11.81"	11.5 lb
7.87"	7.7 lb
3.94"	3.7 lb
21.65" SECTIONED	21.2 lb
1.97"	2.0 lb
1.77"	1.8 lb
1.57"	1.5 lb
1.38"	1.3 lb
1.18"	1.1 lb
.98"	0.9 lb

500 mm	8.7 kg
300 mm	5.2 kg
200 mm	3.5 kg
100 mm	1.7 kg
550 mm SECTIONED	9.6 kg
50 mm	0.9 kg
45 mm	0.8 kg
40 mm	0.7 kg
35 mm	0.6 kg
30 mm	0.5 kg
25 mm	0.4 kg

3202

Mat = 42CrMo4

tempered
Max T/m = 100
Max US t/ft = 33.6
α = 86°

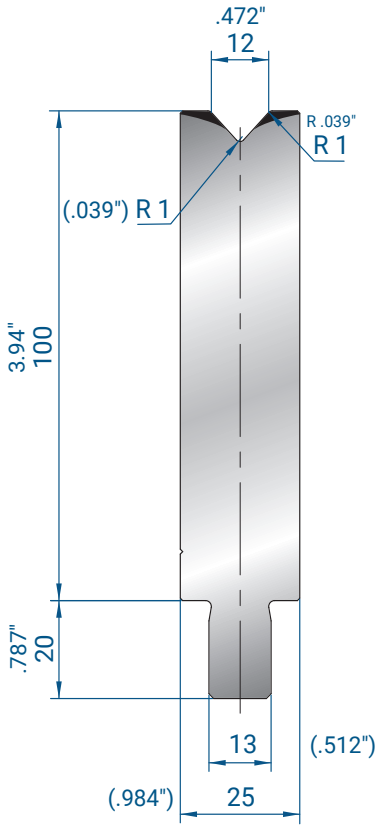


19.69"	23.4 lb
11.81"	14.1 lb
7.87"	9.5 lb
3.94"	4.6 lb
21.65" SECTIONED	25.8 lb
1.97"	2.4 lb
1.77"	2.2 lb
1.57"	2.0 lb
1.38"	1.5 lb
1.18"	1.3 lb
.98"	1.1 lb

500 mm	10.6 kg
300 mm	6.4 kg
200 mm	4.3 kg
100 mm	2.1 kg
550 mm SECTIONED	11.7 kg
50 mm	1.1 kg
45 mm	1.0 kg
40 mm	0.9 kg
35 mm	0.7 kg
30 mm	0.6 kg
25 mm	0.5 kg

3203

Mat = 42CrMo4

tempered
Max T/m = 100
Max US t/ft = 33.6
α = 86°

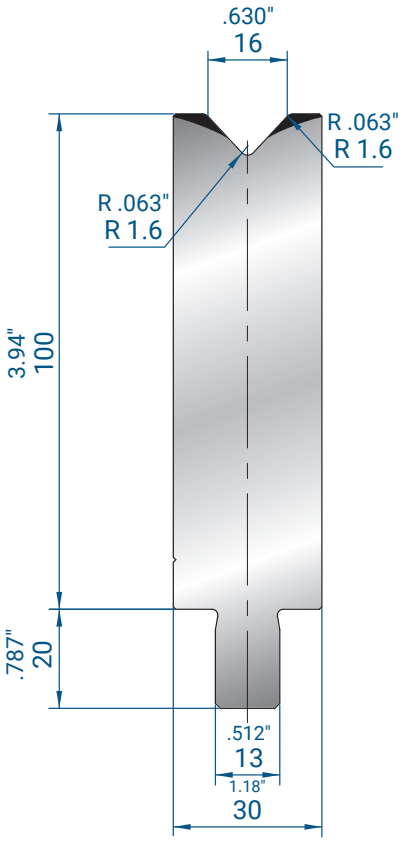


500 mm 19.69"	12.5 kg 27.6 lb
300 mm 11.81"	7.5 kg 16.5 lb
200 mm 7.87"	5.0 kg 11.0 lb
100 mm 3.94"	2.5 kg 5.5 lb
550 mm 21.65" SECTIONED	13.7 kg 30.2 lb
50 mm 1.97"	1.3 kg 2.9 lb
45 mm 1.77"	1.1 kg 2.4 lb
40 mm 1.57"	1.0 kg 2.2 lb
35 mm 1.38"	0.9 kg 2.0 lb
30 mm 1.18"	0.8 kg 1.8 lb
25 mm .98"	0.6 kg 1.3 lb

3204

Mat = 42CrMo4

tempered
Max T/m = 100
Max US t/ft = 33.6
α = 86°

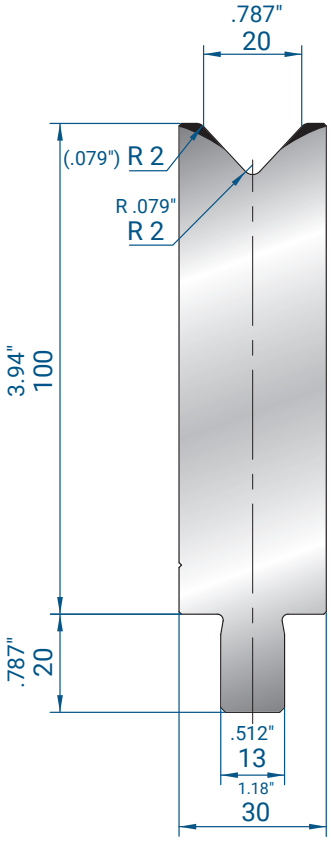


500 mm 19.69"	12.3 kg 27.1 lb
300 mm 11.81"	7.4 kg 16.3 lb
200 mm 7.87"	4.9 kg 10.8 lb
100 mm 3.94"	2.5 kg 5.5 lb
550 mm 21.65" SECTIONED	13.5 kg 29.8 lb
50 mm 1.97"	1.2 kg 2.6 lb
45 mm 1.77"	1.1 kg 2.4 lb
40 mm 1.57"	1.0 kg 2.2 lb
35 mm 1.38"	0.9 kg 2.0 lb
30 mm 1.18"	0.7 kg 1.5 lb
25 mm .98"	0.6 kg 1.3 lb

3205

Mat = 42CrMo4

tempered
Max T/m = 100
Max US t/ft = 33.6
α = 86°

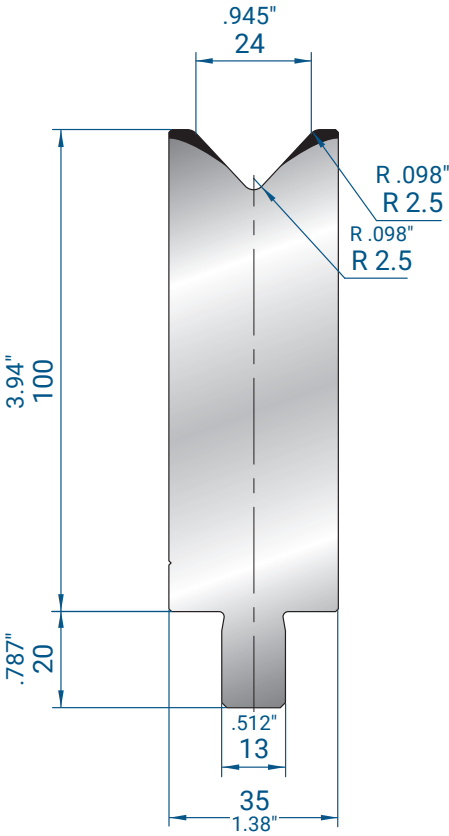


500 mm 19.69"	14.0 kg 30.9 lb
300 mm 11.81"	8.4 kg 18.5 lb
200 mm 7.87"	5.6 kg 12.3 lb
100 mm 3.94"	2.8 kg 6.2 lb
550 mm 21.65" SECTIONED	15.4 kg 34.0 lb
50 mm 1.97"	1.4 kg 3.1 lb
45 mm 1.77"	1.3 kg 2.9 lb
40 mm 1.57"	1.1 kg 2.4 lb
35 mm 1.38"	1.0 kg 2.2 lb
30 mm 1.18"	0.8 kg 1.8 lb
25 mm .98"	0.7 kg 1.5 lb

3215

Mat = 42CrMo4

tempered
Max T/m = 100
Max US t/ft = 33.6
α = 86°

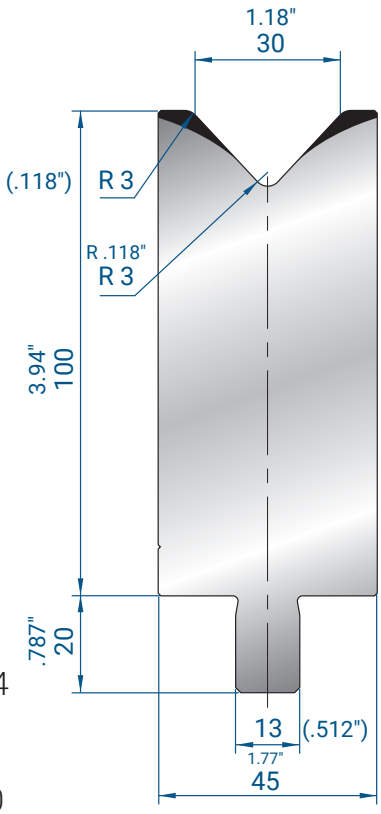


500 mm 19.69"	17.6 kg 38.8 lb
300 mm 11.81"	10.5 kg 23.1 lb
200 mm 7.87"	7.0 kg 15.4 lb
100 mm 3.94"	3.5 kg 7.7 lb
550 mm 21.65" SECTIONED	19.3 kg 42.5 lb
50 mm 1.97"	1.8 kg 4.0 lb
45 mm 1.77"	1.6 kg 3.5 lb
40 mm 1.57"	1.4 kg 3.1 lb
35 mm 1.38"	1.2 kg 2.6 lb
30 mm 1.18"	1.0 kg 2.2 lb
25 mm .98"	0.9 kg 2.0 lb

3216

Mat = 42CrMo4

tempered
Max T/m = 100
Max US t/ft = 33.6
α = 86°

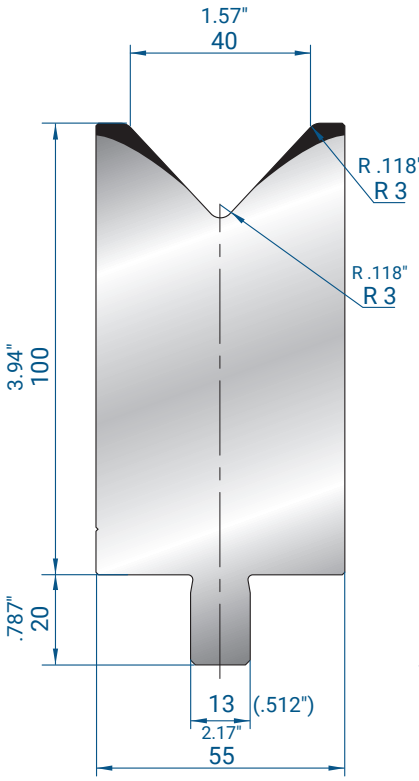


500 mm 19.69"	20.7 kg 45.6 lb
300 mm 11.81"	12.4 kg 27.3 lb
200 mm 7.87"	8.3 kg 18.3 lb
100 mm 3.94"	4.1 kg 9.0 lb
550 mm 21.65" SECTIONED	22.8 kg 50.3 lb
50 mm 1.97"	2.1 kg 4.6 lb
45 mm 1.77"	1.9 kg 4.2 lb
40 mm 1.57"	1.7 kg 3.7 lb
35 mm 1.38"	1.5 kg 3.3 lb
30 mm 1.18"	1.2 kg 2.6 lb
25 mm .98"	1.0 kg 2.2 lb

3217

Mat = 42CrMo4

tempered
Max T/m = 120
Max US t/ft = 40.3
α = 86°

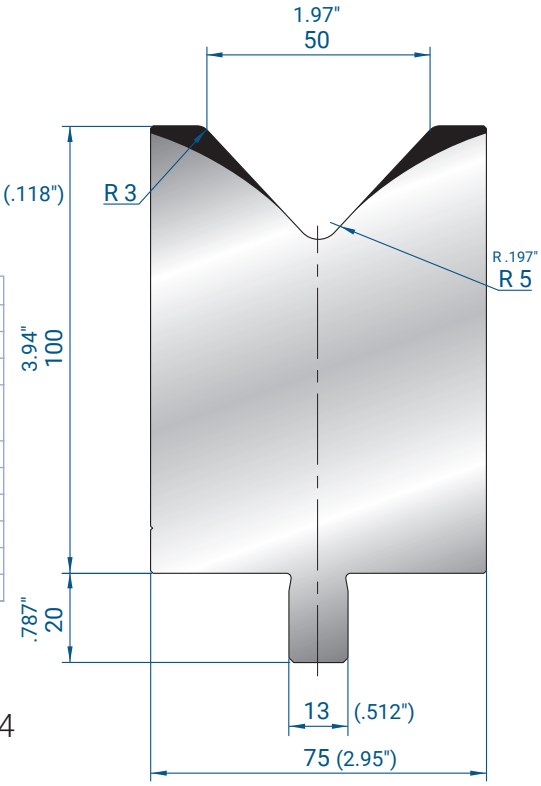


500 mm 19.69"	27.6 kg 60.8 lb
300 mm 11.81"	16.6 kg 36.6 lb
200 mm 7.87"	11.0 kg 24.3 lb
100 mm 3.94"	5.5 kg 12.1 lb
550 mm 21.65" SECTIONED	30.3 kg 66.8 lb
50 mm 1.97"	2.8 kg 6.2 lb
45 mm 1.77"	2.5 kg 5.5 lb
40 mm 1.57"	2.2 kg 4.9 lb
35 mm 1.38"	1.9 kg 4.2 lb
30 mm 1.18"	1.7 kg 3.7 lb
25 mm .98"	1.4 kg 3.1 lb

3218

Mat = 42CrMo4

tempered
Max T/m = 150
Max US t/ft = 50.4
α = 86°

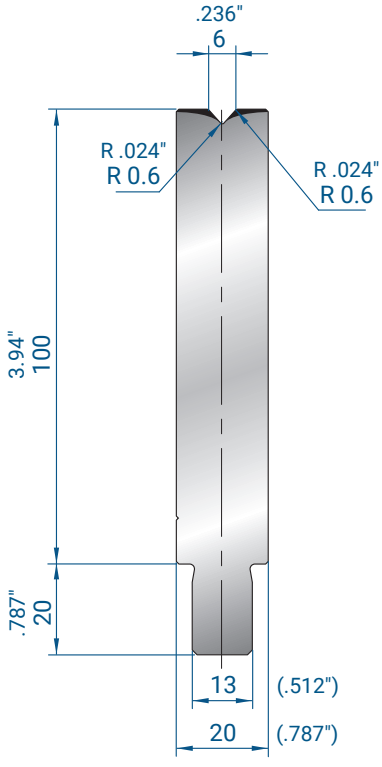


500 mm 19.69"	8.8 kg 19.4 lb
300 mm 11.81"	5.3 kg 11.7 lb
200 mm 7.87"	3.5 kg 7.7 lb
100 mm 3.94"	1.8 kg 4.0 lb
550 mm 21.65" SECTIONED	9.7 kg 21.4 lb
50 mm 1.97"	0.9 kg 2.0 lb
45 mm 1.77"	0.8 kg 1.8 lb
40 mm 1.57"	0.7 kg 1.5 lb
35 mm 1.38"	0.6 kg 1.3 lb
30 mm 1.18"	0.5 kg 1.1 lb
25 mm .98"	0.4 kg 0.9 lb

3225

Mat = 42CrMo4

tempered
Max T/m = 100
Max US t/ft = 33.6
α = 84°

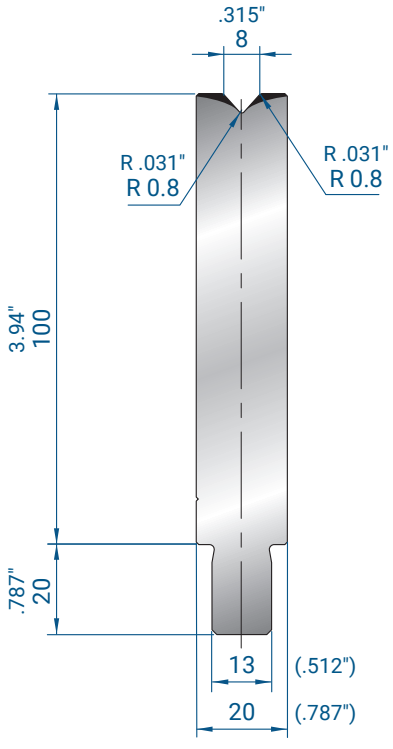


500 mm 19.69"	8.8 kg 19.4 lb
300 mm 11.81"	5.3 kg 11.7 lb
200 mm 7.87"	3.5 kg 7.7 lb
100 mm 3.94"	1.8 kg 4.0 lb
550 mm 21.65" SECTIONED	9.7 kg 21.4 lb
50 mm 1.97"	0.9 kg 2.0 lb
45 mm 1.77"	0.8 kg 1.8 lb
40 mm 1.57"	0.7 kg 1.5 lb
35 mm 1.38"	0.6 kg 1.3 lb
30 mm 1.18"	0.5 kg 1.1 lb
25 mm .98"	0.4 kg 0.9 lb

3226

Mat = 42CrMo4

tempered
Max T/m = 100
Max US t/ft = 33.6
α = 84°

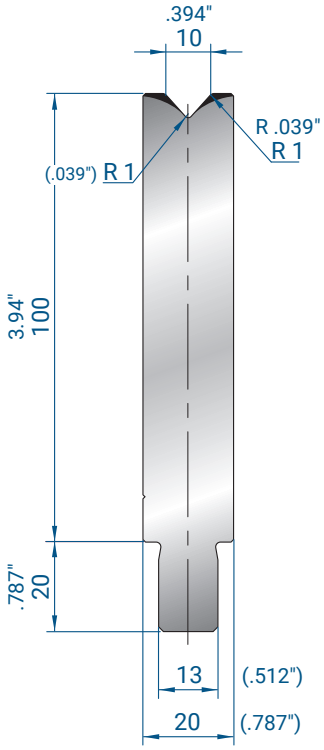


19.69"	19.2 lb
11.81"	11.5 lb
7.87"	7.7 lb
3.94"	3.7 lb
21.65" SECTIONED	21.2 lb
1.97"	2.0 lb
1.77"	1.8 lb
1.57"	1.5 lb
1.38"	1.3 lb
1.18"	1.1 lb
.98"	0.9 lb

500 mm	8.7 kg
300 mm	5.2 kg
200 mm	3.5 kg
100 mm	1.7 kg
550 mm SECTIONED	9.6 kg
50 mm	0.9 kg
45 mm	0.8 kg
40 mm	0.7 kg
35 mm	0.6 kg
30 mm	0.5 kg
25 mm	0.4 kg

3227

Mat = 42CrMo4

tempered
Max T/m = 100
Max US t/ft = 33.6
α = 84°

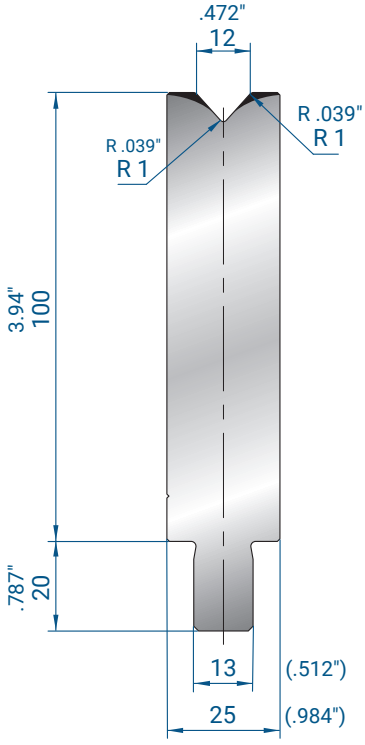


19.69"	23.4 lb
11.81"	14.1 lb
7.87"	9.3 lb
3.94"	4.6 lb
21.65" SECTIONED	25.8 lb
1.97"	2.4 lb
1.77"	2.2 lb
1.57"	1.8 lb
1.38"	1.5 lb
1.18"	1.3 lb
.98"	1.1 lb

500 mm	10.6 kg
300 mm	6.4 kg
200 mm	4.2 kg
100 mm	2.1 kg
550 mm SECTIONED	11.7 kg
50 mm	1.1 kg
45 mm	1.0 kg
40 mm	0.8 kg
35 mm	0.7 kg
30 mm	0.6 kg
25 mm	0.5 kg

3228

Mat = 42CrMo4

tempered
Max T/m = 100
Max US t/ft = 33.6
α = 84°

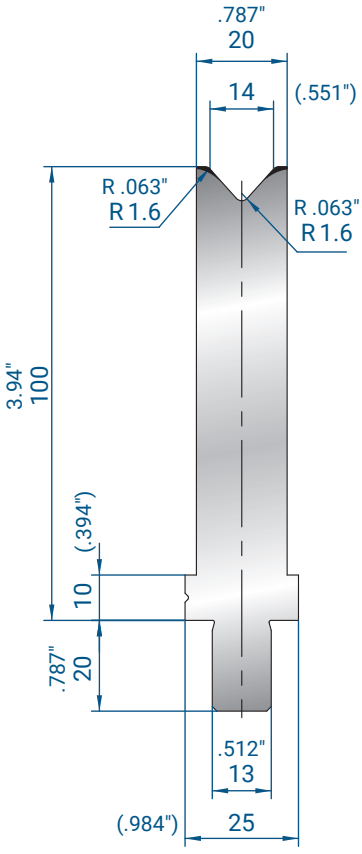


19.69"	19.4 lb
11.81"	11.7 lb
7.87"	7.7 lb
3.94"	4.0 lb
21.65" SECTIONED	21.4 lb
1.97"	2.0 lb
1.77"	1.8 lb
1.57"	1.5 lb
1.38"	1.3 lb
1.18"	1.1 lb
.98"	0.9 lb

500 mm	8.8 kg
300 mm	5.3 kg
200 mm	3.5 kg
100 mm	1.8 kg
550 mm SECTIONED	9.7 kg
50 mm	0.9 kg
45 mm	0.8 kg
40 mm	0.7 kg
35 mm	0.6 kg
30 mm	0.5 kg
25 mm	0.4 kg

3244

Mat = 42CrMo4

tempered
Max T/m = 90
Max US t/ft = 30.2
α = 84°

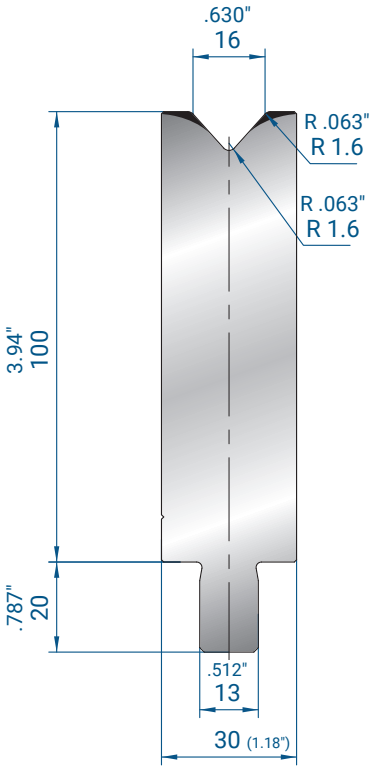

500 mm	12.4 kg	19.69"	27.3 lb
300 mm	7.5 kg	11.81"	16.5 lb
200 mm	5.0 kg	7.87"	11.0 lb
100 mm	2.5 kg	3.94"	5.5 lb
550 mm SECTIONED	13.7 kg	21.65" SECTIONED	30.2 lb
50 mm	1.2 kg	1.97"	2.6 lb
45 mm	1.1 kg	1.77"	2.4 lb
40 mm	1.0 kg	1.57"	2.2 lb
35 mm	0.9 kg	1.38"	2.0 lb
30 mm	0.7 kg	1.18"	1.5 lb
25 mm	0.6 kg	.98"	1.3 lb


3229

Mat = 42CrMo4

tempered
Max T/m = 100
Max US t/ft = 33.6
α = 84°

1V DIES H100 - 84° — CrMo



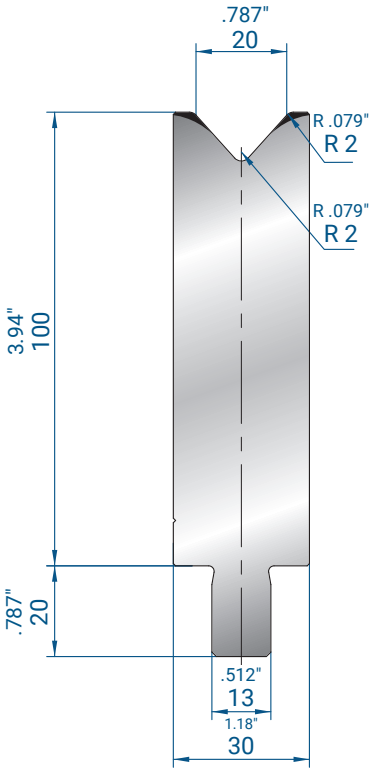


500 mm 19.69"	12.3 kg 27.1 lb
300 mm 11.81"	7.4 kg 16.3 lb
200 mm 7.87"	4.9 kg 10.8 lb
100 mm 3.94"	2.5 kg 5.5 lb
550 mm 21.65" SECTIONED	13.5 kg 29.8 lb
50 mm 1.97"	1.2 kg 2.6 lb
45 mm 1.77"	1.1 kg 2.4 lb
40 mm 1.57"	1.0 kg 2.2 lb
35 mm 1.38"	0.9 kg 2.0 lb
30 mm 1.18"	0.7 kg 1.5 lb
25 mm .98"	0.6 kg 1.3 lb

3230

Mat = 42CrMo4

tempered
Max T/m = 100
Max US t/ft = 33.6
α = 84°

1V DIES H100 - 80° — CrMo

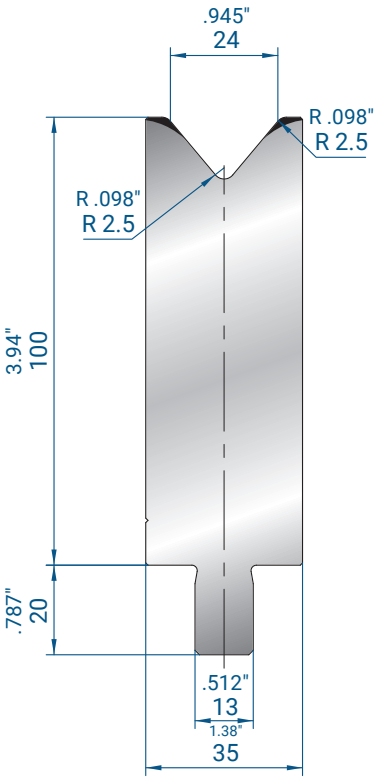


500 mm 19.69"	14.0 kg 30.9 lb
300 mm 11.81"	8.4 kg 18.5 lb
200 mm 7.87"	5.6 kg 12.3 lb
100 mm 3.94"	2.8 kg 6.2 lb
550 mm 21.65" SECTIONED	15.4 kg 34.0 lb
50 mm 1.97"	1.4 kg 3.1 lb
45 mm 1.77"	1.3 kg 2.9 lb
40 mm 1.57"	1.1 kg 2.4 lb
35 mm 1.38"	1.0 kg 2.2 lb
30 mm 1.18"	0.8 kg 1.8 lb
25 mm .98"	0.7 kg 1.5 lb

3231

Mat = 42CrMo4

tempered
Max T/m = 100
Max US t/ft = 33.6
α = 80°

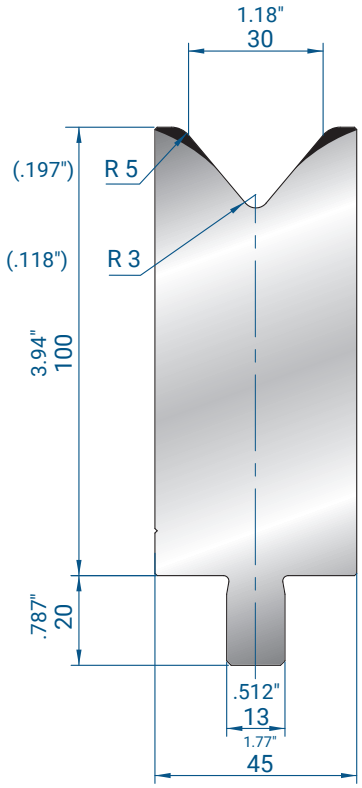

500 mm 19.69"	17.4 kg 38.4 lb
300 mm 11.81"	10.9 kg 24.0 lb
200 mm 7.87"	6.9 kg 15.2 lb
100 mm 3.94"	3.5 kg 7.7 lb
550 mm 21.65" SECTIONED	19.1 kg 42.1 lb
50 mm 1.97"	1.7 kg 3.7 lb
45 mm 1.77"	1.6 kg 3.5 lb
40 mm 1.57"	1.4 kg 3.1 lb
35 mm 1.38"	1.2 kg 2.6 lb
30 mm 1.18"	1.0 kg 2.2 lb
25 mm .98"	0.9 kg 2.0 lb

3232


Mat = 42CrMo4

tempered
Max T/m = 120
Max US t/ft = 40.3
α = 80°

3233

Mat = 42CrMo4

tempered
Max T/m = 150
Max US t/ft = 50.4
α = 80°

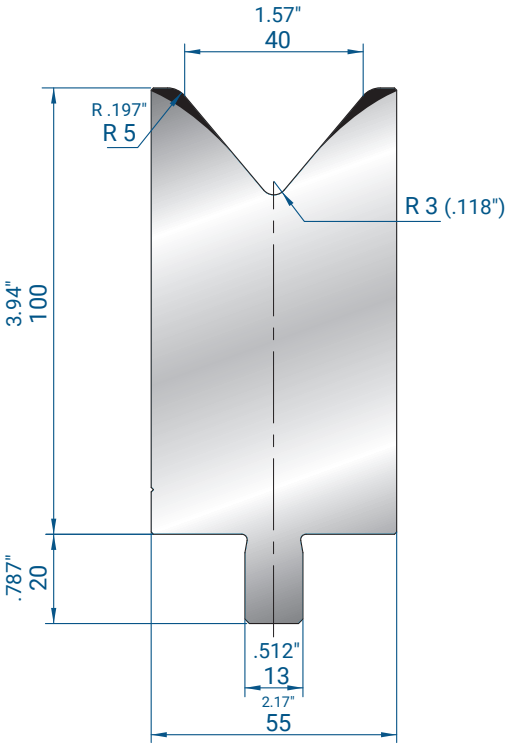


500 mm	20.4 kg	19.69"	45.0 lb
300 mm	12.2 kg	11.81"	26.9 lb
200 mm	8.2 kg	7.87"	18.1 lb
100 mm	14.1 kg	3.94"	31.1 lb
550 mm SECTIONED	22.4 kg	21.65" SECTIONED	49.4 lb
50 mm	2.0 kg	1.97"	4.4 lb
45 mm	1.8 kg	1.77"	4.0 lb
40 mm	1.6 kg	1.57"	3.5 lb
35 mm	1.4 kg	1.38"	3.1 lb
30 mm	1.2 kg	1.18"	2.6 lb
25 mm	1.0 kg	.98"	2.2 lb

3234

Mat = 42CrMo4

tempered
Max T/m = 150
Max US t/ft = 50.4
α = 80°

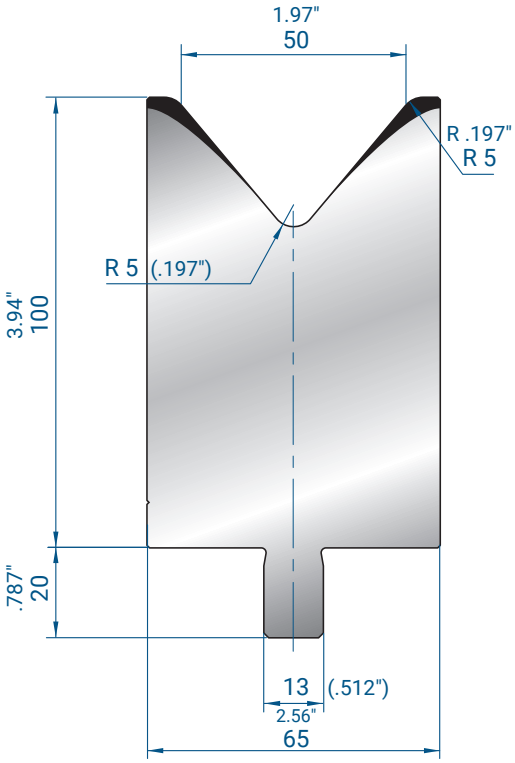


500 mm	23.2 kg	19.69"	51.1 lb
300 mm	13.9 kg	11.81"	30.6 lb
200 mm	9.3 kg	7.87"	20.5 lb
100 mm	4.6 kg	3.94"	10.1 lb
550 mm SECTIONED	25.5 kg	21.65" SECTIONED	56.2 lb
50 mm	2.3 kg	1.97"	5.1 lb
45 mm	2.1 kg	1.77"	4.6 lb
40 mm	1.9 kg	1.57"	4.2 lb
35 mm	1.6 kg	1.38"	3.5 lb
30 mm	1.4 kg	1.18"	3.1 lb
25 mm	1.2 kg	.98"	2.6 lb

3219

Mat = 42CrMo4

tempered
Max T/m = 150
Max US t/ft = 50.4
α = 80°

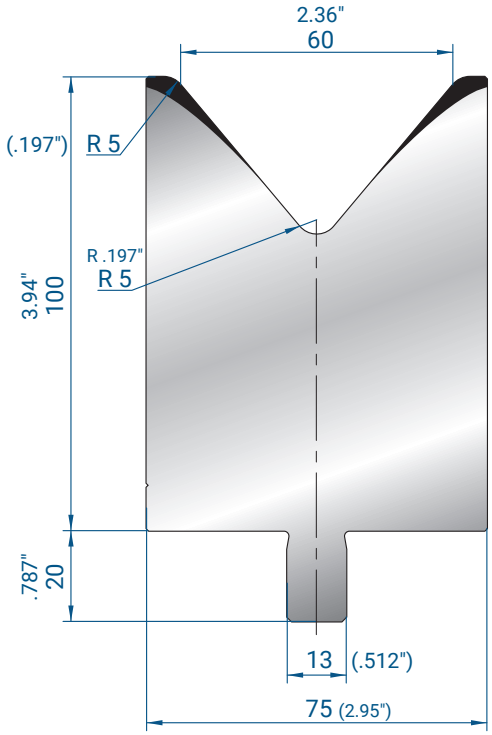


500 mm	25.8 kg	19.69"	56.9 lb
300 mm	14.5 kg	11.81"	32.0 lb
200 mm	10.3 kg	7.87"	22.7 lb
100 mm	5.2 kg	3.94"	11.5 lb
550 mm SECTIONED	28.3 kg	21.65" SECTIONED	62.4 lb
50 mm	2.6 kg	1.97"	5.7 lb
45 mm	2.3kg	1.77"	5.1 lb
40 mm	2.1 kg	1.57"	4.6 lb
35 mm	1.8 kg	1.38"	4.0 lb
30 mm	1.5 kg	1.18"	3.3 lb
25 mm	1.3 kg	.98"	2.9 lb

3220

Mat = 42CrMo4

tempered
Max T/m = 150
Max US t/ft = 50.4
α = 80°

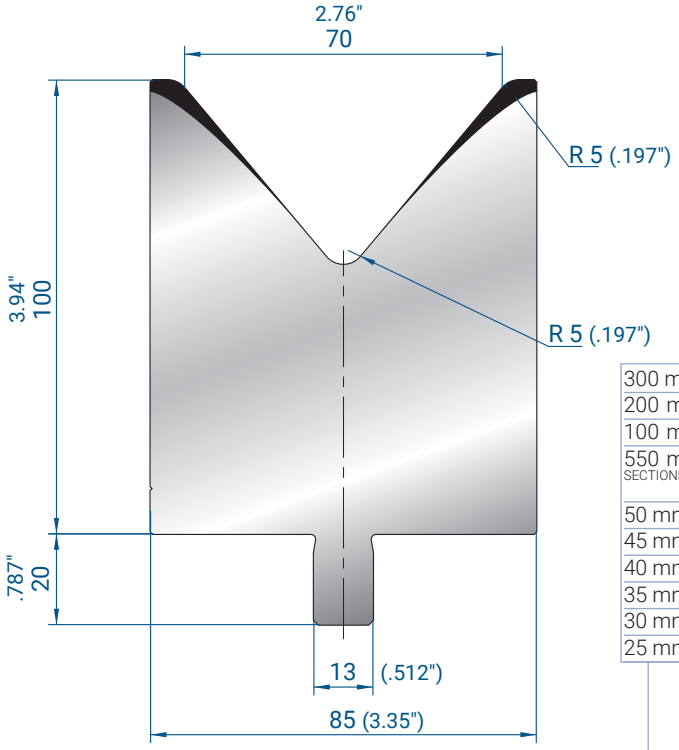


300 mm	16.9 kg	11.81"	37.3 lb
200 mm	11.2 kg	7.87"	24.7 lb
100 mm	5.6 kg	3.94"	12.3 lb
550 mm SECTIONED	30.9 kg	21.65" SECTIONED	68.1 lb
50 mm	2.8 kg	1.97"	6.2 lb
45 mm	2.5 kg	1.77"	5.5 lb
40 mm	2.2 kg	1.57"	4.9 lb
35 mm	2.0 kg	1.38"	4.4 lb
30 mm	1.7 kg	1.18"	3.7 lb
25 mm	1.4 kg	.98"	3.1 lb

3221

Mat = 42CrMo4

tempered
Max T/m = 150
Max US t/ft = 50.4
α = 80°

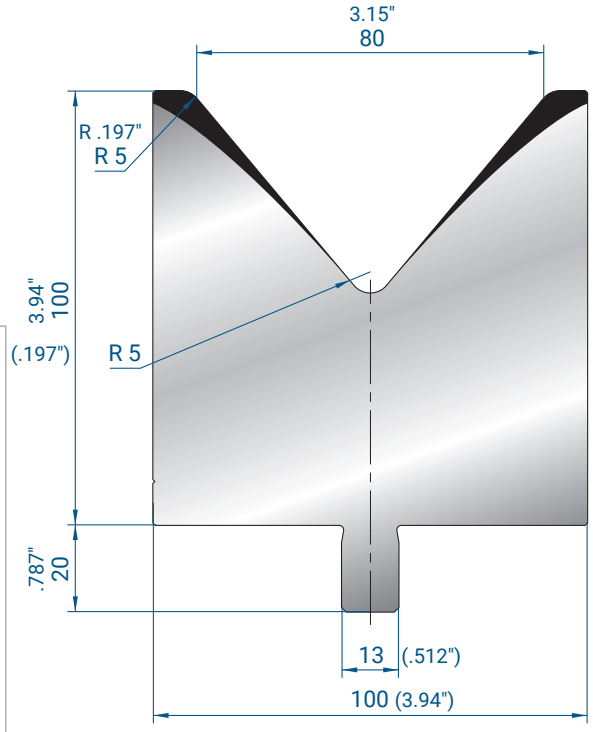


300 mm	19.3 kg	11.81"	42.5 lb
200 mm	12.9 kg	7.87"	28.4 lb
100 mm	6.4 kg	3.94"	14.1 lb
550 mm SECTIONED	35.4 kg	21.65" SECTIONED	78.0 lb
50 mm	3.2 kg	1.97"	7.1 lb
45 mm	2.9 kg	1.77"	6.4 lb
40 mm	2.6 kg	1.57"	5.7 lb
30 mm	2.3 kg	1.18"	5.1 lb
25 mm	1.9 kg	.98"	4.2 lb
25 mm	1.6 kg	.98"	3.5 lb

3222

Mat = 42CrMo4

tempered
Max T/m = 150
Max US t/ft = 50.4
α = 80°

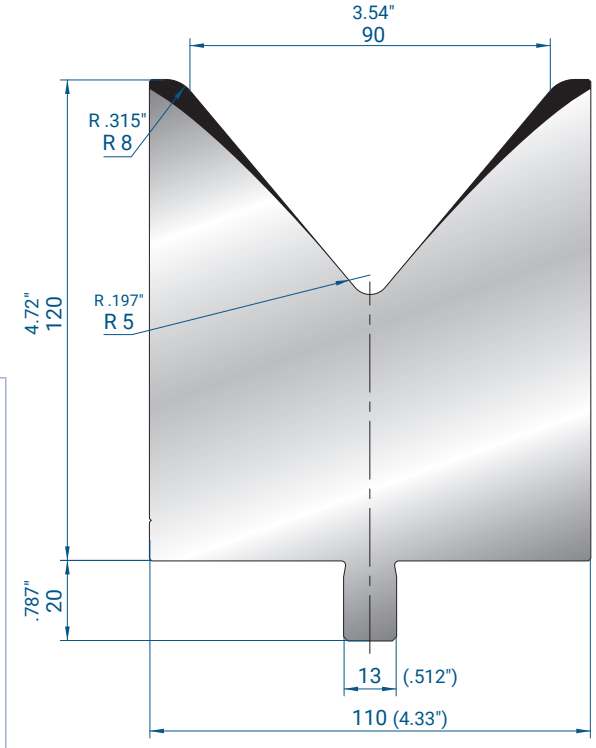


200 mm	16.9 kg	7.87"	37.3 lb
100 mm	8.4 kg	3.94"	18.5 lb
550 mm SECTIONED	46.5 kg	21.65" SECTIONED	103 lb
50 mm	4.2 kg	1.97"	9.3 lb
45 mm	3.8 kg	1.77"	8.4 lb
40 mm	3.4 kg	1.57"	7.5 lb
35 mm	3.0 kg	1.38"	6.6 lb
30 mm	2.5 kg	1.18"	5.5 lb
25 mm	2.1 kg	.98"	4.6 lb

3223

Mat = 42CrMo4

tempered
Max T/m = 150
Max US t/ft = 50.4
α = 80°

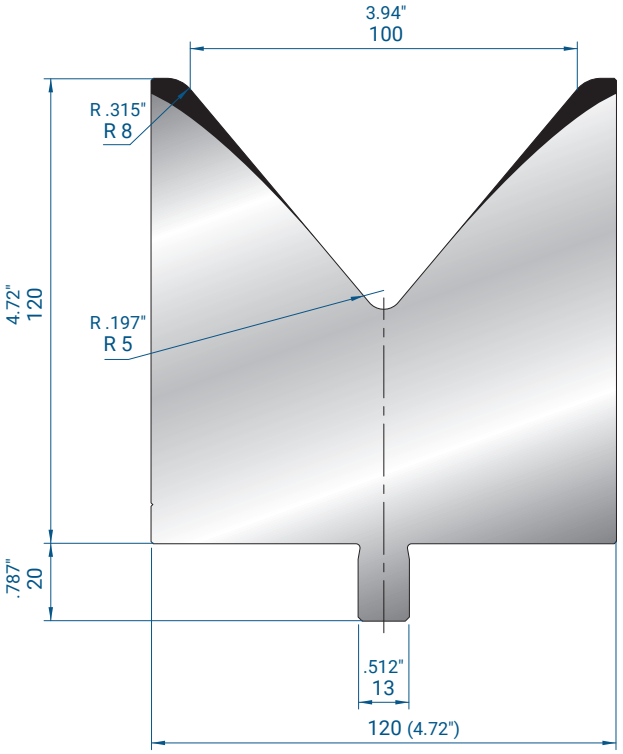


7.87"	39.2 lb
3.94"	19.6 lb
21.65" SECTIONED	108 lb
1.97"	9.9 lb
1.77"	8.8 lb
1.57"	7.9 lb
1.38"	6.8 lb
1.18"	6.0 lb
.98"	4.9 lb

200 mm	17.8 kg
100 mm	8.9 kg
550 mm SECTIONED	49.1 kg
50 mm	4.5 kg
45 mm	4.0 kg
40 mm	3.6 kg
35 mm	3.1 kg
30 mm	2.7 kg
25 mm	2.2 kg

3224


Mat = 42CrMo4

tempered
Max T/m = 160
Max US t/ft = 53.8
α = 60°

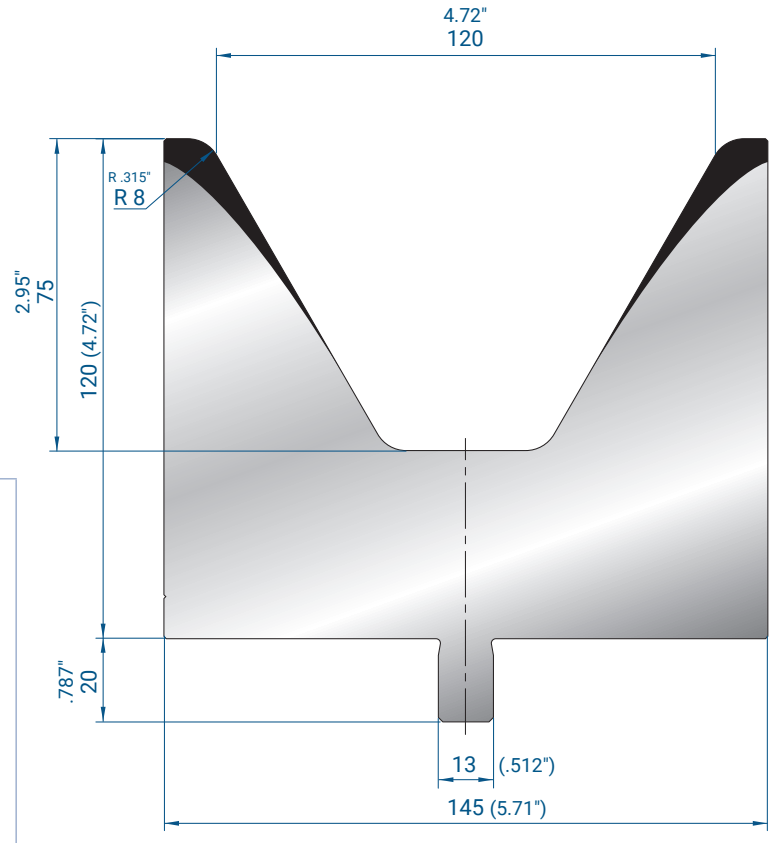

7.87"	39.9 lb
3.94"	20.1 lb
21.65" SECTIONED	110 lb
1.97"	9.9 lb
1.77"	9.0 lb
1.57"	7.9 lb
1.38"	7.1 lb
1.18"	6.0 lb
.98"	5.1 lb

200 mm	18.1 kg
100 mm	9.1 kg
550 mm SECTIONED	49.8 kg
50 mm	4.5 kg
45 mm	4.1 kg
40 mm	3.6 kg
35 mm	3.2 kg
30 mm	2.7 kg
25 mm	2.3 kg

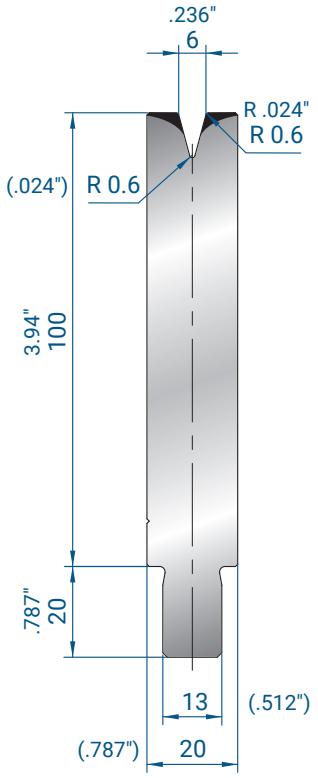


19.69"	19.2 lb
11.81"	11.5 lb
7.87"	7.7 lb
3.94"	3.7 lb
21.65" SECTIONED	21.2 lb
1.97"	2.0 lb
1.77"	1.8 lb
1.57"	1.5 lb
1.38"	1.3 lb
1.18"	1.1 lb
.98"	0.9 lb

500 mm	8.7 kg
300 mm	5.2 kg
200 mm	3.5 kg
100 mm	1.7 kg
550 mm SECTIONED	9.6 kg
50 mm	0.9 kg
45 mm	0.8 kg
40 mm	0.7 kg
35 mm	0.6 kg
30 mm	0.5 kg
25 mm	0.4 kg

3206

Mat = 42CrMo4

tempered
Max T/m = 60
Max US t/ft = 20.2
α = 30°

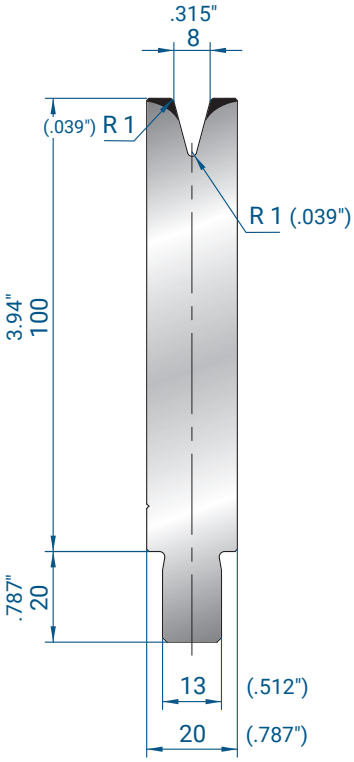


19.69"	19.0 lb
11.81"	11.5 lb
7.87"	7.5 lb
3.94"	3.7 lb
21.65" SECTIONED	20.7 lb
1.97"	2.0 lb
1.77"	1.8 lb
1.57"	1.5 lb
1.38"	1.3 lb
1.18"	1.1 lb
.98"	0.9 lb

500 mm	8.6 kg
300 mm	5.2 kg
200 mm	3.4 kg
100 mm	1.7 kg
550 mm SECTIONED	9.4 kg
50 mm	0.9 kg
45 mm	0.8 kg
40 mm	0.7 kg
35 mm	0.6 kg
30 mm	0.5 kg
25 mm	0.4 kg

3207

Mat = 42CrMo4

tempered
Max T/m = 50
Max US t/ft = 16.8
α = 30°

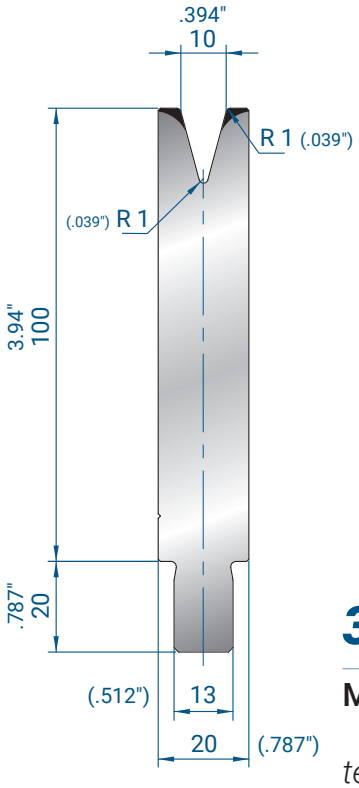


19.69"	18.5 lb
11.81"	11.2 lb
7.87"	7.5 lb
3.94"	3.7 lb
21.65" SECTIONED	20.5 lb
1.97"	1.8 lb
1.77"	1.8 lb
1.57"	1.5 lb
1.38"	1.3 lb
1.18"	1.1 lb
.98"	0.9 lb

500 mm	8.4 kg
300 mm	5.1 kg
200 mm	3.4 kg
100 mm	1.7 kg
550 mm SECTIONED	9.3 kg
50 mm	0.8 kg
45 mm	0.8 kg
40 mm	0.7 kg
35 mm	0.6 kg
30 mm	0.5 kg
25 mm	0.4 kg

3208

Mat = 42CrMo4

tempered
Max T/m = 50
Max US t/ft = 16.8
α = 30°

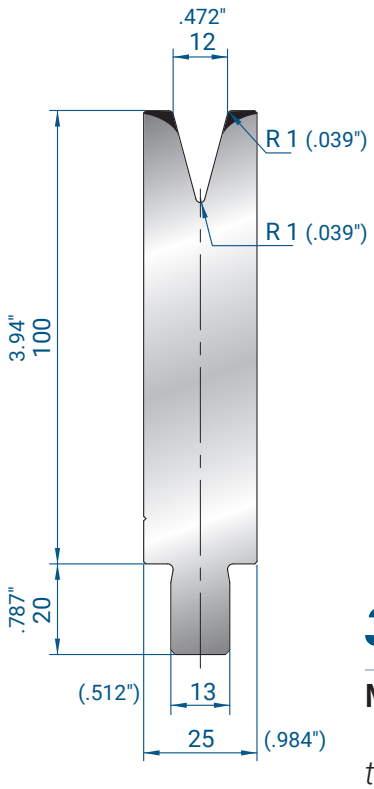


500 mm	10.2 kg	19.69"	22.5 lb
300 mm	6.1 kg	11.81"	13.4 lb
200 mm	4.1 kg	7.87"	9.0 lb
100 mm	2.0 kg	3.94"	4.4 lb
550 mm SECTIONED	11.3 kg	21.65" SECTIONED	24.9 lb
50 mm	1.0 kg	1.97"	2.2 lb
45 mm	0.9 kg	1.77"	2.0 lb
40 mm	0.8 kg	1.57"	1.8 lb
35 mm	0.7 kg	1.38"	1.5 lb
30 mm	0.6 kg	1.18"	1.3 lb
25 mm	0.5 kg	.98"	1.1 lb

3209

Mat = 42CrMo4

tempered
Max T/m = 56
Max US t/ft = 18.8
α = 30°

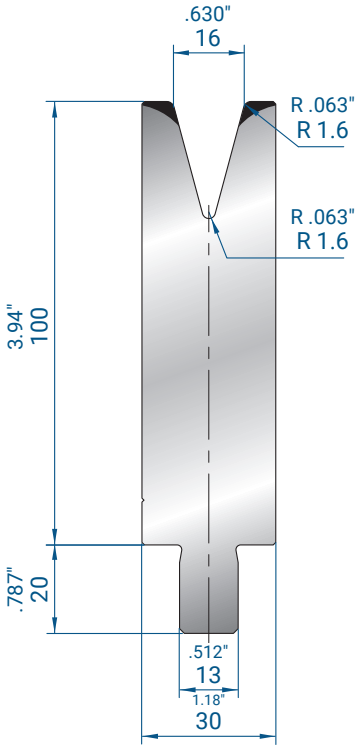


500 mm 19.69"	11.8 kg 26.0 lb
300 mm 11.81"	7.1 kg 15.7 lb
200 mm 7.87"	4.7 kg 10.4 lb
100 mm 3.94"	2.4 kg 5.3 lb
550 mm 21.65" SECTIONED	12.9 kg 28.4 lb
50 mm 1.97"	1.2 kg 2.6 lb
45 mm 1.77"	1.1 kg 2.4 lb
40 mm 1.57"	0.9 kg 2.0 lb
35 mm 1.38"	0.8 kg 1.8 lb
30 mm 1.18"	0.7 kg 1.5 lb
25 mm .98"	0.6 kg 1.3 lb

3210

Mat = 42CrMo4

tempered
Max T/m = 68
Max US t/ft = 22.8
α = 30°

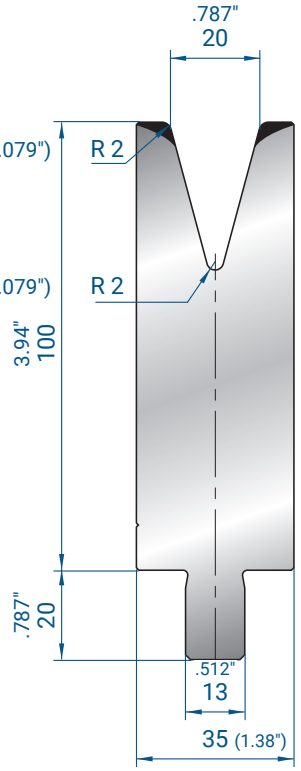


500 mm 19.69"	13.2 kg 29.1 lb
300 mm 11.81"	7.9 kg 17.4 lb
200 mm 7.87"	5.3 kg 11.7 lb
100 mm 3.94"	2.6 kg 5.7 lb
550 mm 21.65" SECTIONED	14.4 kg 31.7 lb
50 mm 1.97"	1.3 kg 2.9 lb
45 mm 1.77"	1.2 kg 2.6 lb
40 mm 1.57"	1.1 kg 2.4 lb
35 mm 1.38"	0.9 kg 2.0 lb
30 mm 1.18"	0.8 kg 1.8 lb
25 mm .98"	0.7 kg 1.5 lb

3211

Mat = 42CrMo4

tempered
Max T/m = 50
Max US t/ft = 16.8
α = 30°

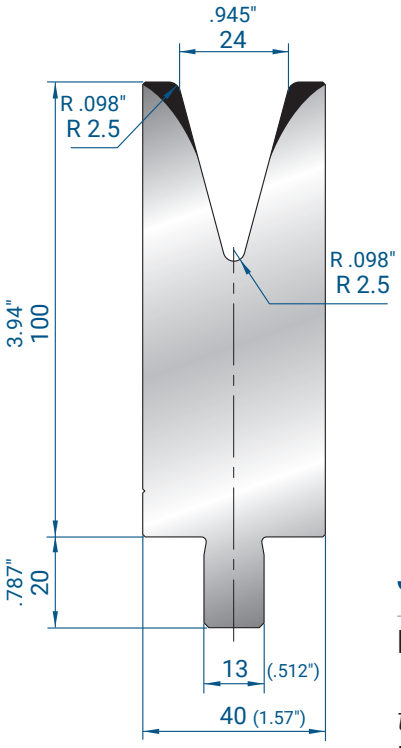


500 mm 19.69"	14.4 kg 31.7 lb
300 mm 11.81"	8.7 kg 19.2 lb
200 mm 7.87"	5.8 kg 12.8 lb
100 mm 3.94"	2.9 kg 6.4 lb
550 mm 21.65" SECTIONED	15.9 kg 35.1 lb
50 mm 1.97"	1.4 kg 3.1 lb
45 mm 1.77"	1.3 kg 2.9 lb
40 mm 1.57"	1.2 kg 2.6 lb
35 mm 1.38"	1.0 kg 2.2 lb
30 mm 1.18"	0.9 kg 2.0 lb
25 mm .98"	0.7 kg 1.5 lb

3212

Mat = 42CrMo4

tempered
Max T/m = 55
Max US t/ft = 18.5
α = 30°

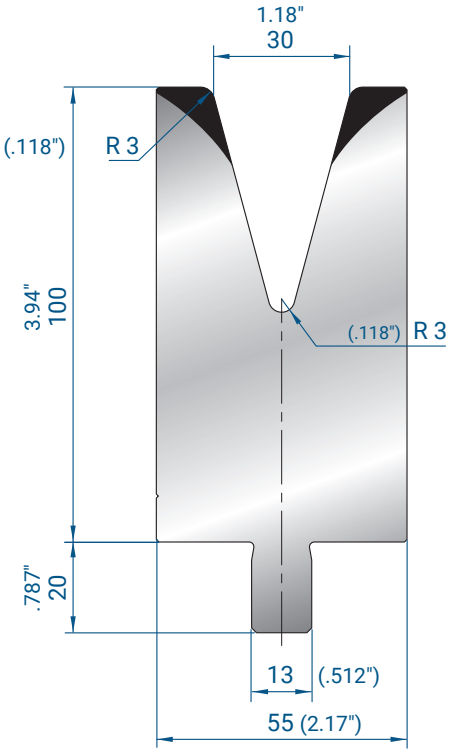

500 mm 19.69"	19.1 kg 42.1 lb
300 mm 11.81"	11.4 kg 25.1 lb
200 mm 7.87"	7.6 kg 16.8 lb
100 mm 3.94"	3.8 kg 8.4 lb
550 mm 21.65" SECTIONED	21.0 kg 46.3 lb
50 mm 1.97"	1.9 kg 4.2 lb
45 mm 1.77"	1.7 kg 3.7 lb
40 mm 1.57"	1.5 kg 3.3 lb
35 mm 1.38"	1.3 kg 2.9 lb
30 mm 1.18"	1.1 kg 2.4 lb
25 mm .98"	1.0 kg 2.2 lb

3213


Mat = 42CrMo4

tempered
Max T/m = 85
Max US t/ft = 28.6
α = 30°

3214

Mat = 42CrMo4

tempered
Max T/m = 73
Max US t/ft = 24.5
α = 30°

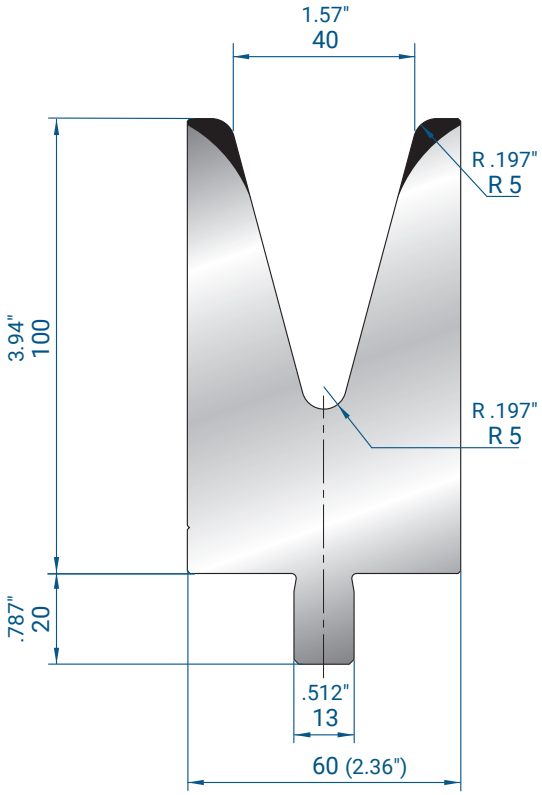


500 mm	18.3 kg	19.69"	40.3 lb
300 mm	11.0 kg	11.81"	24.3 lb
200 mm	7.3 kg	7.87"	16.1 lb
100 mm	3.7 kg	3.94"	8.2 lb
550 mm SECTIONED	20.1 kg	21.65" SECTIONED	44.3 lb
50 mm	1.8 kg	1.97"	4.0 lb
45 mm	1.6 kg	1.77"	3.5 lb
40 mm	1.5 kg	1.57"	3.3 lb
35 mm	1.3 kg	1.38"	2.9 lb
30 mm	1.1 kg	1.18"	2.4 lb
25 mm	0.9 kg	.98"	2.0 lb


3235

Mat = 42CrMo4

tempered
Max T/m = 100
Max US t/ft = 33.6
α = 30°

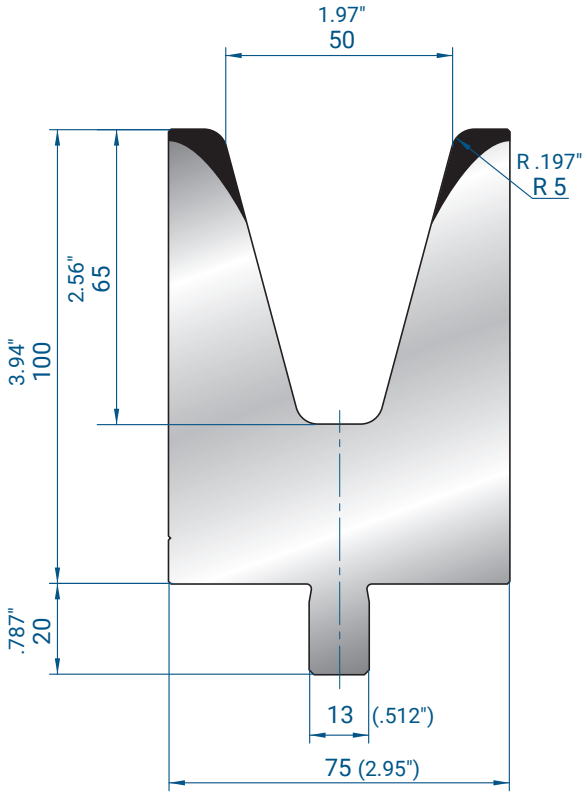

500 mm	21.6 kg	19.69"	47.6 lb
300 mm	12.9 kg	11.81"	28.4 lb
200 mm	8.6 kg	7.87"	19.0 lb
100 mm	4.3 kg	3.94"	9.5 lb
550 mm SECTIONED	23.7 kg	21.65" SECTIONED	52.2 lb
50 mm	2.2 kg	1.97"	4.9 lb
45 mm	1.9 kg	1.77"	4.2 lb
40 mm	1.7 kg	1.57"	3.7 lb
35 mm	1.5 kg	1.38"	3.3 lb
30 mm	1.3 kg	1.18"	2.9 lb
25 mm	1.1 kg	.98"	2.4 lb

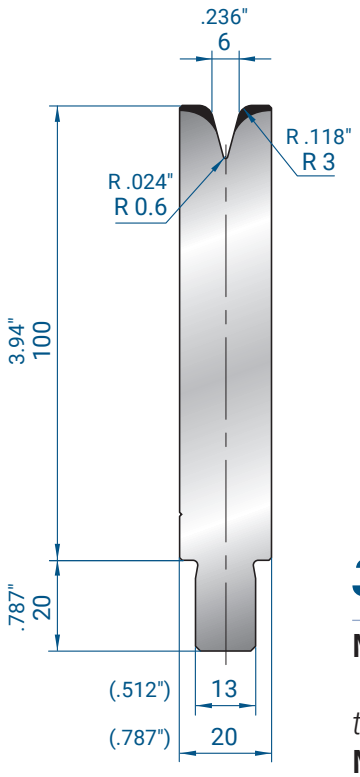


500 mm	8.6 kg	19.69"	19.0 lb
300 mm	5.2 kg	11.81"	11.5 lb
200 mm	3.5 kg	7.87"	7.7 lb
100 mm	1.7 kg	3.94"	3.7 lb
550 mm SECTIONED	9.5 kg	21.65" SECTIONED	20.9 lb
50 mm	0.9 kg	1.97"	2.0 lb
45 mm	0.8 kg	1.77"	1.8 lb
40 mm	0.7 kg	1.57"	1.5 lb
35 mm	0.6 kg	1.38"	1.3 lb
30 mm	0.5 kg	1.18"	1.1 lb
25 mm	0.4 kg	.98"	0.9 lb

3236

Mat = 42CrMo4

tempered
Max T/m = 45
Max US t/ft = 15.1
α = 30°

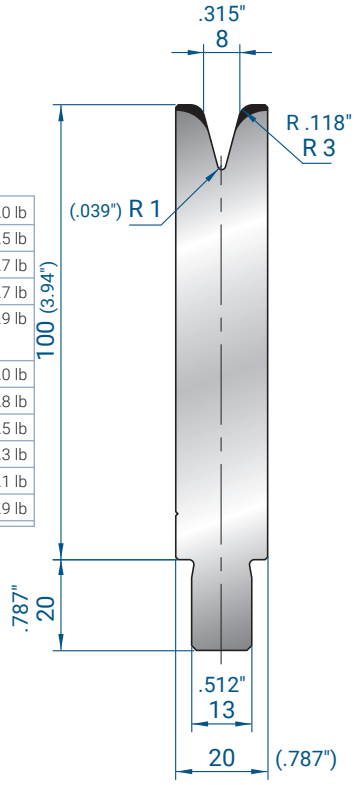


500 mm	8.5 kg	19.69"	18.7 lb
300 mm	5.1 kg	11.81"	11.2 lb
200 mm	3.4 kg	7.87"	7.5 lb
100 mm	1.7 kg	3.94"	3.7 lb
550 mm SECTIONED	9.4 kg	21.65" SECTIONED	20.7 lb
50 mm	0.9 kg	1.97"	2.0 lb
45 mm	0.8 kg	1.77"	1.8 lb
40 mm	0.7 kg	1.57"	1.5 lb
35 mm	0.6 kg	1.38"	1.3 lb
30 mm	0.5 kg	1.18"	1.1 lb
25 mm	0.4 kg	.98"	0.9 lb

3237

Mat = 42CrMo4

tempered
Max T/m = 40
Max US t/ft = 13.4
α = 30°

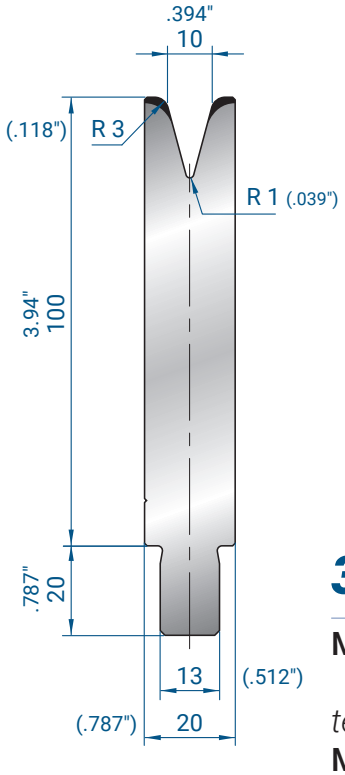


19.69"	18.5 lb		
11.81"	11.0 lb		
7.87"	7.5 lb		
3.94"	3.7 lb		
21.65" SECTIONED	20.3 lb		
1.97"	1.8 lb		
1.77"	1.8 lb		
1.57"	1.5 lb		
1.38"	1.3 lb		
1.18"	1.1 lb		
.98"	0.9 lb		
500 mm	8.4 kg		
300 mm	5.0 kg		
200 mm	3.4 kg		
100 mm	1.7 kg		
550 mm SECTIONED	9.2 kg		
50 mm	0.8 kg		
45 mm	0.8 kg		
40 mm	0.7 kg		
35 mm	0.6 kg		
30 mm	0.5 kg		
25 mm	0.4 kg		

3238

Mat = 42CrMo4

tempered
Max T/m = 30
Max US t/ft = 10.1
α = 30°

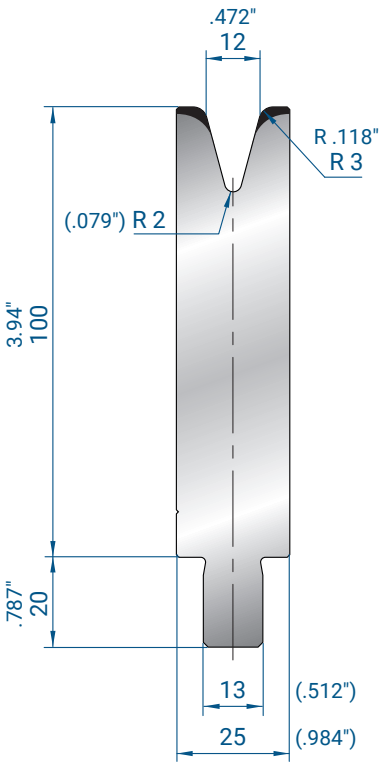


19.69"	22.5 lb		
11.81"	13.4 lb		
7.87"	9.0 lb		
3.94"	4.4 lb		
21.65" SECTIONED	24.7 lb		
1.97"	2.2 lb		
1.77"	2.0 lb		
1.57"	1.8 lb		
1.38"	1.5 lb		
1.18"	1.3 lb		
.98"	1.1 lb		
500 mm	10.2 kg		
300 mm	6.1 kg		
200 mm	4.1 kg		
100 mm	2.0 kg		
550 mm SECTIONED	11.2 kg		
50 mm	1.0 kg		
45 mm	0.9 kg		
40 mm	0.8 kg		
35 mm	0.7 kg		
30 mm	0.6 kg		
25 mm	0.5 kg		

3239

Mat = 42CrMo4

tempered
Max T/m = 40
Max US t/ft = 13.4
α = 30°



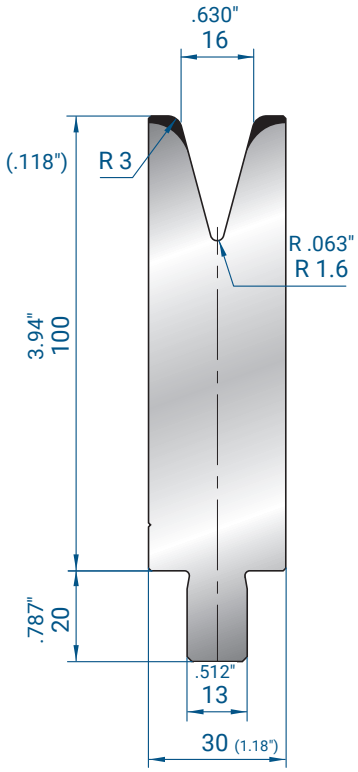


500 mm	11.7 kg	19.69"	25.8 lb
300 mm	7.0 kg	11.81"	15.4 lb
200 mm	4.7 kg	7.87"	10.4 lb
100 mm	2.3 kg	3.94"	5.1 lb
550 mm SECTIONED	12.9 kg	21.65" SECTIONED	28.4 lb
50 mm	1.2 kg	1.97"	2.6 lb
45 mm	1.1 kg	1.77"	2.4 lb
40 mm	0.9 kg	1.57"	2.0 lb
35 mm	0.8 kg	1.38"	1.8 lb
30 mm	0.7 kg	1.18"	1.5 lb
25 mm	0.6 kg	.98"	1.3 lb

3240

Mat = 42CrMo4

tempered
Max T/m = 40
Max US t/ft = 13.4
α = 30°


TRUMPF STYLE

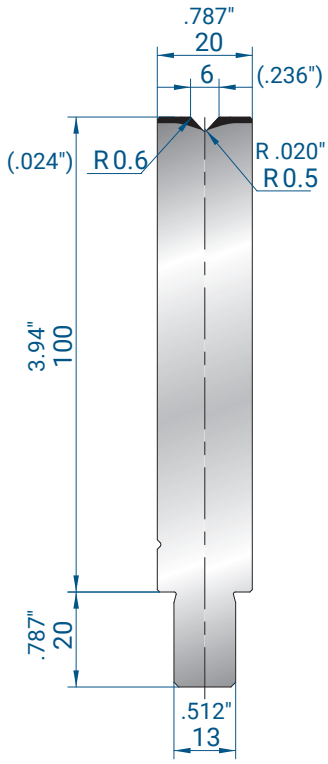

500 mm	8.8 kg	19.69"	19.4 lb
300 mm	5.3 kg	11.81"	11.7 lb
200 mm	3.5 kg	7.87"	7.7 lb
100 mm	1.8 kg	3.94"	4.0 lb
550 mm SECTIONED	9.7 kg	21.65" SECTIONED	21.4 lb
50 mm	0.9 kg	1.97"	2.0 lb
45 mm	0.8 kg	1.77"	1.8 lb
40 mm	0.7 kg	1.57"	1.5 lb
35 mm	0.6 kg	1.38"	1.3 lb
30 mm	0.5 kg	1.18"	1.1 lb
25 mm	0.4 kg	.98"	0.9 lb

3123


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 86°

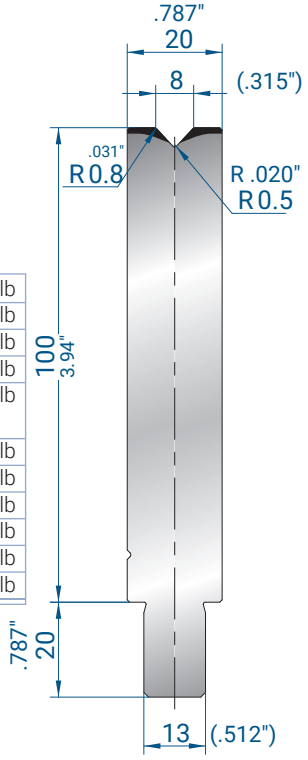

500 mm	8.8 kg	19.69"	19.4 lb
300 mm	5.3 kg	11.81"	11.7 lb
200 mm	3.5 kg	7.87"	7.7 lb
100 mm	1.8 kg	3.94"	4.0 lb
550 mm SECTIONED	9.7 kg	21.65" SECTIONED	21.4 lb
50 mm	0.9 kg	1.97"	2.0 lb
45 mm	0.8 kg	1.77"	1.8 lb
40 mm	0.7 kg	1.57"	1.5 lb
35 mm	0.6 kg	1.38"	1.3 lb
30 mm	0.5 kg	1.18"	1.1 lb
25 mm	0.4 kg	.98"	0.9 lb

3124

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 86°

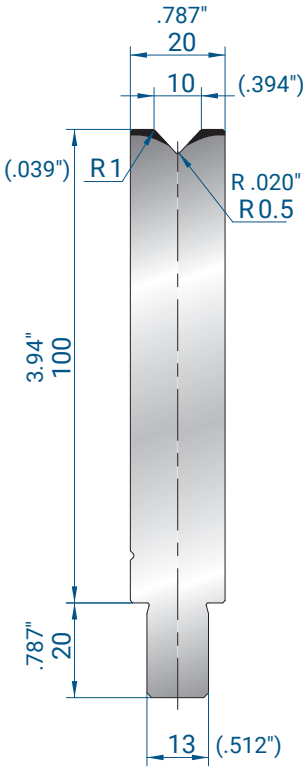


19.69"	19.2 lb
11.81"	11.5 lb
7.87"	7.7 lb
3.94"	3.7 lb
21.65" SECTIONED	21.2 lb
1.97"	2.0 lb
1.77"	1.8 lb
1.57"	1.5 lb
1.38"	1.3 lb
1.18"	1.1 lb
.98"	0.9 lb

500 mm	8.7 kg		
300 mm	5.2 kg		
200 mm	3.5 kg		
100 mm	1.7 kg		
550 mm SECTIONED	9.6 kg		
50 mm	0.9 kg		
45 mm	0.8 kg		
40 mm	0.7 kg		
35 mm	0.6 kg		
30 mm	0.5 kg		
25 mm	0.4 kg		

3125


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 86°

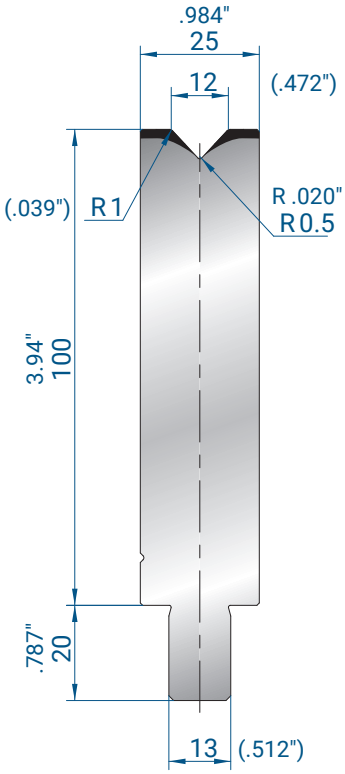

500 mm	10.6 kg	19.69"	23.4 lb
300 mm	6.4 kg	11.81"	14.1 lb
200 mm	4.3 kg	7.87"	9.5 lb
100 mm	2.1 kg	3.94"	4.6 lb
550 mm SECTIONED	11.7 kg	21.65" SECTIONED	25.8 lb
50 mm	1.1 kg	1.97"	2.4 lb
45 mm	1.0 kg	1.77"	2.2 lb
40 mm	0.9 kg	1.57"	2.0 lb
35 mm	0.7 kg	1.38"	1.5 lb
30 mm	0.6 kg	1.18"	1.3 lb
25 mm	0.5 kg	.98"	1.1 lb

3126

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 86°

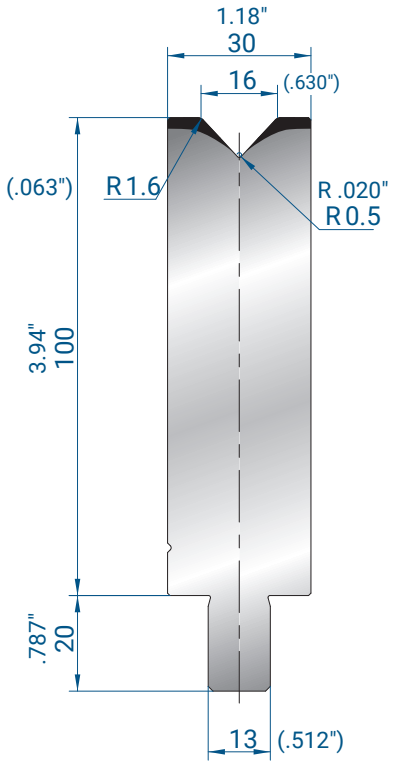


19.69"	27.6 lb
11.81"	16.5 lb
7.87"	11.0 lb
3.94"	5.5 lb
21.65" SECTIONED	30.2 lb
1.97"	2.6 lb
1.77"	2.4 lb
1.57"	2.2 lb
1.38"	2.0 lb
1.18"	1.5 lb
.98"	1.3 lb

500 mm	12.5 kg
300 mm	7.5 kg
200 mm	5.0 kg
100 mm	2.5 kg
550 mm SECTIONED	13.7 kg
50 mm	1.2 kg
45 mm	1.1 kg
40 mm	1.0 kg
35 mm	0.9 kg
30 mm	0.7 kg
25 mm	0.6 kg

3127

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 86°

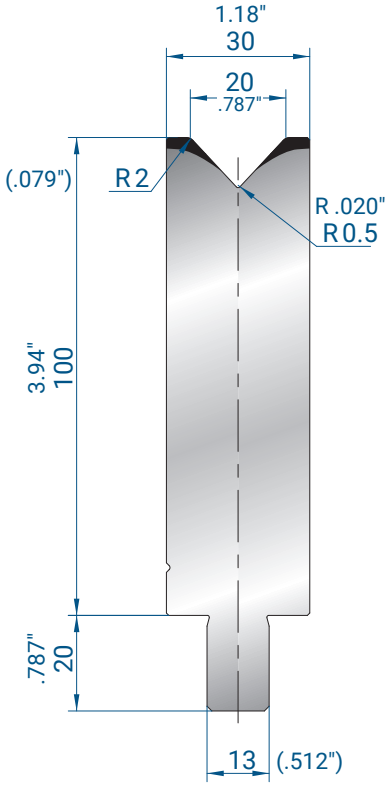


19.69"	27.1 lb
11.81"	16.3 lb
7.87"	10.8 lb
3.94"	5.5 lb
21.65" SECTIONED	30.0 lb
1.97"	2.6 lb
1.77"	2.4 lb
1.57"	2.2 lb
1.38"	2.0 lb
1.18"	1.5 lb
.98"	1.3 lb

500 mm	12.3 kg
300 mm	7.4 kg
200 mm	4.9 kg
100 mm	2.5 kg
550 mm SECTIONED	13.6 kg
50 mm	1.2 kg
45 mm	1.1 kg
40 mm	1.0 kg
35 mm	0.9 kg
30 mm	0.7 kg
25 mm	0.6 kg

3128

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 86°

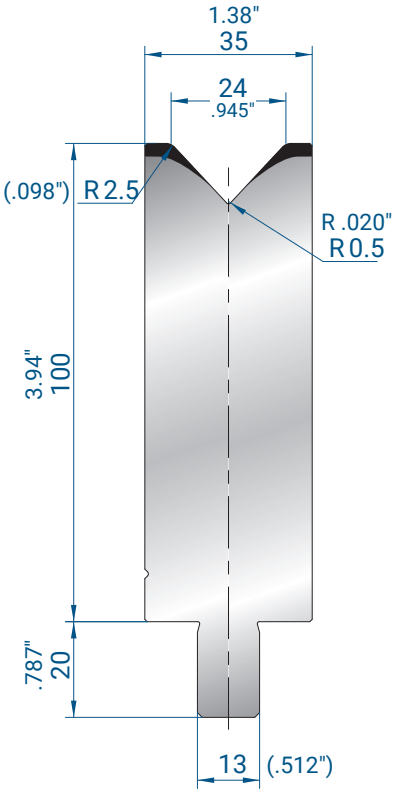


19.69"	31.1 lb
11.81"	18.7 lb
7.87"	12.3 lb
3.94"	6.2 lb
21.65" SECTIONED	34.2 lb
1.97"	3.1 lb
1.77"	2.9 lb
1.57"	2.4 lb
1.38"	2.2 lb
1.18"	1.8 lb
.98"	1.5 lb

500 mm	14.1 kg
300 mm	8.5 kg
200 mm	5.6 kg
100 mm	2.8 kg
550 mm SECTIONED	15.5 kg
50 mm	1.4 kg
45 mm	1.3 kg
40 mm	1.1 kg
35 mm	1.0 kg
30 mm	0.8 kg
25 mm	0.7 kg

3129


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 86°

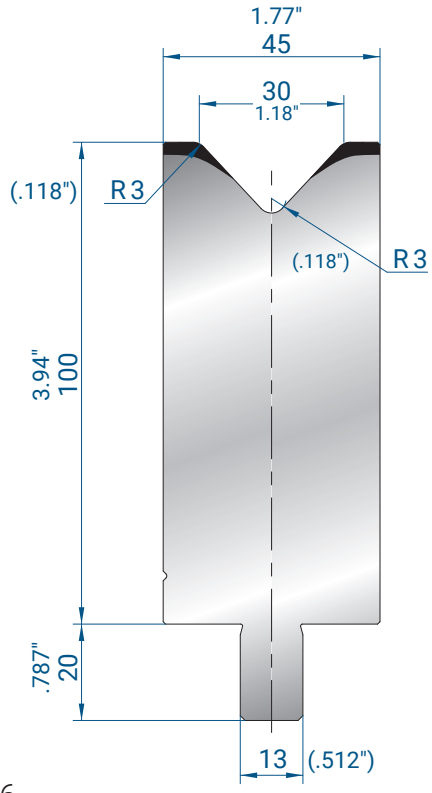

500 mm	17.7 kg	19.69"	39.0 lb
300 mm	10.6 kg	11.81"	23.4 lb
200 mm	7.1 kg	7.87"	15.7 lb
100 mm	3.5 kg	3.94"	7.7 lb
550 mm SECTIONED	19.5 kg	21.65" SECTIONED	43.0 lb
50 mm	1.8 kg	1.97"	4.0 lb
45 mm	1.6 kg	1.77"	3.5 lb
40 mm	1.4 kg	1.57"	3.1 lb
35 mm	1.2 kg	1.38"	2.6 lb
30 mm	1.1 kg	1.18"	2.4 lb
25 mm	0.9 kg	.98"	2.0 lb

3130

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 86°

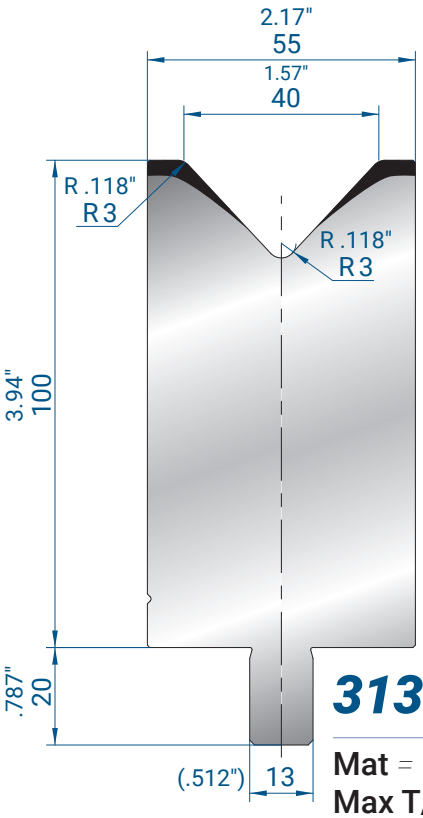


19.69"	46.1 lb
11.81"	27.6 lb
7.87"	18.3 lb
3.94"	9.3 lb
21.65" SECTIONED	50.7 lb
1.97"	4.6 lb
1.77"	4.2 lb
1.57"	3.7 lb
1.38"	3.3 lb
1.18"	2.9 lb
.98"	2.2 lb

500 mm	20.9 kg
300 mm	12.5 kg
200 mm	8.3 kg
100 mm	4.2 kg
550 mm SECTIONED	23.0 kg
50 mm	2.1 kg
45 mm	1.9 kg
40 mm	1.7 kg
35 mm	1.5 kg
30 mm	1.3 kg
25 mm	1.0 kg

3131

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 86°

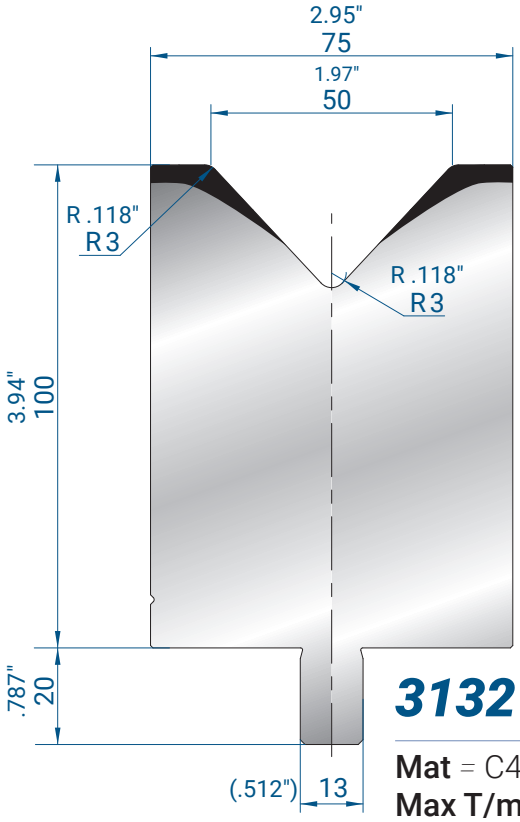


19.69"	61.3 lb
11.81"	36.8 lb
7.87"	24.5 lb
3.94"	12.3 lb
21.65" SECTIONED	67.2 lb
1.97"	6.2 lb
1.77"	5.5 lb
1.57"	4.9 lb
1.38"	4.2 lb
1.18"	3.7 lb
.98"	3.1 lb

500 mm	27.8 kg
300 mm	16.7 kg
200 mm	11.1 kg
100 mm	5.6 kg
550 mm SECTIONED	30.5 kg
50 mm	2.8 kg
45 mm	2.5 kg
40 mm	2.2 kg
35 mm	1.9 kg
30 mm	1.7 kg
25 mm	1.4 kg

3132

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 86°

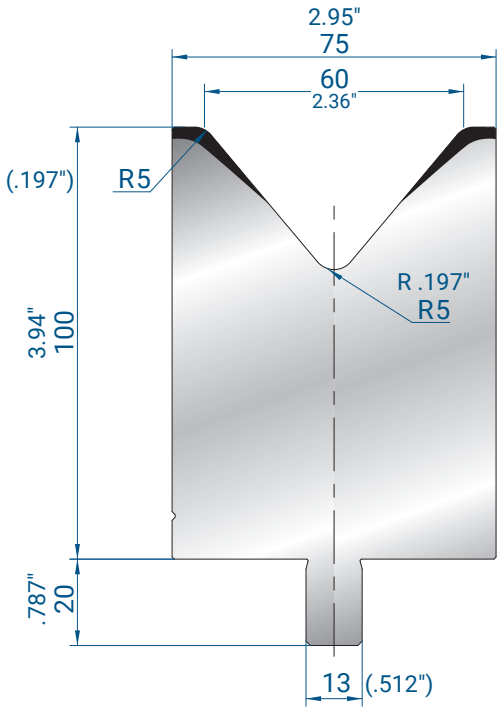


3133

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 80°

500 mm	26.2 kg	19.69"	57.8 lb
300 mm	15.7 kg	11.81"	34.6 lb
200 mm	10.5 kg	7.87"	23.1 lb
100 mm	5.2 kg	3.94"	11.5 lb
550 mm SECTIONED	28.8 kg	21.65" SECTIONED	63.5 lb
50 mm	2.6 kg	1.97"	5.7 lb
45 mm	2.4 kg	1.77"	5.3 lb
40 mm	2.1 kg	1.57"	4.6 lb
35 mm	1.8 kg	1.38"	4.0 lb
30 mm	1.6 kg	1.18"	3.5 lb
25 mm	1.3 kg	.98"	2.9 lb

3134

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 80°

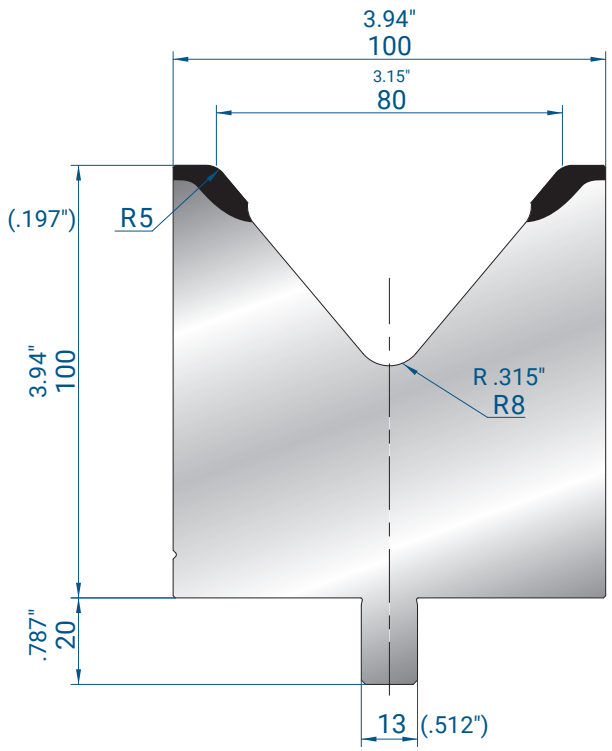


19.69"	72.5 lb
11.81"	43.7 lb
7.87"	29.1 lb
3.94"	14.6 lb
21.65" SECTIONED	79.8 lb
1.97"	7.3 lb
1.77"	6.6 lb
1.57"	5.7 lb
1.38"	5.1 lb
1.18"	4.4 lb
.98"	3.5 lb

500 mm	32.9 kg
300 mm	19.8 kg
200 mm	13.2 kg
100 mm	6.6 kg
550 mm SECTIONED	36.2 kg
50 mm	3.3 kg
45 mm	3.0 kg
40 mm	2.6 kg
35 mm	2.3 kg
30 mm	2.0 kg
25 mm	1.6 kg


3135

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 80°

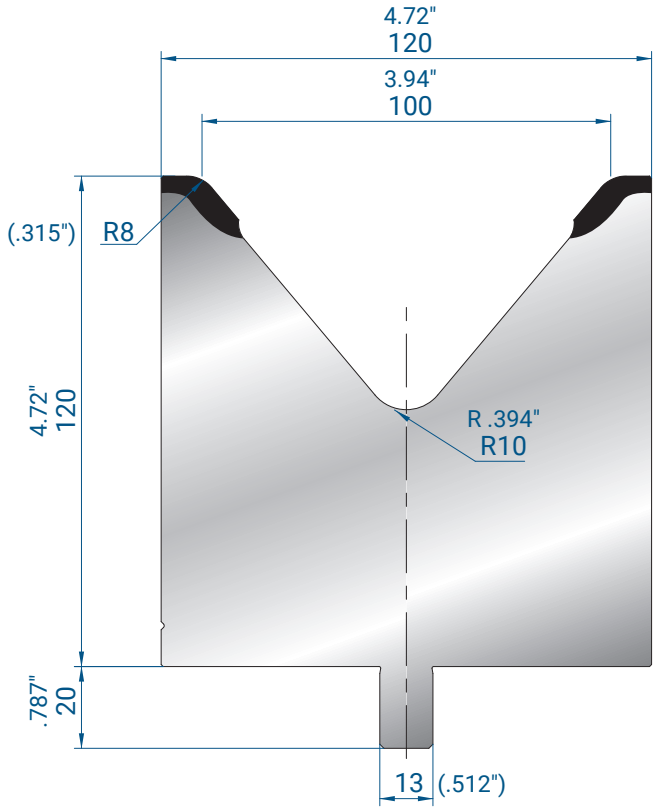

19.69"	99.0 lb
11.81"	59.3 lb
7.87"	39.5 lb
3.94"	19.8 lb
21.65" SECTIONED	109 lb
1.97"	9.9 lb
1.77"	8.8 lb
1.57"	7.9 lb
1.38"	6.8 lb
1.18"	6.0 lb
.98"	4.9 lb


500 mm	44.9 kg
300 mm	26.9 kg
200 mm	17.9 kg
100 mm	9.0 kg
550 mm SECTIONED	49.3 kg
50 mm	4.5 kg
45 mm	4.0 kg
40 mm	3.6 kg
35 mm	3.1 kg
30 mm	2.7 kg
25 mm	2.2 kg

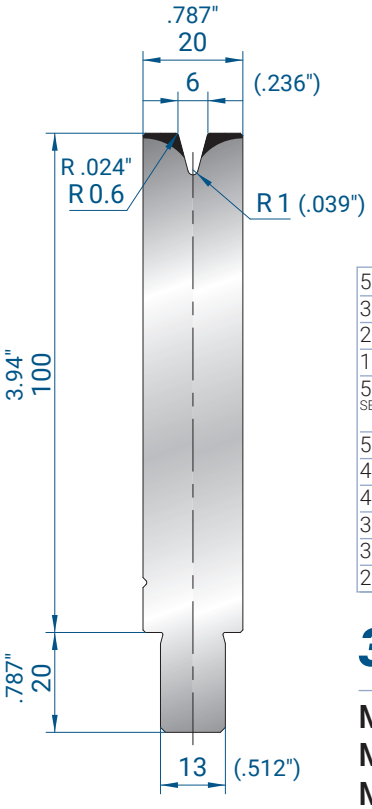

500 mm	8.7 kg	19.69"	19.2 lb
300 mm	5.2 kg	11.81"	11.5 lb
200 mm	3.5 kg	7.87"	7.7 lb
100 mm	1.7 kg	3.94"	3.7 lb
550 mm SECTIONED	9.6 kg	21.65" SECTIONED	21.2 lb
50 mm	0.9 kg	1.97"	2.0 lb
45 mm	0.8 kg	1.77"	1.8 lb
40 mm	0.7 kg	1.57"	1.5 lb
35 mm	0.6 kg	1.38"	1.3 lb
30 mm	0.5 kg	1.18"	1.1 lb
25 mm	0.4 kg	.98"	0.9 lb

3136

Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 30°

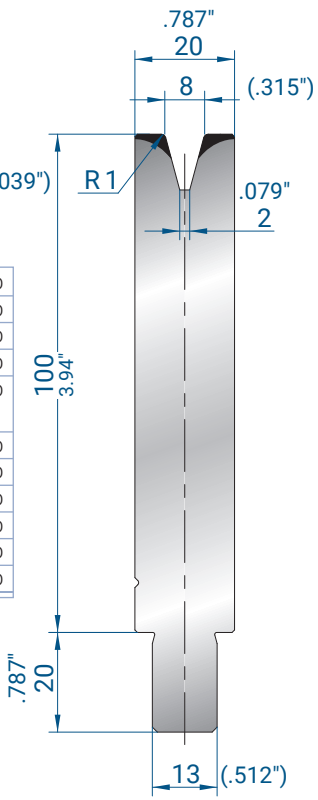


19.69"	19.0 lb
11.81"	11.5 lb
7.87"	7.5 lb
3.94"	3.7 lb
21.65" SECTIONED	20.9 lb
1.97"	2.0 lb
1.77"	1.8 lb
1.57"	1.5 lb
1.38"	1.3 lb
1.18"	1.1 lb
.98"	0.9 lb

500 mm	8.6 kg
300 mm	5.2 kg
200 mm	3.4 kg
100 mm	1.7 kg
550 mm SECTIONED	9.5 kg
50 mm	0.9 kg
45 mm	0.8 kg
40 mm	0.7 kg
35 mm	0.6 kg
30 mm	0.5 kg
25 mm	0.4 kg

3137


Mat = C45
Max T/m = 40
Max US t/ft = 13.4
α = 30°

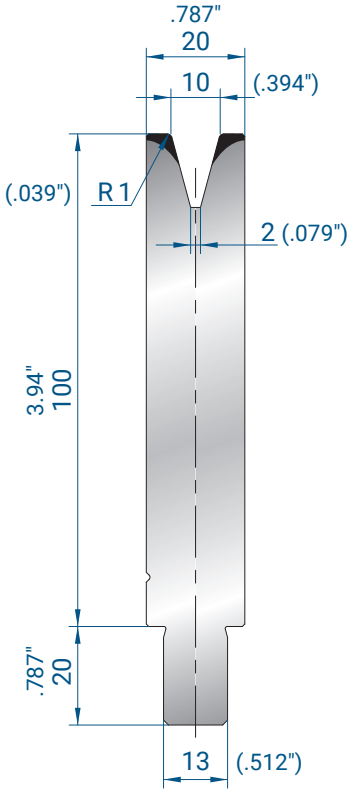

500 mm	8.5 kg	19.69"	18.7 lb
300 mm	5.1 kg	11.81"	11.2 lb
200 mm	3.4 kg	7.87"	7.5 lb
100 mm	1.7 kg	3.94"	3.7 lb
550 mm SECTIONED	9.3 kg	21.65" SECTIONED	20.5 lb
50 mm	0.8 kg	1.97"	1.8 lb
45 mm	0.8 kg	1.77"	1.8 lb
40 mm	0.7 kg	1.57"	1.5 lb
35 mm	0.6 kg	1.38"	1.3 lb
30 mm	0.5 kg	1.18"	1.1 lb
25 mm	0.4 kg	.98"	0.9 lb

3138

Mat = C45
Max T/m = 40
Max US t/ft = 13.4
α = 30°

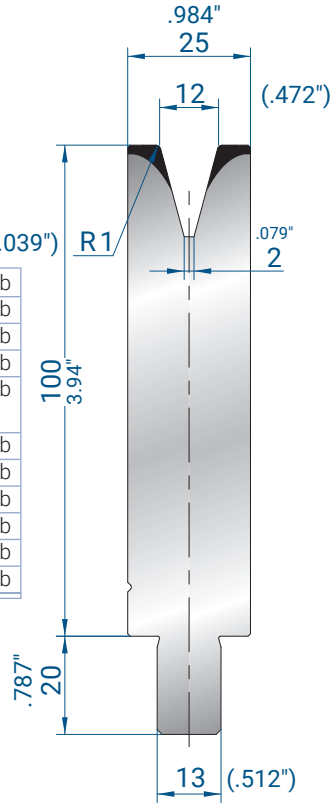


19.69"	22.7 lb
11.81"	13.7 lb
7.87"	9.0 lb
3.94"	4.6 lb
21.65" SECTIONED	24.9 lb
1.97"	2.2 lb
1.77"	2.0 lb
1.57"	1.8 lb
1.38"	1.5 lb
1.18"	1.3 lb
.98"	1.1 lb

500 mm	10.3 kg
300 mm	6.2 kg
200 mm	4.1 kg
100 mm	2.1 kg
550 mm SECTIONED	11.3 kg
50 mm	1.0 kg
45 mm	0.9 kg
40 mm	0.8 kg
35 mm	0.7 kg
30 mm	0.6 kg
25 mm	0.5 kg

3139

Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 30°

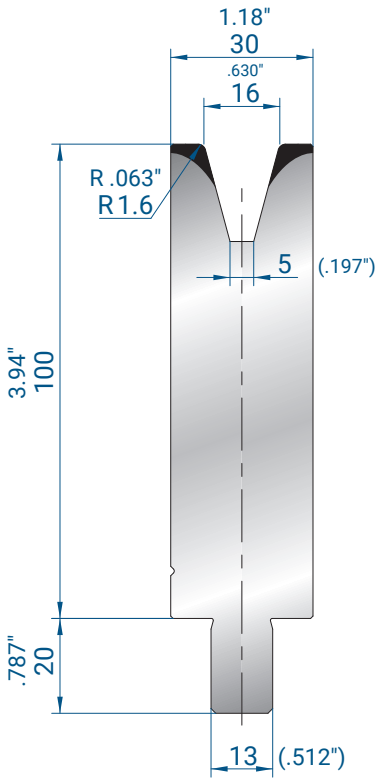


19.69"	26.2 lb
11.81"	15.7 lb
7.87"	10.6 lb
3.94"	5.3 lb
21.65" SECTIONED	28.9 lb
1.97"	2.6 lb
1.77"	2.4 lb
1.57"	2.2 lb
1.38"	1.8 lb
1.18"	1.5 lb
.98"	1.3 lb

500 mm	11.9 kg
300 mm	7.1 kg
200 mm	4.8 kg
100 mm	2.4 kg
550 mm SECTIONED	13.1 kg
50 mm	1.2 kg
45 mm	1.1 kg
40 mm	1.0 kg
35 mm	0.8 kg
30 mm	0.7 kg
25 mm	0.6 kg

3140

Mat = C45
Max T/m = 45
Max US t/ft = 15.1
α = 30°

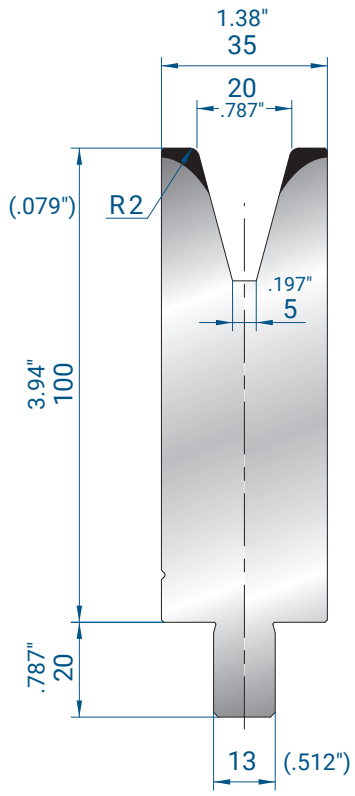



19.69"	29.3 lb
11.81"	17.6 lb
7.87"	11.7 lb
3.94"	6.0 lb
21.65" SECTIONED	32.4 lb
1.97"	2.9 lb
1.77"	2.6 lb
1.57"	2.4 lb
1.38"	2.0 lb
1.18"	1.8 lb
.98"	1.5 lb

500 mm	13.3 kg
300 mm	8.0 kg
200 mm	5.3 kg
100 mm	2.7 kg
550 mm SECTIONED	14.7 kg
50 mm	1.3 kg
45 mm	1.2 kg
40 mm	1.1 kg
35 mm	0.9 kg
30 mm	0.8 kg
25 mm	0.7 kg

3141

Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 30°

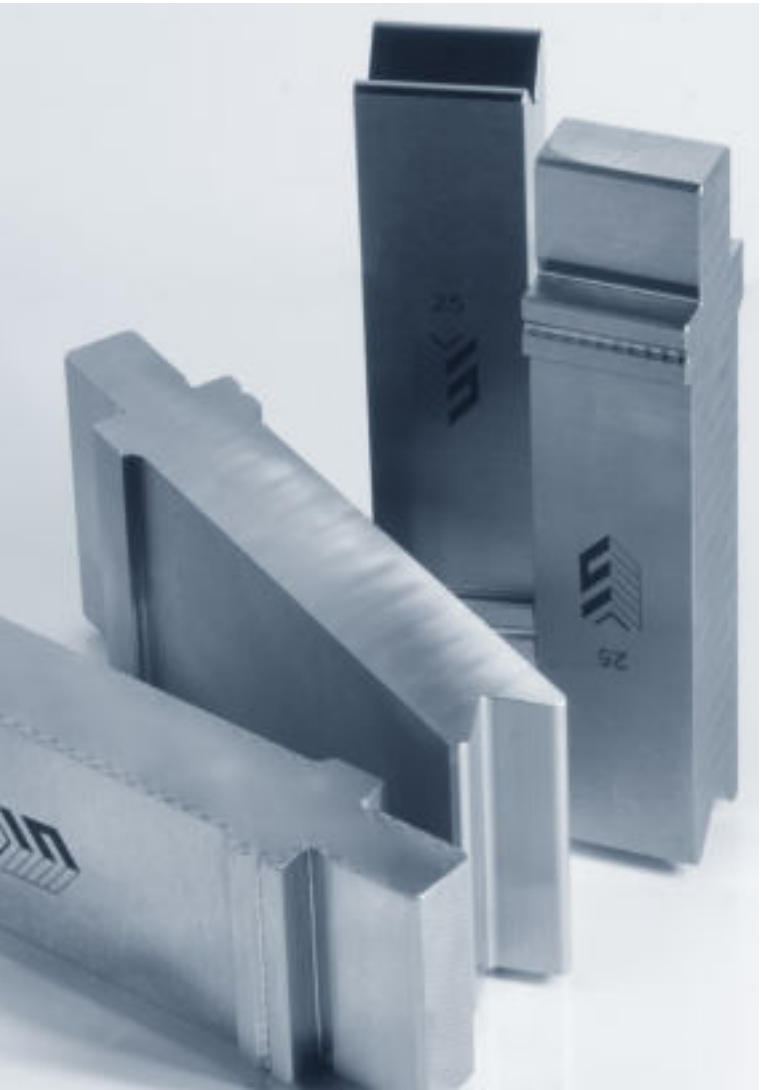

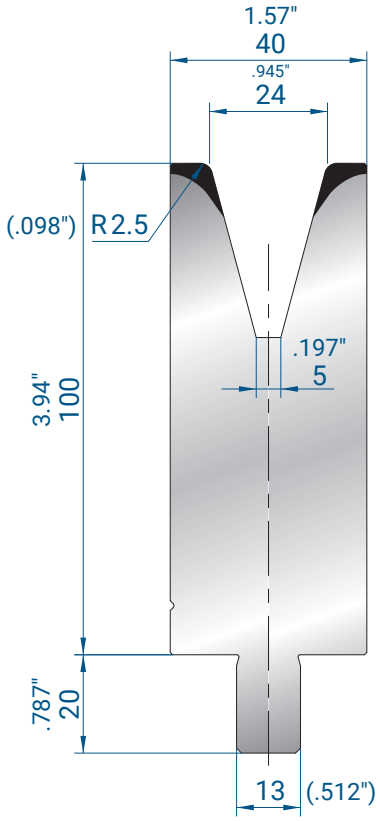


19.69"	32.4 lb
11.81"	19.4 lb
7.87"	13.0 lb
3.94"	6.4 lb
21.65" SECTIONED	35.5 lb
1.97"	3.3 lb
1.77"	2.9 lb
1.57"	2.6 lb
1.38"	2.2 lb
1.18"	2.0 lb
.98"	1.5 lb

500 mm	14.7 kg
300 mm	8.8 kg
200 mm	5.9 kg
100 mm	2.9 kg
550 mm SECTIONED	16.1 kg
50 mm	1.5 kg
45 mm	1.3 kg
40 mm	1.2 kg
35 mm	1.0 kg
30 mm	0.9 kg
25 mm	0.7 kg

3142


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 30°

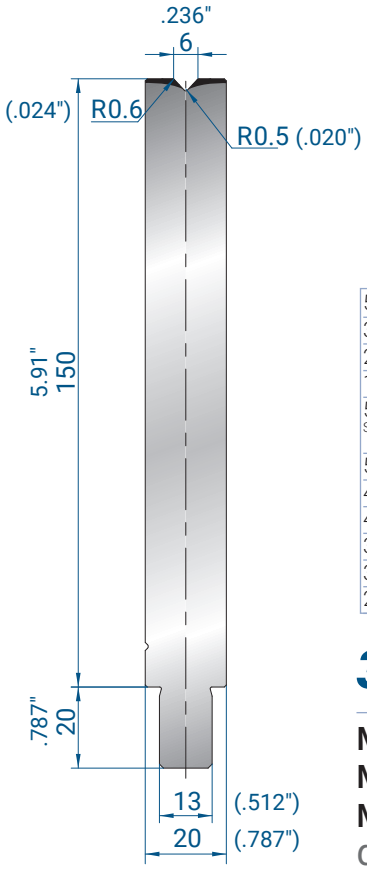

500 mm	12.7 kg	19.69"	28.0 lb
300 mm	7.6 kg	11.81"	16.8 lb
200 mm	5.1 kg	7.87"	11.2 lb
100 mm	2.5 kg	3.94"	5.5 lb
550 mm SECTIONED	14.0 kg	21.65" SECTIONED	30.9 lb
50 mm	1.3 kg	1.97"	2.9 lb
45 mm	1.1 kg	1.77"	2.4 lb
40 mm	1.0 kg	1.57"	2.2 lb
35 mm	0.9 kg	1.38"	2.0 lb
30 mm	0.8 kg	1.18"	1.8 lb
25 mm	0.6 kg	.98"	1.3 lb

3143


Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 86°

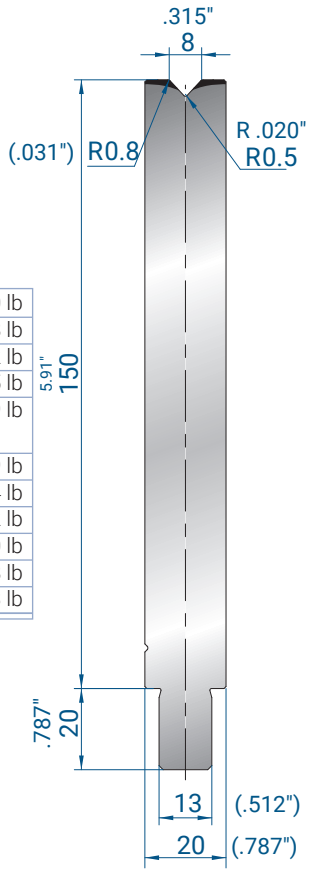


500 mm	12.7 kg	19.69"	28.0 lb
300 mm	7.6 kg	11.81"	16.8 lb
200 mm	5.1 kg	7.87"	11.2 lb
100 mm	2.5 kg	3.94"	5.5 lb
550 mm SECTIONED	14.0 kg	21.65" SECTIONED	30.9 lb
50 mm	1.3 kg	1.97"	2.9 lb
45 mm	1.1 kg	1.77"	2.4 lb
40 mm	1.0 kg	1.57"	2.2 lb
35 mm	0.9 kg	1.38"	2.0 lb
30 mm	0.8 kg	1.18"	1.8 lb
25 mm	0.6 kg	.98"	1.3 lb

3144

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 86°

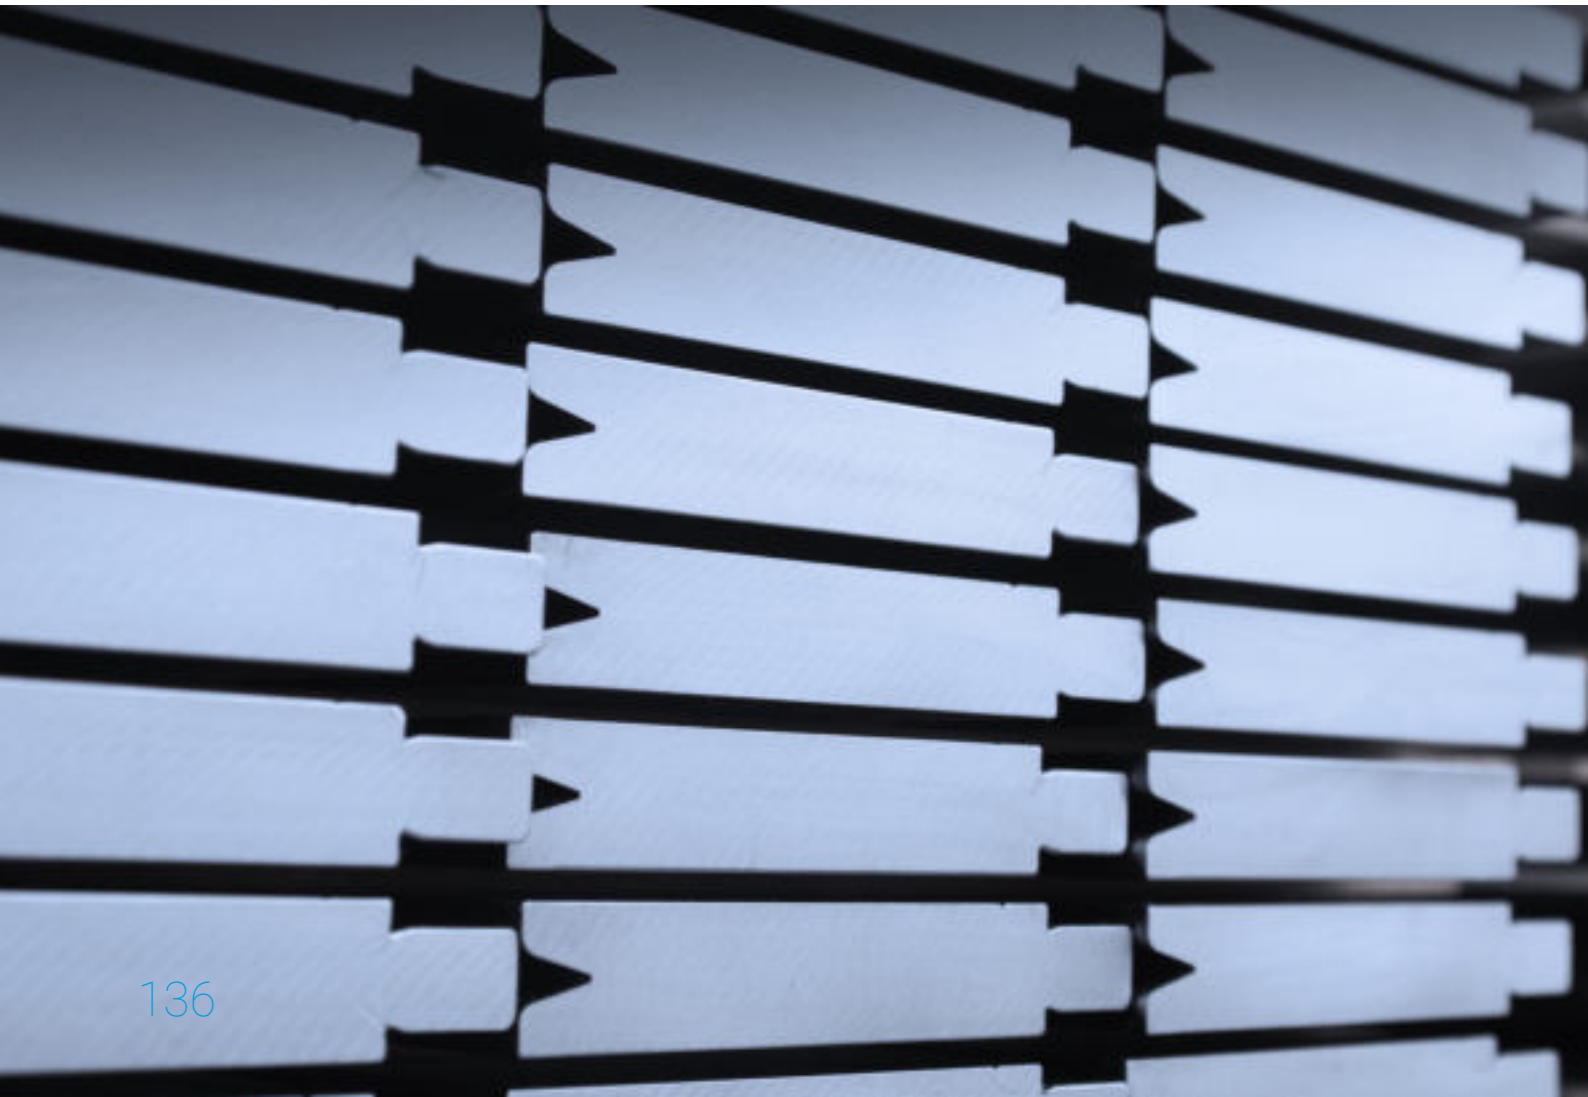

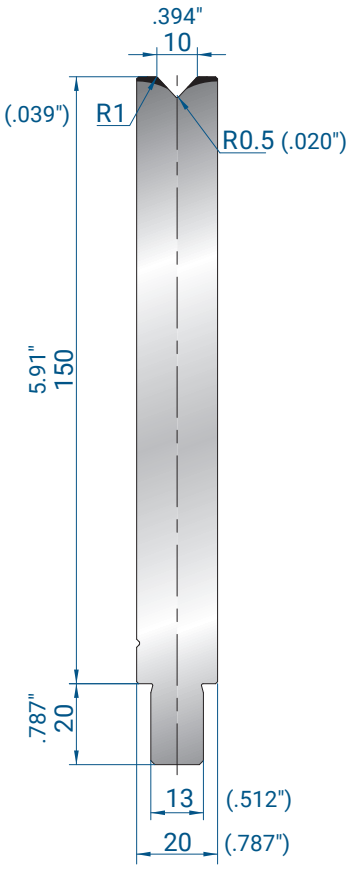


19.69"	27.8 lb
11.81"	16.8 lb
7.87"	11.2 lb
3.94"	5.5 lb
21.65" SECTIONED	30.6 lb
1.97"	2.9 lb
1.77"	2.4 lb
1.57"	2.2 lb
1.38"	2.0 lb
1.18"	1.8 lb
.98"	1.3 lb

500 mm	12.6 kg
300 mm	7.6 kg
200 mm	5.1 kg
100 mm	2.5 kg
550 mm SECTIONED	13.9 kg
50 mm	1.3 kg
45 mm	1.1 kg
40 mm	1.0 kg
35 mm	0.9 kg
30 mm	0.8 kg
25 mm	0.6 kg

3145

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 86°

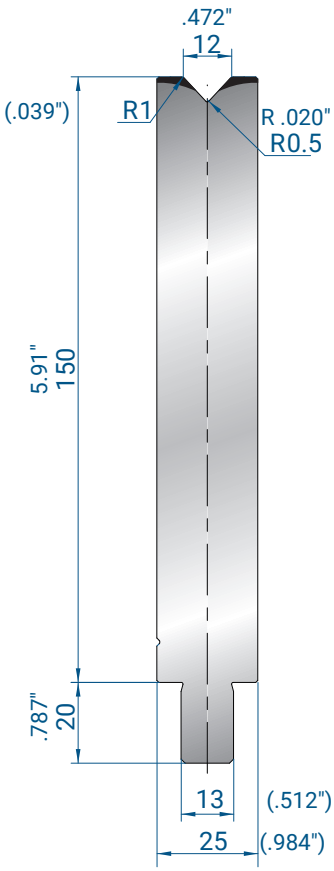


19.69"	34.2 lb
11.81"	20.5 lb
7.87"	13.7 lb
3.94"	6.8 lb
21.65" SECTIONED	37.7 lb
1.97"	3.5 lb
1.77"	3.1 lb
1.57"	2.6 lb
1.38"	2.4 lb
1.18"	2.0 lb
.98"	1.8 lb

500 mm	15.5 kg
300 mm	9.3 kg
200 mm	6.2 kg
100 mm	3.1 kg
550 mm SECTIONED	17.1 kg
50 mm	1.6 kg
45 mm	1.4 kg
40 mm	1.2 kg
35 mm	1.1 kg
30 mm	0.9 kg
25 mm	0.8 kg

3146

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 86°

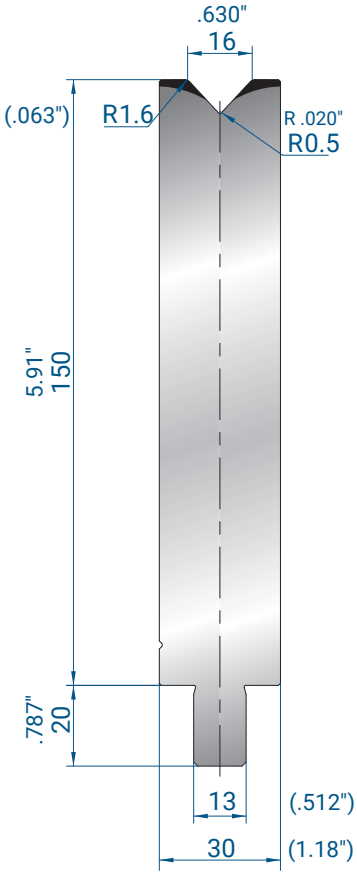


19.69"	40.6 lb
11.81"	24.3 lb
7.87"	16.1 lb
3.94"	8.2 lb
21.65" SECTIONED	44.5 lb
1.97"	4.0 lb
1.77"	3.7 lb
1.57"	3.3 lb
1.38"	2.9 lb
1.18"	2.4 lb
.98"	2.0 lb

500 mm	18.4 kg
300 mm	11.0 kg
200 mm	7.3 kg
100 mm	3.7 kg
550 mm SECTIONED	20.2 kg
50 mm	1.8 kg
45 mm	1.7 kg
40 mm	1.5 kg
35 mm	1.3 kg
30 mm	1.1 kg
25 mm	0.9 kg

3147

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 86°

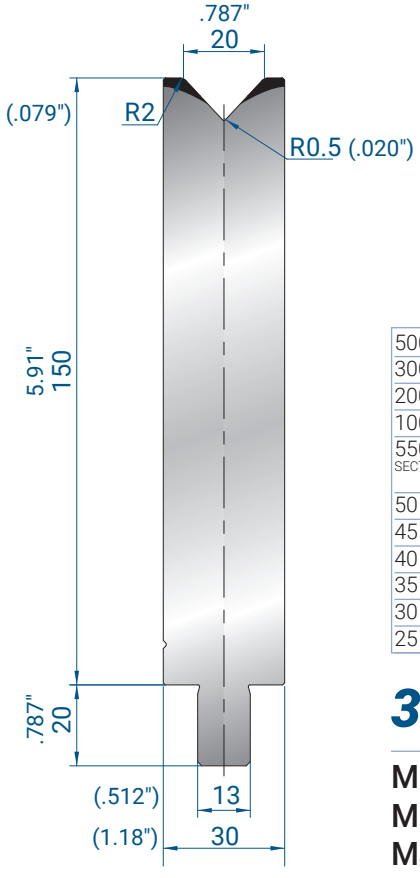


500 mm	18.2 kg	19.69"	40.1 lb
300 mm	10.9 kg	11.81"	24.0 lb
200 mm	7.3 kg	7.87"	16.1 lb
100 mm	3.6 kg	3.94"	7.9 lb
550 mm SECTIONED	20.0 kg	21.65" SECTIONED	44.1 lb
50 mm	1.8 kg	1.97"	4.0 lb
45 mm	1.6 kg	1.77"	3.5 lb
40 mm	1.5 kg	1.57"	3.3 lb
35 mm	1.3 kg	1.38"	2.9 lb
30 mm	1.1 kg	1.18"	2.4 lb
25 mm	0.9 kg	.98"	2.0 lb

3148

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 86°



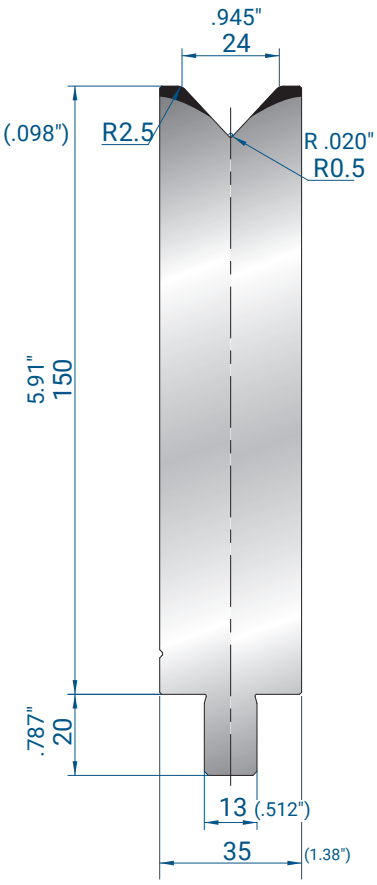


19.69"	46.3 lb
11.81"	27.8 lb
7.87"	18.5 lb
3.94"	9.3 lb
21.65" SECTIONED	50.9 lb
1.97"	4.6 lb
1.77"	4.2 lb
1.57"	3.7 lb
1.38"	3.3 lb
1.18"	2.9 lb
.98"	2.2 lb

500 mm	21.0 kg
300 mm	12.6 kg
200 mm	8.4 kg
100 mm	4.2 kg
550 mm SECTIONED	23.1 kg
50 mm	2.1 kg
45 mm	1.9 kg
40 mm	1.7 kg
35 mm	1.5 kg
30 mm	1.3 kg
25 mm	1.0 kg

3149

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 86°


1V DIES H150 - 30° C45

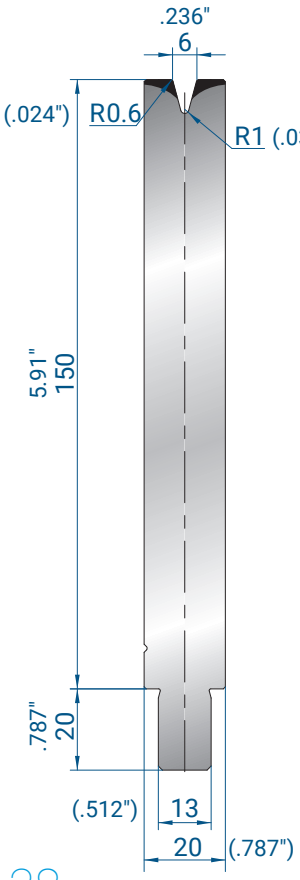

500 mm	12.6 kg	19.69"	27.8 lb
300 mm	7.6 kg	11.81"	16.8 lb
200 mm	5.1 kg	7.87"	11.2 lb
100 mm	2.5 kg	3.94"	5.5 lb
550 mm SECTIONED	13.9 kg	21.65" SECTIONED	30.6 lb
50 mm	1.3 kg	1.97"	2.9 lb
45 mm	1.1 kg	1.77"	2.4 lb
40 mm	1.0 kg	1.57"	2.2 lb
35 mm	0.9 kg	1.38"	2.0 lb
30 mm	0.8 kg	1.18"	1.8 lb
25 mm	0.6 kg	.98"	1.3 lb

3150

Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 30°

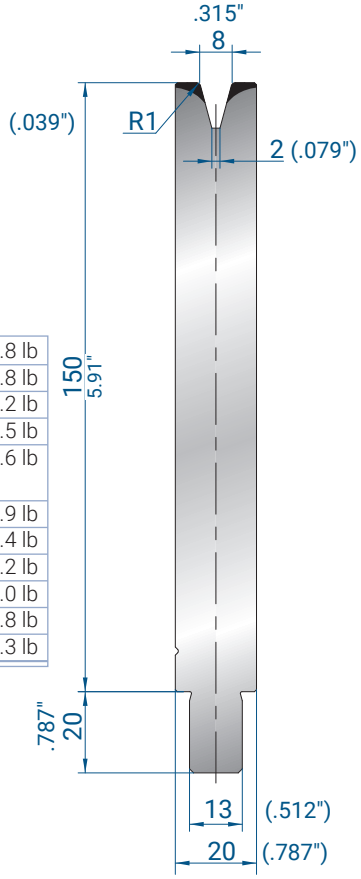


19.69"	27.6 lb
11.81"	16.5 lb
7.87"	11.0 lb
3.94"	5.5 lb
21.65" SECTIONED	30.4 lb
1.97"	2.9 lb
1.77"	2.6 lb
1.57"	2.2 lb
1.38"	2.0 lb
1.18"	1.8 lb
.98"	1.5 lb

500 mm	12.5 kg
300 mm	7.5 kg
200 mm	5.0 kg
100 mm	2.5 kg
550 mm SECTIONED	13.8 kg
50 mm	1.3 kg
45 mm	1.2 kg
40 mm	1.0 kg
35 mm	0.9 kg
30 mm	0.8 kg
25 mm	0.7 kg

3151


Mat = C45
Max T/m = 40
Max US t/ft = 13.4
α = 30°

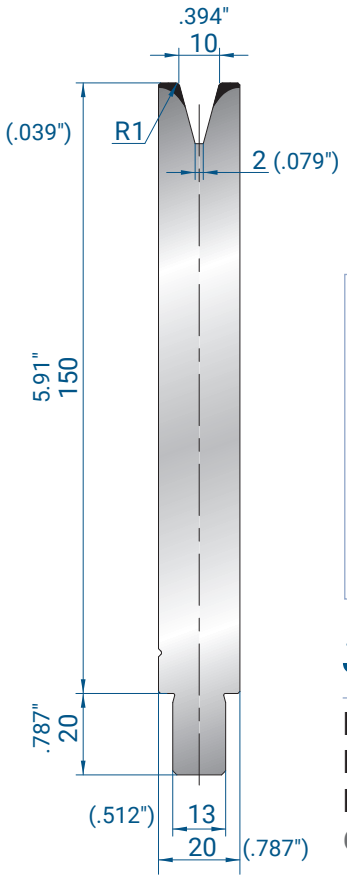

500 mm	12.4 kg	19.69"	27.3 lb
300 mm	7.4 kg	11.81"	16.3 lb
200 mm	5.0 kg	7.87"	11.0 lb
100 mm	2.5 kg	3.94"	5.5 lb
550 mm SECTIONED	13.6 kg	21.65" SECTIONED	30.0 lb
50 mm	1.2 kg	1.97"	2.6 lb
45 mm	1.1 kg	1.77"	2.4 lb
40 mm	1.0 kg	1.57"	2.2 lb
35 mm	0.9 kg	1.38"	2.0 lb
30 mm	0.7 kg	1.18"	1.5 lb
25 mm	0.6 kg	.98"	1.3 lb

3152


Mat = C45
Max T/m = 40
Max US t/ft = 13.4
α = 30°

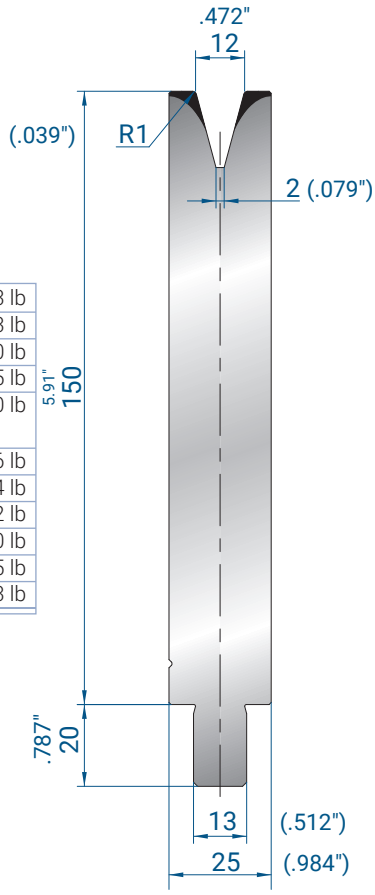

19.69"	33.5 lb		
11.81"	20.1 lb		
7.87"	13.4 lb		
3.94"	6.6 lb		
21.65" SECTIONED	36.8 lb		
1.97"	3.3 lb		
1.77"	3.1 lb		
1.57"	2.6 lb		
1.38"	2.4 lb		
1.18"	2.0 lb		
.98"	1.8 lb		
500 mm	15.2 kg		
300 mm	9.1 kg		
200 mm	6.1 kg		
100 mm	3.0 kg		
550 mm SECTIONED	16.7 kg		
50 mm	1.5 kg		
45 mm	1.4 kg		
40 mm	1.2 kg		
35 mm	1.1 kg		
30 mm	0.9 kg		
25 mm	0.8 kg		

3153


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 30°

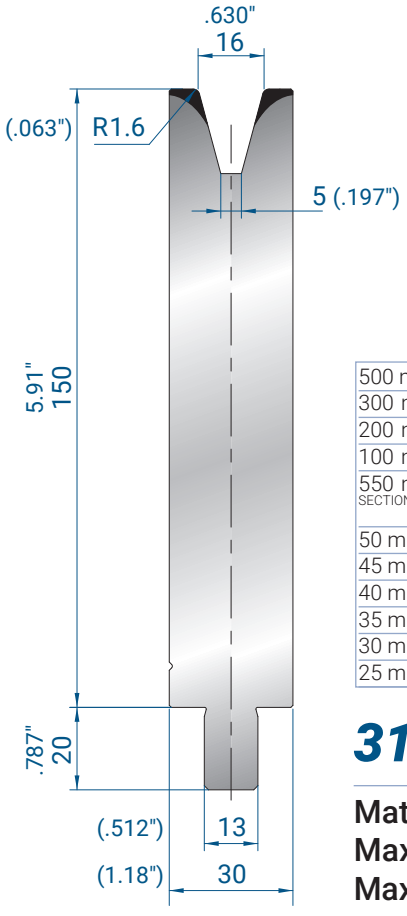

500 mm	17.8 kg	19.69"	39.2 lb
300 mm	10.7 kg	11.81"	23.6 lb
200 mm	7.1 kg	7.87"	15.7 lb
100 mm	3.6 kg	3.94"	7.9 lb
550 mm SECTIONED	19.6 kg	21.65" SECTIONED	43.2 lb
50 mm	1.8 kg	1.97"	4.0 lb
45 mm	1.6 kg	1.77"	3.5 lb
40 mm	1.4 kg	1.57"	3.1 lb
35 mm	1.2 kg	1.38"	2.6 lb
30 mm	1.1 kg	1.18"	2.4 lb
25 mm	0.9 kg	.98"	2.0 lb

3154


Mat = C45
Max T/m = 45
Max US t/ft = 15.1
α = 30°

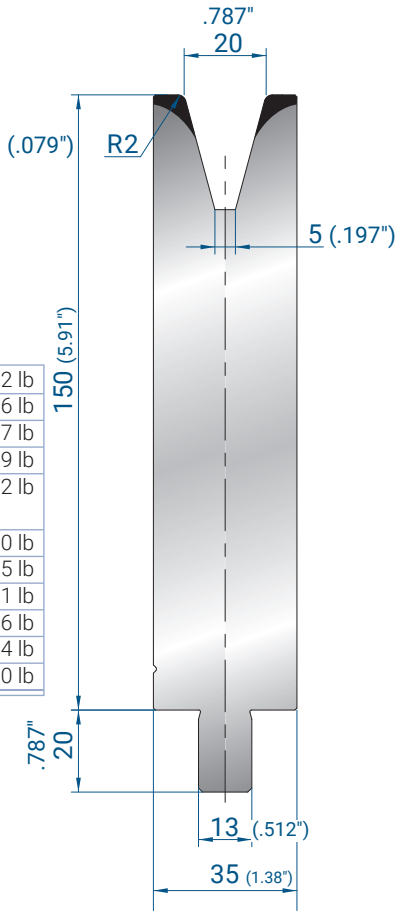

500 mm	20.2 kg	19.69"	44.5 lb
300 mm	12.1 kg	11.81"	26.7 lb
200 mm	8.1 kg	7.87"	17.9 lb
100 mm	4.0 kg	3.94"	8.8 lb
550 mm SECTIONED	22.2 kg	21.65" SECTIONED	48.9 lb
50 mm	2.0 kg	1.97"	4.4 lb
45 mm	1.8 kg	1.77"	4.0 lb
40 mm	1.6 kg	1.57"	3.5 lb
35 mm	1.4 kg	1.38"	3.1 lb
30 mm	1.2 kg	1.18"	2.6 lb
25 mm	1.0 kg	.98"	2.2 lb

3155

Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 30°

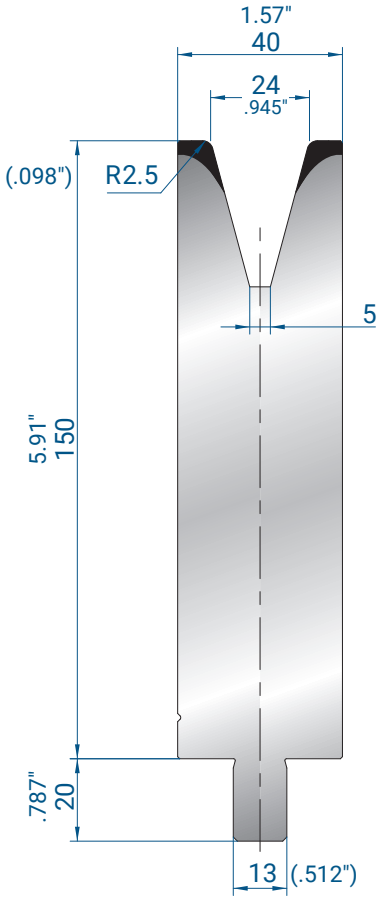

500 mm	22.5 kg	19.69"	49.6 lb
300 mm	13.5 kg	11.81"	29.8 lb
200 mm	9.0 kg	7.87"	19.8 lb
100 mm	4.5 kg	3.94"	9.9 lb
550 mm SECTIONED	24.7 kg	21.65" SECTIONED	54.5 lb
50 mm	2.2 kg	1.97"	4.9 lb
45 mm	2.0 kg	1.77"	4.4 lb
40 mm	1.8 kg	1.57"	4.0 lb
35 mm	1.6 kg	1.38"	3.5 lb
30 mm	1.3 kg	1.18"	2.9 lb
25 mm	1.1 kg	.98"	2.4 lb

3156

Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 30°







DIE DRILLING NOT INCLUDED; FOR A QUOTE, SEE CODE 8108.


500 mm	13.0 kg	19.69"	28.7 lb
300 mm	7.8 kg	11.81"	17.2 lb
200 mm	5.2 kg	7.87"	11.5 lb
100 mm	2.6 kg	3.94"	5.7 lb
550 mm SECTIONED	13.0 kg	21.65" SECTIONED	28.7 lb
50 mm	1.0 kg	1.97"	2.2 lb
45 mm	1.0 kg	1.77"	2.2 lb
40 mm	1.0 kg	1.57"	2.2 lb
35 mm	1.0 kg	1.38"	2.2 lb
30 mm	1.0 kg	1.18"	2.2 lb
25 mm	1.0 kg	.98"	2.2 lb


4330


Mat = C45
Max T/m = 40
Max US t/ft = 13.4
α = 30°

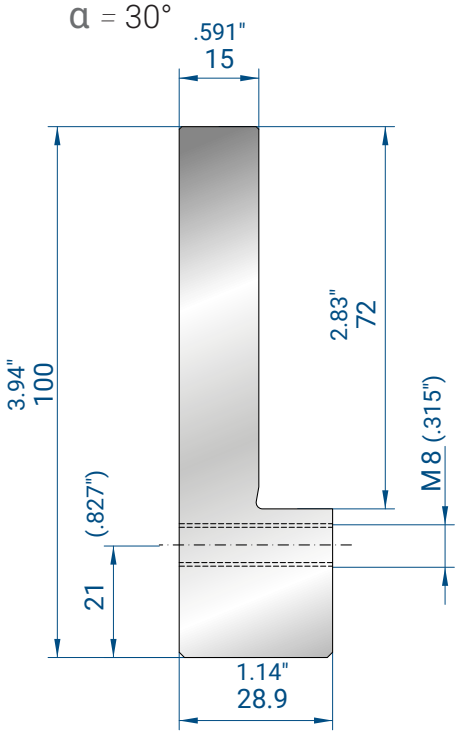

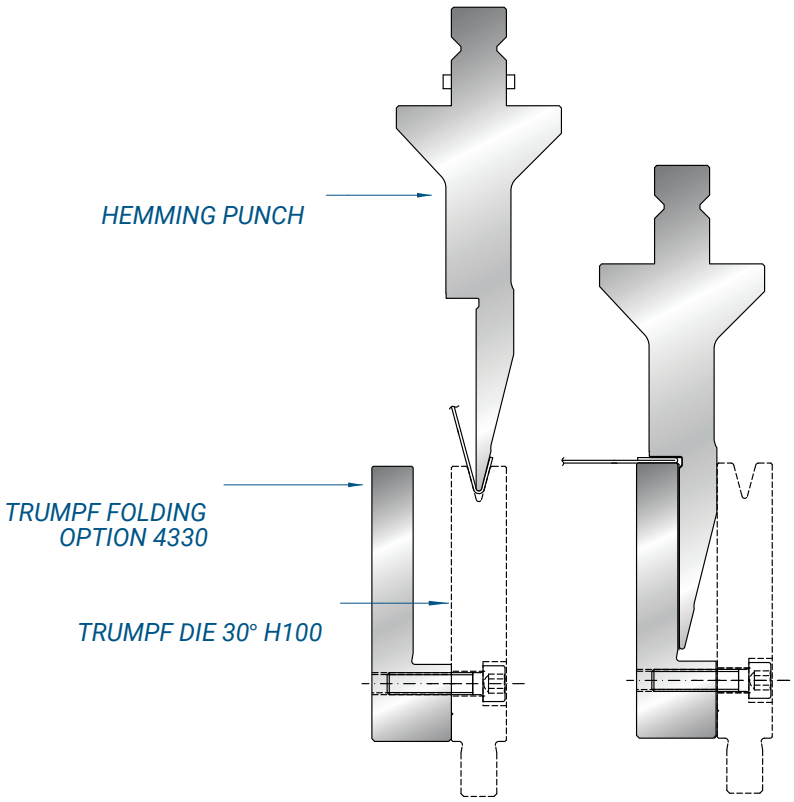

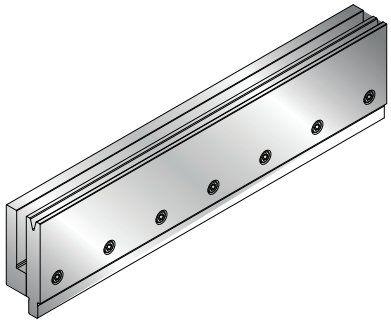

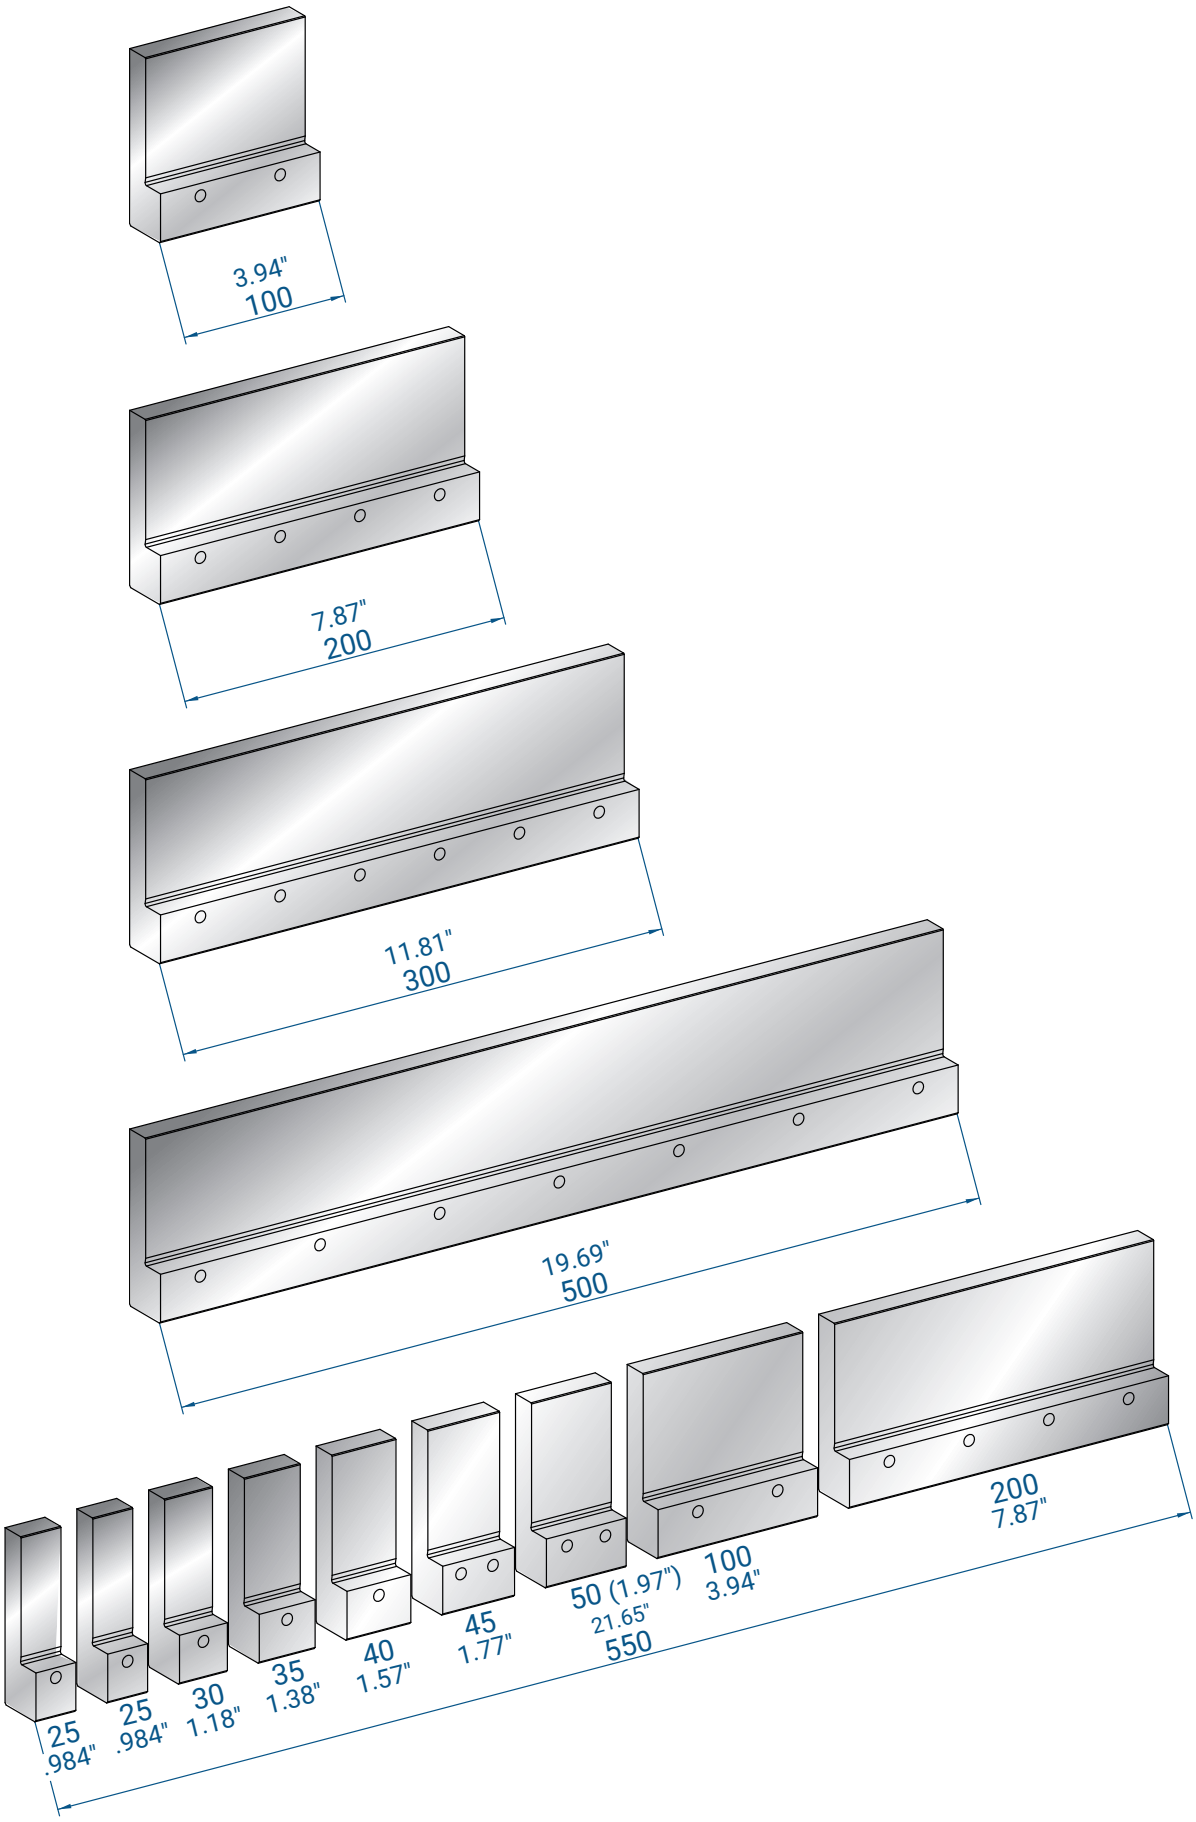
3.94"
100
7.87"
200
11.81"
300
19.69"
500
200
7.87"
100
3.94"
50 (1.97")
21.65"
550
45
1.77"
40
1.57"
35
1.38"
30
1.18"
25
.984"
25
.984"

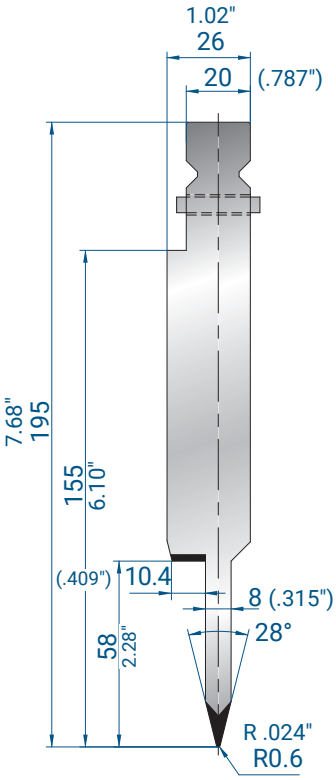


1249

500 mm	14.3 kg	19.69"	31.5 lb
550 mm SECTIONED	14.0 kg	21.65" SECTIONED	30.9 lb

Mat = C45
tempered
Max T/m = 80
Max US t/ft = 26.9

Thickness


Max 1.2 mm (.047")
Mild steel

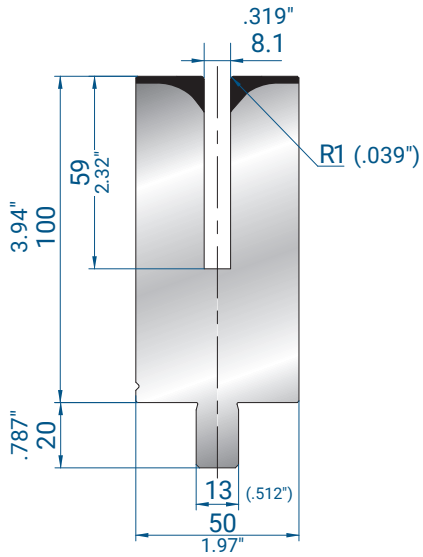

3157

500 mm	18.7 kg	19.69"	41.2 lb
550 mm SECTIONED	20.6 kg	21.65" SECTIONED	45.4 lb
100 mm	3.7 kg	3.94"	8.2 lb

Mat = C45
tempered
Max T/m = 50
Max US t/ft = 16.8

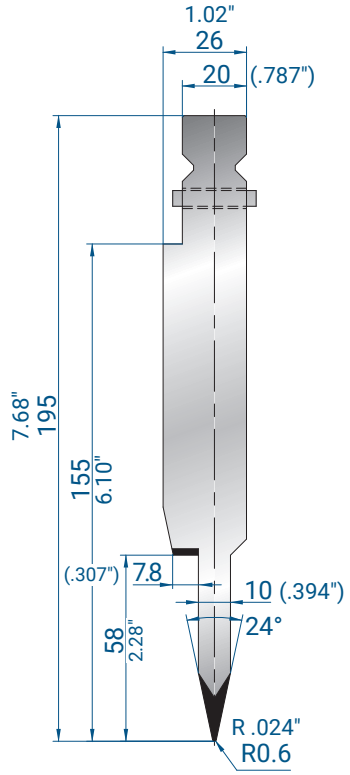


1250

500 mm	14.6 kg	19.69"	32.2 lb
550 mm SECTIONED	14.3 kg	21.65" SECTIONED	31.5 lb

Mat = C45
tempered
Max T/m = 50
Max US t/ft = 16.8

Thickness


Max 1.5 mm (.059")
Mild steel

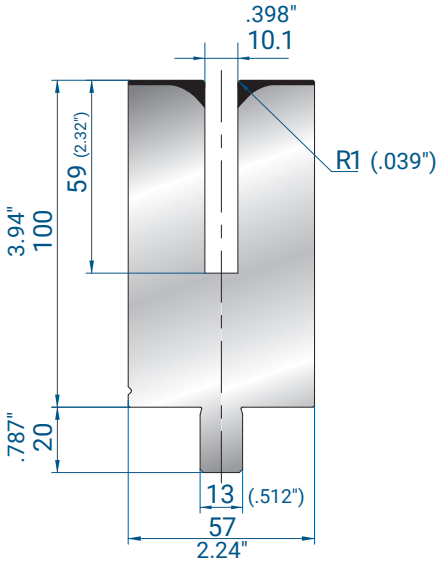

3174

500 mm	21.0 kg	19.69"	46.3 lb
550 mm SECTIONED	23.1 kg	21.65" SECTIONED	50.9 lb
100 mm	4.2 kg	3.94"	9.3 lb

Mat = C45
tempered
Max T/m = 50
Max US t/ft = 16.8

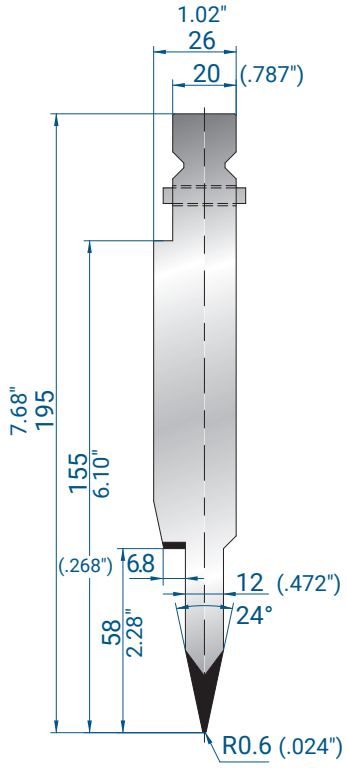


1251

Mat = C45
tempered
Max T/m = 50
Max US t/ft = 16.8

500 mm	14.9 kg	19.69"	32.8 lb
550 mm SECTIONED	14.6 kg	21.65" SECTIONED	32.2 lb

Thickness

Max 1.5 mm (.059")
Mild steel

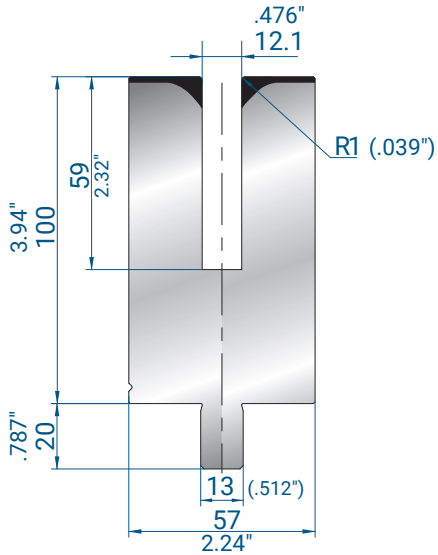

3175

Mat = C45
tempered
Max T/m = 50
Max US t/ft = 16.8

500 mm	20.5 kg	19.69"	45.2 lb
550 mm SECTIONED	22.6 kg	21.65" SECTIONED	49.8 lb
100 mm	4.1 kg	3.94"	9.0 lb

EUROSTAMP TOOLING
the Italian excellence

WILA STYLE


The upper and lower tools in this section fit these press brakes:


Trumpf, LVD, Darley, RPC, Safan and other press brakes with New Standard (NSCL) clamping.

With the matching upper and lower adapters, they also fit press brakes with other clamping systems.




SEE PAGE 158 FOR DIE SEGMENTATION DIAGRAM

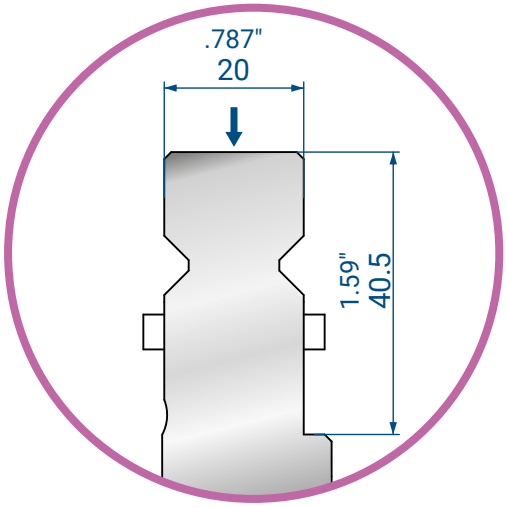

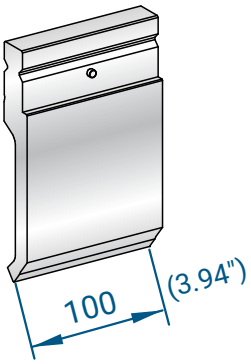





SAFETY BUTTON FITTED AS STANDARD ON ALL TOOLS WEIGHING UP TO 12.5 KG (27.6 LB)

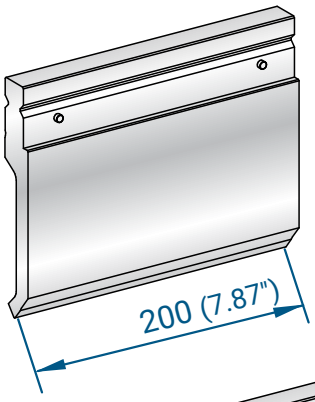


STANDARD LENGTHS

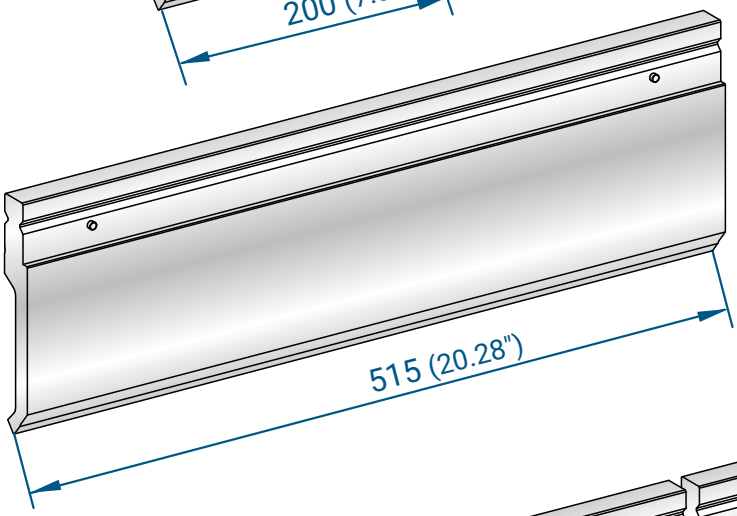

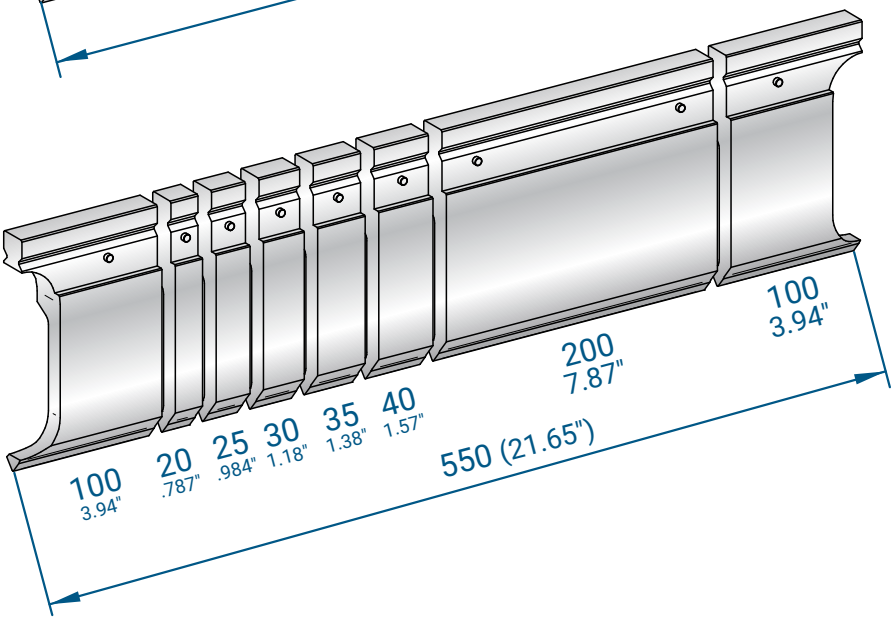


MILLED HORN

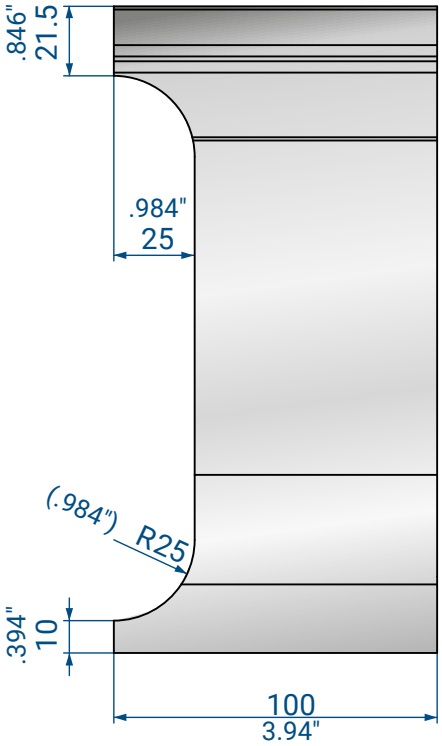

MODIFICATIONS ON REQUEST


SPECIAL HORNS

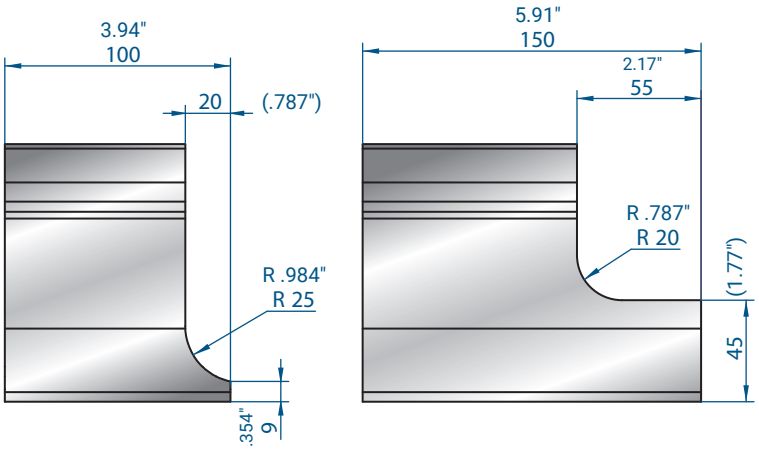


SPECIAL SEGMENTATION



RADIUS MODIFICATION

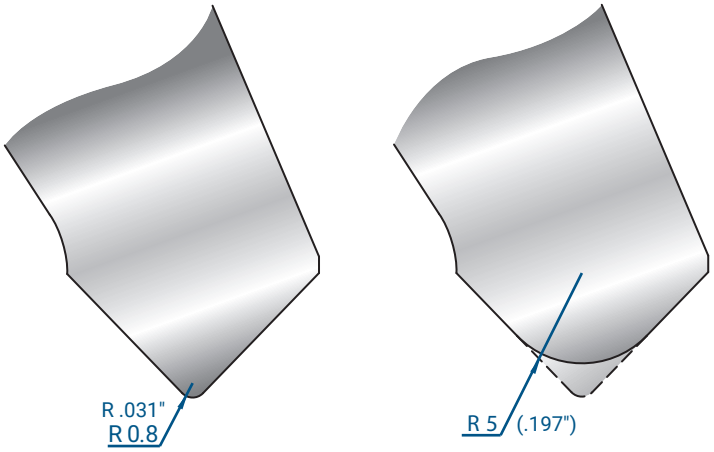

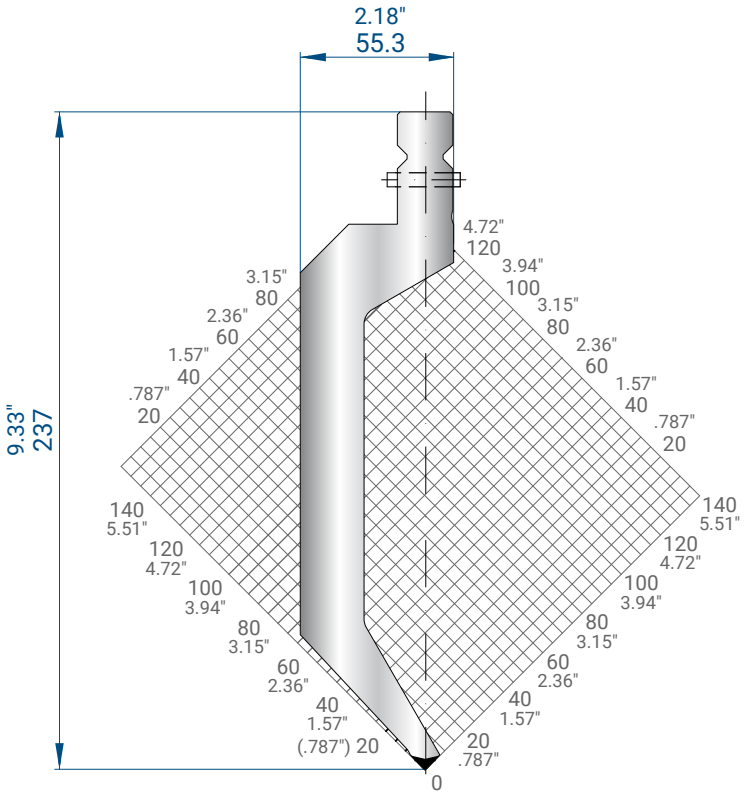


1324

Mat = 42 CrMo4
tempered
H = 237.00 (9.331")
Max T/m = 65
Max US t/ft = 21.8
α = 86°
R = 1 (.039")

515 mm	22.5 kg
200 mm	8.7 kg
100 mm	4.4 kg
550 mm SECTIONED	22.3 kg

20.28"	49.6 lb
7.87"	19.2 lb
3.94"	9.7 lb
21.65" SECTIONED	49.2 lb

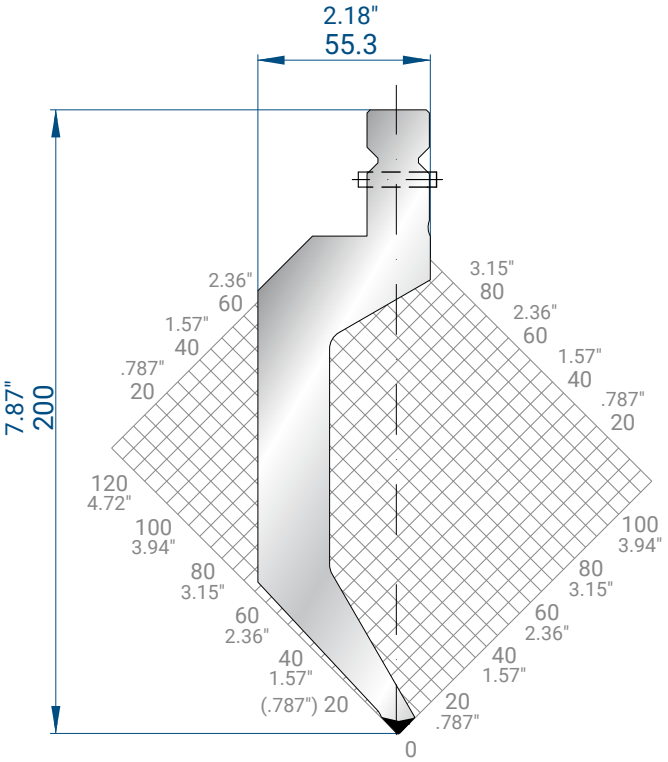


1323

Mat = 42 CrMo4
tempered
H = 200.00 (7.874")
Max T/m = 65
Max US t/ft = 21.8
α = 86°
R = 1 (.039")

515 mm	19.1 kg
200 mm	7.4 kg
100 mm	3.7 kg
550 mm SECTIONED	19.0 kg

20.28"	42.1 lb
7.87"	16.3 lb
3.94"	8.2 lb
21.65" SECTIONED	41.9 lb

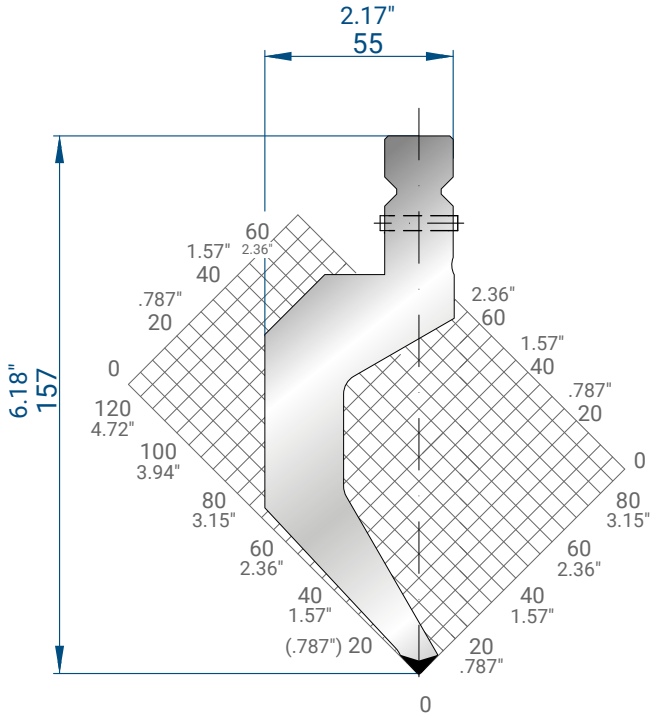



1328

Mat = 42 CrMo4
tempered
H = 157.00 (6.181")
Max T/m = 70
Max US t/ft = 23.5
α = 86°
R = 1 (.039")

515 mm	15.0 kg
200 mm	5.8 kg
100 mm	2.9 kg
550 mm SECTIONED	14.9 kg

20.28"	33.1 lb
7.87"	12.8 lb
3.94"	6.4 lb
21.65" SECTIONED	32.8 lb

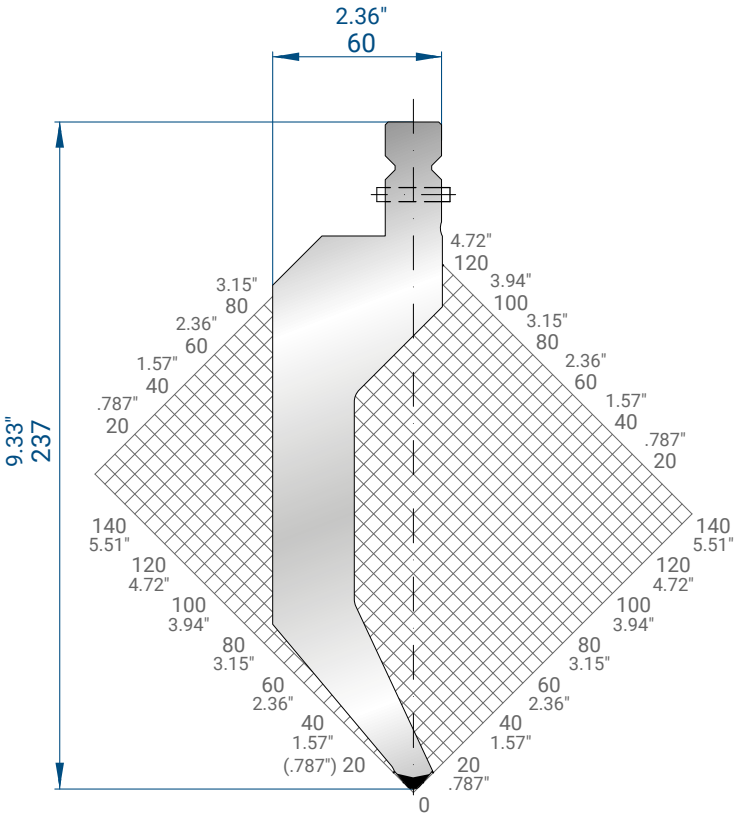

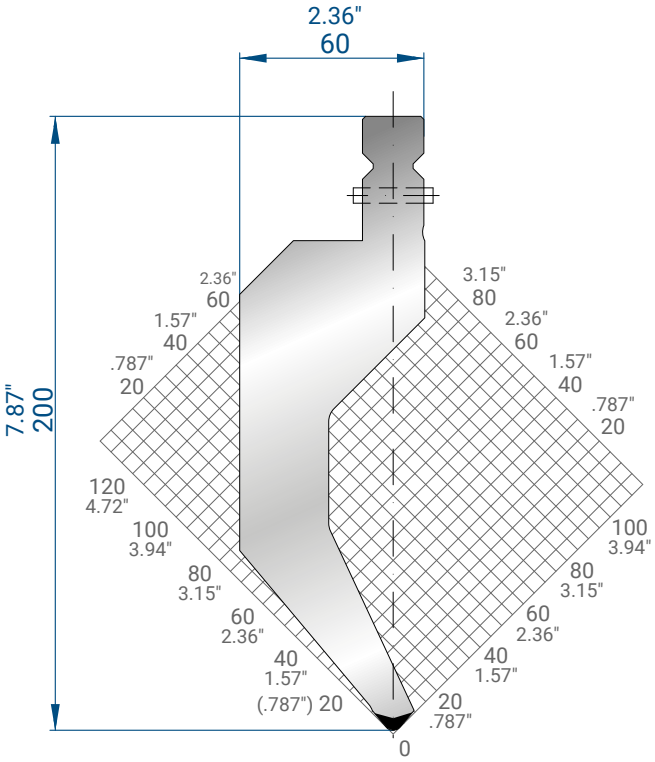

1333

Mat = 42 CrMo4
tempered
H = 237.00 (9.331")
Max T/m = 100
Max US t/ft = 33.6
α = 80°
R = 3 (.118")

515 mm	28.9 kg
200 mm	11.2 kg
100 mm	5.6 kg
550 mm SECTIONED	28.4 kg

20.28"	63.7 lb
7.87"	24.7 lb
3.94"	12.3 lb
21.65" SECTIONED	62.6 lb


1332

Mat = 42 CrMo4
tempered
H = 200.00 (7.874")
Max T/m = 100
Max US t/ft = 33.6
α = 80°
R = 3 (.118")

515 mm	24.6 kg
200 mm	9.6 kg
100 mm	4.8 kg
550 mm SECTIONED	24.1 kg

20.28"	54.2 lb
7.87"	21.2 lb
3.94"	10.6 lb
21.65" SECTIONED	53.1 lb




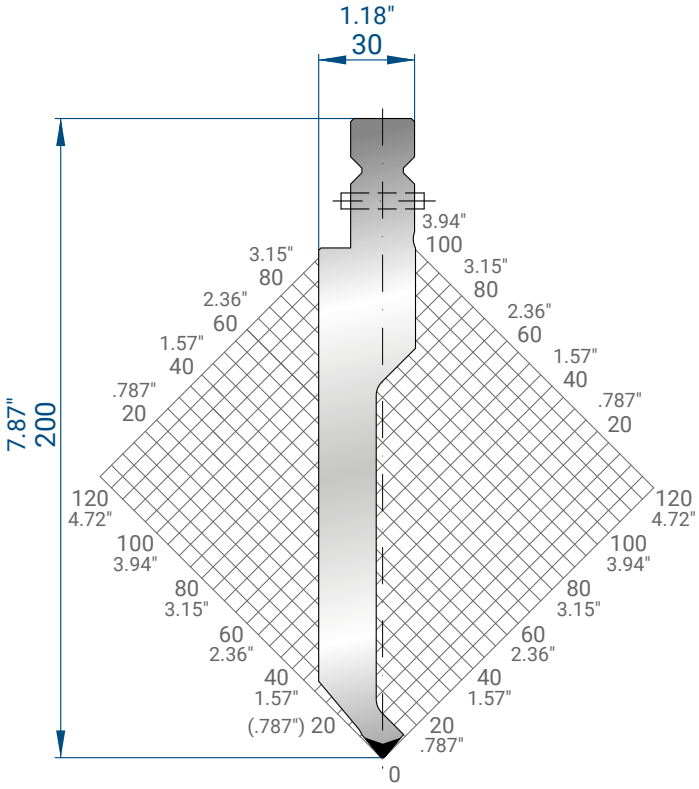

1330

515 mm	16.0 kg	20.28"	35.3 lb
200 mm	6.2 kg	7.87"	13.7 lb
100 mm	3.1 kg	3.94"	6.8 lb
550 mm SECTIONED	15.8 kg	21.65" SECTIONED	34.8 lb

Mat = 42 CrMo4
tempered
H = 200.00 (7.874")
Max T/m = 80
Max US t/ft = 26.9
α = 80°
R = 1 (.039")

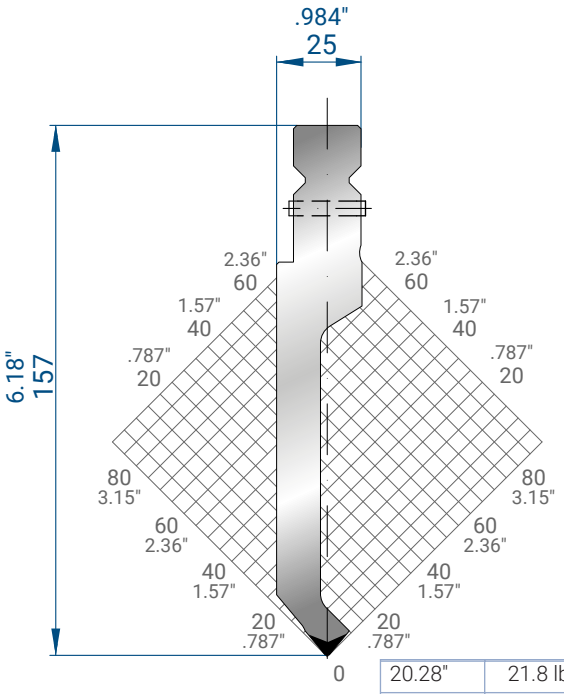


1329

515 mm	9.9 kg	20.28"	21.8 lb
200 mm	3.8 kg	7.87"	8.4 lb
100 mm	1.9 kg	3.94"	4.2 lb
550 mm SECTIONED	9.8 kg	21.65" SECTIONED	21.6 lb

Mat = 42 CrMo4
tempered
H = 157.00 (6.181")
Max T/m = 100
Max US t/ft = 33.6
α = 80°
R = 1 (.039")



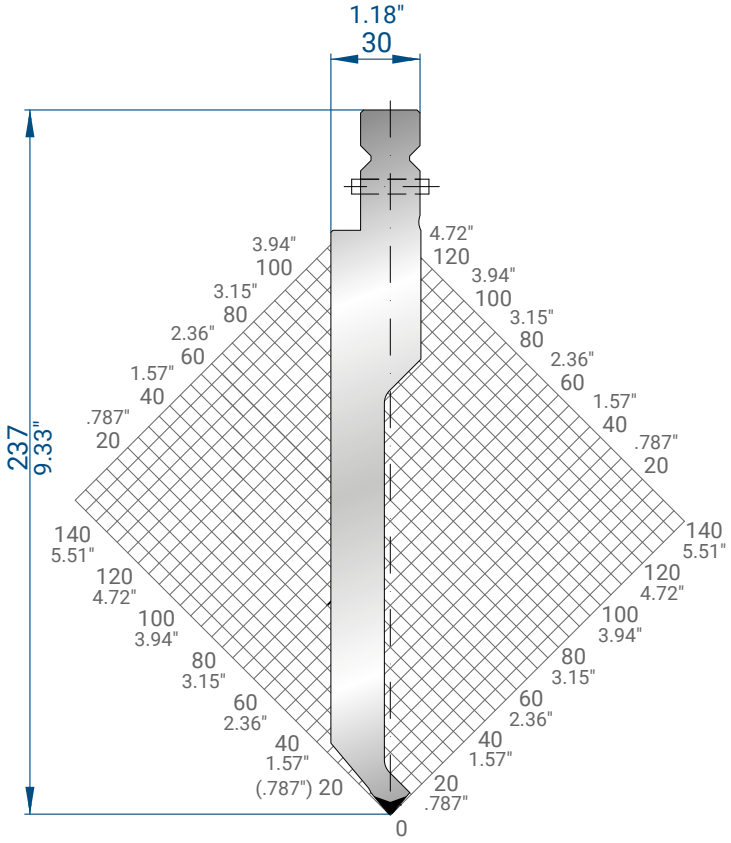


1331

515 mm	19.3 kg	20.28"	42.5 lb
200 mm	7.5 kg	7.87"	16.5 lb
100 mm	3.7 kg	3.94"	8.2 lb
550 mm SECTIONED	17.6 kg	21.65" SECTIONED	38.8 lb

Mat = 42 CrMo4
tempered
H = 237.00 (9.331")
Max T/m = 80
Max US t/ft = 26.9
α = 80°
R = 1 (.039")



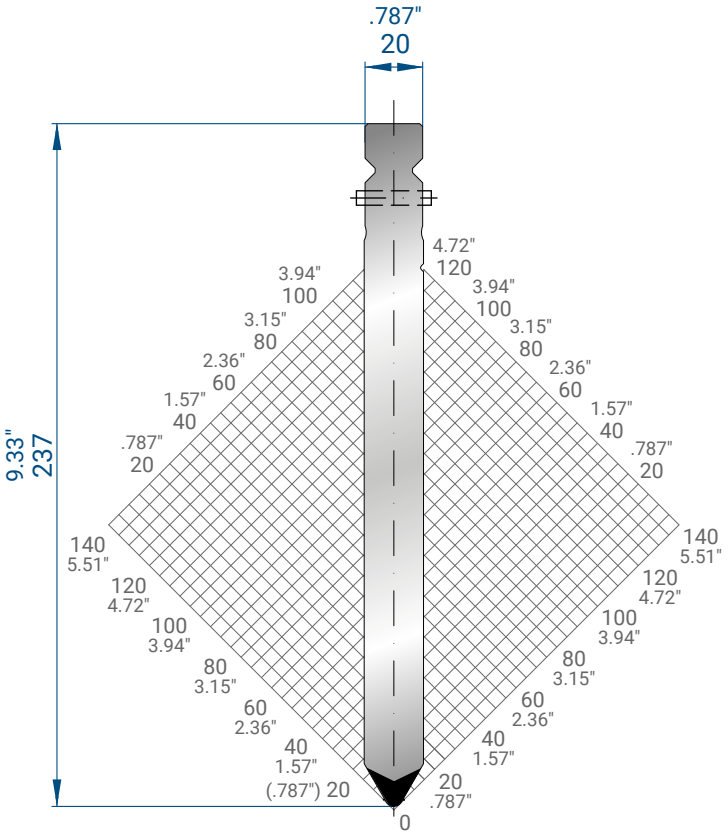


1336

Mat = 42 CrMo4
tempered
H = 237.00 (9.331")
Max T/m = 160
Max US t/ft = 53.8
α = 60°
R = 3 (.118")

515 mm	19.0 kg
200 mm	7.4 kg
100 mm	3.7 kg
550 mm SECTIONED	18.7 kg

20.28"	41.9 lb
7.87"	16.3 lb
3.94"	8.2 lb
21.65" SECTIONED	41.2 lb

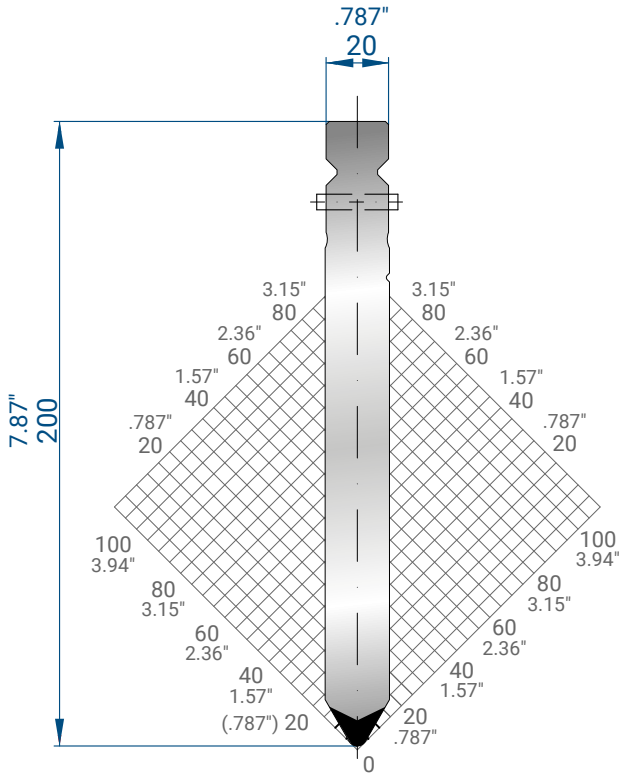


1335

Mat = 42 CrMo4
tempered
H = 200.00 (7.874")
Max T/m = 160
Max US t/ft = 53.8
α = 60°
R = 3 (.118")

515 mm	15.9 kg
200 mm	6.2 kg
100 mm	3.1 kg
550 mm SECTIONED	15.7 kg

20.28"	35.1 lb
7.87"	13.7 lb
3.94"	6.8 lb
21.65" SECTIONED	34.6 lb

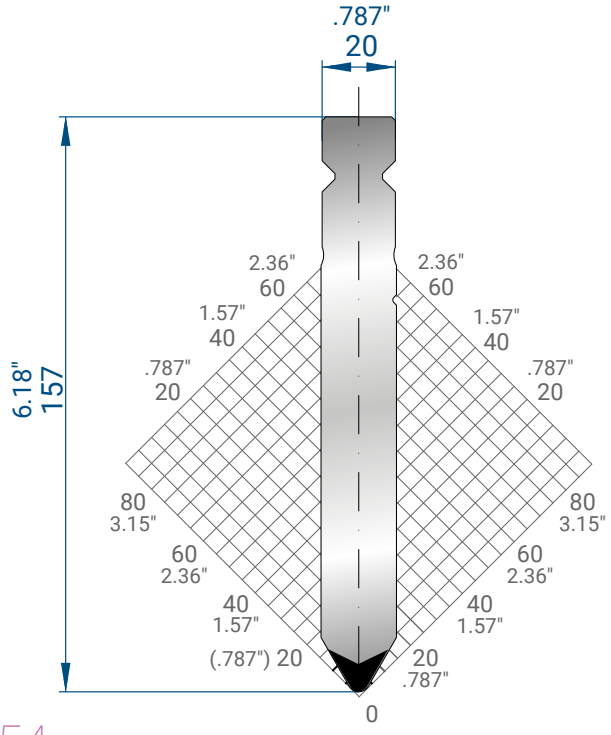


1334

Mat = 42 CrMo4
tempered
H = 157.00 (6.181")
Max T/m = 160
Max US t/ft = 53.8
α = 60°
R = 3 (.118")

515 mm	12.3 kg
200 mm	4.8 kg
100 mm	2.4 kg
550 mm SECTIONED	12.2 kg


20.28"	27.1 lb
7.87"	10.6 lb
3.94"	5.3 lb
21.65" SECTIONED	26.9 lb

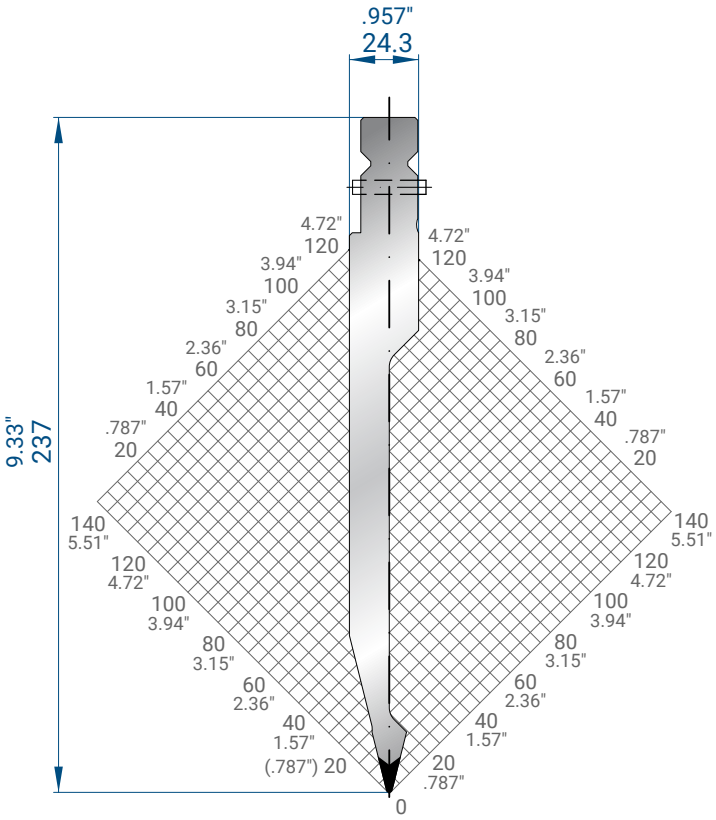

1327

Mat = 42 CrMo4
tempered
H = 237.00 (9.331")
Max T/m = 80
Max US t/ft = 26.9
α = 28°
R = 1 (.039")

515 mm 20.28"	14.7 kg 32.4 lb
200 mm 7.87"	5.7 kg 12.6 lb
100 mm 3.94"	2.9 kg 6.3 lb
550 mm 21.65" SECTIONED	14.7 kg 32.4 lb

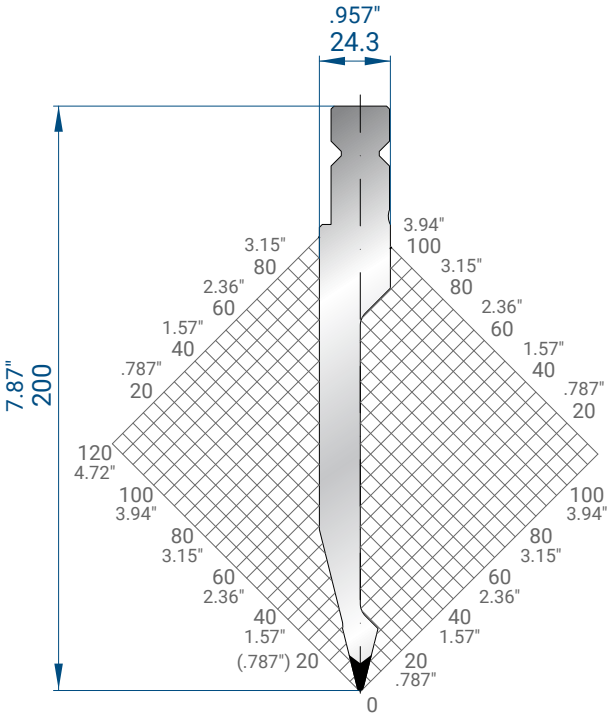


1326

Mat = 42 CrMo4
tempered
H = 200.00 (7.874")
Max T/m = 80
Max US t/ft = 26.9
α = 28°
R = 1 (.039")

515 mm 20.28"	12.1 kg 26.7 lb
200 mm 7.87"	4.8 kg 10.6 lb
100 mm 3.94"	2.4 kg 5.3 lb
550 mm 21.65" SECTIONED	12.1 kg 26.7 lb



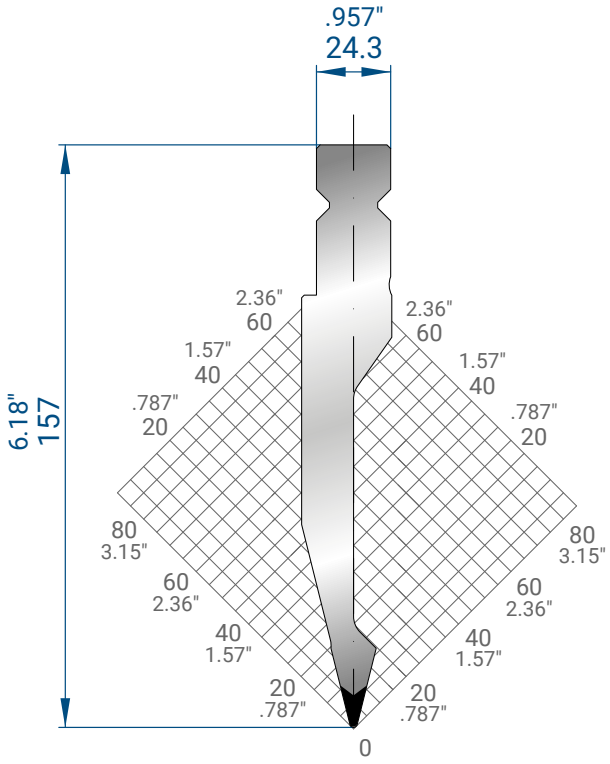


1337

Mat = 42 CrMo4
tempered
H = 157.00 (6.181")
Max T/m = 100
Max US t/ft = 33.6
α = 28°
R = 1 (.039")

515 mm	9.4 kg
200 mm	3.7 kg
100 mm	1.8 kg
550 mm SECTIONED	9.4 kg

20.28"	20.7 lb
7.87"	8.2 lb
3.94"	4.0 lb
21.65" SECTIONED	20.7 lb

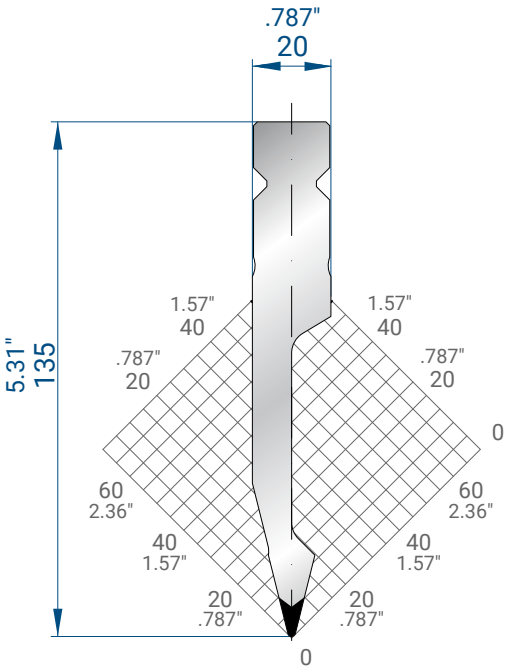

1325

Mat = 42 CrMo4
tempered
H = 135.00 (5.315")
Max T/m = 100
Max US t/ft = 33.6
α = 28°
R = 1 (.039")

515 mm	7.2 kg
200 mm	2.8 kg
100 mm	1.4 kg
550 mm SECTIONED	7.3 kg


20.28"	15.9 lb
7.87"	6.2 lb
3.94"	3.1 lb
21.65" SECTIONED	16.1 lb









SEE PAGE 148 FOR PUNCHES SEGMENTATION DIAGRAM

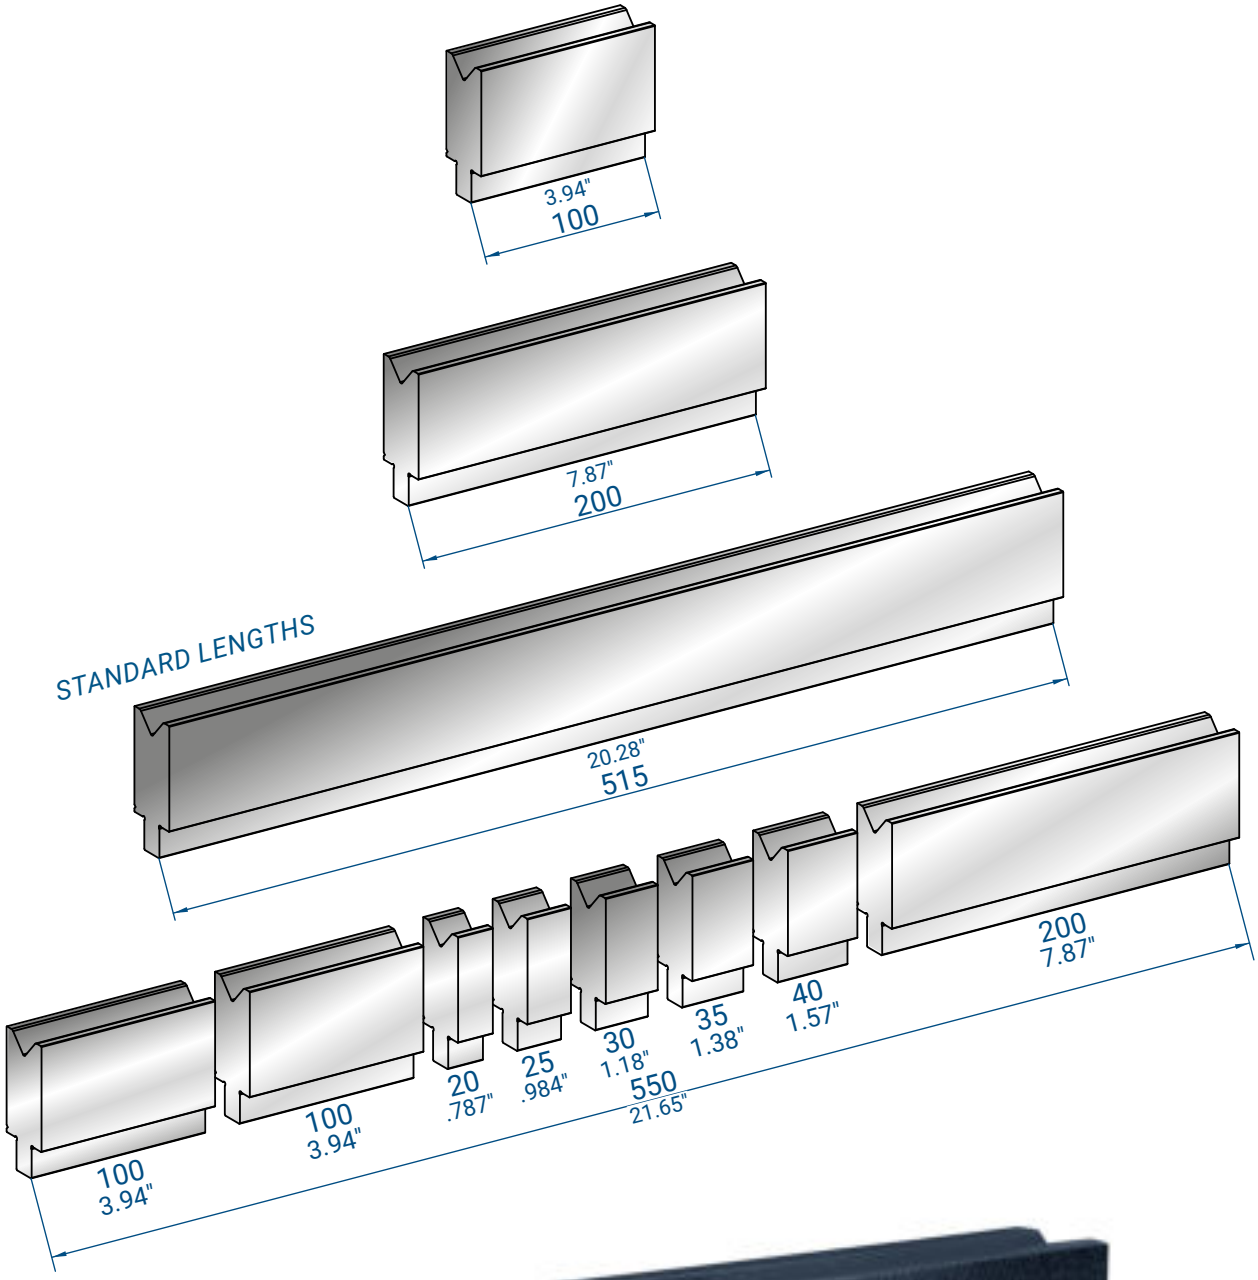




MODIFICATIONS ON REQUEST

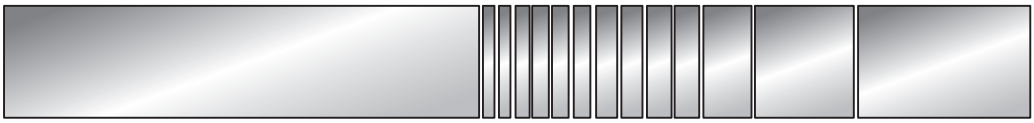


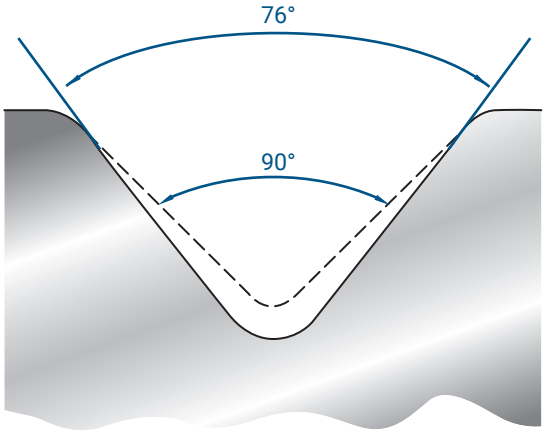


ANGLE MODIFICATION

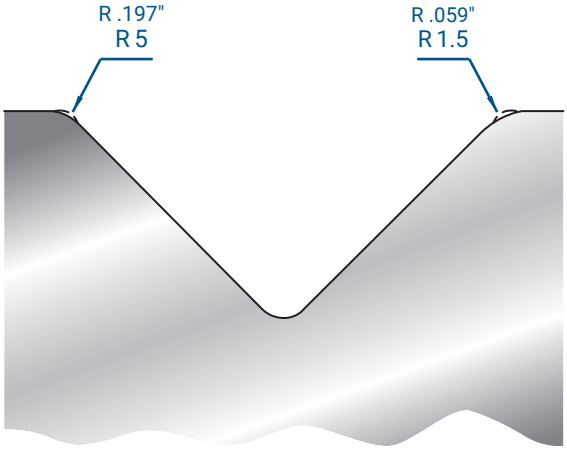

RADIUS MODIFICATION

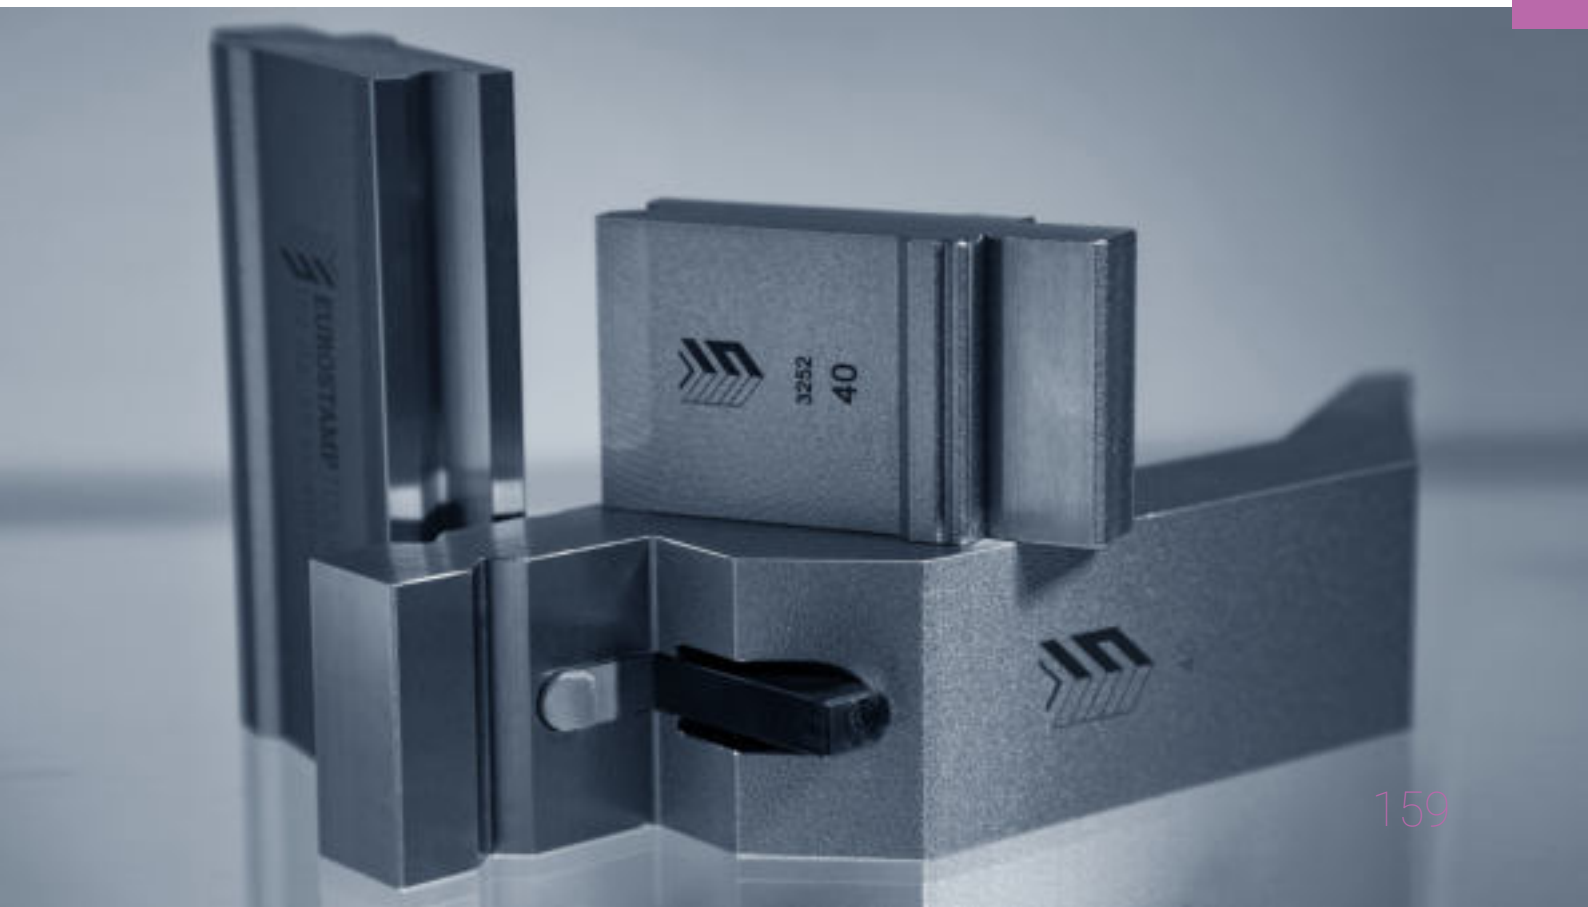


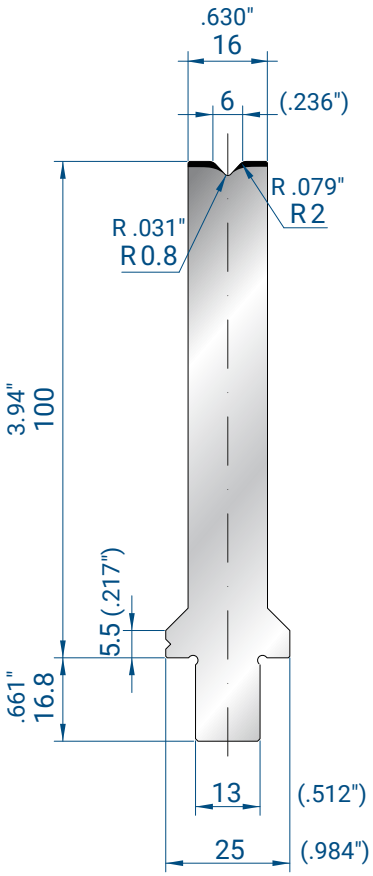

3270

Mat = 42 CrMo4
tempered
H = 100.00 (3.937")
Max T/m = 120
Max US t/ft = 40.3
α = 86°


515 mm 20.28"	7.6 kg 16.8 lb
200 mm 7.87"	3.0 kg 6.6 lb
100 mm 3.94"	1.5 kg 3.3 lb
550 mm 21.65" SECTIONED	8.1 kg 17.9 lb

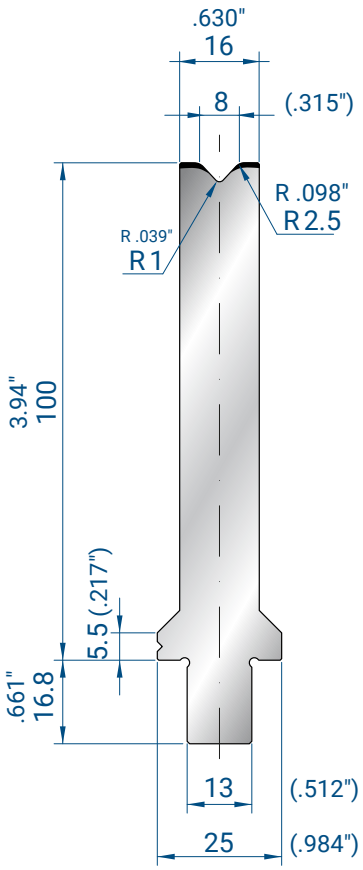

3271

Mat = 42 CrMo4
tempered
H = 100.00 (3.937")
Max T/m = 120
Max US t/ft = 40.3
α = 86°

515 mm 20.28"	7.6 kg 16.8 lb
200 mm 7.87"	3.0 kg 6.6 lb
100 mm 3.94"	1.5 kg 3.3 lb
550 mm 21.65" SECTIONED	8.1 kg 17.9 lb

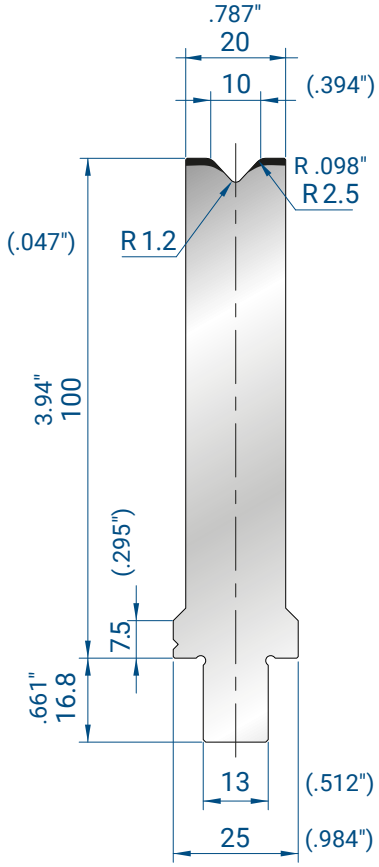


3272

Mat = 42 CrMo4
tempered
H = 100.00 (3.937")
Max T/m = 120
Max US t/ft = 40.3
α = 86°

515 mm 20.28"	7.6 kg 16.8 lb
200 mm 7.87"	3.0 kg 6.6 lb
100 mm 3.94"	1.5 kg 3.3 lb
550 mm 21.65" SECTIONED	8.1 kg 17.9 lb



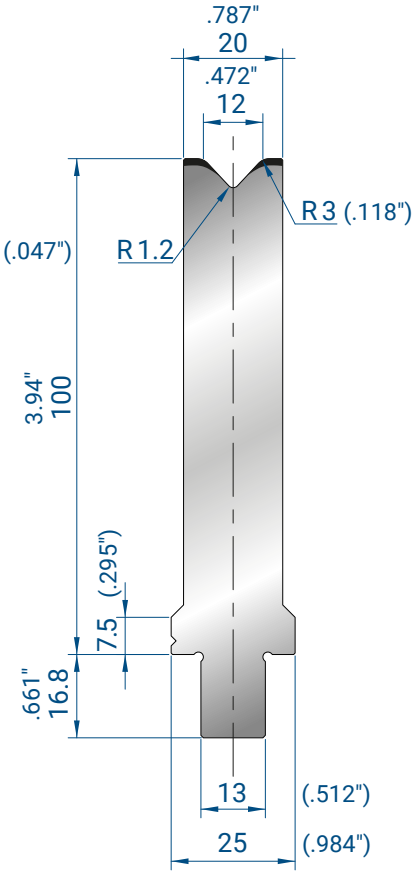


3273

Mat = 42 CrMo4
tempered
H = 100.00 (3.937")
Max T/m = 120
Max US t/ft = 40.3
α = 86°

515 mm	9.0 kg
200 mm	3.6 kg
100 mm	1.8 kg
550 mm SECTIONED	9.6 kg

20.28"	19.8 lb
7.87"	7.9 lb
3.94"	4.0 lb
21.65" SECTIONED	21.2 lb

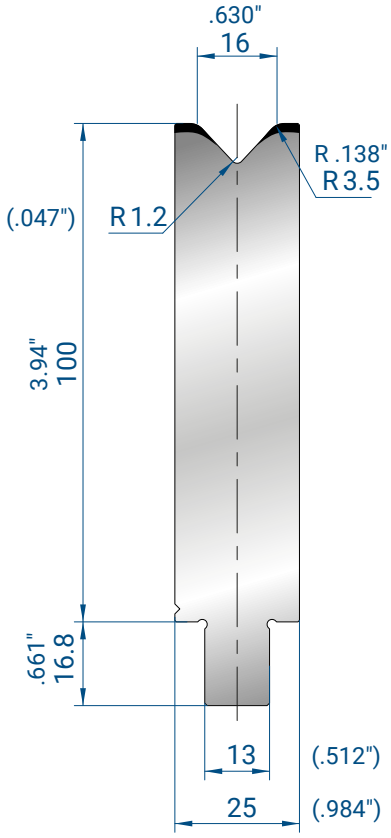


3274

Mat = 42 CrMo4
tempered
H = 100.00 (3.937")
Max T/m = 120
Max US t/ft = 40.3
α = 86°

515 mm	10.7 kg
200 mm	4.2 kg
100 mm	2.1 kg
550 mm SECTIONED	11.4 kg

20.28"	23.6 lb
7.87"	9.3 lb
3.94"	4.6 lb
21.65" SECTIONED	25.1 lb

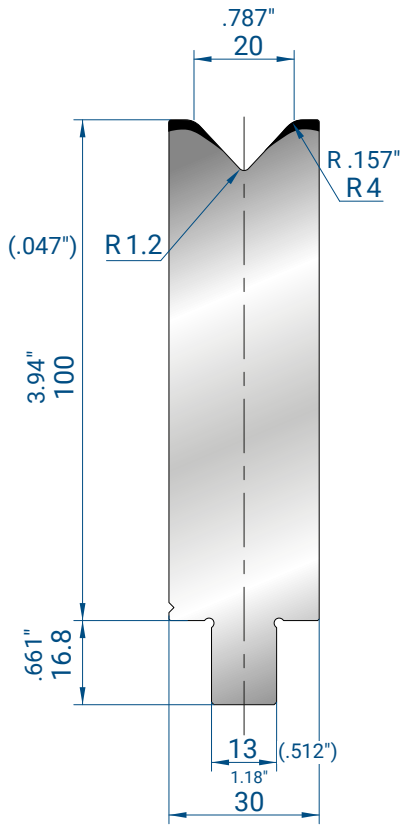


3275


Mat = 42 CrMo4
tempered
H = 100.00 (3.937")
Max T/m = 120
Max US t/ft = 40.3
α = 86°


515 mm	12.6 kg
200 mm	4.8 kg
100 mm	2.4 kg
550 mm SECTIONED	13.4 kg

20.28"	27.8 lb
7.87"	10.6 lb
3.94"	5.3 lb
21.65" SECTIONED	29.5 lb



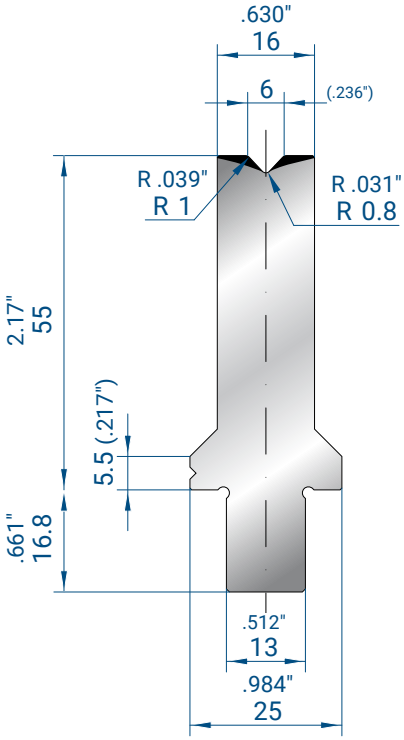

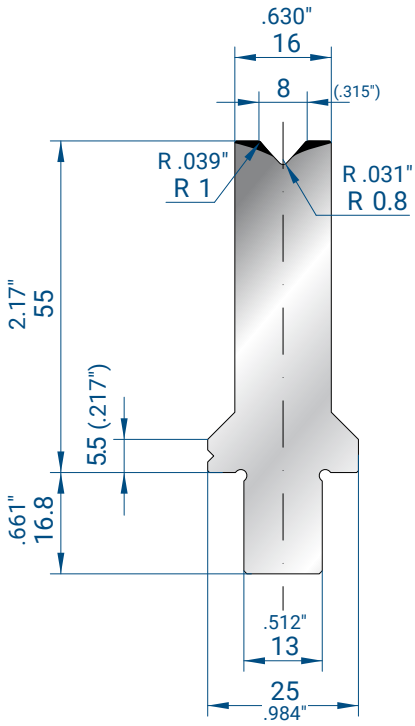

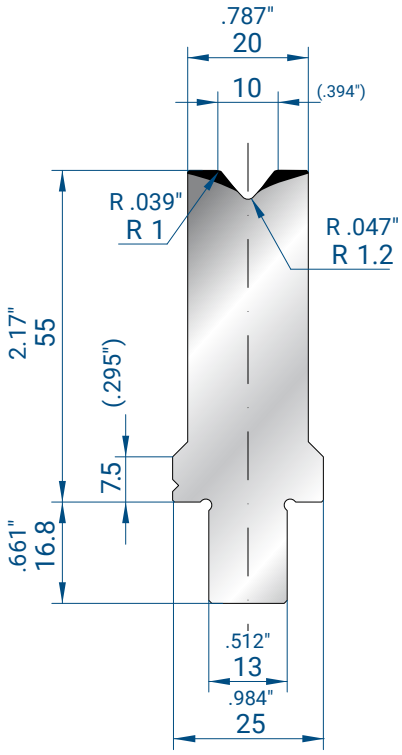

3250

Mat = 42 CrMo4
tempered
H = 55.00 (2.165")
Max T/m = 120
Max US t/ft = 40.3
α = 86°

515 mm 20.28"	4.7 kg 10.4 lb
200 mm 7.87"	1.8 kg 4.0 lb
100 mm 3.94"	0.9 kg 2.0 lb
550 mm 21.65" SECTIONED	5.0 kg 11.0 lb

3251

Mat = 42 CrMo4
tempered
H = 55.00 (2.165")
Max T/m = 120
Max US t/ft = 40.3
α = 86°


515 mm 20.28"	4.6 kg 10.1 lb
200 mm 7.87"	1.8 kg 4.0 lb
100 mm 3.94"	0.9 kg 2.0 lb
550 mm 21.65" SECTIONED	4.9 kg 10.8 lb


3252


Mat = 42 CrMo4
tempered
H = 55.00 (2.165")
Max T/m = 120
Max US t/ft = 40.3
α = 86°

515 mm 20.28"	5.4 kg 11.9 lb
200 mm 7.87"	2.0 kg 4.4 lb
100 mm 3.94"	1.0 kg 2.2 lb
550 mm 21.65" SECTIONED	5.7 kg 12.6 lb



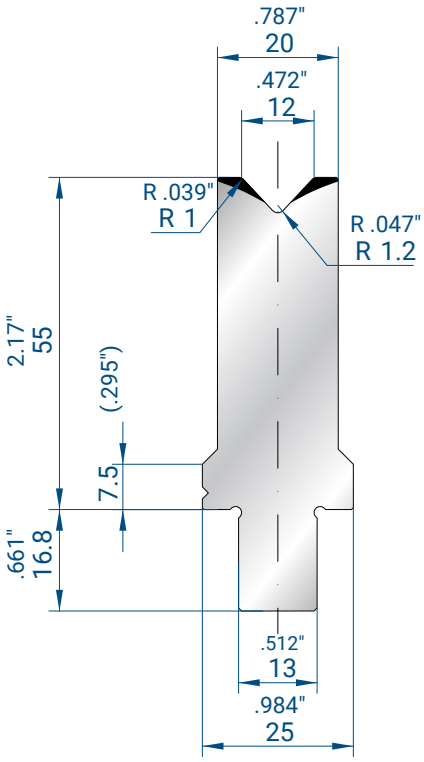

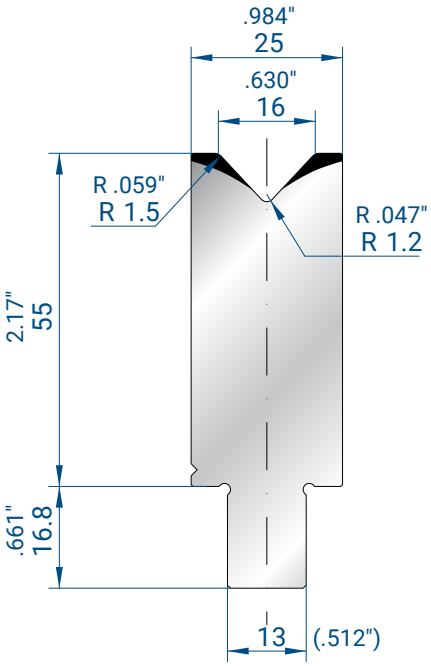

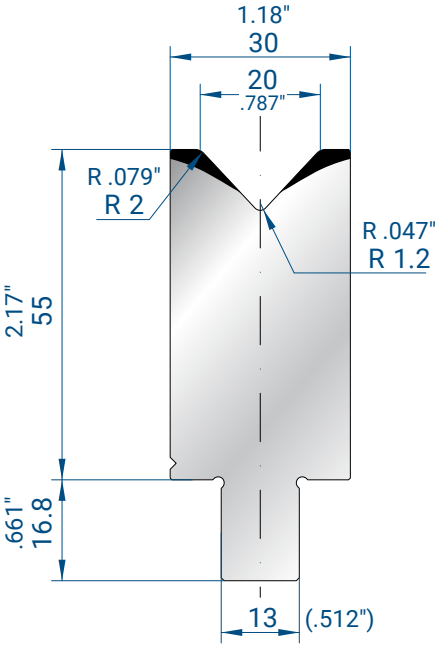

3253

Mat = 42 CrMo4
tempered
H = 55.00 (2.165")
Max T/m = 120
Max US t/ft = 40.3
α = 86°

515 mm 20.28"	5.3 kg 11.7 lb
200 mm 7.87"	2.0 kg 4.4 lb
100 mm 3.94"	1.0 kg 2.2 lb
550 mm 21.65" SECTIONED	5.7 kg 12.6 lb

3254

Mat = 42 CrMo4
tempered
H = 55.00 (2.165")
Max T/m = 120
Max US t/ft = 40.3
α = 86°


515 mm 20.28"	6.1 kg 13.4 lb
200 mm 7.87"	2.4 kg 5.3 lb
100 mm 3.94"	1.2 kg 2.6 lb
550 mm 21.65" SECTIONED	6.6 kg 14.6 lb

3255

Mat = 42 CrMo4
tempered
H = 55.00 (2.165")
Max T/m = 120
Max US t/ft = 40.3
α = 86°

515 mm 20.28"	7.1 kg 15.7 lb
200 mm 7.87"	2.8 kg 6.1 lb
100 mm 3.94"	1.4 kg 3.0 lb
550 mm 21.65" SECTIONED	7.7 kg 17.0 lb



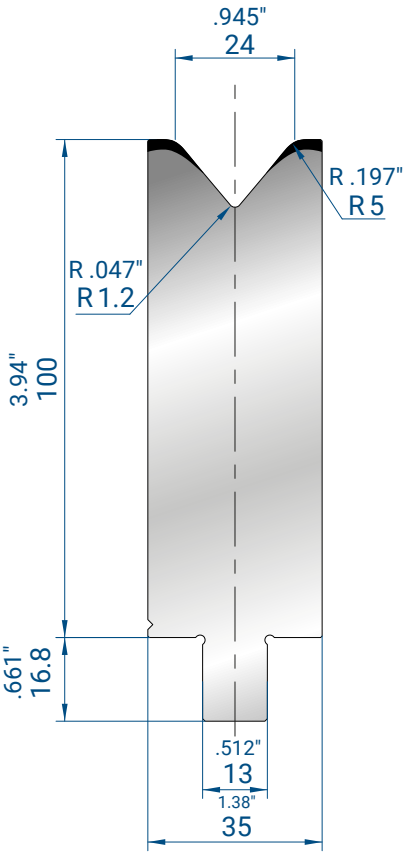


3276

Mat = 42 CrMo4
tempered
H = 100.00 (3.937")
Max T/m = 125
Max US t/ft = 42.0
α = 80°

515 mm	14.3 kg
200 mm	5.6 kg
100 mm	2.8 kg
550 mm SECTIONED	15.3 kg

20.28"	31.5 lb
7.87"	12.3 lb
3.94"	6.2 lb
21.65" SECTIONED	33.7 lb



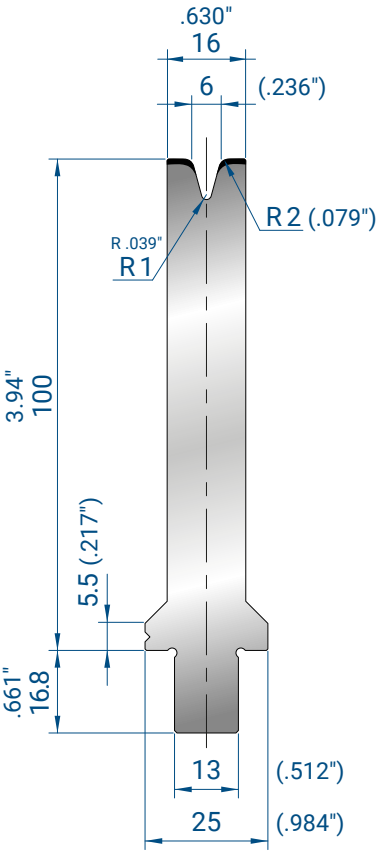


3280

Mat = 42 CrMo4
tempered
H = 100.00 (3.937")
Max T/m = 40
Max US t/ft = 13.4
α = 30°

515 mm	7.5 kg
200 mm	2.9 kg
100 mm	1.5 kg
550 mm SECTIONED	8.0 kg

20.28"	16.5 lb
7.87"	6.4 lb
3.94"	3.3 lb
21.65" SECTIONED	17.6 lb

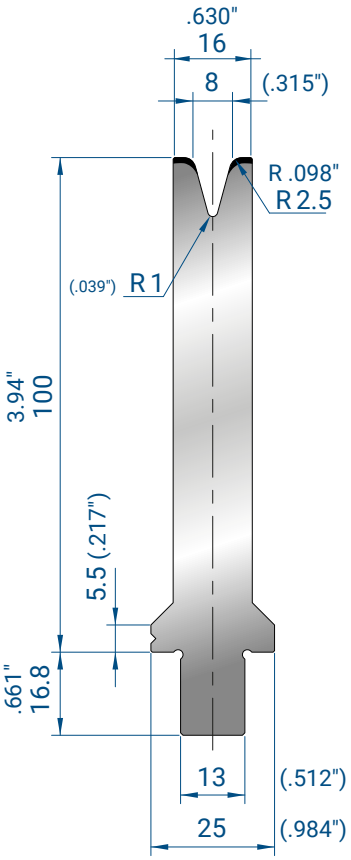


3281

Mat = 42 CrMo4
tempered
H = 100.00 (3.937")
Max T/m = 35
Max US t/ft = 11.8
α = 30°

515 mm	7.4 kg
200 mm	2.8 kg
100 mm	1.4 kg
550 mm SECTIONED	7.9 kg

20.28"	16.3 lb
7.87"	6.2 lb
3.94"	3.1 lb
21.65" SECTIONED	17.4 lb

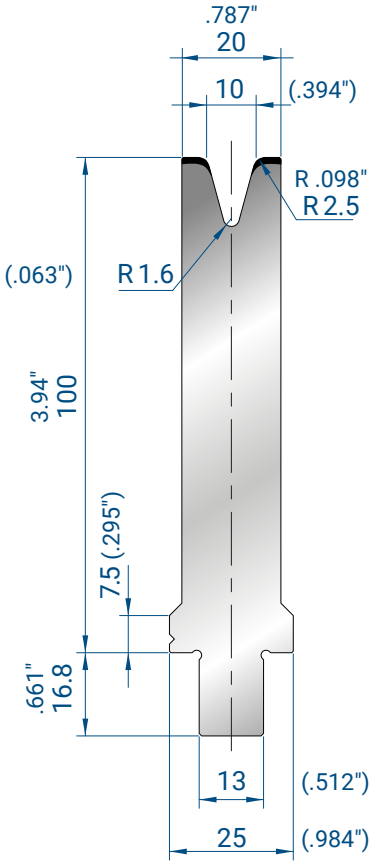


3282

Mat = 42 CrMo4
tempered
H = 100.00 (3.937")
Max T/m = 55
Max US t/ft = 18.5
α = 30°

515 mm	8.8 kg
200 mm	3.4 kg
100 mm	1.7 kg
550 mm SECTIONED	9.4 kg


20.28"	19.4 lb
7.87"	7.5 lb
3.94"	3.7 lb
21.65" SECTIONED	20.7 lb

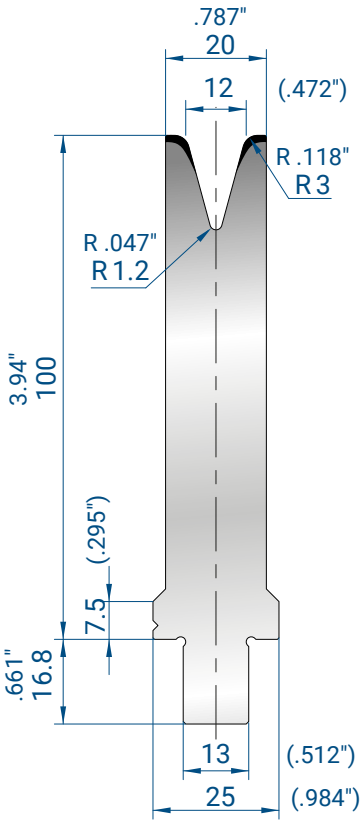

3283

Mat = 42 CrMo4
tempered
H = 100.00 (3.937")
Max T/m = 40
Max US t/ft = 13.4
α = 30°


20.28"	19.0 lb	515 mm	8.6 kg
7.87"	7.3 lb	200 mm	3.3 kg
3.94"	3.7 lb	100 mm	1.7 kg
21.65" SECTIONED	20.3 lb	550 mm SECTIONED	9.2 kg

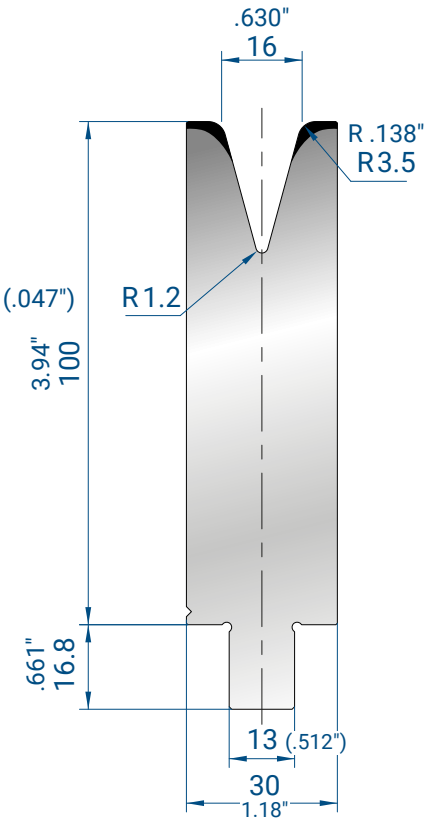


3284

Mat = 42 CrMo4
tempered
H = 100.00 (3.937")
Max T/m = 60
Max US t/ft = 20.2
α = 30°

20.28"	26.5 lb	515 mm	12.0 kg
7.87"	10.4 lb	200 mm	4.7 kg
3.94"	5.1 lb	100 mm	2.3 kg
21.65" SECTIONED	28.4 lb	550 mm SECTIONED	12.9 kg

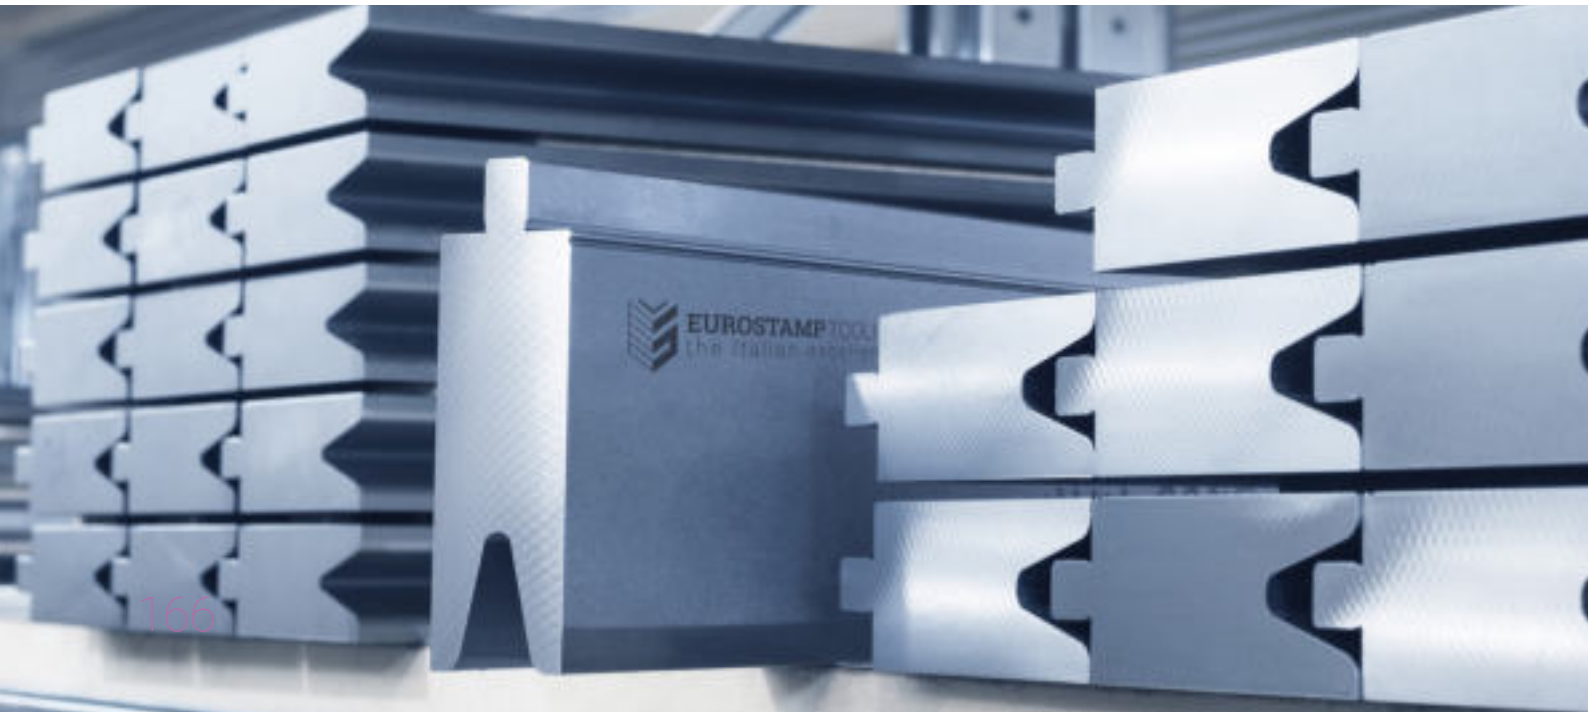


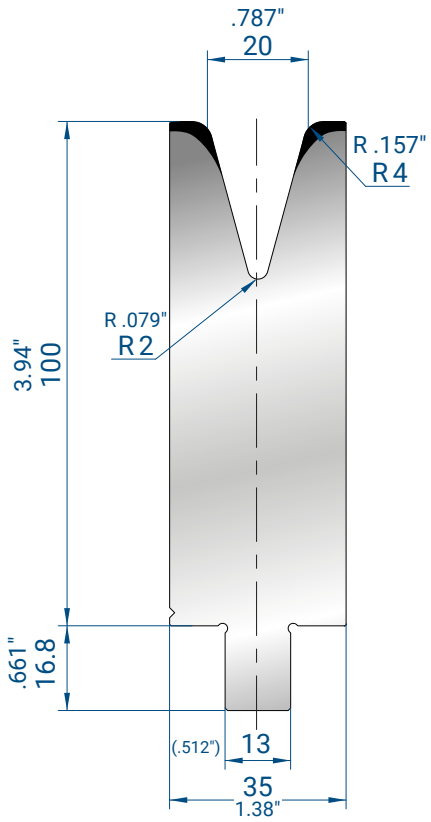

3285

Mat = 42 CrMo4
tempered
H = 100.00 (3.937")
Max T/m = 55
Max US t/ft = 18.5
α = 30°

20.28"	30.0 lb	515 mm	13.6 kg
7.87"	11.7 lb	200 mm	5.3 kg
3.94"	5.7 lb	100 mm	2.6 kg
21.65" SECTIONED	32.0 lb	550 mm SECTIONED	14.5 kg

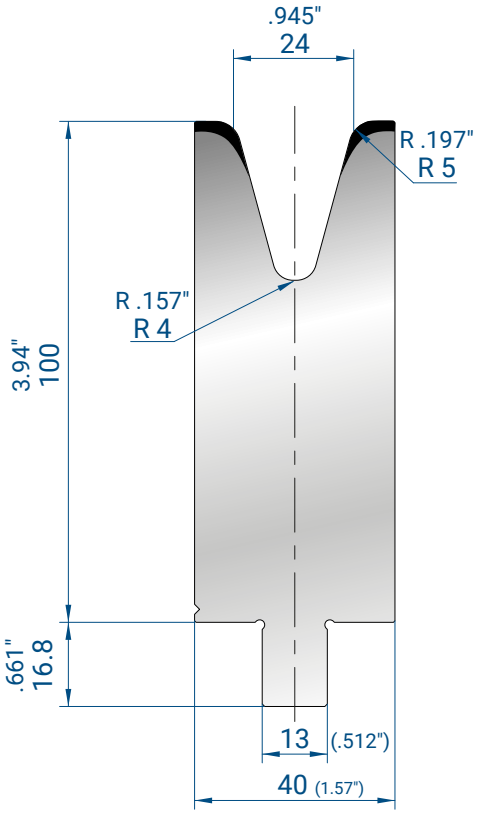



3286


Mat = 42 CrMo4
tempered
H = 100.00 (3.937")
Max T/m = 45
Max US t/ft = 15.1
α = 30°

20.28"	33.3 lb	515 mm	15.1 kg
7.87"	12.8 lb	200 mm	5.8 kg
3.94"	6.4 lb	100 mm	2.9 kg
21.65" SECTIONED	35.5 lb	550 mm SECTIONED	16.1 kg



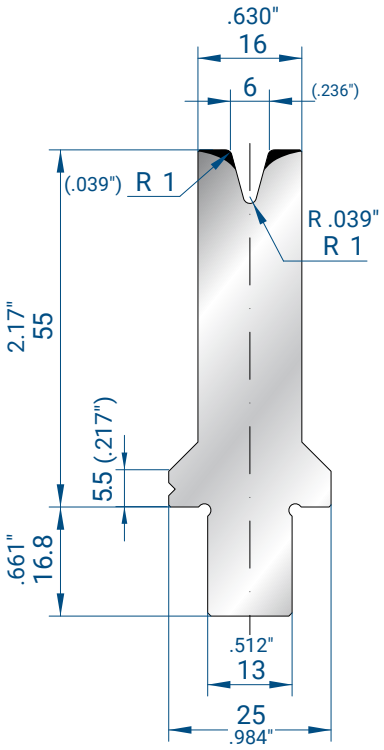

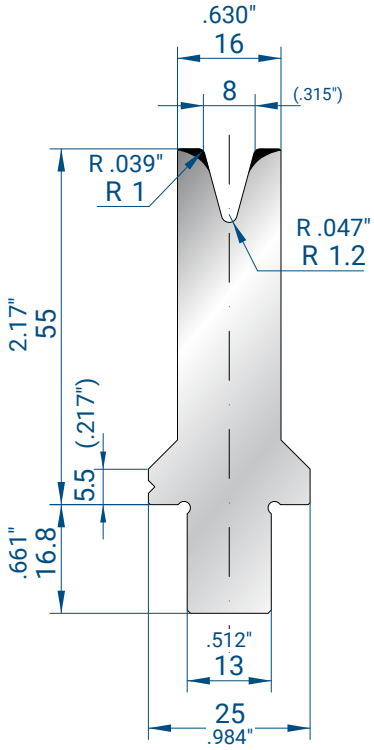

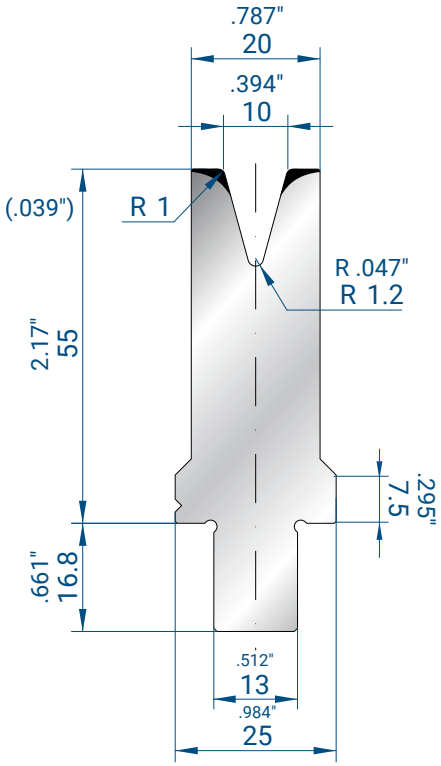

3260

Mat = 42 CrMo4
tempered
H = 55.00 (2.165")
Max T/m = 40
Max US t/ft = 13.4
α = 30°

515 mm 20.28"	4.6 kg 10.1 lb
200 mm 7.87"	1.8 kg 4.0 lb
100 mm 3.94"	0.9 kg 2.0 lb
550 mm 21.65" SECTIONED	4.9 kg 10.8 lb

3261

Mat = 42 CrMo4
tempered
H = 55.00 (2.165")
Max T/m = 35
Max US t/ft = 11.8
α = 30°


515 mm 20.28"	4.5 kg 9.9 lb
200 mm 7.87"	1.8 kg 4.0 lb
100 mm 3.94"	0.9 kg 2.0 lb
550 mm 21.65" SECTIONED	4.8 kg 10.6 lb


3262


Mat = 42 CrMo4
tempered
H = 55.00 (2.165")
Max T/m = 55
Max US t/ft = 18.5
α = 30°

515 mm 20.28"	5.1 kg 11.2 lb
200 mm 7.87"	2.0 kg 4.4 lb
100 mm 3.94"	1.0 kg 2.2 lb
550 mm 21.65" SECTIONED	5.5 kg 12.1 lb



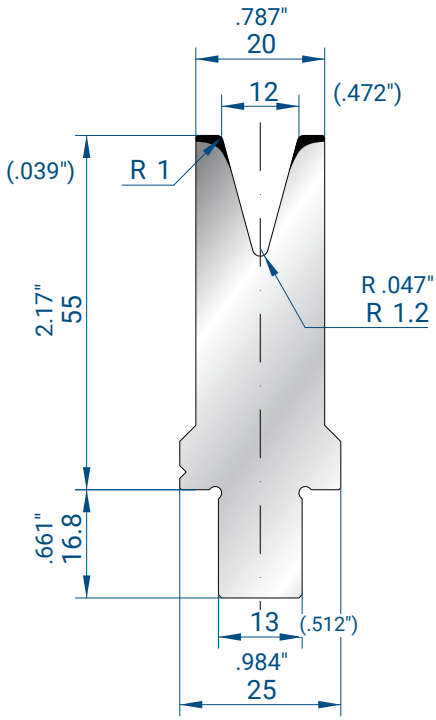

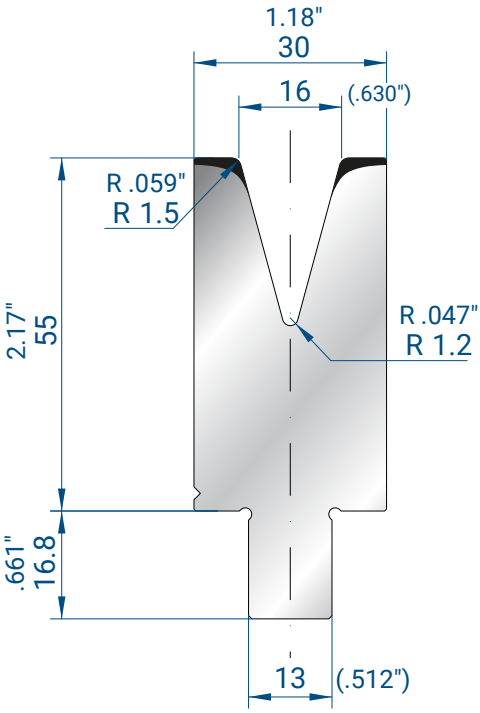

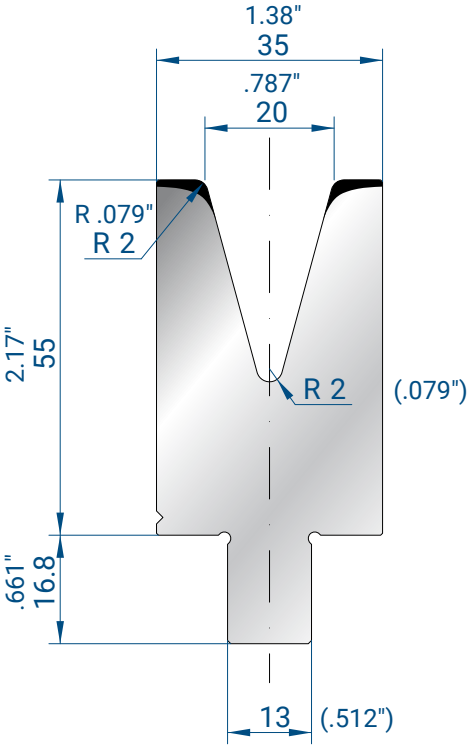

3263

Mat = 42 CrMo4
tempered
H = 55.00 (2.165")
Max T/m = 40
Max US t/ft = 13.4
α = 30°

515 mm 20.28"	5.0 kg 11.0 lb
200 mm 7.87"	2.0 kg 4.4 lb
100 mm 3.94"	1.0 kg 2.2 lb
550 mm 21.65" SECTIONED	5.3 kg 11.7 lb

3264

Mat = 42 CrMo4
tempered
H = 55.00 (2.165")
Max T/m = 60
Max US t/ft = 20.2
α = 30°

515 mm 20.28"	6.6 kg 14.6 lb
200 mm 7.87"	2.6 kg 5.7 lb
100 mm 3.94"	1.3 kg 2.9 lb
550 mm 21.65" SECTIONED	7.0 kg 15.4 lb

3265

Mat = 42 CrMo4
tempered
H = 55.00 (2.165")
Max T/m = 55
Max US t/ft = 18.5
α = 30°

515 mm 20.28"	7.2 kg 15.9 lb
200 mm 7.87"	2.8 kg 6.2 lb
100 mm 3.94"	1.4 kg 3.1 lb
550 mm 21.65" SECTIONED	7.7 kg 17.0 lb



EUROSTAMP TOOLING
the Italian excellence

BYSTRONIC STYLE

The upper and lower tools in this section fit Bystronic / Beyeler press brakes with these clamping types:

Bystronic / Beyeler type RFA

Bystronic / Beyeler type RF

Bystronic / Beyeler type R

With the matching upper and lower adapters, they also fit press brakes with other clamping systems.







BYSTRONIC STYLE


SEE PAGE 181 FOR DIE SEGMENTATION DIAGRAM

STANDARD SEGMENTATION

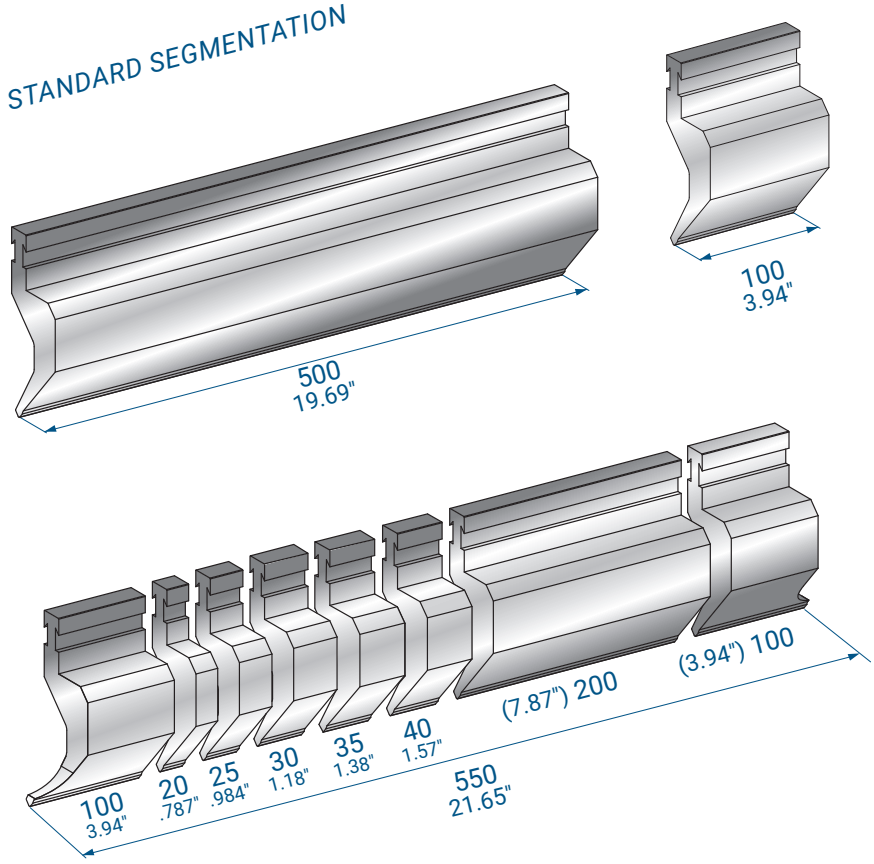


MILLED HORN

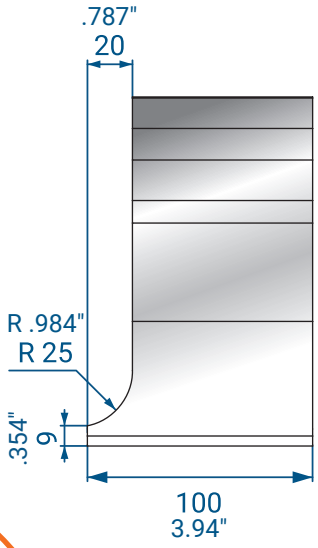

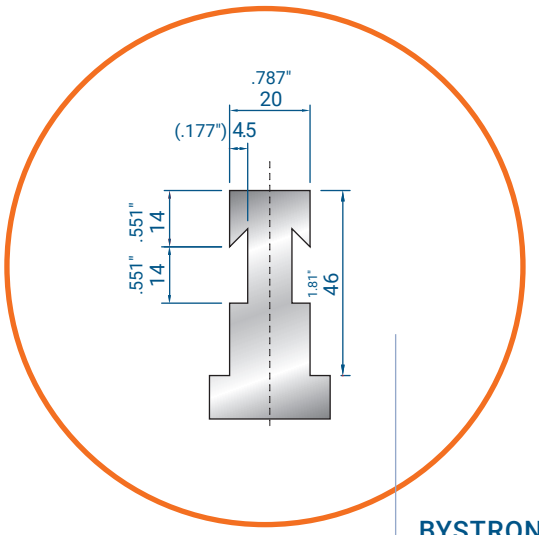

BYSTRONIC STYLE
TYPE R

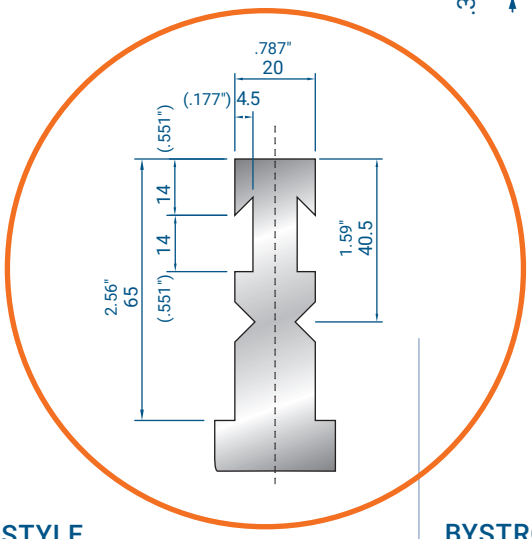


BYSTRONIC STYLE
TYPE RF-A

INCLUDED ON REQUEST AT NO CHARGE


CODE ***8022***

MODIFICATIONS ON REQUEST


SPECIAL HORNS

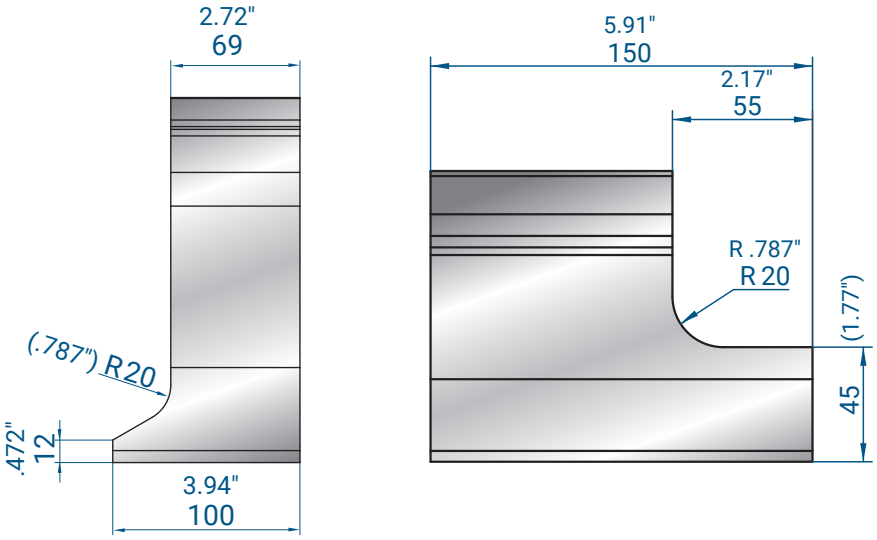


SPECIAL SEGMENTATION

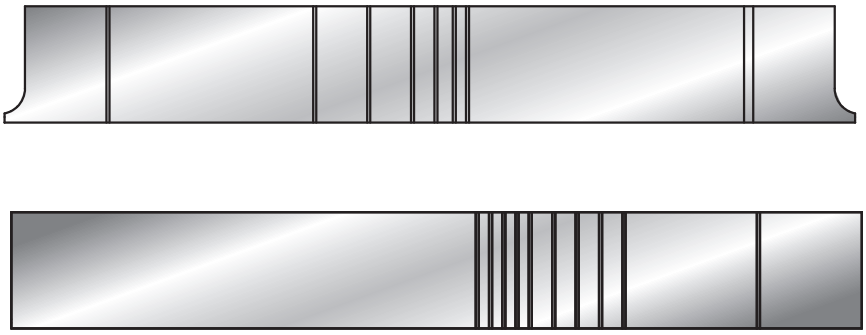

RADIUS MODIFICATION

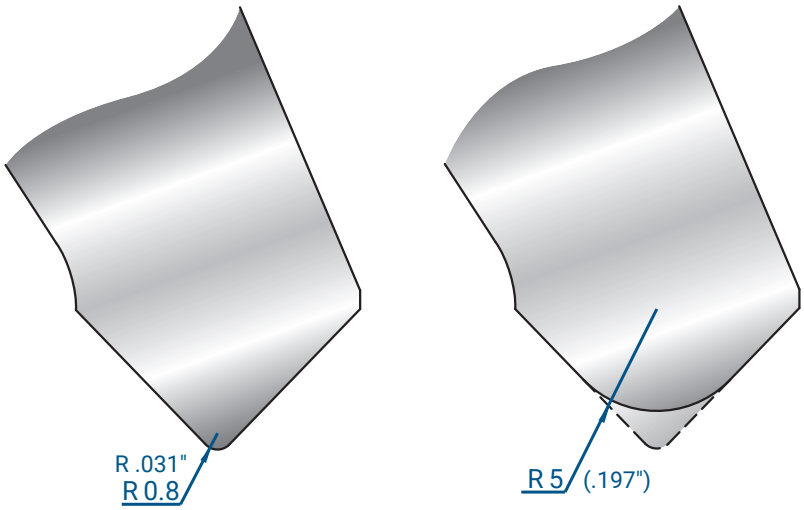

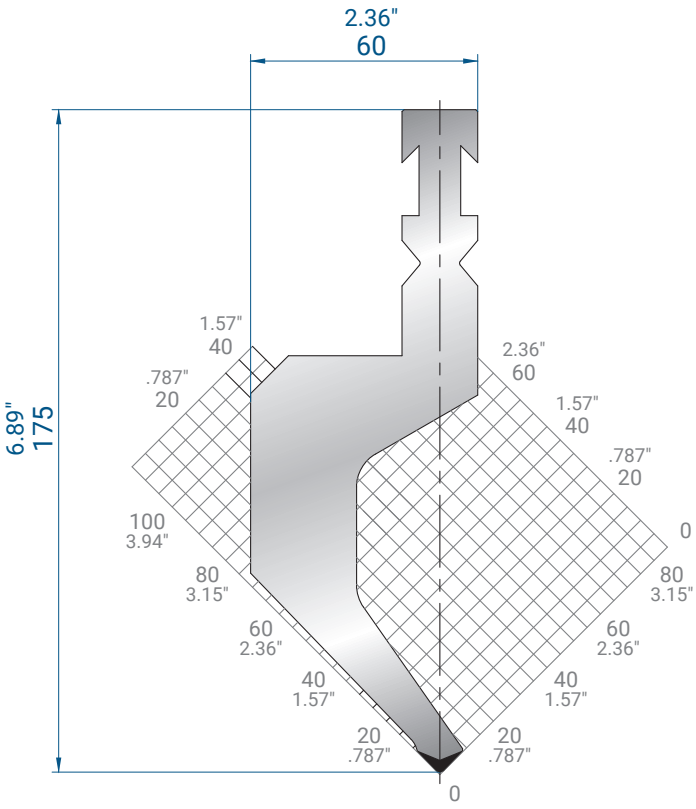


1227

Mat = C45
tempered
H = 175.00 (6.890")
Max T/m = 50
Max US t/ft = 16.8
α = 88°
R = 1.5 (.059")

500 mm	16.3 kg
550 mm SHORT SECTIONED	16.6 kg
100 mm	3.3 kg

19.69"	35.9 lb
21.65" SHORT SECTIONED	36.6 lb
3.94"	7.3 lb

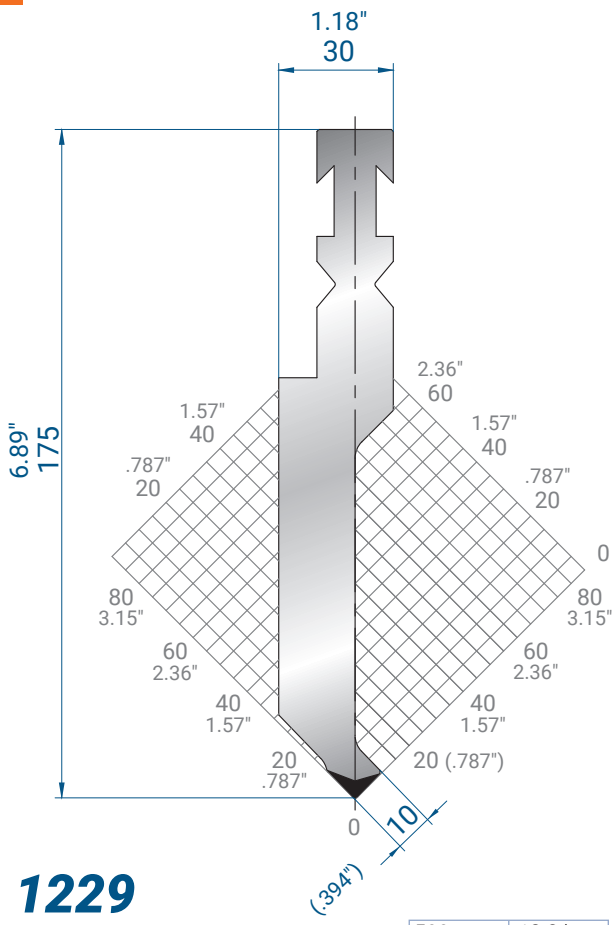



1229

Mat = C45
tempered
H = 175.00 (6.890")
Max T/m = 100
Max US t/ft = 33.6
α = 88°
R = 1 (.039")

500 mm	12.8 kg
550 mm SHORT SECTIONED	13.0 kg
100 mm	2.6 kg

19.69"	28.2 lb
21.65" SHORT SECTIONED	28.7 lb
3.94"	5.7 lb

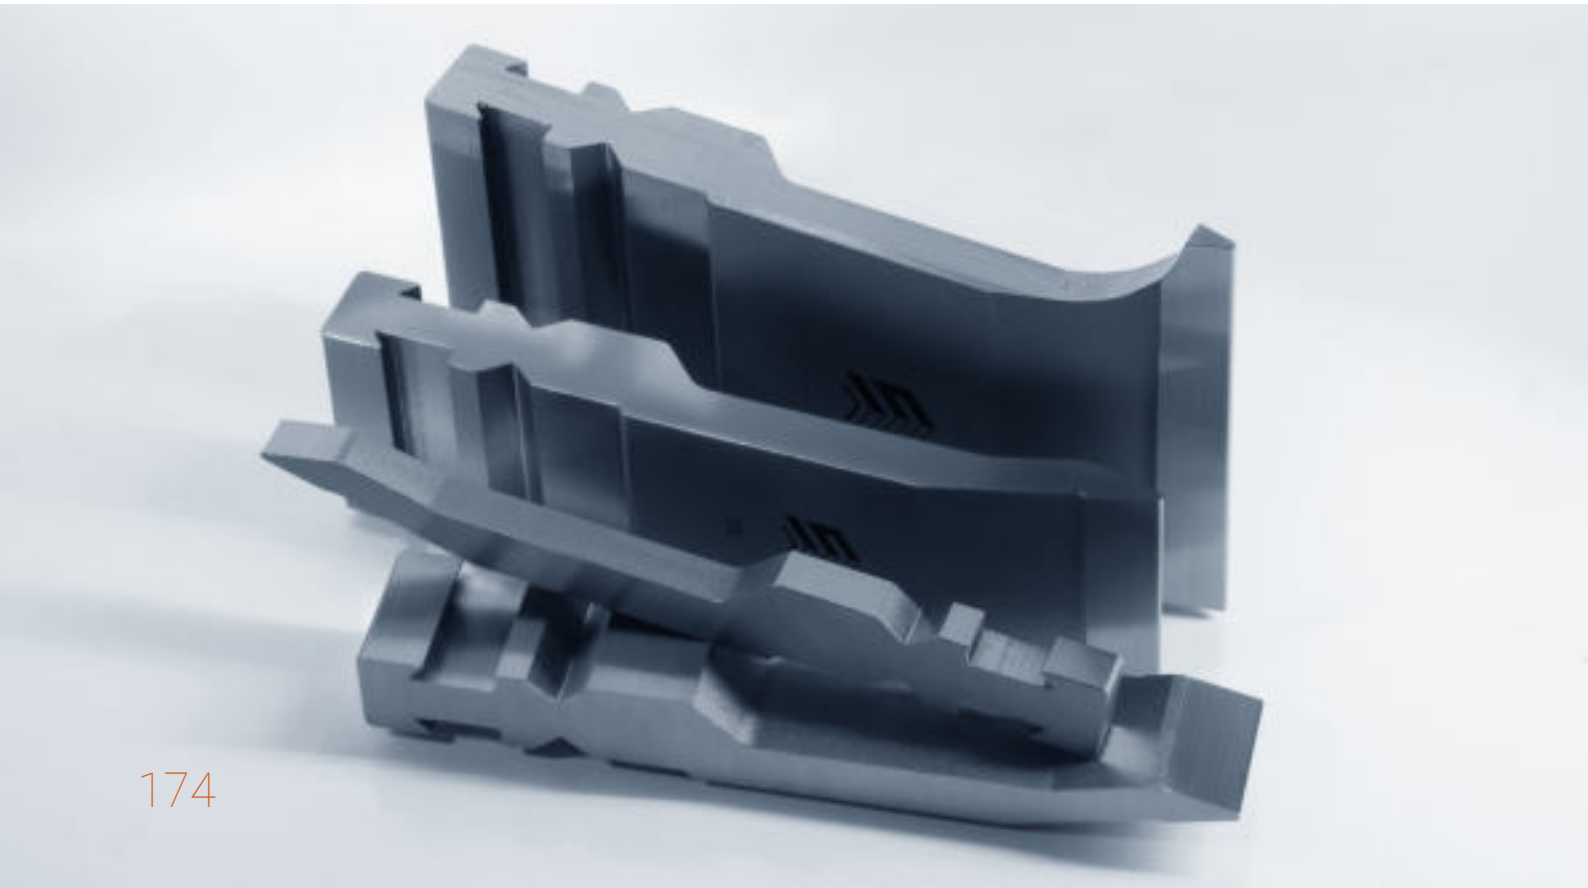

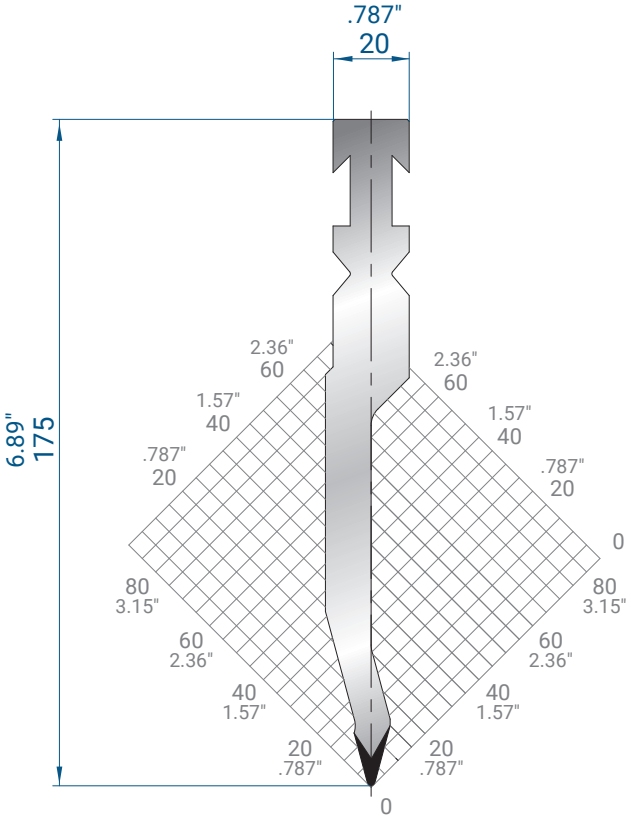


1230

Mat = C45
tempered
H = 175.00 (6.890")
Max T/m = 80
Max US t/ft = 26.9
α = 30°
R = 1 (.039")

500 mm	9.1 kg
550 mm SHORT SECTIONED	9.3 kg
100 mm	1.8 kg

19.69"	20.1 lb
21.65" SHORT SECTIONED	20.5 lb
3.94"	4.0 lb

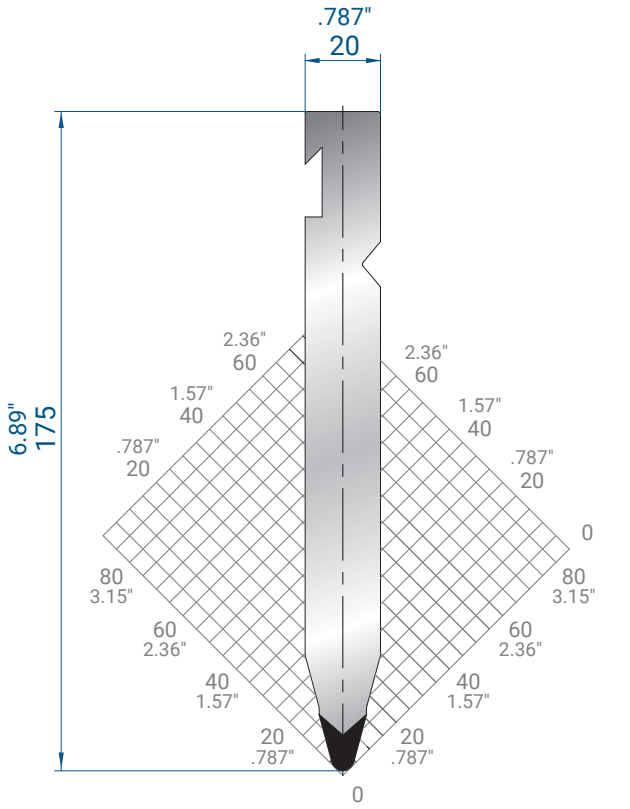


1231

Mat = C45
tempered
H = 175.00 (6.890")
Max T/m = 100
Max US t/ft = 33.6
α = 30°
R = 3 (.118")

500 mm	12.4 kg
550 mm SHORT SECTIONED	12.7 kg
100 mm	2.5 kg

19.69"	27.3 lb
21.65" SHORT SECTIONED	28.0 lb
3.94"	5.5 lb

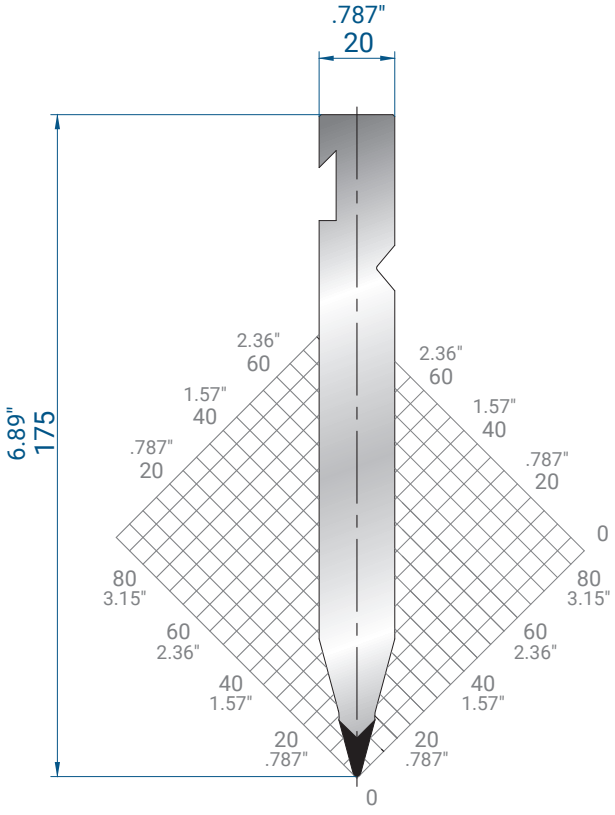


1232

Mat = C45
tempered
H = 175.00 (6.890")
Max T/m = 100
Max US t/ft = 33.6
α = 30°
R = 1 (.039")

500 mm	12.0 kg
550 mm SHORT SECTIONED	12.2 kg
100 mm	2.4 kg


19.69"	26.5 lb
21.65" SHORT SECTIONED	26.9 lb
3.94"	5.3 lb

1298

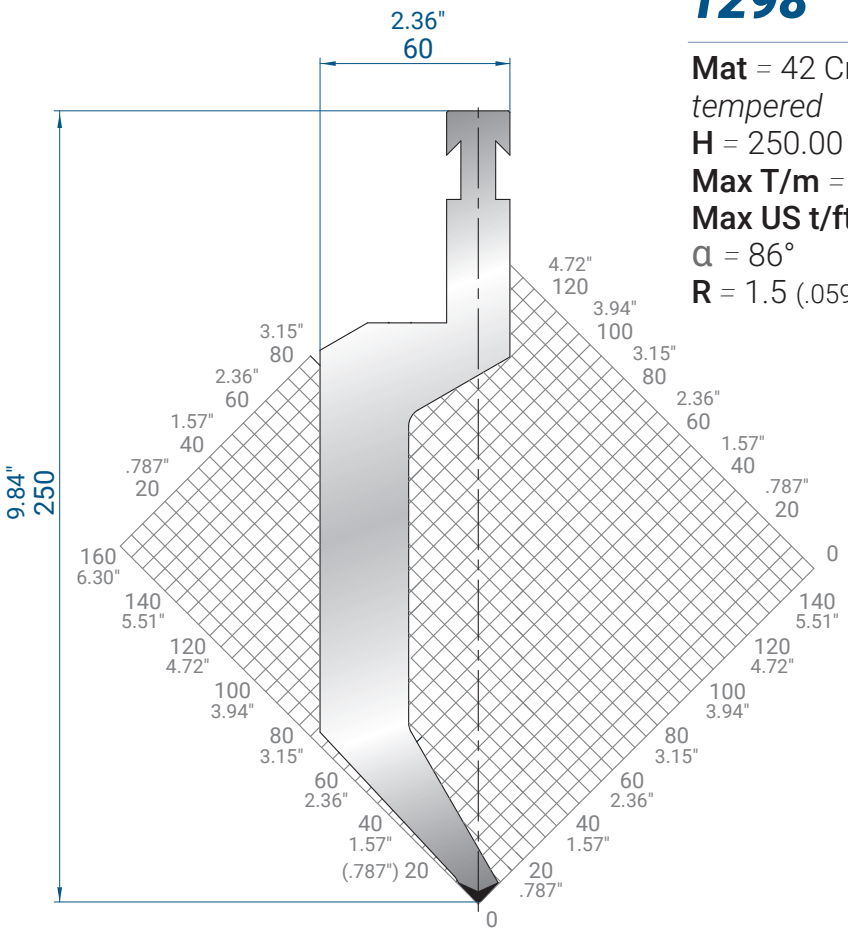

Mat = 42 CrMo4
tempered
H = 250.00 (9.843")
Max T/m = 60
Max US t/ft = 20.2
α = 86°
R = 1.5 (.059")

500 mm	25.1 kg	19.69"	55.3 lb
550 mm SHORT SECTIONED	24.6 kg	21.65" SHORT SECTIONED	54.2 lb
100 mm	5.0 kg	3.94"	11.0 lb

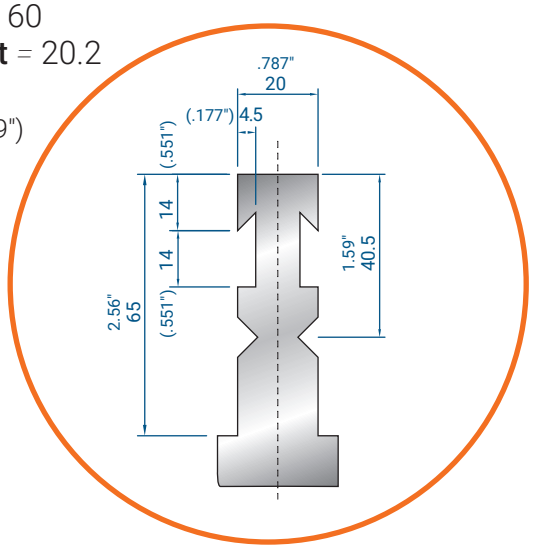


UPPER TANG **RF-A**

INCLUDED ON REQUEST
AT NO CHARGE

CODE ***8022***



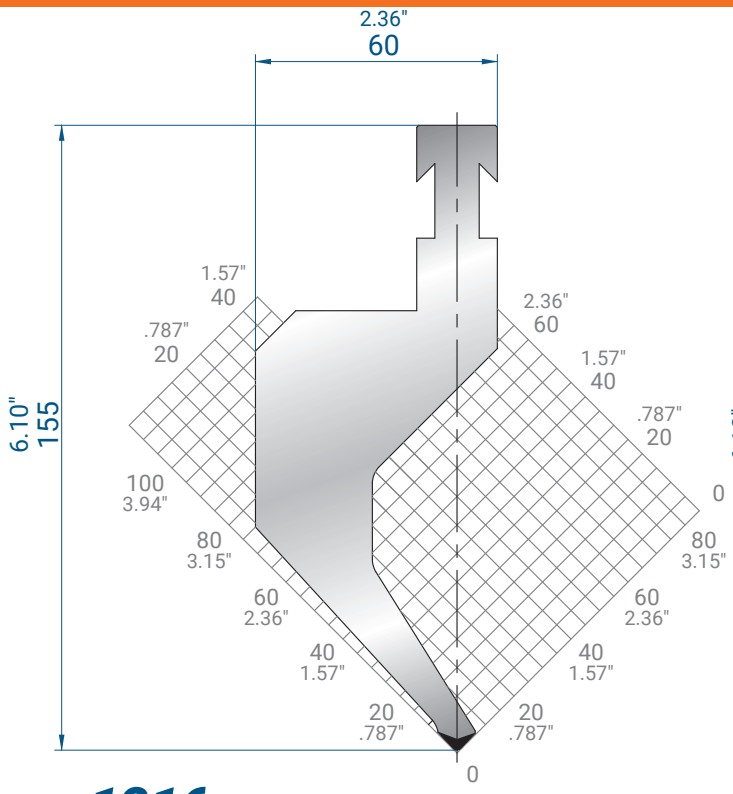


1216

Mat = C45
tempered
H = 155.00 (6.102")
Max T/m = 50
Max US t/ft = 16.8
α = 85°
R = 1.5 (.059")

500 mm	15.3 kg
550 mm SHORT SECTIONED	15.6 kg
100 mm	3.0 kg

19.69"	33.7 lb
21.65" SHORT SECTIONED	34.4 lb
3.94"	6.6 lb

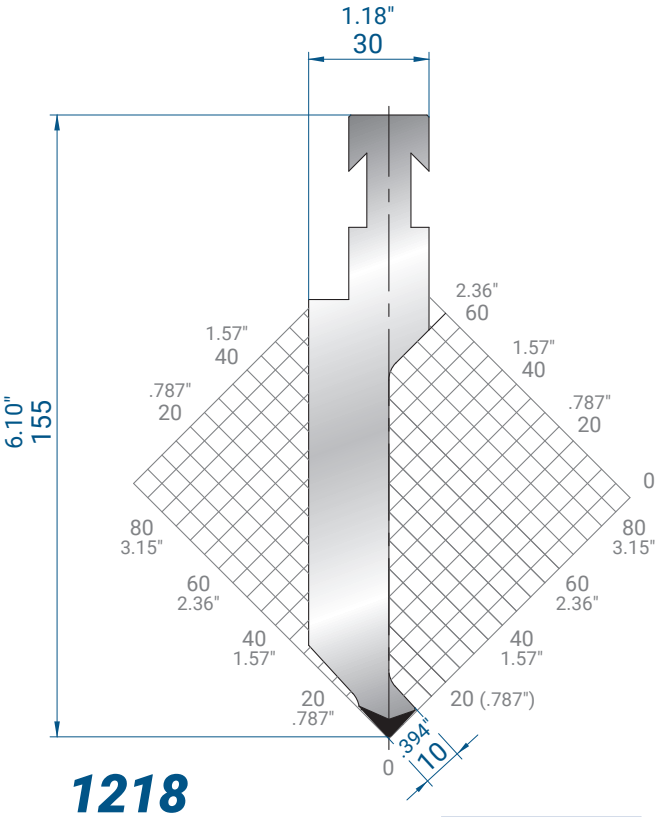


1218

Mat = C45
tempered
H = 155.00 (6.102")
Max T/m = 100
Max US t/ft = 33.6
α = 85°
R = 1 (.039")

500 mm	11.4 kg
550 mm SHORT SECTIONED	11.7 kg
100 mm	2.3 kg


19.69"	25.1 lb
21.65" SHORT SECTIONED	25.8 lb
3.94"	5.1 lb

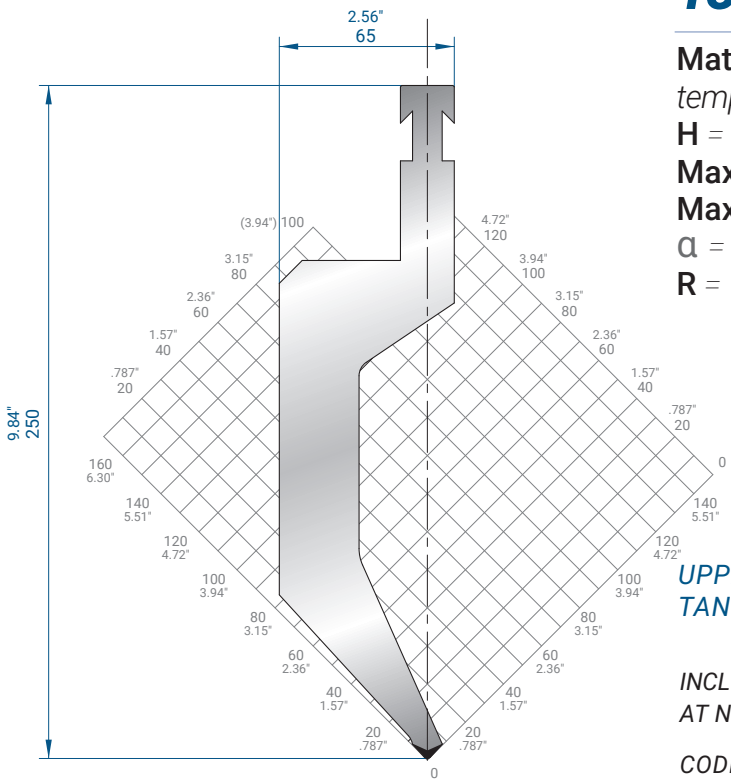

1321

Mat = 42 CrMo4
tempered
H = 250.00 (9.843")
Max T/m = 100
Max US t/ft = 33.6
α = 85°
R = 1.5 (.059")

500 mm	27.9 kg	19.69"	61.5 lb
550 mm SHORT SECTIONED	28.5 kg	21.65" SHORT SECTIONED	62.8 lb
100 mm	5.6 kg	3.94"	12.3 lb

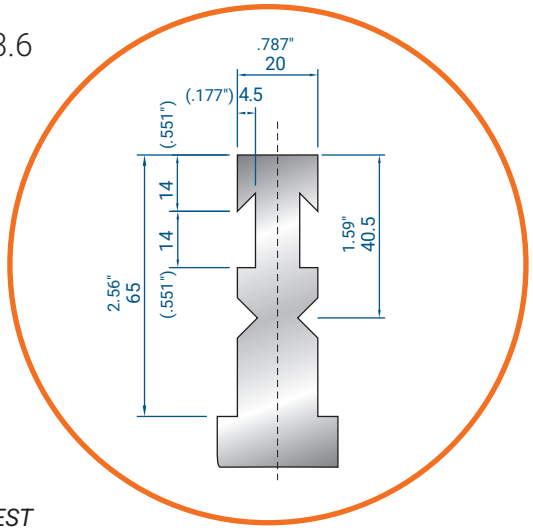

UPPER TANG **RF-A**

INCLUDED ON REQUEST AT NO CHARGE


CODE ***8022***


BYSTRONIC STYLE

1299

550 mm	13.3 kg	21.65"	29.3 lb
500 mm SHORT SECTIONED	13.6 kg	19.69" SHORT SECTIONED	30.0 lb
100 mm	2.7 kg	3.94"	6.0 lb

Mat = 42 CrMo4
tempered
H = 250.00 (9.843")
Max T/m = 80
Max US t/ft = 26.9
α = 30°
R = 1 (.039")

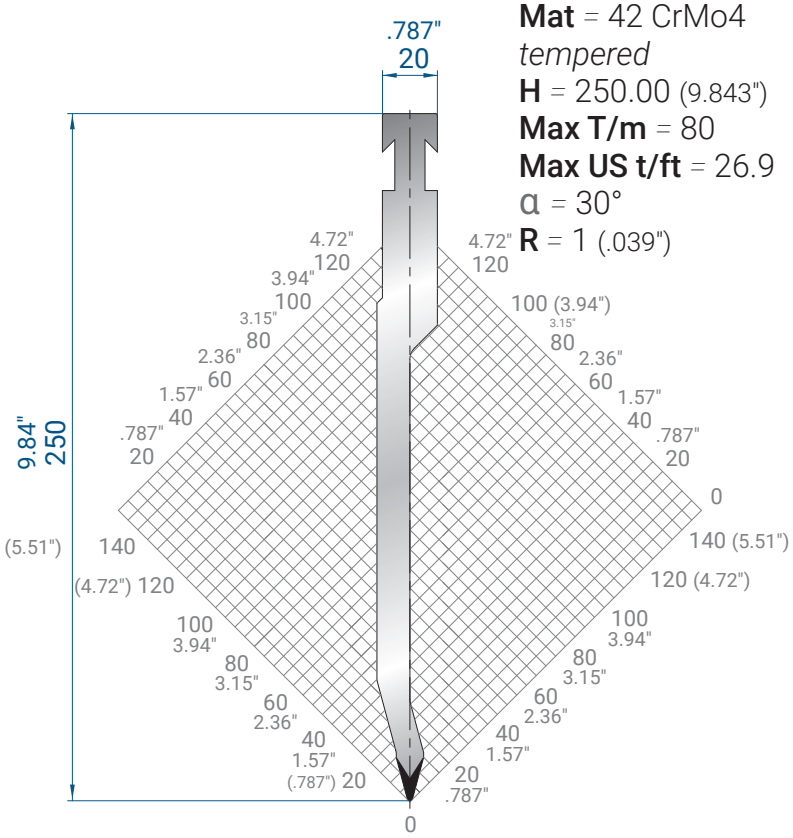

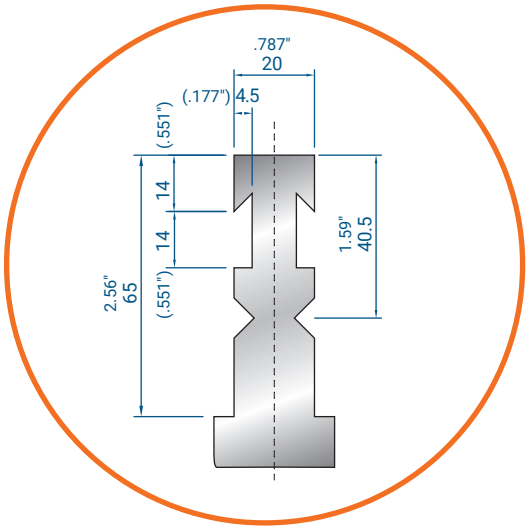

UPPER TANG **RF-A**


AVAILABLE ON DEMAND
AT NO COST


CODE ***8022***

1300

500 mm	18.4 kg	19.69"	40.6 lb
550 mm SHORT SECTIONED	18.8 kg	21.65" SHORT SECTIONED	41.4 lb
100 mm	3.7 kg	3.94"	8.2 lb

Mat = 42CrMo4
tempered
H = 250.00 (9.843")
Max T/m = 120
Max US t/ft = 40.3
α = 30°
R = 3 (.118")

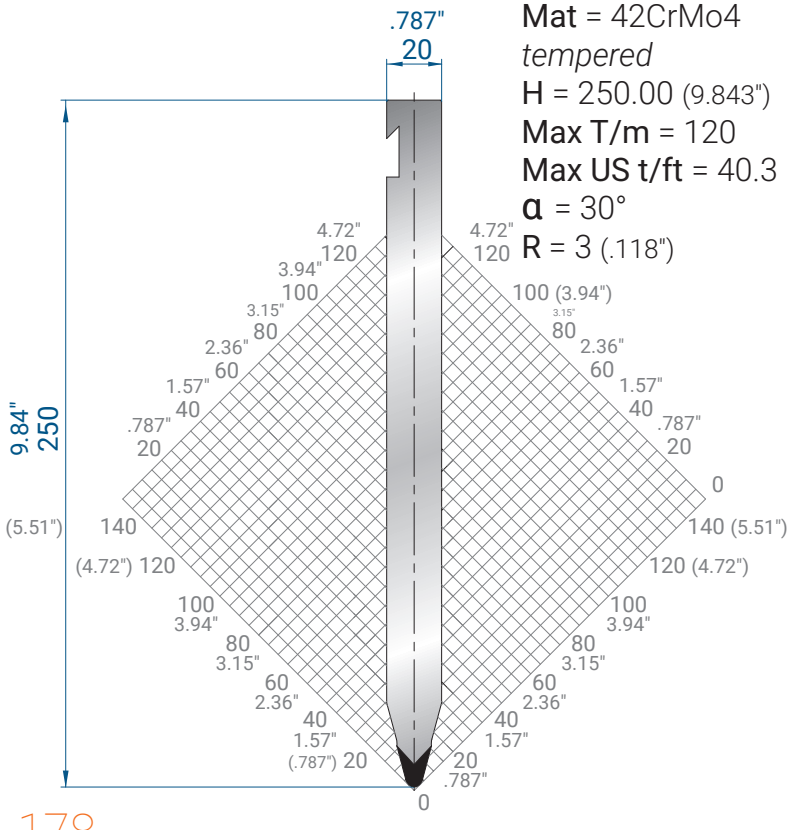


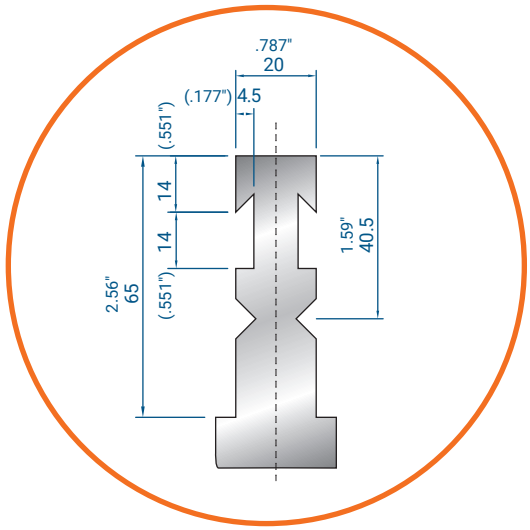

UPPER TANG **RF-A**

AVAILABLE ON DEMAND
AT NO COST

CODE ***8022***

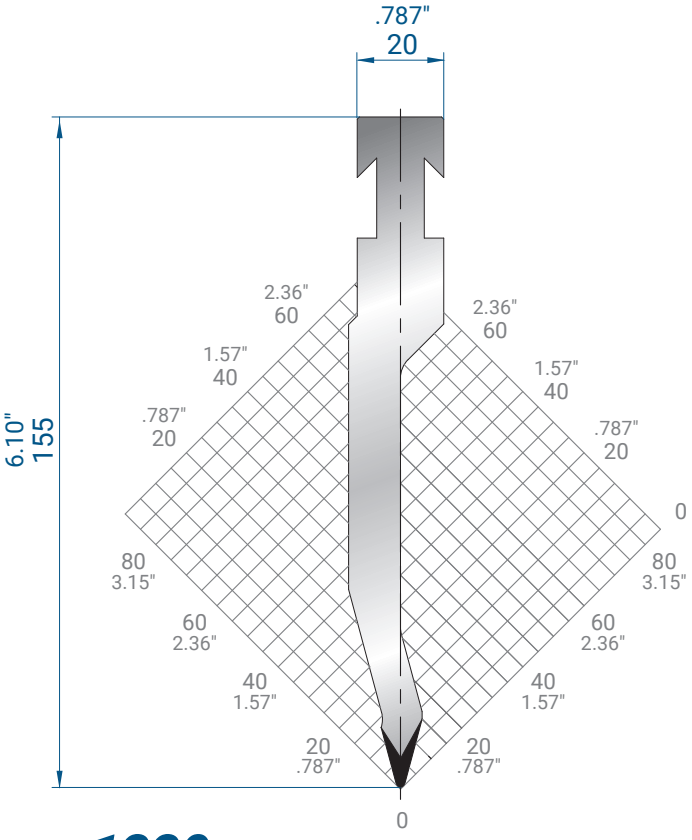


1220

Mat = C45
tempered
H = 155.00 (6.102")
Max T/m = 80
Max US t/ft = 26.9
α = 30°
R = 1 (.039")

500 mm	7.8 kg
550 mm SHORT SECTIONED	7.9 kg
100 mm	1.6 kg

19.69"	17.2 lb
21.65" SHORT SECTIONED	17.4 lb
3.94"	3.5 lb

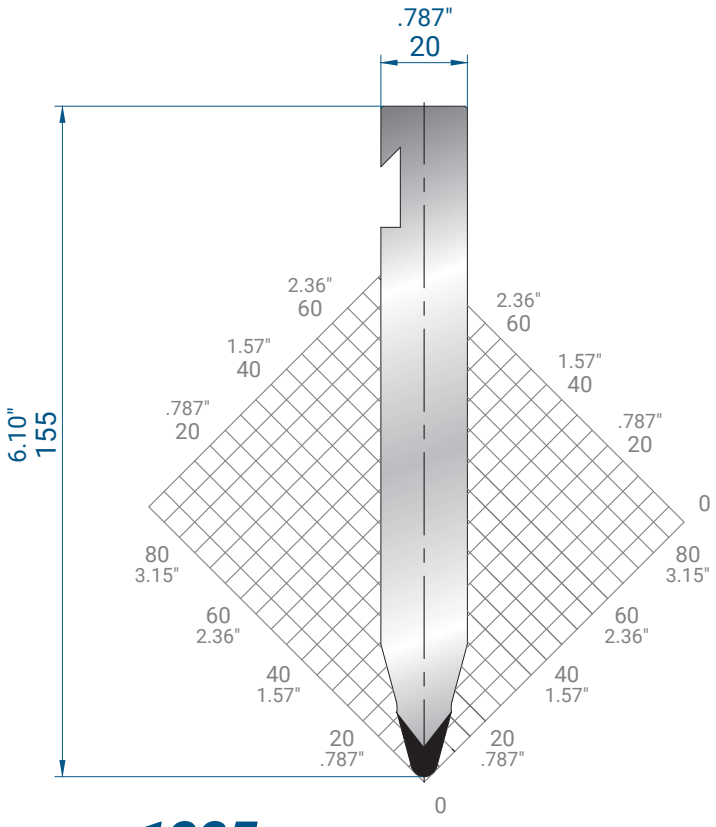


1225

Mat = C45
tempered
H = 155.00 (6.102")
Max T/m = 100
Max US t/ft = 33.6
α = 30°
R = 3 (.118")

500 mm	10.9 kg
550 mm SHORT SECTIONED	11.2 kg
100 mm	2.2 kg

19.69"	24.0 lb
21.65" SHORT SECTIONED	24.7 lb
3.94"	4.9 lb

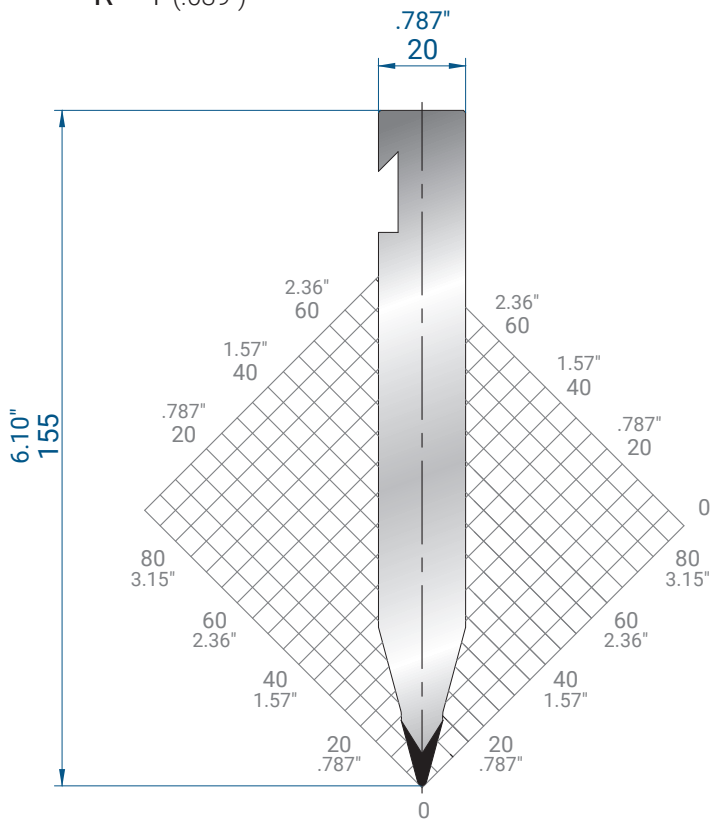


1226

Mat = C45
tempered
H = 155.00 (6.102")
Max T/m = 100
Max US t/ft = 33.6
α = 30°
R = 1 (.039")

500 mm	10.5 kg
550 mm SHORT SECTIONED	10.8 kg
100 mm	2.1 kg


19.69"	23.1 lb
21.65" SHORT SECTIONED	23.8 lb
3.94"	4.6 lb

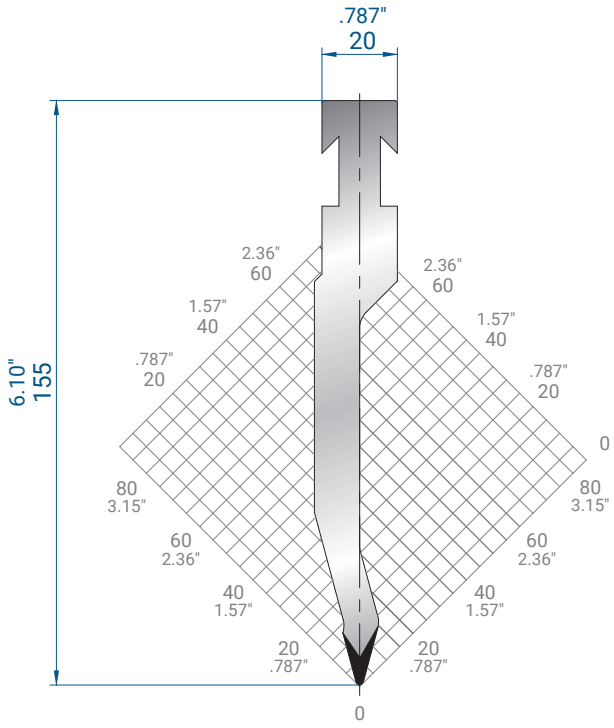


1221

Mat = C45
tempered
H = 155.00 (6.102")
Max T/m = 80
Max US t/ft = 26.9
α = 28°
R = 1 (.039")

500 mm	7.8 kg	19.69"	17.2 lb
550 mm SHORT SECTIONED	7.9 kg	21.65"	17.4 lb
100 mm	1.6 kg	3.94"	3.5 lb

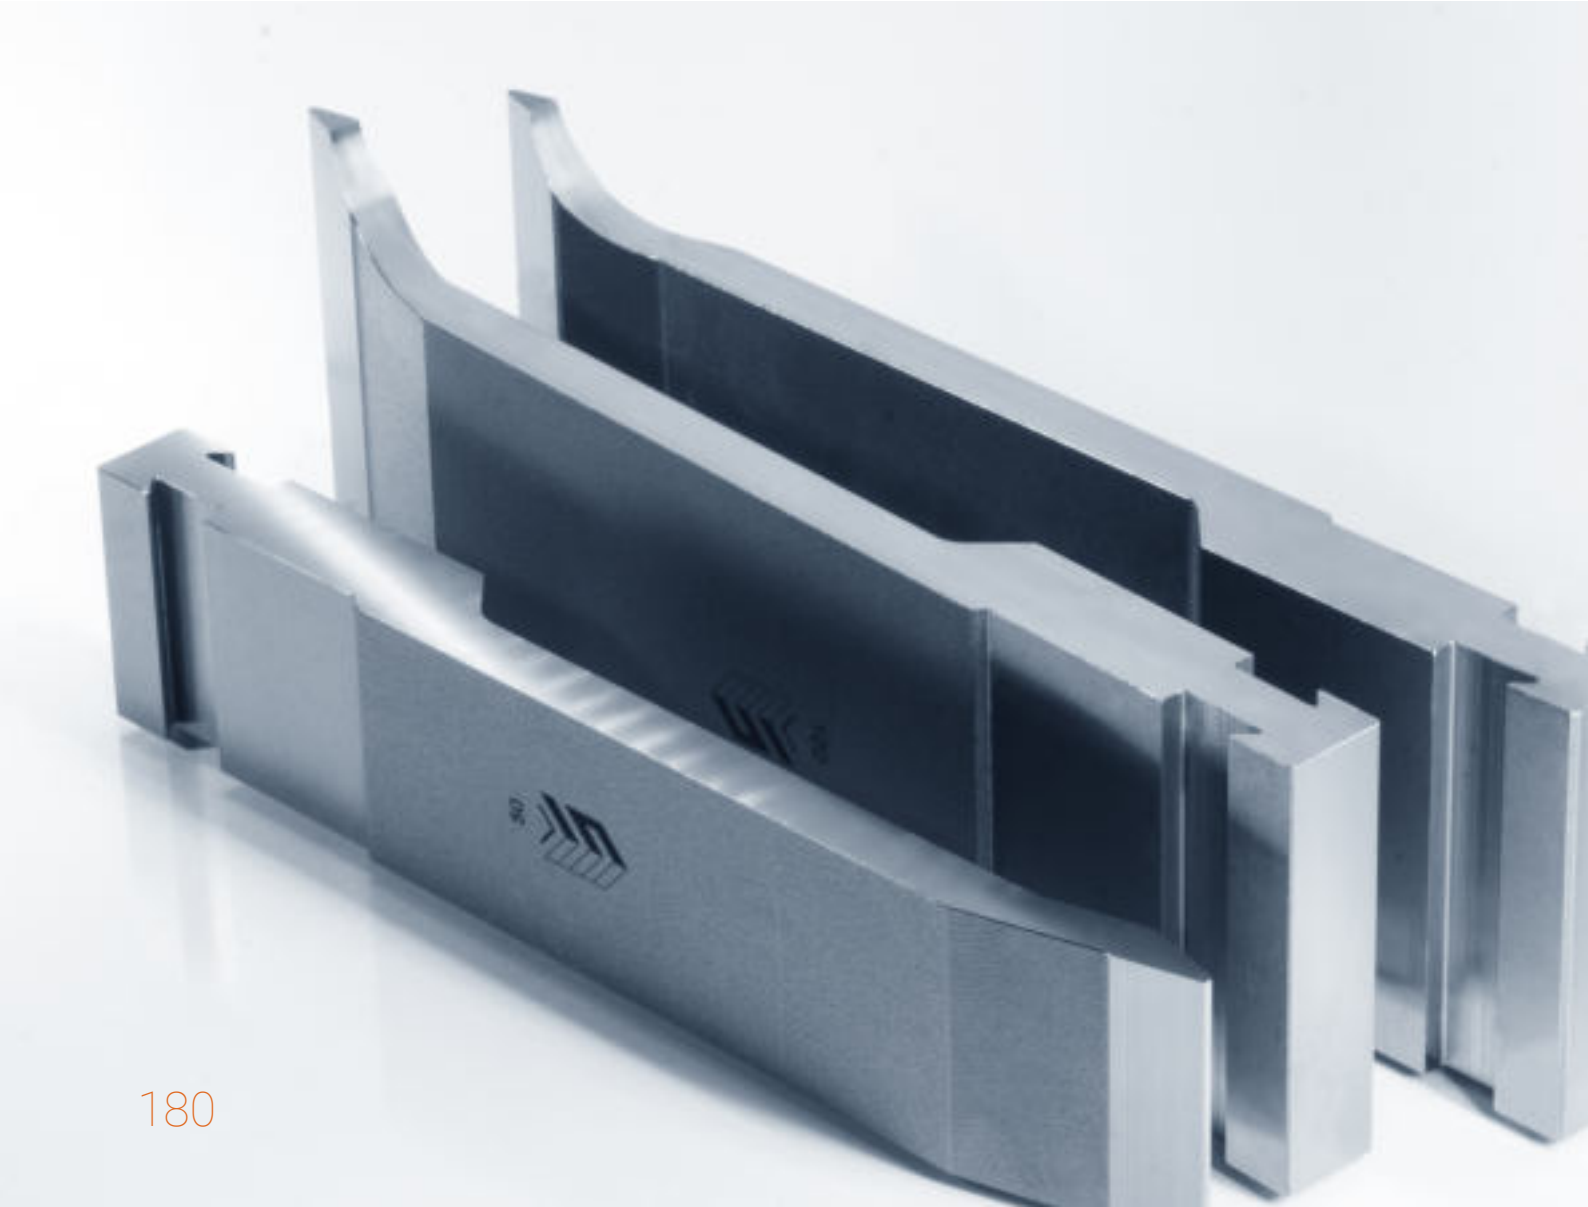



SEE PAGE 172 FOR PUNCHES SEGMENTATION DIAGRAM

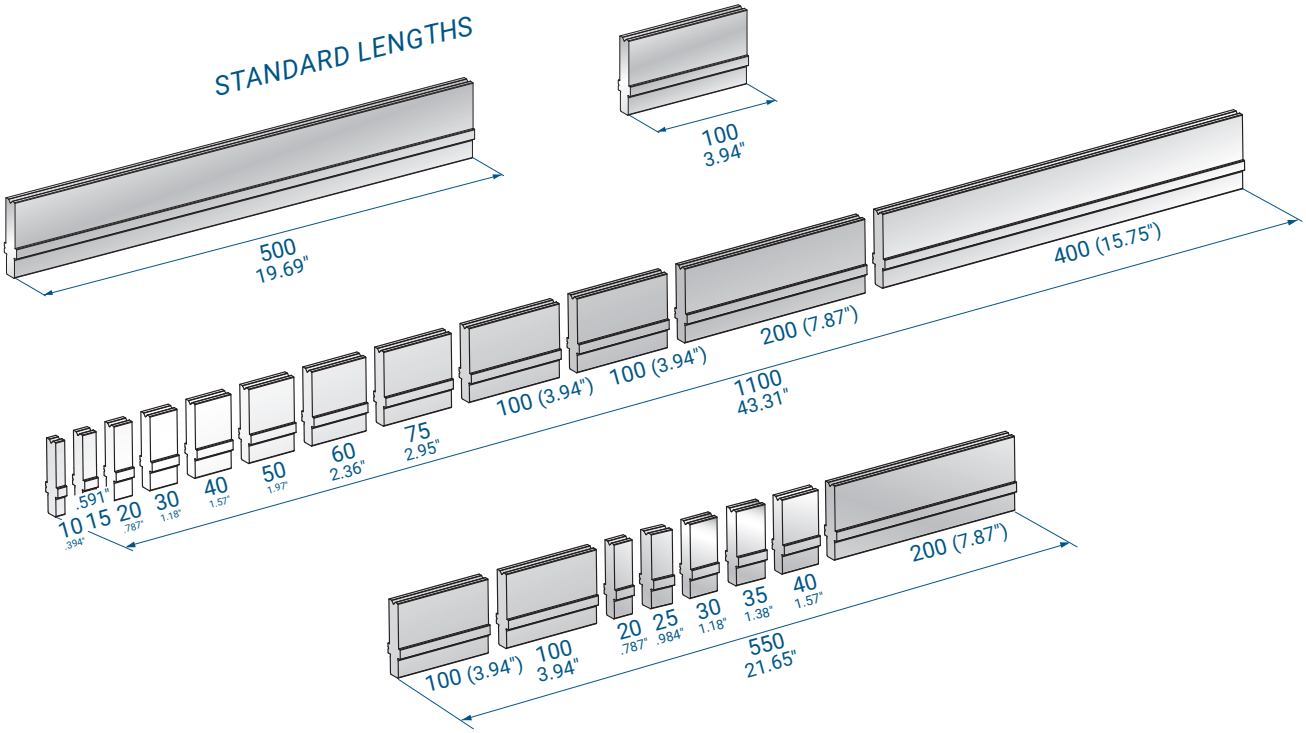


MODIFICATIONS ON REQUEST

SPECIAL SEGMENTATION

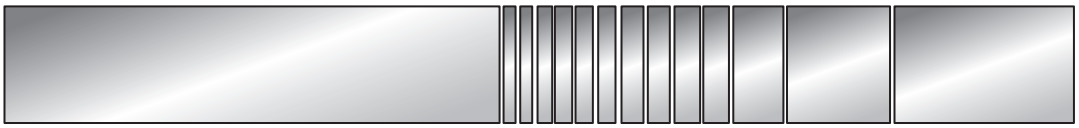


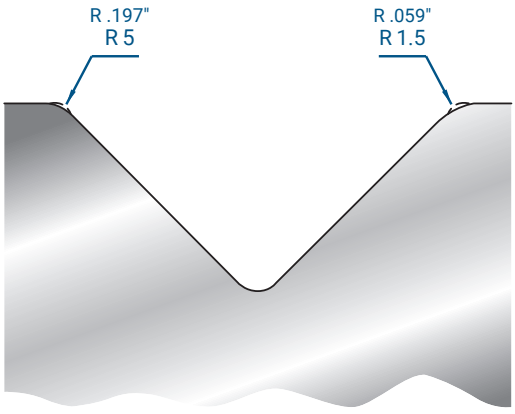

RADIUS MODIFICATION

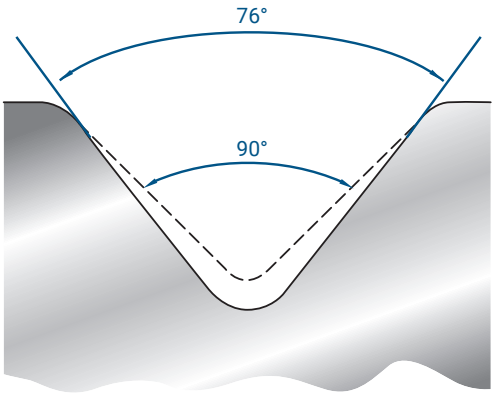


ANGLE MODIFICATION

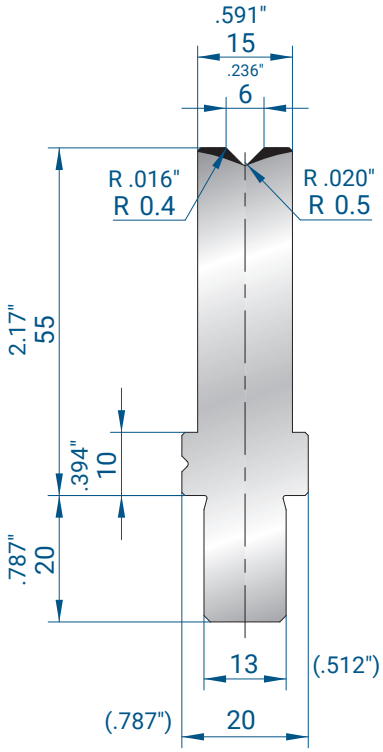

3241

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°


1000 mm 39.37"	8.7 kg 19.2 lb
500 mm 19.69"	4.4 kg 9.7 lb
1100 mm 43.31"	9.7 kg 21.4 lb
550 mm 21.65" SHORT SECTIONED	4.8 kg 10.6 lb
100 mm 3.94"	0.9 kg 2.0 lb

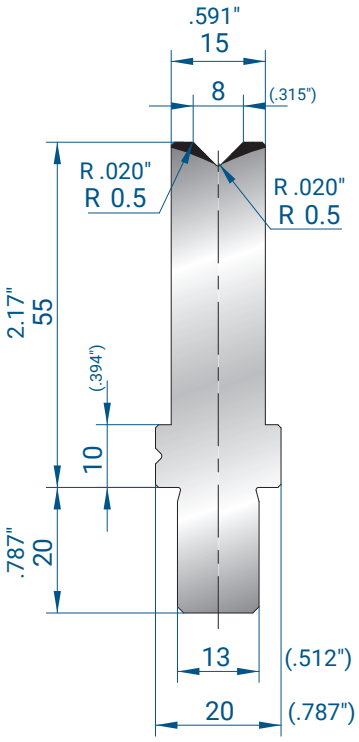

3242

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°

1000 mm 39.37"	8.7 kg 19.2 lb
500 mm 19.69"	4.4 kg 9.7 lb
1100 mm 43.31"	9.6 kg 21.2 lb
550 mm 21.65" SHORT SECTIONED	4.8 kg 10.6 lb
100 mm 3.94"	0.9 kg 2.0 lb

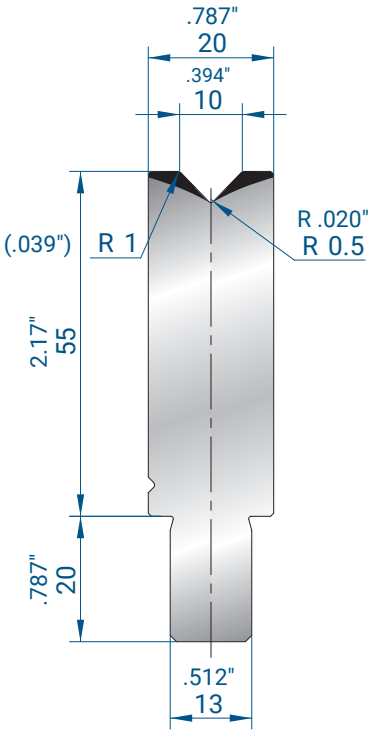


3106

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°

1000 mm 39.37"	10.4 kg 22.9 lb
500 mm 19.69"	5.2 kg 11.5 lb
1100 mm 43.31"	11.5 kg 25.4 lb
550 mm 21.65" SHORT SECTIONED	5.7 kg 12.6 lb
100 mm 3.94"	1.0 kg 2.2 lb




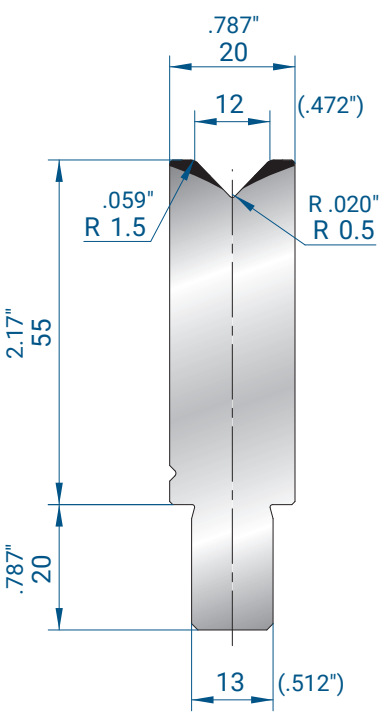

3107

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°


1000 mm 39.37"	10.3 kg 22.7 lb
500 mm 19.69"	5.2 kg 11.5 lb
1100 mm 43.31"	11.4 kg 25.1 lb
550 mm 21.65" SHORT SECTIONED	5.7 kg 12.6 lb
100 mm 3.94"	1.0 kg 2.2 lb

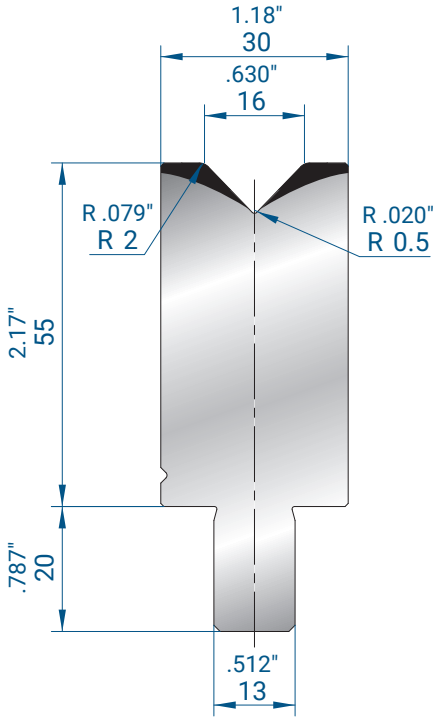

3108

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°


1000 mm 39.37"	14.4 kg 31.7 lb
500 mm 19.69"	7.2 kg 15.9 lb
1100 mm 43.31"	15.8 kg 34.8 lb
550 mm 21.65" SHORT SECTIONED	7.9 kg 17.4 lb
100 mm 3.94"	1.4 kg 3.1 lb

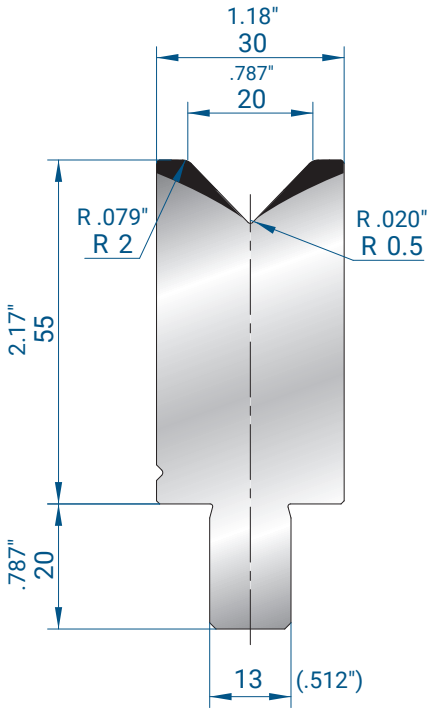

3109

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°


1000 mm 39.37"	14.1 kg 31.1 lb
500 mm 19.69"	7.1 kg 15.7 lb
1100 mm 43.31"	15.5 kg 34.2 lb
550 mm 21.65" SHORT SECTIONED	7.7 kg 17.0 lb
100 mm 3.94"	2.8 kg 6.2 lb

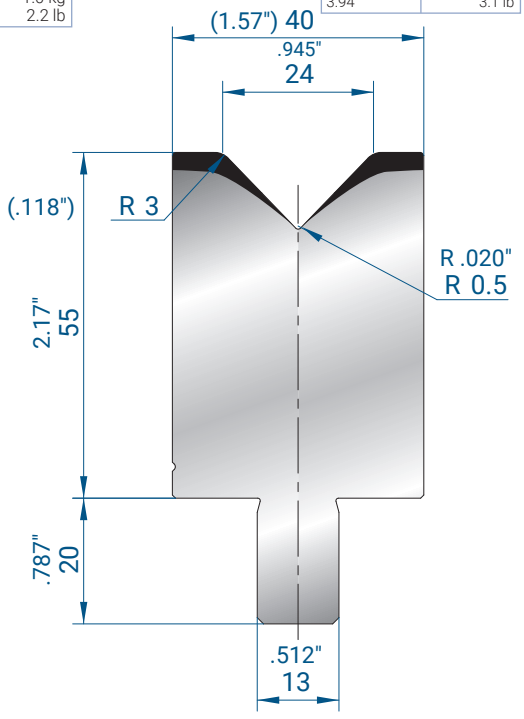

3110

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 88°


1000 mm 39.37"	18.1 kg 39.9 lb
500 mm 19.69"	9.0 kg 19.8 lb
1100 mm 43.31"	19.9 kg 43.9 lb
550 mm 21.65" SHORT SECTIONED	10.0 kg 22.0 lb
100 mm 3.94"	1.8 kg 4.0 lb

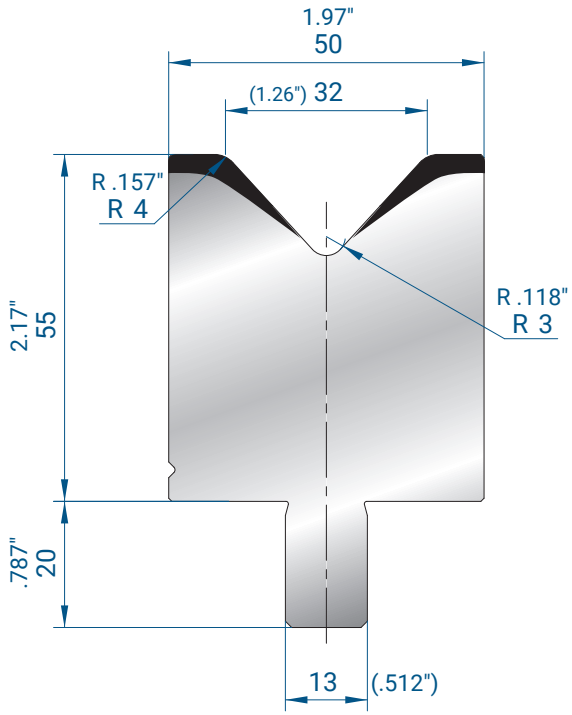

3111

Mat = C45 α = 85°
Max T/m = 100
Max US t/ft = 33.6


39.37"	47.2 lb	1000 mm	21.4 kg
19.69"	23.6 lb	500 mm	10.7 kg
43.31"	51.8 lb	1100 mm SECTIONED	23.5 kg
21.65" SHORT SECTIONED	26.0 lb	550 mm SHORT SECTIONED	11.8 kg
3.94"	4.6 lb	100 mm	2.1 kg

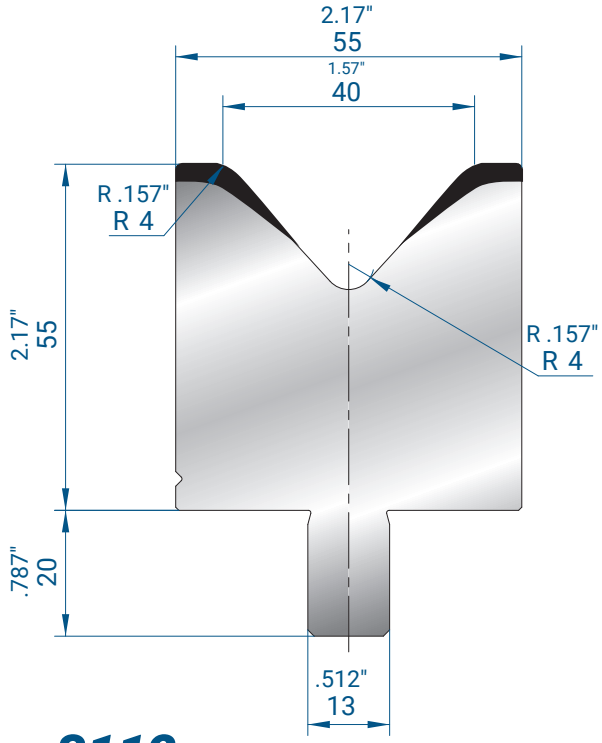


3112

Mat = C45 α = 85°
Max T/m = 100
Max US t/ft = 33.6

39.37"	49.2 lb	1000 mm	22.3 kg
19.69"	24.7 lb	500 mm	11.2 kg
43.31"	54.0 lb	1100 mm SECTIONED	24.5 kg
21.65" SHORT SECTIONED	27.1 lb	550 mm SHORT SECTIONED	12.3 kg
3.94"	4.9 lb	100 mm	2.2 kg

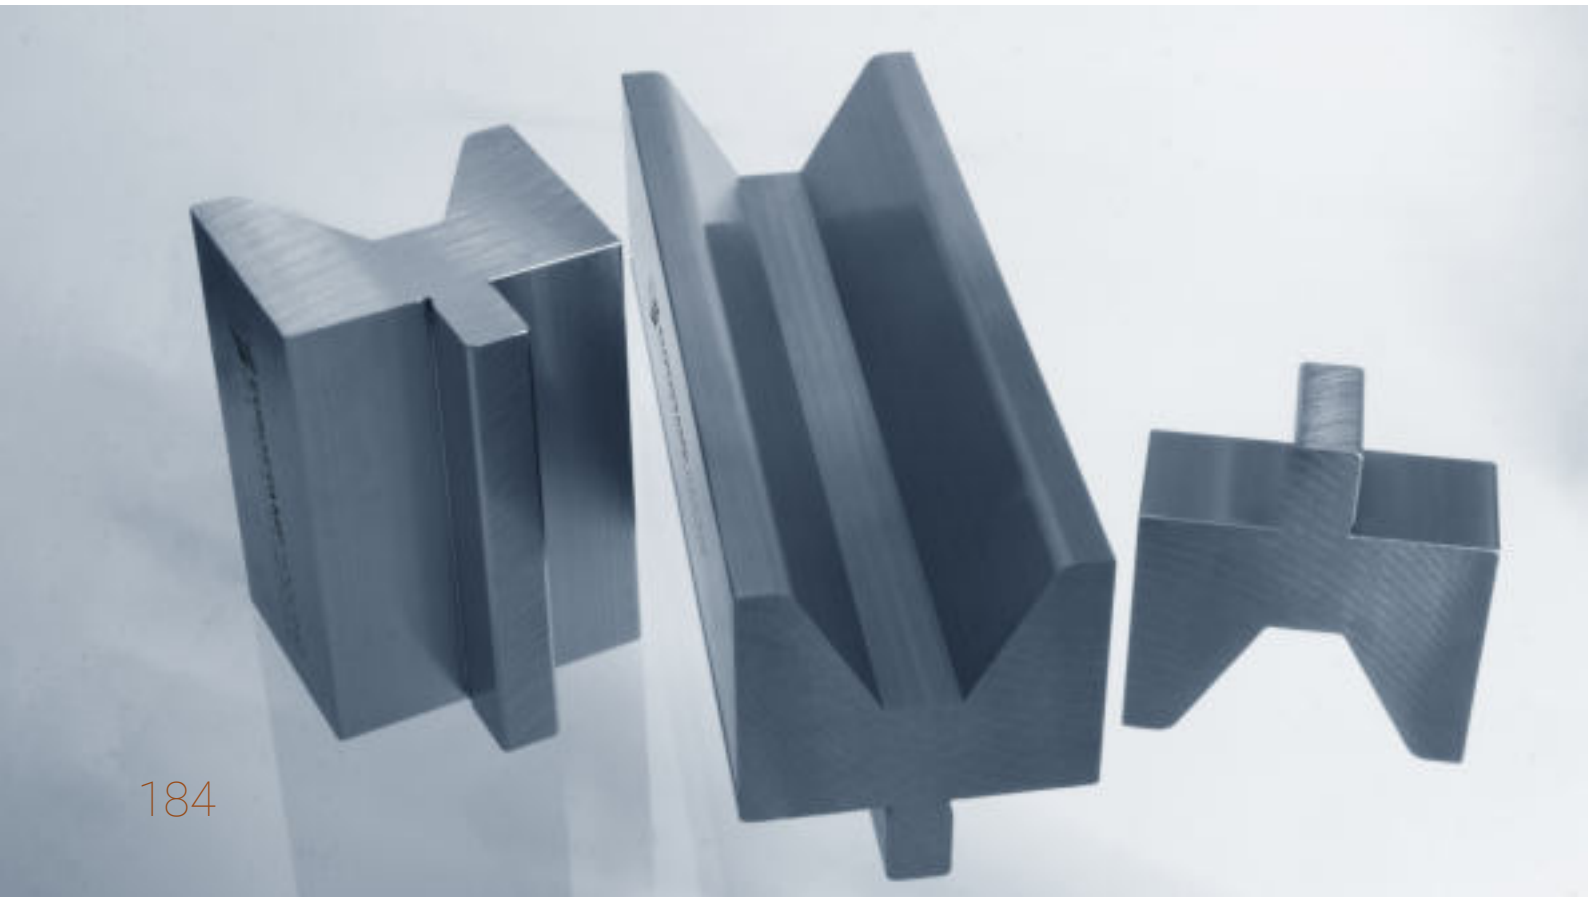


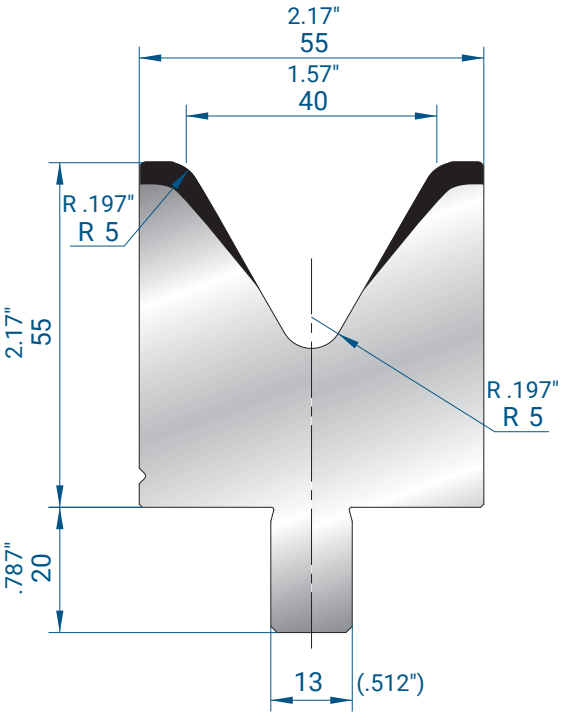

3113

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 60°

39.37"	45.0 lb	1000 mm	20.4 kg
19.69"	22.5 lb	500 mm	10.2 kg
43.31"	49.4 lb	1100 mm SECTIONED	22.4 kg
21.65" SHORT SECTIONED	24.7 lb	550 mm SHORT SECTIONED	11.2 kg
3.94"	4.4 lb	100 mm	2.0 kg

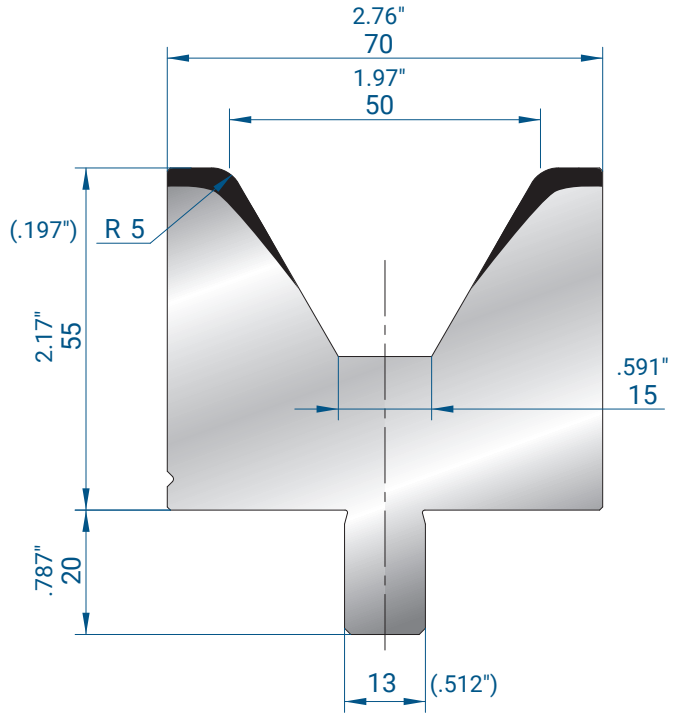


3179

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 60°

1000 mm	24.4 kg
500 mm	12.2 kg
1100 mm SECTIONED	26.9 kg
550 mm SHORT SECTIONED	13.5 kg
100 mm	2.4 kg

39.37"	53.8 lb
19.69"	26.9 lb
43.31"	59.3 lb
21.65" SHORT SECTIONED	29.8 lb
3.94"	5.3 lb

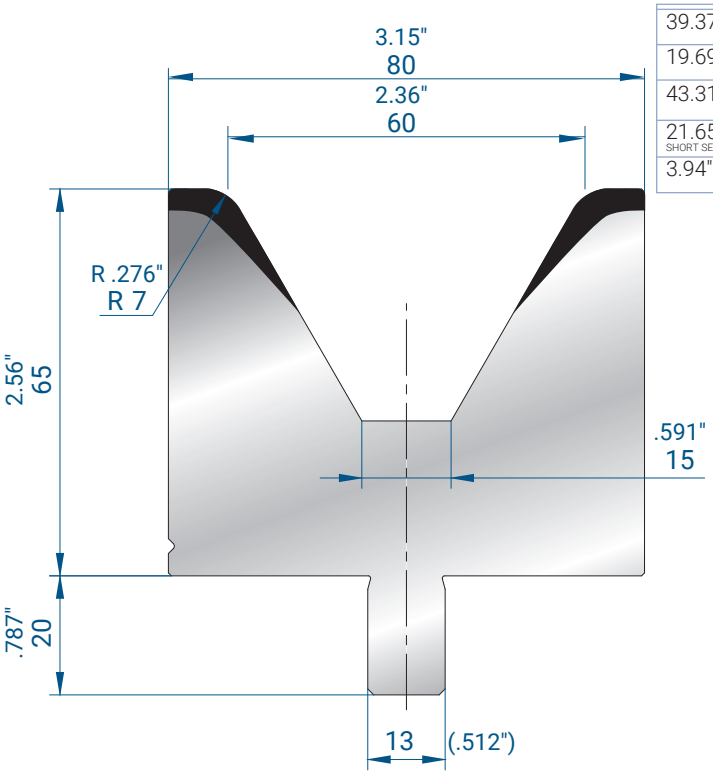


3114

Mat = C45
Max T/m = 100
Max US t/ft = 33.6
α = 60°

1000 mm	31.2 kg
500 mm	15.6 kg
1100 mm SECTIONED	34.4 kg
550 mm SHORT SECTIONED	17.2 kg
100 mm	3.1 kg


39.37"	68.8 lb
19.69"	34.4 lb
43.31"	75.8 lb
21.65" SHORT SECTIONED	37.9 lb
3.94"	6.8 lb

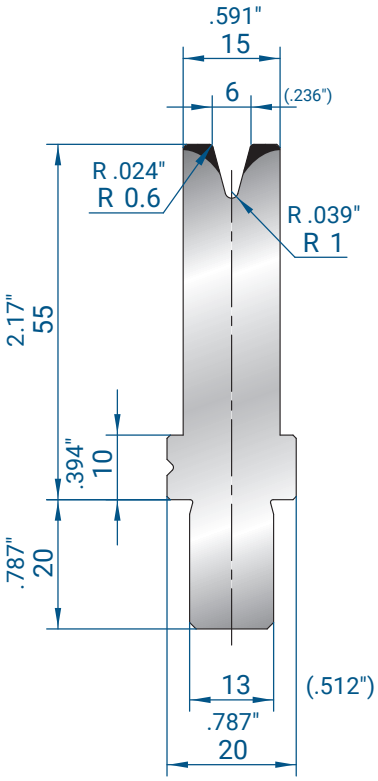

3115

Mat = C45
Max T/m = 35
Max US t/ft = 11.8
α = 30°


1000 mm 39.37"	8.6 kg 19.0 lb
500 mm 19.69"	4.3 kg 9.5 lb
1100 mm 43.31"	9.5 kg 20.9 lb
550 mm 21.65" SHORT SECTIONED	4.7 kg 10.4 lb
100 mm 3.94"	0.9 kg 2.0 lb

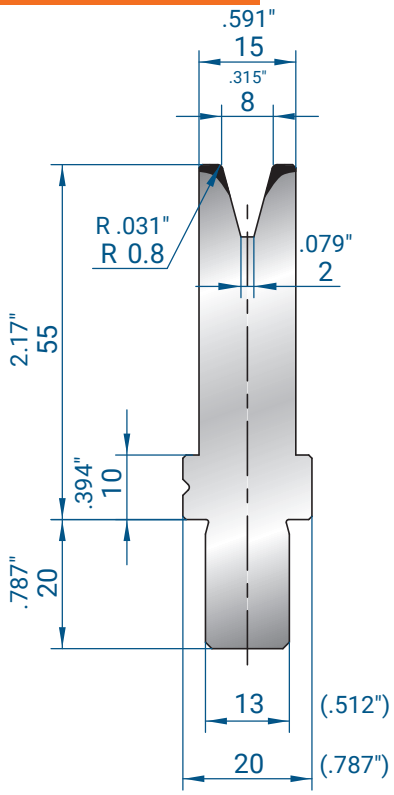

3116

Mat = C45
Max T/m = 40
Max US t/ft = 13.4
α = 30°


1000 mm 39.37"	8.4 kg 18.5 lb
500 mm 19.69"	4.2 kg 9.3 lb
1100 mm 43.31"	9.3 kg 20.5 lb
550 mm 21.65" SHORT SECTIONED	4.6 kg 10.1 lb
100 mm 3.94"	0.8 kg 1.8 lb

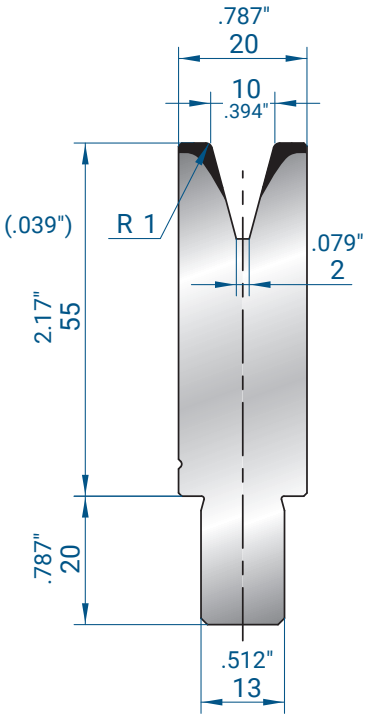



3117


Mat = C45
Max T/m = 50
Max US t/ft = 16.8
α = 30°

1000 mm 39.37"	9.9 kg 21.8 lb
500 mm 19.69"	5.0 kg 11.0 lb
1100 mm 43.31"	10.9 kg 24.0 lb
550 mm 21.65" SHORT SECTIONED	5.5 kg 12.1 lb
100 mm 3.94"	1.0 kg 2.2 lb

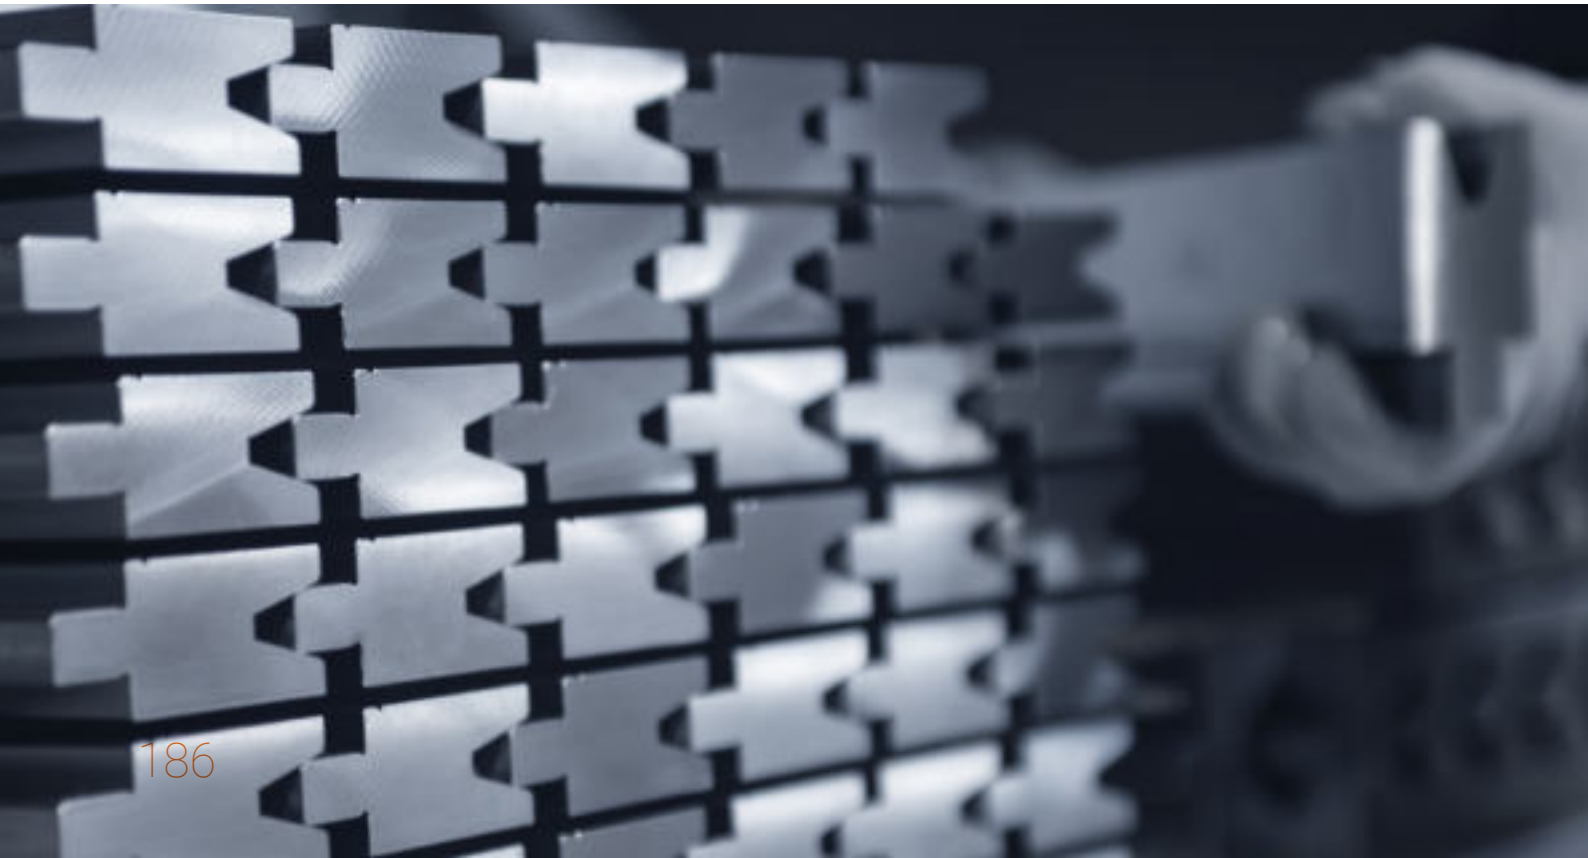

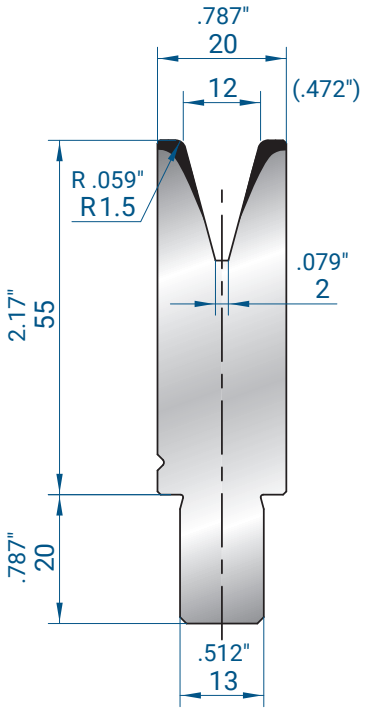

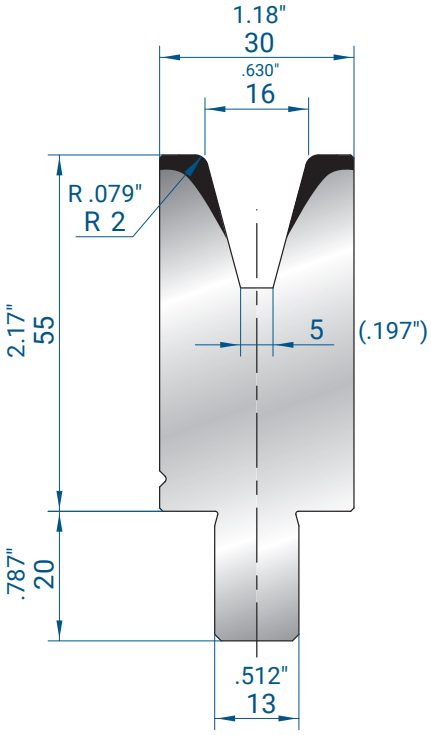

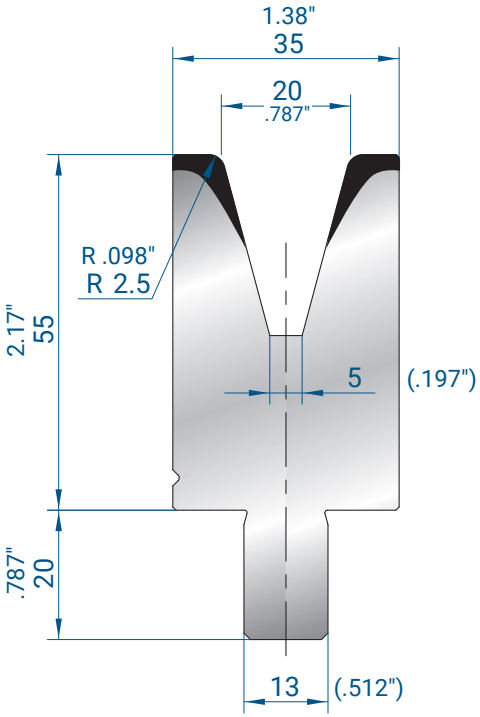

3118

Mat = C45 α = 30°
Max T/m = 40
Max US t/ft = 13.4

1000 mm 39.37"	9.6 kg 21.2 lb
500 mm 19.69"	4.8 kg 10.6 lb
1100 mm 43.31"	10.6 kg 23.4 lb
550 mm 21.65" SHORT SECTIONED	5.3 kg 11.7 lb
100 mm 3.94"	1.0 kg 2.2 lb

3119


Mat = C45 α = 30°
Max T/m = 50
Max US t/ft = 16.8

1000 mm 39.37"	13.2 kg 29.1 lb
500 mm 19.69"	6.6 kg 14.6 lb
1100 mm 43.31"	14.6 kg 32.2 lb
550 mm 21.65" SHORT SECTIONED	7.3 kg 16.1 lb
100 mm 3.94"	1.3 kg 2.9 lb

3120

Mat = C45 α = 30°
Max T/m = 55
Max US t/ft = 18.5

1000 mm 39.37"	14.3 kg 31.5 lb
500 mm 19.69"	7.2 kg 15.9 lb
1100 mm 43.31"	15.8 kg 34.8 lb
550 mm 21.65" SHORT SECTIONED	7.9 kg 17.4 lb
100 mm 3.94"	1.4 kg 3.1 lb

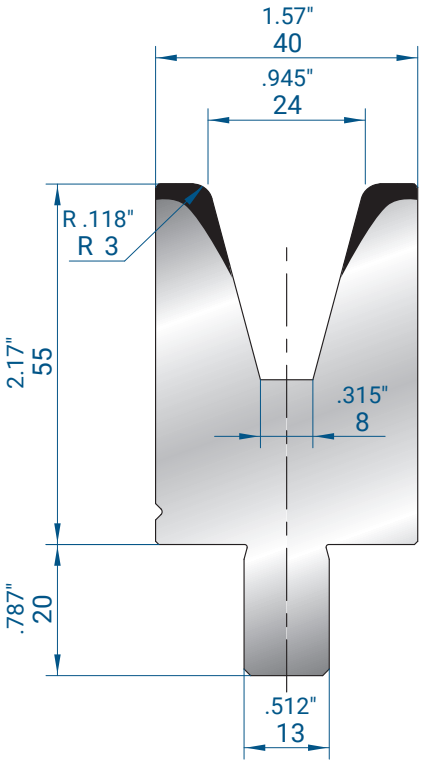

3121


Mat = C45 α = 30°
Max T/m = 65
Max US t/ft = 21.8

1000 mm 39.37"	15.5 kg 34.2 lb
500 mm 19.69"	7.7 kg 17.0 lb
1100 mm 43.31"	17.0 kg 37.5 lb
550 mm 21.65" SHORT SECTIONED	8.5 kg 18.7 lb
100 mm 3.94"	1.5 kg 3.3 lb


3122

Mat = C45
Max T/m = 65
Max US t/ft = 21.8
α = 30°

1000 mm 39.37"	23.4 kg 51.6 lb
500 mm 19.69"	11.7 kg 25.8 lb
1100 mm 43.31"	25.8 kg 56.9 lb
550 mm 21.65" SHORT SECTIONED	12.9 kg 28.4 lb
100 mm 3.94"	2.3 kg 5.1 lb

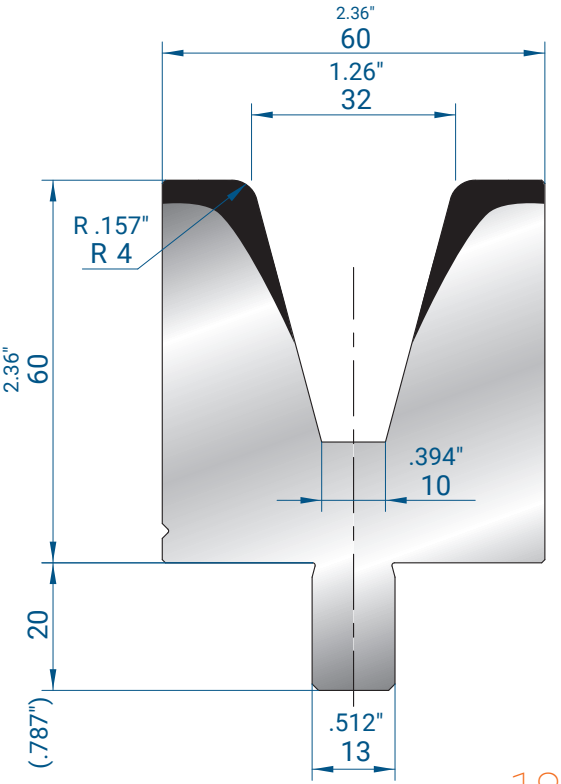

BYSTRONIC STYLE

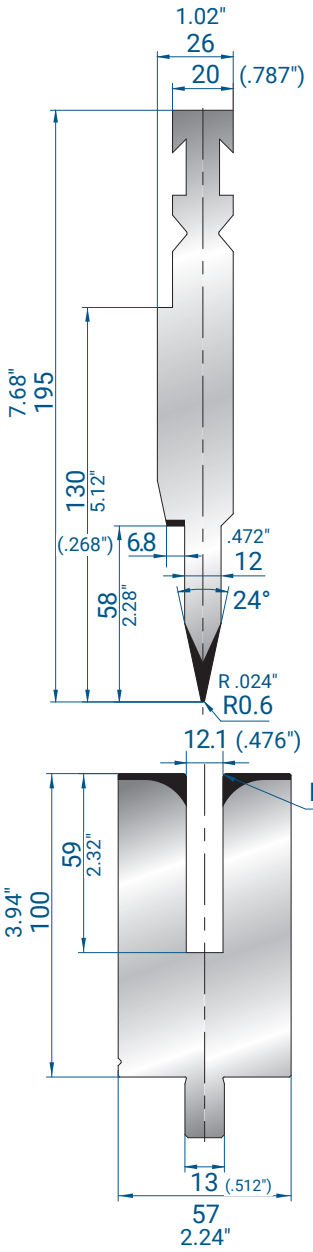

1254

Mat = C45
tempered
Max T/m = 80
Max US t/ft = 26.9

500 mm 19.69"	13.7 kg 30.2 lb
550 mm 21.65" SECTIONED	13.9 kg 30.6 lb
100 mm 3.94"	2.7 kg 6.0 lb


Thickness

Max 1.5 mm (.059")
Mild steel

3175

Mat = C45
tempered
Max T/m = 50
Max US t/ft = 16.8

500 mm 19.69"	20.5 kg 45.2 lb
550 mm 21.65" SECTIONED	22.6 kg 49.8 lb
100 mm 3.94"	4.1 kg 9.0 lb

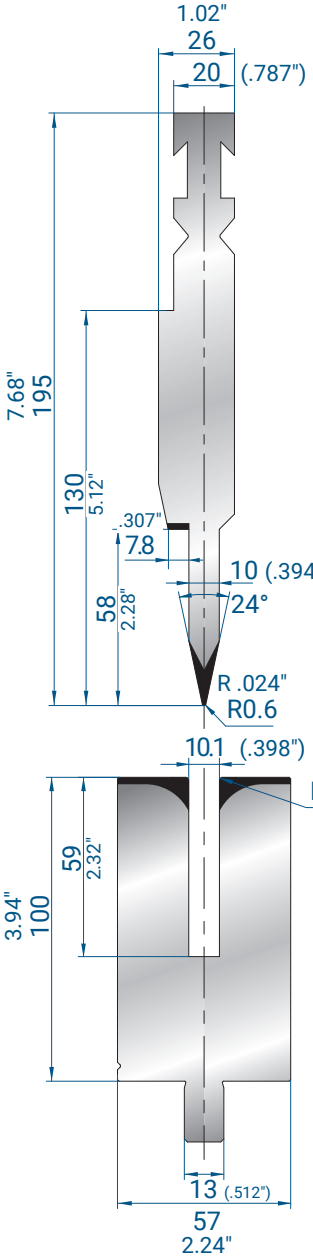

1253

Mat = C45
tempered
Max T/m = 80
Max US t/ft = 26.9

500 mm 19.69"	13.4 kg 29.5 lb
550 mm 21.65" SECTIONED	13.7 kg 30.2 lb
100 mm 3.94"	2.7 kg 6.0 lb

Thickness


Max 1.5 mm (.059")
Mild steel

3174

Mat = C45
tempered
Max T/m = 50
Max US t/ft = 16.8

500 mm 19.69"	21.0 kg 46.3 lb
550 mm 21.65" SECTIONED	23.1 kg 50.9 lb
100 mm 3.94"	4.2 kg 9.3 lb



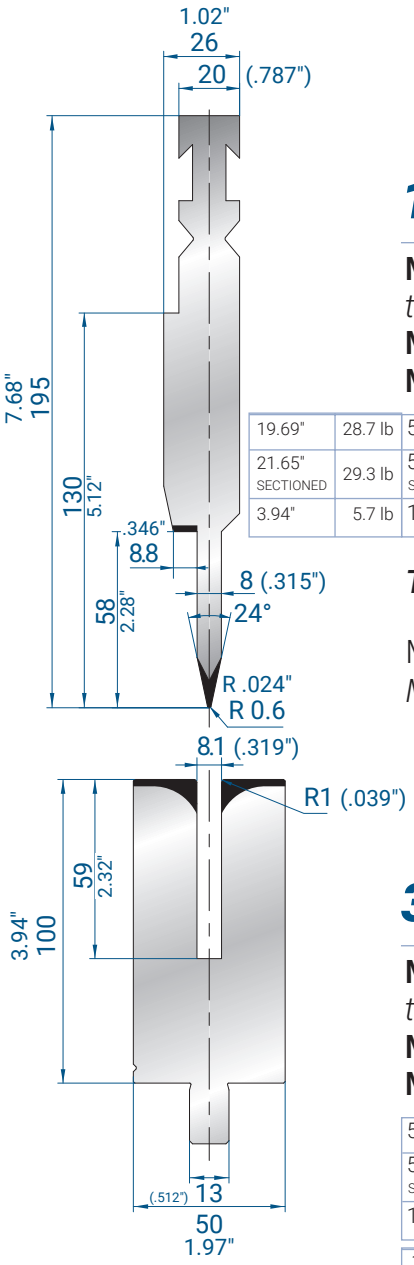


1252


Mat = C45
tempered
Max T/m = 80
Max US t/ft = 26.9

19.69"	28.7 lb	500 mm	13.0 kg
21.65" SECTIONED	29.3 lb	550 mm SECTIONED	13.3 kg
3.94"	5.7 lb	100 mm	2.6 kg

Thickness

Max 1.2 mm (.047")
Mild steel

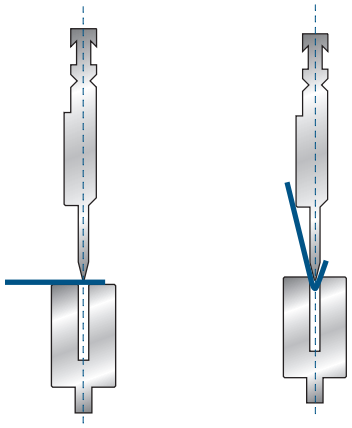

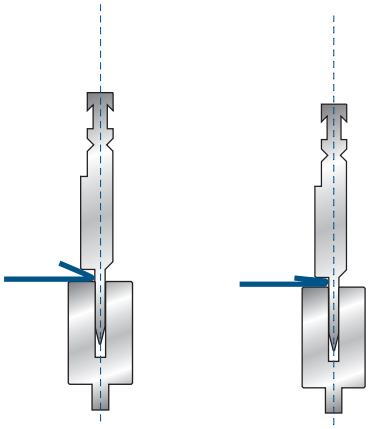


3157

Mat = C45
tempered
Max T/m = 50
Max US t/ft = 16.8

500 mm	18.7 kg
550 mm SECTIONED	20.6 kg
100 mm	3.7 kg

19.69"	41.2 lb
21.65" SECTIONED	45.4 lb
3.94"	8.2 lb

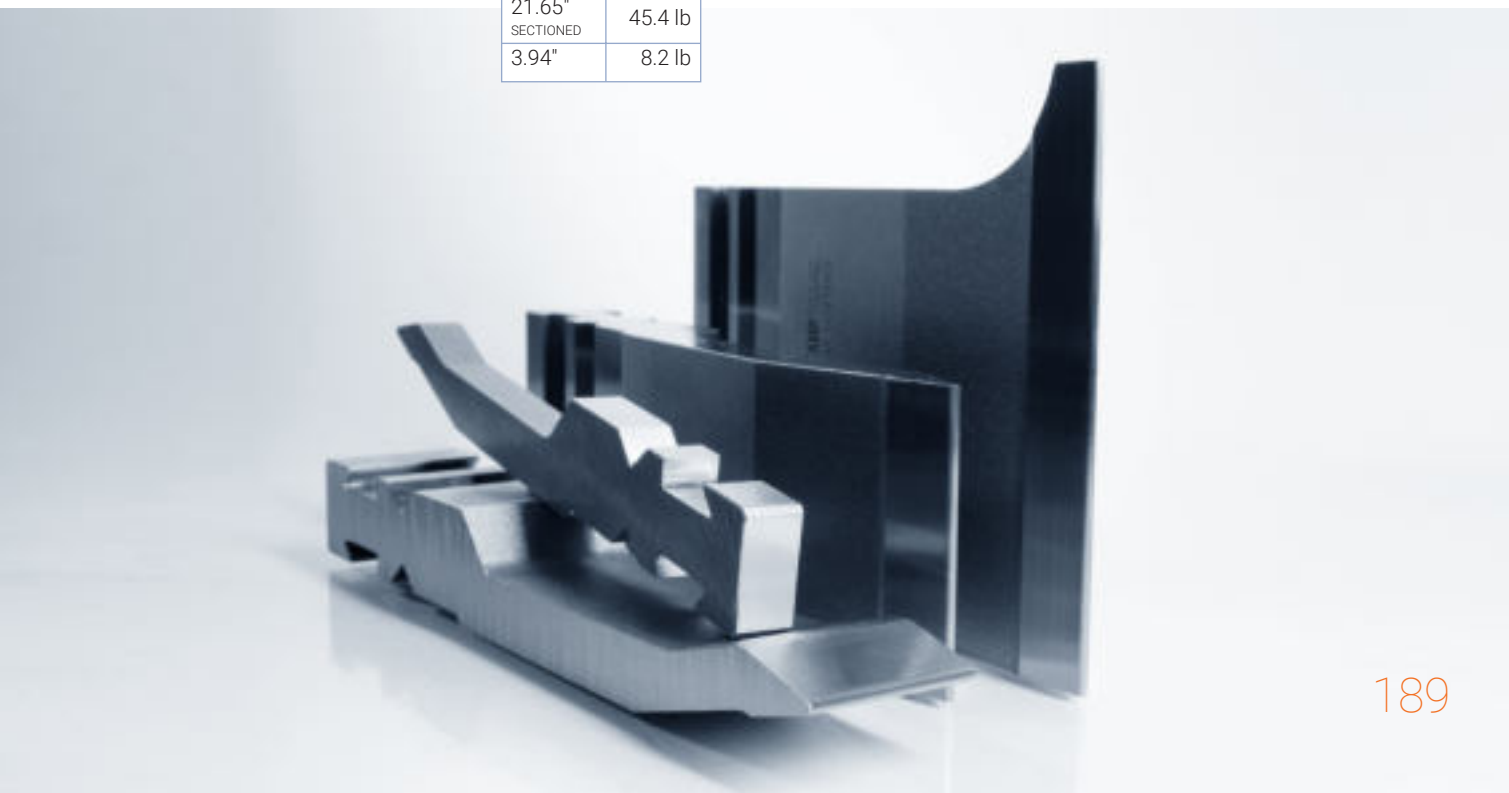


BYSTRONIC STYLE

EUROSTAMP TOOLING
the Italian excellence

ACCESSORIES





P TOOLING
excellence

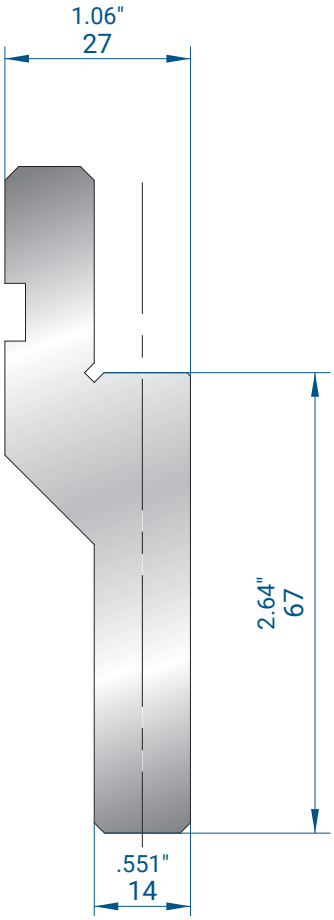

1036

AMADA PROMECAM STYLE
Mat = C45
Max T/m = 80
Max US t/ft = 26.9


830 mm 32.68"	9.2 kg 20.3 lb
410 mm 16.14"	4.5 kg 9.9 lb

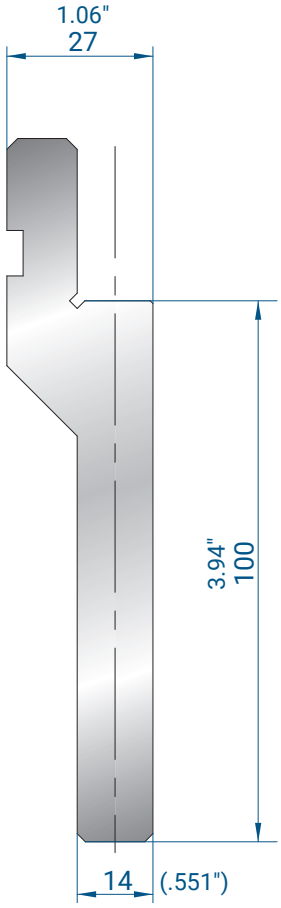

1096

AMADA PROMECAM STYLE
Mat = C45
Max T/m = 80
Max US t/ft = 26.9

830 mm 32.68"	12.2 kg 26.9 lb
410 mm 16.14"	6.0 kg 13.2 lb

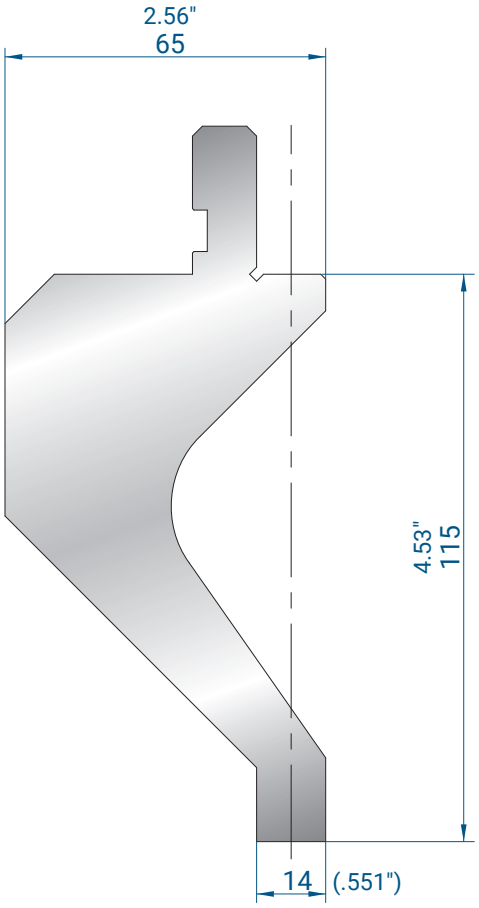


1090

AMADA PROMECAM STYLE
Mat = C45
Max T/m = 50
Max US t/ft = 16.8

830 mm 32.68"	25.6 kg 56.4 lb
410 mm 16.14"	12.6 kg 27.8 lb



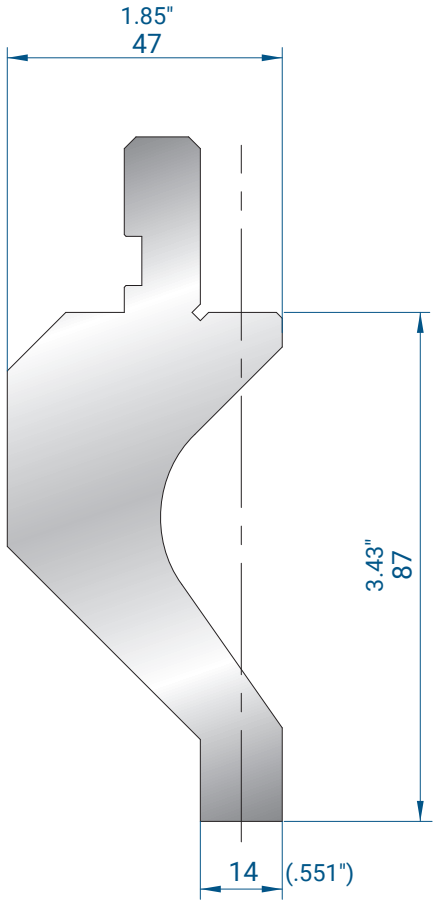


1091

AMADA PROMECAM STYLE

Mat = C45
Max T/m = 50
Max US t/ft = 16.8

830 mm 32.68"	15.8 kg 34.8 lb
410 mm 16.14"	7.8 kg 17.2 lb

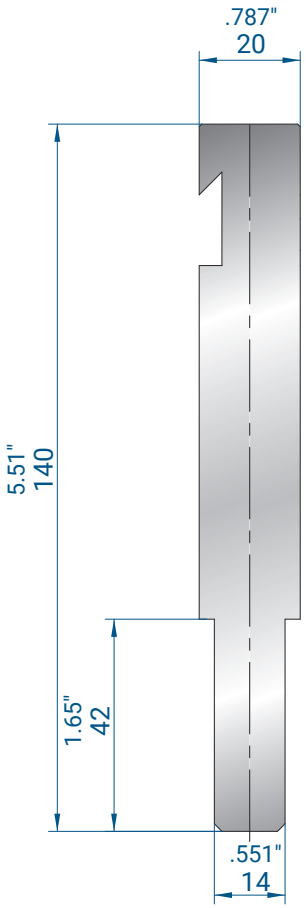


1239

BYSTRONIC R STYLE

Mat = C45
Max T/m = 80
Max US t/ft = 26.9

830 mm 32.68"	15.3 kg 33.7 lb
410 mm 16.14"	7.6 kg 16.8 lb

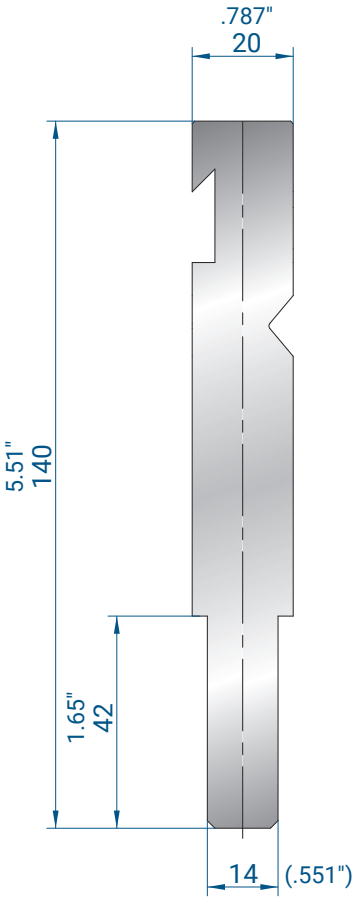


1273

BYSTRONIC RF - A STYLE

Mat = C45
Max T/m = 80
Max US t/ft = 26.9

830 mm 32.68"	15.1 kg 33.3 lb
412 mm 16.22"	7.5 kg 16.5 lb




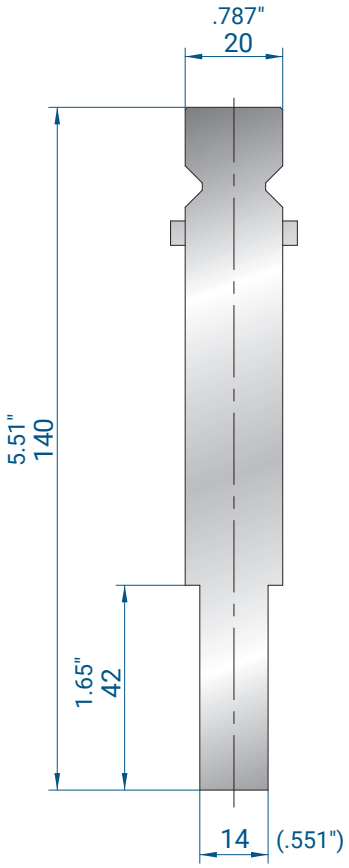

1240

TRUMPF / WILA STYLE
Mat = C45
Max T/m = 80
Max US t/ft = 26.9


830 mm 32.68"	15.6 kg 34.4 lb
410 mm 16.14"	7.7 kg 17.0 lb

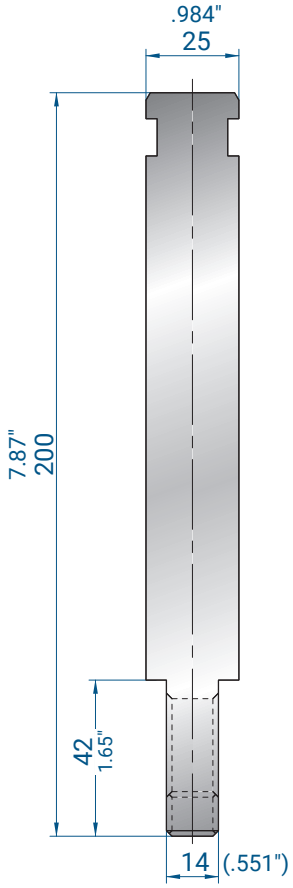

1305

WEINBRENNER STYLE
Mat = C45
Max T/m = 80
Max US t/ft = 26.9


830 mm 32.68"	28.3 kg 62.4 lb
410 mm 16.14"	14.0 kg 30.9 lb

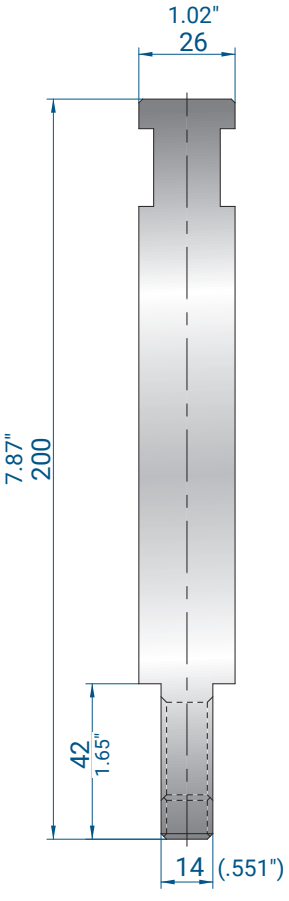

1306

EHT STYLE
Mat = C45
Max T/m = 80
Max US t/ft = 26.9

830 mm 32.68"	28.6 kg 63.1 lb
410 mm 16.14"	14.1 kg 31.1 lb

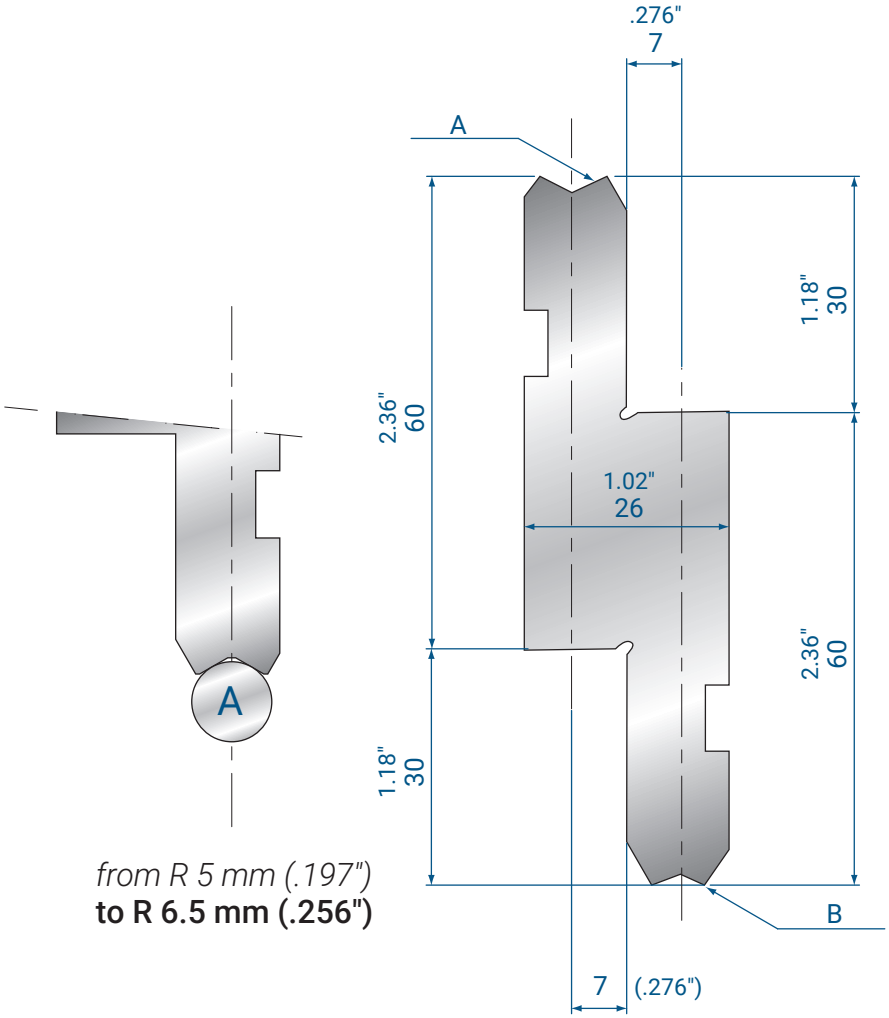


1155

AMADA/PROMECAM STYLE

Mat = C45


830 mm	9.4 kg
410 mm	4.6 kg

32.68"	20.7 lb
16.14"	10.1 lb

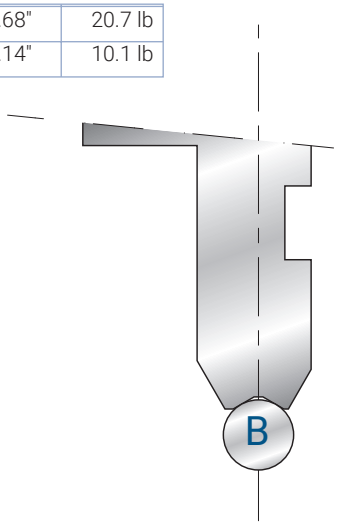


from R 5 mm (.197")
to R 6.5 mm (.256")


from R 3 mm (.118")
to R 4.5 mm (.177")

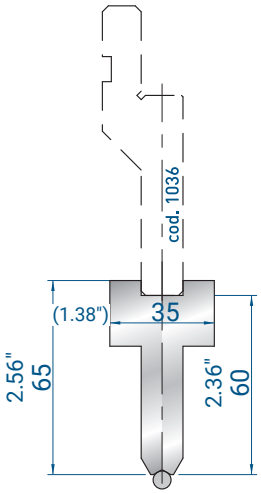

4275

SPARE PART



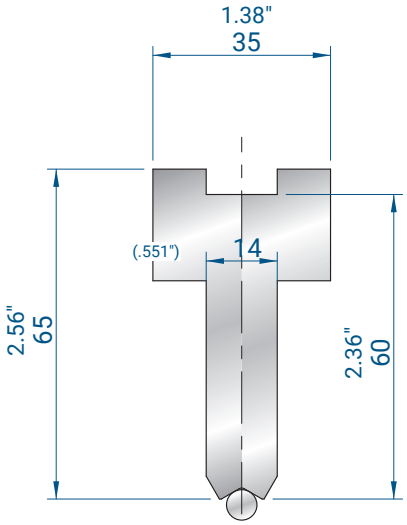

1296

from R 3 mm (.118")
to R 4.5 mm (.177")

830 mm	8.2 kg
410 mm	4.1 kg

32.68"	18.1 lb
16.14"	9.0 lb

1297


from R 5 mm (.197")
to R 6.5 mm (.256")

830 mm	8.2 kg
410 mm	4.1 kg


32.68"	18.1 lb
16.14"	9.0 lb

ONLY FOR HOLDERS

1155 - 1296 - 1297

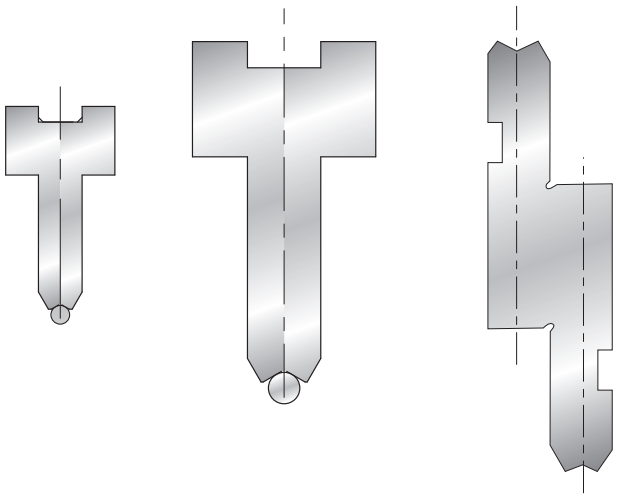


1180



Mat = C45

835 mm	0.2 kg
415 mm	0.1 kg
32.87"	0.4 lb
16.34"	0.2 lb


1181



Mat = C45

835 mm	0.3 kg
415 mm	0.1 kg
32.87"	0.7 lb
16.34"	0.2 lb


1182



Mat = C45

835 mm	0.3 kg
415 mm	0.2 kg
32.87"	0.7 lb
16.34"	0.4 lb


1183



Mat = C45

835 mm	0.4 kg
415 mm	0.2 kg
32.87"	0.9 lb
16.34"	0.4 lb


1184



Mat = C45

835 mm	0.5 kg
415 mm	0.3 kg
32.87"	1.1 lb
16.34"	0.7 lb


1185



Mat = C45

835 mm	0.6 kg
415 mm	0.3 kg
32.87"	1.3 lb
16.34"	0.7 lb


1186

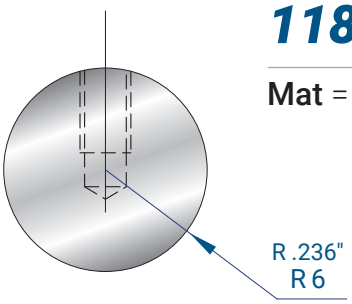

Mat = C45


835 mm	0.7 kg
415 mm	0.4 kg
32.87"	1.5 lb
16.34"	0.9 lb

1187

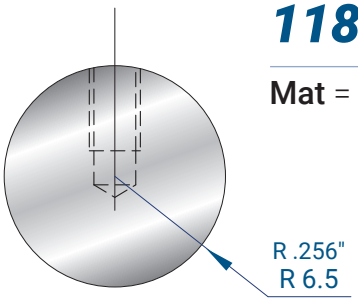

Mat = C45


835 mm	0.9 kg
415 mm	0.4 kg
32.87"	2.0 lb
16.34"	0.9 lb

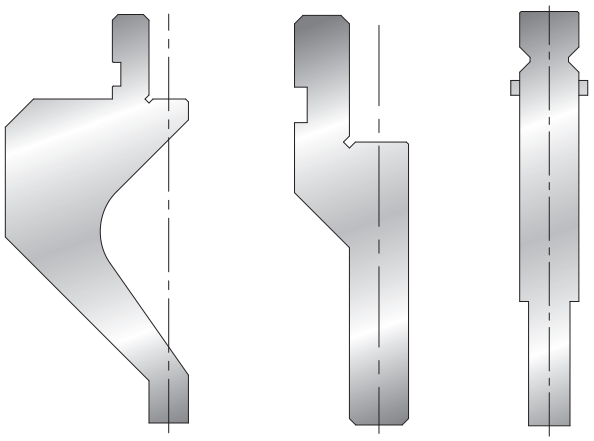

FOR THE HOLDERS, SEE PAGES

192, 193 AND 194


1100



Mat = C45

835 mm 32.87"	0.8 kg 1.8 lb
415 mm 16.34"	0.4 kg 0.9 lb


1101



Mat = C45

835 mm 32.87"	1.0 kg 2.2 lb
415 mm 16.34"	0.5 kg 1.1 lb


1102



Mat = C45

835 mm 32.87"	1.0 kg 2.2 lb
415 mm 16.34"	0.5 kg 1.1 lb


1103



Mat = C45

835 mm 32.87"	1.0 kg 2.2 lb
415 mm 16.34"	0.5 kg 1.1 lb


1037

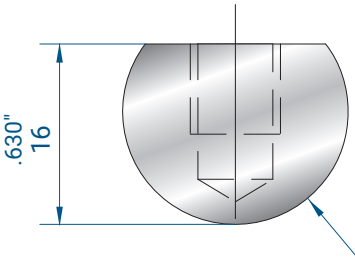

Mat = C45

835 mm 32.87"	2.0 kg 4.4 lb
415 mm 16.34"	1.0 kg 2.2 lb


1104

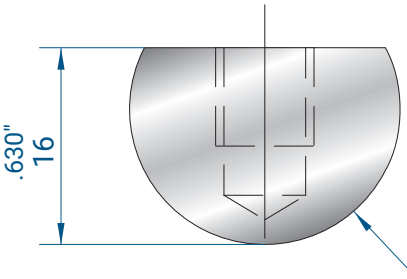

Mat = C45

835 mm 32.87"	2.0 kg 4.4 lb
415 mm 16.34"	1.0 kg 2.2 lb




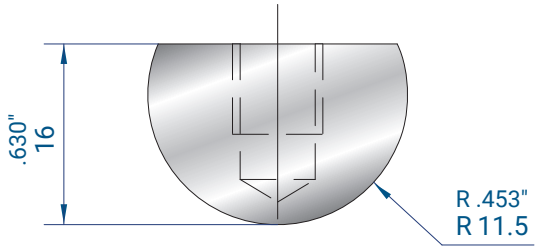

1105

Mat = C45


835 mm	2.0 kg	32.87"	4.4 lb
415 mm	1.0 kg	16.34"	2.2 lb

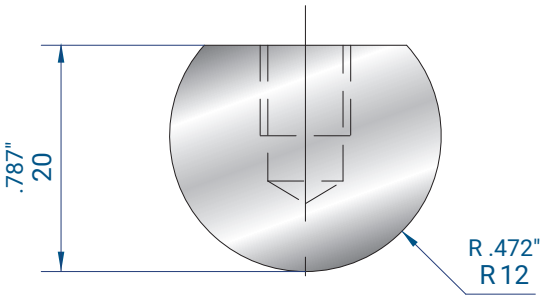

1106

Mat = C45


835 mm	2.0 kg	32.87"	4.4 lb
415 mm	1.0 kg	16.34"	2.2 lb

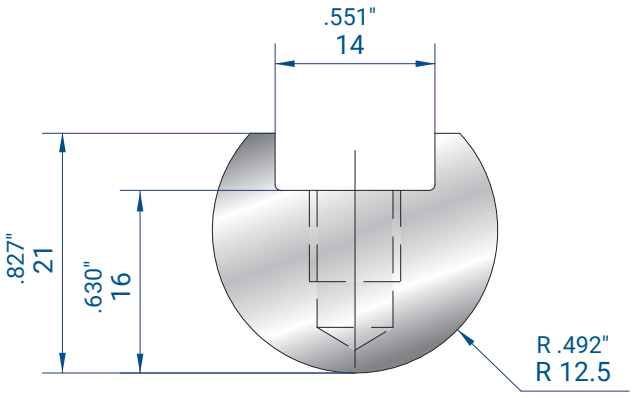

1107

Mat = C45


835 mm	3.0 kg	32.87"	6.6 lb
415 mm	1.5 kg	16.34"	3.3 lb

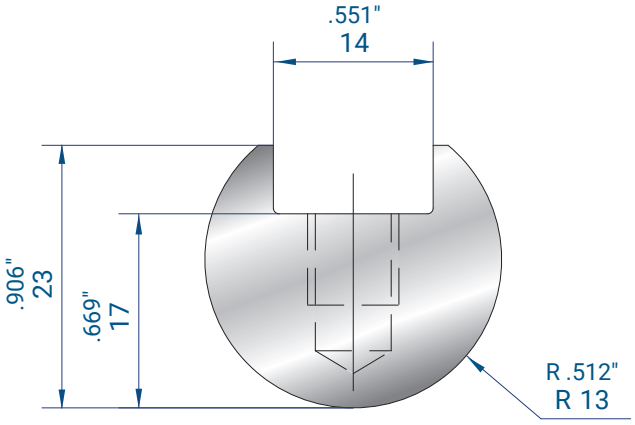

1108

Mat = C45


835 mm	3.0 kg	32.87"	6.6 lb
415 mm	1.0 kg	16.34"	2.2 lb

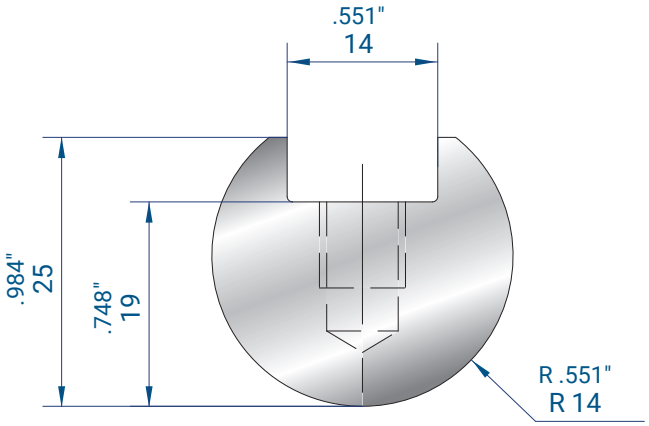

1109

Mat = C45


835 mm	4.0 kg	32.87"	8.8 lb
415 mm	2.0 kg	16.34"	4.4 lb

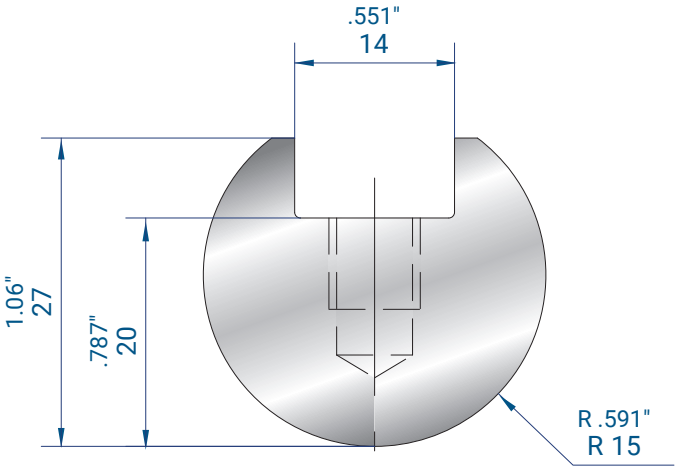

1038

Mat = C45


835 mm	4.0 kg	32.87"	8.8 lb
415 mm	2.0 kg	16.34"	4.4 lb

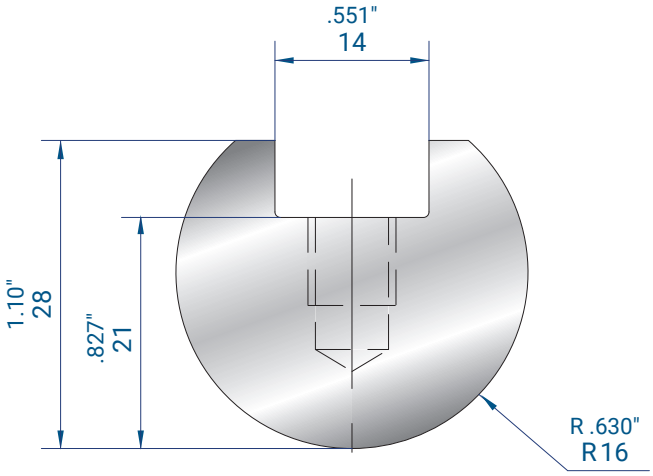

1110

Mat = C45


835 mm	5.0 kg	32.87"	11.0 lb
415 mm	2.0 kg	16.34"	4.4 lb

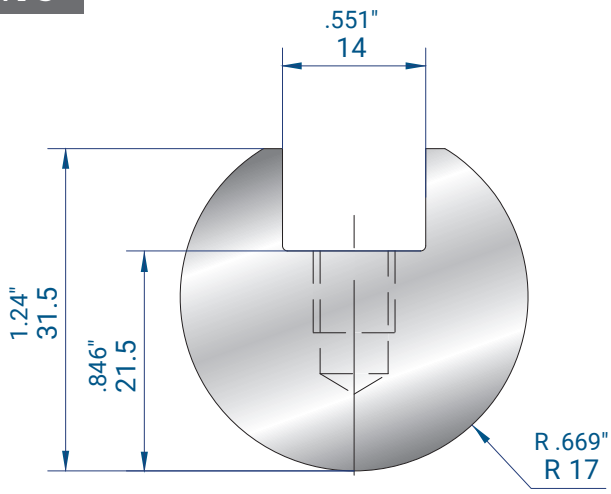

1111

Mat = C45


835 mm	5.0 kg	32.87"	11.0 lb
415 mm	2.5 kg	16.34"	5.5 lb

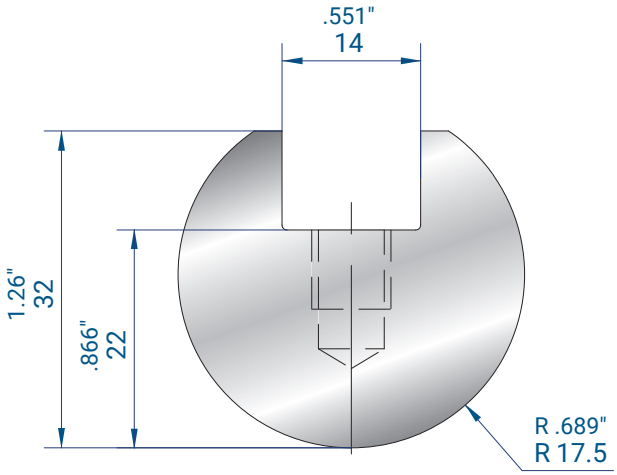

1039

Mat = C45


835 mm	5.0 kg	32.87"	11.0 lb
415 mm	2.5 kg	16.34"	5.5 lb

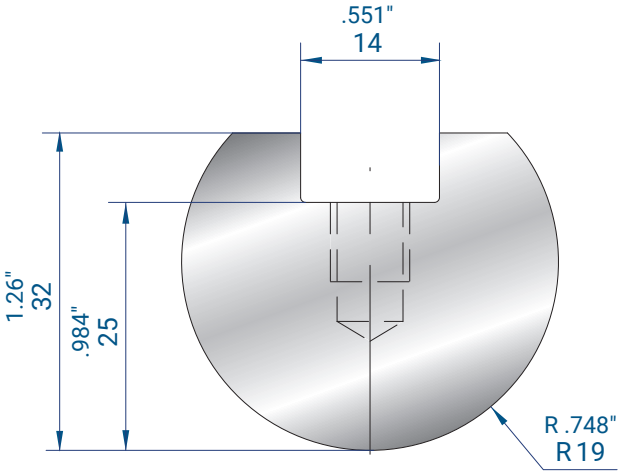

1112

Mat = C45


835 mm	6.0 kg	32.87"	13.2 lb
415 mm	3.0 kg	16.34"	6.6 lb

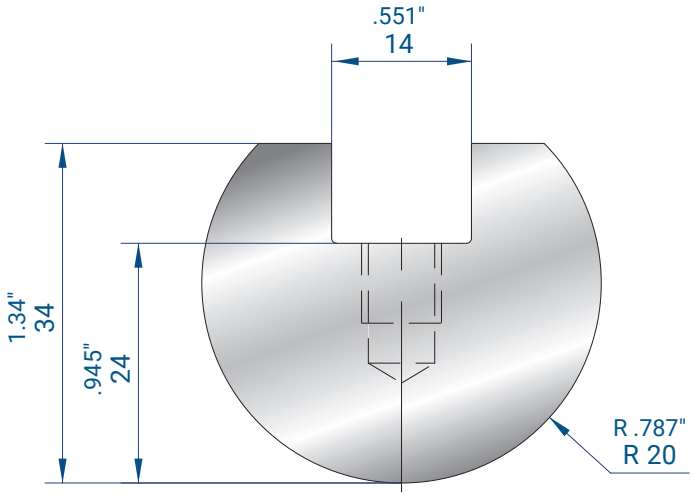

1040

Mat = C45


835 mm	6.0 kg	32.87"	13.2 lb
415 mm	3.0 kg	16.34"	6.6 lb

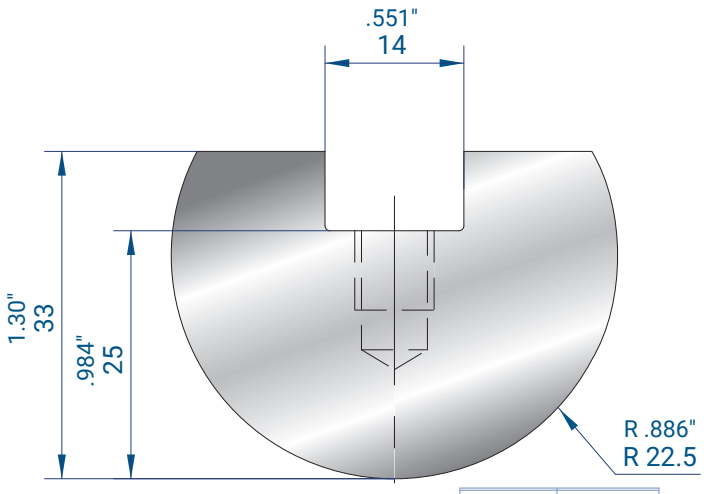

1113

Mat = C45


		32.87"	17.6 lb
		16.34"	8.8 lb
835 mm	8.0 kg		
415 mm	4.0 kg		

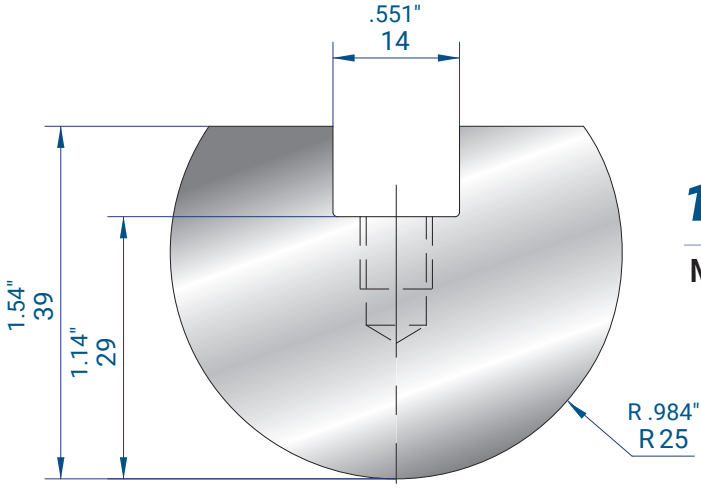

1041

Mat = C45

835 mm	9.0 kg	32.87"	19.8 lb
415 mm	4.0 kg	16.34"	8.8 lb

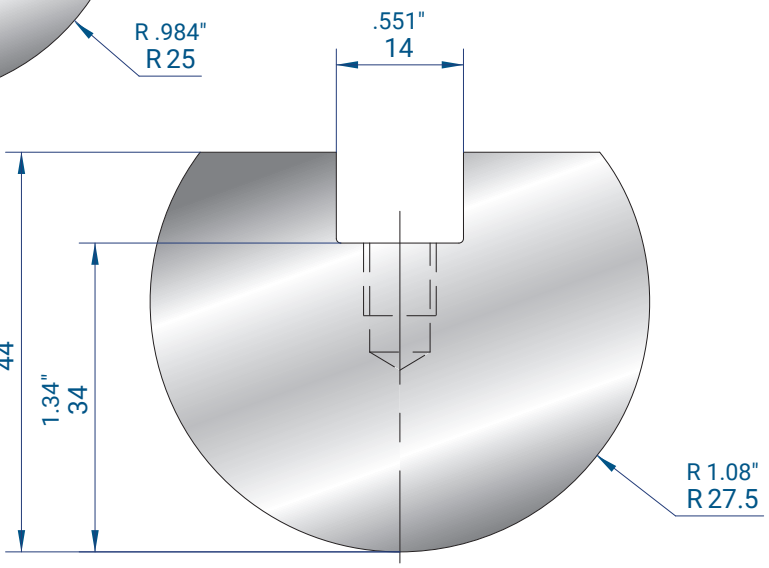


1114

Mat = C45

835 mm	12.0 kg
415 mm	6.0 kg


32.87"	26.5 lb
16.34"	13.2 lb

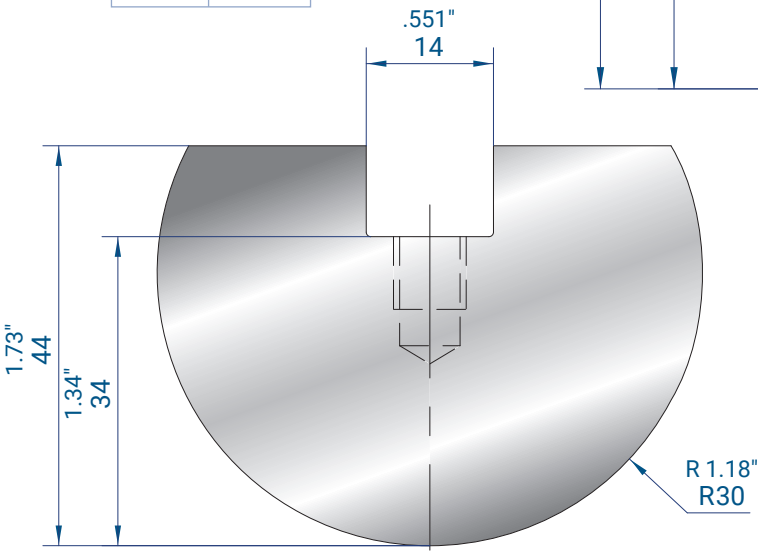

1042

Mat = C45

835 mm	13.0 kg	32.87"	28.7 lb
415 mm	6.0 kg	16.34"	13.2 lb

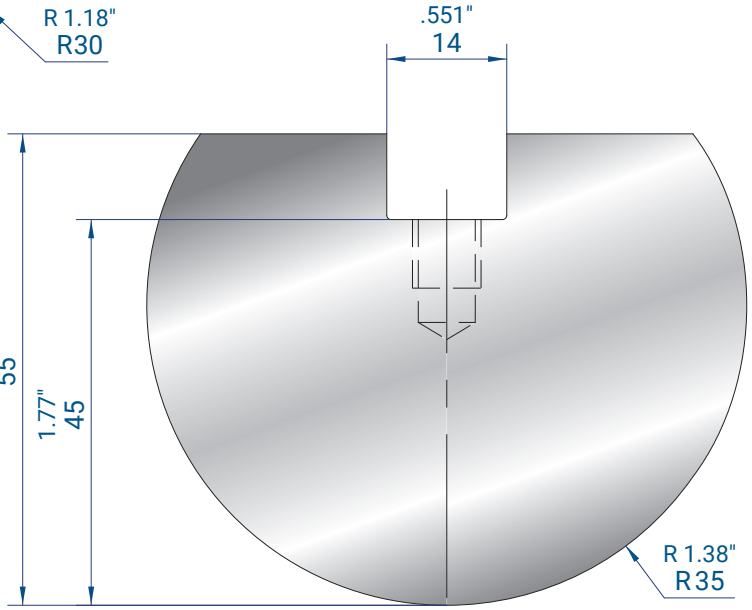


1115

Mat = C45

835 mm	21.0 kg
415 mm	10.0 kg


32.87"	46.3 lb
16.34"	22.0 lb

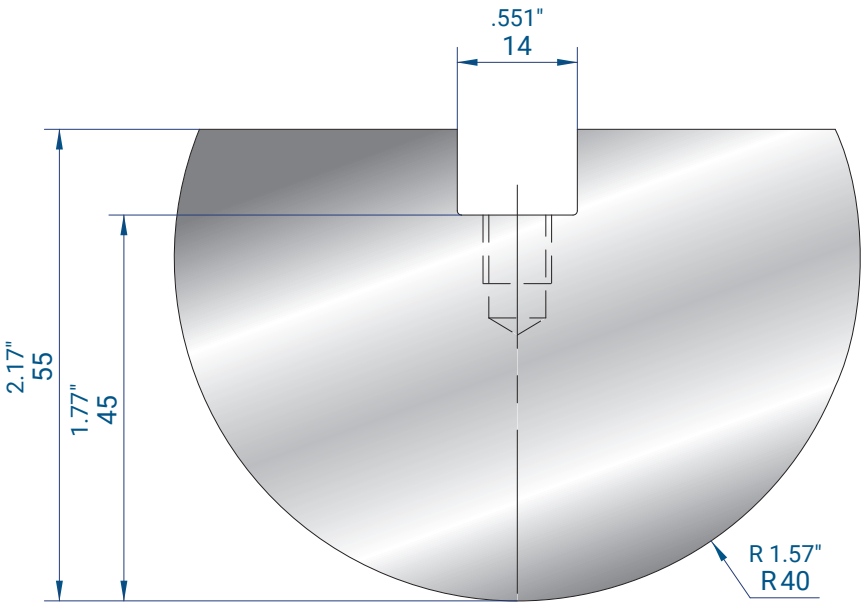

1116

Mat = C45

835 mm	24.0 kg	32.87"	52.9 lb
415 mm	12.0 kg	16.34"	26.5 lb

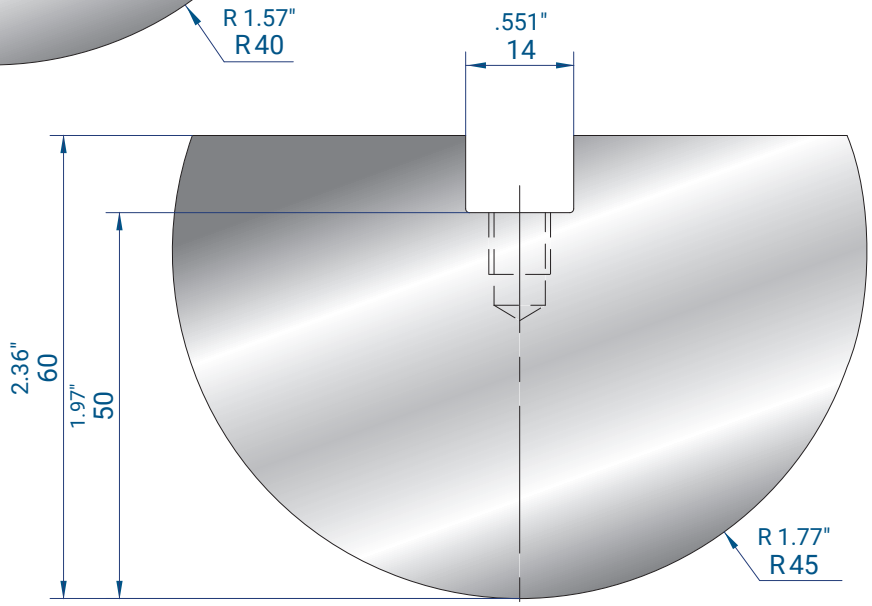


1117

Mat = C45

835 mm	29.0 kg
415 mm	14.0 kg

32.87"	63.9 lb
16.34"	30.9 lb

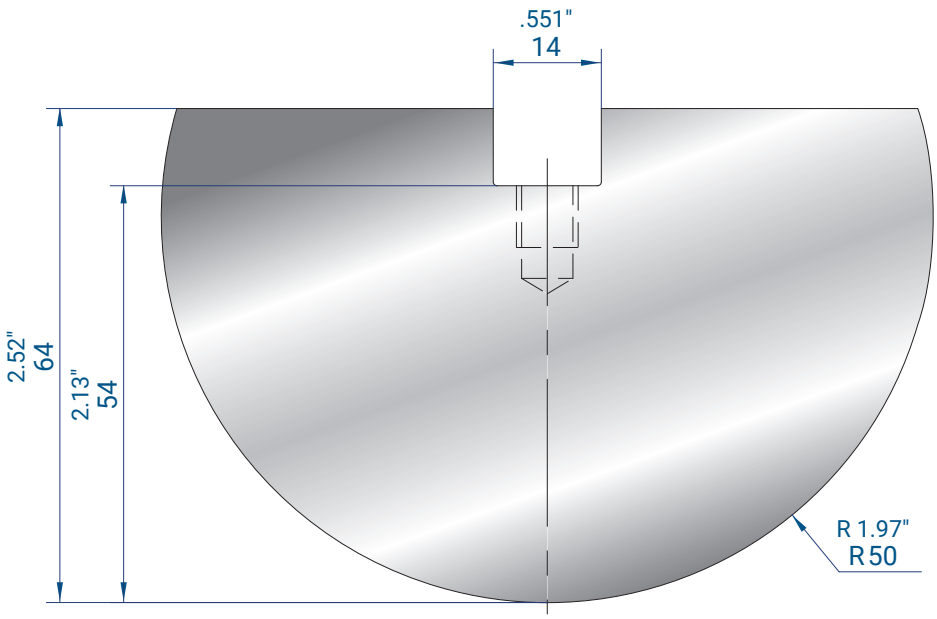


1118

Mat = C45

835 mm	34.0 kg
415 mm	17.0 kg

32.87"	75.0 lb
16.34"	37.5 lb




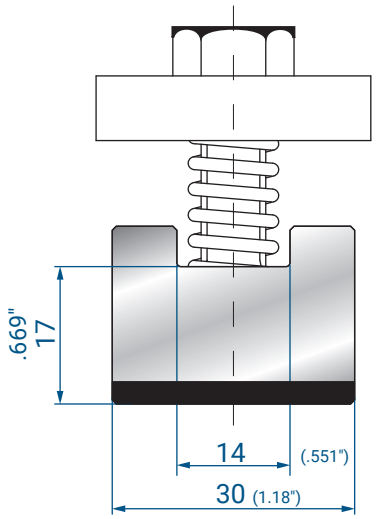


1043

Mat = C45

32.87"	8.4 lb	835 mm	3.8 kg
16.34"	4.2 lb	415 mm	1.9 kg

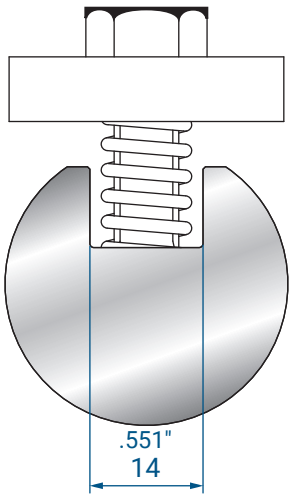




4274

Mat = C45

SPRING + SCREW + PLATE

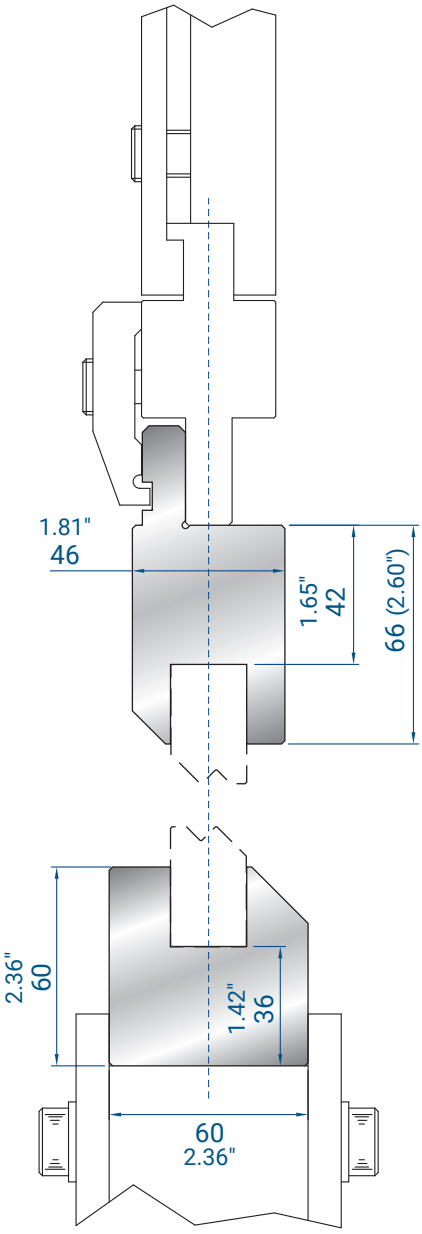


1150

AMADA / PROMECAM STYLE

Mat = C45

835 mm 32.87"	37.1 kg 81.8 lb
415 mm 16.34"	18.4 kg 40.6 lb

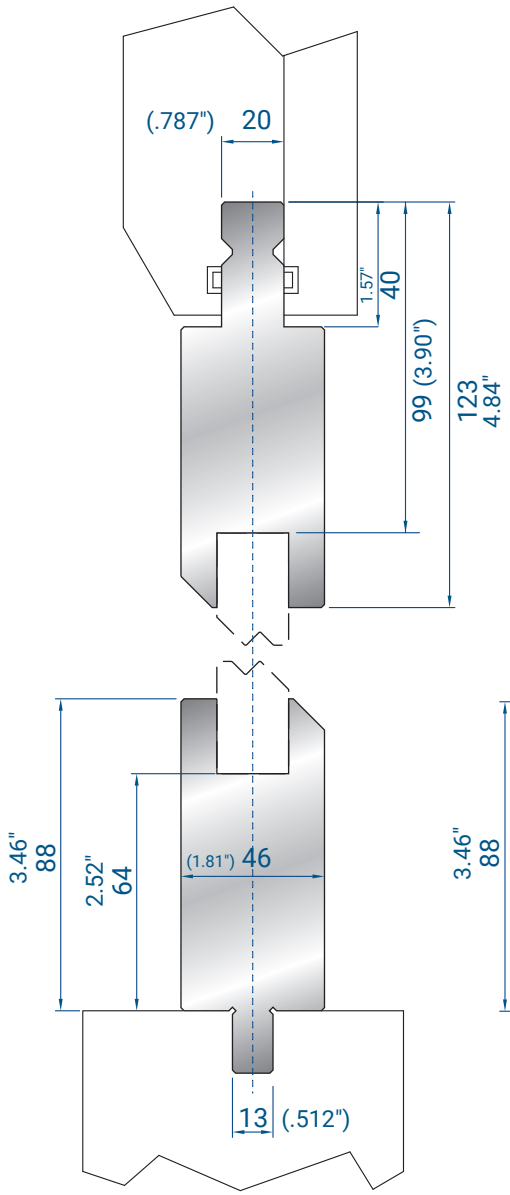


1242

TRUMPF /WILA STYLE

Mat = C45

835 mm 32.87"	50.0 kg 110 lb
415 mm 16.34"	24.9 kg 54.9 lb

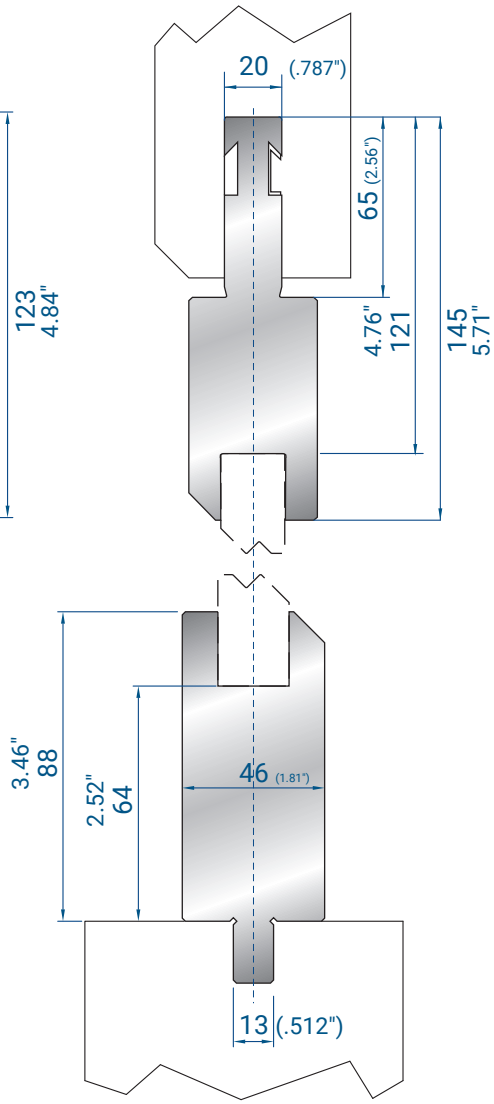

1198


BYSTRONIC STYLE

Mat = C45

835 mm 32.87"	51.7 kg 114 lb
415 mm 16.34"	25.7 kg 56.7 lb

UPPER TANG **RF-A**


INCLUDED ON REQUEST AT NO CHARGE

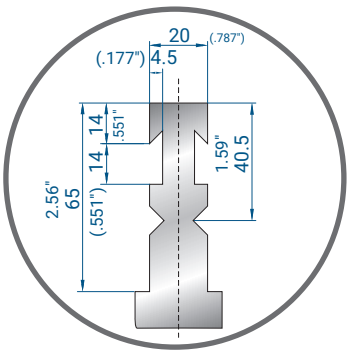

CODE	OFFSET Z	ANGLE	MAX SHEET THICKNESS
1130	1 (.039")	160°	0.5 mm (.020")
1276	1 (.039")	90°	0.5 mm (.020")
1131	1.5 (.059")	160°	0.6 mm (.024")
1277	1.5 (.059")	90°	0.6 mm (.024")
1132	2 (.079")	150°	0.8 mm (.031")
1274	2 (.079")	90°	0.8 mm (.031")
1133	2.5 (.098")	140°	1.0 mm (.039")
1275	2.5 (.098")	90°	1.0 mm (.039")
1134	3 (.118")	90°	1.0 mm (.039")
1135	3.5 (.138")	90°	1.2 mm (.047")
1136	4 (.157")	90°	1.2 mm (.047")
1137	4.5 (.177")	90°	1.5 mm (.059")
1138	5 (.197")	90°	1.5 mm (.059")
1139	5.5 (.217")	90°	1.5 mm (.059")
1140	6 (.236")	90°	1.5 mm (.059")
1141	6.5 (.256")	90°	1.5 mm (.059")
1142	7 (.276")	90°	2.0 mm (.079")
1143	7.5 (.295")	90°	2.0 mm (.079")
1144	8 (.315")	90°	2.5 mm (.098")
1145	9 (.354")	90°	2.5 mm (.098")
1146	10 (.394")	90°	3.0 mm (.118")
1147	11 (.433")	90°	3.0 mm (.118")
1148	12 (.472")	90°	3.0 mm (.118")
1278	13 (.512")	90°	3.0 mm (.118")
1279	14 (.551")	90°	3.0 mm (.118")
1280	15 (.591")	90°	3.0 mm (.118")



OFFSET TOOL - 140° - 150° - 160°

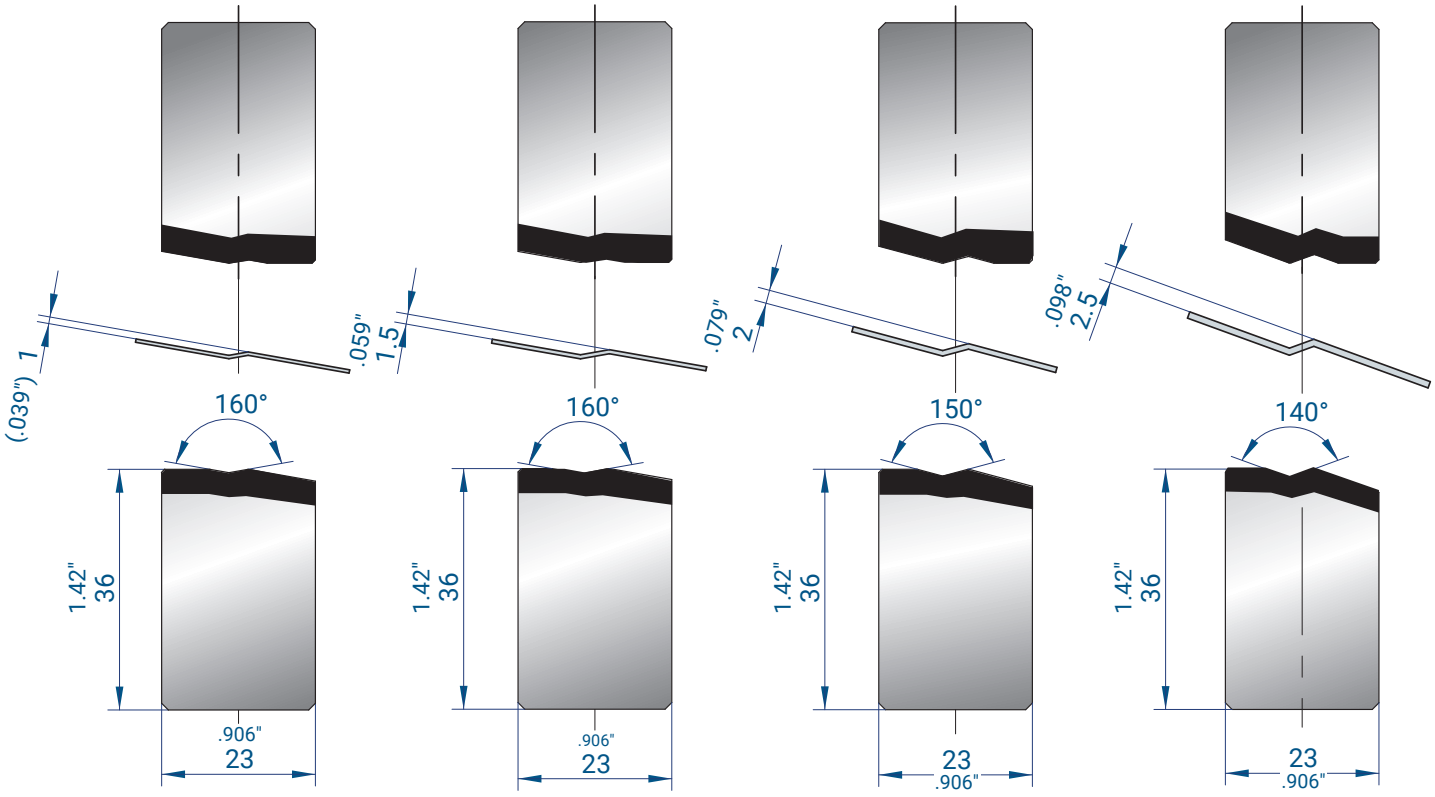

1130

160°
Mat = C45

32.87"	23.6 lb	835 mm	10.7 kg
16.34"	11.7 lb	415 mm	5.3 kg

1131

160°
Mat = C45

32.87"	23.6 lb	835 mm	10.7 kg
16.34"	11.7 lb	415 mm	5.3 kg

1132

150°
Mat = C45

32.87"	23.4 lb	835 mm	10.6 kg
16.34"	11.7 lb	415 mm	5.3 kg


1133

140°
Mat = C45

32.87"	23.1 lb	835 mm	10.5 kg
16.34"	11.5 lb	415 mm	5.2 kg

TO CHOOSE THE RIGHT OFFSET TOOL FOR YOUR SHEET THICKNESS, SEE THE CHART ON PAGE 204



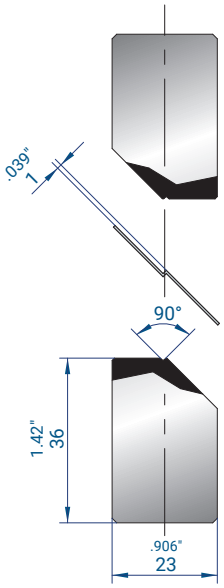


1276

90°

Mat = C45

835 mm 32.87"	10.0 kg 22.0 lb
415 mm 16.34"	5.0 kg 11.0 lb

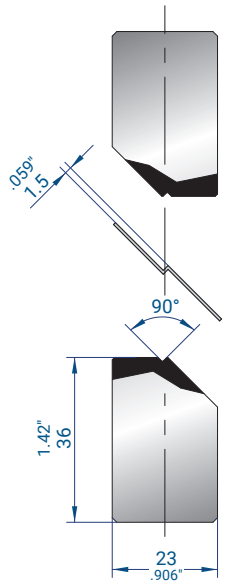


1277

90°

Mat = C45

835 mm 32.87"	10.0 kg 22.0 lb
415 mm 16.34"	5.0 kg 11.0 lb

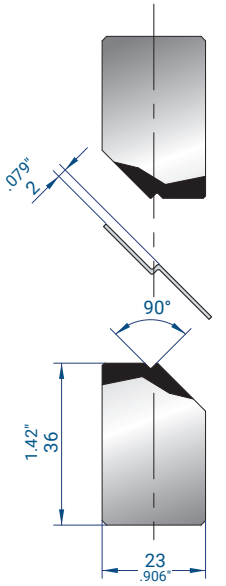


1274

90°

Mat = C45

835 mm 32.87"	10.0 kg 22.0 lb
415 mm 16.34"	5.0 kg 11.0 lb

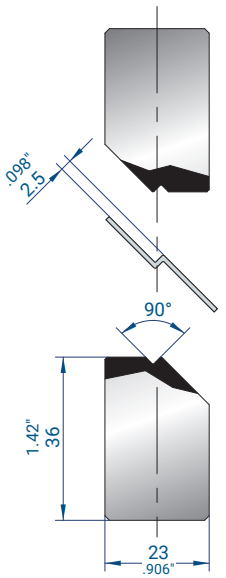


1275

90°

Mat = C45

835 mm 32.87"	10.1 kg 22.3 lb
415 mm 16.34"	5.0 kg 11.0 lb

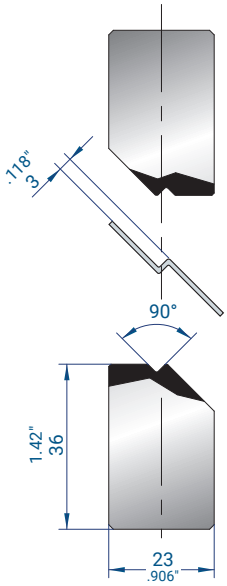


1134

90°

Mat = C45

835 mm 32.87"	10.1 kg 22.3 lb
415 mm 16.34"	5.0 kg 11.0 lb

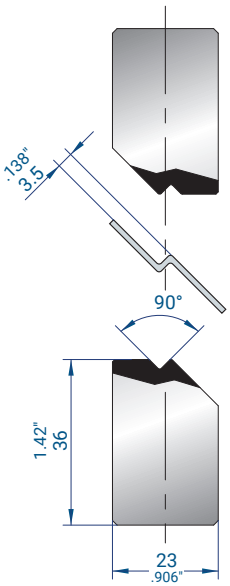


1135

90°

Mat = C45

835 mm 32.87"	10.1 kg 22.3 lb
415 mm 16.34"	5.0 kg 11.0 lb

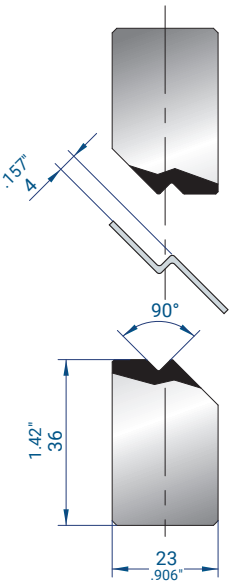


1136

90°

Mat = C45

835 mm 32.87"	10.1 kg 22.3 lb
415 mm 16.34"	5.0 kg 11.0 lb

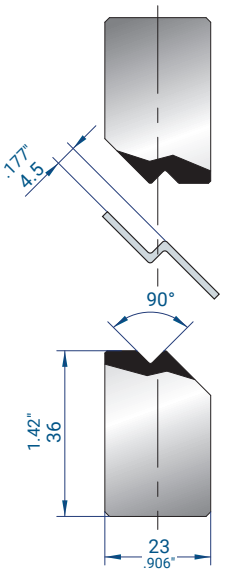


1137

90°

Mat = C45

835 mm 32.87"	10.1 kg 22.3 lb
415 mm 16.34"	5.0 kg 11.0 lb


TO CHOOSE THE RIGHT OFFSET TOOL FOR YOUR SHEET THICKNESS, SEE THE CHART ON PAGE 204

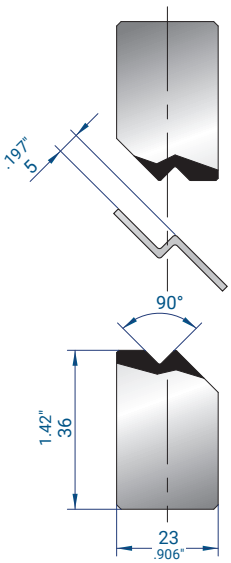

1138

90°
Mat = C45


835 mm	10.1 kg
415 mm	5.0 kg
32.87"	22.3 lb
16.34"	11.0 lb

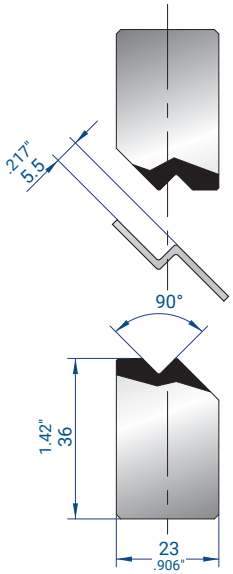

1139

90°
Mat = C45


835 mm	10.1 kg
415 mm	5.0 kg
32.87"	22.3 lb
16.34"	11.0 lb

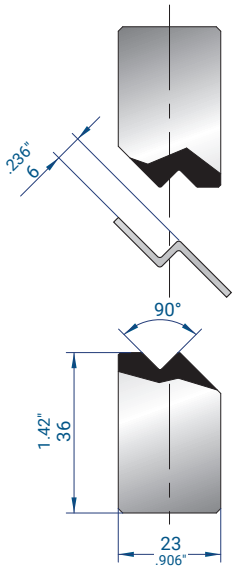

1140

90°
Mat = C45

835 mm	10.1 kg
415 mm	5.0 kg
32.87"	22.3 lb
16.34"	11.0 lb

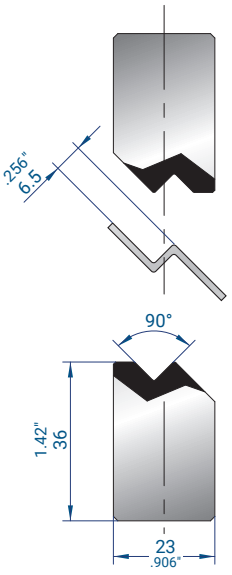



1141

90°
Mat = C45

835 mm	10.0 kg
415 mm	5.0 kg
32.87"	22.0 lb
16.34"	11.0 lb

TO CHOOSE THE RIGHT OFFSET TOOL FOR YOUR SHEET THICKNESS, SEE THE CHART ON PAGE 204

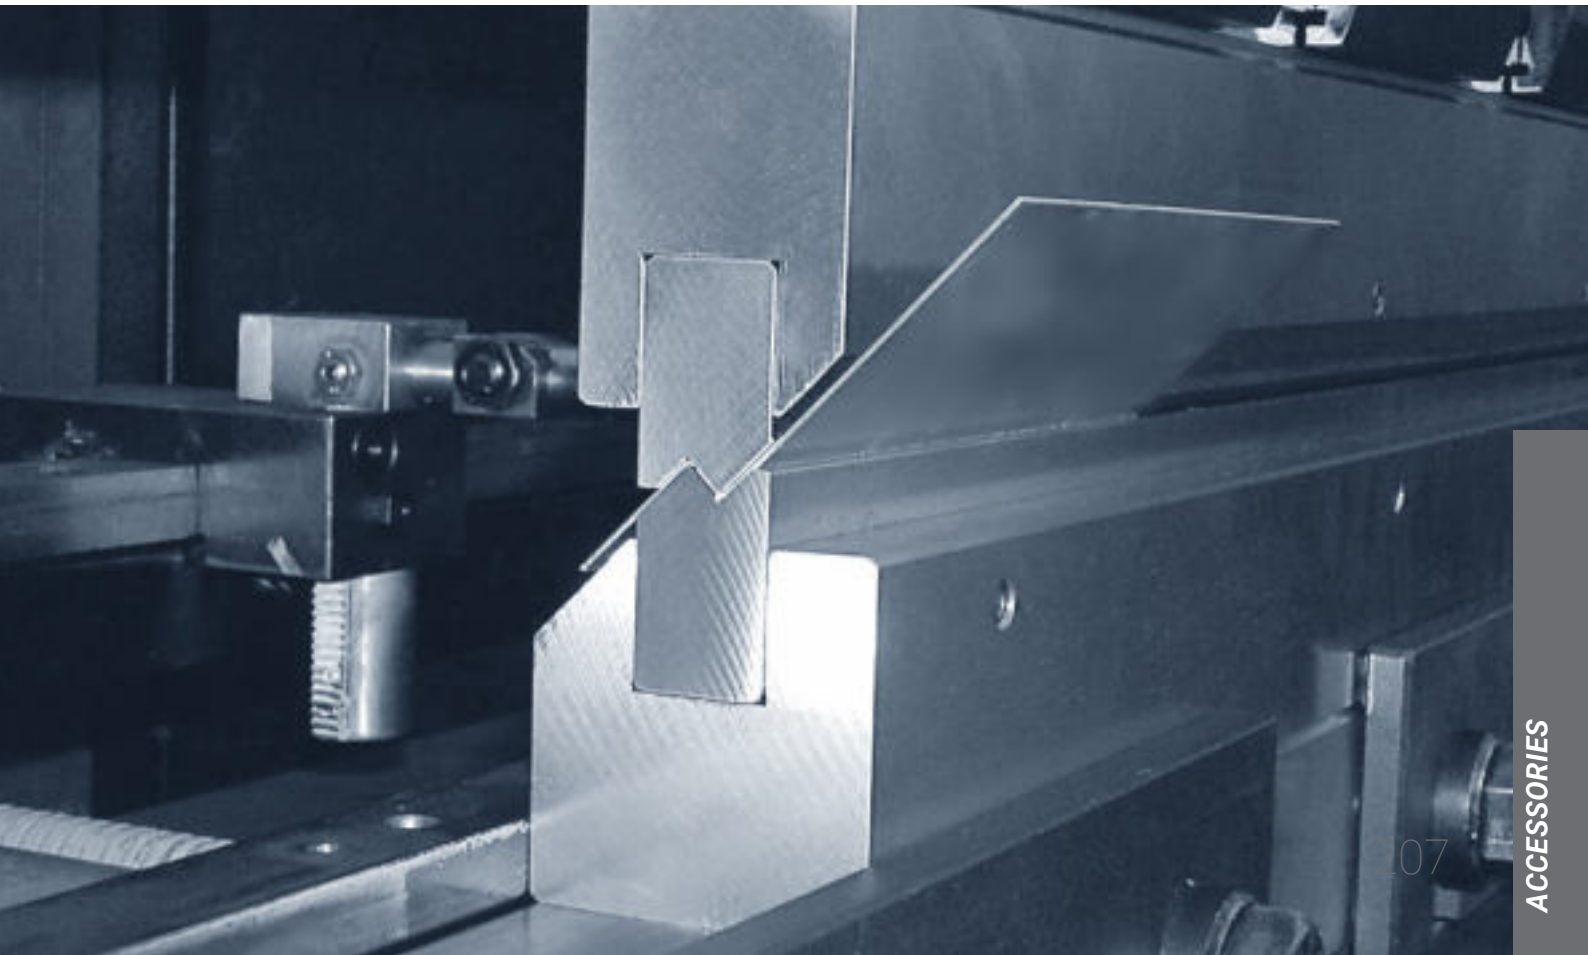

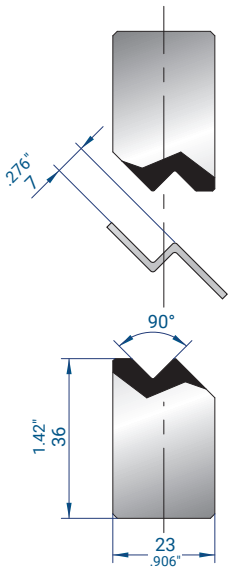


1142

90°
Mat = C45

835 mm	10.0 kg
415 mm	5.0 kg


32.87"	22.0 lb
16.34"	11.0 lb

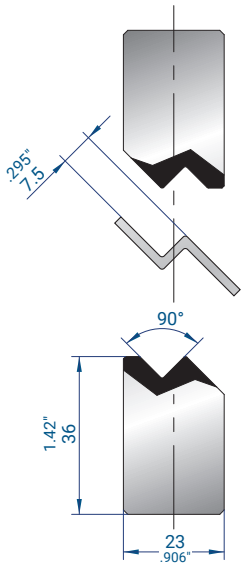

1143

90°
Mat = C45


32.87"	22.0 lb	835 mm	10.0 kg
16.34"	11.0 lb	415 mm	5.0 kg

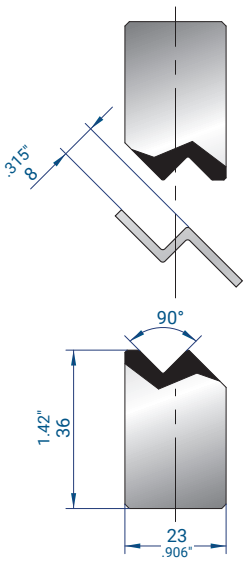

1144

90°
Mat = C45


32.87"	22.0 lb	835 mm	10.0 kg
16.34"	11.0 lb	415 mm	5.0 kg

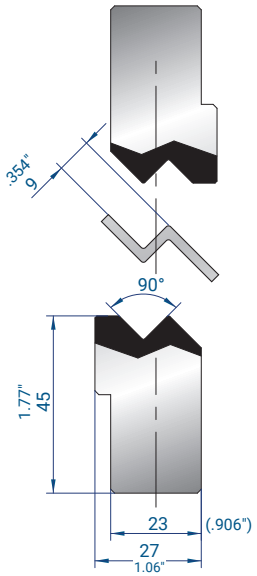

1145

90°
Mat = C45

32.87"	30.0 lb	835 mm	13.6 kg
16.34"	15.0 lb	415 mm	6.8 kg

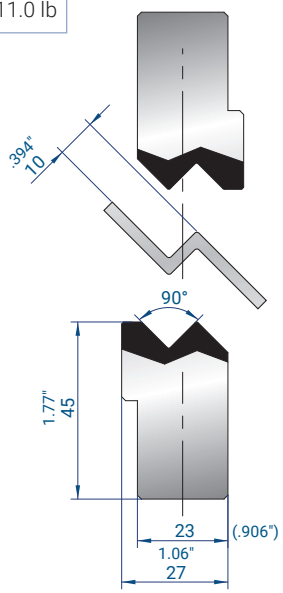


1146

90°
Mat = C45

835 mm	13.6 kg
415 mm	6.7 kg

32.87"	30.0 lb
16.34"	14.8 lb

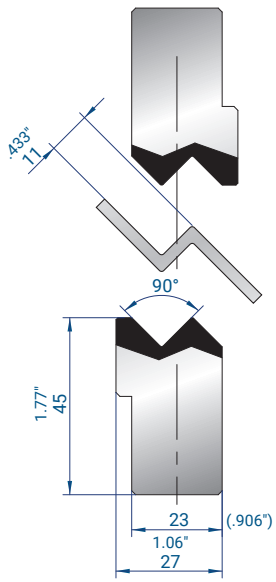


1147

90°
Mat = C45

835 mm	13.5 kg
415 mm	6.7 kg

32.87"	29.8 lb
16.34"	14.8 lb

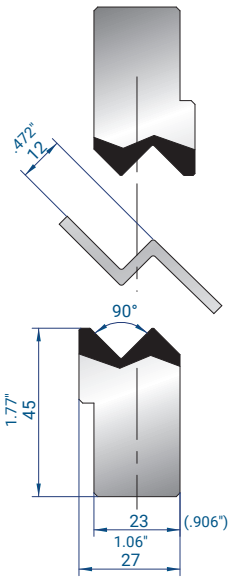


1148

90°
Mat = C45

835 mm	13.3 kg
415 mm	6.6 kg

32.87"	29.3 lb
16.34"	14.6 lb

TO CHOOSE THE RIGHT OFFSET TOOL FOR YOUR SHEET THICKNESS, SEE THE CHART ON PAGE 204

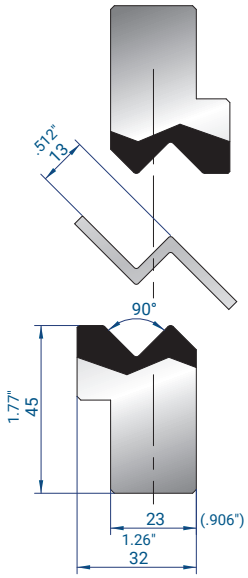


1278

90°

Mat = C45

835 mm	14.6 kg
415 mm	7.3 kg
32.87"	32.2 lb
16.34"	16.1 lb

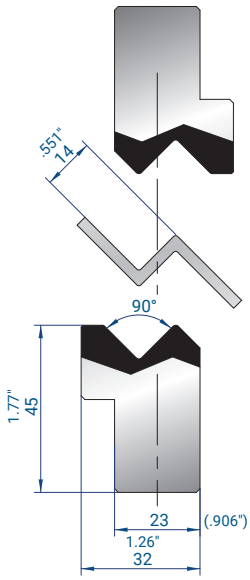


1279

90°

Mat = C45

835 mm	14.5 kg
415 mm	7.3 kg
32.87"	32.0 lb
16.34"	16.1 lb

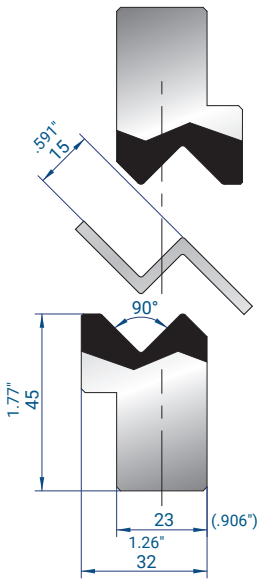


1280


90°

Mat = C45

835 mm	14.3 kg
415 mm	7.1 kg
32.87"	31.5 lb
16.34"	15.7 lb

TO CHOOSE THE RIGHT OFFSET TOOL FOR YOUR SHEET THICKNESS, SEE THE CHART ON PAGE 204

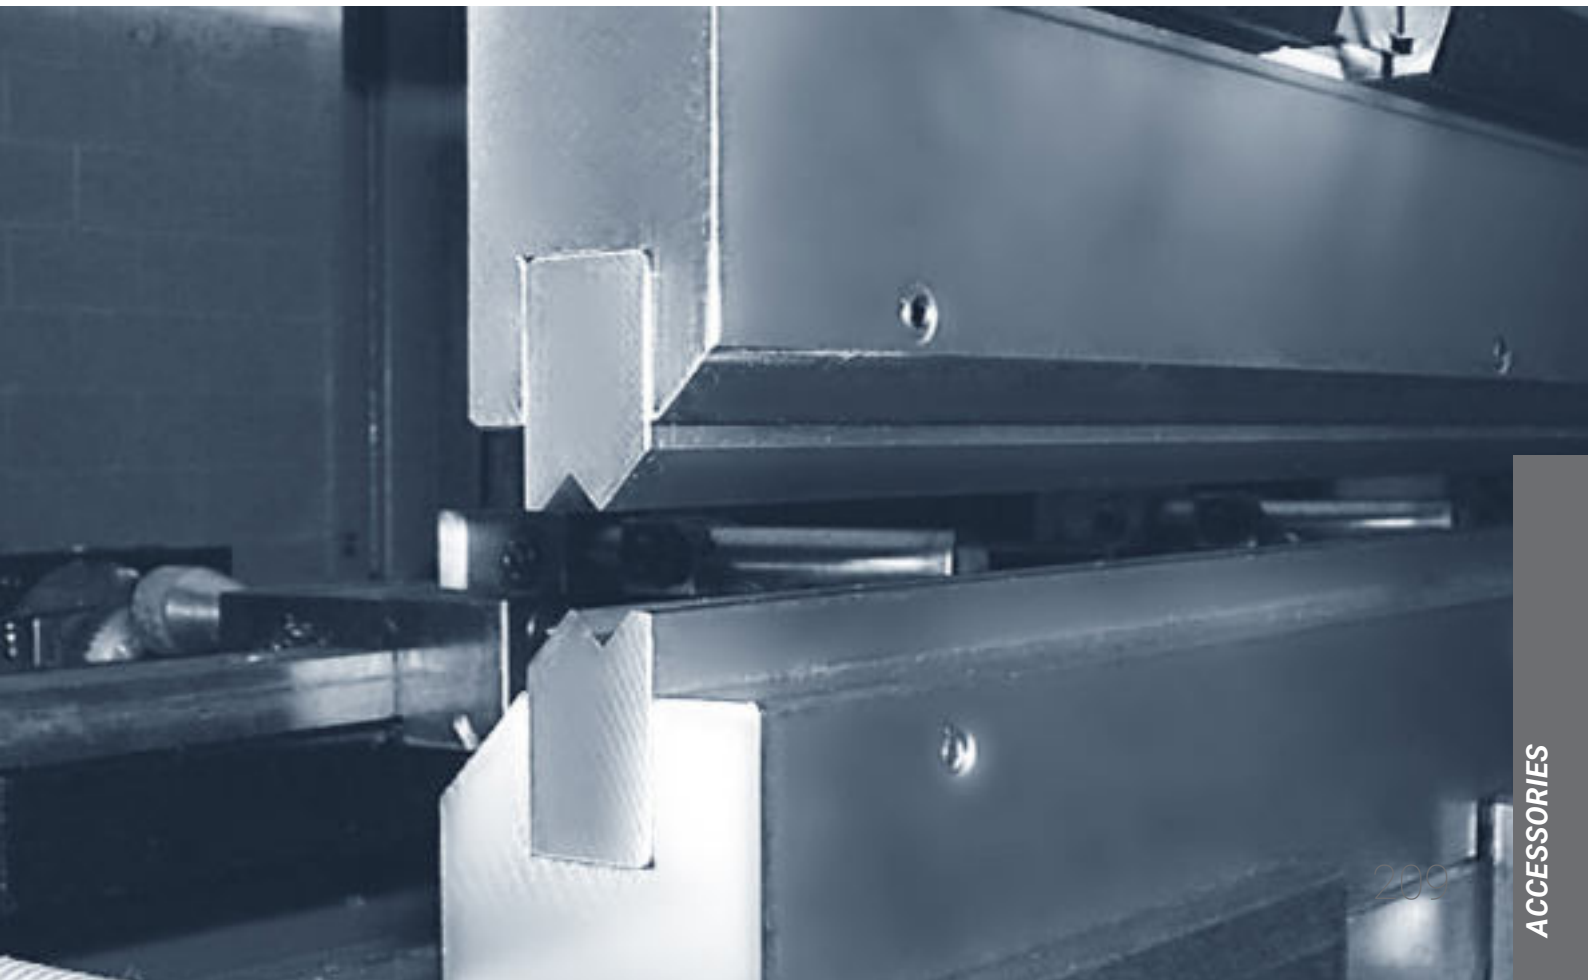


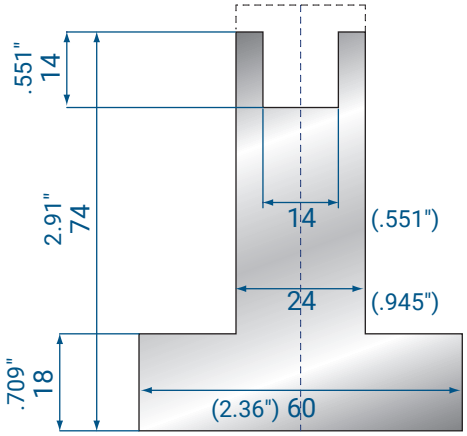


2109

AMADA STYLE

835 mm 32.87"	14.5 kg 32.0 lb
415 mm 16.34"	7.2 kg 15.9 lb






2112

835 mm 32.87"	0.3 kg 0.7 lb
415 mm 16.34"	0.2 kg 0.4 lb


A	V			
88°	6 .236"	8 (.315")	10	(.394")
60°	6 (.236")	8 (.315")	10	(.394")
45°	6 (.236")	8 (.315")	10	(.394")
30°	6 .236"	8 .315"		

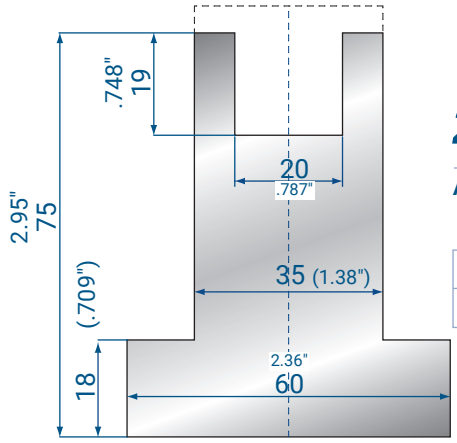

2110

AMADA STYLE


835 mm 32.87"	17.6 kg 38.8 lb
415 mm 16.34"	8.7 kg 19.2 lb



2113

835 mm 32.87"	0.6 kg 1.3 lb
415 mm 16.34"	0.3 kg 0.7 lb


A	V				
88°	6 .236"	8 .315"	10 .394"	12 .472"	16 .630"
60°	6 .236"	8 .315"	10 .394"	12 .472"	16 .630"
45°	6 .236"	8 .315"	10 .394"	12 .472"	
30°	6 .236"	8 .315"	10 .394"		

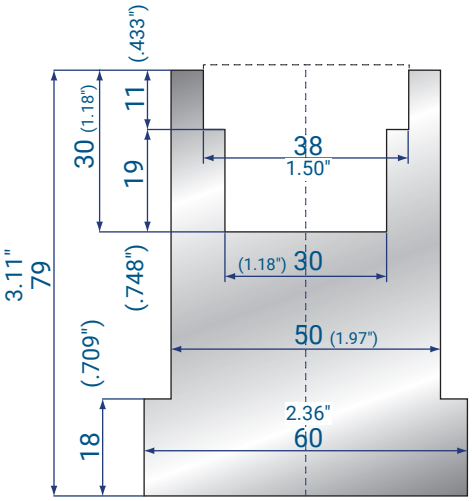

2111

AMADA STYLE


835 mm 32.87"	20.5 kg 45.2 lb
415 mm 16.34"	10.2 kg 22.5 lb



2114

835 mm 32.87"	1.0 kg 2.2 lb
415 mm 16.34"	0.5 kg 1.1 lb

A	V						
	.236"	.315"	.394"	.472"	.630"	.787"	
88°	6	8	10	12	16	20	25 .984"
60°	6 (.236")	8 (.315")	10 .394"	12 .472"	16 .630"	20 .787"	
45°	6 (.236")	8 (.315")	10 .394"	12 .472"	16 .630"	20 .787"	
30°	6 .236"	8 .315"	10 .394"	12 .472"	16 .630"		

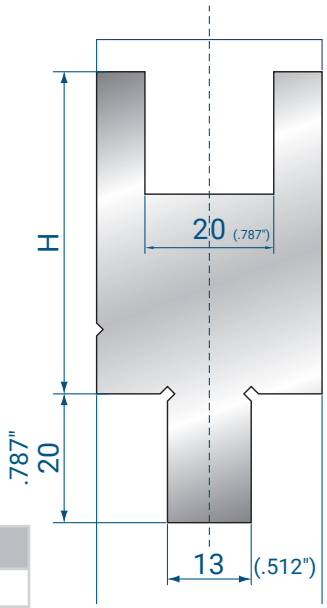

2115

BYSTRONIC TRUMPF WILA STYLE

H = 50 (1.969")


835 mm 32.87"	10.6 kg 23.4 lb
415 mm 16.34"	5.3 kg 11.7 lb

2116

BYSTRONIC TRUMPF WILA STYLE

H = 95 (3.740")


835 mm 32.87"	20.9 kg 46.1 lb
415 mm 16.34"	10.4 kg 22.9 lb



2036

AMADA STYLE


835 mm	19.3 kg
415 mm	9.8 kg
32.87"	42.5 lb
16.34"	21.6 lb

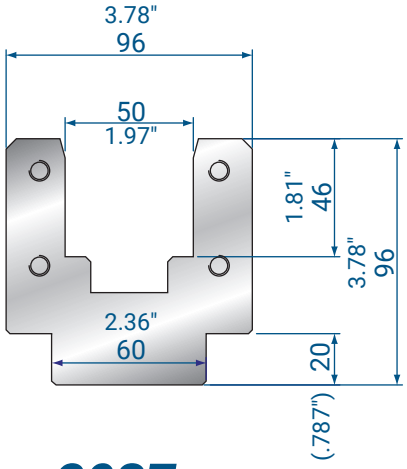

2037

AMADA STYLE


835 mm	37.0 kg
415 mm	18.0 kg
32.87"	81.6 lb
16.34"	39.7 lb

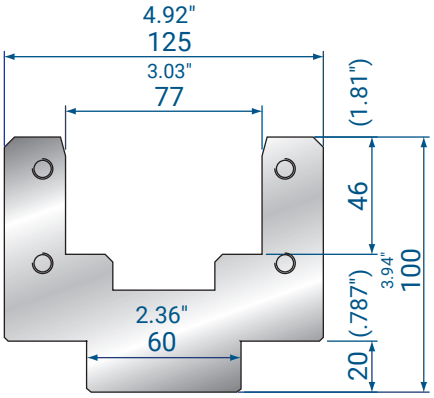

2038

AMADA STYLE


835 mm	45.0 kg
415 mm	22.0 kg
32.87"	99.2 lb
16.34"	48.5 lb

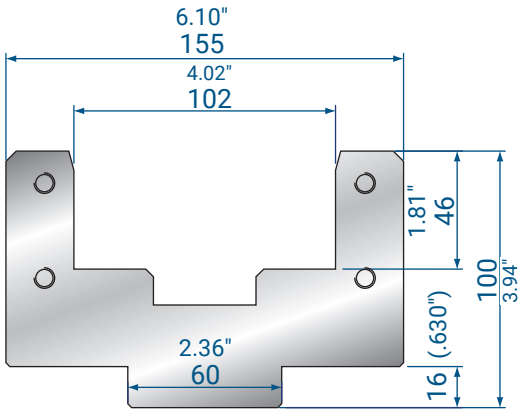

2040

AMADA STYLE


835 mm	55.0 kg
415 mm	27.0 kg
32.87"	121 lb
16.34"	59.5 lb

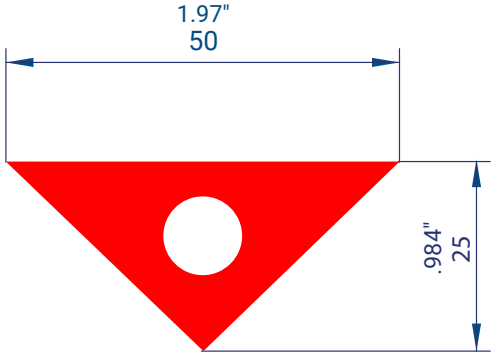

2119

835 mm	0.6 kg	32.87"	1.3 lb
415 mm	0.3 kg	16.34"	0.7 lb


Perforated triangular polyurethane insert
H = 25.00 (.984")
v = 50.00 (1.969")



2101

92 SHORE


835 mm 32.87"	0.5 kg 1.1 lb
415 mm 16.34"	0.3 kg 0.7 lb



2102

92 SHORE


835 mm 32.87"	2.2 kg 4.9 lb
415 mm 16.34"	1.1 kg 2.4 lb



2103

92 SHORE


835 mm 32.87"	3.3 kg 7.3 lb
415 mm 16.34"	1.6 kg 3.5 lb



2104

92 SHORE


835 mm 32.87"	4.4 kg 9.7 lb
415 mm 16.34"	2.2 kg 4.9 lb



2105

92 SHORE


835 mm 32.87"	0.5 kg 1.1 lb
415 mm 16.34"	0.2 kg 0.4 lb



2106

92 SHORE


835 mm 32.87"	1.8 kg 4.0 lb
415 mm 16.34"	0.9 kg 2.0 lb



2107

92 SHORE

835 mm 32.87"	2.6 kg 5.7 lb
415 mm 16.34"	1.3 kg 2.9 lb

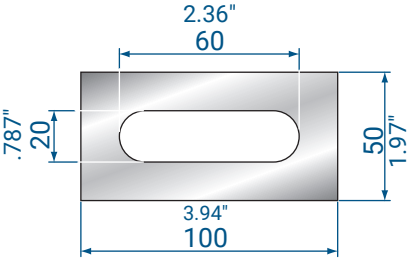

2108

92 SHORE

835 mm 32.87"	3.4 kg 7.5 lb
415 mm 16.34"	1.7 kg 3.7 lb



COMPLETE CLAMPING SYSTEM FOR EUROPEAN-STYLE (AMADA-PROMECAM) UPPER TOOLS

CHANGING TOOLS WITH A STANDARD CLAMPING SYSTEM


On a standard system the upper tools are held by safety clamps screwed to the intermediates, which are fixed to the upper beam.


The tang of the intermediate clamp engages the safety groove machined in the punch, so the tool cannot fall out when the clamp is opened. It also means every tool has to be inserted and removed from the side of the machine and slid along to its working position: it cannot be put in or taken out vertically.


Once the new punches are in place:

- tighten all the clamp screws slightly,
- lower the upper beam so it pushes the tools up against their reference surface (the underside of the intermediate) and aligns them,
- tighten all the clamp screws firmly.

The time this takes is time the machine is not bending, and it can make a real difference to productivity.

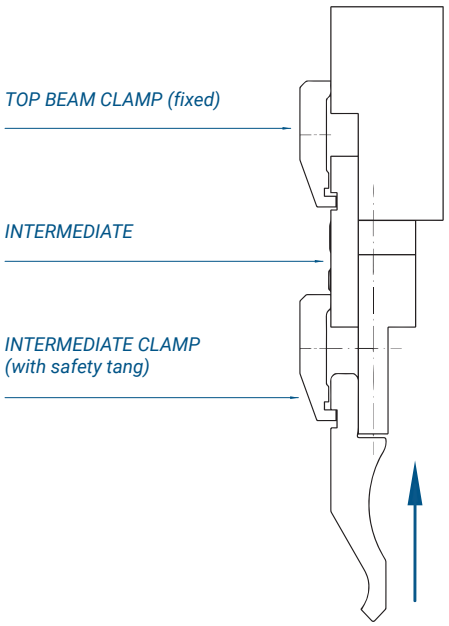

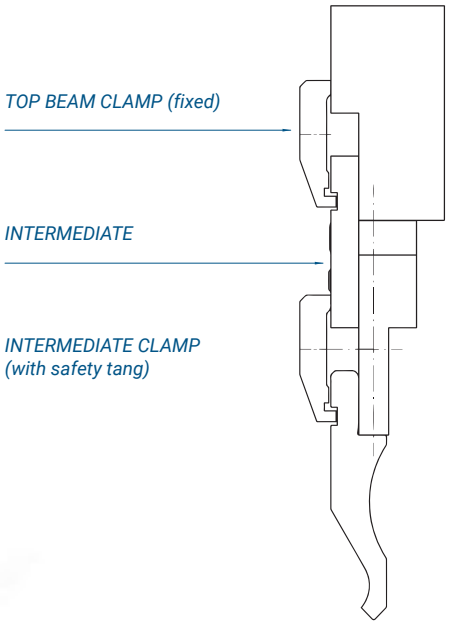


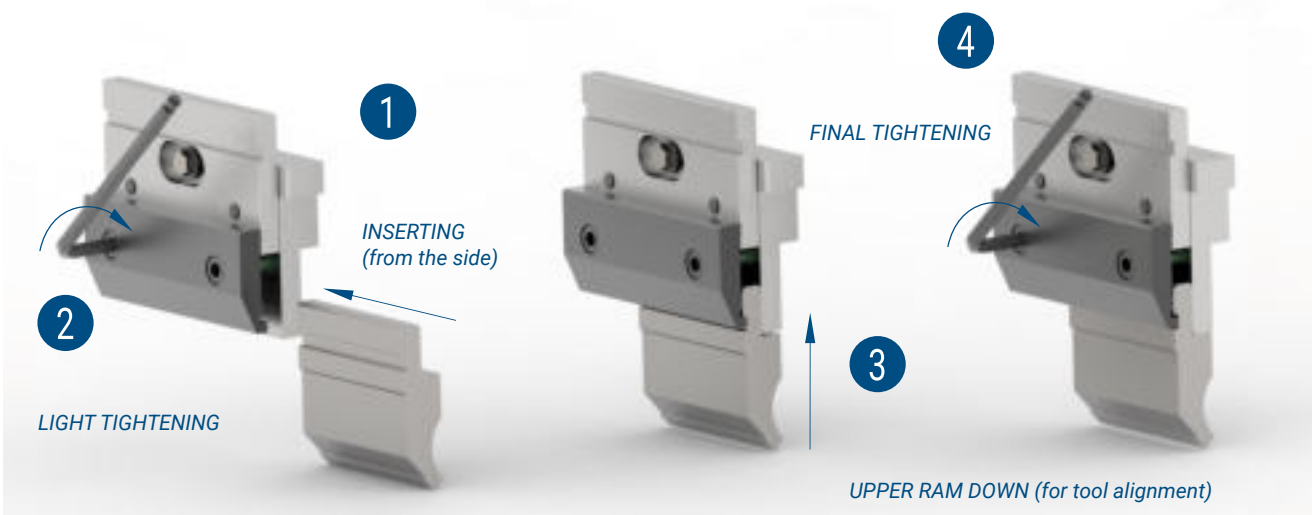

THE EUROGRIP INNOVATION

The mechanical design of the EUROGRIP clamp makes it possible to:

- insert and remove punches vertically, instead of sliding them in from the side, with the same high level of safety;
- lift the punch as the clamp closes, so it is aligned when it is locked.

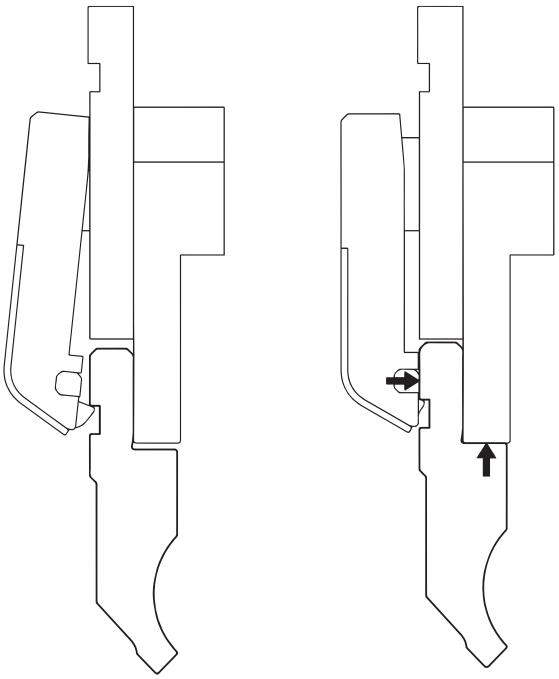

TIME SAVED WITH EUROGRIP

The table shows the average time for each step of removing and replacing the upper tools on a 3 m (10 ft) press brake with 15 intermediates, to compare the EUROGRIP systems with the standard one.

Estimated time for each step of an upper tool change (3 m / 10 ft press brake with 15 intermediates).

AVERAGE TIME WITH THE STANDARD SYSTEM	**about 9.5 minutes**
AVERAGE TIME WITH THE EUROGRIP MANUAL SYSTEM	**about 3.0 minutes (–70%)**
AVERAGE TIME WITH THE EUROGRIP PNEUMATIC SYSTEM	**about 1.5 minutes (–85%)**


ONE TOOL CHANGE TAKES THIS SHARE OF AN HOUR OF PRODUCTION TIME:

16% with the standard system
5% with EUROGRIP manual
2.5% with EUROGRIP pneumatic

OPERATING PHASE	CLAMPING SYSTEM	OPERATION DESCRIPTION	REQUIRED TIME		
1 UNLOCKING THE CLAMPS	*Standard clamping system (each clamp with two screws)*	*Loosen 30 Allen bolts (5 seconds each)*	150		
	EUROGRIP manual clamping system (M-EASY or M-TOP)	*Unlock 15 handles (3 seconds each)*		45	
	EUROGRIP pneumatic clamping system (P-EASY or P-TOP)	*A push-button opens the clamps (2 seconds)*			2
2 REMOVING THE PUNCHES	*Standard clamping system (each clamp with two screws)*	*Slide the tools out from the side of the machine (3 × 835 mm + 1 sectioned)*	100		
	EUROGRIP manual clamping system (M-EASY or M-TOP)	*Remove the tools vertically from the front (3 × 835 mm + 1 sectioned)*		50	
	EUROGRIP pneumatic clamping system (P-EASY or P-TOP)	*Remove the tools vertically from the front (3 × 835 mm + 1 sectioned)*			50
3 INSERTING THE PUNCHES	*Standard clamping system (each clamp with two screws)*	*Insert the tools from the side and slide them into place (3 × 835 mm + 1 sectioned)*	100		
	EUROGRIP manual clamping system (M-EASY or M-TOP)	*Insert the tools vertically from the front (3 × 835 mm + 1 sectioned)*		40	
	EUROGRIP pneumatic clamping system (P-EASY or P-TOP)	*Insert the tools vertically from the front (3 × 835 mm + 1 sectioned)*			40
4 LOCKING THE CLAMPS	*Standard clamping system (each clamp with two screws)*	*Lightly tighten 30 Allen bolts (4 seconds each)*	120		
		Lower the upper beam to align the tools	10		
		Fully tighten 30 Allen bolts (3 seconds each)	90		
	EUROGRIP manual clamping system (M-EASY or M-TOP)	*Lock 15 handles (3 seconds each)*		45	
	EUROGRIP pneumatic clamping system (P-EASY or P-TOP)	*A push-button closes the clamps (2 seconds)*			2
TOTAL ESTIMATED TIME			570 s	180 s	94 s

PRINCIPLE OF OPERATIONS


PUNCH LOADING

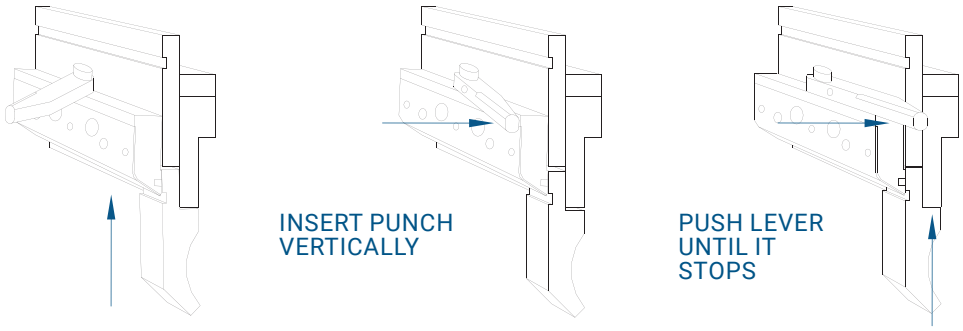

With the clamp open, the punch is pushed straight up until its safety groove meets the clamp's safety fingers, which hook it and hold it up.

As the clamp closes, the safety fingers lift the punch to the reference surface (the underside of the intermediate) and hold it there until the clamp is fully closed and the punch is locked.

PUNCH UNLOADING

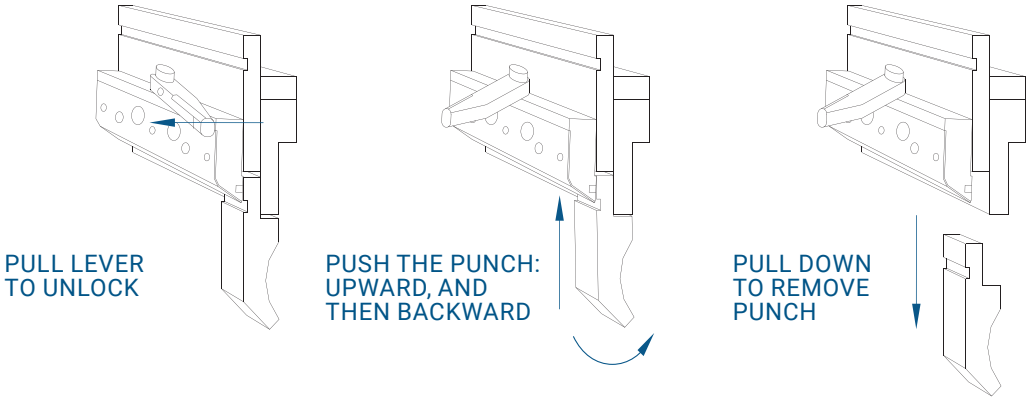

When the clamp is opened, the punch is released and drops until it is caught by the safety fingers.

To remove it, lift the punch by hand and push its tip toward the back of the machine to free it from the safety fingers, then slide it out downward.

THE EUROGRIP RANGE FOR UPPER TOOL CLAMPING

The EUROGRIP clamp is the basis of a complete range of solutions developed by EUROSTAMP to suit standard press brake equipment and each customer's needs.

The range includes manual and pneumatic systems.

Each system comes in two versions, EASY and TOP.

Each version comes in two models, to suit the size of the original intermediates.

MANUAL CLAMPING SYSTEMS

Version **M-EASY**

4389 *Intermediate dimension* **Z1**
(body 27 mm / 1.06" – axis 7 mm / .276") **page 219**

4409 *Intermediate dimension* **Z2**
(body 40 mm / 1.57" – axis 20 mm / .787") **page 220**

Version **M-TOP**

4390 *Intermediate dimension* **Z1**
(body 27 mm / 1.06" – axis 7 mm / .276") **page 221**

4400 *Intermediate dimension* **Z2**
(body 40 mm / 1.57" – axis 20 mm / .787") **page 222**

4419 *Intermediate dimension* **Z1**
(body 27 mm / 1.06" – axis 7 mm / .276") **page 223**

4414 *Intermediate dimension* **Z2**
(body 40 mm / 1.57" – axis 20 mm / .787") **page 224**

PNEUMATIC CLAMPING SYSTEMS

Version **P-EASY**

4392 *Intermediate dimension* **Z1**
(body 27 mm / 1.06" – axis 7 mm / .276") **page 228**

4405 *Intermediate dimension* **Z2**
(body 40 mm / 1.57" – axis 20 mm / .787") **page 229**


Version **P-TOP**

4399 **4398** *Intermediate dimension* **Z1**
(body 27 mm / 1.06" – axis 7 mm / .276") **page 230 - 231**

4399 **4410** *Intermediate dimension* **Z2**
(body 40 mm / 1.57" – axis 20 mm / .787") **page 230 - 232**

1 TYPICAL DIMENSIONS OF A Z1 INTERMEDIATE

2 TYPICAL DIMENSIONS OF A Z2 INTERMEDIATE

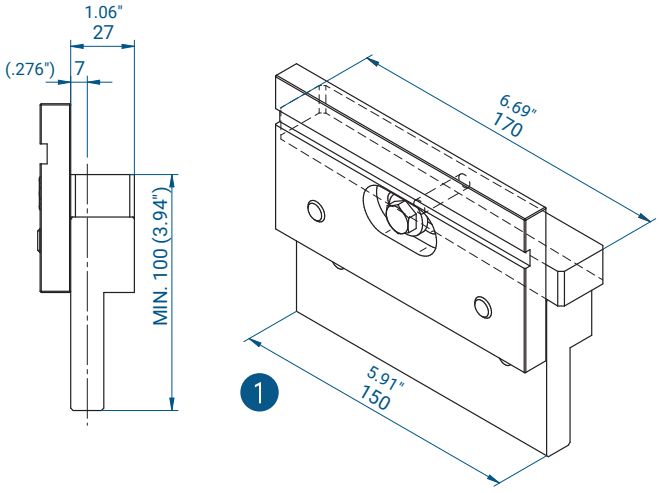

MANUAL CLAMPING SYSTEMS – INTRODUCTION

Each clamp has its own sturdy, easy-to-use handle. It folds away at the top of the clamp, so it never interferes with the part being bent.

The same principle is used in an upper adapter that takes Trumpf / Wila-style punches on machines with European-style (Amada-Promecam) clamping.



Model

4389
(M-EASY Z1)

EUROGRIP MANUAL SYSTEM M-EASY: FRONT CLAMP TO RETROFIT A Z1 INTERMEDIATE

150 mm	0.8 kg
5.91"	1.8 lb





DESCRIPTION

A front clamp that replaces the existing one on your intermediate.

TECHNICAL SPECIFICATIONS

For Z1 intermediates only (height 100 mm (3.94"), body 27 mm (1.06"), bending axis at 7 mm (.276")). Check every dimension of your intermediates against the drawing on this page.

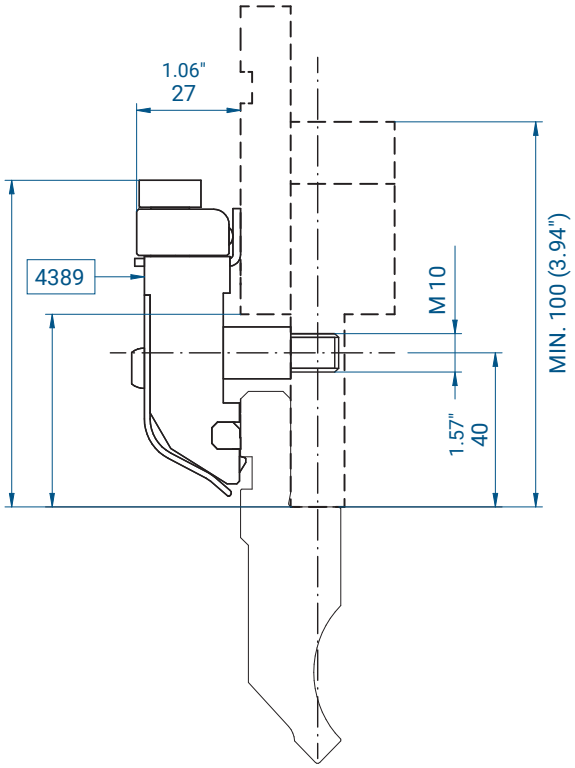

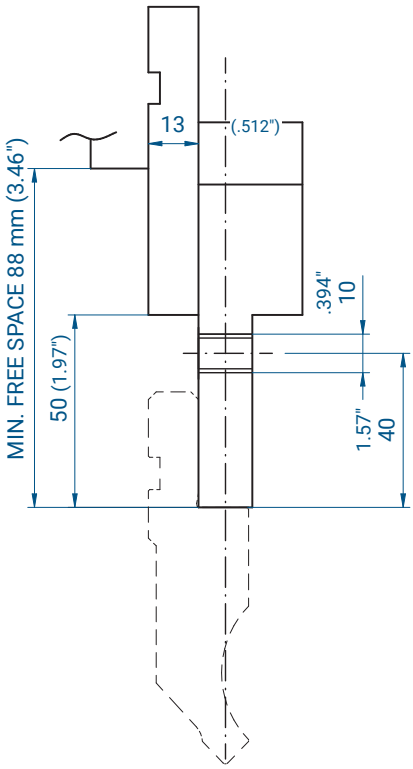

Model

4409
(M-EASY Z2)

EUROGRIP MANUAL SYSTEM M-EASY: CLAMP AND FRONT PLATE TO RETROFIT A Z2 INTERMEDIATE

150 mm	0.8 kg
5.91"	1.8 lb




DESCRIPTION

An assembly of the 4389 clamp and a new front plate, mounted on the main body of your existing intermediate.

TECHNICAL SPECIFICATIONS

For Z2 intermediates only (minimum height 120 mm (4.72"), body 40 mm (1.57"), bending axis at 20 mm (.787")). Check every dimension of your intermediates against the drawing on this page.

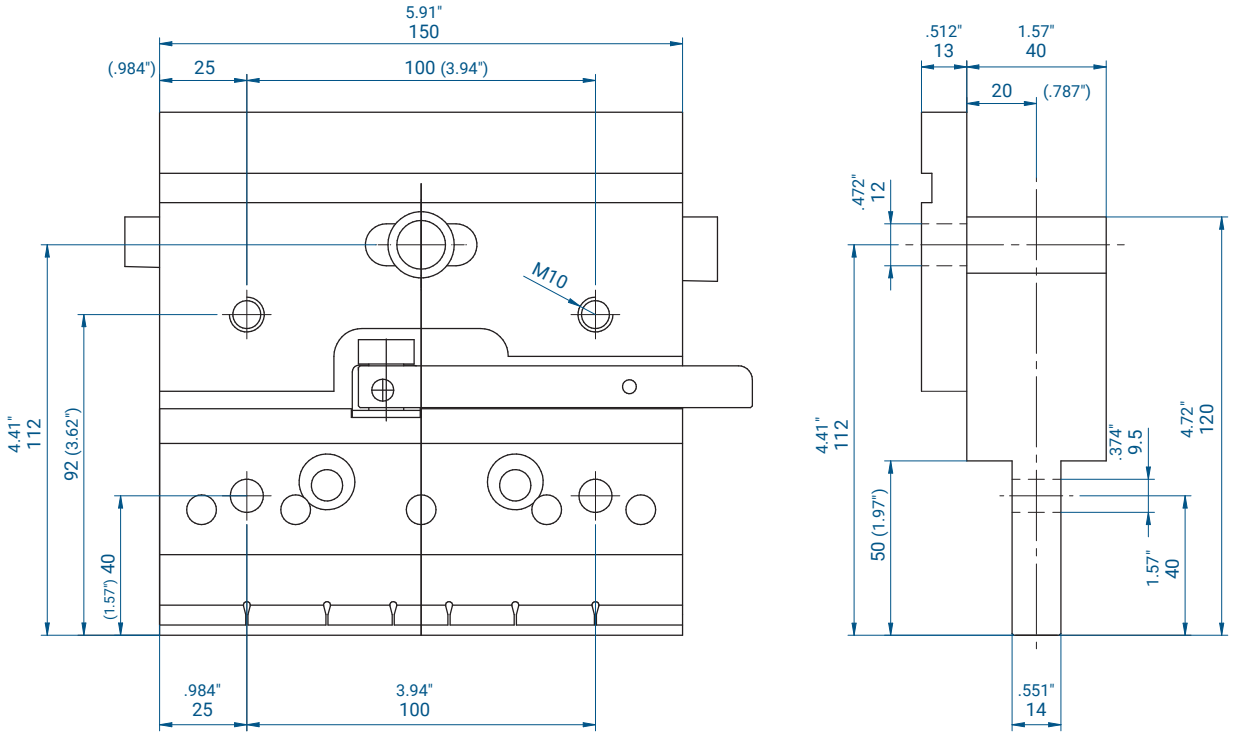



Model

4390
(M-TOP Z1)

EUROGRIP MANUAL SYSTEM M-TOP: FRONT CLAMP MOUNTED ON A DEDICATED Z1 INTERMEDIATE

150 mm	5.2 kg
5.91"	11.5 lb

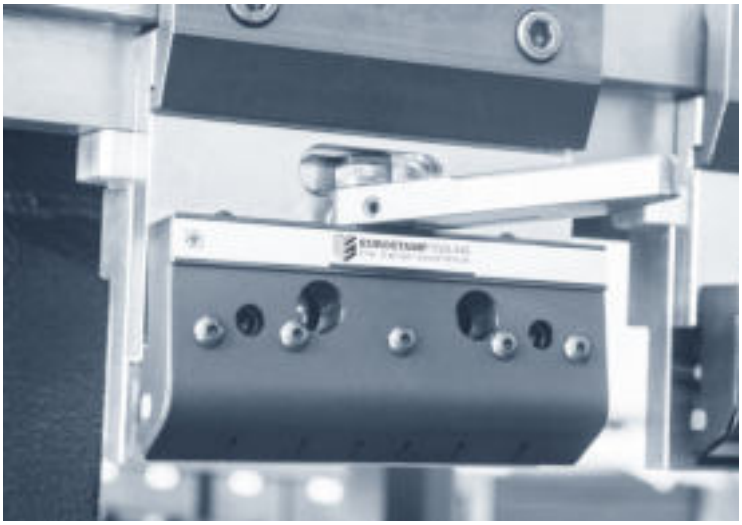

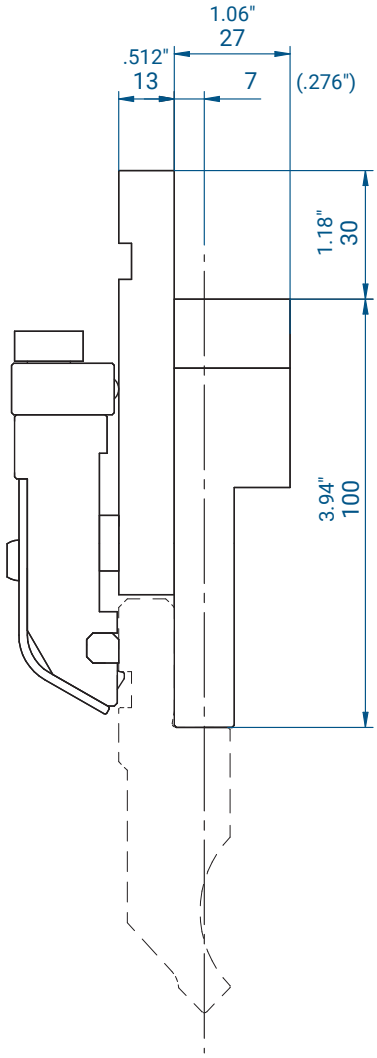

DESCRIPTION

A complete intermediate: a special, larger manual clamp mounted on a high-quality Z1 intermediate body designed for it.

The best choice when you are replacing worn or damaged intermediates, or when your intermediates are not suited to the M-EASY.

The 4390 comes ready for the optional manual rear clamp 4404 (through holes already drilled).

TECHNICAL SPECIFICATIONS

For machines built for Z1 intermediates (height 100 mm (3.94"), body 27 mm (1.06"), bending axis at 7 mm (.276")). Check every dimension of your intermediates against the drawing on this page.


Model

4400
(M-TOP Z2)

EUROGRIP MANUAL SYSTEM M-TOP: FRONT CLAMP MOUNTED ON A DEDICATED Z2 INTERMEDIATE

150 mm	7.0 kg
5.91"	15.4 lb



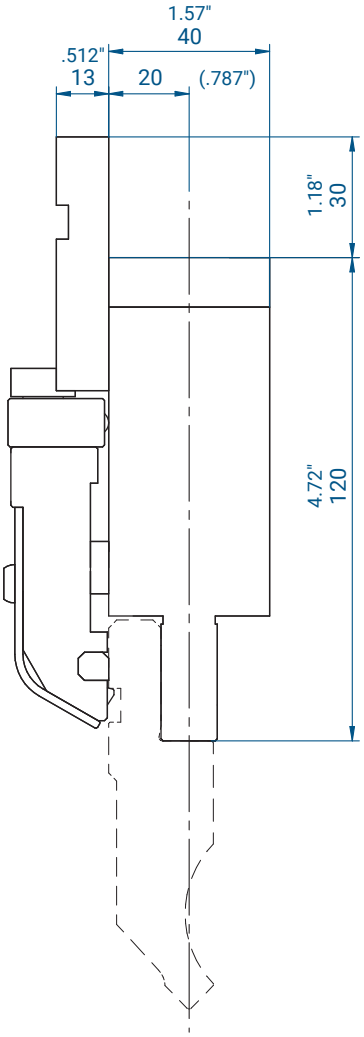

DESCRIPTION

A complete intermediate: a special, larger manual clamp mounted on a high-quality Z2 intermediate body designed for it.

The best choice when you are replacing worn or damaged intermediates, or when your intermediates are not suited to the M-EASY.

The 4400 comes ready for the optional manual rear clamp 4404 (through holes already drilled).

TECHNICAL SPECIFICATIONS

For machines built for Z2 intermediates (height 120 mm (4.72"), body 40 mm (1.57"), bending axis at 20 mm (.787")). Check every dimension of your intermediates against the drawing on this page.

Weight: 5.5 kg (12.1 lb)


Model

4419

Z1 (M-TOP Z1 DUO)

EUROGRIP MANUAL SYSTEM M-TOP Z1 DUO: FRONT AND REAR CLAMPS MOUNTED ON A DEDICATED Z1 INTERMEDIATE

150 mm	7.0 kg
5.91"	15.4 lb

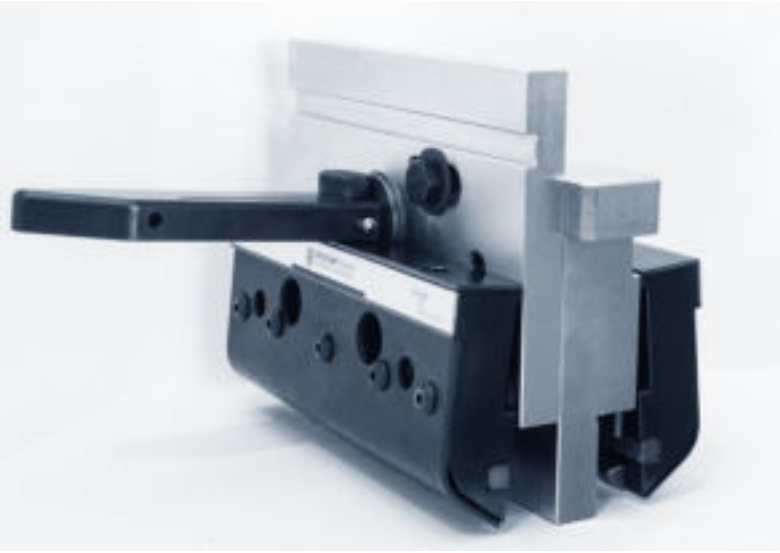

TECHNICAL FEATURES


Each tool can be mounted facing front or reversed (turned 180°), whichever the bend needs.

Tools load vertically in either direction and engage automatically when the clamps are open. There is no limit on the length, shape or number of tools loaded.

One lever per module locks every tool in it: the tools are lifted against the reference surfaces and clamped there, so they are perfectly aligned. In the locked position the lever does not stick out.

Unlocking: opening the lever releases all the tools in the module, and the safety system keeps them from falling out.

Removal: lift each tool up to the stop, tilt it slightly and slide it out downward. It takes no more effort than the weight of the tool.

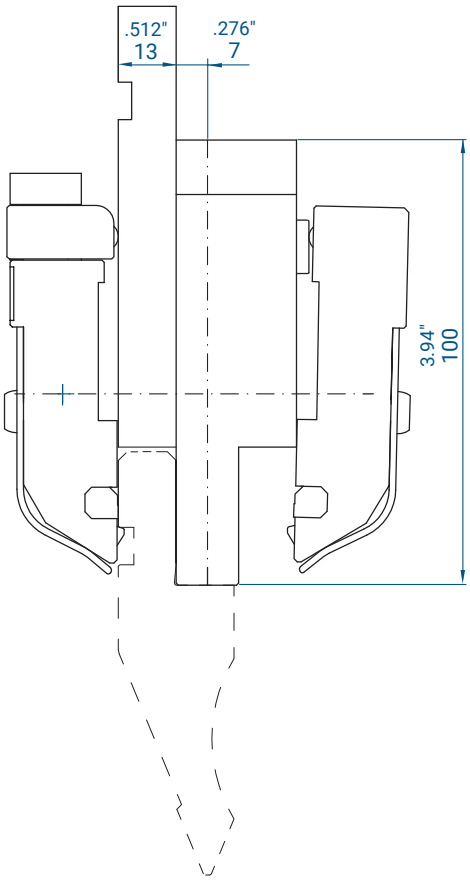


Model


4414

Z2 (M-TOP Z2 DUO)

EUROGRIP MANUAL SYSTEM M-TOP Z2 DUO: FRONT AND REAR CLAMPS MOUNTED ON A DEDICATED Z2 INTERMEDIATE

150 mm	7.0 kg
5.91"	15.4 lb

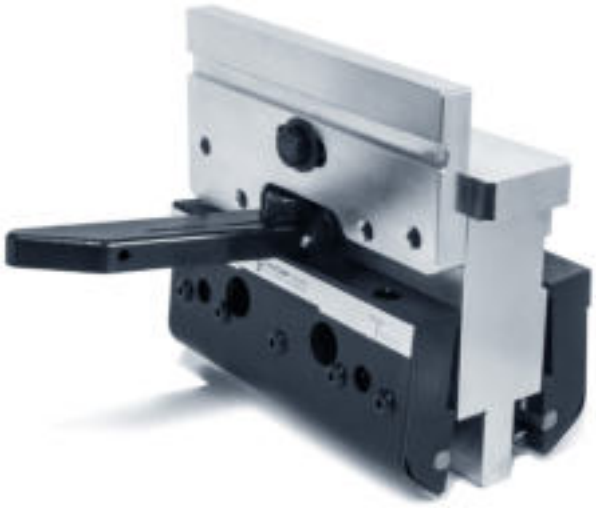

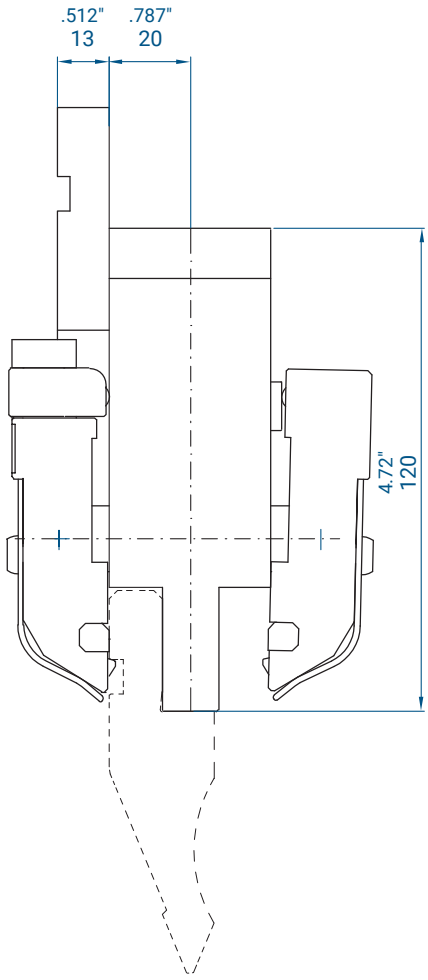

TECHNICAL FEATURES

Each tool can be mounted facing front or reversed (turned 180°), whichever the bend needs.

Tools load vertically in either direction and engage automatically when the clamps are open. There is no limit on the length, shape or number of tools loaded.

One lever per module locks every tool in it: the tools are lifted against the reference surfaces and clamped there, so they are perfectly aligned. In the locked position the lever does not stick out.

Unlocking: opening the lever releases all the tools in the module, and the safety system keeps them from falling out.


Removal: lift each tool up to the stop, tilt it slightly and slide it out downward. It takes no more effort than the weight of the tool.

Model

4393
(M-WDP Z1)

EUROGRIP MANUAL SYSTEM M-WDP: UPPER ADAPTER FROM AMADA STYLE (Z1) TO WILA / TRUMPF STYLE

150 mm	6.7 kg
5.91"	14.8 lb

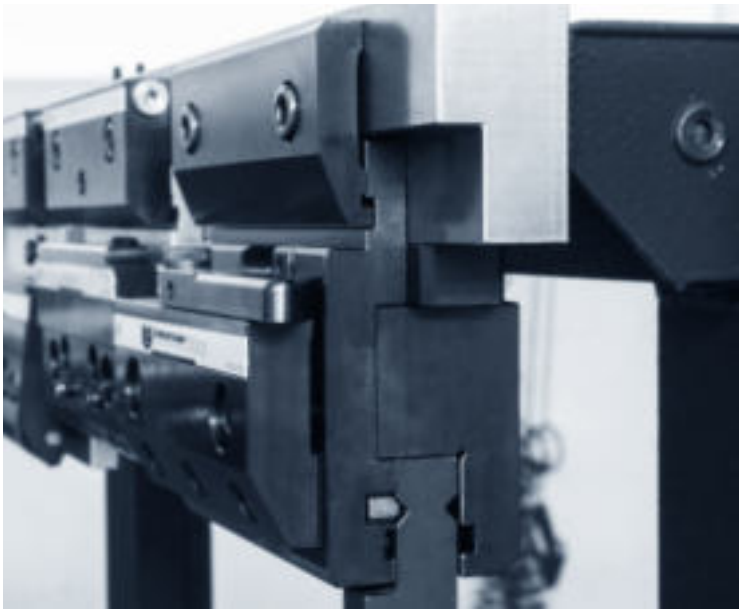

DESCRIPTION


An upper adapter from the standard Amada-Promecam (European) style to the standard Trumpf / Wila style.

Its front clamp, worked by a fold-away handle, loads, removes, aligns and locks Trumpf / Wila-style punches on press brakes with a European-style (Amada-Promecam) upper beam.

TECHNICAL SPECIFICATIONS

For machines built for Z1 intermediates (height 100 mm (3.94"), body 27 mm (1.06"), bending axis at 7 mm (.276")). Check every dimension of your intermediates against the drawing on this page.

Weight: 6.7 kg (14.8 lb)

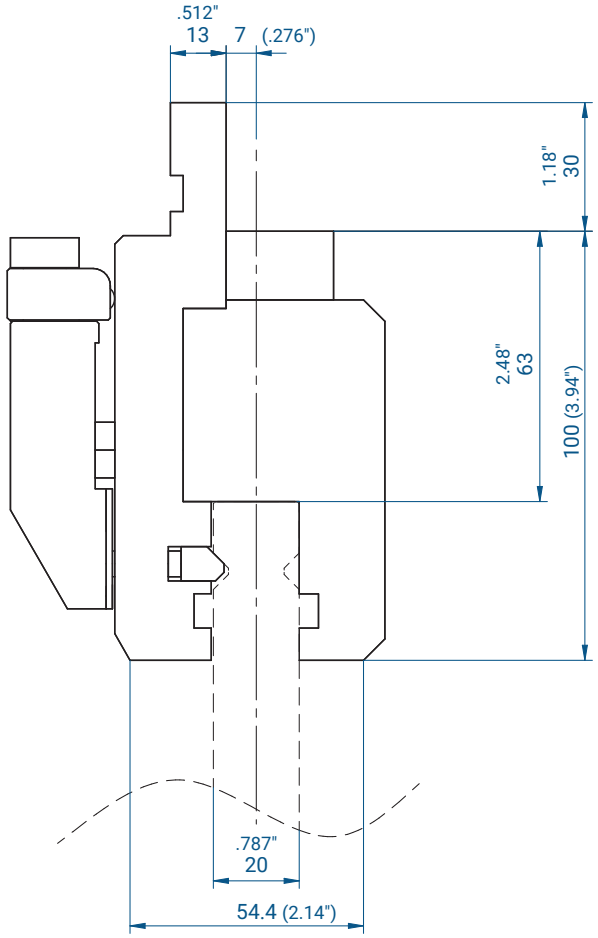



MANUAL CLAMPING SYSTEMS – OPTIONAL ADD-ONS

Model

4408

5.91"	1.5 lb
150 mm	0.7 kg

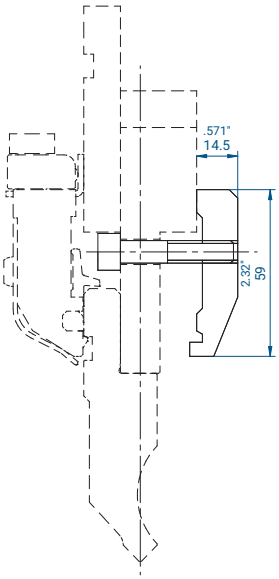

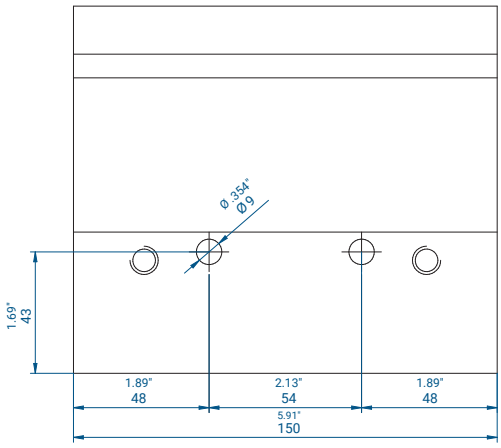

OPTIONAL REAR CLAMP, M-EASY MODELS ONLY

For mounting punches reversed on intermediates fitted with M-EASY clamps (4389 and 4409).


The rear clamp is operated from the front of the machine with two Allen screws.


To fit it, two Ø9 mm (.354") through holes must be drilled in the intermediate body.

Model

4404

150 mm	0.8 kg
5.91"	1.8 lb

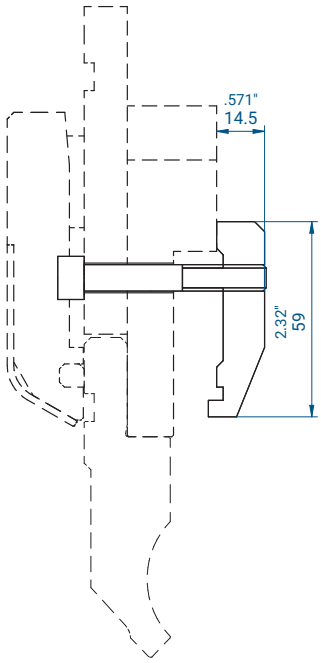

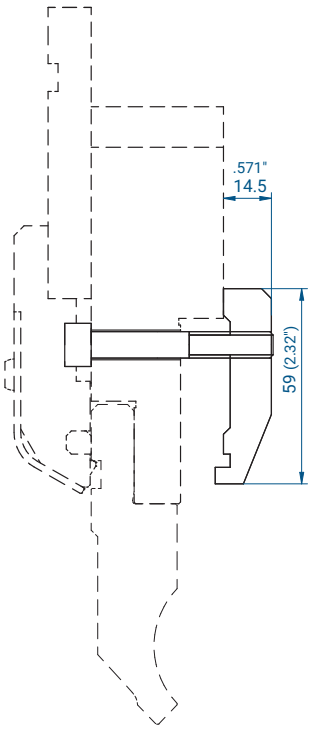

OPTIONAL REAR CLAMP, M-TOP, P-EASY AND P-TOP MODELS

For mounting punches reversed on intermediates fitted with M-TOP, P-EASY or P-TOP systems.


The rear clamp is operated from the front of the machine with two Allen screws.

All M-TOP, P-EASY and P-TOP models come with the through holes already drilled, so no machining is needed to fit the clamp.

PNEUMATIC CLAMPING SYSTEMS – INTRODUCTION

Every clamp on the upper beam is operated by compressed air, controlled by a pneumatic control unit and carried through hoses that connect the intermediates in series.

The pneumatic range also includes a system for clamping the lower tools.

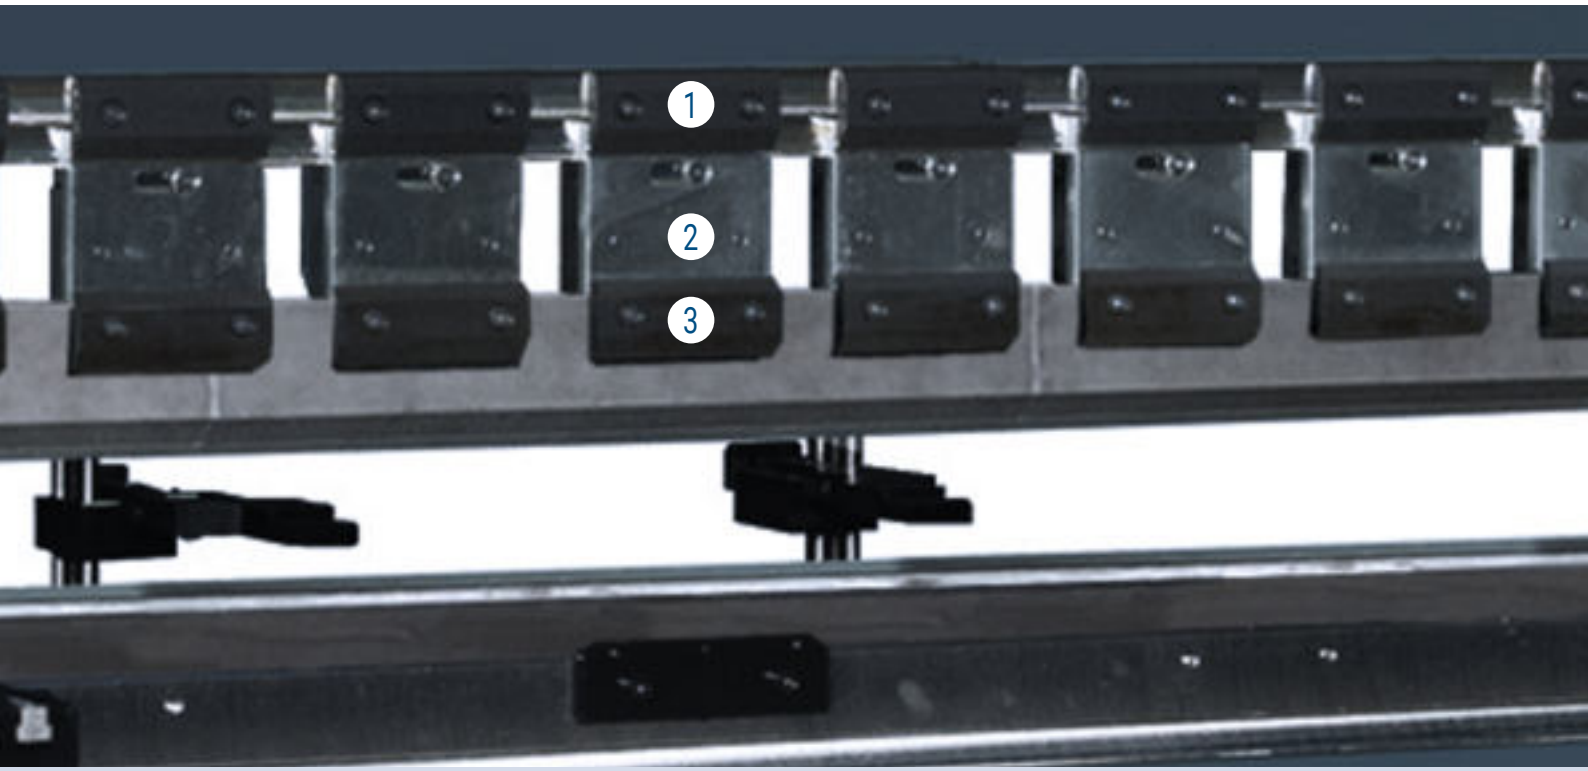

1 *TOP BEAM CLAMP (fixed)*

2 *INTERMEDIATE (shiftable right or left and removable)*

3 *INTERMEDIATE CLAMP*

The EUROGRIP upper pneumatic systems replace some of the standard parts supplied with the press brake. Depending on the model, only the intermediates are replaced (P-EASY), or the top beam clamps as well (P-TOP).

Every pneumatic system needs a pneumatic control unit and a connection kit (hoses, fittings, cables and switch).


Model


4392
(P-EASY Z1)


5.91"	11.5 lb
150 mm	5.2 kg

EUROGRIP PNEUMATIC SYSTEM P-EASY: PNEUMATIC CLAMP MOUNTED ON A DEDICATED Z1 INTERMEDIATE



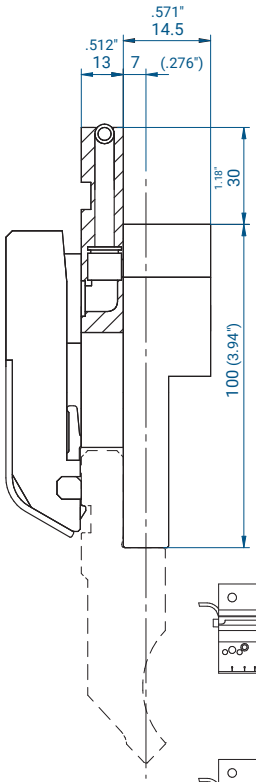

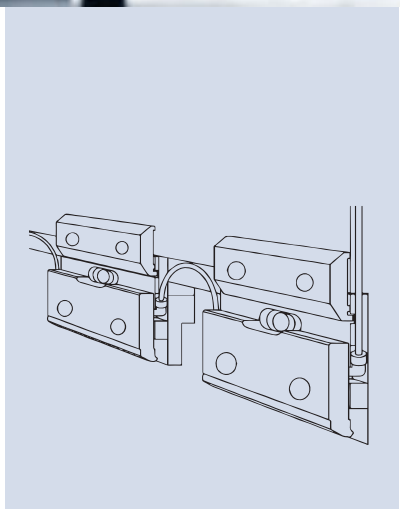

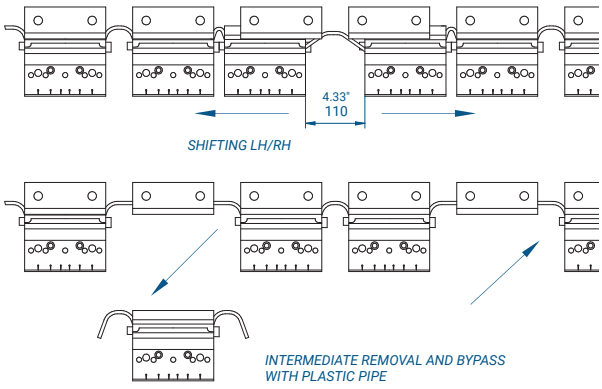

DESCRIPTION

A complete intermediate: a special pneumatic clamp mounted on a high-quality Z1 intermediate body machined for the clamp's moving fingers (see 2 and 3 on page 219).

Each new intermediate replaces an existing one and uses the top beam clamp already on the machine. It is connected to the others in series with a plastic hose, so it can still be shifted left or right and removed.

The 4392 comes ready for the optional manual rear clamp 4404 (through holes already drilled).

TECHNICAL SPECIFICATIONS

For machines built for Z1 intermediates (height 100 mm (3.94"), body 27 mm (1.06"), bending axis at 7 mm (.276")). Check every dimension of your intermediates against the drawing on this page.

Weight: 5.2 kg (11.5 lb)


Model


4405
(P-EASY Z2)


5.91"	11.5 lb
150 mm	5.2 kg

EUROGRIP PNEUMATIC SYSTEM P-EASY: PNEUMATIC CLAMP MOUNTED ON A DEDICATED Z2 INTERMEDIATE



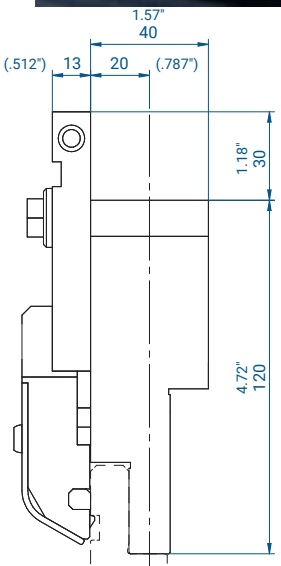

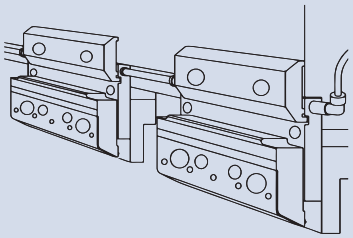

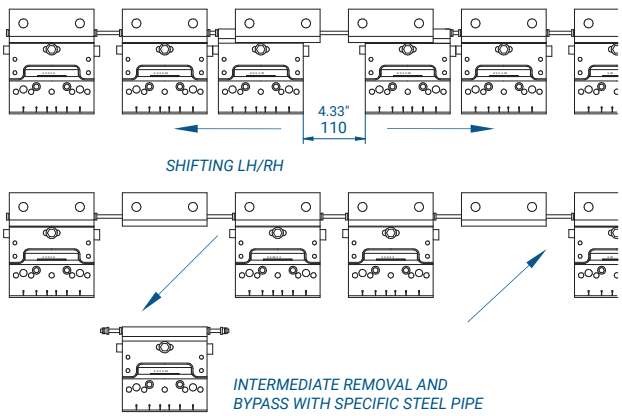

DESCRIPTION

A complete intermediate: a special pneumatic clamp mounted on a high-quality Z2 intermediate body machined for the clamp's moving fingers (see 2 and 3 on page 219).

Each new intermediate replaces an existing one and uses the top beam clamp already on the machine. It is connected to the others in series with a dedicated steel tube, so it can still be shifted left or right and removed.

The 4405 comes ready for the optional manual rear clamp 4404 (through holes already drilled).

TECHNICAL SPECIFICATIONS

For machines built for Z2 intermediates (height 120 mm (4.72"), body 40 mm (1.57"), bending axis at 20 mm (.787")). Check every dimension of your intermediates against the drawing on this page.

Weight: 5.9 kg (13.0 lb)

Model

4399

(P-TOP common)

150 mm	1.0 kg
5.91"	2.2 lb

EUROGRIP PNEUMATIC SYSTEM P-TOP: PNEUMATIC TOP BEAM CLAMP – REQUIRED FOR EVERY P-TOP MODEL




DESCRIPTION


It replaces the standard clamps on the machine's upper beam (see 1 on page 219).

The top beam clamps are connected in series with steel tubing. Each one feeds air to its intermediate through an internal valve, so the intermediate can be shifted left or right, or removed, without any bypass.


The recommended solution when intermediates are shifted or removed many times a day.

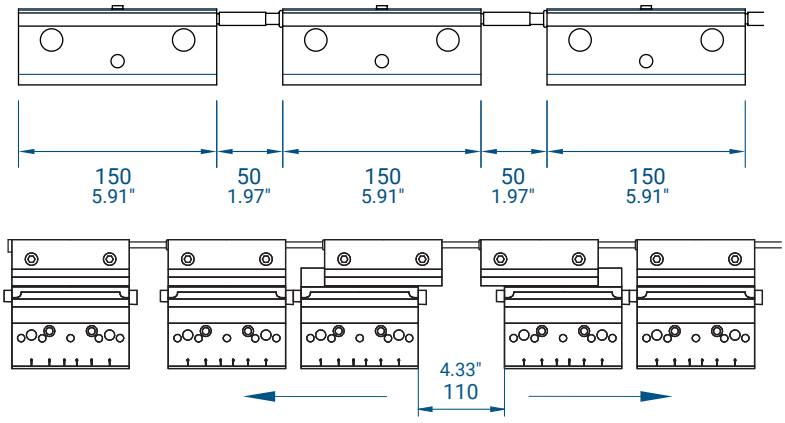

SHIFTING LH/RH

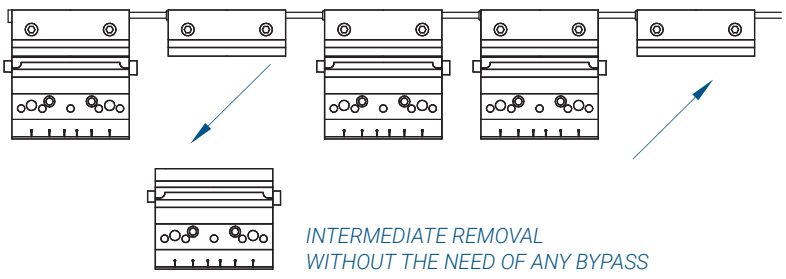

INTERMEDIATE REMOVAL WITHOUT THE NEED OF ANY BYPASS

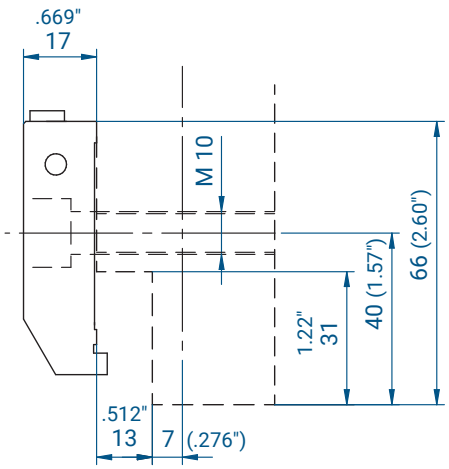


Model


4398
(P-TOP Z1)

150 mm	5.2 kg
5.91"	11.5 lb

EUROGRIP PNEUMATIC SYSTEM P-TOP: PNEUMATIC CLAMP MOUNTED ON A DEDICATED Z1 INTERMEDIATE – REQUIRES THE 4399 TOP BEAM CLAMP



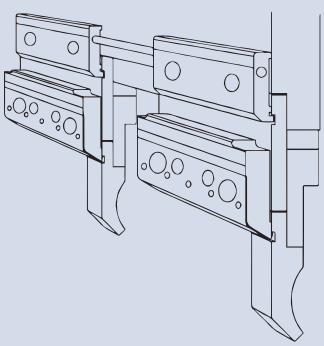

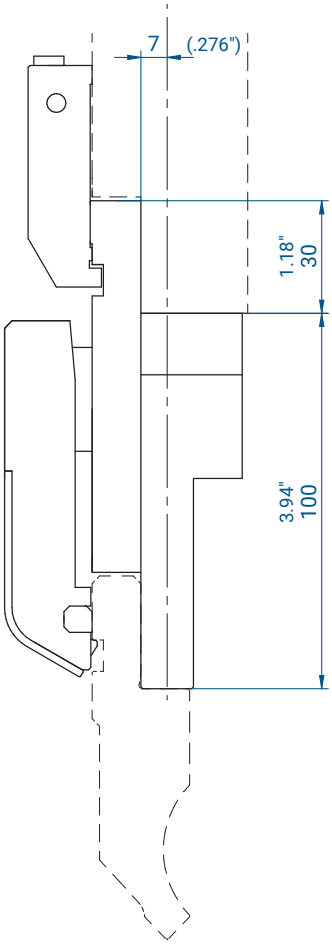

DESCRIPTION

A complete intermediate: a special pneumatic clamp mounted on a high-quality Z1 intermediate body machined for the clamp's moving fingers (see 2 and 3 on page 219).

Each new intermediate replaces an existing one and works with the 4399 top beam clamp, which supplies the air.

The intermediate 4391 comes ready for the optional manual rear clamp 4404 (through holes already drilled).

TECHNICAL SPECIFICATIONS

For machines built for Z1 intermediates (height 100 mm (3.94"), body 27 mm (1.06"), bending axis at 7 mm (.276")). Check every dimension of your intermediates against the drawing on this page.

Weight: 6.2 kg (13.7 lb)


Code 4398 is the intermediate and top beam clamp together (4391 + 4399).


Model


4410
(P-TOP Z2)

150 mm	5.2 kg
5.91"	11.5 lb

EUROGRIP PNEUMATIC SYSTEM P-TOP: PNEUMATIC CLAMP MOUNTED ON A DEDICATED Z2 INTERMEDIATE – REQUIRES THE 4399 TOP BEAM CLAMP

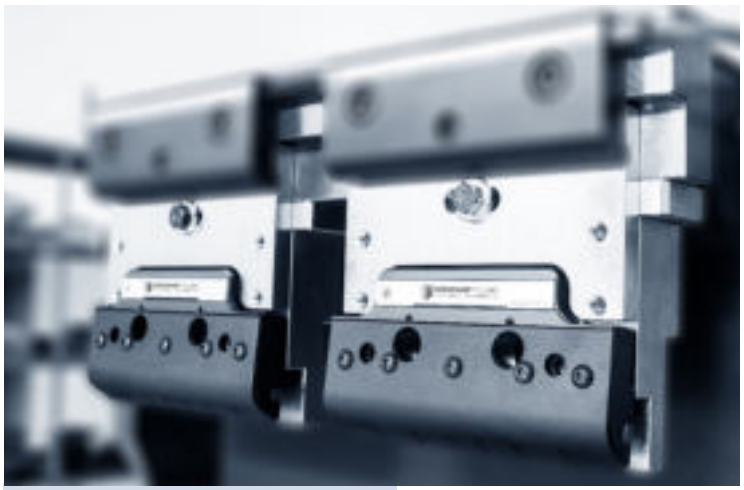

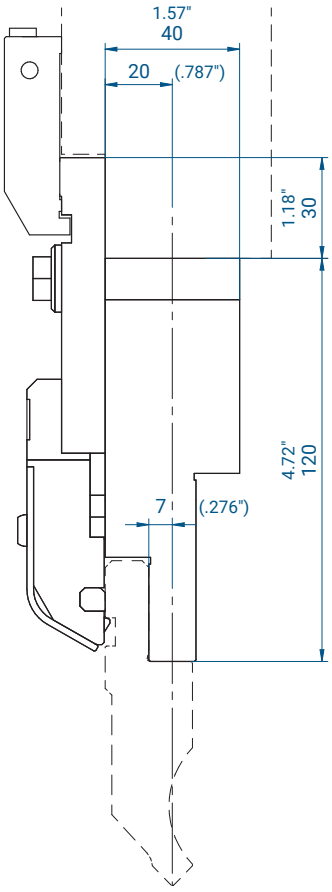

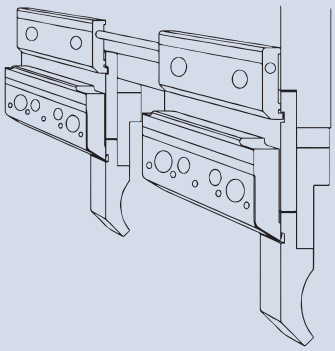

DESCRIPTION

A complete intermediate: a special pneumatic clamp mounted on a high-quality Z2 intermediate body machined for the clamp's moving fingers (see 2 and 3 on page 219).

Each new intermediate replaces an existing one and works with the 4399 top beam clamp, which supplies the air.

The intermediate 4410 comes ready for the optional manual rear clamp 4404 (through holes already drilled).

TECHNICAL SPECIFICATIONS

For machines built for Z2 intermediates (height 120 mm (4.72"), body 40 mm (1.57"), bending axis at 20 mm (.787")). Check every dimension of your intermediates against the drawing on this page.

Weight: 6.2 kg (13.7 lb)

Code 4412 is the intermediate and top beam clamp together (4410 + 4399).


Model


4394
(P-HOLD)


EUROGRIP LOWER PNEUMATIC SYSTEM P-DHOLD: PNEUMATIC DIE HOLDER FOR AMADA-STYLE DIES

835 mm	27.8 kg
625 mm	20.8 kg
415 mm	13.8 kg

32.87"	61.3 lb
24.61"	45.9 lb
16.34"	30.4 lb

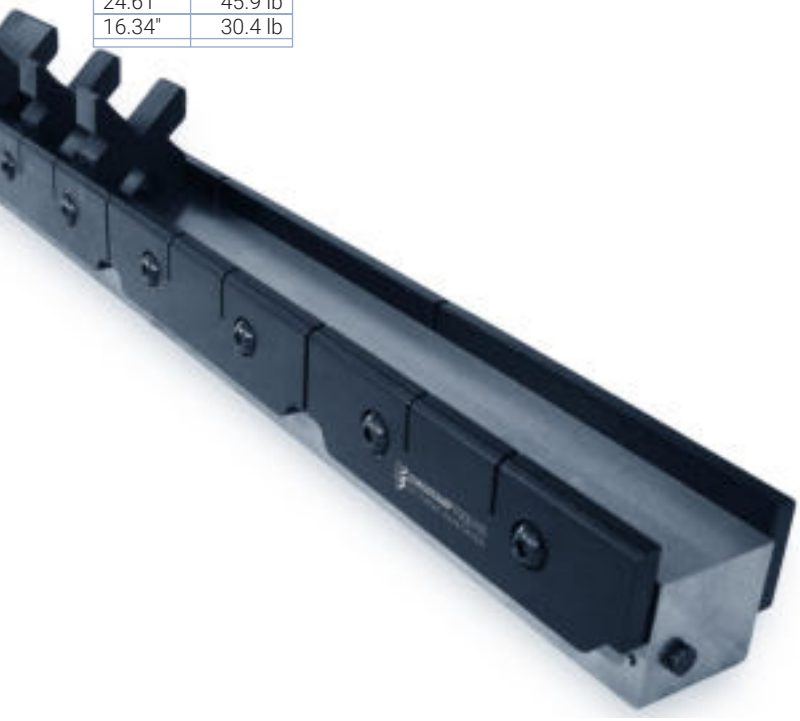

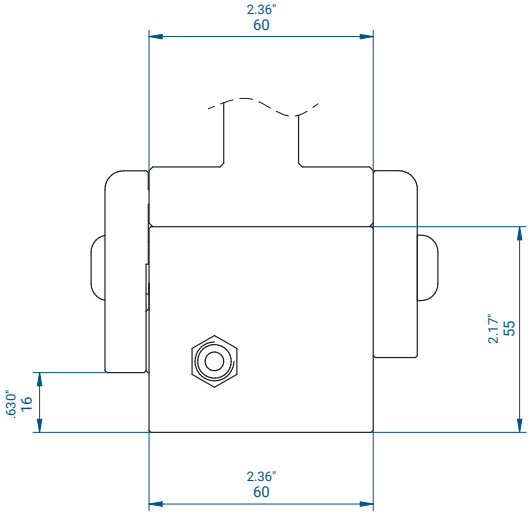

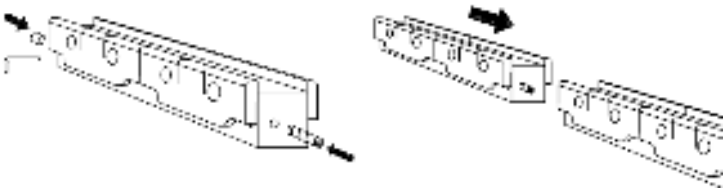


DESCRIPTION


A modular European-style (Amada-Promecam) lower die holder with a row of pneumatic clamps on its front. Each module connects to the next with a fold-away connector.


Recommended when the lower tools are changed often: the whole lower tool set is clamped or released at once.

TECHNICAL SPECIFICATIONS

Fits any machine with a flat lower table to the European (Amada-Promecam) standard. Modules 835, 415 and 625 mm long (32.87", 16.34" and 24.61").

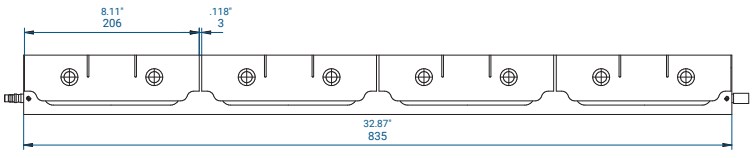

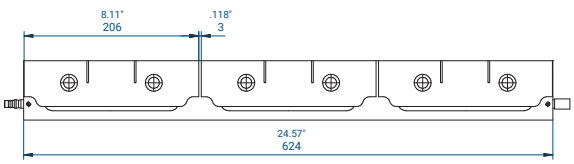

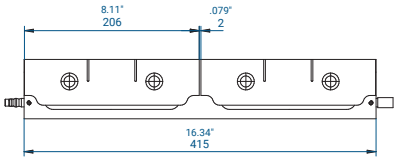


ADDITIONAL COMPONENTS FOR PNEUMATIC CLAMPING SYSTEMS

Every EUROGRIP pneumatic system needs a pneumatic control unit, which holds the electrical and pneumatic components that drive the system, and a connection kit for the model ordered, with the hoses, cables and fittings needed to install it.

Model

4395
(single line)

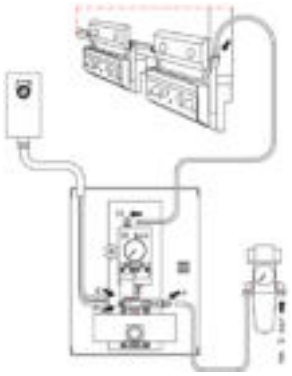

EUROGRIP PNEUMATIC SYSTEM: PNEUMATIC CONTROL UNIT SINGLE LINE, ACCESSORIES INCLUDED

DESCRIPTION

Connects to the shop's compressed-air supply (minimum inlet pressure 6 bar / 87 psi).

One outlet supplies one clamping system, upper or lower.

Holds all the electrical connections and the safety system.


DESCRIPTION

Connects to the shop's compressed-air supply (minimum inlet pressure 6 bar / 87 psi). Two outlets supply both clamping systems, upper and lower.

Holds all the electrical connections and the safety system.

Model

4396
(two lines)

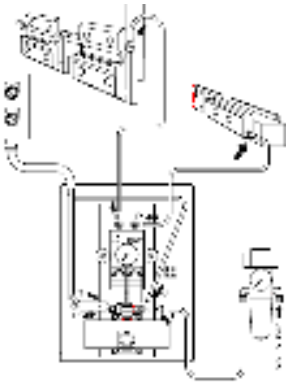

EUROGRIP PNEUMATIC SYSTEM: PNEUMATIC CONTROL UNIT DOUBLE LINE, ACCESSORIES INCLUDED

Model

4397
(KIT P-EASY)

EUROGRIP PNEUMATIC SYSTEM: P-EASY CONNECTION KIT

DESCRIPTION

The hardware needed to install and connect the P-EASY system.

Model


4381
(KIT P-TOP)


EUROGRIP PNEUMATIC SYSTEM: P-TOP CONNECTION KIT

DESCRIPTION

The hardware needed to install and connect the P-TOP system.

ADJUSTABLE INTERMEDIATES (WITH THE CROWNING WEDGE) ARE AVAILABLE IN ONE PIECE OR ASSEMBLED (INTERMEDIATE BODY + FRONT PLATE)

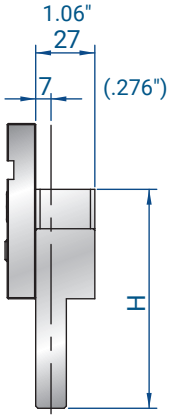

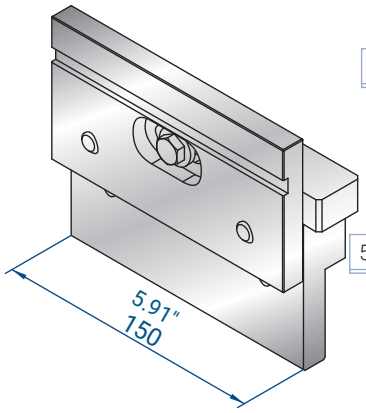

4221

H = 100 (3.937")

5.91"	7.9 lb	150 mm	3.6 kg

4222


H = 120 (4.724")


5.91"	10.1 lb	150 mm	4.6 kg

4223

H = 150 (5.906")

150 mm	6.0 kg
5.91"	13.2 lb

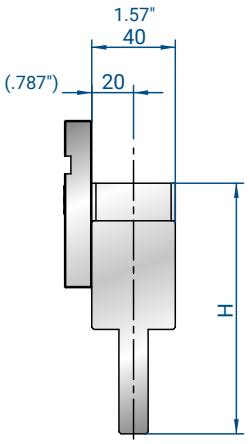

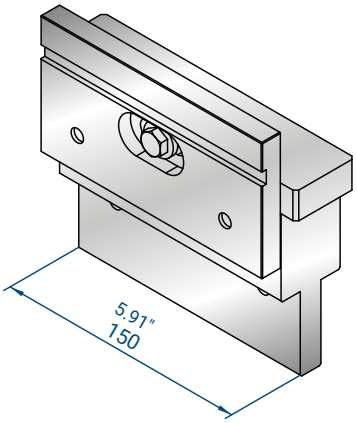

4224

H = 100 (3.937")


5.91"	9.3 lb	150 mm	4.2 kg


FITS CLAMP 5012 ONLY

4225

H = 120 (4.724")

150 mm	5.3 kg
5.91"	11.7 lb

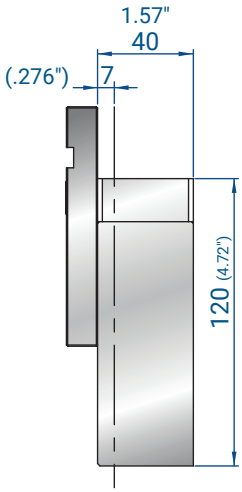

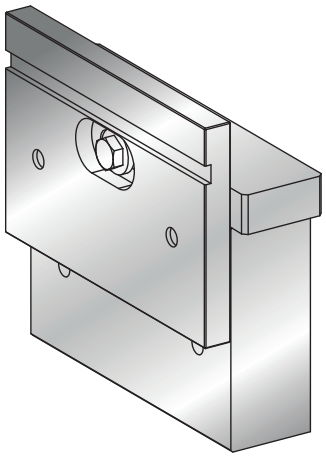


4073 - HD


H = 120 (4.724")

150 mm	7.2 kg
5.91"	15.9 lb

HEAVY DUTY

ADJUSTABLE INTERMEDIATES

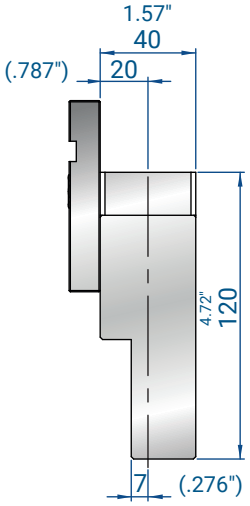

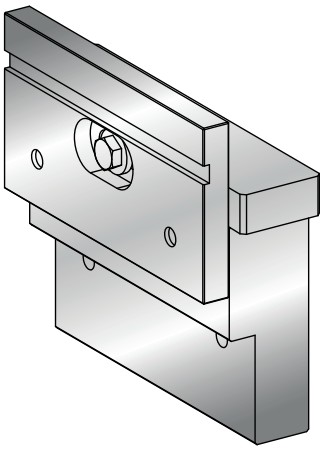


4411-HD


H = 120 (4.724")

150 mm	6.1 kg
5.91"	13.4 lb

HEAVY DUTY

FIXED INTERMEDIATES

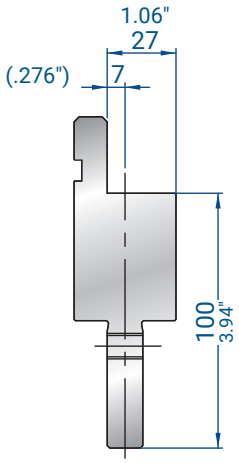


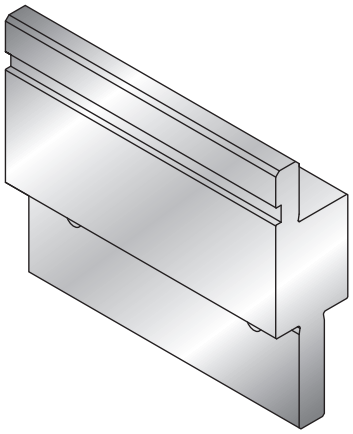

4282

H = 100 (3.937")


150 mm	3.8 kg
5.91"	8.4 lb

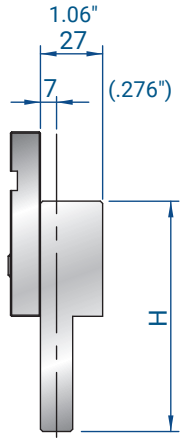

4226

H = 100 (3.937")


75 mm	1.8 kg
2.95"	4.0 lb

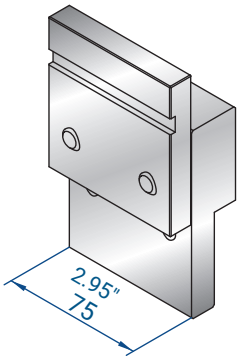

4227

H = 150 (5.906")


75 mm	2.9 kg
2.95"	6.4 lb

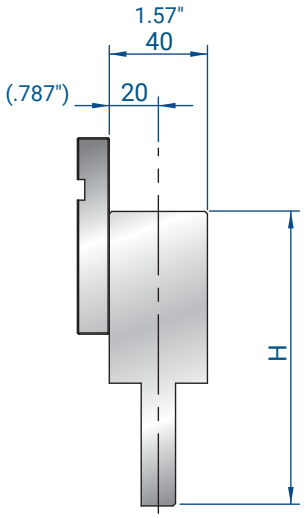


4228

H = 120 (4.724")

75 mm	2.6 kg
2.95"	5.7 lb

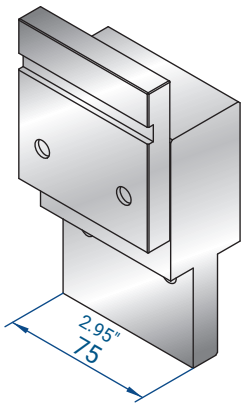

STANDARD M10 × 35 SCREWS ARE INCLUDED ONLY WITH ORDERS FOR INTERMEDIATE + CLAMP ASSEMBLIES

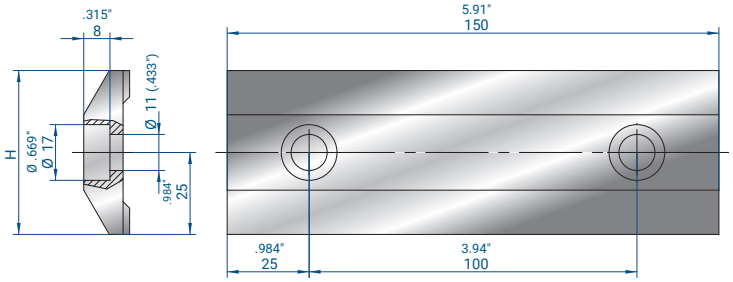

INSTALL WITH STANDARD M10 × 35 SCREWS

4016


H = 50 (1.969")

150 mm	0.6 kg
5.91"	1.3 lb

5013

H = 43 (1.693")

150 mm	0.6 kg
5.91"	1.3 lb

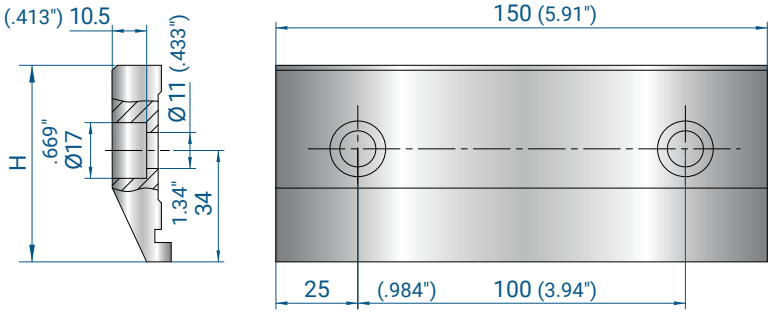

INSTALL WITH STANDARD M10 × 35 SCREWS

4020

H = 60 (2.362")

5.91"	1.8 lb	150 mm	0.8 kg

✕ ***#4000; #4224***


5012

H = 52 (2.047")

5.91"	1.5 lb	150 mm	0.7 kg

✓ ***#4000; #4224***



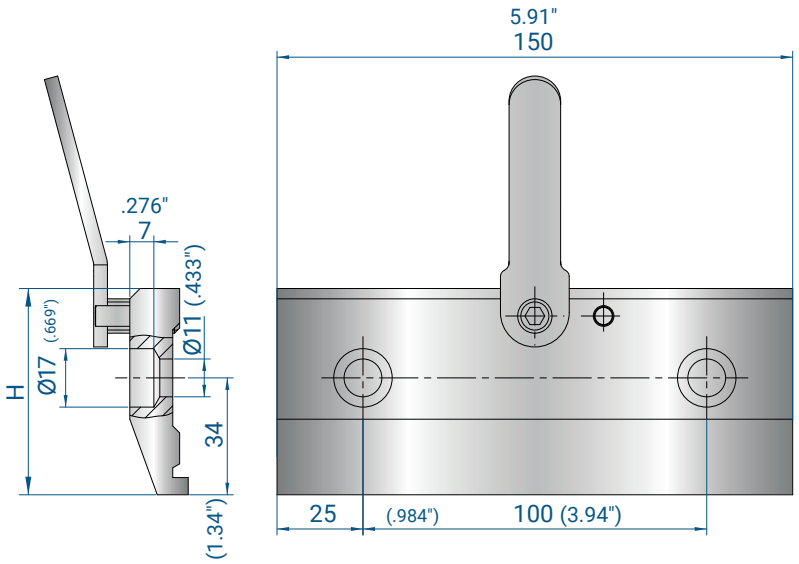

4021

H = 60 (2.362")

5.91"	2.0 lb	150 mm	0.9 kg

✕ ***#4000; #4224***


5011

H = 52 (2.047")

5.91"	1.8 lb	150 mm	0.8 kg

✓ ***#4000***

INSTALL WITH SPECIAL SCREWS 4281 (SUPPLIED WITH THE CLAMP)

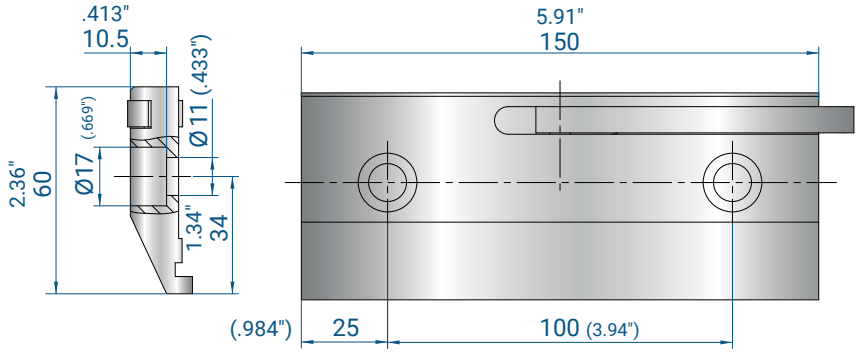

4009


H = 60 (2.362")

5.91"	2.0 lb	150 mm	0.9 kg

✕ ***#4000; #4001; #4224***

INSTALL WITH STANDARD M10 × 35 SCREWS

STANDARD M10 × 35 SCREWS ARE INCLUDED ONLY WITH ORDERS FOR INTERMEDIATE + CLAMP ASSEMBLIES

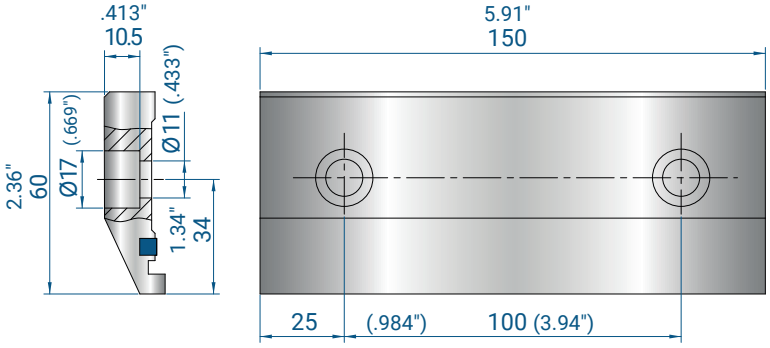


4199

H = 60 (2.362")

150 mm 5.91"	0.8 kg 1.8 lb

INSTALL WITH STANDARD M10 × 35 SCREWS

#4000; #4001; #4224

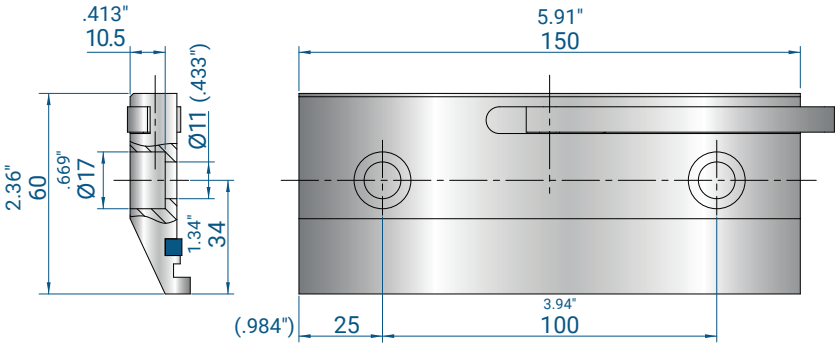


4220

H = 60 (2.362")

150 mm 5.91"	0.8 kg 1.8 lb

INSTALL WITH STANDARD M10 × 35 SCREWS

#4000; #4001; #4224

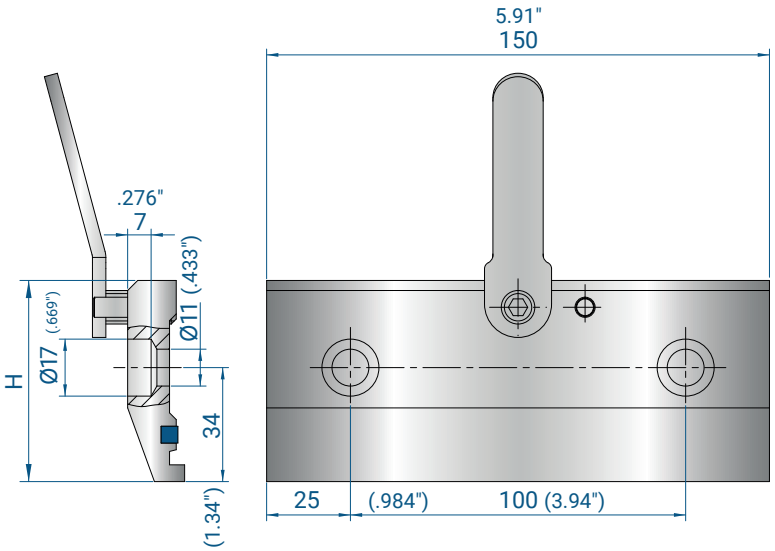

4219

H = 60 (2.362")

150 mm 5.91"	0.9 kg 2.0 lb

INSTALL WITH SPECIAL SCREWS 4281 (SUPPLIED WITH THE CLAMP)

#4000; #4224


4349




POLYURETHANE STRIP, SPARE FOR CLAMPS:

#4199; #4220; #4219

4281



SPECIAL SCREWS FOR CLAMPS 4021-5011-4219-4007, SUPPLIED WITH THE CLAMP

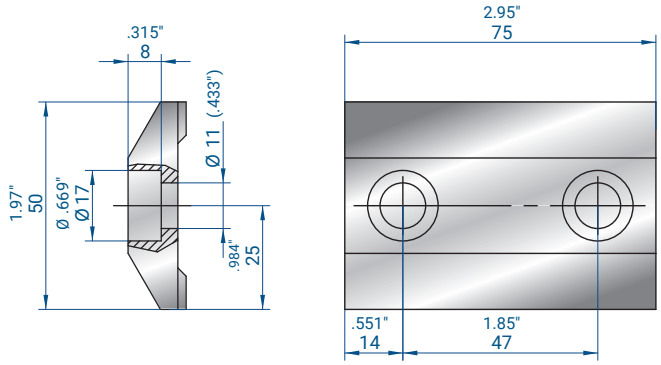


4008

H = 50 (1.969")

75 mm	0.3 kg
2.95"	0.7 lb

INSTALL WITH STANDARD M10 × 35 SCREWS

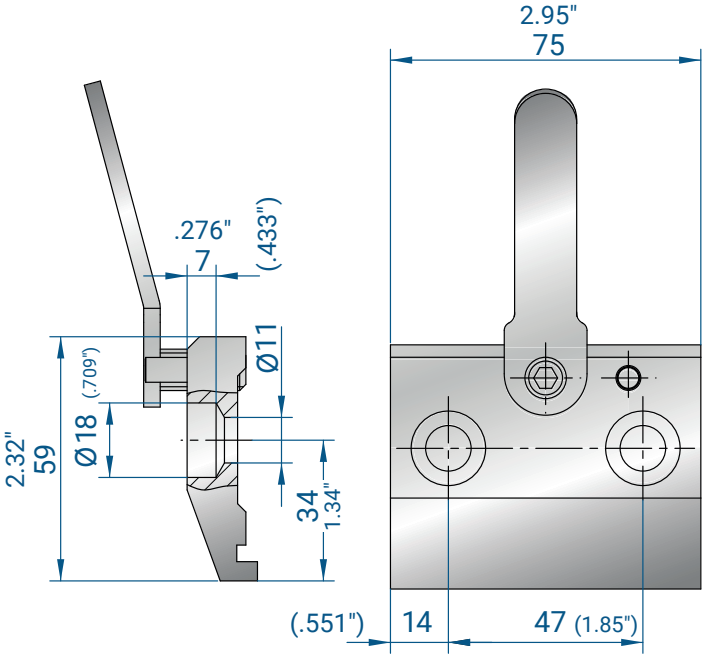


4007

H = 59 (2.323")

75 mm	0.5 kg
2.95"	1.1 lb

INSTALL WITH SPECIAL SCREWS 4281

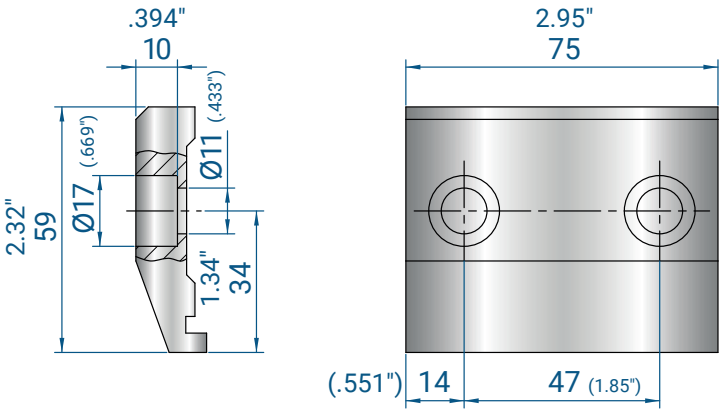


4090

H = 59 (2.323")

75 mm	0.4 kg
2.95"	0.9 lb


INSTALL WITH STANDARD M10 × 35 SCREWS

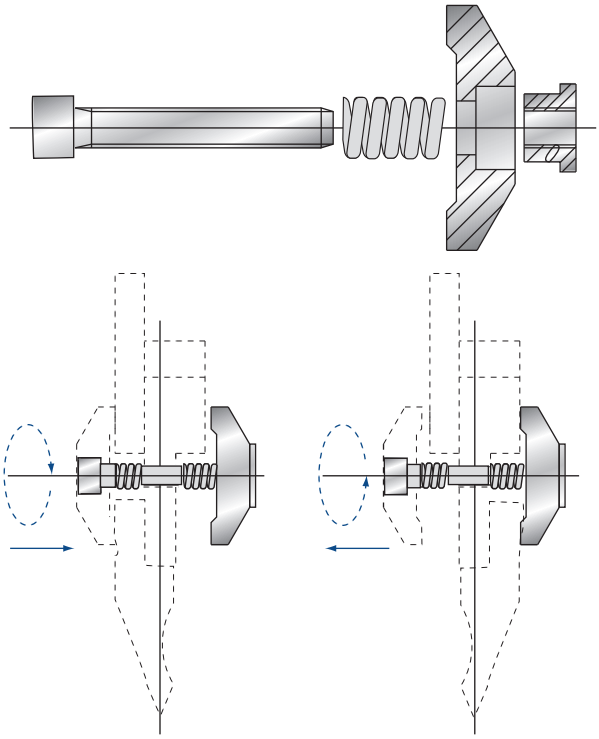

4031

DOUBLE CLAMPING KIT


150 mm	1.0 kg	~~5.91"~~	~~2.2 lb~~

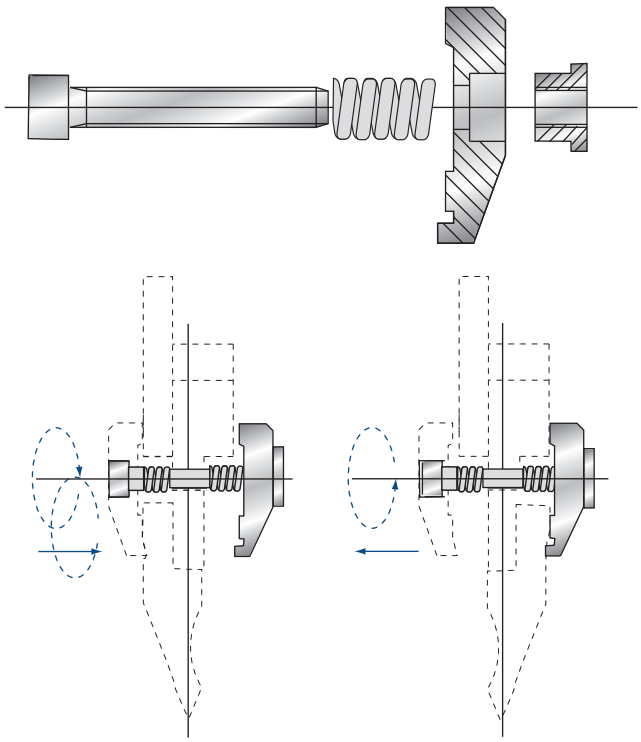


4032

DOUBLE CLAMPING KIT

150 mm	1.2 kg	~~5.91"~~	~~2.6 lb~~

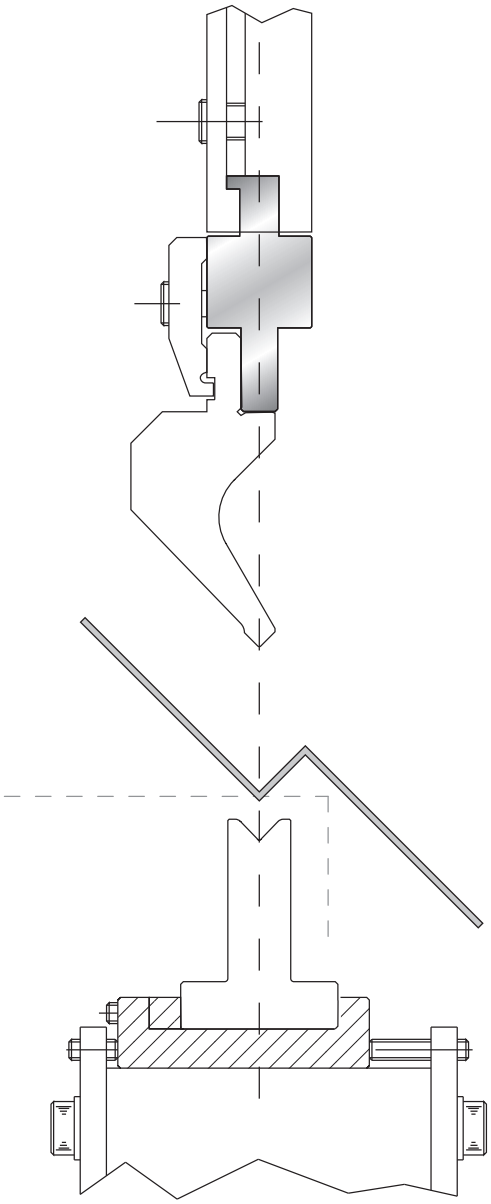

MINIMUM ORDER: 5 ADAPTERS

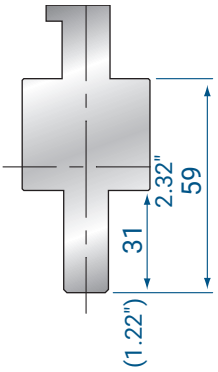


4000

150 mm 5.91"	1.5 kg 3.3 lb

CLAMP

5011; 5012

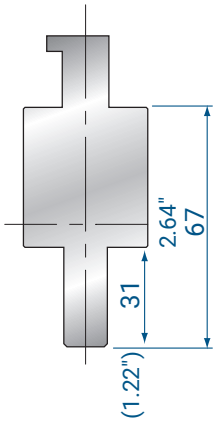


4001

150 mm 5.91"	2.0 kg 4.4 lb


CLAMP

Max H = 60 mm (2.36")

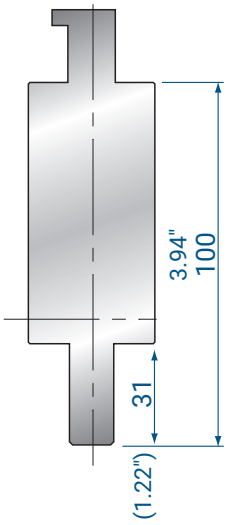


4002

150 mm 5.91"	3.5 kg 7.7 lb

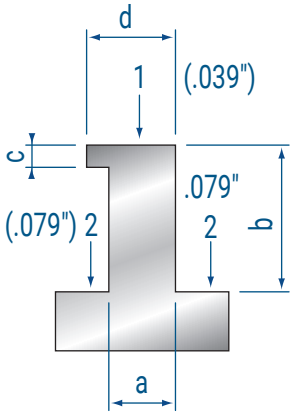

	1	2
a =		
b =		
c =		
d =		


PLEASE MARK THE CONTACT AND PRESSURE POINTS (1, 2)

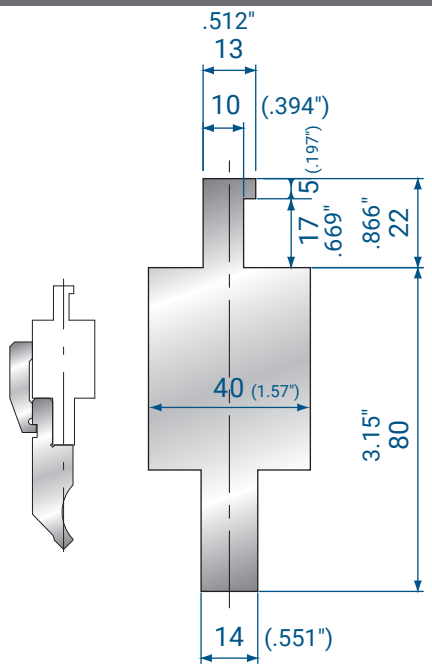

4143

LVD STYLE S (small) STANDARD


150 mm	3.0 kg
5.91"	6.6 lb



4144

LVD STYLE M (medium) SPECIAL


150 mm	3.0 kg
5.91"	6.6 lb



4145

LVD STYLE L (large) SPECIAL


150 mm	3.0 kg
5.91"	6.6 lb



4146

LVD STYLE XL (Extra Large) SPECIAL


150 mm	3.0 kg
5.91"	6.6 lb

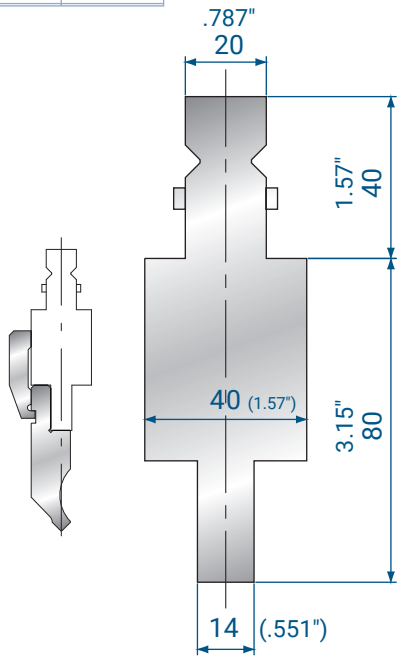

4191

TRUMPF/WILA STYLE


150 mm	3.6 kg
5.91"	7.9 lb

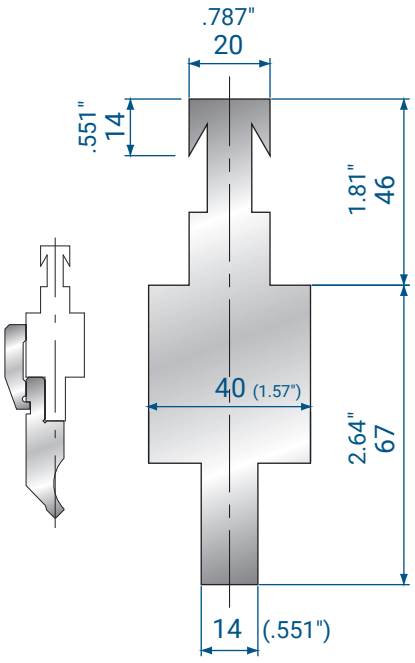

4192

BYSTRONIC-R STYLE


150 mm	3.0 kg
5.91"	6.6 lb

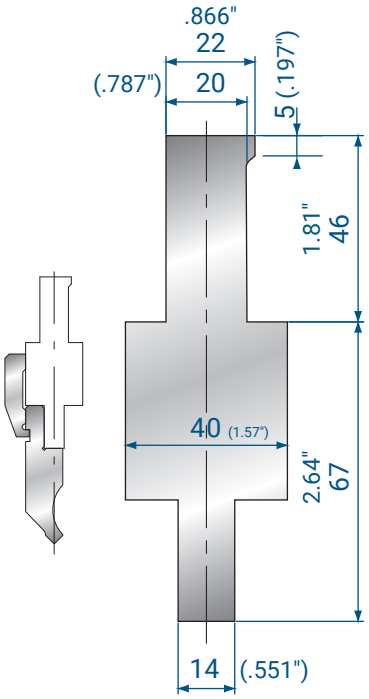

4193

BYSTRONIC - S STYLE


150 mm	3.2 kg
5.91"	7.1 lb

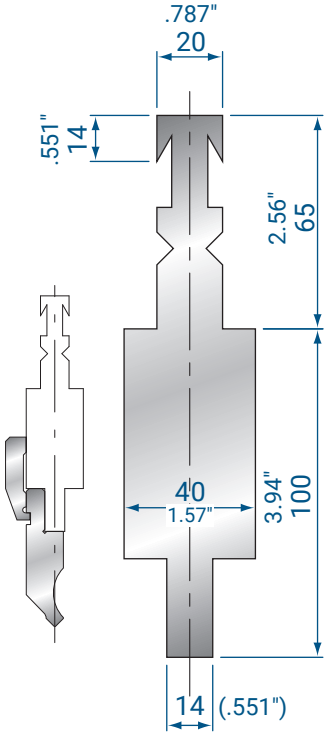

4214

BYSTRONIC - RF-A STYLE


150 mm	5.0 kg
5.91"	11.0 lb

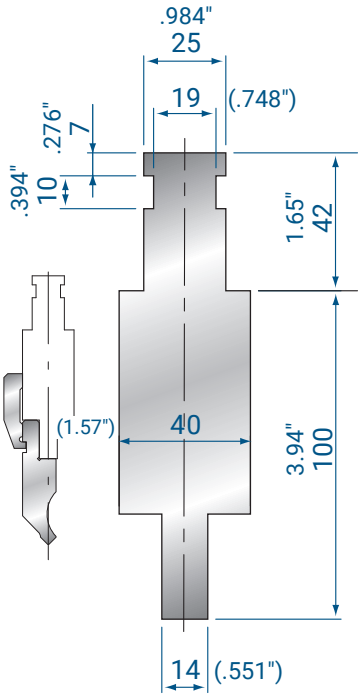

4215

WEINBRENNER STYLE


150 mm	4.8 kg
5.91"	10.6 lb

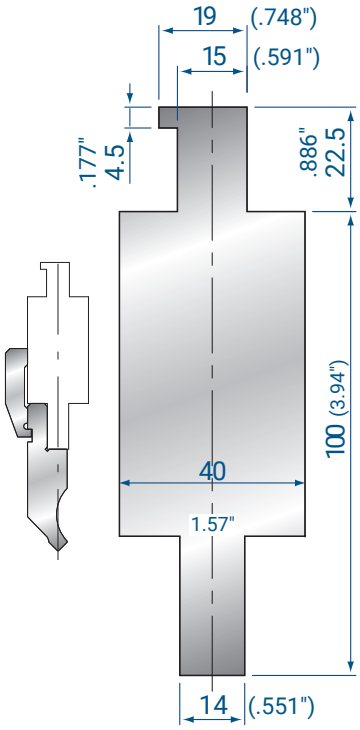

4216

CBC STYLE


5.91"	9.0 lb	150 mm	4.1 kg

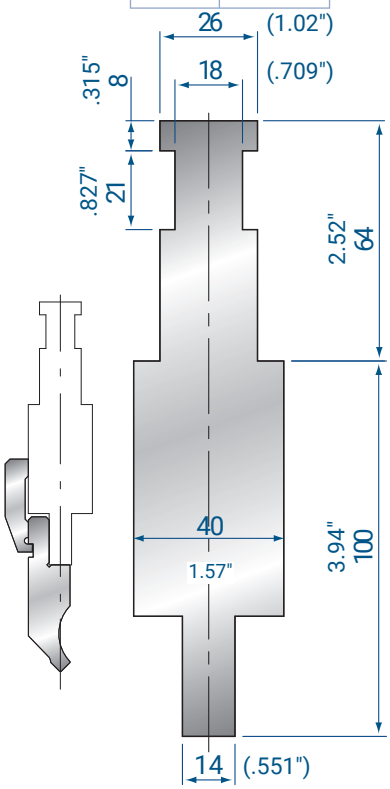

4217

EHT STYLE


150 mm	5.4 kg
5.91"	11.9 lb

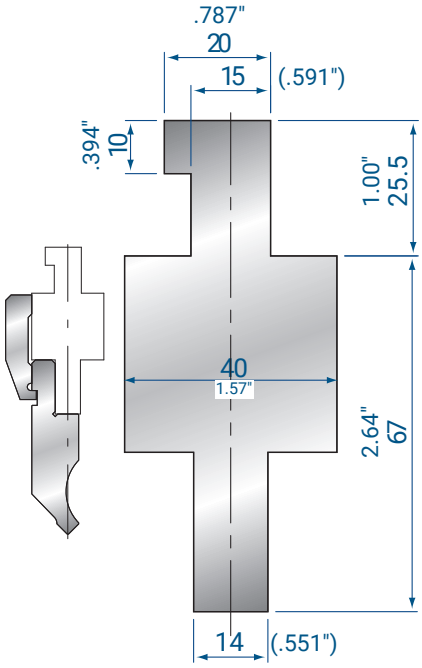



4218

DURMAZLAR STYLE

150 mm	2.6 kg
5.91"	5.7 lb

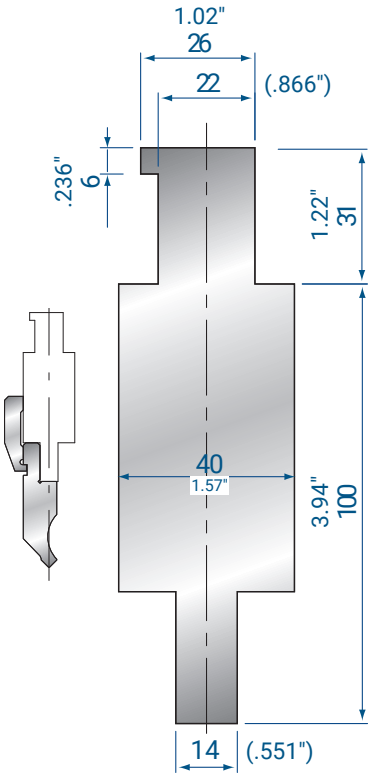

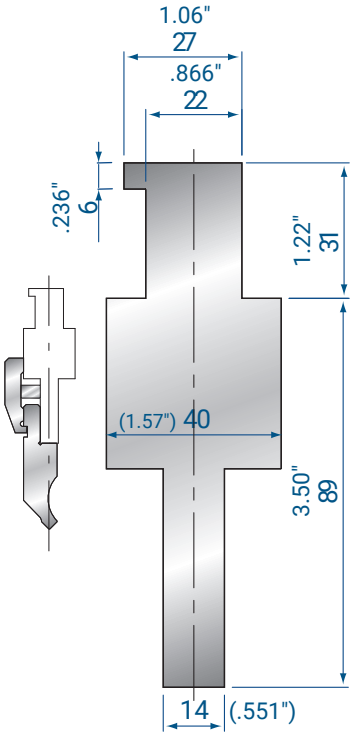

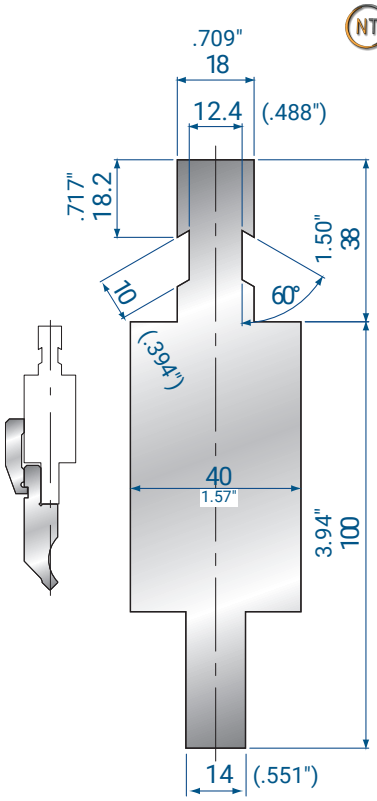

4229

DARLEY STYLE

150 mm	4.5 kg
5.91"	9.9 lb

4272


BAYKAL STYLE

150 mm	3.5 kg
5.91"	7.7 lb

4273

COLGAR STYLE

150 mm	4.4 kg
5.91"	9.7 lb

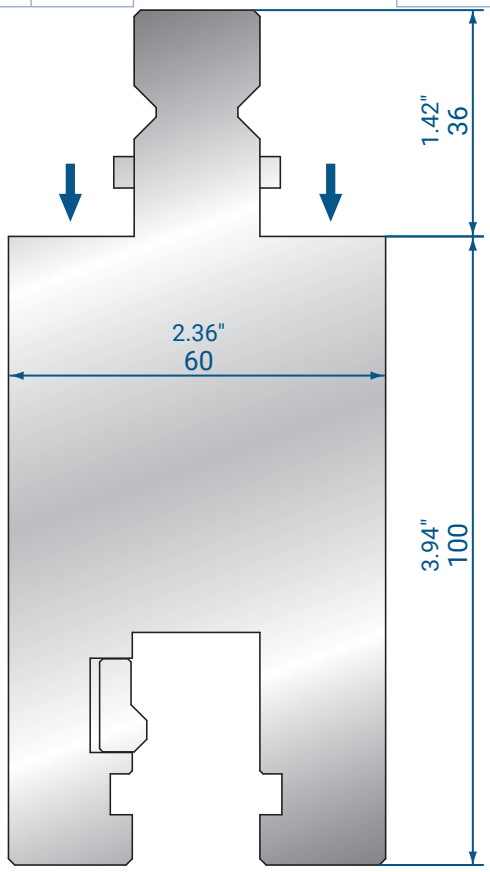


4361

EXTENSION FOR
TRUMPF / WILA STYLE

H = 100 (3.937")

150 mm	7.0 kg
5.91"	15.4 lb

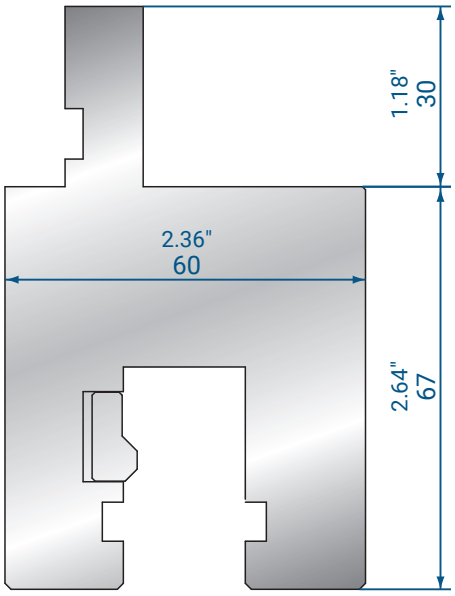


4362

ADAPTER
FROM AMADA STYLE TO TRUMPF / WILA STYLE

H = 67 (2.638")


150 mm	4.0 kg	5.91"	8.8 lb

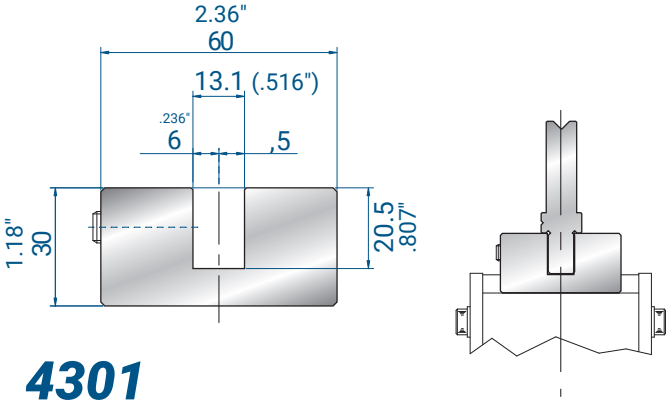

4301

FROM AMADA STYLE TO TRUMPF - WILA - BYSTRONIC STYLE


39.37"	26.2 lb	1000 mm	11.9 kg
19.69"	13.2 lb	500 mm	6.0 kg

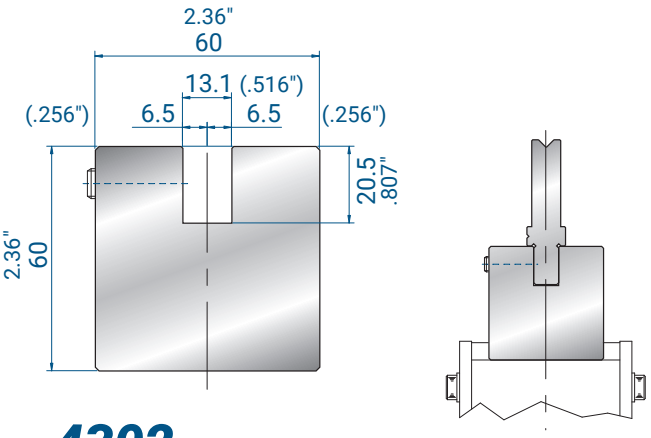


4302

FROM AMADA STYLE TO TRUMPF - WILA - BYSTRONIC STYLE

39.37"	57.3 lb	1000 mm	26.0 kg
19.69"	28.7 lb	500 mm	13.0 kg

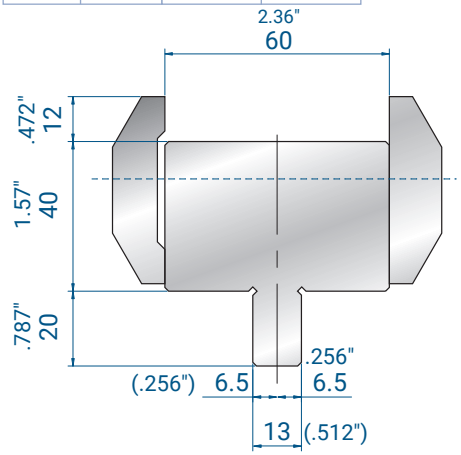

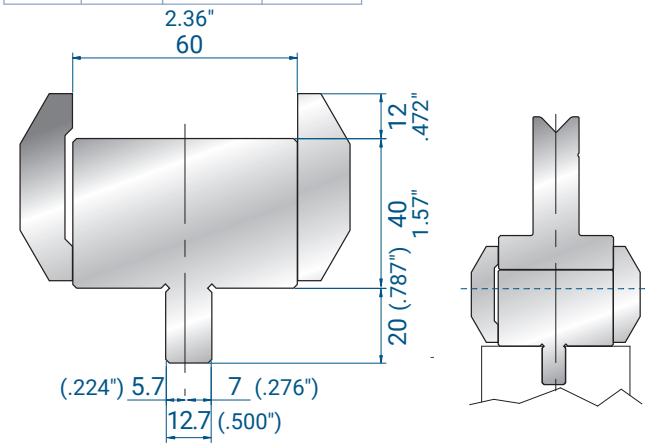


4303

FROM TRUMPF - WILA - BYSTRONIC STYLE TO AMADA STYLE

835 mm	21.3 kg
415 mm	11.2 kg

32.87"	47.0 lb
16.34"	24.7 lb

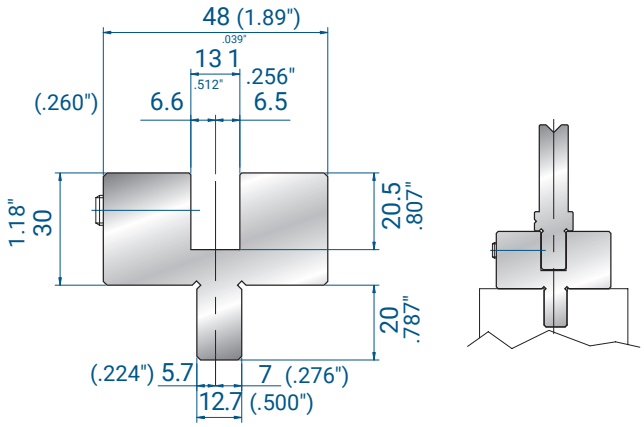

4304

FROM LVD STYLE TO AMADA STYLE

835 mm	21.3 kg
415 mm	11.2 kg

32.87"	47.0 lb
16.34"	24.7 lb

4305

FROM LVD STYLE TO TRUMPF - WILA - BYSTRONIC STYLE

1000 mm	11.0 kg
500 mm	11.0 kg

39.37"	24.3 lb
19.69"	24.3 lb

4033


835 mm 32.87"	25.5 kg 56.2 lb
415 mm 16.34"	13.3 kg 29.3 lb

4034

150 mm 5.91"	0.7 kg 1.5 lb

4016

150 mm 5.91"	0.6 kg .024"

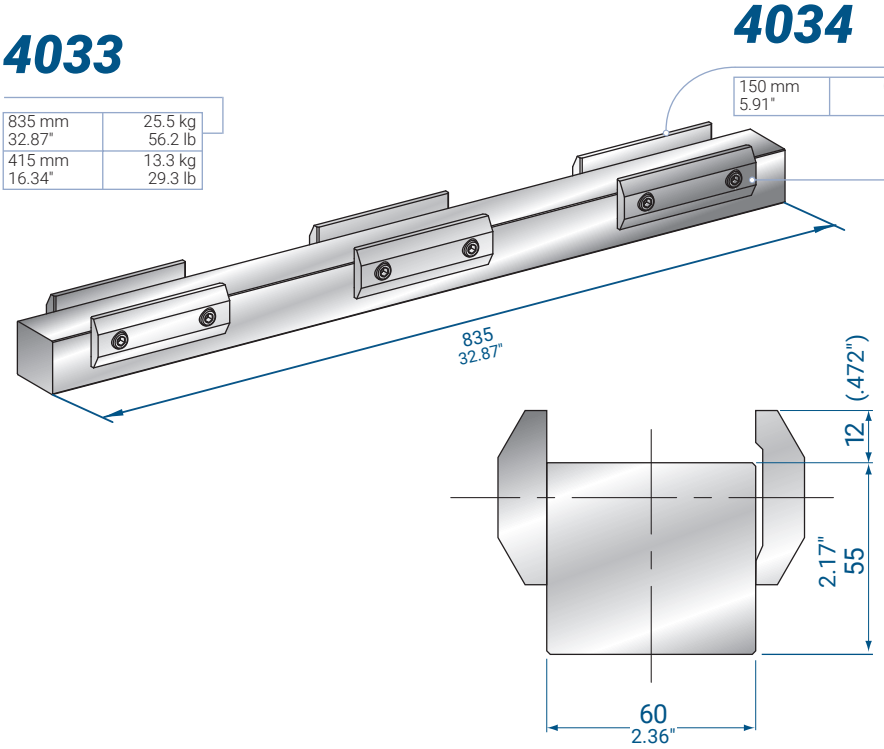

AMADA STYLE

AMADA STYLE LOWER ADAPTER

4050


835 mm 32.87"	28.6 kg 63.1 lb
415 mm 16.34"	14.2 kg 31.3 lb

4041

800 mm 31.50"	3.6 kg 7.9 lb
380 mm 14.96"	1.7 kg 3.7 lb


4040

800 mm 31.50"	3.3 kg 7.3 lb
380 mm 14.96"	1.6 kg 3.5 lb

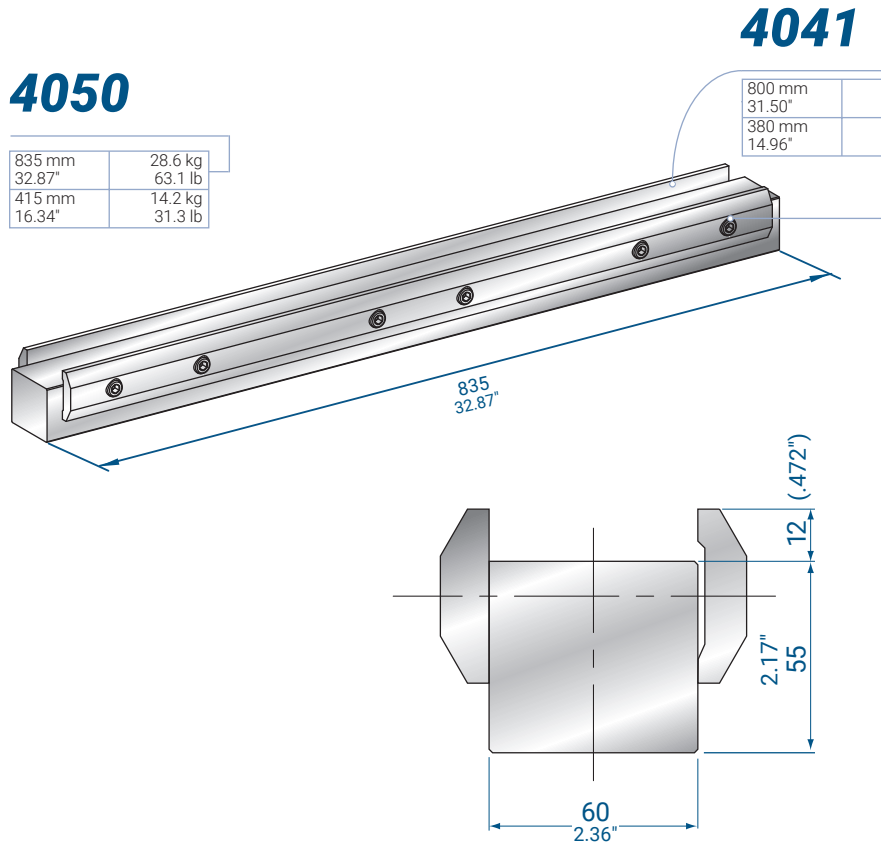

AMADA STYLE

AMADA STYLE LOWER ADAPTER

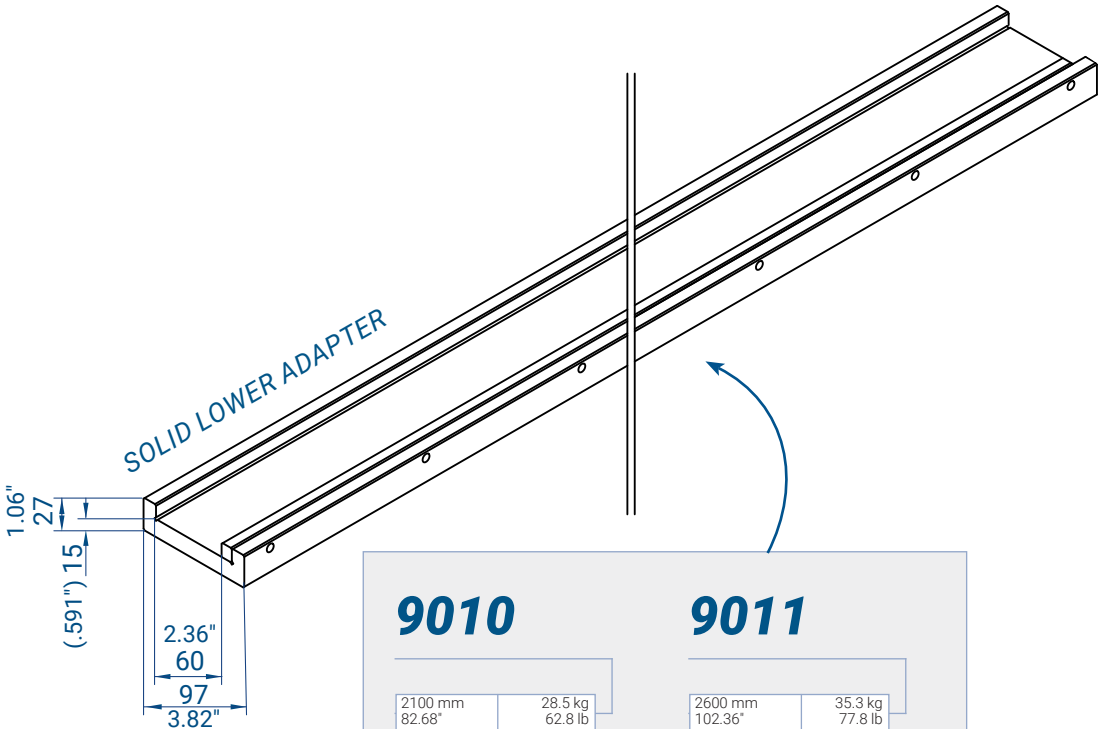

9010

2100 mm 82.68"	28.5 kg 62.8 lb

9011


2600 mm 102.36"	35.3 kg 77.8 lb

9012

3100 mm 122.05"	42.0 kg 92.6 lb


9013

4100 mm 161.42"	55.6 kg 123 lb

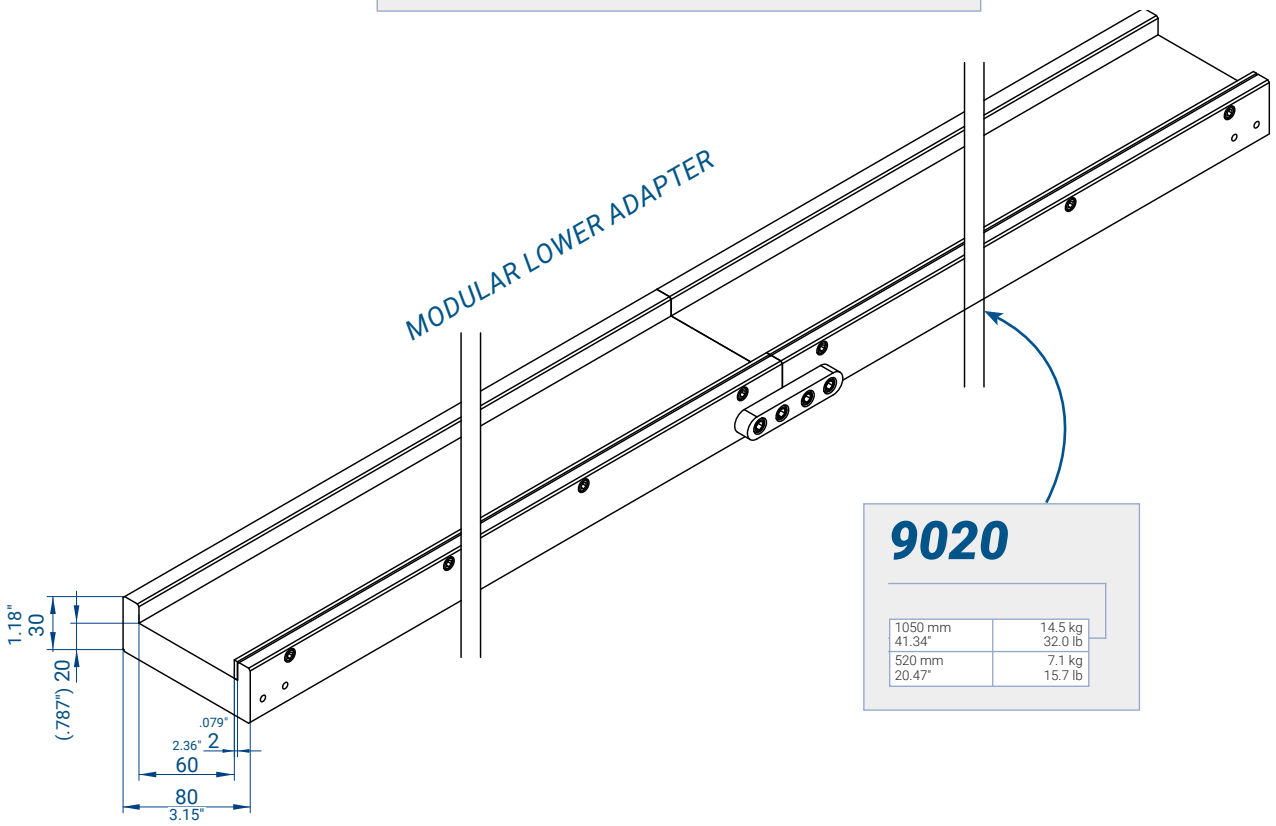

9020


1050 mm 41.34"	14.5 kg 32.0 lb
520 mm 20.47"	7.1 kg 15.7 lb

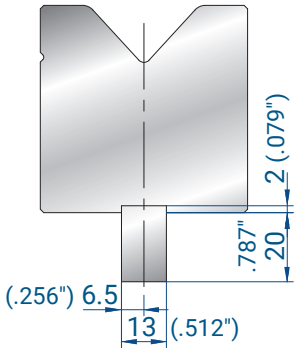

8100

BYSTRONIC / TRUMPF STYLE


832 mm	1.8 kg
412 mm	0.9 kg
32.76"	4.0 lb
16.22"	2.0 lb



8101

LVD STYLE


832 mm	1.8 kg
412 mm	0.9 kg
32.76"	4.0 lb
16.22"	2.0 lb

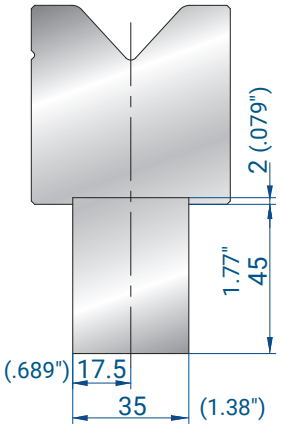

8102

WEINBRENNER STYLE


832 mm	10.5 kg
412 mm	5.2 kg
32.76"	23.1 lb
16.22"	11.5 lb



8107

AMERICAN STYLE


832 mm	1.4 kg
412 mm	0.7 kg
32.76"	3.1 lb
16.22"	1.5 lb

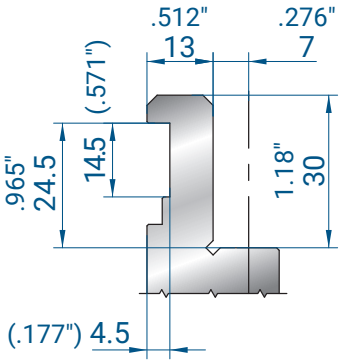

8010

STYLE


835 mm	
415 mm	
805 mm SECTIONED	
32.87"	
16.34"	
31.69" SECTIONED	

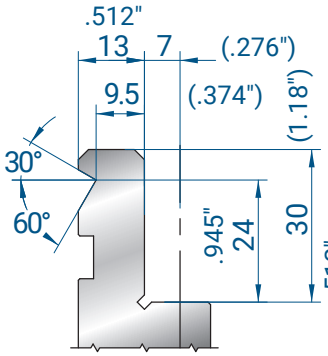

8011

BMB STYLE


835 mm	
415 mm	
805 mm SECTIONED	
32.87"	
16.34"	
31.69" SECTIONED	

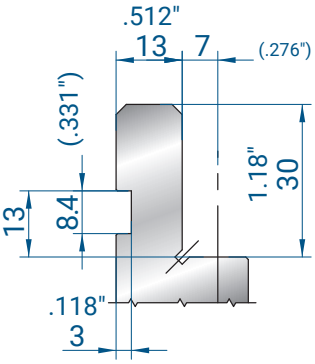

8012

AMADA / PROMECAM STYLE


STANDARD

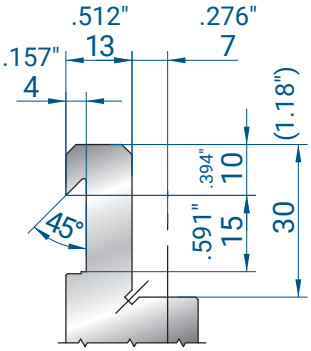

8013

GASPARINI STYLE


835 mm	
415 mm	
805 mm SECTIONED	
32.87"	
16.34"	
31.69" SECTIONED	



8014

TEDA STYLE


835 mm	32.87"
415 mm	16.34"
805 mm SECTIONED	31.69" SECTIONED



8016

EURO BYSTRONIC STYLE


835 mm	32.87"
415 mm	16.34"
805 mm SECTIONED	31.69" SECTIONED



8017

BYSTRONIC STYLE


835 mm	32.87"
415 mm	16.34"
805 mm SECTIONED	31.69" SECTIONED



8106

SQUARE BAR 15 × 15 MM (.59 × .59")


835 mm	2.9 kg
32.87"	6.4 lb



8020

ONE TOUCH STYLE


835 mm	32.87"
415 mm	16.34"
805 mm SECTIONED	31.69" SECTIONED



8021

SMART CLAMP STYLE

835 mm	32.87"
415 mm	16.34"
805 mm SECTIONED	31.69" SECTIONED

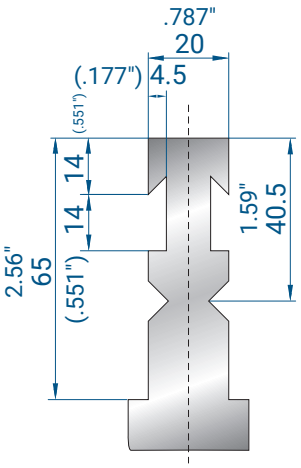



8022

BYSTRONIC RF - A STYLE

INCLUDED ON REQUEST

EACH DIE NEEDS ITS OWN HOLDER

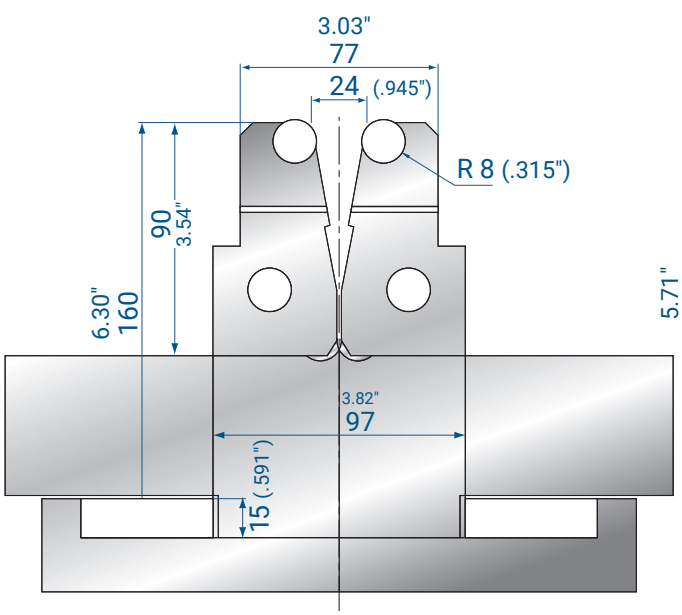

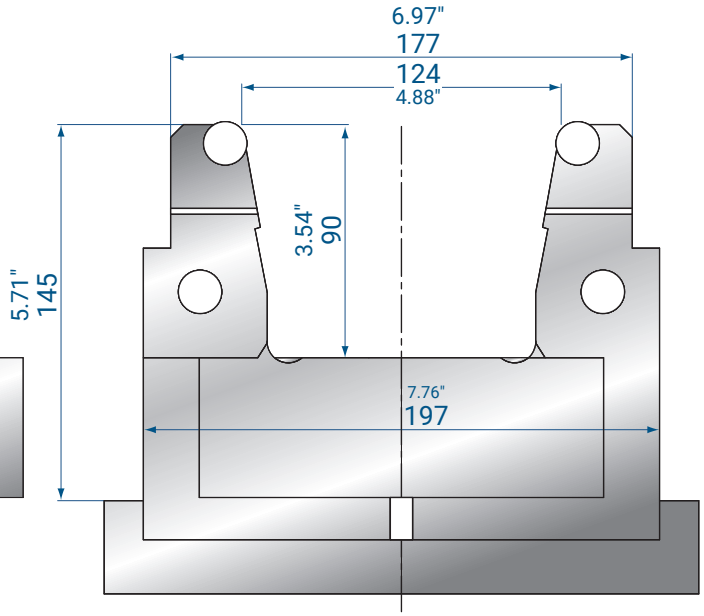





3190

1050 mm 41.34"	133 kg 293 lb
1000 mm 39.37"	125 kg 276 lb
550 mm 21.65"	72.0 kg 159 lb
500 mm 19.69"	64.0 kg 141 lb
250 mm 9.84"	34.0 kg 75.0 lb

Minimum
bend angle = 30°
V width = min 24 mm (.94") – max 124 mm (4.88")
F max = 125 t/m (42.0 US t/ft) at 90°

#9015*; *#9018 (page 253)

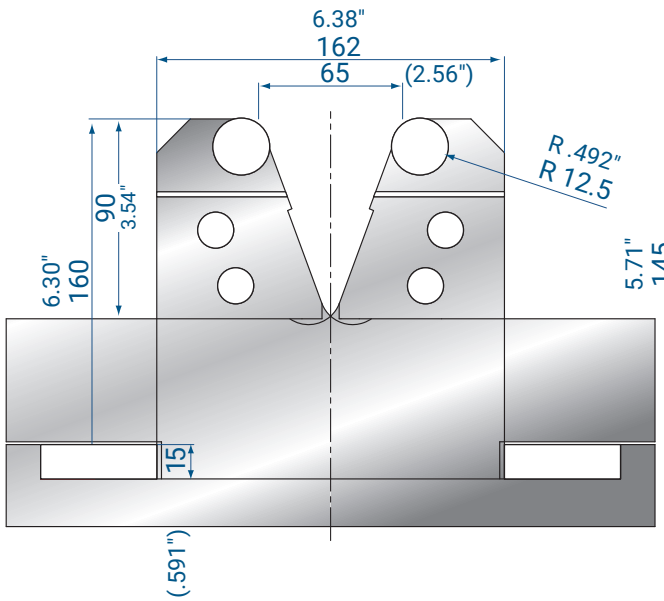

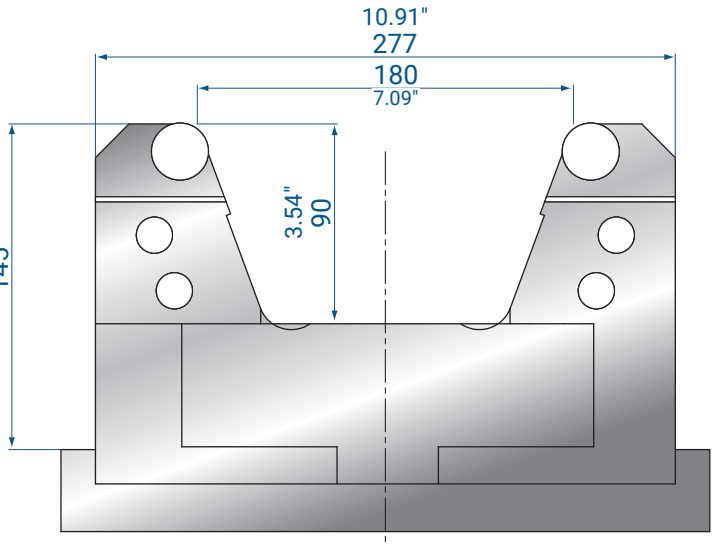





3191

1050 mm 41.34"	180 kg 397 lb
1000 mm 39.37"	170 kg 375 lb
550 mm 21.65"	96.0 kg 212 lb
500 mm 19.69"	86.0 kg 190 lb
250 mm 9.84"	44.0 kg 97.0 lb

Minimum
bend angle = 60°
V width = min 65 mm (2.56") – max 180 mm (7.09")
F max = 200 t/m (67.2 US t/ft) at 90°

#9016*; *#9019 (page 253)

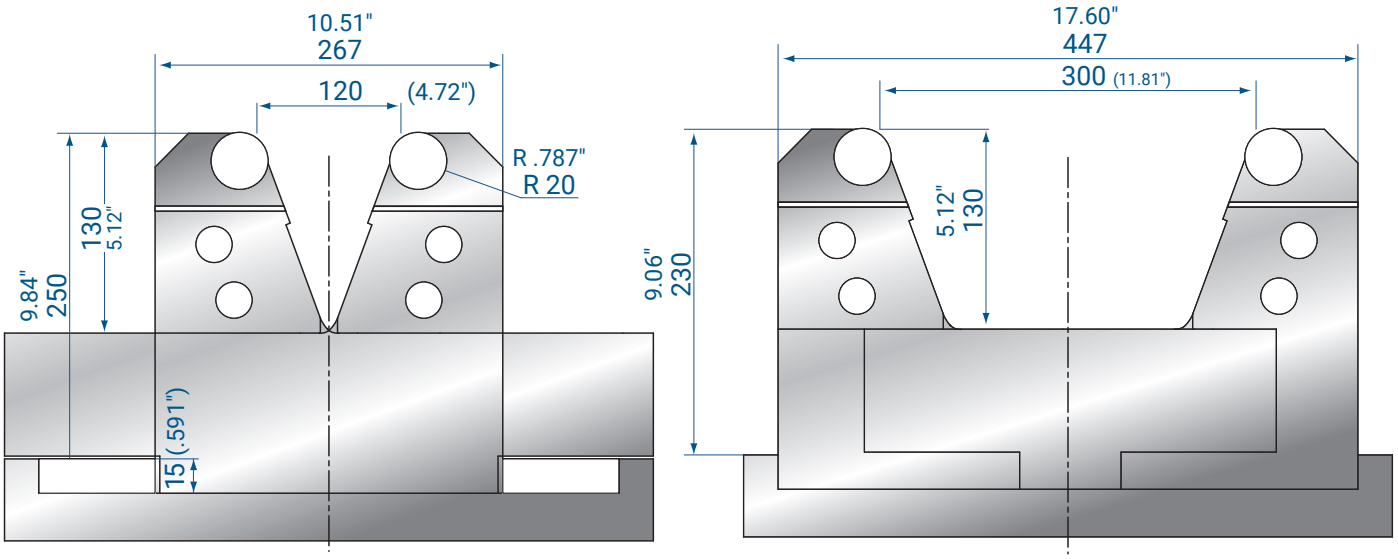




3192


700 mm	420 kg
600 mm	360 kg
500 mm	300 kg

27.56"	926 lb
23.62"	794 lb
19.69"	661 lb

Minimum
bend angle = 60°
V width = min 120 mm (4.72") –
max 300 mm (11.81")
F max = 400 t/m (134.4 US t/ft) at 90°

#9014 (page 253)

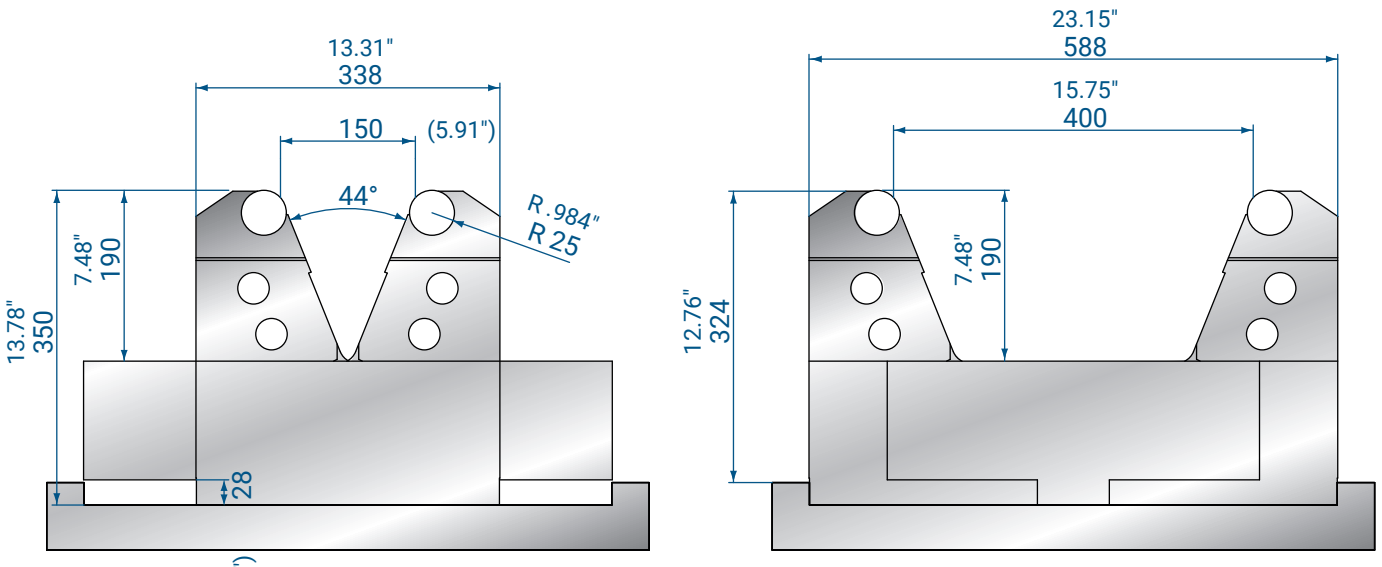



3243

600 mm	560.0 kg

23.62"	1,235 lb

Minimum
bend angle = 60°
V width = min 150 mm (5.91") –
max 400 mm (15.75")
F max = 600 t/m (201.6 US t/ft) at 90°

#9017 (page 253)

A SPECIFIC HOLDER FOR EACH ADJUSTABLE DIE


9015

3000 mm 118.11"	120 kg 265 lb
2000 mm 78.74"	80.0 kg 176 lb
100 mm 3.94"	40.0 kg 88.2 lb
500 mm 19.69"	20.0 kg 44.1 lb

FOR DIE ***3190***

9018

WITH WILA / TRUMPF TANG

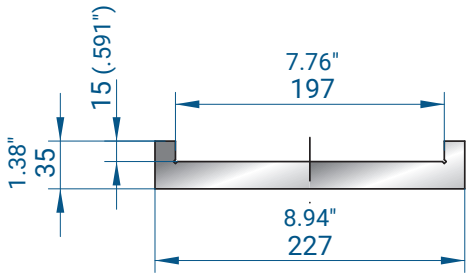


9016

3000 mm 118.11"	318 kg 701 lb
2000 mm 78.74"	212 kg 467 lb
100 mm 3.94"	106 kg 234 lb
500 mm 19.69"	53.0 kg 117 lb

FOR DIE ***3191***

9019

WITH WILA / TRUMPF TANG

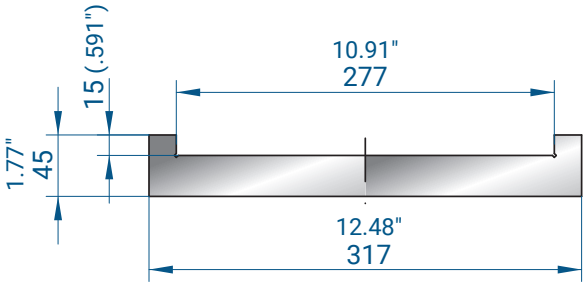


9014

3000 mm 118.11"	594 kg 1,310 lb
2400 mm 94.49"	396 kg 873 lb
1200 mm 47.24"	198 kg 437 lb
600 mm 23.62"	99.0 kg 218 lb

FOR DIE

3192

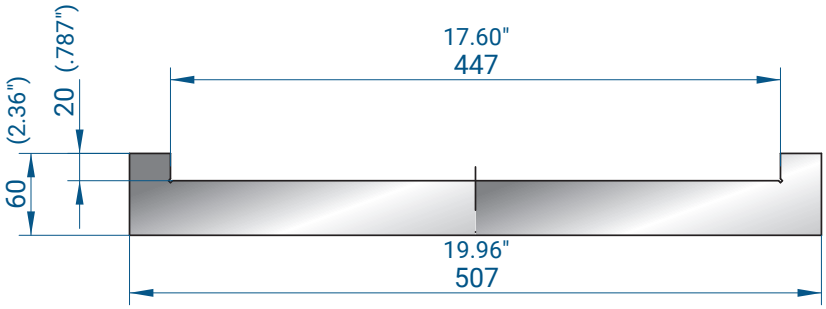


9017

3000 mm 118.11"	900 kg 1,984 lb
2400 mm 94.49"	600 kg 1,323 lb
1200 mm 47.24"	300 kg 661 lb
600 mm 23.62"	150 kg 331 lb

FOR DIE

3242

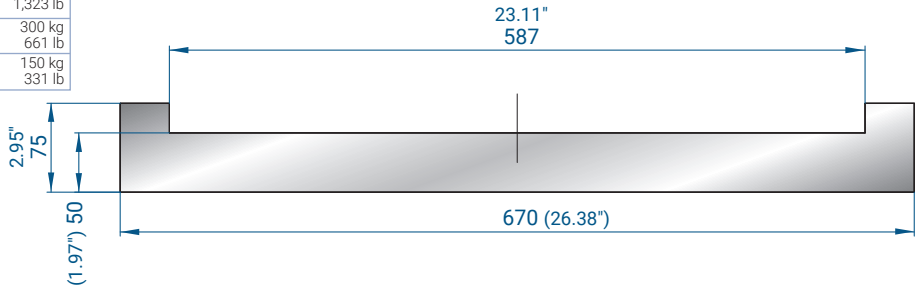



PAIR OF HOLDERS FOR PROTECTIVE FILM / CLOTH

4309

2.6 kg



SCRATCH-RESISTANT POLYURETHANE FILM

4308
Thickness = 0.5 mm (.020")
Width = 105 mm (4.13")
Length = 33 m (108 ft)
Weight = 1.7 kg (3.7 lb)

4314
Thickness = 0.8 mm (.031")
Width = 95 mm (3.74")
Length = 33 m (108 ft)
Weight = 2.7 kg (6.0 lb)





PROTECTIVE CLOTH THAT PREVENTS OR REDUCES MARKS ON THE SHEET


4379
L = 5 m (16.4 ft) / 0.4 kg (0.9 lb)
L = 10 m (32.8 ft) / 0.8 kg (1.8 lb)
Thickness = max 3 mm (.118")



4380
L = 5 m (16.4 ft) / 0.4 kg (0.9 lb)
L = 10 m (32.8 ft) / 0.8 kg (1.8 lb)
Thickness = max 6 mm (.236")

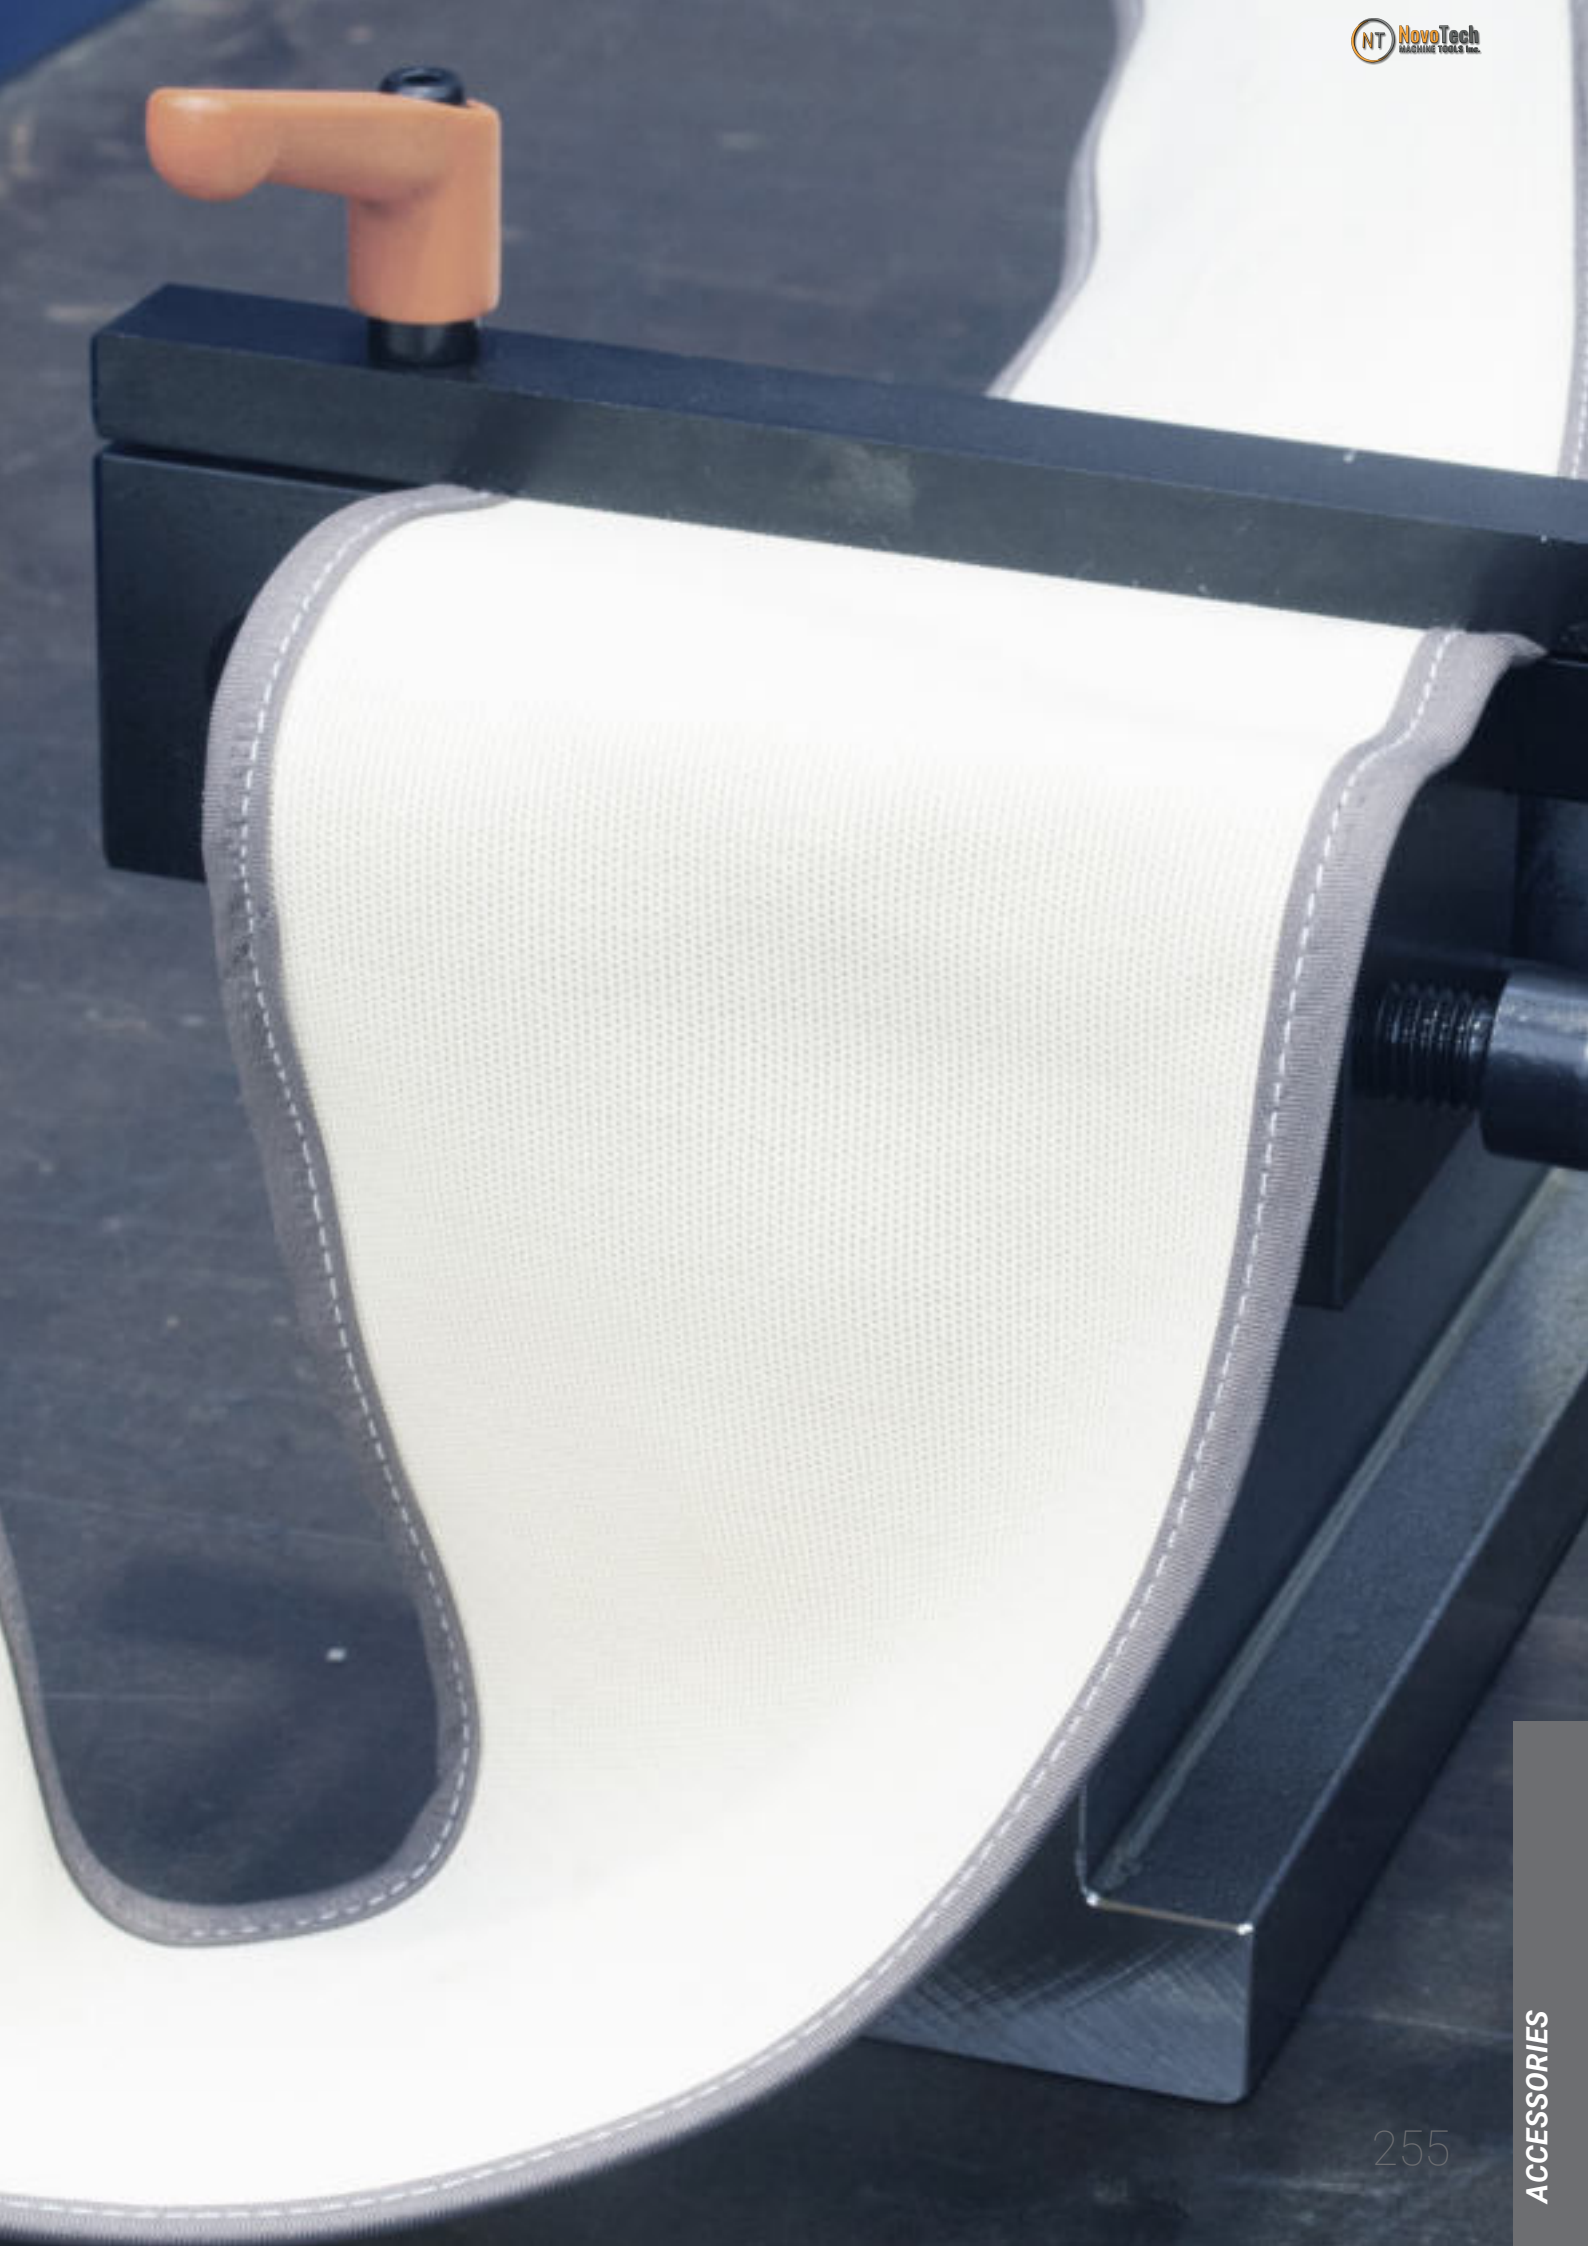

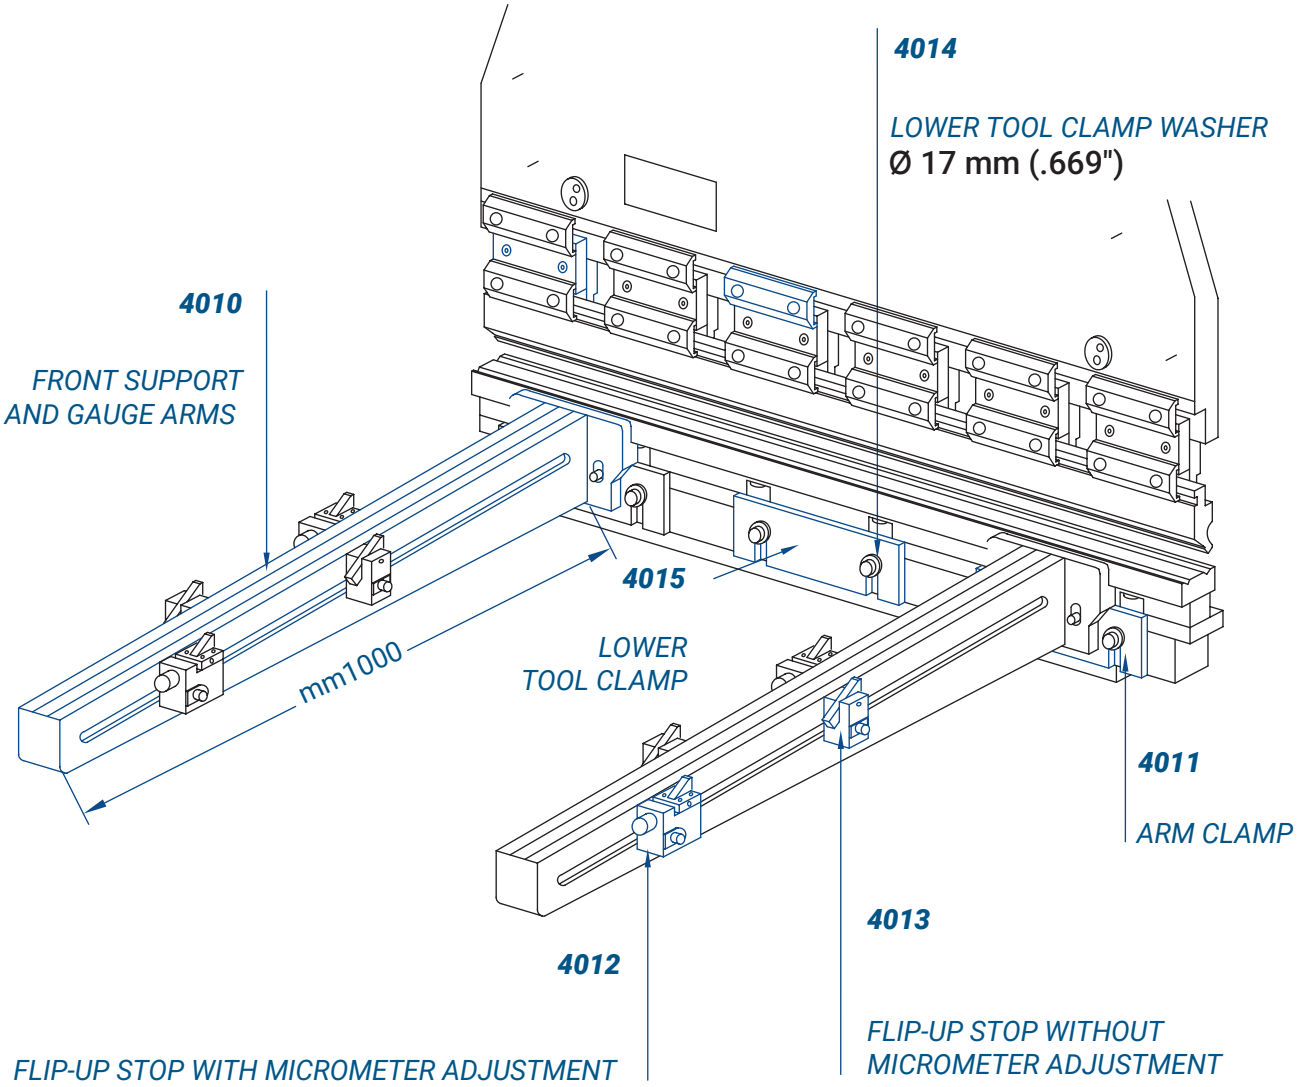


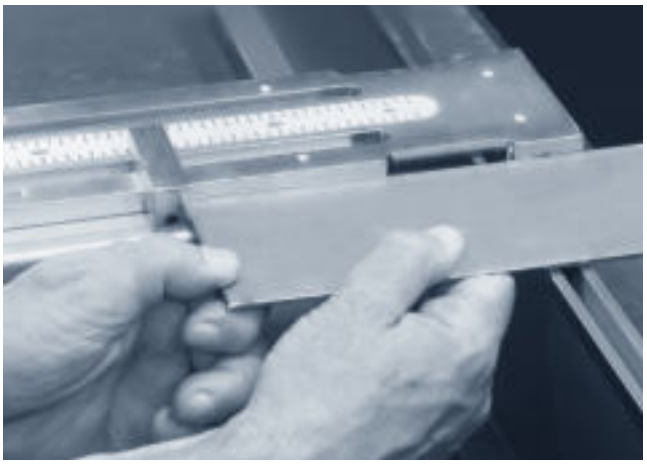

4306

REFERENCE SQUARES

3.0 kg

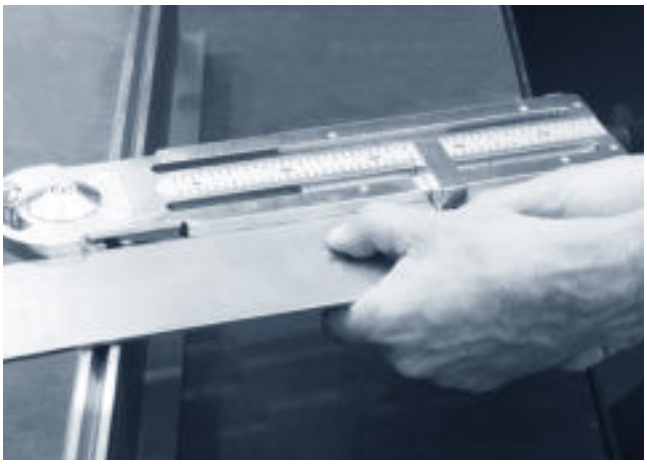

4307

ADJUSTABLE REFERENCE SQUARES

3.5 kg

MAGNETIC SQUARES

4318

MAGNETIC SQUARE, LEFT



4319

MAGNETIC SQUARE, RIGHT




MANUAL PROTRACTOR

MANUAL PROTRACTOR FOR MEASURING INSIDE AND OUTSIDE ANGLES WITH MINIMAL INTERFERENCE

4383


THREE READING MODES



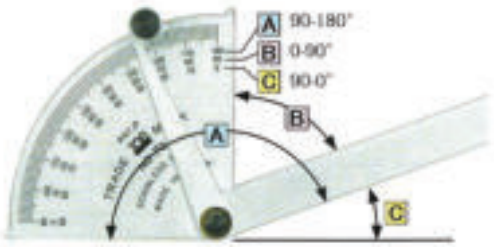


ACCURACY	DIMENSIONS	GRADUATION	MATERIAL
±0.2°	L = 255 mm (10.04") H = 80 mm (3.15")	1°	STAINLESS STEEL 1.2 mm (.047")

HOW TO USE

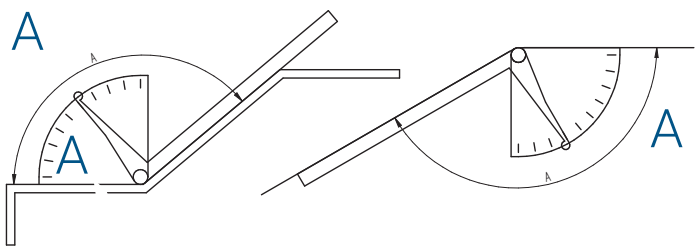

MEASURING AN INSIDE ANGLE

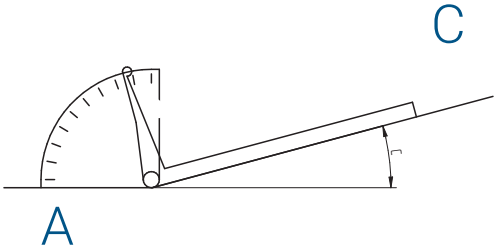

MEASURING AN OUTSIDE ANGLE

DIGITAL GAUGE FOR 45° CHAMFERS AND RADII

4384



Measures small 45° chamfers and radii.
The C/R button switches between chamfer and radius.
Absolute and relative measurement.
Zero can be set at any point.
Ø 20 mm (.787") master pin for calibration included.

MEASUREMENT	*45° chamfers on square corners; outside bend radii.*
MEASUREMENT RANGE	0.01 – 15.00 mm (.0004 – .591") 0.01 – 25.00 mm (.0004 – .984") *Chamfer on 45° corners (C) 0.01 – 15.00 mm (.0004 – .591")* *Radius on 90° corners (R) 0.01 – 25.00 mm (.0004 – .984")* *Radius on acute corners ≤ 89° (R) 0.06 – 25.00 mm (.002 – .984")*
RESOLUTION	0.01 mm (.0004")
ACCURACY	*Chamfer ±0.05 mm (.002") Radius ±0.08 mm (.003")*
MATERIAL	*Stainless steel*



STANDARD COLOR BLACK; OTHER COLORS ON REQUEST




CODE	STYLE	DRAWERS	LENGTH mm (in)
ACARM0NE0005	Amada	5 .197"	835 32.87"
ACARM1NE0005	Trumpf / Wila / Bystronic / LVD	5 .197"	1100
ACARM2NE0005	Trumpf / Wila / Bystronic / LVD	5 .197"	550 21.65"


CABINETS WITH 3 OR 4 DOORS AVAILABLE ON REQUEST



CODE	STYLE	DRAWERS	LENGTH mm (in)
CARRELLO0005	Tool cart for Amada-style tools 5 shelves – L = 835 mm (32.87")		









MATERIALS

1.2312
C45
42CrMo4

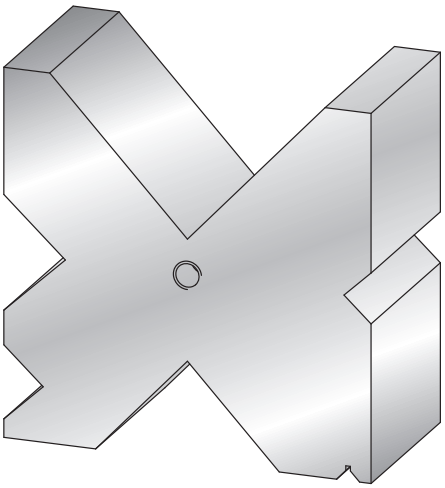


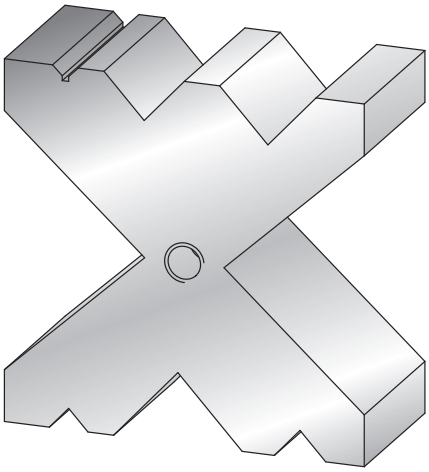


PROCESSING

Hardened

Tempered and nitrided
Planed
Ground

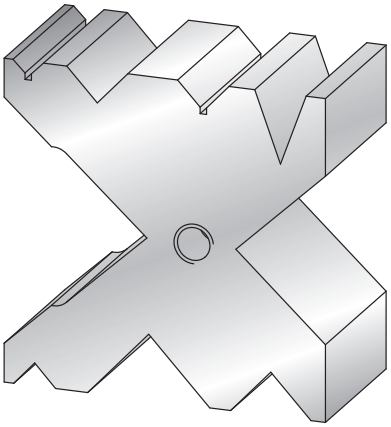

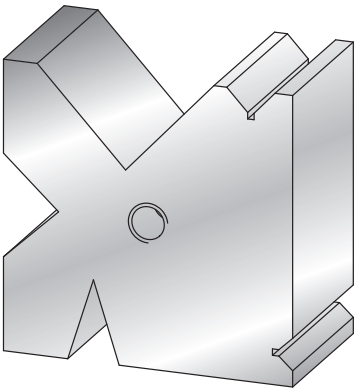


LENGTHS mm (in)

2000
3000
4000
6000
8000



LVD Style


LVD Wila Style

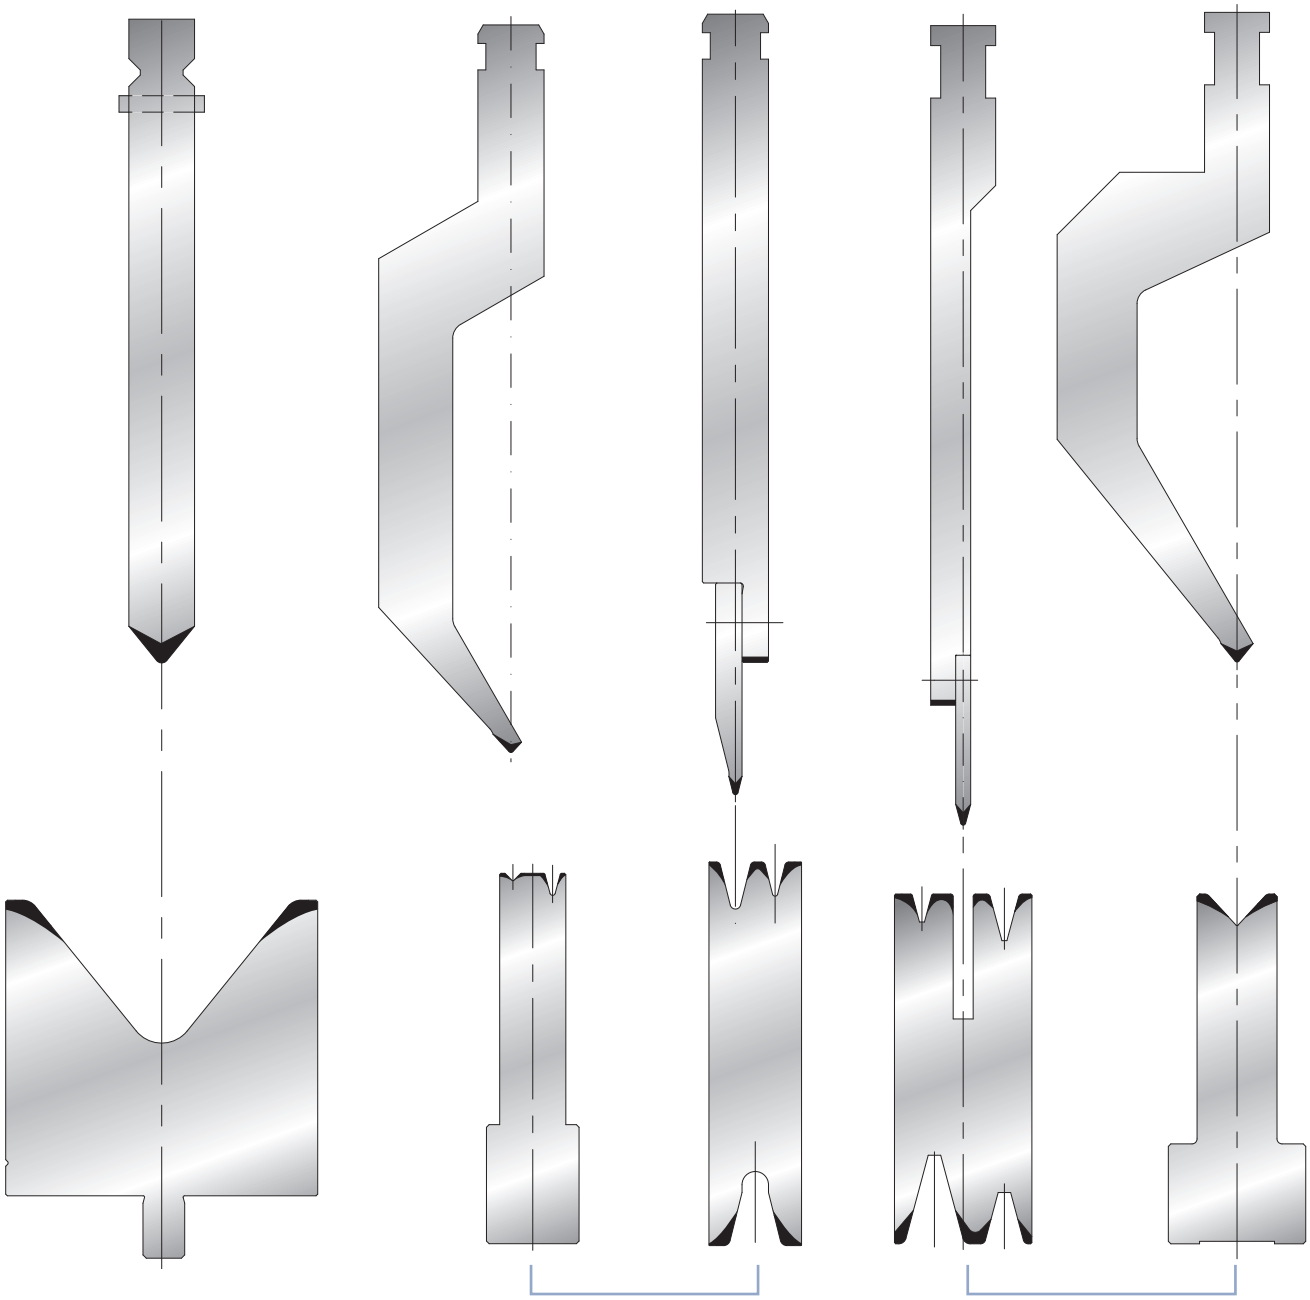


LVD - Wila Style


Weinbrenner Style


EHT Style

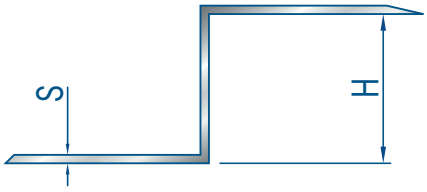

S
H

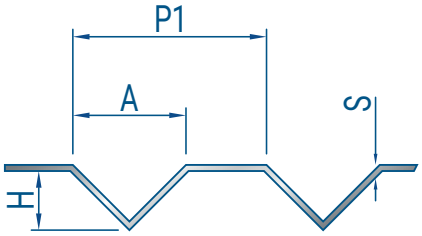

P1
A
S
H




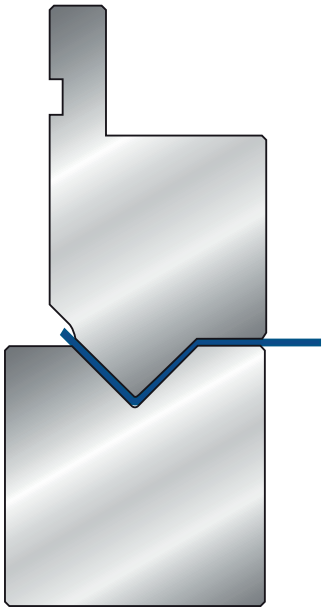


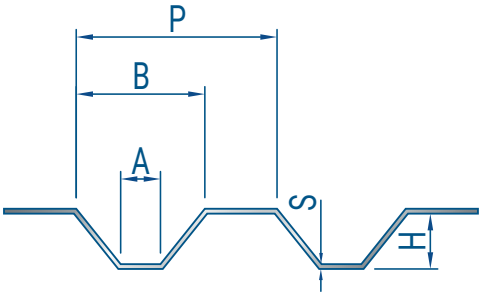
P
B
A
S
H

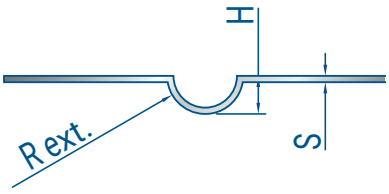
H
R ext.
S

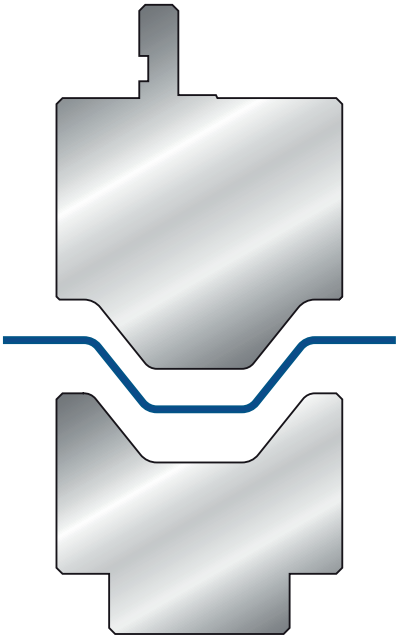

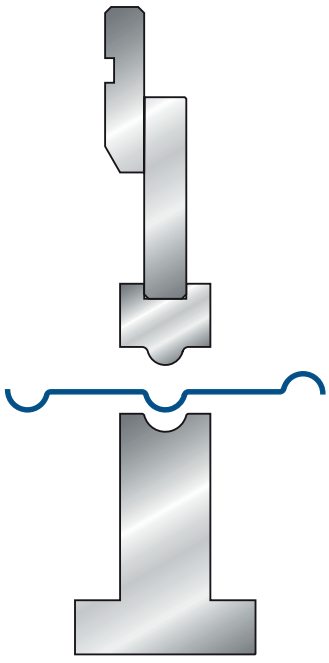

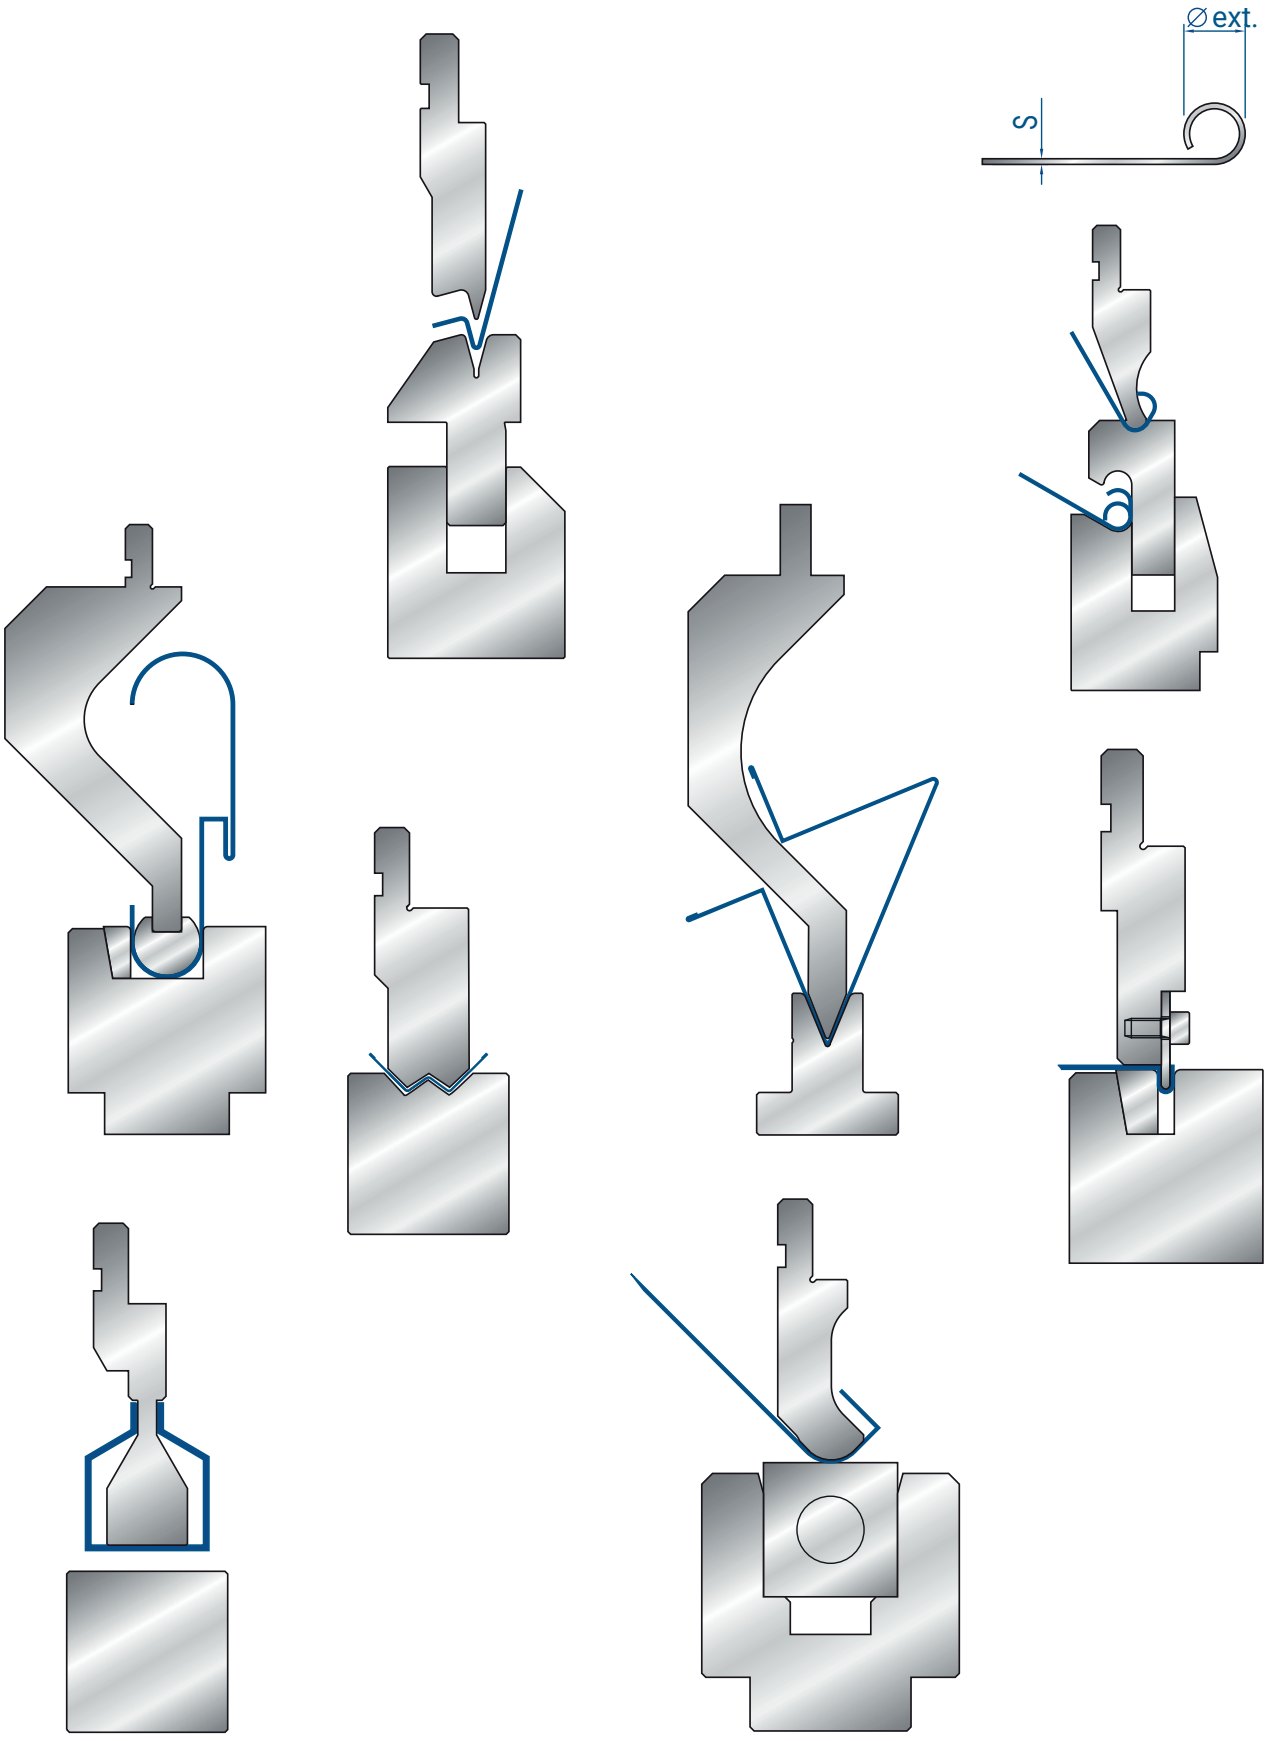
∅ ext.
S

CUT MATERIAL:

- ☐ *Aluminum*
- ☐ *Mild steel*
- ☐ *Stainless steel*
- ☐ *Other material:*


.....


MOD.....

PR.....


DIMENSION	*SIZE mm (in)*
A	
B	
C	
D	
E	
F	
H	
I	
K	
L	
No. of holes	

PROFILE

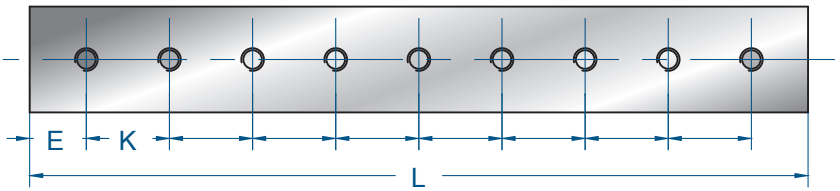





mod. 2000




mod. 2001




mod. 2002



mod. 2003



mod. 2004



mod. 2005



8201


PHOSPHATING TREATMENT

Surface treatment that increases corrosion resistance.

8205

NITRIDING TREATMENT

Surface hardening that increases the tool's resistance to wear, fatigue and notching.

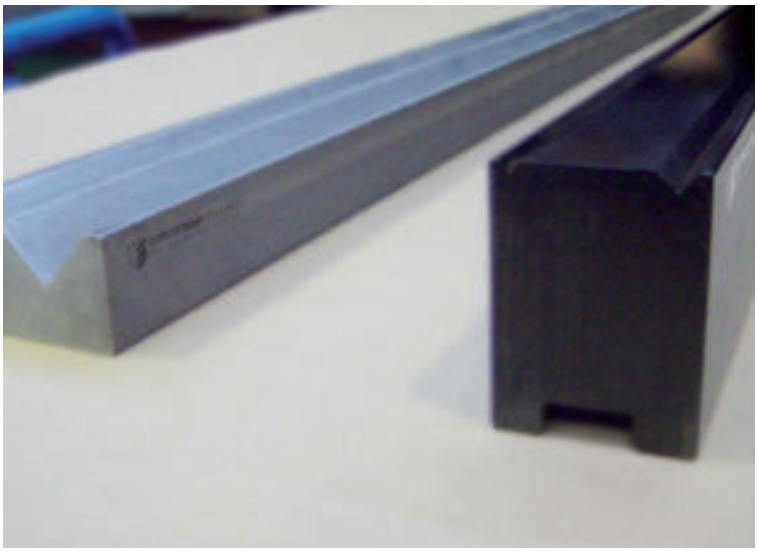

8202

NITRIDING TREATMENT + PHOSPHATING

Surface hardening plus corrosion resistance.


32
42
15



EUROSTAMP TOOLING

the Italian excellence


EUROSTAMP TOOLING
the Italian excellence

AMERICAN STYLE

The upper and lower tools in this section fit press brakes with American-style clamping: a .500" (12.7 mm) tang held by the upper and lower clamps.

Punches and dies in 36" (914.4 mm) full lengths, 18" (457.2 mm) half lengths and 35.75" (908 mm) sectioned sets, each with its own EUROSTAMP part number.

Every dimension is given in decimal inches with the millimetres beside it.

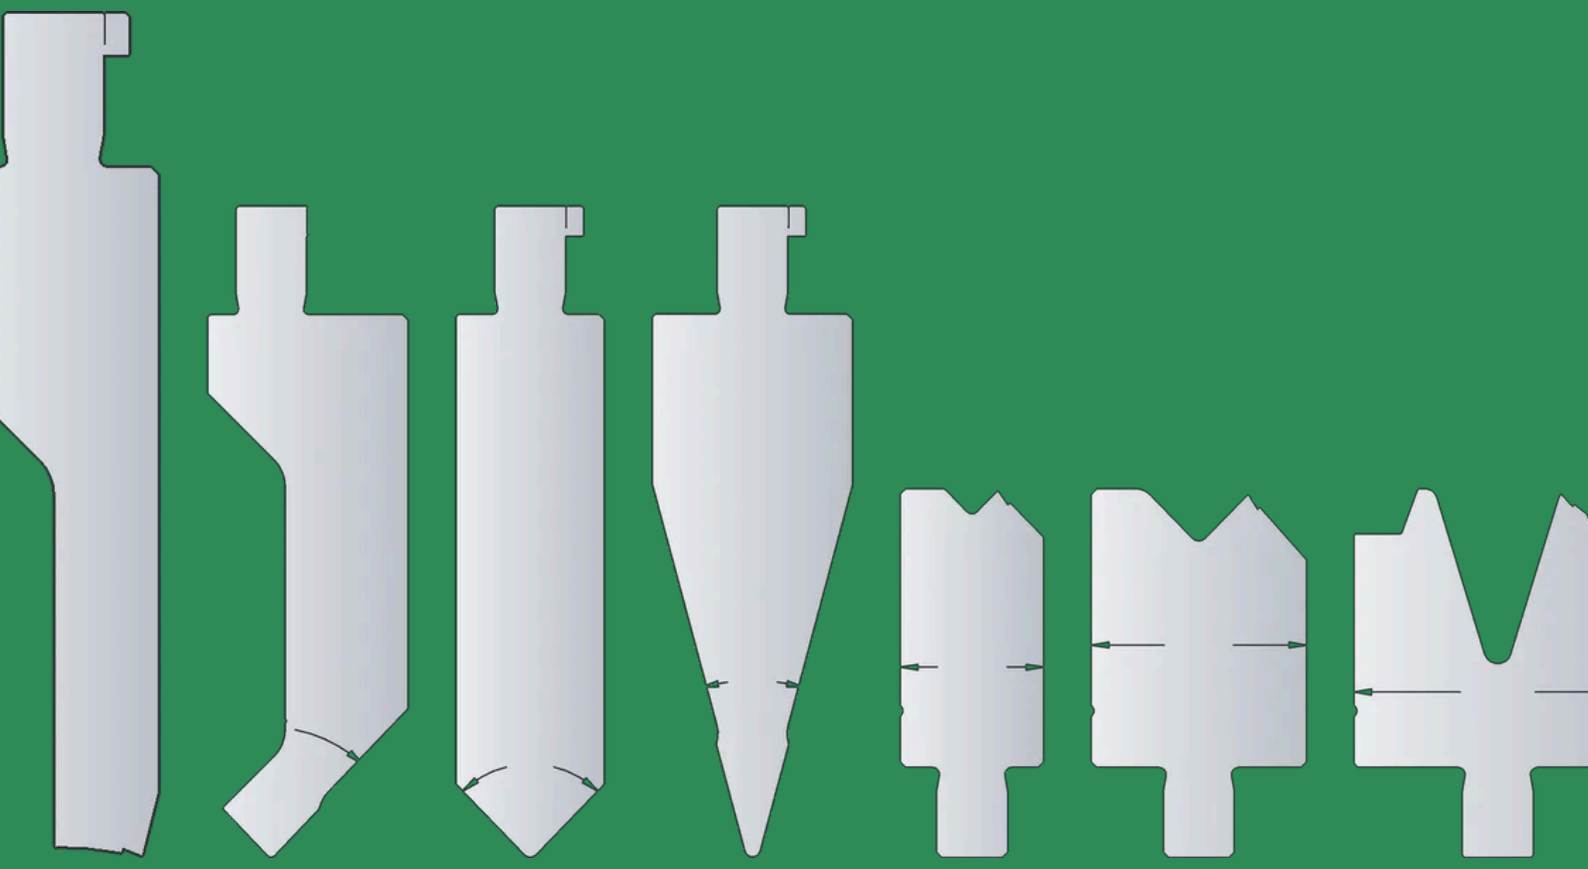

AMERICAN-STYLE PUNCHES AND DIES — TANG .500" (12.7 MM)

EUROSTAMP's American-style tools fit press brakes with American-style clamping, where a .500" (12.7 mm) tang is held in the upper and lower clamps. The punches have the safety lip that keeps them from falling out when the clamp is opened; all the dies share one working height, 1.937" (49.2 mm), so a punch stays in step with every die in the range.

Every profile comes in three lengths, each with its own part number: 36" (914.4 mm) full lengths, 18" (457.2 mm) half lengths and 35.75" (908 mm) sectioned sets. Like the rest of this catalogue, the tools are made in Italy by EUROSTAMP and supplied in Canada by NovoTech.

PUNCH TANG	
Tang width	.500" (12.70 mm)
Tang with safety lip	.626" (15.90 mm)
Safety groove	.220" (5.59 mm)
Tang height	.752" (19.10 mm)
Punch heights	3.779" (96 mm) · 5.125" (130.18 mm)


DIE TANG AND HEIGHTS	
Tang width	.500" (12.70 mm)
Working height	1.937" (49.20 mm)
Overall height	2.563" (65.10 mm)
Body widths	1.000" · 1.500" · 2.000" (25.4 · 38.1 · 50.8 mm)

PART NUMBERS


Length	Part number ends in	Example: S28881 gooseneck punch
36" (914.4 mm) full length	091401	S28881091401
18" (457.2 mm) half length	045701	S28881045701
35.75" (908 mm) sectioned set	090801	S28881090801

SECTIONED SETS — 35.75" (908 MM)

PUNCH

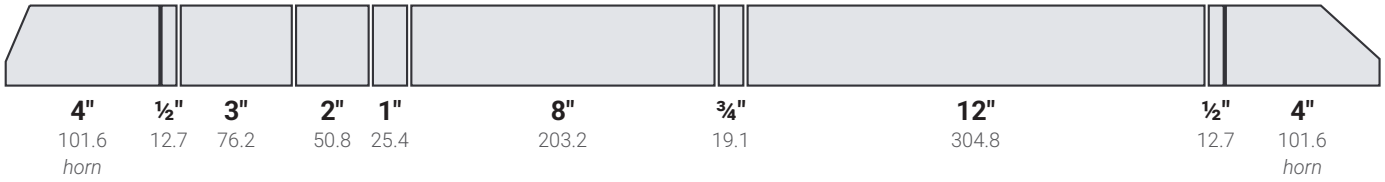



DIE

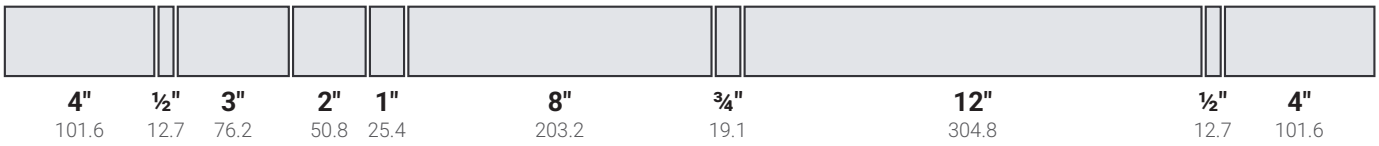


Section lengths in inches, millimetres under them. The sectioned set is 35.75" (908 mm) in all; the punch set has a horn at each end.

Safety: it is the user's responsibility to make sure that point-of-operation guarding meets all applicable safety standards.

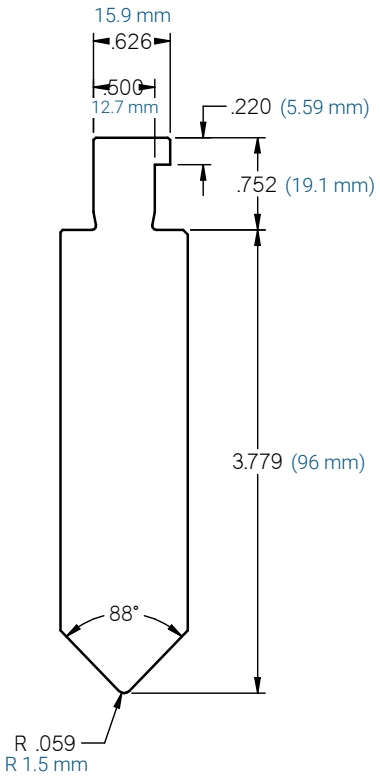

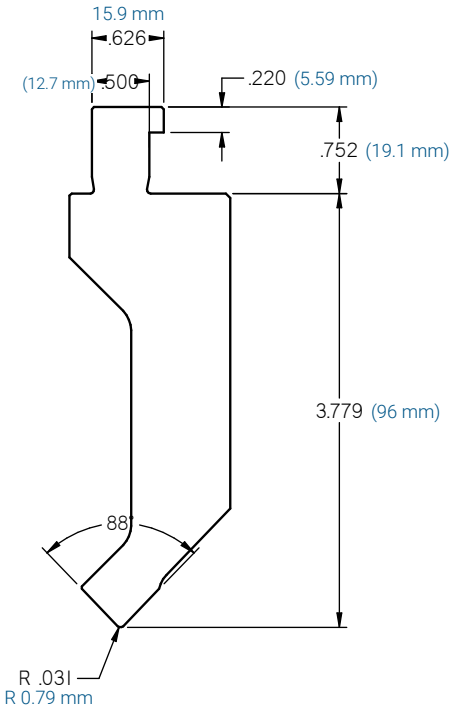

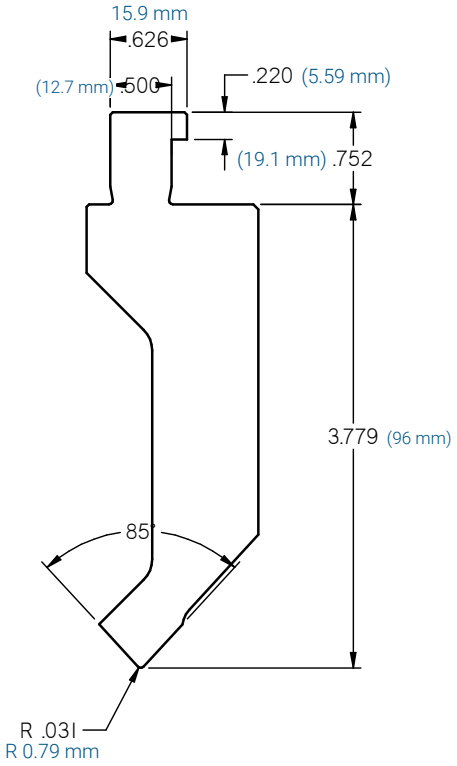

S28932

EP2-88 · straight punch

H = 3.779" (96 mm)
R = .059" (1.5 mm)
α = 88°

36" 914.4 mm	S28932091401
18" 457.2 mm	S28932045701
35.75" 908 mm SECTIONED	S28932090801

S28881

EGPC 88 · gooseneck punch

H = 3.779" (96 mm)
R = .031" (0.8 mm)
α = 88°

36" 914.4 mm	S28881091401
18" 457.2 mm	S28881045701
35.75" 908 mm SECTIONED	S28881090801

S28880

EGPC 85 · gooseneck punch

H = 3.779" (96 mm)
R = .031" (0.8 mm)
α = 85°

36" 914.4 mm	S28880091401
18" 457.2 mm	S28880045701
35.75" 908 mm SECTIONED	S28880090801

S28974

EGP-7A-88 · straight punch


Drawing on request.


H = 3.778" (96 mm)
R = .031" (0.8 mm)
α = 88°


36" 914.4 mm	S28974091401
18" 457.2 mm	S28974045701
35.75" 908 mm SECTIONED	S28974090801

Drawings in decimal inches, millimetres in blue. Tang .500" (12.7 mm) with safety lip. H = height, R = tip radius, α = angle.

AMERICAN STYLE PUNCHES - 30° / 28°

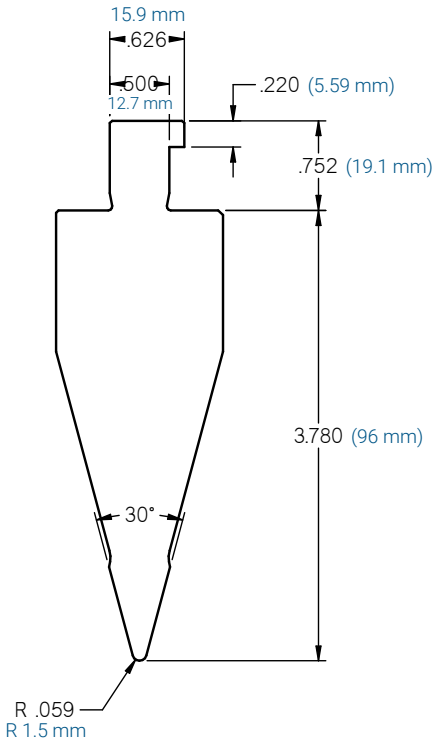

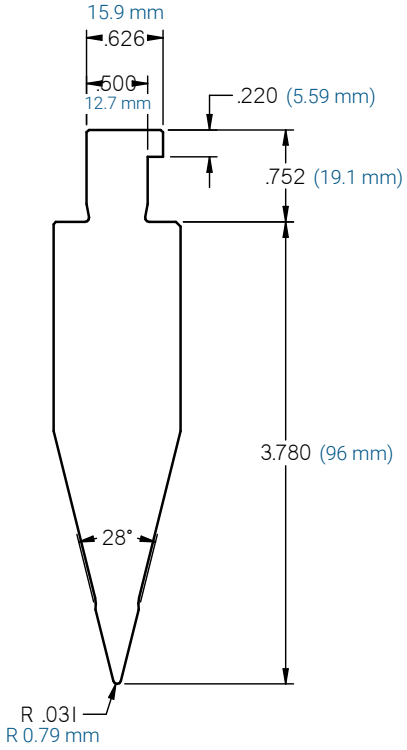

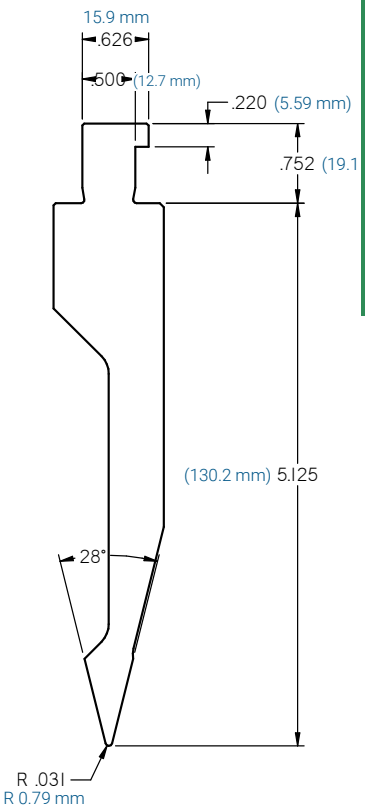

S29083

EP30 · acute punch

H = 3.780" (96 mm)
R = .059" (1.5 mm)
α = 30°

36" 914.4 mm	S29083091401
18" 457.2 mm	S29083045701
35.75" 908 mm SECTIONED	S29083090801

S29252

acute punch

H = 3.780" (96 mm)
R = .031" (0.8 mm)
α = 28°

Lengths and part numbers on request.


S29084

EGP28 · acute gooseneck punch

H = 5.125" (130.2 mm)
R = .031" (0.8 mm)
α = 28°

36" 914.4 mm	S29084091401
18" 457.2 mm	S29084045701
35.75" 908 mm SECTIONED	S29084090801

Drawings in decimal inches, millimetres in blue. Tang .500" (12.7 mm) with safety lip. H = height, R = tip radius, α = angle.

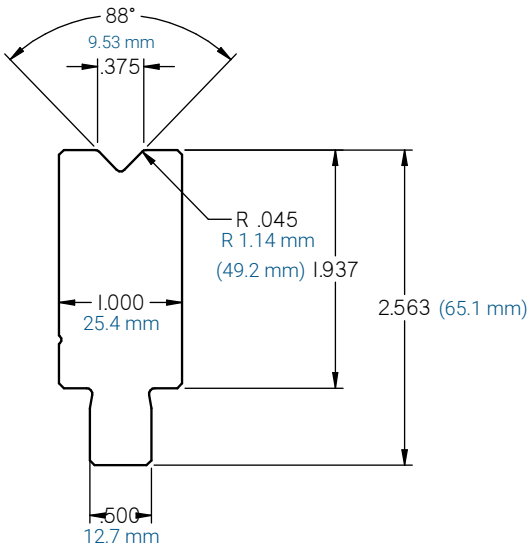


S28946

ELD88-3/8 · 1V die

V = .375" (9.53 mm)
R = .045" (1.14 mm)
α = 88°
W = 1.000" (25.4 mm)

36" 914.4 mm	S28946091401
18" 457.2 mm	S28946045701
35.75" 908 mm SECTIONED	S28946090801

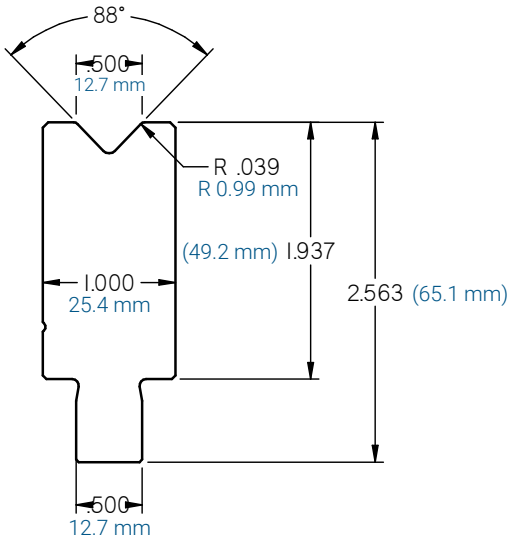


S29269

1V die

V = .500" (12.7 mm)
R = .039" (0.99 mm)
α = 88°
W = 1.000" (25.4 mm)

Lengths and part numbers on request.

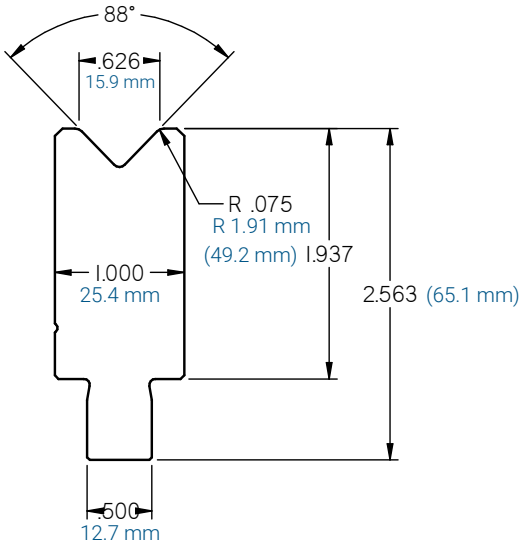


S29145

ELD88-5/8 · 1V die

V = .626" (15.9 mm)
R = .075" (1.91 mm)
α = 88°
W = 1.000" (25.4 mm)

36" 914.4 mm	S29145091401
18" 457.2 mm	S29145045701
35.75" 908 mm SECTIONED	S29145090801

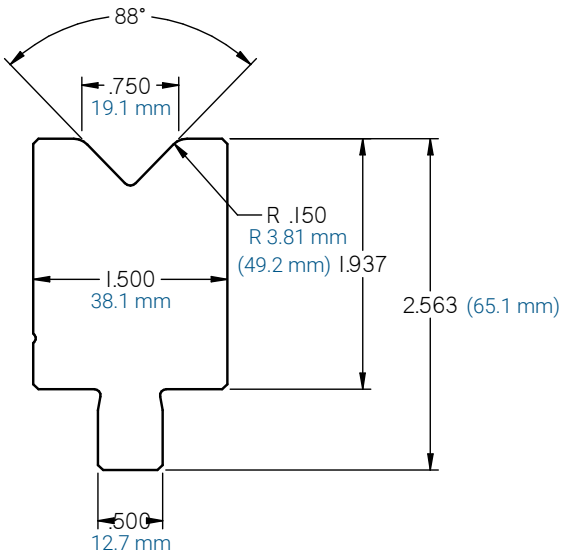


S28947

ELD88-3/4 · 1V die

V = .750" (19.1 mm)
R = .150" (3.81 mm)
α = 88°
W = 1.500" (38.1 mm)

36" 914.4 mm	S28947091401
18" 457.2 mm	S28947045701
35.75" 908 mm SECTIONED	S28947090801

Drawings in decimal inches, millimetres in blue. All dies: tang .500" (12.7 mm), working height 1.937" (49.2 mm), 2.563" (65.1 mm) overall.
V = V opening, R = shoulder radius, α = angle, W = body width.

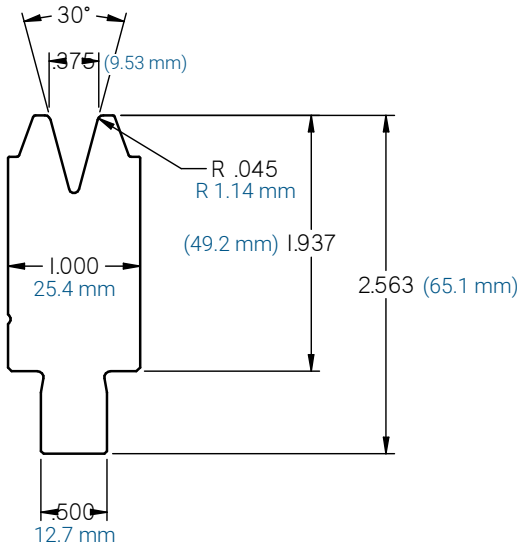


S29142

ELD30-3/8 · acute 1V die

V = .375" (9.53 mm)
R = .045" (1.14 mm)
α = 30°
W = 1.000" (25.4 mm)

36" 914.4 mm	S29142091401
18" 457.2 mm	S29142045701
35.75" 908 mm SECTIONED	S29142090801

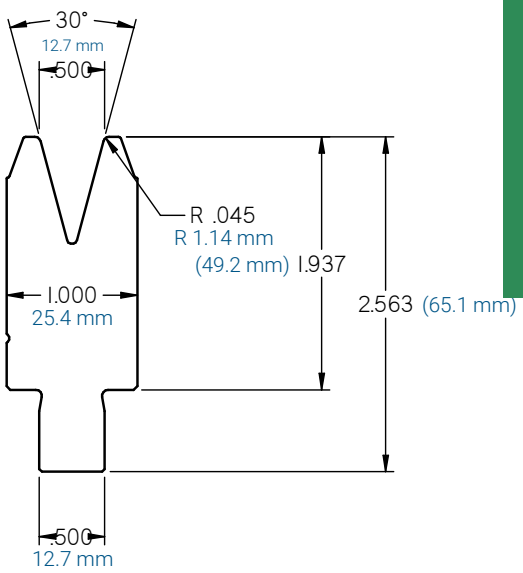


S29141

ELD30-1/2 · acute 1V die

V = .500" (12.7 mm)
R = .045" (1.14 mm)
α = 30°
W = 1.000" (25.4 mm)

36" 914.4 mm	S29141091401
18" 457.2 mm	S29141045701
35.75" 908 mm SECTIONED	S29141090801

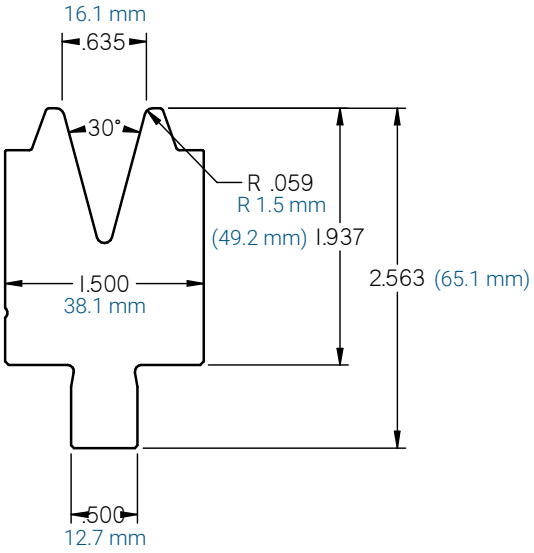


S29143

ELD30-5/8 · acute 1V die

V = .635" (16.1 mm)
R = .059" (1.5 mm)
α = 30°
W = 1.500" (38.1 mm)

36" 914.4 mm	S29143091401
18" 457.2 mm	S29143045701
35.75" 908 mm SECTIONED	S29143090801

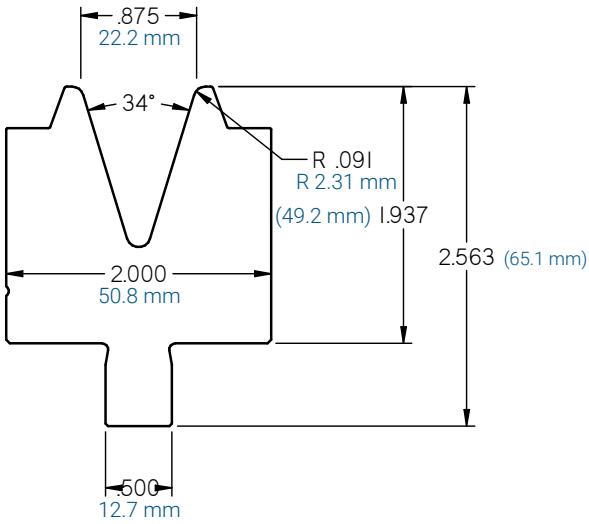

S29144

ELD34-7/8 · acute 1V die

V = .875" (22.2 mm)
R = .091" (2.31 mm)
α = 34°
W = 2.000" (50.8 mm)

36" 914.4 mm	S29144091401
18" 457.2 mm	S29144045701
35.75" 908 mm SECTIONED	S29144090801


Drawings in decimal inches, millimetres in blue. All dies: tang .500" (12.7 mm), working height 1.937" (49.2 mm), 2.563" (65.1 mm) overall.
V = V opening, R = shoulder radius, α = angle, W = body width.

Z1 intermediate

for American-style punches · .500" tang

This intermediate puts American-style punches on press brakes built for Z1 intermediates (Amada-Promecam European style). Its body is a standard Z1 — 3.937" (100 mm) high under a 1.181" (30 mm) upper tang, 1.063" (27 mm) deep, with the bending axis .276" (7 mm) from the tang face — so it lines up with the machine's other Z1 intermediates.


The lower slot takes the punch's .500" (12.7 mm) tang, with a .650" (16.5 mm) pocket for its safety lip, which holds the punch while the clamp is open. The clamp is drawn dashed: on the left the intermediate on its own, next to it with a punch in place.

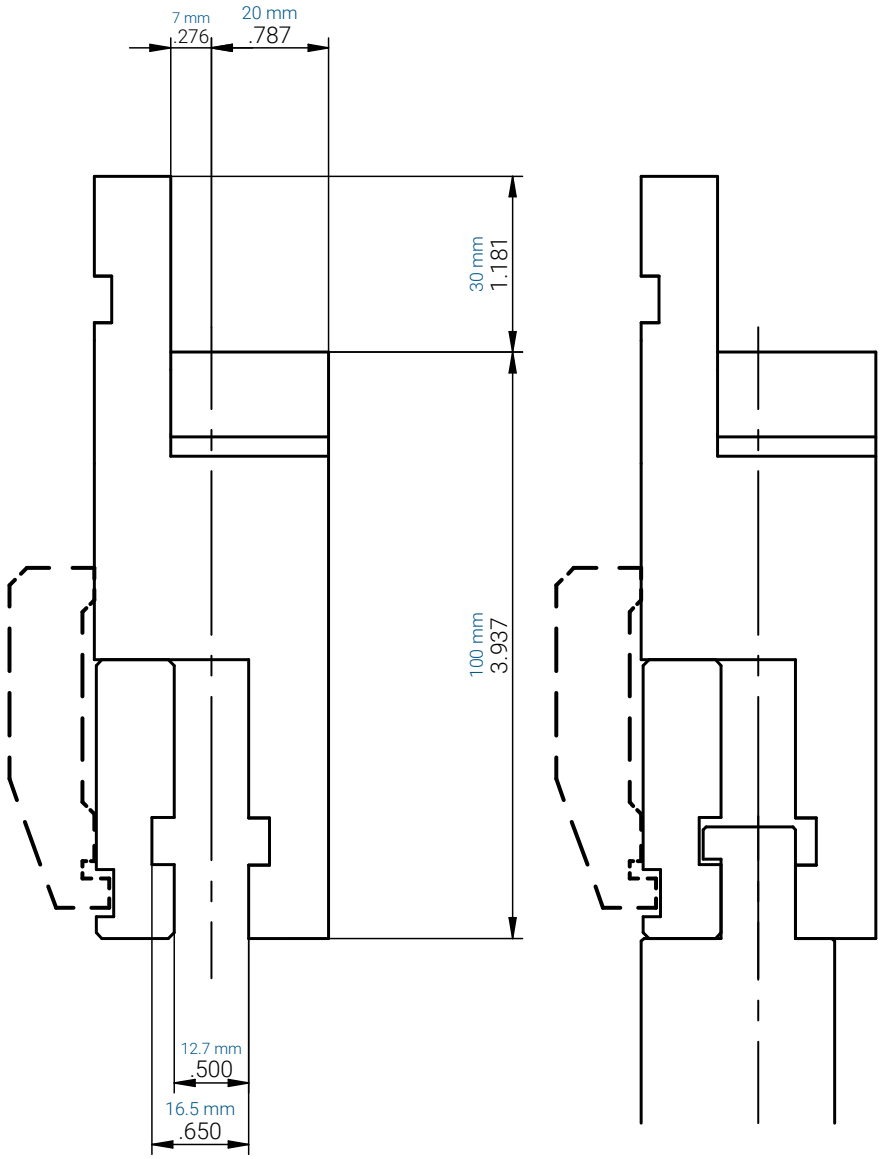

DIMENSIONS	
Height	3.937" (100 mm)
Upper tang	1.181" (30 mm)
Body depth	1.063" (27 mm)
Axis from tang face	.276" (7 mm)
Punch tang slot	.500" (12.7 mm)
Safety-lip pocket	.650" (16.5 mm)

Part number, lengths and price on request.

AMERICAN-STYLE PUNCH TANG

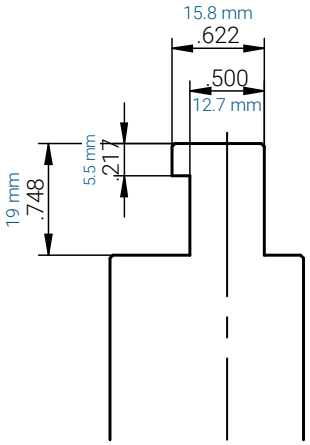

Drawing after EUROSTAMP's, which is in millimetres: decimal inches, the millimetres in blue.

LET'S FIND THE RIGHT TOOLING FOR YOUR PRESS BRAKE.

Send us the part drawing or the codes from this catalogue. NovoTech checks the clamping style, the V opening and the tonnage, and quotes EUROSTAMP punches, dies and holders in the lengths you need — sectioned or full length.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5,
Canada

TOOLING FROM NOVOTECH

- ✓ EUROSTAMP tools made in Italy, C45 and 42CrMo4 steel, induction-hardened
- ✓ Amada-Promecam, Trumpf, Wila, Bystronic, LVD and American styles
- ✓ DXF profiles for your CNC on NovoTechMachineTools.com
- ✓ Sectioned sets, horns and special lengths on request
- ✓ Adapters between clamping systems, holders and clamps
- ✓ Special tools and heat treatments made to your drawing

EUROSTAMP TOOLING

EUROSTAMP Tooling is a trademark of Eurostamp S.r.l., Via dell'Industria 11, 29010 Gragnano Trebbiense (PC), Italy. Catalogue pages reproduced from EUROSTAMP's IT-EN catalogue; English text, inch values and the American-style section by NovoTech.

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Inch and pound values are converted from the manufacturer's metric data and rounded (lengths to .01" from one inch up and to .001" below, weights to 0.1 lb). Codes are manufacturer designations.