NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

TUBEND · MADE IN TURKEY · SOLD & SERVICED IN CANADA BY NOVOTECH

HORIZONTAL PRESSES, PIPE BENDERS AND WELDING POSITIONERS

TUBEND HP 10 – HP 150 NC HYDRAULIC HORIZONTAL PRESSES, 11 – 165 US TONS · TB 34 / TB 42 MANDREL-LESS PIPE BENDERS · WP 100 / WP 300 WELDING POSITIONERS







Turkey
MADE IN TURKEY

5
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

TUBEND MACHINERY

CONTENTS

HYDRAULIC HORIZONTAL PRESSES

HP 10 – HP 100 NC hydraulic horizontal presses, 11 – 110 US ton HP 10 · HP 20 · HP 40 · HP 60 · HP 80 · HP 100 · 6 models 04

HP 120 · HP 150 heavy-duty horizontal presses, 132 – 165 US ton HP 120 · HP 150 · 2 models 06

MANDREL-LESS PIPE BENDERS

TB 34 electric mandrel-less pipe bender, 1" NPS pipe TB 34 · 1 model 08

TB 42 hydraulic mandrel-less pipe bender, 1-1/4" NPS pipe TB 42 · 1 model 09

WELDING POSITIONERS

WP 100 · WP 300 tilting welding positioners, 220 – 661 lb WP 100 · WP 300 · 2 models 10

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR TUBEND MACHINERY

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey by Tubend — with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

TUBEND · BURSA, TURKEY

HORIZONTAL PRESSES WITH A TOOL FOR EVERY BEND

Tubend designs and builds bending and forming machinery in Bursa, Turkey. Its HP horizontal presses bend, punch, shear, notch and straighten flat bar, pipe, solid bar and busbar with the part lying flat on the table — NC-controlled from 11 to 165 US tons, with a touch-screen recipe control, an optional servo back gauge and an extensive library of bending, punching, shearing, pipe and busbar tools. The TB 34 and TB 42 are simple mandrel-less pipe benders, and the WP 100 and WP 300 tilting welding positioners turn round parts under the torch.

NovoTech sells, installs and supports Tubend machines in Canada from Mississauga, Ontario — tooling chosen for your parts, installation, operator training, a CSA-approved panel on three-phase machines, a 1-year warranty and parts and technical support in Canada.

HP 10 · HP 20 · HP 40 · HP 60 · HP 80 · HP 100 · 6 MODELS

HP 10 – HP 100 NC HYDRAULIC HORIZONTAL PRESSES, 11 – 110 US TON



MODEL HP · TUBEND HP 10 NC HYDRAULIC HORIZONTAL PRESS WITH TOUCH-SCREEN CONTROL STAND AND FOOT PEDAL



Tubend HP 80 hydraulic horizontal press with induction-hardened support pins, control stand and foot pedal



HP horizontal press with servo-driven NC back gauge, touch-screen control stand and foot pedal

11 – 110 US ton · flat bar to 11-13/16" × 15/16" · NC touch-screen with recipes

A horizontal press brake lays the press on its side: a hydraulic ram pushes the tool across a heavy steel table at bench height, so flat bar, angle, pipe, solid bar and busbar are bent, punched, sheared or straightened with the part lying flat in front of the operator. Tubend's HP series runs from the 11-ton HP 10 for 5-7/8" × 1/4" flat bar to the 110-ton HP 100 for 11-13/16" × 15/16", every model with an NC touch-screen on a control stand — manual, automatic and recipe modes — a foot pedal, induction-hardened support pins and an ergonomic tool table for quick tool changes.

STANDARD FEATURES

- ✓ NC control stand with touch-screen: manual mode between set limits, automatic serial modes and recipe mode for multi-step parts
- ✓ Hydraulic speed and pressure adjustment; ram stroke 7.9" (HP 10, HP 20) or 11.8" (HP 40 – HP 100)
- ✓ Ergonomic tool table at bench height; easy tool change; induction-hardened support pins
- ✓ Easily adjustable back stop; foot pedal
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Automatic back gauge — servo-driven NC with pull-back, 3.3, 6.6 or 9.8 ft (1, 2 or 3 m) long, for series parts
- + Bending tools: Radius punch with v-die, press brake punch with multi-v die, bolt punch with multi-v die, narrow v-die, two-sided v-bending tool, spring-loaded u-bending tool
- + Pipe and bar tools: mandrel-less pipe bending tool, solid bar and thick-wall pipe bending tool, pipe end reduction and expansion tool, profile bending tool, round bar bending tool, pipe clamping tool
- + Notching, punching, shearing and straightening tools; busbar shearing, punching, bending and twisting tools
- + Custom dies made to your part
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

TECHNICAL SPECIFICATIONS

HP 10 – HP 100 NC HYDRAULIC HORIZONTAL PRESSES, 11 – 110 US TON

HP 10 – HP 100

NC hydraulic horizontal presses

Model	HP 10	HP 20	HP 40	HP 60	HP 80	HP 100
Max. force at 2,900 psi (200 bar)	**11 US ton (10 t)**	**22 US ton (20 t)**	**44 US ton (40 t)**	**55 US ton (50 t)**	**88 US ton (80 t)**	**110 US ton (100 t)**
Flat bar bending capacity width × thickness, mild steel	**5-7/8″ × 1/4″ (150 × 6 mm)**	**7-7/8″ × 3/8″ (200 × 10 mm)**	**9-7/8″ × 5/8″ (250 × 16 mm)**	**11-13/16″ × 5/8″ (300 × 16 mm)**	**11-13/16″ × 13/16″ (300 × 20 mm)**	**11-13/16″ × 15/16″ (300 × 24 mm)**
Maximum stroke	**7.9″ (200 mm)**	**7.9″ (200 mm)**	**11.8″ (300 mm)**	**11.8″ (300 mm)**	**11.8″ (300 mm)**	**11.8″ (300 mm)**
Tool height	5.9″ (150 mm)	7.9″ (200 mm)	9.8″ (250 mm)	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)
Working / return speed	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)
Motor power	**1.5 HP (1.1 kW)**	**3 HP (2.2 kW)**	**5.4 HP (4 kW)**	**7.4 HP (5.5 kW)**	**10 HP (7.5 kW)**	**15 HP (11 kW)**
Dimensions L × W × H	35 × 18 × 46″ (900 × 450 × 1,160 mm)	47 × 22 × 48″ (1,200 × 550 × 1,230 mm)	51 × 24 × 51″ (1,300 × 600 × 1,300 mm)	51 × 24 × 55″ (1,300 × 600 × 1,400 mm)	63 × 33 × 63″ (1,600 × 850 × 1,600 mm)	63 × 33 × 67″ (1,600 × 850 × 1,700 mm)
Weight	**882 lb (400 kg)**	**1,411 lb (640 kg)**	**2,205 lb (1,000 kg)**	**3,748 lb (1,700 kg)**	**4,630 lb (2,100 kg)**	**5,401 lb (2,450 kg)**

Bending capacity is flat bar bent the hard way in mild steel with the standard V tooling; force is at the pressure given. Metric values in brackets are the manufacturer's figures; dimensions L × W × H, weight net.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Made in Turkey by Tubend — with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HP 120 · HP 150 · 2 MODELS


HP 120 · HP 150 HEAVY-DUTY HORIZONTAL PRESSES, 132 – 165 US TON

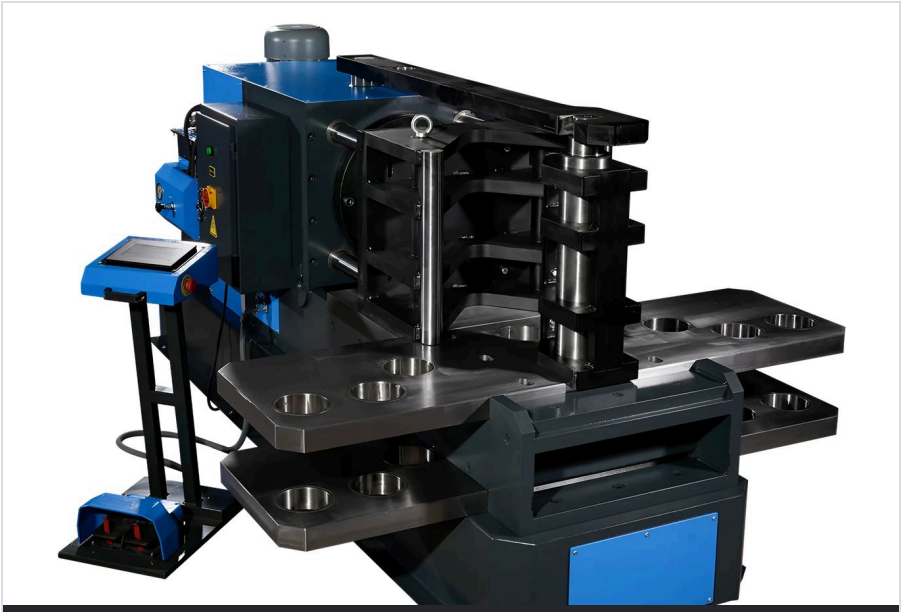

MODEL HP · TUBEND HP 120 / HP 150 HEAVY-DUTY HORIZONTAL PRESS WITH T-SLOT TABLE, SUPPORT COLUMNS AND CONTROL STAND

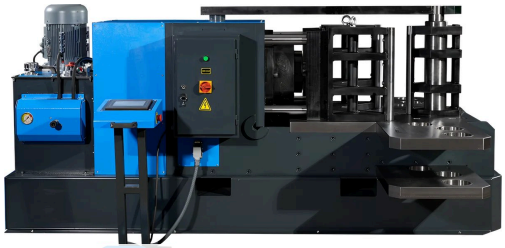

HP 120 / HP 150 from the side: hydraulic unit, control box, T-slot table and foot pedal

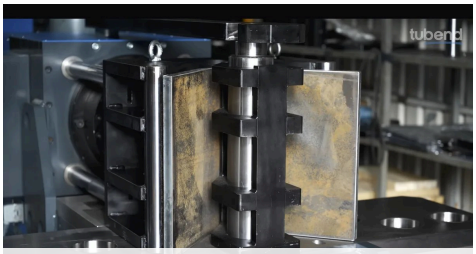

Straightening a plate between the hardened support columns of the HP 120 / HP 150

132 – 165 US ton · 19.7" stroke · flat bar to 19-11/16" × 1-9/16" · T-slot table

The heavy horizontal presses for straightening and bending big sections: 132 and 165 US tons on a 19.7" stroke, hardened Ø5-1/8" and Ø5-7/8" support columns between which shafts, beams and heavy bar are straightened, a T-slot clamping table with heat-treated support holes for tools and attachments, and an upper brace that keeps the frame from flexing. 19-11/16" × 1-9/16" flat bar on the HP 150; NC control stand and foot pedal as on the HP series, and dies designed and made for the job.

STANDARD FEATURES

- ✓ NC control unit with control stand and foot pedal; hydraulic speed and pressure adjustment
- ✓ Hardened support columns, Ø5-1/8" (HP 120) and Ø5-7/8" (HP 150), for straightening between columns
- ✓ Multiple heat-treated support holes for straightening and for mounting tools and attachments
- ✓ T-slot clamping table for securing tools and dies; upper support brace prevents flexing
- ✓ Robust steel body; high-profile ergonomic design for large and long workpieces
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Custom die design and manufacturing for the job
- + Special requests and revisions on request
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

TECHNICAL SPECIFICATIONS

HP 120 · HP 150 HEAVY-DUTY HORIZONTAL PRESSES, 132 – 165 US TON

HP 120 · HP 150

Heavy-duty horizontal presses with T-slot table and support columns

Model	HP 120	HP 150
Max. force at 3,340 psi (230 bar)	**132 US ton (120 t)**	**165 US ton (150 t)**
Flat bar bending capacity width × thickness, mild steel	**19-11/16″ × 1-3/16″ (500 × 30 mm)**	**19-11/16″ × 1-9/16″ (500 × 40 mm)**
Maximum piston stroke	**19.7″ (500 mm)**	**19.7″ (500 mm)**
Tool height	19.7″ (500 mm)	19.7″ (500 mm)
Support column diameter	Ø5-1/8″ (130 mm)	Ø5-7/8″ (150 mm)
Working / return speed	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)
Motor power	**7.4 HP (5.5 kW)**	**10 HP (7.5 kW)**
Dimensions L × W × H	109 × 69 × 50″ (2,760 × 1,750 × 1,275 mm)	117 × 69 × 58″ (2,960 × 1,750 × 1,475 mm)
Weight	**7,937 lb (3,600 kg)**	**9,480 lb (4,300 kg)**

Bending capacity is flat bar bent the hard way in mild steel with the standard V tooling; force is at the pressure given. Metric values in brackets are the manufacturer's figures; dimensions L × W × H, weight net.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey by Tubend — with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

TB 34 · 1 MODEL

TB 34 ELECTRIC MANDREL-LESS PIPE BENDER, 1" NPS PIPE



MODEL TB · TUBEND TB 34 ELECTRIC MANDREL-LESS PIPE BENDER WITH DIGITAL ANGLE READOUT



Street furniture, bike racks and serpentine tube bent on the TB 34



Safety barrier bent from pipe on the TB 34

1" NPS pipe · Ø1-5/16" × 11 ga to 180° · digital angle readout · 198 lb

A bench-size electric pipe bender for 1" NPS pipe and Ø1-5/16" × 11 ga tube to 180°: a gear-reduced drive turns the bend die at 1.9 rpm, a digital readout shows the angle and stops the bend where you set it, and a brake motor holds the angle so spring-back does not creep into the part. 198 lb with detachable carrying handles — it goes to the work — and one die set in your pipe size is included. Street furniture, bike racks, safety barriers and handrail parts.

STANDARD FEATURES

- ✓ Bends pipe and tube to Ø1-5/16" × 11 ga (Ø34 × 3 mm) — 1" NPS — up to 180°, minimum radius 3 × tube Ø
- ✓ Digital readout; the bend angle can be limited from the readout for repeat parts
- ✓ Gearbox-driven power transmission; brake motor prevents bending errors from spring-back
- ✓ Durable steel body; detachable carrying handles for moving it around the shop
- ✓ 1 set of pipe bending dies included
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Pipe dies in custom sizes
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

TB 34 — TECHNICAL SPECIFICATIONS

Model	TB 34
Max. bending capacity OD × wall, to 180°	**1" NPS pipe · Ø1-5/16" × 11 ga (Ø34 × 3 mm)**
Min. bending radius centreline	**3 × tube Ø**
Control	**Digital angle readout with angle limit · brake motor**
Output speed	1.9 rpm
Motor power	0.7 HP (0.55 kW)
Dimensions L × W × H	28 × 10 × 18" (720 × 260 × 460 mm)
Weight	**198 lb (90 kg)**

Capacity is mild steel pipe or tube with the matching die set; one die set in the size you order is included.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

TB 42 · 1 MODEL


TB 42 HYDRAULIC MANDREL-LESS PIPE BENDER, 1-1/4″ NPS PIPE



MODEL TB · TUBEND TB 42 HYDRAULIC MANDREL-LESS PIPE BENDER



Pipe bent to a U on the TB 42

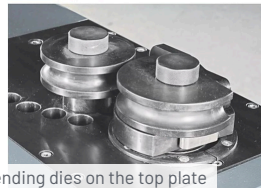

TB 42 pipe bending dies on the top plate

17 US ton hydraulic · 1-1/4″ NPS pipe · Ø1-5/8″ × 11 ga · digital readout

A 17-ton hydraulic pipe bender in a closed steel cabinet: the cylinder pushes the former through the pipe or tube between two wing dies on the top plate, a manual angle switch and digital readout set the bend, and the speed is adjustable. 1-1/4″ NPS pipe and Ø1-5/8″ × 11 ga tube; free holes in the plate take special dies for section, flat and solid bar. One set of pipe bending dies included, 485 lb.

STANDARD FEATURES

- ✓ Tube bending capacity to Ø1-5/8″ × 11 ga (Ø42 × 3 mm) — 1-1/4″ NPS pipe
- ✓ 17 US ton (15 t) hydraulic cylinder, 5.9″ stroke, adjustable speed
- ✓ Manual adjustable angle switch with digital readout
- ✓ Free holes in the top plate for special tools; steel welded frame
- ✓ One set of pipe bending dies included
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Sets of pipe, tube, section or solid bar dies to the required size
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

TB 42 — TECHNICAL SPECIFICATIONS

Model	TB 42
Max. bending capacity OD × wall	**1-1/4″ NPS pipe · Ø1-5/8″ × 11 ga (Ø42 × 3 mm)**
Max. force at 2,900 psi (200 bar)	17 US ton (15 t)
Control	**Digital readout · manual angle switch · adjustable speed**
Maximum stroke	5.9″ (150 mm)
Working speed	0.79 in/s (20 mm/s)
Oil tank	4 US gal (15 L)
Motor power	1.5 HP (1.1 kW)
Dimensions L × W × H	18 × 39 × 39″ (450 × 1,000 × 1,000 mm)
Weight	**485 lb (220 kg)**

Capacity is mild steel pipe or tube with the matching die set; one die set in the size you order is included.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

WP 100 · WP 300 · 2 MODELS

WP 100 · WP 300 TILTING WELDING POSITIONERS, 220 – 661 LB



MODEL WP · TUBEND WP 300 TILTING WELDING POSITIONER WITH SLOTTED TURNTABLE, CONTROL BOX AND FOOT PEDAL



Tubend WP 100 compact tilting welding positioner



WP 300 with a custom perforated work plate for welding fixtures

220 – 661 lb · 360° at 1 – 5.5 rpm · 90 – 120° tilt · foot pedal

A welding positioner turns the part under the torch, so a round weld is laid in one continuous pass in the flat position instead of being stopped and restarted around the part. Tubend's WP 100 carries 220 lb on a Ø13-3/4″ table that tilts 120°; the WP 300 carries 661 lb on a Ø18-7/8″ table that tilts 90°. The table turns 360° at 1 to 5.5 rpm, set on the control box and run from the standard foot pedal; T-slots take clamps and fixtures, and a Ø6-1/4″ or Ø7-7/8″ lathe chuck or a custom fixture plate (WP 300) is available. Single-phase 220 V.

STANDARD FEATURES

- ✓ Adjustable tilt angle for easy positioning of the part — 120° (WP 100) or 90° (WP 300), right or left
- ✓ Adjustable turning speed, 1 – 5.5 rpm, for a steady travel speed under the torch
- ✓ Standard foot pedal; control box with speed and direction
- ✓ T-slotted turntable (M10) for clamps and fixtures
- ✓ Runs on single-phase 220 V

OPTIONAL EQUIPMENT

- + Ø6-1/4″ (160 mm) or Ø7-7/8″ (200 mm) 3-jaw lathe chuck
- + Custom work plate for welding fixtures (WP 300)

WP 100 · WP 300 — TECHNICAL SPECIFICATIONS

Model	WP 100	WP 300
Nominal load capacity table horizontal	**220 lb (100 kg)**	**661 lb (300 kg)**
Load capacity, table tilted table vertical	110 lb (50 kg)	331 lb (150 kg)
Table diameter	**Ø13-3/4″ (350 mm)**	**Ø18-7/8″ (480 mm)**
Table rotation	**360° · 1 – 5.5 rpm, variable**	**360° · 1 – 5.5 rpm, variable**
Tilt	**120°, right – left**	**90°, right – left**
Turntable motor	0.33 HP (0.25 kW)	0.5 HP (0.37 kW)
Power supply	220 V 1-phase	220 V 1-phase
T-slots	M10 × 12	M10 × 12
Dimensions L × W × H	22 × 26 × 15″ (550 × 650 × 370 mm)	25 × 29 × 22″ (640 × 740 × 550 mm)
Weight	**99 lb (45 kg)**	**209 lb (95 kg)**

Nominal load is a centred part on the horizontal table; with the table tilted the WP 100 carries 110 lb and the WP 300 331 lb. Metric values in brackets are the manufacturer's figures.

Single-phase 220 V supply — no three-phase power needed.

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.