"THE FUTURE IS HERE" · SOLD & SERVICED IN CANADA BY NOVOTECH

CNC ELECTRIC SERVOBRAKE

eco friend

DDM SERVO-ELECTRIC · DDS BALL-SCREW · FAST, PRECISE, PRODUCTIVE



Up to 50%
ENERGY SAVING

22 – 220
US TONS

3 – 13.4 FT
BENDING LENGTH

Canada
PARTS & TECHNICAL SUPPORT

NovoTech Machine Tools Inc.
1365 Mid-Way Blvd, 26, Mississauga, ON L5T 2J5, Canada
NovoTechMachineTools.com | info@NovoTechMachineTools.com | +1 647 526 5510

MANUFACTURER · ESTABLISHED 1974

ABOUT DENER

Dener Makina was established in 1974 in the Kayseri Old Industrial Zone. Since 2000 the company has focused on producing CNC sheet-metal processing machines, manufacturing a wide range of products including guillotine shears, hydraulic press brakes, ball-screw press brakes, servo-electric press brakes, plasma cutting machines and fiber laser cutting machines.

In 2016 the company made a major investment, expanding its facilities to include 1,670,000 sq ft (155,000 m^2) of factory buildings and 290,000 sq ft (27,000 m^2) of social facilities on a 14,000,000 sq ft (1,300,000 m^2) site within the İncesu Organized Industrial Zone (OSB). In this new phase Dener began producing CNC metal processing machines such as Taksan integrated systems, double-column machining centers, 5-axis simultaneous machining centers, vertical machining centers, lathes and grinding machines.

With its extensive production range, over half a century of experience, skilled workforce and multinational R&D center, Dener holds a leading position globally by providing high-value industrial investment products in CNC sheet-metal processing and CNC metal processing machines.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **FREE INSTALLATION AND TRAINING in GTA**

SOLD & SERVICED IN CANADA
by NovoTech Machine Tools — Mississauga, Ontario

CONTENTS THIS BROCHURE

Production Campus 03
Servo-Electric Advantages 05
Servo vs. Standard 07
Robot Technology 09
Punch and Die 11
Best Components 13
Technical Specifications 15
DDM Series Gallery 17
DDS Features 19
Dener Worldwide 22
Sheet Metal Processing 24
Design Advantages 04
Strengthen Your Production 06
Working Principle 08
Back Gauges 10
Control Unit 12
Air Bending Chart 14
Standard & Optional 16
DDS Ball-Screw Series 18
DDS Technical Specifications 21
Award-Winning Design 23
Dener Product Range 25

DENER PRODUCTION CAMPUS İNCESU ORGANIZED INDUSTRIAL ZONE · KAYSERI

In 2016 Dener expanded to a 14,000,000 sq ft (1,300,000 m^2) site within the İncesu Organized Industrial Zone, with 1,670,000 sq ft (155,000 m^2) of factory buildings and 290,000 sq ft (27,000 m^2) of social facilities.



- Machine Tools Production Plant
- Sheet Processing Machines Production Plant
- Production Plant
- Sheet Welding Factory
- Sheet Cladding Factory
- Technology Center
- Administrative Building
- Social Facilities
- Helicopter Pad
- Main Entrance · Visitor Parking Area

SERVO-ELECTRIC PRESS BRAKE

SERVO SERIES — DESIGN ADVANTAGES

COMPACT DESIGN

FRAME DESIGNED FOR HIGH-QUALITY BENDING



USER-FRIENDLY CONTROL UNIT



EMERGENCY STOP

BACK GAUGE



ERGONOMIC FOOT PEDAL

LIGHT FRONT SUPPORT

New-generation bending machines offer users high productivity, optimized ergonomics and environmentally friendly production technologies at low production costs. Dener Servo-Electric Press Brakes support production processes with maximum efficiency by providing high precision and repeatability, faster cycle times and lower bending costs.

As the pioneer of domestic servo press brake production in Turkey, Dener Makina has introduced the industry to next-generation bending technologies with a variety of models and tonnage options. With its continuously evolving product range, it offers highly energy-efficient, user-friendly and environmentally friendly solutions, supporting both sustainable production and paving the way for digital transformation in the industry.

ADVANTAGES

SERVO-ELECTRIC PRESS BRAKE

- High-efficiency operation with reduced energy consumption and low long-term operating costs
- Easy integration with next-generation technologies, automation and control systems
- Quiet, safe operation with reduced noise levels and minimal need for additional safety measures
- Robust and rigid construction ensuring high availability, stable operation and minimum downtime



ENERGY SAVING UP TO 50%

The servo-electric press brake uses up to 50% less energy than a hydraulic press brake.



UP TO 30% FASTER

The servo-electric press brake is shown to be up to 30% faster than a hydraulic press brake. Shorter response time is one of the biggest advantages of the servo-electric design.



ECO-FRIENDLY MACHINE

The servo uses 100% electrical power instead of hydraulic oil and hydraulic components. Less pollution — the best solution.



HIGH PRODUCTIVITY

High acceleration and high deceleration. The quick change of moving direction is an advantage for productivity and efficiency, and the servo has lower maintenance costs.

ADVANCED BENDING

A flexible, reliable and advanced bending machine that combines high accuracy, flexibility and reliability. This concept offers low power consumption and less maintenance.



WORKS QUIETLY

The servo drive system makes almost no noise and provides silent working conditions.

NOISE	PUMP
HYDRAULIC OIL	CYLINDERS
HYDRAULIC FILTER	VALVES
SEALS	DWELL TIME

NO

INCREASE YOUR PRODUCTIVITY

STRENGTHEN YOUR PRODUCTION



Servo Series accelerates production, improves quality and minimizes energy consumption for maximum savings.

LOW COST → HIGH MARGINS

DENER SERVO-ELECTRIC AND STANDARD PRESS BRAKE

The frame is bolted and machined on precision milling machines. The reducers have high-strength bearings that ensure high-precision bending results.

PRESS EQUIPMENT

- Motor-reducer system
- Belt-pulley system

PRODUCTIVITY

- 50% less energy consumption and 30% higher production




MIN.



- Very low electricity consumption
- Very low maintenance
- Lower noise
- Ergonomic

MAX.



- High speed
- High precision
- Eco-friendly
- High productivity

LOW NOISE

- Quieter operation and a more comfortable production environment thanks to the advanced servo control system.

HIGH PRODUCTIVITY
FAST RETURN ON INVESTMENT



SERVO DRIVE · BELT & PULLEY


WORKING PRINCIPLE OF AN ELECTRIC PRESS BRAKE

The servo press brake is driven by synchronized dual servo motors that transmit power via belt and pulley. As the upper beam moves downward, the bending force is evenly distributed across the entire length of the upper ram.

30% FASTER BENDING CYCLE




Synchronized dual servo drive with belt and pulley

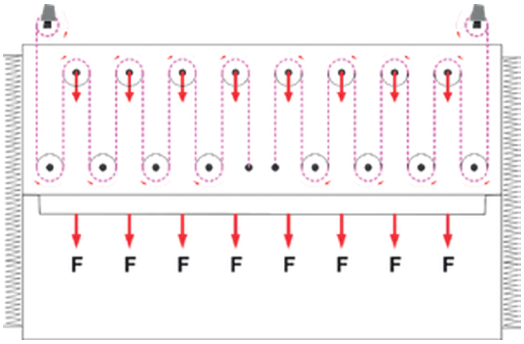

Bending force evenly distributed across the ram

O-FRAME SYSTEM

The servo press brake features a closed O-frame system. This system provides a rigid frame without deformation under high forces, allowing better tool alignment and more precise bending.

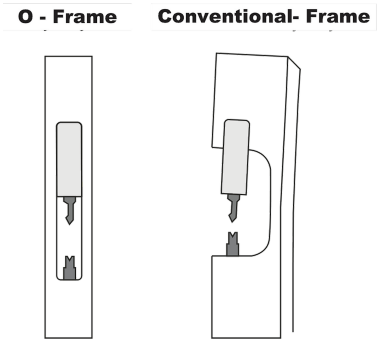

50% ENERGY SAVING

The energy accumulated in the springs during bending is returned to the system during the upward movement of the ram, without creating an extra load on the servo motors after bending.

- The return movement of the ram is supported by mechanical springs located on the sides of the machine.



Return springs

AUTOMATED BENDING CELL

ROBOT TECHNOLOGY

Offering advanced automation and precision, the robotic arm is designed to accelerate your production processes and increase efficiency. Its high durability and flexible, programmable structure make it safe for use in a variety of industrial applications. Its uninterrupted performance reduces your workload and maximizes quality.



PRECISION POSITIONING UP TO 6 AXES

DENER BACK GAUGES

One of the most important factors affecting bending quality is the design and stability of the back gauge. Faultless bending, a flawless product, and a stable and precise back gauge are possible.

The back gauge system manufactured by Dener Makina is one of the most important factors affecting bending quality. Whether single-step or multi-step, you can bend complex parts with up to 6 axes using the back gauge. The ball-screw back gauges are supported by linear guides and servo motors, ensuring flawless bending at high speed and precision. Furthermore, the stepped back gauge fingers allow you to easily perform all types of bending operations.

STANDARD



X-R
BACK GAUGE

OPTION



X-R-Z1-Z2
BACK GAUGE

OPTION




X-R-Z1-Z2 + X prime
BACK GAUGE

STANDARD BACK GAUGE

- X-R servo-motor back gauge
- Ball screw for X axis, dual linear guideway on X axis, longer X- and R-axis strokes
- Positioning accuracy ±0.001" (±0.03 mm)
- Repeatability ±0.001" (±0.03 mm)
- Two back gauge fingers, manual lateral movement on linear guideways

OPTIONAL BACK GAUGE

- X, R, Z1, Z2
- X, R, Z1, Z2 + X prime
- X1, X2, R, Z1, Z2
- X1, X2, R1, R2, Z1, Z2 (ATF type)

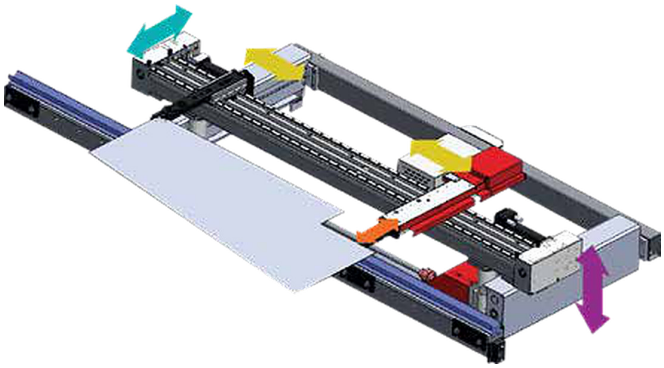

Multi-axis back gauge — X, R, Z1, Z2 axes

TOOL HOLDERS & CLAMPING

PUNCH AND DIE

The machine's bending performance is enhanced and its use made easier with the high-hold European-style tool clamping system. The lower body is narrowly designed for Z-type bending and is compatible with the European-style clamping system.



Wila hydraulic upper tool holder



Wila hydraulic lower tool holder




Wila manual upper tool holder




Wila manual lower tool holder

FAST TOOL REPLACEMENT


By ensuring maximum control of vertical tolerances during the bending process, highly precise clamping, positioning and alignment are achieved. Superior clamping force comes from separate clamping pins for each tool segment. For maximum speed and safety, the system offers vertical and horizontal tool loading and unloading, with a professional finish including a slide rule for easy tool positioning — ensuring maximum productivity.




European type manual punch clamping




European type pneumatic punch clamping




Euro-American type manual punch clamping




American type manual punch clamping




Wilson hydraulic automatic punch clamping




Wilson hydraulic automatic punch clamping



Wilson American type manual punch clamping



Wila hydraulic New Standard automatic punch clamping



Wila American type hydraulic punch clamping

STANDARD & OPTIONAL CNC CONTROLS

CONTROL UNIT



ESA S875 W (STANDARD)

- 3D and 2D graphical touchscreen programming mode
- 3D and 2D visualization in simulation and production
- 21" high-resolution colour touchscreen
- Full-featured Windows application
- ESA offline software
- USB flash memory drive
- Hard disk for over 1,000,000 part programs
- 2D and 3D automatic bend-sequence calculation
- Graphics-based product and tool selection



DELEM DA-66S (OPTION)

- 2D graphical touchscreen programming mode
- 3D machine representation during simulation and production
- 24" high-resolution TFT display
- Delem Modusys compatibility (module scalability and adaptability)
- USB and peripheral interface support
- User-specific application support in the controller's multitasking environment
- Sensor-based bending and straightening interface
- Profile-S2D offline software



DELEM DA-69S (OPTION)

- 3D and 2D graphical touchscreen programming mode
- 3D visualization, including 3D machine representation, during simulation and production
- 24" high-resolution colour TFT display
- Delem Modusys compatibility (module scalability and adaptability)
- USB and peripheral interface support
- User-specific application support in the control's multitasking environment
- Sensor-based bending and straightening interface
- Profile-S3D offline software

KEY SYSTEMS

SAFE AND PRECISE BENDS WITH THE BEST COMPONENTS



CROWNING SYSTEM

The manual or CNC-controlled motorized crowning system ensures perfect accuracy at every bending point. The CNC crowning system automatically calculates bending differences resulting from material differences or external factors, ensuring error-free results.





FRONT SUPPORT

Thanks to its powerful front arms, linear guides and bearing structure, the sheet can be easily moved to the right or left and secured in the desired position. This simplifies the operator's work and ensures high precision during the bending process.





LASER SAFETY SYSTEM

Our machines are designed in compliance with European CE standards and directives. Hydraulic, electrical and laser safety systems ensure the highest level of operator safety. Tandem models offer full protection thanks to safety barriers and laser light curtains.



ANGLE MEASUREMENT SYSTEM

By detecting angular deviations on the bent sheet, the system communicates with the CNC control unit and performs automatic corrections, ensuring a bending accuracy of 0.05° at every bending point.



AUTOMATIC SHEET FOLLOWER


Supports the sheet and moves synchronously during bending, reducing operator effort and improving safety and accuracy.

REQUIRED PRESS FORCE AT 90° AIR BENDING

AIR BENDING CHART

The chart below gives the tonnage required to air-bend mild steel, in US tons per foot of bend length. Bending force for other metals:

Soft aluminum	tons per foot × 50%
Aluminum alloys, heat-treated	tons per foot × 100%
Stainless steel	tons per foot × 150%
Bottoming	tonnage is three to five times greater than for air bending



F = tons per foot of workpiece
s = material thickness
ri = inside radius of formed part
V = V-die opening
B = minimum flange

V-die opening (in)		1/4"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/8"	1-1/4"	1-1/2"	2"	2-1/2"	3-1/8"	3-15/16"	4-3/4"	6-5/16"
B — min. flange (in)		0.167	0.265	0.354	0.442	0.530	0.619	0.707	0.795	0.866	1.06	1.414	1.768	2.224	2.795	3.346	4.488
ri — inside radius (in)		0.038	0.056	0.075	0.094	0.113	0.131	0.150	0.169	0.188	0.225	0.300	0.375	0.472	0.591	0.709	0.945
Material	Decimal	Required force — US tons per foot of bend length (mild steel, 90° air bend)															
20 ga	0.036"	**3.2**	2.0														
18 ga	0.048"	5.1	**3.4**	2.7	2.4												
16 ga	0.060"		5.8	**4.0**	3.1	2.5											
14 ga	0.075"			6.9	**5.0**	4.0	3.5										
12 ga	0.105"					8.3	**6.9**	5.6									
11 ga	0.120"						9.9	**8.2**	7.2	5.4							
10 ga	0.135"						11.9	9.9	**7.3**	**7.1**	5.8						
3/16"	0.188"								14.3	14.2	**12.2**	7.5					
1/4"	0.250"										23.7	**16.5**	11.4				
5/16"	0.313"											27.0	**19.7**				
3/8"	0.375"											42.3	30.9	**22.8**	16.9		
7/16"	0.438"													32.2	**24.3**	19.4	
1/2"	0.500"														34.6	**27.0**	18.3
5/8"	0.625"															**47.1**	32.0
3/4"	0.750"															74.2	**50.4**
7/8"	0.875"																73.9
1"	1.000"																103.0


Shaded values mark the recommended V-die opening for each thickness. Thin sheet shown in gauge (ga), plate in fractions. Values from Dener's imperial air bending chart.

TECHNICAL SPECIFICATIONS SERVO SERIES · DDM

5–13.4 FT SERVO SERIES

9 MODELS · 44 – 220 US TONS

Model		DDM 4015	DDM 5020	DDM 6525	DDM 8025	DDM 10030	DDM 13030	DDM 15030	DDM 17535	DDM 20040
Bending length (A)	FT	5 FT	6.7 FT	8.4 FT	8.4 FT	10 FT	10 FT	10 FT	11.7 FT	13.4 FT
Bending length (A)	in	60.2	80.3	100.4	100.4	120.1	120.1	120.1	140.6	160.6
Bending capacity	metric tons	40	50	65	80	100	130	150	175	200
Bending capacity	US tons	44	55	72	88	110	143	165	193	220
Approach speed*	in/s	7.09	5.91	5.12	3.94	2.95	3.15	3.94	3.35	2.95
Bending speed*	in/s	0.79	0.79	0.79	0.79	0.79	0.79	0.79	0.79	0.79
Return speed*	in/s	7.09	5.91	5.12	3.94	2.95	3.15	3.94	3.35	2.95
Stroke (C)	in	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8
Daylight (D)	in	23.2	23.2	23.2	23.2	23.2	23.2	23.2	23.2	23.2
Length (L)	in	105.1	125.2	144.9	144.9	166.1	166.5	187.8	211.4	226.8
Width (W)	in	89.8	89.8	89.8	89.8	89.0	90.6	97.6	97.6	97.6
Height (H)	in	99.6	99.6	99.6	99.6	99.6	104.7	111.0	111.0	111.0
Motor power	HP	15	15	15	15	15	17	30	30	30
Approx. weight	lb	10,141	11,464	13,007	13,228	14,991	18,298	27,558	30,865	34,172

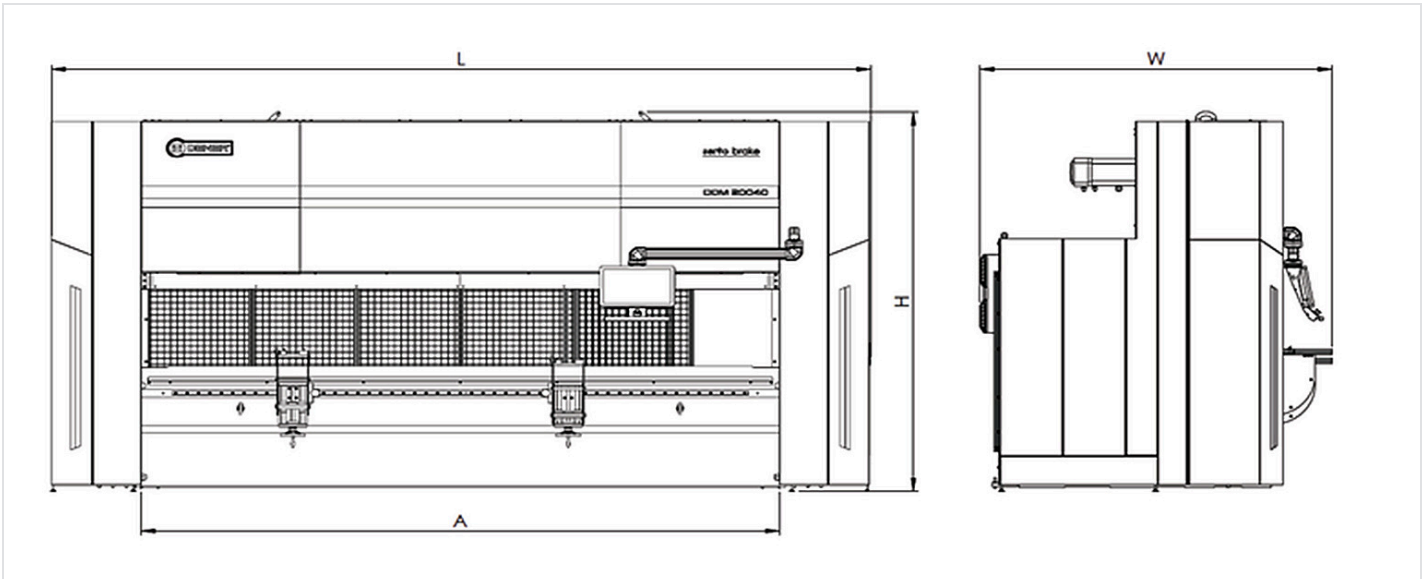

*Dimension letters A, L, W, H refer to the drawing. *Speeds and capacities may vary due to factors such as material quality, operator settings and bending speed. Model numbers are Dener designations (metric tonnage × metric bending length); imperial values converted from manufacturer data and rounded.*

DDM SERVO SERIES

STANDARD & OPTIONAL EQUIPMENT





STANDARD FEATURES

- ESA S875 W 21" 3D CNC control unit
- 4 axes — Y1, Y2, X, R
- Heavy-duty X + R 2-axis back gauge with servo motor and ball screw (moving back and forth + up and down), including 2 finger stops
- DSP-AP finger safety laser + MCS safety PLC
- 2 pcs. front supports (sliding arms with manual height adjustment)
- European PROMECAM tool clamping system
- EUROSTAMP 1281 segmented punch (Italy)
- EUROSTAMP 2067 4V die (Italy)
- Side and back covers with safety interlocks
- Foot pedal with emergency stop button
- CSA-approved electrical panel
- 600 V 3-phase electrical system
- Electrical cabinet cooling system

OPTIONAL EQUIPMENT

- Delem DA-66S CNC control unit
- Delem DA-69S 3D CNC control unit
- ATF type X1, X2, R1, R2, Z1, Z2 back gauge
- X, R, Z1, Z2 back gauge
- X1, X2, R, Z1, Z2 back gauge
- X prime back gauge
- Fiessler AKAS 2 M(P) laser safety system
- Manual or automatic crowning system
- Sheet follower system
- Automatic angle measurement system
- Pneumatic punch and die clamping system
- Wila mechanical upper & lower tool clamping system
- Wila hydraulic upper & lower tool clamping system
- North American / European PROMECAM combo tool clamping system
- 9 pcs. segmented EUROSTAMP 1281 punch – 805 mm (31.7")
- Additional press brake finger for back gauge
- Euro-American die holder
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **FREE INSTALLATION AND TRAINING in GTA**

DDM SERVO-ELECTRIC PRESS BRAKES · 44 – 220 US TONS

DENER DDM SERVOBRAKE IN DETAIL

MODEL DD





DDM servobrake — front view



DDM servobrake with CNC control on swivel arm

SERVOBRAKE MINIBEND · HIGH-EFFICIENCY COMPACT BENDING SOLUTIONS


DDS BALL-SCREW ELECTRIC PRESS BRAKE



SINGLE / MULTIPLE LENZE DRIVE TECHNOLOGY

- Up to 50% energy saving
- Fast production with fast bending procedures
- Low maintenance costs
- High precision, positioning and repeatability
- Light and compact design

HYDRAULIC OIL CYLINDER | NO

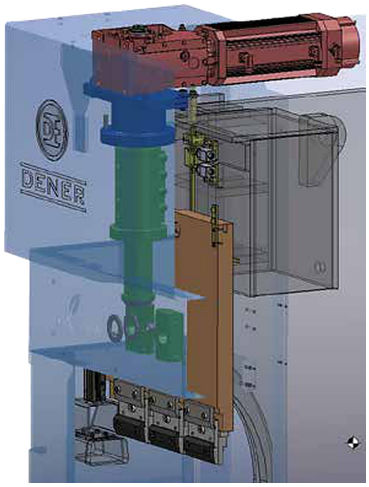

Ball-screw drive with Lenze servo technology

THE WORLD'S WIDEST RANGE OF ELECTRIC PRESS BRAKES




CONTROL · WORK TABLE · TOOLING · BACK GAUGE

DDS — FEATURES



CONTROL UNIT

ESA S640 control unit (standard): 15″ colour touchscreen · automatic bend sequence · easy-to-program 2D graphic screen · multi-language option · 2D simulation · remote access.
ESA 875 W control unit (option).

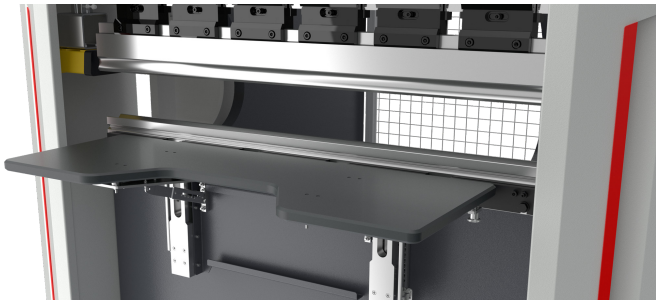


WORK TABLE (OPTION)

The foldable, height-adjustable work table increases working comfort and makes bending operations easier for the operator.



HOLDERS & TOOLS

European-type punch and die clamping systems · Wila mechanical and hydraulic clamping system (option) · double-wedge adjustable, high-precision European punch holder (option) · punches and dies (option).

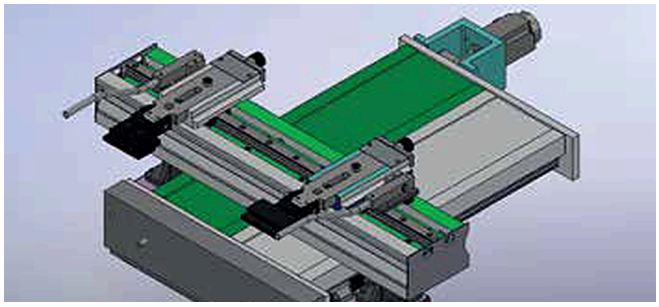


BACK GAUGE

The 2-axis back gauge lets you make complex bends easily. (A 5-axis back gauge including Z1, Z2 and X-Prime is optional, together with the ESA S660 control unit.) Combining high speed with precise accuracy, the back gauge is positioned for the operator according to each bending step.

BALL-SCREW SERVOBRAKE

DDS — SAFETY, FRAME & MORE

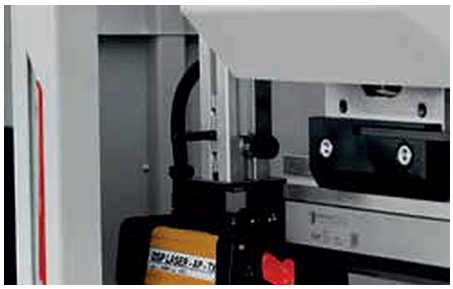





SAFETY

Finger protection system with DSP-AP laser (option).

FRAME

A robust monoblock frame with a small throat depth delivers high-precision bends.

OTHER ADVANTAGES

Electrical cabinet cooling system · easier box bending with higher daylight · fast installation and easy transport.

DDS STANDARD FEATURES

- ESA S640 15" 2D colour touchscreen CNC control
- 2-axis back gauge (X, R)
- European-type punch and die clamping system
- Electrical cabinet cooling system
- Ball-screw drive with Lenze servo technology — no hydraulic oil or cylinders

DDS OPTIONAL EQUIPMENT

- ESA 875 W CNC control unit
- 5-axis back gauge (X, R, Z1, Z2, X-Prime) with ESA S660 control unit
- Foldable, height-adjustable work table
- Wila mechanical and hydraulic clamping system
- Double-wedge adjustable, high-precision European punch holder
- Punches and dies
- DSP-AP laser finger protection system
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

INCLUDED WITH EVERY NOVOTECH MACHINE


- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **FREE INSTALLATION AND TRAINING in GTA**

TECHNICAL SPECIFICATIONS DDS BALL-SCREW SERIES

3–4.3 FT DDS BALL-SCREW SERIES

2 MODELS · 22 – 44 US TONS

Model		DDS 4013	DDS 2090
Bending length (B)	FT	4.3 FT	3 FT
Bending length (B)	in	51.2	35.4
Bending capacity	metric tons	40	20
Bending capacity	US tons	44	22
Daylight (Q)	in	14.8	14.8
Max. stroke	in	5.9	5.9
Y-axis approach speed	in/s	4.72	4.72
Y-axis bending speed	in/s	0.39	0.39
Y-axis return speed	in/s	4.72	4.72
Motor power	HP	2 × 5.1	5.1
Overall width, front view (C)	in	95.9	69.3
Overall depth, side view (A)	in	74.0	50.4
Height (D)	in	91.3	86.2
Approx. weight	lb	7,496	4,409

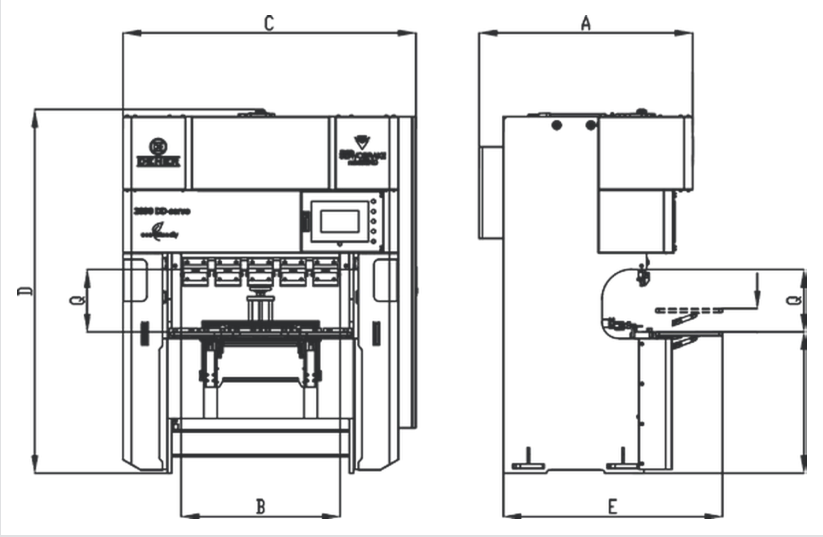

MODEL DDS



Dimension letters refer to the drawing (B = bending length, Q = daylight). Model numbers are Dener designations (metric tonnage × metric bending length); imperial values converted from manufacturer data and rounded. Speeds and capacities may vary with material quality and operator settings.

GLOBAL MANUFACTURING & SALES NETWORK

DENER WORLDWIDE



DENER MAKINA
Kayseri, Türkiye

DENER USA
Elgin, USA

DENER CANADA
Mississauga, Canada

DENER GMBH
Leonberg, Germany

DENER INDIA
Pune, India

52+
YEARS OF EXPERIENCE

100+
EXPORT COUNTRIES

14,000,000 sq ft
PRODUCTION CAMPUS (1,300,000 M²)

Dener Makina A.Ş. reserves the right to modify catalogue information and machine specifications without notice.

GLOBAL RECOGNITION IN ENGINEERING

AWARD-WINNING DESIGN

International recognition reflecting Dener's commitment to product quality, innovation and design excellence.



Good Design Award



European Product Design Award



International Design Awards (IDA)



Design Intelligence Award (DIA)



Design Turkey



Productivity Project Awards 2022–2023

THE DENER RANGE

SHEET METAL PROCESSING MACHINES



Hydraulic press brake



Hybrid press brake



Panel bender



Servo-electric press brake



Compact press brake



Hydraulic shear



Fiber laser cutting machine



Enclosed fiber laser cutting machine



Tube profile laser

"THE FUTURE IS HERE" · AVAILABLE THROUGH NOVOTECH

DENER PRODUCT RANGE

PRESS BRAKES


Hydraulic press brake


Hybrid press brake


Servo-electric press brake


Ball-screw press brake

PANEL BENDER


Panel bender

SHEARS


CNC hydraulic shear


NC hydraulic shear

LASER CUTTING MACHINES


GFL fiber laser cutting machine


Smart fiber laser cutting machine


Tube profile laser cutting machine

MACHINE TOOLS


CNC lathe


CNC vertical milling machine


Double-column milling machine


5-axis machining center


NC grinding machine

NovoTech MACHINE TOOLS Inc.

LET'S FIND THE RIGHT PRESS BRAKE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga location.

PHONE
+1 647 526 5510

WEB & EMAIL
NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS
1365 Mid-Way Blvd, 26
Mississauga, ON L5T 2J5
Canada

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **FREE INSTALLATION AND TRAINING in GTA**



Specifications subject to change without notice. Imperial values converted from manufacturer metric data and rounded. Photos may show optional equipment.