"THE FUTURE IS HERE" · SOLD & SERVICED IN CANADA BY NOVOTECH

SWING BEAM & GUILLOTINE SHEARING

PRECISION CUTTING · PERFECT RESULTS · HIGH PRODUCTIVITY







Since 1974
MANUFACTURING EXPERIENCE

1/4 – 3/4"
MILD STEEL CAPACITY

6.8 – 20 ft
CUTTING LENGTH

Canada
PARTS & TECHNICAL SUPPORT

NovoTech Machine Tools Inc.
1365 Mid-Way Blvd, 26, Mississauga, ON L5T 2J5, Canada
NovoTechMachineTools.com | info@NovoTechMachineTools.com | +1 647 526 5510

MANUFACTURER · ESTABLISHED 1974

ABOUT DENER

Dener Makina was established in 1974 in the Kayseri Old Industrial Zone. Since 2000, the company has focused on the production of CNC Sheet Metal Processing Machines, manufacturing a wide range of products including Guillotine Shears, Hydraulic Press Brakes, Ball Screw Press Brakes, Servo-Electric Press Brakes, Plasma Cutting Machines, and Fiber Laser Cutting Machines.

In 2016, the company made a major investment by expanding its facilities to include 1,670,000 sq ft (155,000 m^2) of factory buildings and 290,000 sq ft (27,000 m^2) of social facilities on a 14,000,000 sq ft (1,300,000 m^2) site within the İncesu Organized Industrial Zone (O.S.B). In this new phase, Dener Makina began the production of CNC Metal Processing Machines such as Taksan Integrated Systems, Double Column Machining Centers, 5-Axis Simultaneous Machining Centers, Vertical Machining Centers, Lathes, and Grinding Machines.

With its extensive production range, over half a century of experience, skilled workforce, and multinational R&D center, Dener Makina holds a leading position globally by providing high-value industrial investment products in the fields of CNC Sheet Metal Processing and CNC Metal Processing Machines.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ **7-day money-back guarantee** (in-stock machines only)
- ✓ Spare parts & technical support readily available in Canada
- ✓ **Order Today with Just 10% Down — 0% Down Financing Available**
- ✓ **Installation and training available**

SOLD & SERVICED IN CANADA

by NovoTech Machine Tools — Mississauga, ON

CONTENTS THIS BROCHURE

Production Campus 03
DAS Series — CNC Guillotine Shear 04
DAS Series — Standard Equipment 06
DAS Series — Optional Equipment 07
DAS Series — Advantages 08
DAS Series — CE Confirmation with Photocell 09
DAS Series — Technical Specifications 10
BS Series — Swing Beam Shear 12
BS Series — NC Controller HT 071 13
BS Series — Standard Equipment 14
BS Series — Optional Equipment 15
BS Series — ESA 630 Controller · Drawings 16
BSY-BS Series — Technical Specifications 17
Dener Product Range 19

DENER MAKINA · İNCESU ORGANIZED INDUSTRIAL ZONE, KAYSERI

DENER PRODUCTION CAMPUS



Dener production campus, Kayseri — 1,670,000 sq ft (155,000 m^2) of factory buildings on a 14,000,000 sq ft (1,300,000 m^2) site

- SHEET PROCESSING MACHINES PRODUCTION PLANT
- MACHINE TOOLS PRODUCTION PLANT
- PRODUCTION PLANT
- SHEET WELDING FACTORY
- SHEET CLADDING FACTORY
- TECHNOLOGY CENTER
- ADMINISTRATIVE BUILDING
- SOCIAL FACILITIES
- MAIN ENTRANCE
- VISITOR PARKING AREA
- HELICOPTER PAD

52+
YEARS OF EXPERIENCE

100+
EXPORT COUNTRIES

14,000,000 sq ft
PRODUCTION CAMPUS (1,300,000 M^2)

DENER · CNC GUILLOTINE SHEAR

DAS SERIES CNC GUILLOTINE SHEAR



DAS CNC guillotine shear with the ESA 630 control on its arm




Foot pedal

Dener CNC guillotine shears provide rock-solid mechanics, hydraulics, an accurate ball-screw back gauge and a user-friendly CNC controller — highly productive shearing machines. Dener shears start from 1/4" (6 mm) up to 3/4" (20 mm) thickness and cutting lengths from 10 ft (3 m) up to 20 ft (6 m) as standard, and higher-capacity machines are available on special demand.

Dener guillotine shears have a strong welded steel construction suitable for long operating times. The frame, cutting beam and back gauge are designed for the highest rigidity and resistance to torsion and deformation. With this strong design, customers get the maximum cutting quality.

With the easy-to-use CNC controller the operator enters the thickness and the type of the material, and the controller automatically adjusts the cutting angle and the blade gap.

DAS SERIES
CNC GUILLOTINE SHEAR

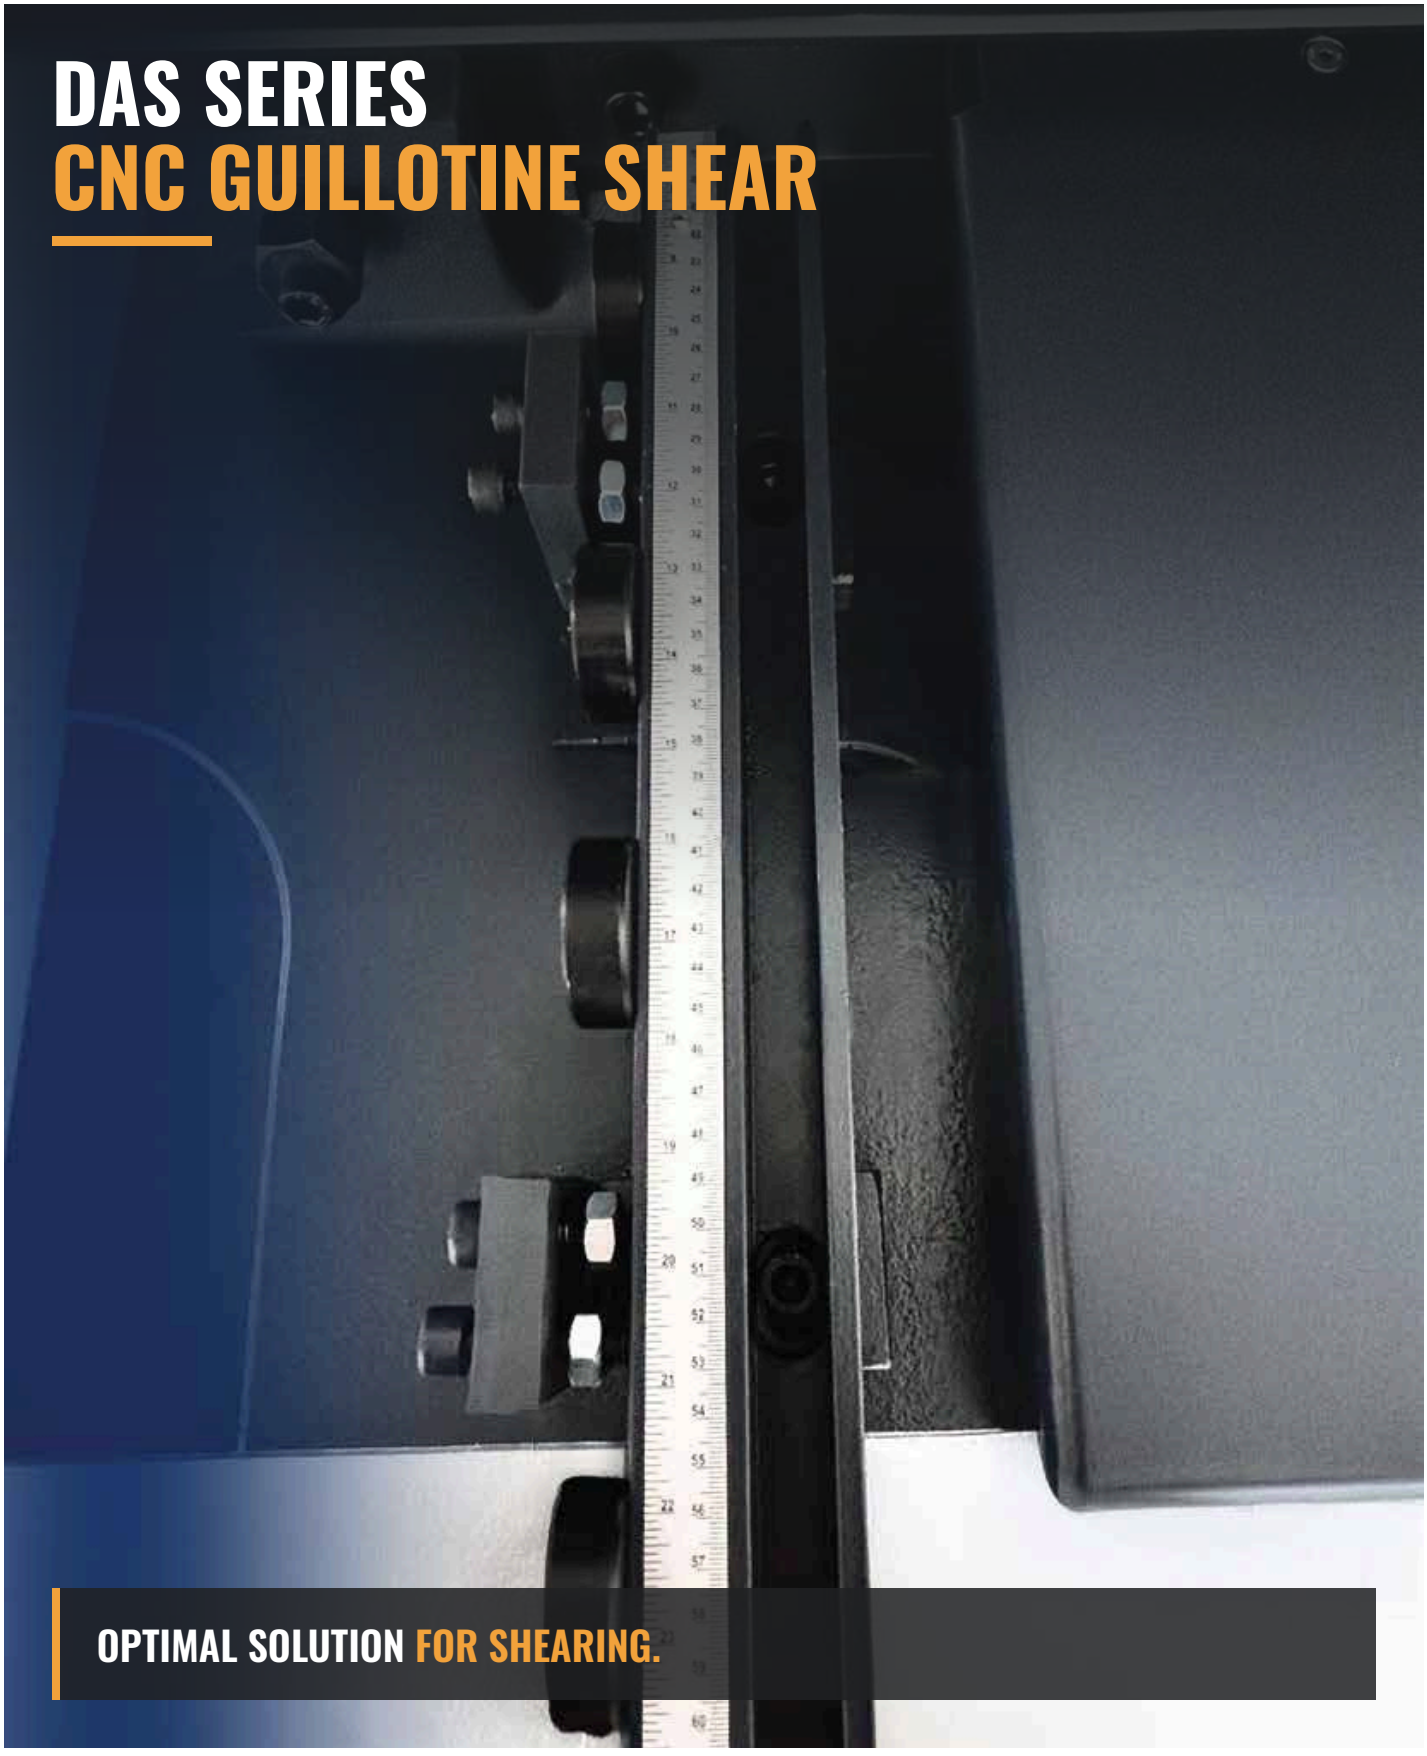

OPTIMAL SOLUTION FOR SHEARING.

DAS SERIES · CNC GUILLOTINE SHEAR

STANDARD EQUIPMENT

ESA 630 CONTROLLER

- 10" LCD touch screen
- Back gauge control
- Blade gap control
- Cutting angle control
- Programmable up to 100 steps
- Positioning correction
- Step repetition
- Inch / mm selection
- 2 USB (2.0) ports · 128 MB silicon disk



ESA 630 controller



FOOT PEDAL

Remote foot control pedal with emergency stop button.



SHEET SLIDER



MOTORIZED BACK GAUGE — ±0.004" (±0.1 MM) ACCURACY



FRONT PROTECTION FRAME



HOLD DOWN PADS

DAS SERIES · CNC GUILLOTINE SHEAR

OPTIONAL EQUIPMENT


LONGER FRONT SUPPORT ARMS 6.6 FT / 9.8 FT (2 M / 3 M)



SPARE BLADE



HYDRAULIC OIL COOLER SYSTEM

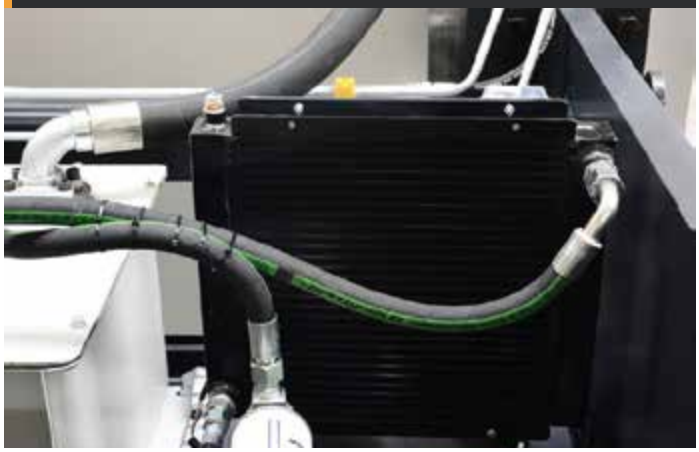


SHEET SUPPORT SYSTEM



LASER CUTTING LINE



LIGHT CURTAIN

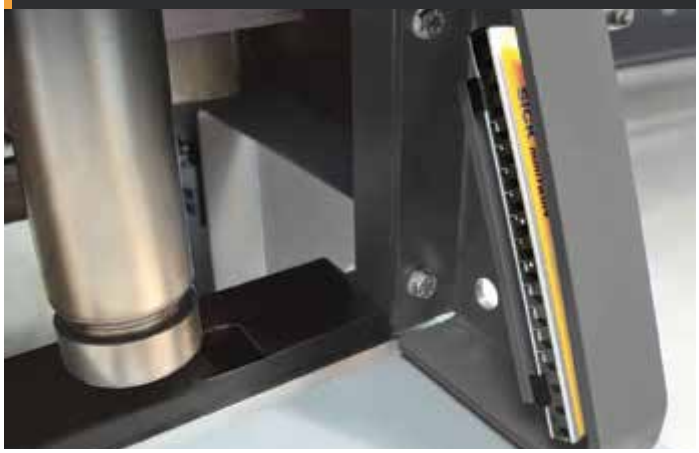

ADVANTAGES

- Low maintenance cost
- Automatic blade gap adjustment
- Faster working system
- New design body structure and working system




CE CONFIRMATION WITH PHOTOCELL SYSTEM




DAS SERIES CNC GUILLOTINE SHEAR

TECHNICAL SPECIFICATIONS · 1 OF 2

DAS	3006	4006	3010	3013	4013	3016	4016
Cutting length	10.1 ft · 121.3″ (3,080 mm)	13.3 ft · 159.4″ (4,050 mm)	10.1 ft · 121.3″ (3,080 mm)	10.1 ft · 121.3″ (3,080 mm)	13.3 ft · 159.4″ (4,050 mm)	10.1 ft · 121.3″ (3,080 mm)	13.3 ft · 159.4″ (4,050 mm)
Cutting capacity — mild steel 60,000 psi · 42 kg/mm²	1/4″ (6 mm)	1/4″ (6 mm)	3/8″ (10 mm)	1/2″ (13 mm)	1/2″ (13 mm)	5/8″ (16 mm)	5/8″ (16 mm)
Cutting capacity — stainless steel 100,000 psi · 70 kg/mm²	5/32″ (4 mm)	5/32″ (4 mm)	9/32″ (7 mm)	3/8″ (10 mm)	3/8″ (10 mm)	15/32″ (12 mm)	15/32″ (12 mm)
Cutting capacity — aluminum 28,400 psi · 20 kg/mm²	5/16″ (8 mm)	5/16″ (8 mm)	1/2″ (13 mm)	11/16″ (18 mm)	11/16″ (18 mm)	7/8″ (22 mm)	7/8″ (22 mm)
Cutting angle	0.5 – 2°	0.5 – 2°	0.5 – 2°	0.5 – 3°	0.5 – 3°	0.5 – 3°	0.5 – 3°
Number of hold-down cylinders	16	22	16	16	22	16	22
Main motor	14.8 HP (11 kW)	14.8 HP (11 kW)	29.5 HP (22 kW)	40.2 HP (30 kW)	40.2 HP (30 kW)	40.2 HP (30 kW)	40.2 HP (30 kW)
Cuts per minute (0.5 – 3°)	25 / 12	20 / 10	22 / 10	16 / 7	15 / 6	14 / 6	13 / 5
Oil tank	48 US gal (180 L)	48 US gal (180 L)	53 US gal (200 L)	106 US gal (400 L)	106 US gal (400 L)	106 US gal (400 L)	106 US gal (400 L)
Length L	153.5″ (3,900 mm)	194.5″ (4,940 mm)	154.3″ (3,920 mm)	153.5″ (3,900 mm)	192.9″ (4,900 mm)	153.5″ (3,900 mm)	194.9″ (4,950 mm)
Throat depth E	13.8″ (350 mm)	13.8″ (350 mm)	13.8″ (350 mm)	13.8″ (350 mm)	13.8″ (350 mm)	13.8″ (350 mm)	13.8″ (350 mm)
Width without front support B	84.6″ (2,150 mm)	85.8″ (2,180 mm)	87.8″ (2,230 mm)	88.0″ (2,235 mm)	89.4″ (2,270 mm)	88.2″ (2,240 mm)	88.6″ (2,250 mm)
Width W	133.1″ (3,380 mm)	133.1″ (3,380 mm)	135.4″ (3,440 mm)	138.6″ (3,520 mm)	137.8″ (3,500 mm)	143.7″ (3,650 mm)	144.1″ (3,660 mm)
Height H	85.2″ (2,165 mm)	87.6″ (2,225 mm)	90.2″ (2,290 mm)	102.0″ (2,590 mm)	104.3″ (2,650 mm)	103.7″ (2,635 mm)	106.3″ (2,700 mm)
Weight	17,637 lb (8,000 kg)	24,251 lb (11,000 kg)	22,046 lb (10,000 kg)	30,424 lb (13,800 kg)	36,817 lb (16,700 kg)	36,156 lb (16,400 kg)	47,399 lb (21,500 kg)

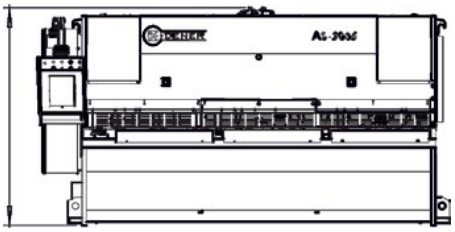

Front view — length L, height H



Side view — width W, B (without front support), throat depth E

**Cutting thicknesses may vary due to factors such as material quality, operator settings, and cutting speed.*

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase. CSA-approved electrical panel.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

DAS SERIES CNC GUILLOTINE SHEAR

TECHNICAL SPECIFICATIONS · 2 OF 2

DAS	3020	4020	6006	6013	6016	6020
Cutting length	10.1 ft · 121.3″ (3,080 mm)	13.3 ft · 159.4″ (4,050 mm)	20 ft · 240.2″ (6,100 mm)	20 ft · 240.6″ (6,110 mm)	20.1 ft · 241.7″ (6,140 mm)	20.1 ft · 241.7″ (6,140 mm)
Cutting capacity — mild steel 60,000 psi · 42 kg/mm²	3/4″ (20 mm)	3/4″ (20 mm)	1/4″ (6 mm)	1/2″ (13 mm)	5/8″ (16 mm)	3/4″ (20 mm)
Cutting capacity — stainless steel 100,000 psi · 70 kg/mm²	9/16″ (14 mm)	9/16″ (14 mm)	5/32″ (4 mm)	11/32″ (9 mm)	15/32″ (12 mm)	9/16″ (14 mm)
Cutting capacity — aluminum 28,400 psi · 20 kg/mm²	1″ (26 mm)	1″ (26 mm)	5/16″ (8 mm)	5/8″ (16 mm)	7/8″ (22 mm)	1″ (26 mm)
Cutting angle	0.5 – 3°	0.5 – 3°	0.5 – 2.5°	0.5 – 2.5°	0.5 – 2.5°	0.5 – 2.5°
Number of hold-down cylinders	16	22	33	31	31	31
Main motor	49.6 HP (37 kW)	49.6 HP (37 kW)	14.8 HP (11 kW)	49.6 HP (37 kW)	60.3 HP (45 kW)	60.3 HP (45 kW)
Cuts per minute (0.5 – 3°)	12 / 5	11 / 4	18 / 6.5	11.5 / 5.3	6.1 / 3.9	6 / 3.5
Oil tank	198 US gal (750 L)	198 US gal (750 L)	53 US gal (200 L)	106 US gal (400 L)	198 US gal (750 L)	198 US gal (750 L)
Length L	155.5″ (3,950 mm)	198.8″ (5,050 mm)	277.0″ (7,035 mm)	279.1″ (7,090 mm)	283.5″ (7,200 mm)	283.5″ (7,200 mm)
Throat depth E	13.8″ (350 mm)	13.8″ (350 mm)	13.8″ (350 mm)	13.8″ (350 mm)	13.8″ (350 mm)	13.8″ (350 mm)
Width without front support B	92.1″ (2,340 mm)	92.5″ (2,350 mm)	107.1″ (2,720 mm)	109.3″ (2,775 mm)	122.0″ (3,100 mm)	124.0″ (3,150 mm)
Width W	147.6″ (3,750 mm)	147.8″ (3,755 mm)	157.5″ (4,000 mm)	159.6″ (4,055 mm)	173.2″ (4,400 mm)	175.2″ (4,450 mm)
Height H	104.3″ (2,650 mm)	107.9″ (2,740 mm)	101.6″ (2,580 mm)	107.5″ (2,730 mm)	109.4″ (2,780 mm)	109.4″ (2,780 mm)
Weight	42,439 lb (19,250 kg)	62,832 lb (28,500 kg)	60,627 lb (27,500 kg)	82,673 lb (37,500 kg)	109,129 lb (49,500 kg)	121,254 lb (55,000 kg)

**Cutting thicknesses may vary due to factors such as material quality, operator settings, and cutting speed.*

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase. CSA-approved electrical panel.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

DENER · SWING BEAM SHEAR

BS SERIES SWING BEAM SHEAR



BS swing beam shear

Easy, accurate, rock-solid welded steel construction — a proven design that thousands of customers across the world have come to rely on.

Dener swing beam shears start from 5/32" (4 mm) up to 5/8" (16 mm) thickness and cutting lengths from 6.6 ft (2 m) up to 20 ft (6 m) as standard, and higher-capacity machines are available on special demand.

Main features of the swing beam shears are: NC controller for the back gauge, single-point manual blade gap adjustment, a 39.4" (1,000 mm) motorized ball-screw back gauge, cutting length adjustment by timer, a 3.3 ft (1 m) flip-up front guard, sheet support arms and squaring support, a sheet slider table and a back slider.

BS SERIES · SWING BEAM SHEAR

NC CONTROLLER HT 071

The HT 071 is a very compact, simply programmable single-axis controller for swing beam shears. It has back gauge control, retract, a stroke counter and a program memory of up to 99 programs with 20 steps.

Back gauge axis control is two-speed AC control. Referencing is not necessary — the controller always remembers the last position. The back gauge can be moved manually with push buttons at 2 different speeds. A total working hours and total cut counter is also standard with the controller.



HT 071 NC controller

HT 071 FEATURING

- LCD display
- Back gauge control
- Actual position visualization
- Stock counter
- Program memory up to 99 parts
- Programmable up to 20 steps
- User-friendly one-touch programming
- Retract
- Semi-automatic and automatic function
- Stroke limitation



BS swing beam shear with the foot pedal



FOOT PEDAL

Remote foot control pedal with emergency stop button.

FRONT ARMS

- Table equipped with sheet slider balls
- Operations square arm with rear supporting nail in T-slot
- Front support arms with T-slots

BS SERIES · SWING BEAM SHEAR

STANDARD EQUIPMENT



SHEET SLIDER




MOTORIZED BACK GAUGE — ±0.004" (±0.1 MM) ACCURACY



FRONT PROTECTION FRAME



HOLD DOWN PADS

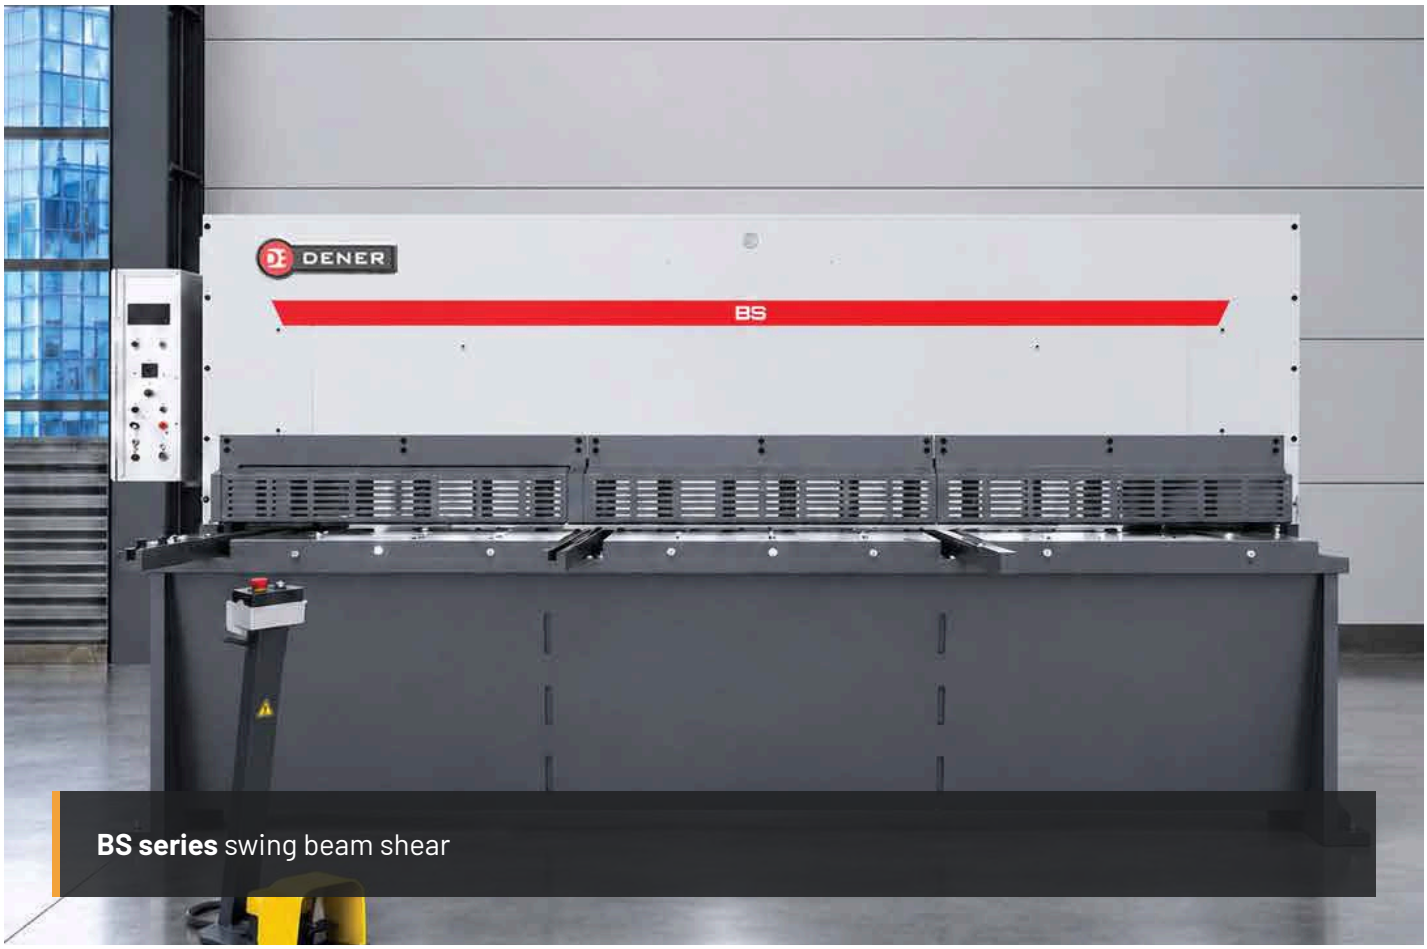

BS series swing beam shear

BS SERIES · SWING BEAM SHEAR

OPTIONAL EQUIPMENT

LONGER FRONT SUPPORT ARMS 6.6 FT / 9.8 FT (2 M / 3 M)



SPARE BLADE



HYDRAULIC OIL COOLER SYSTEM



SHEET SUPPORT SYSTEM



LASER CUTTING LINE



LIGHT CURTAIN



MOTORIZED BLADE CLEARANCE ADJUSTMENT VIA CNC CONTROL UNIT



BS SERIES · SWING BEAM SHEAR


ESA 630 CONTROLLER (STANDARD)

- 10" LCD touch screen
- Back gauge control
- Blade gap control
- Cutting angle control
- Programmable up to 100 steps
- Positioning correction
- Step repetition
- Inch / mm selection
- 2 USB (2.0) ports · 128 MB silicon disk




ESA 630 controller


BS SERIES DRAWINGS

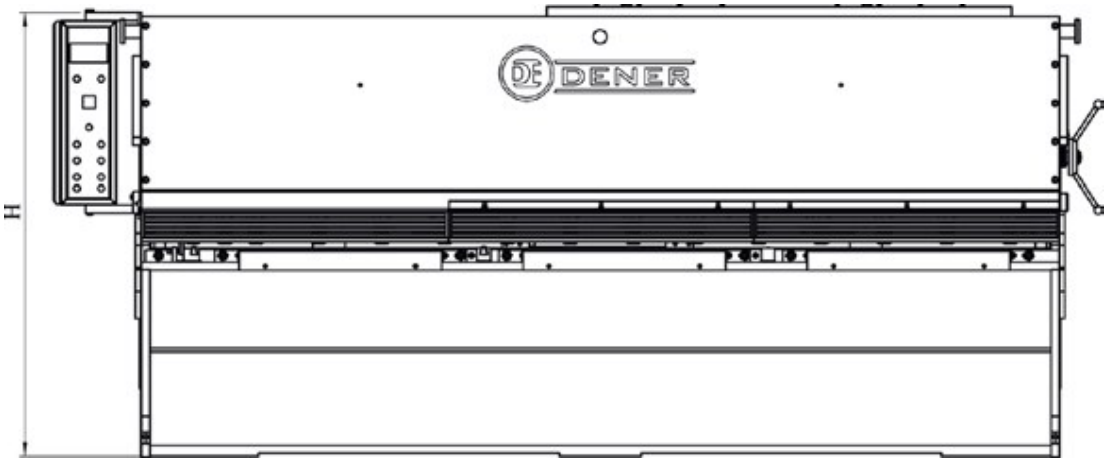

Front view

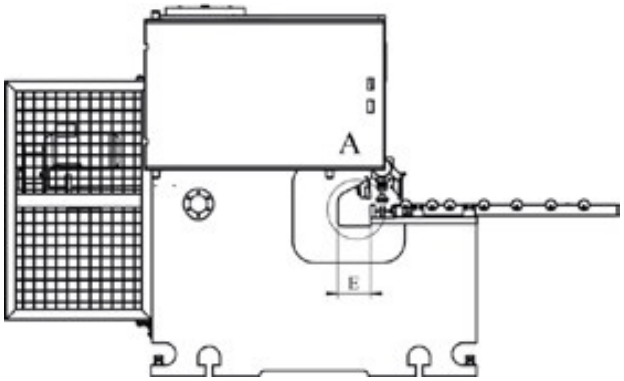

Side view

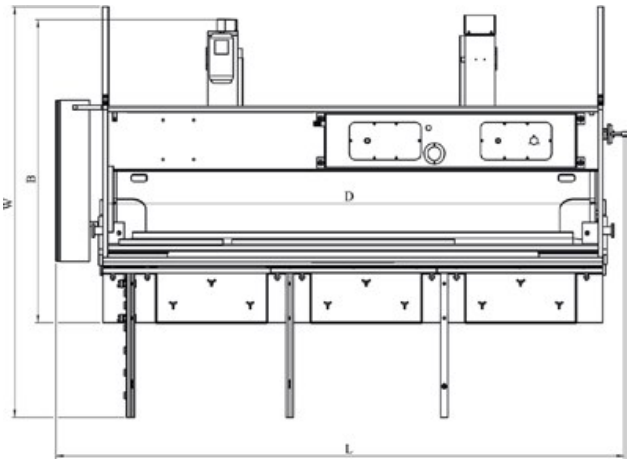

Top view

BSY-BS SERIES SWING BEAM SHEAR

TECHNICAL SPECIFICATIONS · 1 OF 2

BSY-BS	BSY 2006	BSY 2606	BSY 3006	BS 3006	BS 4006
Max. sheet thickness — mild steel 60,000 psi · 42 kg/mm²	1/4″ (6 mm)	1/4″ (6 mm)	1/4″ (6 mm)	1/4″ (6 mm)	1/4″ (6 mm)
Max. sheet thickness — stainless steel 100,000 psi · 70 kg/mm²	5/32″ (4 mm)	5/32″ (4 mm)	5/32″ (4 mm)	5/32″ (4 mm)	5/32″ (4 mm)
Max. sheet thickness — aluminum 28,400 psi · 20 kg/mm²	5/16″ (8 mm)	5/16″ (8 mm)	5/16″ (8 mm)	5/16″ (8 mm)	5/16″ (8 mm)
Cutting length	6.8 ft · 81.9″ (2,080 mm)	8.6 ft · 103.1″ (2,620 mm)	10.1 ft · 120.9″ (3,070 mm)	10 ft · 120.7″ (3,065 mm)	13.5 ft · 161.8″ (4,110 mm)
Strokes per minute	22	20	18	18	14
Swing beam angle	1.39°	1.39°	1.39°	1.39°	1.33°
Tank capacity	53 US gal (200 L)	53 US gal (200 L)	53 US gal (200 L)	53 US gal (200 L)	53 US gal (200 L)
Motor	14.8 HP (11 kW)	14.8 HP (11 kW)	14.8 HP (11 kW)	14.8 HP (11 kW)	14.8 HP (11 kW)
Length	111.4″ (2,830 mm)	133.1″ (3,380 mm)	152.8″ (3,880 mm)	152.8″ (3,880 mm)	195.1″ (4,955 mm)
Throat depth	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)
Width without front support	83.3″ (2,115 mm)	83.3″ (2,115 mm)	83.1″ (2,110 mm)	84.3″ (2,140 mm)	85.0″ (2,160 mm)
Width	143.3″ (3,640 mm)	143.5″ (3,645 mm)	137.6″ (3,495 mm)	145.7″ (3,700 mm)	145.5″ (3,695 mm)
Height	73.2″ (1,860 mm)	73.2″ (1,860 mm)	68.9″ (1,750 mm)	84.6″ (2,150 mm)	84.3″ (2,140 mm)
Weight	10,582 lb (4,800 kg)	12,125 lb (5,500 kg)	14,330 lb (6,500 kg)	17,637 lb (8,000 kg)	22,928 lb (10,400 kg)

**Cutting thicknesses may vary due to factors such as material quality, operator settings, and cutting speed.*

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase. CSA-approved electrical panel.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ **7-day money-back guarantee** (in-stock machines only)
- ✓ Spare parts & technical support readily available in Canada
- ✓ **Order Today with Just 10% Down — 0% Down Financing Available**
- ✓ **Installation and training available**

BSY-BS SERIES SWING BEAM SHEAR

TECHNICAL SPECIFICATIONS · 2 OF 2

BSY-BS	BS 3010	BS 4010	BS 3013	BS 4013	BS 3016	BS 4016
Max. sheet thickness — mild steel 60,000 psi · 42 kg/mm²	3/8″ (10 mm)	3/8″ (10 mm)	1/2″ (13 mm)	1/2″ (13 mm)	5/8″ (16 mm)	5/8″ (16 mm)
Max. sheet thickness — stainless steel 100,000 psi · 70 kg/mm²	9/32″ (7 mm)	9/32″ (7 mm)	3/8″ (10 mm)	3/8″ (10 mm)	15/32″ (12 mm)	15/32″ (12 mm)
Max. sheet thickness — aluminum 28,400 psi · 20 kg/mm²	1/2″ (13 mm)	1/2″ (13 mm)	11/16″ (18 mm)	11/16″ (18 mm)	7/8″ (22 mm)	7/8″ (22 mm)
Cutting length	10.1 ft · 120.9″ (3,070 mm)	13.5 ft · 161.8″ (4,110 mm)	10.1 ft · 120.9″ (3,070 mm)	13.5 ft · 161.8″ (4,110 mm)	10.1 ft · 120.9″ (3,070 mm)	13.5 ft · 161.8″ (4,110 mm)
Strokes per minute	12	8	12	8	12	8
Swing beam angle	2°	2°	2.5°	2°	2.5°	2°
Tank capacity	53 US gal (200 L)	53 US gal (200 L)	79 US gal (300 L)	106 US gal (400 L)	106 US gal (400 L)	106 US gal (400 L)
Motor	29.5 HP (22 kW)	29.5 HP (22 kW)	40.2 HP (30 kW)	40.2 HP (30 kW)	40.2 HP (30 kW)	40.2 HP (30 kW)
Length	153.5″ (3,900 mm)	194.9″ (4,950 mm)	154.3″ (3,920 mm)	195.7″ (4,970 mm)	155.1″ (3,940 mm)	195.7″ (4,970 mm)
Throat depth	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)
Width without front support	90.7″ (2,305 mm)	90.7″ (2,305 mm)	90.9″ (2,308 mm)	90.9″ (2,308 mm)	88.0″ (2,235 mm)	91.3″ (2,320 mm)
Width	148.4″ (3,770 mm)	150.8″ (3,830 mm)	151.2″ (3,840 mm)	151.2″ (3,840 mm)	152.2″ (3,865 mm)	152.2″ (3,865 mm)
Height	95.7″ (2,430 mm)	95.1″ (2,415 mm)	99.2″ (2,520 mm)	98.7″ (2,508 mm)	98.4″ (2,500 mm)	98.7″ (2,508 mm)
Weight	26,455 lb (12,000 kg)	33,069 lb (15,000 kg)	30,865 lb (14,000 kg)	37,148 lb (16,850 kg)	35,538 lb (16,120 kg)	40,565 lb (18,400 kg)

**Cutting thicknesses may vary due to factors such as material quality, operator settings, and cutting speed.*

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase. CSA-approved electrical panel.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

"THE FUTURE IS HERE" · AVAILABLE THROUGH NOVOTECH

DENER PRODUCT RANGE

PRESS BRAKES



Hydraulic press brake



Tandem press brake



Servo-electric press brake



Ball-screw press brake

PANEL BENDER



Panel bender

SHEARS



CNC hydraulic shear



NC hydraulic shear

LASER CUTTING MACHINES



GFL fiber laser cutting machine



Smart fiber laser cutting machine



Tube profile laser cutting machine

MACHINE TOOLS



CNC lathe



CNC vertical milling machine



Double-column milling machine



5-axis machining center



NC grinding machine

NovoTech MACHINE TOOLS Inc.

LET'S FIND THE RIGHT SHEAR FOR YOUR SHOP.

Call or visit us for quotes, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, 26
Mississauga, ON L5T 2J5
Canada

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**









Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: plate thicknesses in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment.