
# CUBOGRIT® K

**The continuously CBN-coated band saw blade**

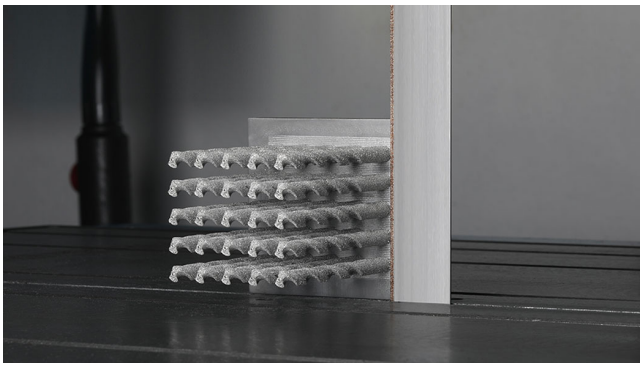

Product level 2

Band width 10 x 0.5 - 100 x 1.1mm
Band width 3/8 x 0.020 - 4 x 0.042 Inch

Werkstückgröße klein: bis ca. 50 mm

Continuous CBN-coating

## Product Information



### The CBN-coated band saw blade

WIKUS expands its portfolio of the coated band saw blades by the new product CUBOGRIT® which uses cubic boron nitride (CBN) as cutting material. Cubic boron nitride is the second hardest material known. Besides a high hardness and strength, also thermal and chemical resistance are its properties. Due to these properties, CUBOGRIT® band saw blades are ideal for the reliable processing of hardened ferrous materials and hard alloys as well as for hard alloys produced in 3D-print. From now on, even the hardest alloys up to 70 HRC can be cut economically with CUBOGRIT®.

**Application**

- hardened high speed steel (HSS), case-hardened steels
- high-alloy tool steels > 55 HRC
- iron-based powder coatings, chilled casting, stellite
- Required cutting speed of the machine: >900 m/min (Vc = cutting speed)
- Dry and wet cutting possible depending on the material being cut
- small workpiece dimensions

**Advantages**

- no chipping at the edge of the contours
- low reworking due to very good cutting surfaces

**Features**

- complete CBN-coating at the band edge
- backing material made of alloyed tempering steel

CUBOGRIT® K is also available with a backing material made of corrosion-resistant special steel as **CUBOGRIT® K VA**.

**This execution offers the following advantages:**

- cooling with pure water
- no corrosion of backing material during longer downtime

**Machine requirements:**

- cutting speed higher than 1200 m/min
- high machine stability
- high torque of the drive engine

# Technical Data (1/2)

| Dimensions | |
|---|---|
| Width x thickness | |
| mm | Inch |
| 10 x 0.50 | 3/8 x 0.020 |
| 13 x 0.50 | 1/2 x 0.020 |
| 13 x 0.65 | 1/2 x 0.025 |
| 16 x 0.50 | 5/8 x 0.020 |
| 20 x 0.50 | 3/4 x 0.020 |
| 20 x 0.80 | 3/4 x 0.032 |
| 27 x 0.50 | 1-1/16 x 0.020 |
| 27 x 0.70 | 1-1/16 x 0.028 |
| 27 x 0.90 | 1-1/16 x 0.035 |
| 34 x 1.10 | 1-3/8 x 0.042 |
| 41 x 0.50 | 1-5/8 x 0.020 |
| 41 x 0.80 | 1-5/8 x 0.032 |
| 41 x 1.30 | 1-5/8 x 0.050 |
| 50 x 0.90 | 2 x 0.035 |
| 54 x 1.10 | 2-1/8 x 0.042 |
| 67 x 0.70 | 2-5/8 x 0.028 |

Grain sizes: B91, B126, B252, B602

Alternative band grain sizes and dimensions upon request

# Technical Data (2/2)

| Dimensions | |
|---|---|
| **Width x thickness** | |
| **mm** | **Inch** |
| 80 x 0.90 | 3-1/8 x 0.035 |
| 80 x 1.10 | 3-1/8 x 0.042 |
| 100 x 0.90 | 4 x 0.035 |
| 100 x 1.10 | 4 x 0.042 |

Grain sizes: B91, B126, B252, B602

Alternative band grain sizes and dimensions upon request

# Materials Overview



- Hardened high speed steel (HSS), Case-hardening steels
- High-alloy tool steels > 55 HRC
- Iron-based powder coatings, chilled casting, stellite