
NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH VALUE LINE · BUILT IN CHINA TO NORTH AMERICAN STANDARDS · SOLD & SERVICED IN CANADA BY NOVOTECH

TUBE LASER CUTTING MACHINES

NOVOTECH VALUE LINE · ULT TWO- AND THREE-CHUCK TUBE AND PIPE LASERS · Ø0.4 TO 14.2" · 20 TO 40 FT BARS · 1.5 TO 40 KW

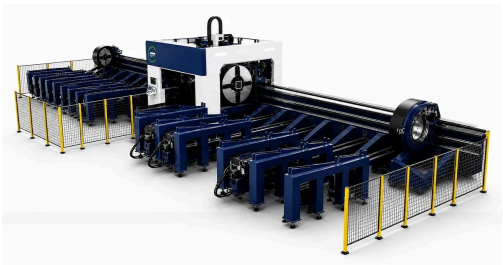







China
MADE IN CHINA

1
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

NOVOTECH TUBE LASERS

CONTENTS

TUBE LASERS

ULT tube and pipe lasers, two or three chucks, Ø0.4 – 14.2", 20 – 40 ft tubes, 1.5 – 40 kW — ULT-016A – 036A · two- and three-chuck · 10 versions — 04

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR NOVOTECH TUBE LASERS

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

NOVOTECH VALUE LINE

ROUND, SQUARE AND PROFILE TUBE CUT TO LENGTH WITH EVERY HOLE, COPE AND NOTCH IN ONE PASS

A tube laser cuts round, square, rectangular and open profiles to length and cuts the holes, copes, slots and notches in them in one pass, straight from the 3D model — no saw, no drill, no notcher, no layout. The ULT carries the bar in double-acting pneumatic chucks with servo-following supports and cuts it with a 1.5 to 40 kW source: four chuck sizes for round tube from Ø0.4 to 14.2″ and square to 13.8″, bars of 20, 30 or 40 ft and up to 2,205 lb. The three-chuck version cuts the last part without a remnant; pneumatic loaders, bundle feeding to 5 tonnes, a ±45° five-axis bevel head and TubesT nesting are options.

NovoTech Machine Tools sells, installs and supports sheet-metal and fabrication machinery across Canada from Mississauga, ON, Canada. The value line is our own brand: machines built in China to our specification with established components — Raycus, MAX or IPG sources, Raytools, BOCI or Precitec heads, Cypcut controls, Hiwin guides, YYC racks and Schneider electrics — inspected before they ship, with a CSA-approved panel, a 1-year warranty, operator training and parts and service from Mississauga, ON, Canada.

ULT-016A – 036A · TWO- AND THREE-CHUCK · 10 VERSIONS

ULT TUBE AND PIPE LASERS, TWO OR THREE CHUCKS, Ø0.4 – 14.2", 20 – 40 FT TUBES, 1.5 – 40 KW



MODEL ULT · NOVOTECH ULT TUBE LASER CUTTING MACHINE — THE CUTTING CELL, TWO PNEUMATIC CHUCKS AND THE TUBE SUPPORTS ALONG THE BED



ULT 12035 in the factory: the cutting cell with its viewing window, the console on its arm and the carts that collect the finished parts



ULT 12035: the 40 ft (12 m) bed with the following tube supports, the cutting cell at the far end

The tube laser for round, square, rectangular, oval and open profiles: pneumatic self-centring chucks at both ends of the bar, servo-following supports under it, and a 1.5 to 40 kW source that cuts holes, slots, copes and notches and parts the tube in one pass. Four chuck sizes — Ø6.3", 9.4", 11" and 14.2" — for bars of 20, 30 or 40 ft and up to 2,205 lb; 328 ft/min and 1.2 G on the small chucks. The three-chuck version takes over the bar as it shortens, so the last part is cut with no remnant. Pneumatic loaders, bundle feeding, a ±45° five-axis bevel head and TubesT nesting are options.

STANDARD FEATURES


- ✓ Ø0.4 – 14.2" round, square to 13.8"; bars 20 – 40 ft and to 2,205 lb; 1.5 – 40 kW; to 328 ft/min, 1.2 G
- ✓ Double-acting pneumatic self-centring chucks — the standard chuck clamps Ø0.6 to 8.7" (15 – 220 mm) without changing the jaws
- ✓ Fiber laser source 1.5 – 40 kW (Raycus, MAX or IPG) with an autofocus tube cutting head and anti-collision protection
- ✓ Cypcut tube control with the cutting database and power-based speed adjustment
- ✓ Patented welded bed with servo-following tube supports; stress-relieved crossbeam with cushion pads and limit switches
- ✓ Delta servos, YYC rack and Hiwin guides; Hanli water chiller; unloading table
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Pneumatic loader or automatic bundle loader (bundles to 11,000 lb / 5 t) and feeding system
- + Third chuck for zero-tail cutting; five-axis ±45° bevel head
- + Dual Y-axis cutting for small tube
- + TubesT nesting software
- + Custom voltage: 208, 240 or 480 V 3-phase

DETAILS, COMPONENTS AND OPTIONS · 1 / 3


ULT TUBE AND PIPE LASERS, TWO OR THREE CHUCKS, Ø0.4 – 14.2”, 20 – 40 FT TUBES, 1.5 – 40 KW

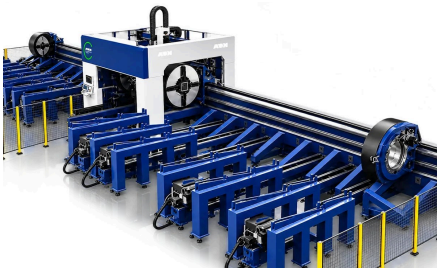


Three-chuck layout: the middle chuck takes over the tube as it shortens, so the last part is cut with no remnant (three-chuck versions)




Front and rear pneumatic chucks of the ULT — self-centring, they clamp round, square and rectangular tube

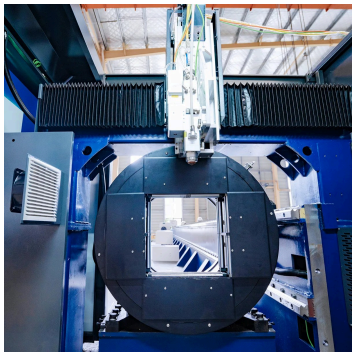

Front chuck of the ULT 12035 inside the cutting cell

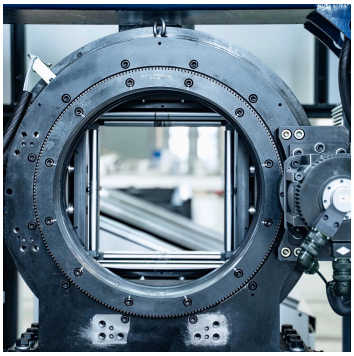

Looking through the chuck: the four jaws centre a square tube

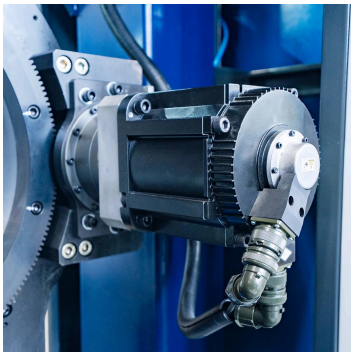

Servo motor driving the chuck's gear ring — it turns the tube under the head




Following tube supports on the ULT bed: they rise and fall with the tube so a long bar does not sag



Tube support and transfer modules under a long profile



Autofocus fiber laser cutting head of the ULT

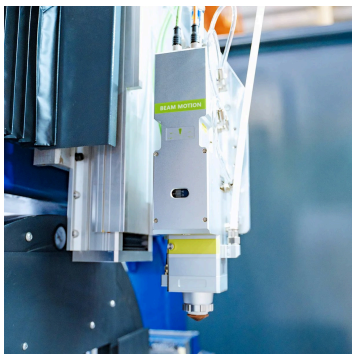

Cutting head on the Z axis, the bellows protecting the guides

DETAILS, COMPONENTS AND OPTIONS · 2 / 3


ULT TUBE AND PIPE LASERS, TWO OR THREE CHUCKS, Ø0.4 – 14.2", 20 – 40 FT TUBES, 1.5 – 40 KW




Rack and pinion with the linear guide that drive the chuck carriage along the bed



ULT control console with the cutting-program display

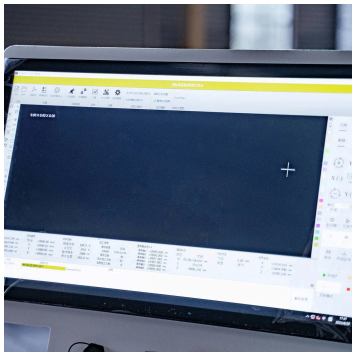

Tube cutting software on the ULT control screen

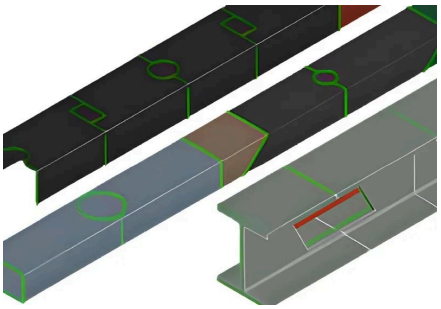

TubesT tube nesting — parts unfolded and nested along the bar (optional)




Automatic bundle loader (optional)




Automatic feeding system — up to 606 lb (275 kg) per tube, 19 s cycle (optional)



Roller tables that collect the cut tube and profile parts

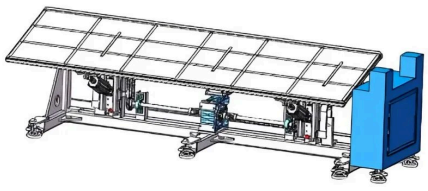

Zero-tail cutting and five-axis ±45° bevel head (optional)

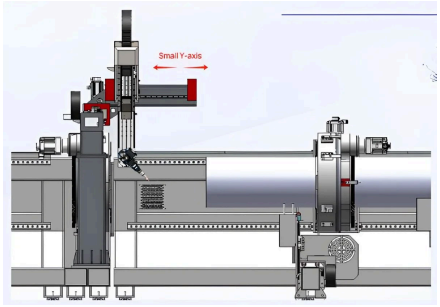

Dual Y-axis cutting — a short Y axis on the head for fast cutting of small tube (optional)

DETAILS, COMPONENTS AND OPTIONS · 3 / 3

ULT TUBE AND PIPE LASERS, TWO OR THREE CHUCKS, Ø0.4 – 14.2”, 20 – 40 FT TUBES, 1.5 – 40 KW



ULT bed with the cutting cabin, chuck carriage rails and following supports




Stress-relieved crossbeam carrying the chuck carriage



Cable carrier protecting the cables of the motion system



Cooling fan on the chuck's electrical housing

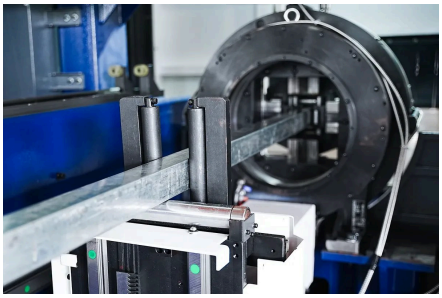

Rectangular tube held by the chuck above a profile support



A long profile held between the chucks during a trial cut



Round tube cut on the ULT: the holes along the side and the open end

TECHNICAL SPECIFICATIONS · 1 / 2

ULT TUBE AND PIPE LASERS, TWO OR THREE CHUCKS, Ø0.4 – 14.2", 20 – 40 FT TUBES, 1.5 – 40 KW

ULT TWO-CHUCK TUBE LASERS

6 chuck versions · Ø0.4 – 14.2" · 20 – 40 ft tubes · 1.5 – 40 kW

Model	ULT-016A	ULT-016B	ULT-024A	ULT-024B	ULT-028A	ULT-036A
Round tube	Ø0.4 – 6.3" (Ø10 – 160 mm)	Ø0.4 – 6.3" (Ø10 – 160 mm)	Ø0.4 – 9.4" (Ø10 – 240 mm)	Ø0.4 – 9.1" (Ø10 – 230 mm)	Ø0.4 – 11.0" (Ø10 – 280 mm)	Ø0.4 – 14.2" (Ø10 – 360 mm)
Square tube max. side	6.3" (160 mm)	6.3" (160 mm)	8.9" (227 mm)	9.1" (230 mm)	10.8" (275 mm)	13.8" (350 mm)
Laser power	1.5 – 40 kW	1.5 – 40 kW	1.5 – 40 kW	1.5 – 40 kW	1.5 – 40 kW	1.5 – 40 kW
Bar length	20, 30 or 40 ft (6, 9 or 12 m)	20, 30 or 40 ft (6, 9 or 12 m)	20, 30 or 40 ft (6, 9 or 12 m)	20, 30 or 40 ft (6, 9 or 12 m)	20, 30 or 40 ft (6, 9 or 12 m)	20, 30 or 40 ft (6, 9 or 12 m)
Max. tube weight on the chucks	331 lb (150 kg)	353 lb (160 kg)	882 lb (400 kg)	573 lb (260 kg)	1,323 lb (600 kg)	2,205 lb (1,000 kg)
Max. speed	328 ft/min (100 m/min)	328 ft/min (100 m/min)	328 ft/min (100 m/min)	328 ft/min (100 m/min)	246 ft/min (75 m/min)	197 ft/min (60 m/min)
Max. acceleration	1.2 G	1.2 G	1 G	1 G	0.8 G	0.6 G
Chuck speed	53.5 rpm	53.5 rpm	53.5 rpm	53.5 rpm	37.5 rpm	23 rpm
Head travel X / Z	11.8 / 9.8" (300 / 250 mm)	11.8 / 9.8" (300 / 250 mm)	15.7 / 11.8" (400 / 300 mm)	15.7 / 11.8" (400 / 300 mm)	17.7 / 11.8" (450 / 300 mm)	21.7 / 15.7" (550 / 400 mm)
Positioning accuracy	±0.04 mm/m (±0.0005"/ft)	±0.04 mm/m (±0.0005"/ft)	±0.04 mm/m (±0.0005"/ft)	±0.04 mm/m (±0.0005"/ft)	±0.04 mm/m (±0.0005"/ft)	±0.04 mm/m (±0.0005"/ft)
Repeat accuracy	±0.03 mm/m (±0.0004"/ft)	±0.03 mm/m (±0.0004"/ft)	±0.03 mm/m (±0.0004"/ft)	±0.03 mm/m (±0.0004"/ft)	±0.03 mm/m (±0.0004"/ft)	±0.03 mm/m (±0.0004"/ft)
Loading	pneumatic loader: round Ø0.4 – 6.3", square to 6.3" diagonal (160 mm)	pneumatic loader: round Ø0.4 – 6.3", square to 6.3" diagonal (160 mm)	pneumatic loader: round Ø0.4 – 8.7" (Ø10 – 220 mm), square to 8.7" diagonal · 573 lb (260 kg) bars	pneumatic loader: round Ø0.4 – 8.7" (Ø10 – 220 mm), square to 8.7" diagonal	bundle feeding system or crane	bundle feeding system or crane

TECHNICAL SPECIFICATIONS · 2 / 2

ULT TUBE AND PIPE LASERS, TWO OR THREE CHUCKS, Ø0.4 – 14.2", 20 – 40 FT TUBES, 1.5 – 40 KW

ULT THREE-CHUCK TUBE LASERS · ZERO-TAIL

4 chuck versions · Ø0.4 – 14.2" · the last part cut without a remnant

Model	ULT-024A · 3 chucks	ULT-024B · 3 chucks	ULT-028A · 3 chucks	ULT-036A · 3 chucks
Round tube	Ø0.4 – 9.4" (Ø10 – 240 mm)	Ø0.4 – 9.1" (Ø10 – 230 mm)	Ø0.4 – 11.0" (Ø10 – 280 mm)	Ø0.4 – 14.2" (Ø10 – 360 mm)
Square tube max. side	8.9" (227 mm)	9.1" (230 mm)	10.8" (275 mm)	13.8" (350 mm)
Laser power	1.5 – 40 kW	1.5 – 40 kW	1.5 – 40 kW	1.5 – 40 kW
Bar length	20, 30 or 40 ft (6, 9 or 12 m)	20, 30 or 40 ft (6, 9 or 12 m)	20, 30 or 40 ft (6, 9 or 12 m)	20, 30 or 40 ft (6, 9 or 12 m)
Max. tube weight on the chucks	882 lb (400 kg)	573 lb (260 kg)	1,323 lb (600 kg)	2,205 lb (1,000 kg)
Max. speed	328 ft/min (100 m/min)	328 ft/min (100 m/min)	246 ft/min (75 m/min)	197 ft/min (60 m/min)
Max. acceleration	1 G	1 G	0.8 G	0.6 G
Chuck speed	53.5 rpm	53.5 rpm	37.5 rpm	23 rpm
Head travel X / Z	27.6 / 13.8" (700 / 350 mm)	27.6 / 13.8" (700 / 350 mm)	31.5 / 13.8" (800 / 350 mm)	39.4 / 15.7" (1000 / 400 mm)
Positioning accuracy	±0.04 mm/m (±0.0005"/ft)	±0.04 mm/m (±0.0005"/ft)	±0.04 mm/m (±0.0005"/ft)	±0.04 mm/m (±0.0005"/ft)
Repeat accuracy	±0.03 mm/m (±0.0004"/ft)	±0.03 mm/m (±0.0004"/ft)	±0.03 mm/m (±0.0004"/ft)	±0.03 mm/m (±0.0004"/ft)
Loading	pneumatic loader: round Ø0.4 – 8.7" (Ø10 – 220 mm), square to 8.7" diagonal · 573 lb (260 kg) bars	pneumatic loader: round Ø0.4 – 8.7" (Ø10 – 220 mm), square to 8.7" diagonal	bundle feeding system or crane	bundle feeding system or crane

The model number gives the bar length and the chuck: ULT6024A = 6 m (20 ft) bars and the Ø240 mm chuck, version A; every chuck size is built for 6, 9 or 12 m bars (ULT6..., ULT9..., ULT12...). A and B are two chuck versions of the same size. Square and rectangular tube is limited by the chuck's square capacity; laser power is chosen at order.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.