
"THE FUTURE IS HERE" · SOLD & SERVICED IN CANADA BY NOVOTECH

TUBE FIBER LASER

FASTER CUTTING · HIGHER PRECISION · MAXIMUM EFFICIENCY





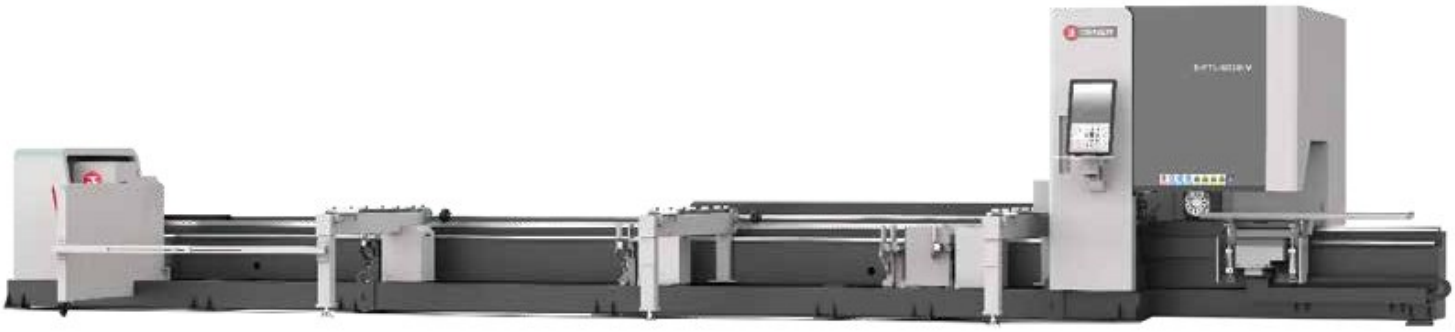

Since 1974
MANUFACTURING EXPERIENCE

Ø0.3 – 25.2"
ROUND TUBE AND PROFILE

20 – 40 ft
TUBE LENGTH

Canada
PARTS & TECHNICAL SUPPORT

NovoTech Machine Tools Inc.
1365 Mid-Way Blvd, 26, Mississauga, ON L5T 2J5, Canada
NovoTechMachineTools.com | info@NovoTechMachineTools.com | +1 647 526 5510

MANUFACTURER · ESTABLISHED 1974

ABOUT DENER

Dener Makina was established in 1974 in the Kayseri Old Industrial Zone. Since 2000, the company has focused on the production of CNC Sheet Metal Processing Machines, manufacturing a wide range of products including Guillotine Shears, Hydraulic Press Brakes, Ball Screw Press Brakes, Servo-Electric Press Brakes, Plasma Cutting Machines, and Fiber Laser Cutting Machines.

In 2016, the company made a major investment by expanding its facilities to include 1,670,000 sq ft (155,000 m^2) of factory buildings and 290,000 sq ft (27,000 m^2) of social facilities on a 14,000,000 sq ft (1,300,000 m^2) site within the İncesu Organized Industrial Zone (O.S.B). In this new phase, Dener Makina began the production of CNC Metal Processing Machines such as Taksan Integrated Systems, Double Column Machining Centers, 5-Axis Simultaneous Machining Centers, Vertical Machining Centers, Lathes, and Grinding Machines.

With its extensive production range, over half a century of experience, skilled workforce, and multinational R&D center, Dener Makina holds a leading position globally by providing high-value industrial investment products in the fields of CNC Sheet Metal Processing and CNC Metal Processing Machines.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ **7-day money-back guarantee** (in-stock machines only)
- ✓ Spare parts & technical support readily available in Canada
- ✓ **Order Today with Just 10% Down — 0% Down Financing Available**
- ✓ **Installation and training available**

SOLD & SERVICED IN CANADA

by NovoTech Machine Tools — Mississauga, ON

CONTENTS THIS BROCHURE

Production Campus 03
Design Advantages 04
Tube Fiber Laser Cutting Machine 05
Engineered for Every Profile 06
Software — TubeST 07
Laser Cutting Head 08
Equipment 09
Ease of Use & Security 11
FTL Series 12
E-FTL Series 16
Cutting Capacity by Chuck 18
E-FTL Models 19
FTL Models 20
In Production 21
Service & Support 22
Dener Worldwide 23
Dener Product Range 24

DENER MAKINA · İNCESU ORGANIZED INDUSTRIAL ZONE, KAYSERI

DENER PRODUCTION CAMPUS



Dener production campus, Kayseri — 1,670,000 sq ft (155,000 m^2) of factory buildings on a 14,000,000 sq ft (1,300,000 m^2) site

- SHEET PROCESSING MACHINES PRODUCTION PLANT
- MACHINE TOOLS PRODUCTION PLANT
- PRODUCTION PLANT
- SHEET WELDING FACTORY
- SHEET CLADDING FACTORY
- TECHNOLOGY CENTER
- ADMINISTRATIVE BUILDING
- SOCIAL FACILITIES
- MAIN ENTRANCE
- VISITOR PARKING AREA
- HELICOPTER PAD

52+
YEARS OF EXPERIENCE

100+
EXPORT COUNTRIES

14,000,000 sq ft
PRODUCTION CAMPUS (1,300,000 M^2)

TUBE SERIES

TUBE SERIES — DESIGN ADVANTAGES



The cutting cabin: control unit on its arm, laser-safe viewing window and unloading chute

DENER FTL and E-FTL are specially designed for metal tube processing applications. With the semi-automatic loading system, it reduces the operator's workload and increases production efficiency. Thanks to the optional angled cutting feature, precise cuts can be performed at various angles. The machine is capable of fast and precise cutting on metal tubes of different diameters, shapes, and lengths. Its user-friendly interface and safe operating system streamline workflows and optimize production processes.


Equipped with advanced fiber laser technology, DENER FTL and E-FTL deliver high-quality cutting results with smooth edges and minimal material deformation. Their robust construction ensures reliable performance even under demanding production conditions, while optimized cutting parameters help reduce material waste and operating costs. Offering flexibility, precision, and productivity in a single solution, these machines are ideal for a wide range of industries, including automotive, construction, furniture, and general metal fabrication.


TUBE FIBER LASER CUTTING MACHINE

TUBE FIBER LASER CUTTING MACHINE

DESIGN ADVANTAGES

- Precise cutting and clamping
- Energy saving
- User-friendly operation
- Cost-effective
- Flawless performance

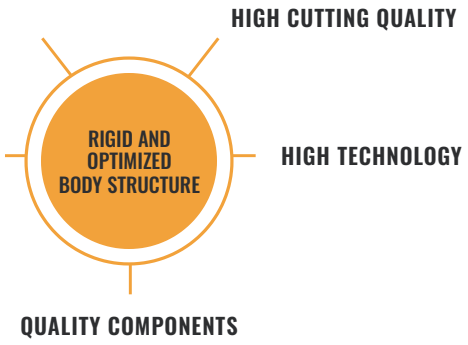

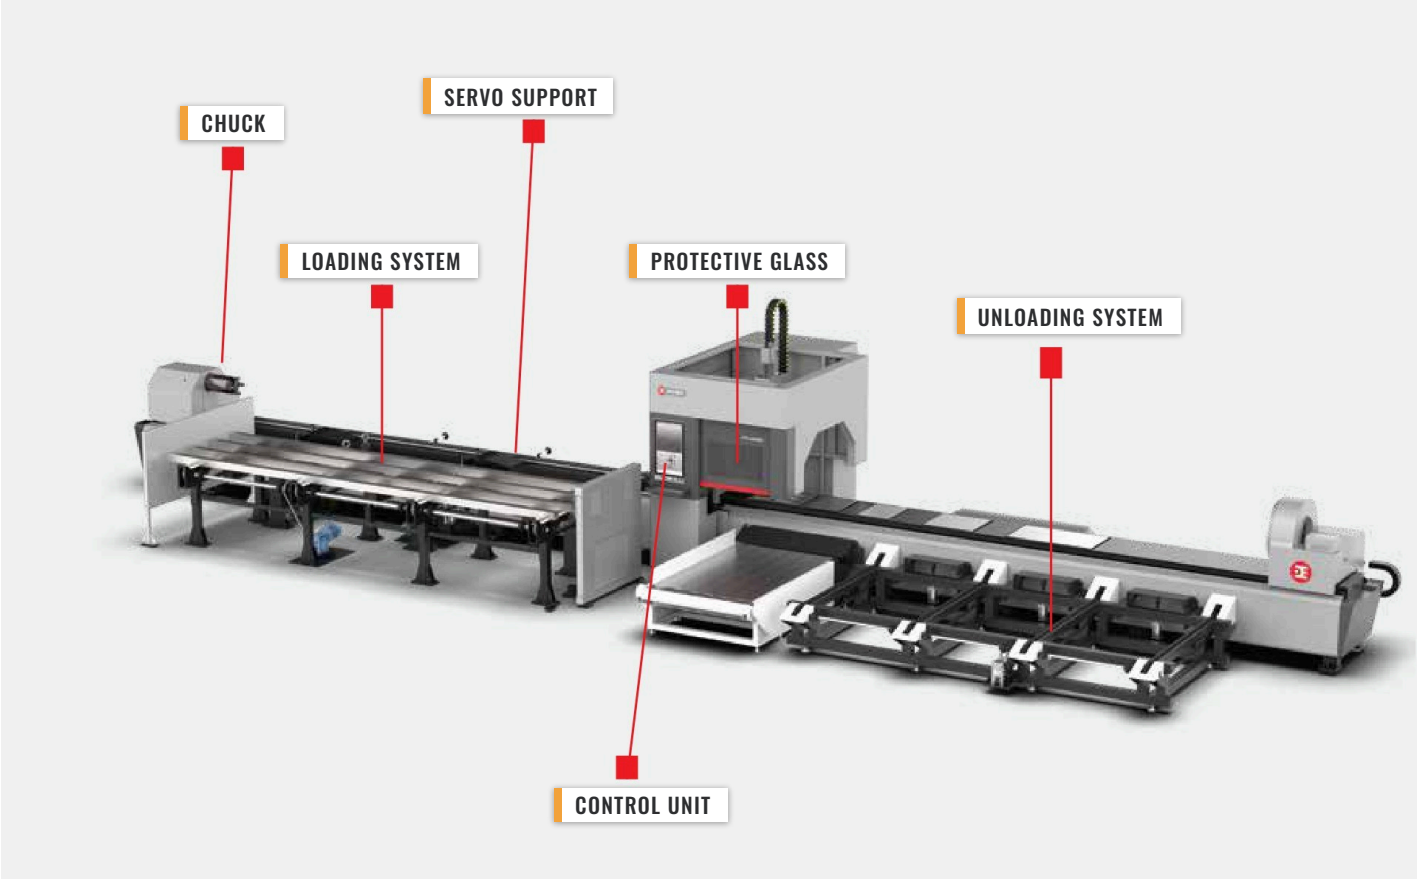

ENGINEERED FOR EVERY PROFILE

Tube & profile laser cutting

The Tube Laser Series delivers fast, precise, and flexible cutting for tubes and profiles. Designed for modern production, it simplifies complex operations, improves material efficiency, and ensures consistent results across every part.



COMPLEX
Profile cutting

HIGH-SPEED
Production

PRECISE & CLEAN
Results


REDUCED
Material waste

Tube Series delivers speed, precision and efficiency for modern production.

SOFTWARE

TUBEST NESTING SOLUTION

TubeST is a professional 3D nesting solution for tube and profile laser cutting. Its intelligent automation simplifies drawing, nesting and toolpath creation, helping manufacturers reduce material waste, shorten programming time and achieve reliable results across complex parts.

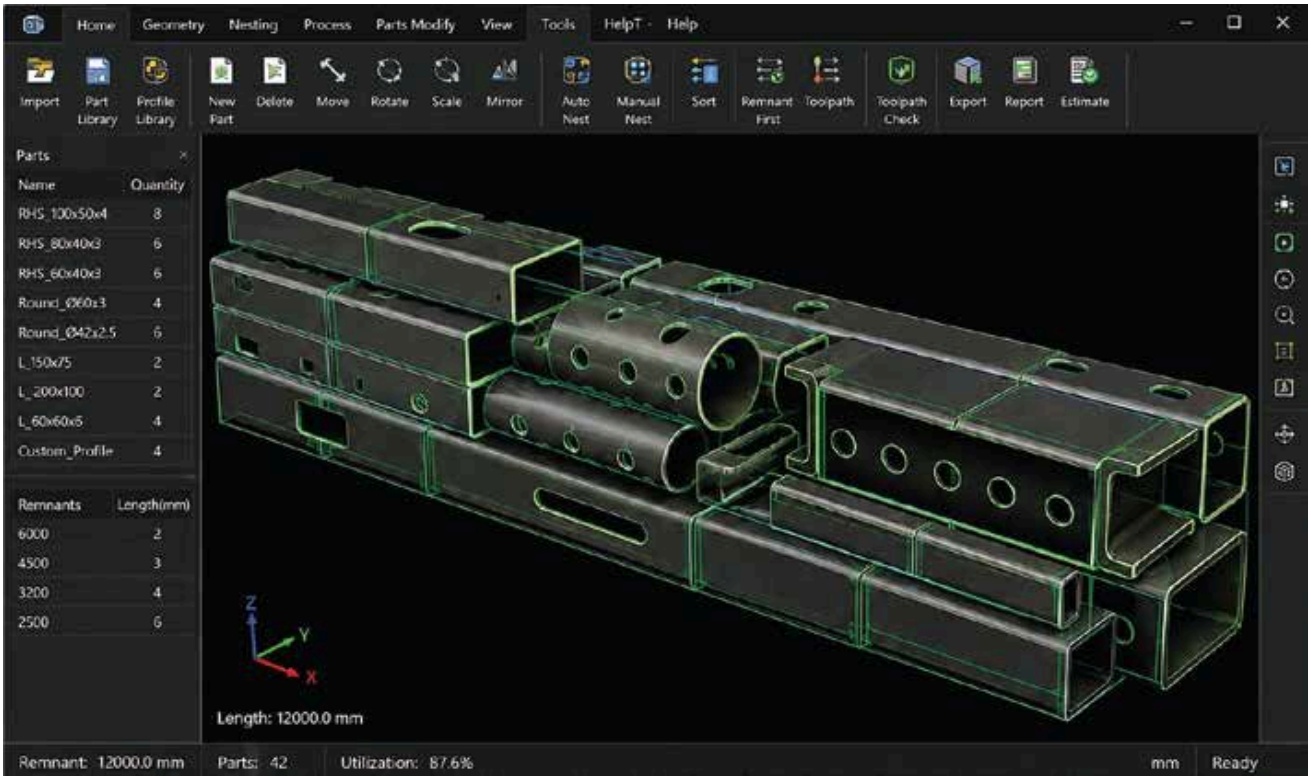

TubeST — tube and profile parts nested along a 39.4 ft (12,000 mm) bar

OPTIMIZE TUBE & PROFILE CUTTING

- Imports IGS and SAT files and exports compatible files for TubeST, CypTube and TubePro.
- Detects tiny or redundant geometry and processes it automatically.
- Creates rectangular, L-shaped, H-shaped, I-shaped and custom profiles.
- Optimized auto nesting uses remnants first and minimizes tube-tail waste.
- Advanced toolpaths include lead-ins, compensation, cooling points, micro joints and weld kerf.
- Automatic toolpath checks help prevent cutting-head interference and support safer production.

BLT SERIES SMART CUTTER · CLOSED-LOOP AUTOFOCUS

LASER CUTTING HEAD

Focusing on 2D, 3D and angle cutting, the cost-effective BLT Series Smart Cutter is available for power levels below 30 kW and offers excellent performance with stable cutting, easy installation and setup. Brand new optical solutions are available with closed-loop autofocus.

Slag-free cutting, nozzle cooling and water cooling sensor can be supported. Makes cutting more stable and efficient. Smart Drilling and Auto Re-cutting functions meet the most demanding air standard and N2 high-performance cutting, significantly increasing efficiency and productivity.

STABLE AND EFFICIENT CUTTING PROCESS

LED INDICATORS

LEDs on the laser head; communication. The sensors provide information that the power is working correctly.

> Equipped with advanced technology, it offers a cutting solution that combines high performance with affordable costs.



BLT cutting head — LED indicators: power, run, link and sensor



Ready-to-use optical drawers

EASY INSTALLATION AND LOW REPAIR COSTS

Lens change in 2 minutes with ready-to-use optical drawers.

RESONATOR · CHILLER · FSCUT CONTROL · SERVO DRIVES

EQUIPMENT



Resonator

MAX series

The MAX fiber laser resonator delivers fast, precise and reliable cutting performance with its high beam quality, energy-efficient operation, and stable power output. Its compact design and low maintenance requirements help support production continuity.



Chiller

S&A CWFL series

Specially developed for fiber laser cutting machines, S&A chillers provide stable temperature control for resonators and optical systems, enhancing cutting quality and machine lifespan. Thanks to its dual-circuit cooling design, it independently balances the resonator and optical path. Its compact design allows for easy integration, while quiet operation and energy-efficient performance help lower operating costs. With low maintenance requirements, it is an ideal solution for long-term, uninterrupted operation.



FSCUT control unit

The FSCUT system is a control unit designed for tube and profile cutting operations. Based on EtherCAT technology, it features a visual control interface, laser control functions, and gas management capabilities. Widely used in the industry, it includes a specially developed interface optimized for tube and profile cutting applications, providing reliable and efficient operation.



Servo motor and motor driver

Inovance

For high-precision motion control in fiber laser cutting machines, Inovance motor and drive systems deliver superior performance and reliability. With high response speeds and stable torque output, they ensure maximum accuracy in axis movements. Advanced control algorithms minimize vibration, improving cutting quality and extending machine lifespan. Their compact design allows for easy installation and wiring. With energy-efficient operation and high dynamic performance, Inovance systems bring power.

REDUCER · RACK AND PINION · GAS REGULATOR · CUTTING HEAD

EQUIPMENT



Reducer

Techmech

Techmech gearboxes are specially preferred in fiber laser cutting machines for high-precision motion transmission. With their high torque capacity and low backlash design, they ensure maximum accuracy in axis movements. Their compact structure provides space efficiency in machine design, while the durable materials and high efficiency rate offer long-lasting and trouble-free operation.



Rack and pinion

TWEBOLUN

TWEBOLUN pinion and rack systems are specially designed for high-precision axis movements in fiber laser cutting machines. With low backlash and stable power transmission, they accurately follow cutting paths, ensuring high precision even in complex geometries. Durable materials and long-lasting design provide uninterrupted performance in production. Easy installation and low maintenance requirements enhance operational efficiency.



Gas regulator

SMC

SMC regulators provide high precision and stability in pressure control for fiber laser cutting machines. They contribute to the safe, efficient, and long-lasting operation of air systems, optimizing the overall performance of the machine. Produced by Japan-based SMC Corporation, these regulators offer a reliable solution worldwide for industrial automation and pneumatic control systems.



Tube laser cutting head

BOCI

The BOCI tube laser cutting head is designed to deliver high performance and reliability in tube and profile cutting. It cuts round, square, rectangular and special-shaped profiles precisely and fast, and its compact, rigid structure guarantees stability even at high speeds. The autofocus system adapts quickly to different material thicknesses and cutting requirements. An advanced dust-protection design, optimized gas channels and highly durable optical components give a long service life and continuous performance — high precision, superior cut quality and higher production efficiency.

OPERATOR COMFORT AND SAFETY

EASE OF USE & SECURITY

EASE OF USE



HANDWHEEL

The machine has a handwheel for precise axis movement adjustments. It is especially useful when precise positioning is required to make small cuts from the remaining parts of metal sheets that have been previously used for cutting.



RESUME CUTTING AFTER AN ALARM

When the machine is stopped or paused for any reason, cutting can be started again from the desired point.

SECURITY



PROTECTING THE CUTTING HEAD

If the cutting head is very close to hitting a piece or pallet, the machine stops immediately to prevent damage. After the machine stops, the operator can check and resolve the issue, then press the start button to resume cutting from where it left off.



PROTECTIVE GLASSES

In order to prevent damage to the eyes caused by the fiber laser light, there are viewing glasses on the front doors of the machine suitable for the fiber laser wavelength.



EMERGENCY STOPS

An easy access to emergency stop button provides a safe working environment to the operator. A buzzer found on top of the machine shows in real time the working state of the machine.



SAFETY BARRIERS

Light safety barriers stop the pallet change process if breached, preventing injury. After a reset, the pallet change can be resumed in the desired direction.

TUBE PROFILE FIBER LASER · FTL SERIES

FTL SERIES



FTL with the loading system



FTL — loading, cutting cabin and unloading





TECHNICAL SPECIFICATIONS · FTL SERIES

TUBE PROFILE FIBER LASER

TECHNICAL SPECIFICATIONS	FTL SERIES
Machine model	FTL
Resonator power options	3,000 W · 6,000 W · 12,000 W · 20,000 W
Tube diameters	Ø0.6 – 9.8″ (Ø15 – Ø250 mm) 0.6 × 0.6 – 9.8 × 9.8″ profile (15×15 – 250×250 mm) Ø1.2 – 13.8″ (Ø30 – Ø350 mm) 1.2 × 1.2 – 13.8 × 13.8″ profile (30×30 – 350×350 mm)
Repeatability	±0.002″ (±0.05 mm)
Max. speed	262 ft/min (80 m/min) · 250 chuck 177 ft/min (54 m/min) · 350 chuck
Max. acceleration	0.6 G
Voltage and frequency	380 V 50 Hz / 60 Hz
Max. profile length and weight capacity	20 ft, 1,323 lb (6,000 mm, 600 kg) · 250 chuck 30 ft, 2,205 lb (9,000 mm, 1,000 kg) · 350 chuck 40 ft, 2,646 lb (12,000 mm, 1,200 kg) · 250 chuck

**Cutting thicknesses may vary due to factors such as material quality, operator settings, and cutting speed.*

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase. CSA-approved electrical panel.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**


TUBE PROFILE FIBER LASER · FTL SERIES

FTL SERIES





FTL — the cutting cabin between the loading and unloading beds

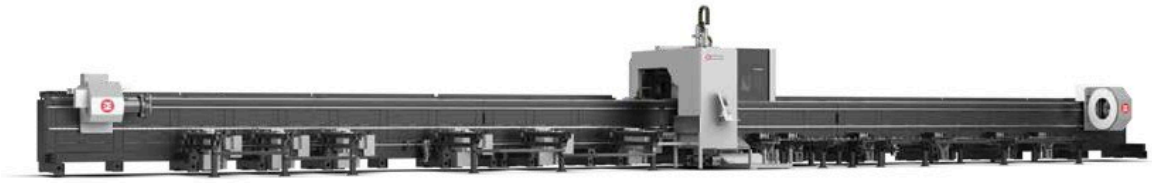

FTL for long, heavy tube — bars to 40 ft (12 m)





TECHNICAL SPECIFICATIONS · FTL SERIES

TUBE PROFILE FIBER LASER

TECHNICAL SPECIFICATIONS	FTL SERIES
Machine model	FTL
Resonator power options	3,000 W · 6,000 W · 12,000 W · 20,000 W
Tube diameters	Ø1.2 – 13.8″ (Ø30 – Ø350 mm) 1.2 × 1.2 – 13.8 × 13.8″ profile (30×30 – 350×350 mm) Ø1.2 – 19.7″ (Ø30 – Ø500 mm) 1.2 × 1.2 – 19.7 × 19.7″ profile (30×30 – 500×500 mm) Ø4.7 – 25.2″ (Ø120 – Ø640 mm) 4.7 × 4.7 – 25.2 × 25.2″ profile (120×120 – 640×640 mm)
Repeatability	±0.004″ (±0.1 mm)
Max. speed	177 ft/min (54 m/min) · 350 chuck 82 ft/min (25 m/min) · 500 chuck 82 ft/min (25 m/min) · 640 chuck
Max. acceleration	0.6 G
Voltage and frequency	380 V 50 Hz / 60 Hz
Max. profile length and weight capacity	40 ft, 3,086 lb (12,000 mm, 1,400 kg) · 350 chuck 40 ft, 4,630 lb (12,000 mm, 2,100 kg) · 500 chuck 40 ft, 5,732 lb (12,000 mm, 2,600 kg) · 640 chuck

**Cutting thicknesses may vary due to factors such as material quality, operator settings, and cutting speed.*


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase. CSA-approved electrical panel.

INCLUDED WITH EVERY NOVOTECH MACHINE


- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

TUBE PROFILE FIBER LASER · E-FTL SERIES

E-FTL SERIES

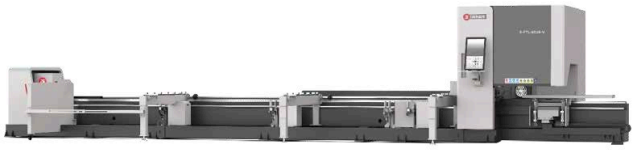

E-FTL — the cutting cabin and the bed

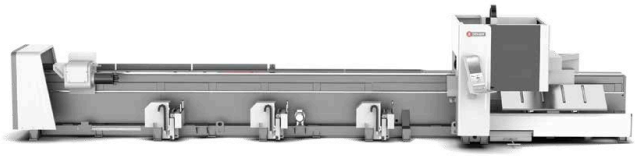

E-FTL — the loading side with the tube supports



TECHNICAL SPECIFICATIONS · E-FTL SERIES

TUBE PROFILE FIBER LASER

TECHNICAL SPECIFICATIONS	E-FTL SERIES
Machine model	E-FTL
Resonator power options	3,000 W · 6,000 W · 12,000 W · 20,000 W
Tube diameters	Ø0.3 – 4.7″ (Ø8 – Ø120 mm) · 0.3 × 0.3 – 4.7 × 4.7″ profile (8×8 – 120×120 mm) Ø0.4 – 7.1″ (Ø10 – Ø180 mm) · 0.4 × 0.4 – 7.1 × 7.1″ profile (10×10 – 180×180 mm) Ø0.6 – 9.8″ (Ø15 – Ø250 mm) · 0.6 × 0.6 – 9.8 × 9.8″ profile (15×15 – 250×250 mm) Ø1.2 – 13.8″ (Ø30 – Ø350 mm) · 1.2 × 1.2 – 13.8 × 13.8″ profile (30×30 – 350×350 mm)
Repeatability	±0.002″ (±0.05 mm)
Max. speed	394 ft/min (120 m/min) · 120 / 180 chuck 262 ft/min (80 m/min) · 250 chuck 177 ft/min (54 m/min) · 350 chuck
Max. acceleration	1 G
Voltage and frequency	380 V 50 Hz / 60 Hz
Max. profile length and weight capacity	23 ft, 265 lb (7,000 mm, 120 kg) · 120 chuck 23 ft, 529 lb (7,000 mm, 240 kg) · 180 chuck 23 ft, 661 lb (7,000 mm, 300 kg) · 250 chuck 23 ft, 1,323 lb (7,000 mm, 600 kg) · 350 chuck 30 ft, 970 lb (9,000 mm, 440 kg) · 250 chuck 30 ft, 2,646 lb (9,000 mm, 1,200 kg) · 350 chuck 40 ft, 2,646 lb (12,000 mm, 1,200 kg) · 250 chuck 40 ft, 3,968 lb (12,000 mm, 1,800 kg) · 350 chuck

**Cutting thicknesses may vary due to factors such as material quality, operator settings, and cutting speed.*

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase. CSA-approved electrical panel.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

TUBE PROFILE LASER CUTTING MACHINE


CUTTING CAPACITY BY CHUCK

The sections each chuck clamps — round, square and rectangular tube and the open U, H and L profiles. The model number gives the chuck: 6025 = Ø250 mm chuck.




Ø4.7″ chuck (120 mm)

Round	Ø0.3 – 4.7″ Ø8 – 120 mm
Square	0.3 – 4.7″ 8 – 120 mm
Rectangular	0.3 – 4.7 × 0.3 – 4.7″ 8 – 120 × 8 – 120 mm
U profile	0.3 – 4.7 × 0.3 – 4.7″ 8 – 120 × 8 – 120 mm
H profile	0.3 – 4.7 × 0.3 – 4.7″ 8 – 120 × 8 – 120 mm
L profile	0.3 – 4.7 × 0.3 – 4.7″ 8 – 120 × 8 – 120 mm



Ø7.1″ chuck (180 mm)

Round	Ø0.4 – 7.1″ Ø10 – 180 mm
Square	0.4 – 7.1″ 10 – 180 mm
Rectangular	0.4 – 7.1 × 0.4 – 7.1″ 10 – 180 × 10 – 180 mm
U profile	0.4 – 7.1 × 0.4 – 7.1″ 10 – 180 × 10 – 180 mm
H profile	0.4 – 7.1 × 0.4 – 7.1″ 10 – 180 × 10 – 180 mm
L profile	0.4 – 7.1 × 0.4 – 7.1″ 10 – 180 × 10 – 180 mm



Ø9.8″ chuck (250 mm)

Round	Ø0.6 – 9.8″ Ø15 – 250 mm
Square	0.6 – 9.8″ 15 – 250 mm
Rectangular	0.6 – 9.8 × 0.6 – 9.8″ 15 – 250 × 15 – 250 mm
U profile	0.6 – 9.8 × 0.6 – 9.8″ 15 – 250 × 15 – 250 mm
H profile	0.6 – 9.8 × 0.6 – 9.8″ 15 – 250 × 15 – 250 mm
L profile	0.6 – 9.8 × 0.6 – 9.8″ 15 – 250 × 15 – 250 mm



Ø13.8″ chuck (350 mm)

Round	Ø1.2 – 13.8″ Ø30 – 350 mm
Square	1.2 – 13.8″ 30 – 350 mm
Rectangular	1.2 – 13.8 × 1.2 – 13.8″ 30 – 350 × 30 – 350 mm
U profile	1.2 – 13.8 × 1.2 – 13.8″ 30 – 350 × 30 – 350 mm
H profile	1.2 – 13.8 × 1.2 – 13.8″ 30 – 350 × 30 – 350 mm
L profile	1.2 – 13.8 × 1.2 – 13.8″ 30 – 350 × 30 – 350 mm



Ø21.3″ chuck (540 mm)

Round	Ø1.2 – 21.3″ Ø30 – 540 mm
Square	1.2 – 19.7″ · diagonal ≤28.0″ 30 – 500 mm · ≤710 mm
Rectangular	1.2 – 19.7 × 1.2 – 19.7″ · diagonal ≤28.0″ 30 – 500 × 30 – 500 mm · ≤710 mm
U profile	1.2 – 19.7 × 1.2 – 21.3″ · diagonal ≤28.0″ 30 – 500 × 30 – 540 mm · ≤710 mm
H profile	1.2 – 19.7 × 1.2 – 21.3″ · diagonal ≤28.0″ 30 – 500 × 30 – 540 mm · ≤710 mm
L profile	1.2 – 19.7 × 1.2 – 21.3″ 30 – 500 × 30 – 540 mm



Ø25.2″ chuck (640 mm)

Round	Ø4.7 – 25.2″ Ø120 – 640 mm
Square	4.7 – 25.2″ · diagonal ≤25.2″ 120 – 640 mm · ≤640 mm
Rectangular	4.7 – 25.2 × 4.7 – 25.2″ · diagonal ≤25.2″ 120 – 640 × 120 – 640 mm · ≤640 mm
U profile	4.7 – 22.4 × 4.7 – 25.2″ · diagonal ≤25.2″ 120 – 570 × 120 – 640 mm · ≤640 mm
H profile	4.7 – 22.4 × 4.7 – 25.2″ · diagonal ≤25.2″ 120 – 570 × 120 – 640 mm · ≤640 mm
L profile	4.7 – 22.4 × 4.7 – 22.4″ · diagonal ≤25.2″ 120 – 570 × 120 – 570 mm · ≤640 mm

Sizes as charted by Dener, in inches with the millimetres below. Ask NovoTech to check a large or unusual section against the chuck before ordering.

TUBE PROFILE LASER CUTTING MACHINE · E-FTL

E-FTL MODELS

E-FTL SERIES	EVERY MODEL
Chucks	2 moving chucks · minimum remnant 1.4″ (35 mm)
Tube support	Servo-following support system
Automatic lubrication	Standard
Resonator	Maxphotonics
Control	FSCUT3000 · TubePro interface
Nesting software	TubeST, small-tube version
Motor and drive	Inovance
Unloading length	6.6 ft (2 m)

E-FTL		6012	6018	6025	6035	9025	9035
Chuck		Ø4.7″ Ø120 mm	Ø7.1″ Ø180 mm	Ø9.8″ Ø250 mm	Ø13.8″ Ø350 mm	Ø9.8″ Ø250 mm	Ø13.8″ Ø350 mm
Max. tube length		23 ft (7 m)	23 ft (7 m)	23 ft (7 m)	23 ft (7 m)	30.5 ft (9.3 m)	30.5 ft (9.3 m)
Bevel cutting		Option	Option	Option	Option	Option	Option
Loading system		Semi-automatic or fully automatic · option	Semi-automatic or fully automatic · option	Fully automatic · option	Fully automatic · option	Fully automatic · option	Fully automatic · option
Cutting head	BOCI	≤3 kW BLT310T 6 kW BLT421TS	≤3 kW BLT310T 6 kW BLT421TS	≤3 kW BLT310T 6 kW BLT421TS 12 kW BLT442T	≤3 kW BLT310T 6 kW BLT421TS 12 kW BLT442T	≤3 kW BLT310T 6 kW BLT421TS 12 kW BLT442T	≤3 kW BLT310T 6 kW BLT421TS 12 kW BLT442T
Axis travel X · Y · Z		11.4 · 309 · 17.7″ 290 · 7,850 · 450 mm	11.4 · 309 · 17.7″ 290 · 7,850 · 450 mm	33.9 · 307 · 15.0″ 860 · 7,800 · 380 mm	29.5 · 307 · 18.1″ 750 · 7,800 · 460 mm	33.9 · 406 · 15.0″ 860 · 10,300 · 380 mm	29.5 · 406 · 18.1″ 750 · 10,300 · 460 mm
Tube feed speed		430 ft/min (131 m/min)	308 ft/min (94 m/min)	377 ft/min (115 m/min)	266 ft/min (81 m/min)	377 ft/min (115 m/min)	266 ft/min (81 m/min)
Chuck rotation		200 rpm	180 rpm	85 rpm	54 rpm	85 rpm	54 rpm
Loading + unloading length		23 + 6.6 ft 7 + 2 m	23 + 6.6 ft 7 + 2 m	23 + 6.6 ft 7 + 2 m	23 + 6.6 ft 7 + 2 m	30 + 6.6 ft 9 + 2 m	30 + 6.6 ft 9 + 2 m
Machine size L × W × H		467 × 107 × 87″ (11,850 × 2,720 × 2,200 mm)	478 × 107 × 87″ (12,150 × 2,720 × 2,200 mm)	480 × 110 × 122″ (12,200 × 2,800 × 3,100 mm)	520 × 136 × 142″ (13,200 × 3,450 × 3,600 mm)	579 × 110 × 122″ (14,700 × 2,800 × 3,100 mm)	622 × 136 × 142″ (15,800 × 3,450 × 3,600 mm)

The model number is the bed length and the chuck: 6025 = 6 m (20 ft) bed, Ø250 mm chuck. Laser source power, acceleration, repeatability and tube weight: see the technical specifications of the series.

TUBE PROFILE LASER CUTTING MACHINE · FTL

FTL MODELS

FTL SERIES	EVERY MODEL
Chucks	3 moving chucks · minimum remnant 0" — the last part is cut with no tail
Tube support	Servo-following support system
Automatic lubrication	Standard
Resonator	Maxphotonics
Cutting head	BOCI: ≤3 kW BLT310T · 6 kW BLT421TS · 12 kW BLT442T · 20 kW BLT560H
Control	FSCUT5000A · TubePro interface
Nesting software	TubeST, professional version
Motor and drive	Inovance
Loading system	Semi-automatic loading system · option

FTL	6018	6025	6035	9025	9035	12025	12035	12050	12064
Chuck	Ø7.1" Ø180 mm	Ø9.8" Ø250 mm	Ø13.8" Ø350 mm	Ø9.8" Ø250 mm	Ø13.8" Ø350 mm	Ø9.8" Ø250 mm	Ø13.8" Ø350 mm	Ø19.7" Ø500 mm	Ø25.2" Ø640 mm
Max. tube length	20.3 ft (6.2 m)	20.3 ft (6.2 m)	20.3 ft (6.2 m)	30.5 ft (9.3 m)	30.5 ft (9.3 m)	40.4 ft (12.3 m)	40.4 ft (12.3 m)	40.4 ft (12.3 m)	40.4 ft (12.3 m)
Bevel cutting	Option	Option	Option	Option	Option	Option	Standard	Standard	Standard
Unloading length	20 ft 6 m	20 ft 6 m	20 ft 6 m	30 ft 9 m	30 ft 9 m	40 ft 12 m	40 ft 12 m	40 ft 12 m	40 ft 12 m
Axis travel X · Y · Z	35.4 · 276 · 9.8" 900 · 7,000 · 250 mm	33.5 · 283 · 11.8" 850 · 7,200 · 300 mm	35.4 · 295 · 11.8" 900 · 7,500 · 300 mm	33.5 · 394 · 11.8" 850 · 10,000 · 300 mm	33.5 · 398 · 11.8" 850 · 10,100 · 300 mm	33.5 · 516 · 11.8" 850 · 13,100 · 300 mm	29.9 · 512 · 18.1" 760 · 13,000 · 460 mm	47.2 · 531 · 21.3" 1,200 · 13,500 · 540 mm	51.2 · 528 · 21.3" 1,300 · 13,400 · 540 mm
Tube feed speed	341 ft/min (104 m/min)	302 ft/min (92 m/min)	266 ft/min (81 m/min)	302 ft/min (92 m/min)	266 ft/min (81 m/min)	302 ft/min (92 m/min)	266 ft/min (81 m/min)	164 ft/min (50 m/min)	164 ft/min (50 m/min)
Chuck rotation	180 rpm	85 rpm	54 rpm	85 rpm	54 rpm	85 rpm	54 rpm	25 rpm	25 rpm
Loading + unloading length	20 + 20 ft 6 + 6 m	20 + 20 ft 6 + 6 m	20 + 20 ft 6 + 6 m	30 + 30 ft 9 + 9 m	30 + 30 ft 9 + 9 m	40 + 40 ft 12 + 12 m	40 + 40 ft 12 + 12 m	40 + 40 ft 12 + 12 m	40 + 40 ft 12 + 12 m
Machine size L × W × H	634 × 110 × 118" (16,100 × 2,800 × 3,000 mm)	634 × 110 × 118" (16,100 × 2,800 × 3,000 mm)	634 × 110 × 118" (16,100 × 2,800 × 3,000 mm)	748 × 110 × 118" (19,000 × 2,800 × 3,000 mm)	748 × 110 × 118" (19,000 × 2,800 × 3,000 mm)	1110 × 110 × 110" (28,200 × 2,800 × 2,800 mm)	1146 × 134 × 134" (29,100 × 3,400 × 3,400 mm)	1201 × 156 × 148" (30,500 × 3,950 × 3,750 mm)	1201 × 154 × 134" (30,500 × 3,900 × 3,400 mm)


The model number is the bed length and the chuck: 6025 = 6 m (20 ft) bed, Ø250 mm chuck. Laser source power, acceleration, repeatability and tube weight: see the technical specifications of the series.

DENER TUBE PROFILE LASER CUTTING MACHINE


PERFECT CUT



A Dener FTL tube laser in a production hall

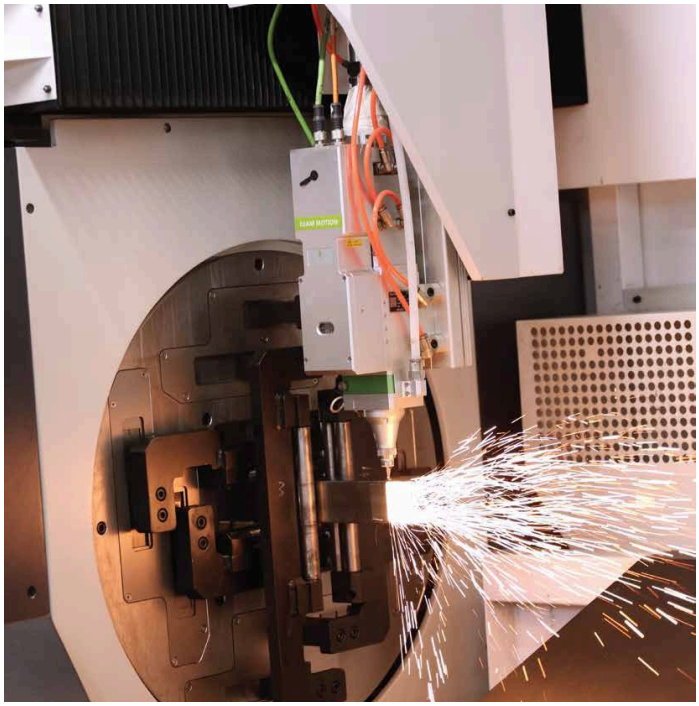

The BOCI head cutting a tube held in the chuck

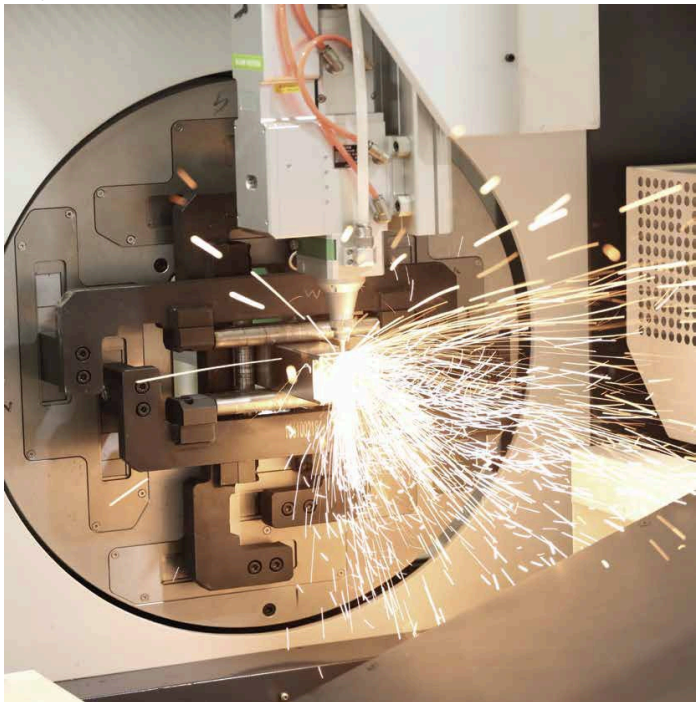

Sparks fly clear of the chuck jaws

DENER MAKINA · SERVICE, PARTS AND R&D

SERVICE & SUPPORT

FAST SERVICE AND SPARE PART DELIVERY



Dener Makina responds to service requests as quickly as possible to ensure production continuity. All service and parts needs received from our customers are systematically evaluated and processed by our experienced customer representatives. From the moment a malfunction is reported, the response process is meticulously managed. Our field teams are quickly deployed, minimizing production interruptions.

Our spare parts inventory management is fully aligned with our machinery. By constantly maintaining critical parts in stock, we offer our customers fast and reliable parts supply. This prevents time loss during service interventions and ensures the uninterrupted operation of your machines.

R&D SERVICE BACKUP



Dener Makina's R&D center actively works to develop service solutions tailored to customer needs. Based on feedback from field experience, existing machines are updated with software and hardware, and new functions are integrated. This allows the machines to easily adapt to changing production needs.

Technical requirements, particularly those encountered in production for specific processes and sectors, are analyzed by our engineering departments and solution-focused projects are developed.

This allows user-specific machines to be optimized for high efficiency. This R&D-supported approach is key to Dener's success.

REMOTE AND DIGITAL SUPPORT



Thanks to our remote access system integrated into our digital infrastructure, our machines can be accessed from anywhere in the world. This system allows software updates, error analysis, and setting checks to be performed instantly. In cases where urgent technical support is required, rapid solutions are provided before physical intervention, resulting in time and cost savings.

Our remote access support service is designed to be compatible with all our machine models. Being available to our customers whenever they need it is the cornerstone of our service approach. This digital support system increases efficiency, minimizes downtime, and ensures uninterrupted production.

GLOBAL MANUFACTURING & SALES NETWORK

DENER WORLDWIDE



52+
YEARS OF EXPERIENCE

100+
EXPORTS TO COUNTRIES

14,000,000 sq ft
PRODUCTION CAMPUS (1,300,000 M^2)

Dener Makina A.Ş. reserves the right to modify catalog information and machine specifications without obligation to notify.

"THE FUTURE IS HERE" · AVAILABLE THROUGH NOVOTECH

DENER PRODUCT RANGE

PRESS BRAKES



Hydraulic press brake



Tandem press brake



Servo-electric press brake



Ball-screw press brake

PANEL BENDER



Panel bender

SHEARS



CNC hydraulic shear



NC hydraulic shear

LASER CUTTING MACHINES



GFL fiber laser cutting machine



Smart fiber laser cutting machine



Tube profile laser cutting machine

MACHINE TOOLS



CNC lathe



CNC vertical milling machine



Double-column milling machine



5-axis machining center



NC grinding machine

NovoTech MACHINE TOOLS Inc.

LET'S FIND THE RIGHT TUBE LASER FOR YOUR SHOP.

Call or visit us for quotes, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON location.

PHONE

+1 647 526 5510

WEB & EMAIL


NovoTechMachineTools.com
info@NovoTechMachineTools.com


ADDRESS

1365 Mid-Way Blvd, 26
Mississauga, ON L5T 2J5
Canada


INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

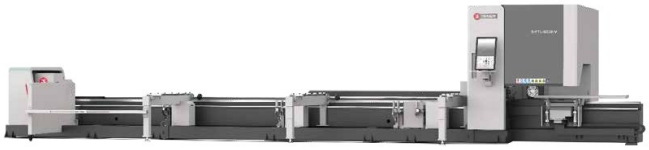





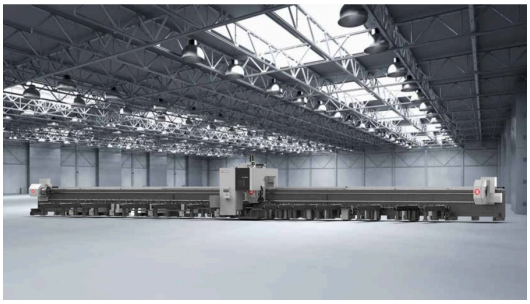

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: plate thicknesses in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment.