NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

GECAM · EUROFINTEC · MADE IN ITALY · SOLD & SERVICED IN CANADA BY NOVOTECH

DEBURRING, FINISHING AND PIPE SANDING MACHINES

GECAM WIDE-BELT DEBURRING, EDGE ROUNDING, DESLAGGING AND BRUSH MACHINES · CORNER GRINDERS AND CWS AND WELCOR CORNER WELDERS · EUROFINTEC ORBITAL, CENTRELESS AND LARGE-PIPE SANDERS, TUBE BRUSHING AND TUBE-END DEBURRING







Italy
MADE IN ITALY

24
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

GECAM & EUROFINTEC MACHINERY

CONTENTS

SHEET METAL DEBURRING MACHINES

G15 · G30 compact deburring machines, 5-7/8″ and 11-13/16″ wide G15 · G30 · 2 models 04
G65 · G135 wide-belt deburring machines, 25-9/16″ and 53-1/8″ wide G65 · G135 · 2 models 07
GM65 · GM110 single-belt deburring and satin finishing machines, 25-9/16″ and 43-5/16″ wide GM65 · GM110 · 2 models 11
G30 WET · G65/135 WET wet deburring machines, 11-13/16″ and 51-3/16″ wide G30 WET · G65/135 WET · 2 models 14

EDGE ROUNDING & DESLAGGING MACHINES

G135RB8 edge rounding machine, 53-1/8″ wide, radius to 5/64″ G135RB8 · 8-brush carousel 17
GT06 · GT13 double-sided edge rounding machines, 23-5/8″ and 51-3/16″ wide GT06 · GT13 · 2 models 20
G65DCC deslagging and edge rounding machine, 23-5/8″ wide, parts 3/8″ – 4-3/4″ G65DCC · deslagging 23

BRUSH DEBURRING MACHINES & BENCHES

CUB 30 · CUB 65BB · CUB 30B1B2 brush deburring machines, 11-13/16″ and 25-9/16″ wide CUB 30 · CUB 65BB · CUB 30B1B2 · 3 models 26
EASY T brushing workstation with vacuum table, 31-1/2 × 51-3/16″, parts to 5-7/8″ EASY T · workstation 29
GCB 25 · GCB 30 · GCB 40 double crossed-belt deburring benches, tables 98-7/16″ to 157-1/2″ GCB 25 · GCB 30 · GCB 40 · 3 models 31

CORNER GRINDERS

GECAM 131 corner grinder for box and door welds, corners to 5-7/8″ high GECAM 131 · hand-fed 34
GECAM 136 corner grinder for box and cabinet welds, corners to 11-13/16″ high GECAM 136 · hand-fed 37
GECAM 135 automatic corner grinder for welded boxes, edges to 59″ GECAM 135 · 1 or 2 heads 41
Upper-corner, six-head and tube-frame corner grinders, boxes to 23-5/8″, tube to 3-1/8″ Upper-corner · six-head · tube-frame 44

CORNER WELDING MACHINES

CWS 200 · CWS 300 · WELCOR 400 X 1-axis corner welders, corners to 15-3/4″ high CWS 200 · CWS 300 · WELCOR 400 X · 3 models 47
CWS 300 XY · WELCOR 400 XY 2-axis corner welders, parts to 59 × 59″ CWS 300 XY · WELCOR 400 XY · 2 models 50
WELCOR 400 XYZ 3-axis corner welder for seams in three directions, parts to 39-3/8 × 39-3/8″ WELCOR 400 XYZ · 3 axes 53
WELCOR 400 XYZ-Φ 4-axis corner welder with laser seam reading, parts to 39-3/8 × 39-3/8″ WELCOR 400 XYZ-Φ · 4 axes 55

PIPE SANDING & POLISHING — EUROFINTEC

141 · 144 orbital pipe sanders for straight and bent tube, Ø3/8″ – 5-7/8″ 141 · 144 · 2 models 58
128 S · 128 SL single-head centreless pipe and bar sanders, Ø3/16″ – 5-7/8″ 128 S · 128 SL · 2 models 60
128 DL two-head centreless pipe and bar sander, Ø3/8″ – 5-7/8″ 128 DL · 2 heads 63
228 pipe sander for large pipe, Ø3/8″ – 15-3/4″ 228 · pipe to Ø15-3/4″ 66
728 tube brushing machine, Ø3/8″ – 5-7/8″ 728 68

TUBE END DEBURRING — EUROFINTEC

143 tube end deburring machine — pipe and tube ends deburred inside and outside, Ø13/16″ – 4-3/4″ 143 70

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

NovoTech Machine Tools Inc.
1365 Mid-Way Blvd. Unit 26, Mississauga, ON L5T 2J5, Canada
NovoTechMachineTools.com | info@NovoTechMachineTools.com | +1 647 526 5510

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR GECAM AND EUROFINTEC MACHINERY

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Italy by Gecam — 100 % Italian
- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee
  in-stock machines only
- Spare parts & technical support
  readily available in Canada
- Order today with just 10% down
  0% down financing available
- Installation and training available

GECAM · PARMA, ITALY

DEBURRING AND FINISHING, MADE IN ITALY

Gecam designs and builds machines for deburring, grinding and finishing metal at Vicofertile, Parma — 100 % made in Italy, with components from Italian suppliers within 125 miles of the plant. Its wide-belt machines deburr, round and satin-finish laser-, punch- and plasma-cut parts from 5-7/8″ to 53-1/8″ wide, dry or wet; its corner grinders and corner welders build and finish metal boxes; and since 2005 its Eurofintec division has built the orbital, centreless and brushing machines that finish tube and pipe.

NovoTech sells, installs and supports Gecam and Eurofintec machines in Canada from Mississauga, Ontario, Canada — groups and abrasives chosen for your parts, installation, operator training, a CSA-approved panel, a 1-year warranty and parts and technical support in Canada.

G15 · G30 · 2 MODELS

G15 · G30 COMPACT DEBURRING MACHINES, 5-7/8" AND 11-13/16" WIDE



MODEL G15 · GECAM G15 COMPACT DEBURRING MACHINE, 5-7/8" WORKING WIDTH



Gecam G30 deburring machine, 11-13/16" working width



G15 conveyor belt at the infeed

Working width 5-7/8" and 11-13/16" · parts .020" – 4-3/4" · belt and brush groups

The way into belt deburring for laser, punching and plasma shops: an abrasive belt on a rubber contact roller takes the burr off, the brushes behind it round the edges and leave an even satin finish, and the conveyor carries the parts through. The G15 is the smallest Gecam — 5-7/8" wide, a belt unit and a row of rotating, oscillating top brushes, for small parts up to 4-1/8" thick. The G30 takes parts 11-13/16" wide and .020" to 4-3/4" thick with the belt (R), cylindrical Scotch-Brite brush (B), external brush (b) and double-row top brush (X) groups in the combination the parts need.

STANDARD FEATURES


- ✓ Abrasive belt unit (R) on a 55 Shore rubberized contact roller with automatic belt centering
- ✓ G15: single row of rotating and oscillating top brushes Ø7-7/8" (T) — deburring, satin finish and edge rounding in one pass
- ✓ G30: belt (R), cylindrical Scotch-Brite brush (B), external brush (b) and a double row of four top brushes Ø4-1/2" (X), configured to your parts
- ✓ Conveyor feed 3.3 – 13.1 ft/min (1 – 4 m/min), rubberized pressure rollers before and after each group
- ✓ Manual grit set on the G30: the bench height compensates for the belt thickness
- ✓ Dust extraction at each group; 1,177 CFM (2,000 m^3/h) required
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Additional infeed and outfeed rollers
- + Variable speed for each working group (G30)
- + Conveyor belt cleaning brush (G30)
- + Touch screen (G30)
- + Vacuum table (G30)
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

G15 · G30 COMPACT DEBURRING MACHINES, 5-7/8" AND 11-13/16" WIDE

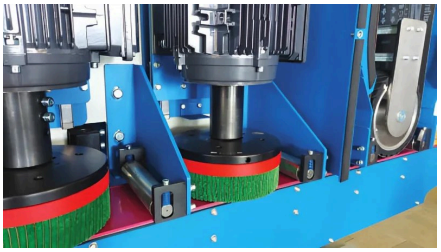

G15 rotating and oscillating top brushes (T group)




Two abrasive belt units (R groups) inside a G30




Abrasive belt and cylindrical brush (R + B groups) in a G30




G30 control panel

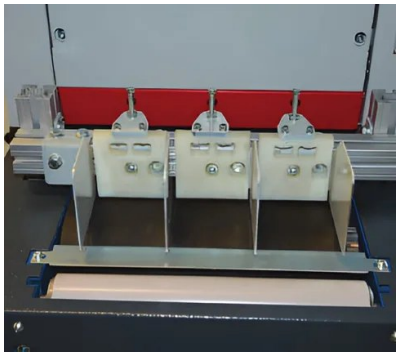

Rubberized pressure rollers at the G30 infeed

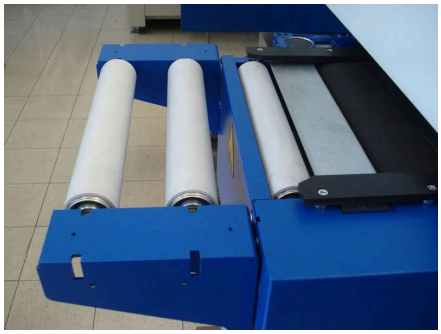

Additional infeed and outfeed rollers (optional)

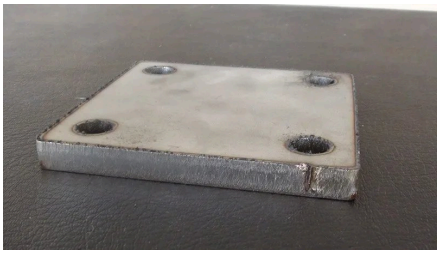

Laser-cut plate after deburring and edge rounding



Sample: deburred with the abrasive belt (R group)

TECHNICAL SPECIFICATIONS

G15 · G30 COMPACT DEBURRING MACHINES, 5-7/8" AND 11-13/16" WIDE

G15 · G30

Compact deburring machines

Model	G15	G30
Working width	**5-7/8" (150 mm)**	**11-13/16" (300 mm)**
Part thickness min – max	**.039" – 4-1/8" (1 – 105 mm)**	**.020" – 4-3/4" (0.5 – 120 mm)**
Abrasive belt width × length	5-7/8 × 78-3/4" (150 × 2,000 mm)	12-5/8 × 74-13/16" (320 × 1,900 mm)
Brushes	Ø7-7/8" (200 mm), single row (T)	Ø4-1/2" (115 mm), double row of 4 (X)
Feed speed	**3.3 – 13.1 ft/min (1 – 4 m/min)**	**3.3 – 13.1 ft/min (1 – 4 m/min)**
Working groups configurable	**R · T**	**R · B · b · X**
Grit set	—	Manual
Suction hood	—	Ø7-7/8" (200 mm)
Dust extraction required	1,177 CFM (2,000 m^3/h)	1,177 CFM (2,000 m^3/h)
Dimensions L × W × H	70 × 34 × 76" (1,774 × 853 × 1,929 mm)	24 × 84 × 81" (620 × 2,134 × 2,050 mm)
Weight	**from 948 lb (430 kg)**	**from 1,190 lb (540 kg)**

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded. Weights are approximate and depend on the working groups fitted. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Italy by Gecam — 100 % Italian
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

G65 · G135 · 2 MODELS

G65 · G135 WIDE-BELT DEBURRING MACHINES, 25-9/16" AND 53-1/8" WIDE



MODEL G65 · GECAM G65 WIDE-BELT DEBURRING MACHINE, 25-9/16" WORKING WIDTH



Gecam G135 wide-belt deburring machine, 53-1/8" working width



G65 wide-belt deburring machine with glazed side doors

Working width 25-9/16" and 53-1/8" · parts .020" – 4-3/4" · up to 4 groups · touch screen

The production deburring machines for laser, punching and plasma shops: up to four working groups in one pass — an abrasive belt for the burr, a double row of rotating, oscillating top brushes for the edges (8 on the G65, 20 on the G135), a cylindrical Scotch-Brite brush for the finish, and on the G65 a carousel of four abrasive brushes that rounds edges inside holes and slots. Touch screen, electronic grit set and variable belt speed are standard; the motorized table lifts on four synchronized screws and sets the part thickness to ±.004" (0.1 mm). Parts .020" to 4-3/4" thick, fed at 2 to 20 ft/min.

STANDARD FEATURES


- ✓ Configurable groups: R abrasive belt on a 55 Shore contact roller (Ø7-1/2" G65, Ø7-1/16" G135), X double row of top brushes Ø4-1/2" (8 or 20), B cylindrical Scotch-Brite brush Ø7-7/8", b external brush Ø5-7/8", B4 four-brush carousel Ø9-13/16" (G65)
- ✓ Touch screen, electronic grit set with stored belt types, and variable-speed belt group as standard
- ✓ Independent motor for every group; dust hood at each group, directly at the point of work
- ✓ Motorized table on 4 synchronized trapezoidal screws — part thickness set to ±.004" (0.1 mm)
- ✓ Oil-proof natural rubber conveyor belt with automatic centering; rubberized pressure rollers before and after each group
- ✓ Diagnostic unit with display for alarms and faults
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Vacuum table
- + Magnetic conveyor track for small steel parts
- + Conveyor belt cleaning brush
- + Higher-power motors
- + Industry 4.0 connection
- + Additional infeed / outfeed rollers
- + Return conveyor bringing parts back to the operator
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS · 1 / 2

G65 · G135 WIDE-BELT DEBURRING MACHINES, 25-9/16" AND 53-1/8" WIDE

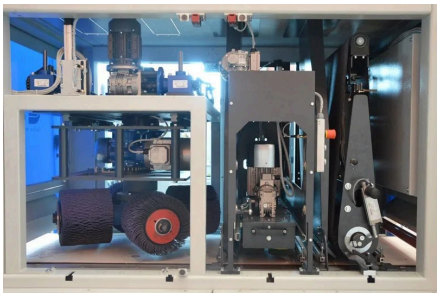


Inside a G65 RXB4: abrasive belt, top brushes and four-brush carousel



Abrasive belt unit and double row of top brushes (R + X groups)




G135 with belt, top-brush and belt units (RXR)

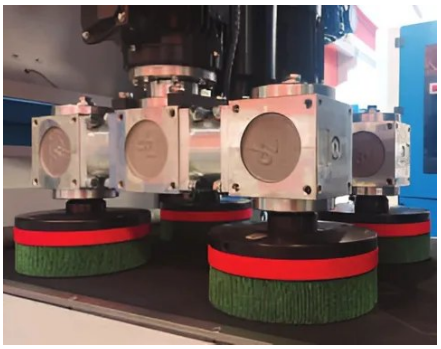

Top brushes of the X group, turning and oscillating across the part



Touch screen: speed, thickness and working pressure of every group

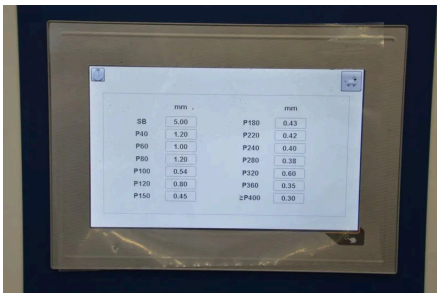

Electronic grit set: the belt thickness stored for each grit



G135 with the external cylindrical brush below the outfeed (b group, configurable)



Wide-belt deburring machine with extended infeed table (optional)



Conveyor belt cleaning brush (optional)

DETAILS, COMPONENTS AND OPTIONS · 2 / 2

G65 · G135 WIDE-BELT DEBURRING MACHINES, 25-9/16" AND 53-1/8" WIDE



G135 connected to a Gecam GDC cartridge dust collector (optional)



Sample: deburred and edge-rounded with belt and top brushes (RX)



Sample: deburred and rounded with RXX



Sample: deburred and finished with belt and cylindrical brush (RB)



Sample: oxide removed from laser-cut edges with the X group

TECHNICAL SPECIFICATIONS

G65 · G135 WIDE-BELT DEBURRING MACHINES, 25-9/16″ AND 53-1/8″ WIDE

G65 · G135

Wide-belt deburring machines

Model	G65	G135
Working width	**25-9/16″ (650 mm)**	**53-1/8″ (1,350 mm)**
Part thickness min – max	**.020″ – 4-3/4″ (0.5 – 120 mm)**	**.020″ – 4-3/4″ (0.5 – 120 mm)**
Abrasive belt width × length	26 × 86-5/8″ (660 × 2,200 mm)	53-15/16 × 86-5/8″ (1,370 × 2,200 mm)
Belt contact roller 55 Shore rubber	Ø7-1/2″ (190 mm)	Ø7-1/16″ (180 mm)
Top brushes (X) double row	8 × Ø4-1/2″ (115 mm)	20 × Ø4-1/2″ (115 mm)
Feed speed	**2.0 – 20 ft/min (0.6 – 6 m/min)**	**2.0 – 20 ft/min (0.6 – 6 m/min)**
Working groups configurable	**R · X · B · B4 · b**	**R · X · B · b**
Touch screen · electronic grit set · variable-speed belt	Standard	Standard
Suction hoods	Ø5-7/8″ (150 mm)	Ø5-7/8″ (150 mm)
Dust extraction required	2,354 CFM (4,000 m^3/h)	3,531 CFM (6,000 m^3/h)
Dimensions L × W × H	46 × 84 × 81″ (1,176 × 2,137 × 2,050 mm)	74 × 84 × 81″ (1,876 × 2,137 × 2,070 mm)
Weight	**from 3,748 lb (1,700 kg)**	**from 3,968 lb (1,800 kg)**

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded. Weights are approximate and depend on the working groups fitted. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Italy by Gecam — 100 % Italian
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

GM65 · GM110 · 2 MODELS

GM65 · GM110 SINGLE-BELT DEBURRING AND SATIN FINISHING MACHINES, 25-9/16" AND 43-5/16" WIDE



MODEL GM65 · GECAM GM65 SINGLE-BELT DEBURRING AND SATIN FINISHING MACHINE, 25-9/16"



Gecam GM110 single-belt deburring and satin finishing machine, 43-5/16"



Abrasive belt unit of a GM machine

Working width 25-9/16" and 43-5/16" · parts .020" – 4-3/4" · one abrasive belt

One abrasive belt on a Ø7-1/2" rubber contact roller and nothing more: the simplest and lowest-cost way to take the burrs off flat parts and give stainless steel, aluminum, brass and copper an even satin grain across a 25-9/16" or 43-5/16" width. Parts from .020" to 4-3/4" thick ride through on the conveyor at 2 to 20 ft/min (GM65) or 3.3 to 13.1 ft/min (GM110), and a magnetic conveyor track holds small steel parts down.

STANDARD FEATURES


- ✓ Abrasive belt unit (R) on a 55 Shore rubberized contact roller Ø7-1/2" (190 mm) with automatic belt centering
- ✓ Deburring and satin finishing of flat parts in one pass
- ✓ Conveyor feed 2 – 20 ft/min (GM65) or 3.3 – 13.1 ft/min (GM110)
- ✓ Suction hood Ø5-7/8"; 1,177 CFM (2,000 m^3/h) extraction required
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Magnetic conveyor track
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

GM65 · GM110 SINGLE-BELT DEBURRING AND SATIN FINISHING MACHINES, 25-9/16" AND 43-5/16" WIDE

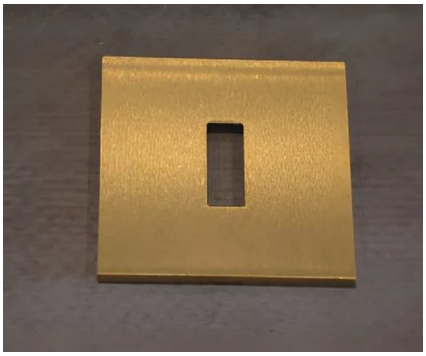

Satin-finished brass part

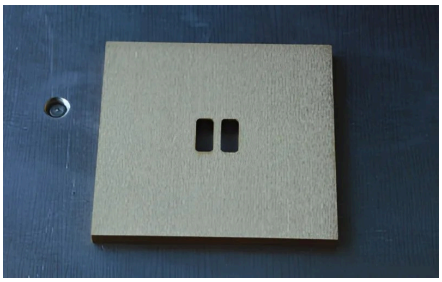

Deburred and satin-finished steel plate



Copper bar after deburring



Sample: hairline (satin) finish



Sample: satin finish with the abrasive belt (R)

TECHNICAL SPECIFICATIONS

GM65 · GM110 SINGLE-BELT DEBURRING AND SATIN FINISHING MACHINES, 25-9/16" AND 43-5/16" WIDE

GM65 · GM110

Single-belt deburring and satin finishing machines

Model	GM65	GM110
Working width	**25-9/16" (650 mm)**	**43-5/16" (1,100 mm)**
Part thickness min – max	**.020" – 4-3/4" (0.5 – 120 mm)**	**.020" – 4-3/4" (0.5 – 120 mm)**
Abrasive belt width × length	26-3/8 × 86-5/8" (670 × 2,200 mm)	44-1/8 × 60" (1,120 × 1,524 mm)
Belt contact roller 55 Shore rubber	Ø7-1/2" (190 mm)	Ø7-1/2" (190 mm)
Feed speed	**2.0 – 20 ft/min (0.6 – 6 m/min)**	**3.3 – 13.1 ft/min (1 – 4 m/min)**
Working group abrasive belt	**R**	**R**
Suction hood	Ø5-7/8" (150 mm)	Ø5-7/8" (150 mm)
Dust extraction required	1,177 CFM (2,000 m^3/h)	1,177 CFM (2,000 m^3/h)
Dimensions L × W × H	39 × 55 × 79" (980 × 1,386 × 2,000 mm)	63 × 55 × 78" (1,600 × 1,386 × 1,990 mm)
Weight	**from 1,301 lb (590 kg)**	**from 1,764 lb (800 kg)**

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded. Weights are approximate and depend on the working groups fitted. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Italy by Gecam — 100 % Italian
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

G30 WET · G65/135 WET · 2 MODELS

G30 WET · G65/135 WET WET DEBURRING MACHINES, 11-13/16" AND 51-3/16" WIDE



MODEL G30 · GECAM G30 WET WET DEBURRING MACHINE, 11-13/16"



Gecam G65/135 WET wet deburring machine, 51-3/16"



G30 WET with two belt units (RR), side view

Working width 11-13/16" and 51-3/16" · parts to 5-1/2" · water sprayed at every tool

Deburring with water, for parts that would deform from the heat of dry grinding and for shops that want no grinding dust in the air: sprayers wet the belt and the brushes right at the cut, each managed separately, the sludge drains to an external collection tank, and on the G30 WET a drying group clears the parts at the exit. The G30 WET carries up to two groups on an 11-13/16" width; the G65/135 WET takes parts 51-3/16" wide and .031" to 5-1/2" thick with belt, top-brush and cylindrical-brush groups. Fixed bench at 35-7/16" working height; feed up to 33 ft/min.

STANDARD FEATURES

- ✓ Water sprayers directly on each working tool, managed independently
- ✓ External sludge collection tank; filter paper separates the sludge (G30 WET)
- ✓ Groups: R abrasive belt on a Ø4-15/16" (125 mm) contact roller, T single row of top brushes Ø4-1/2", B cylindrical Scotch-Brite brush Ø5-7/8"; b external brush on the G65/135 WET
- ✓ G30 WET: up to 2 groups, feed 16 – 33 ft/min (5 – 10 m/min), drying group at the exit
- ✓ G65/135 WET: feed 1.6 – 33 ft/min (0.5 – 10 m/min)
- ✓ Fixed bench at 35-7/16" (900 mm) working height
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Touch screen
- + Synthetic top brushes made for wet work
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

G30 WET · G65/135 WET WET DEBURRING MACHINES, 11-13/16" AND 51-3/16" WIDE



Two abrasive belt units (RR) of a wet machine



Belt unit and top brushes (RT) in a G30 WET



Sample: satin finish with belt and two cylindrical brushes (RBB)

TECHNICAL SPECIFICATIONS

G30 WET · G65/135 WET WET DEBURRING MACHINES, 11-13/16" AND 51-3/16" WIDE

G30 WET · G65/135 WET

Wet deburring machines

Model	G30 WET	G65/135 WET
Working width	**11-13/16" (300 mm)**	**51-3/16" (1,300 mm)**
Part thickness	**to 5-1/2" (140 mm)**	**.031" – 5-1/2" (0.8 – 140 mm)**
Abrasive belt width × length	12-5/8 × 74-13/16" (320 × 1,900 mm)	51-15/16 × 86-5/8" (1,320 × 2,200 mm)
Feed speed	**16 – 33 ft/min (5 – 10 m/min)**	**1.6 – 33 ft/min (0.5 – 10 m/min)**
Working groups configurable	**Up to 2 of R · T · B**	**R · T · B · b**
Water	Sprayers at each tool · external sludge tank	Sprayers at each tool · external sludge tank
Working height fixed bench	35-7/16" (900 mm)	35-7/16" (900 mm)
Dimensions L × W × H	56 × 34 × 83" (1,430 × 860 × 2,100 mm)	91 × 63 × 94" (2,300 × 1,600 × 2,380 mm)
Weight	**from 1,455 lb (660 kg)**	**8,818 lb (4,000 kg)**

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded. Weights are approximate and depend on the working groups fitted. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Italy by Gecam — 100 % Italian
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

G135RB8 · 8-BRUSH CAROUSEL

G135RB8 EDGE ROUNDING MACHINE, 53-1/8" WIDE, RADIUS TO 5/64"



MODEL G135RB8 · GECAM G135RB8 EDGE ROUNDING MACHINE WITH EIGHT-BRUSH CAROUSEL, 53-1/8"



Carousel of eight cylindrical abrasive brushes turning in both directions



Abrasive belt unit (R group) of the G135RB8

Working width 53-1/8" · edge radius to 5/64" (2 mm) · belt + 8-brush carousel

For laser-cut parts going to paint, powder coating or hands-on assembly: an abrasive belt takes off the burr, then a carousel of eight cylindrical abrasive brushes — each turning clockwise and counter-clockwise while the carousel rotates — works every edge from every direction, inside holes and slots too, up to a 5/64" (2 mm) radius. The brushes are staggered, so no part of an edge escapes them, and paint covers the rounded edge instead of thinning out on a sharp one. Vacuum table for small parts, quick-release brush and belt change, touch-screen control of every group. 53-1/8" wide, parts .020" to 4-3/4".

STANDARD FEATURES

- ✓ Abrasive belt (R) on a 55 Shore contact roller Ø4-15/16" (125 mm), variable speed
- ✓ Carousel of 8 cylindrical abrasive brushes Ø11-13/16 × 20-15/16" (300 × 532 mm) turning both ways, staggered so every edge is reached
- ✓ Edge radius up to 5/64" (2 mm), inside holes too; also for coated and surface-treated sheet
- ✓ Double row of 8 top brushes Ø4-1/2" (X) as a further configurable group
- ✓ Feed 0.7 – 6.6 ft/min (0.2 – 2 m/min); touch screen and electronic grit set standard
- ✓ Vacuum table; quick-release change of brushes and belt
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

G135RB8 EDGE ROUNDING MACHINE, 53-1/8" WIDE, RADIUS TO 5/64"



Touch-screen control of the G135RB8

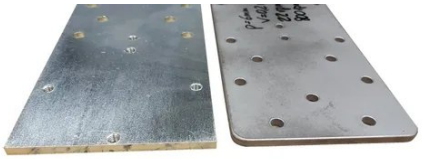

Laser-cut parts before and after edge rounding

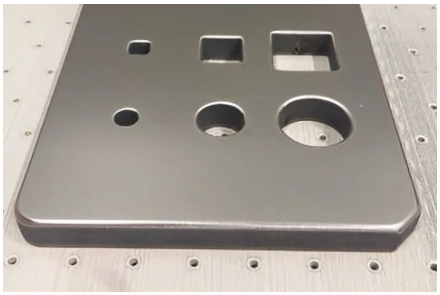


Plate with edges rounded, inside the holes too



Sample: 5/64" (2 mm) edge radius from the eight-brush carousel



Sample: deburred and rounded with RB8

TECHNICAL SPECIFICATIONS

G135RB8 EDGE ROUNDING MACHINE, 53-1/8" WIDE, RADIUS TO 5/64"

G135RB8

Deburring and edge rounding machine

Model	G135RB8
Working width	**53-1/8" (1,350 mm)**
Part thickness min – max	**.020" – 4-3/4" (0.5 – 120 mm)**
Edge radius inside holes too	**to 5/64" (2 mm)**
Abrasive belt width × length	53-15/16 × 86-5/8" (1,370 × 2,200 mm)
Carousel brushes B group	8 × Ø11-13/16 × 20-15/16" (300 × 532 mm)
Feed speed	**0.7 – 6.6 ft/min (0.2 – 2 m/min)**
Working groups configurable	**R · X · B (8-brush carousel)**
Touch screen · electronic grit set · variable-speed belt	Standard
Suction hoods	Ø5-7/8" (150 mm)
Dust extraction required	3,531 CFM (6,000 m^3/h)
Dimensions L × W × H	86 × 168 × 88" (2,177 × 4,277 × 2,235 mm)
Weight	**from 9,237 lb (4,190 kg)**

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded. Weights are approximate and depend on the working groups fitted. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Italy by Gecam — 100 % Italian
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

GT06 · GT13 · 2 MODELS

GT06 · GT13 DOUBLE-SIDED EDGE ROUNDING MACHINES, 23-5/8" AND 51-3/16" WIDE



MODEL GT06 · GECAM GT06 DOUBLE-SIDED EDGE ROUNDING MACHINE, 23-5/8"



Gecam GT13 double-sided edge rounding machine, 51-3/16"



GT13 in RCS configuration

Working width 23-5/8" and 51-3/16" · both sides in one pass · edges rounded inside holes

Both faces of the part in one pass: cross belts carrying flexible strip brushes travel across the part above and below it, rounding every edge on both sides and inside the holes, while the faces themselves are not touched — a brushed, galvanized or pre-painted surface comes out as it went in. The part rides through on motorized rollers on a fixed bench. The GT06 adds two transverse abrasive belts with a pressure pad for heavier burrs (six groups, 23-5/8" wide, parts .020" to 3-1/8"); the GT13 runs two strip-brush belts of 75 brushes each, one above and one below the part (51-3/16" wide, parts to 3-9/16"). Touch screen with stored programs on both.

STANDARD FEATURES


- ✓ Cross belts with strip brushes above and below the part: every edge rounded on both sides in one pass, inside holes too
- ✓ The faces are not worked, so previous surface treatments are kept
- ✓ GT06: 2 transverse abrasive belts with pressure pad and self-braking motor + 4 strip-brush tracks — 6 groups above and below
- ✓ GT13: 2 strip-brush belts, one above and one below, 75 brushes each (150 in all), 7.4 HP (5.5 kW) per group
- ✓ Motorized pressure setting of each group, 0 – 1-3/8" (0 – 35 mm); independent motor for each group
- ✓ Fixed bench with motorized rollers; feed 2.3 – 23 ft/min (GT06) or 2.3 – 20 ft/min (GT13)
- ✓ Touch screen with stored work programs and alarm self-diagnosis
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- \+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS


GT06 · GT13 DOUBLE-SIDED EDGE ROUNDING MACHINES, 23-5/8" AND 51-3/16" WIDE

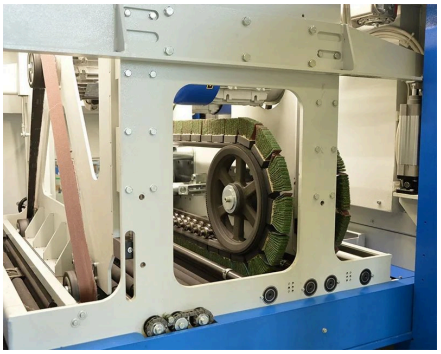

Cross belts with strip brushes working above and below the part



Strip brushes on a cross belt

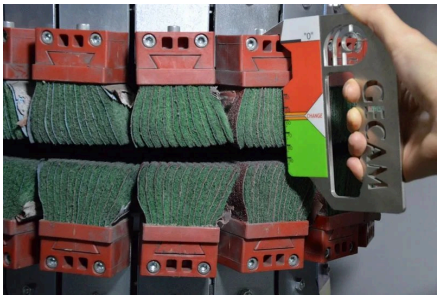

Strip brushes, easily replaced as they wear



Touch screen with stored work programs



Sample: deburred and rounded inside the holes

TECHNICAL SPECIFICATIONS

GT06 · GT13 DOUBLE-SIDED EDGE ROUNDING MACHINES, 23-5/8" AND 51-3/16" WIDE

GT06 · GT13

Double-sided edge rounding machines

Model	GT06	GT13
Working width	**23-5/8" (600 mm)**	**51-3/16" (1,300 mm)**
Part thickness min – max	**.020" – 3-1/8" (0.5 – 80 mm)**	**.020" – 3-9/16" (0.5 – 90 mm)**
Groups above and below the part	**2 transverse abrasive belts (R) + 4 strip-brush tracks (C)**	**2 strip-brush belts (C), one above and one below, 75 brushes each**
Abrasive belts width × length	1-15/16 × 98-7/16" (50 × 2,500 mm)	—
Strip brushes	2-5/8 × 1-1/4" (66 × 32 mm)	2-3/8 × 1-15/16" (60 × 50 mm)
Brush pressure	0 – 1-3/8" (0 – 35 mm), motorized, each group	0 – 1-3/8" (0 – 35 mm), motorized, each group
Feed speed motorized rollers	**2.3 – 23 ft/min (0.7 – 7 m/min)**	**2.3 – 20 ft/min (0.7 – 6 m/min)**
Suction hood	Ø5-7/8" (150 mm)	Ø7-1/16" (180 mm)
Dust extraction required	2,354 CFM (4,000 m^3/h)	2,354 CFM (4,000 m^3/h)
Dimensions L × W × H	46 × 66 × 83" (1,170 × 1,676 × 2,096 mm)	100 × 49 × 77" (2,550 × 1,250 × 1,950 mm)
Weight	**from 4,409 lb (2,000 kg)**	**from 4,850 lb (2,200 kg)**

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded. Weights are approximate and depend on the working groups fitted. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Italy by Gecam — 100 % Italian
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

G65DCC · DESLAGGING

G65DCC DESLAGGING AND EDGE ROUNDING MACHINE, 23-5/8" WIDE, PARTS 3/8" – 4-3/4"



MODEL G65DCC · GECAM G65DCC DESLAGGING AND EDGE ROUNDING MACHINE, 23-5/8"



D belt on its large rubber roller and the C strip-brush belts



G65DCC touch screen

Working width 23-5/8" · parts 3/8" – 4-3/4" · slag off and edges rounded in one pass

Plasma and oxy-fuel cutting leave dross welded to the bottom edge of thick parts, and grinding it off by hand is slow, noisy work. The G65DCC takes it off in one pass: a D belt on a large Ø16-9/16" soft rubber roller (20 Shore), pressed on by a pneumatic cylinder, works only the edges and breaks the slag away, then 82 strip brushes on two transverse belts, turning in opposite directions, round the edges evenly. Magnetic table and touch screen standard; parts 3/8" to 4-3/4" thick, 23-5/8" wide.

STANDARD FEATURES

- ✓ D group: abrasive belt on a Ø16-9/16" (420 mm) 20 Shore roller, pressed by a pneumatic cylinder; pneumatic belt tensioning and photocell belt centering
- ✓ Works the edges, not the face — the slag is broken off without grinding the surface
- ✓ C group: 82 strip brushes on two transverse belts with reverse rotation and independent motors, for an even edge radius
- ✓ Magnetic table and touch screen standard
- ✓ Feed 2.3 – 23 ft/min (0.7 – 7 m/min); suction hoods Ø5-7/8", 2,354 CFM (4,000 m^3/h) required
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

G65DCC DESLAGGING AND EDGE ROUNDING MACHINE, 23-5/8" WIDE, PARTS 3/8" – 4-3/4"



Plasma-cut part with slag, before deslagging



Plasma-cut part after deslagging and edge rounding

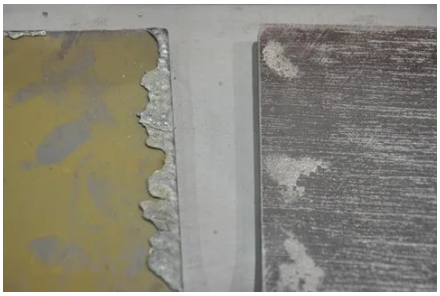


Plate edge with slag (left) and after the G65DCC (right)



Thick plasma-cut part — the work the G65DCC deslags

TECHNICAL SPECIFICATIONS

G65DCC DESLAGGING AND EDGE ROUNDING MACHINE, 23-5/8" WIDE, PARTS 3/8" – 4-3/4"

G65DCC

Deslagging and edge rounding machine

Model	G65DCC
Working width	**23-5/8" (600 mm)**
Part thickness min – max	**3/8" – 4-3/4" (10 – 120 mm)**
Abrasive belt (D) width × length	26-3/4 × 59-1/16" (680 × 1,500 mm)
D belt roller	Ø16-9/16" (420 mm), 20 Shore, pneumatic pressure
Strip brushes (C) reverse rotation, independent motors	82 on two transverse belts, 2-5/8 × 2-1/16" (66 × 52 mm)
Feed speed	**2.3 – 23 ft/min (0.7 – 7 m/min)**
Working groups	**D · C**
Touch screen · magnetic table	Standard
Suction hoods	Ø5-7/8" (150 mm)
Dust extraction required	2,354 CFM (4,000 m^3/h)
Dimensions L × W × H	75 × 70 × 84" (1,900 × 1,776 × 2,130 mm)
Weight	**from 3,351 lb (1,520 kg)**

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded. Weights are approximate and depend on the working groups fitted. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Italy by Gecam — 100 % Italian
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

CUB 30 · CUB 65BB · CUB 30B1B2 · 3 MODELS

CUB 30 · CUB 65BB · CUB 30B1B2 BRUSH DEBURRING MACHINES, 11-13/16" AND 25-9/16" WIDE



MODEL CUB · GECAM CUB BRUSH DEBURRING MACHINE WITH TWO BRUSH HEADS



CUB brush deburring machine with two brush units



Gecam CUB 30 brush deburring machine with conveyor

Working width 11-13/16" and 25-9/16" · parts to 9-13/16" · conveyor 3.3 – 23 ft/min

A simpler, much lower-cost alternative to a wide-belt machine for deburring and satin-finishing flat parts: cylindrical brushes over a conveyor, each with its own motor and a motorized pressure setting, and the heads open on the operator side, so parts wider than the conveyor can still be brushed. Any cylindrical brush fits — Scotch-Brite for a satin finish, abrasive or wire for burrs. The CUB 30 and CUB 30B1B2 take parts 11-13/16" wide and up to 9-13/16" thick, the CUB 65BB parts 25-9/16" wide and up to 4-3/4", all from 3-15/16" long.

STANDARD FEATURES

- ✓ Cylindrical brushes Ø7-1/16" (CUB 30, CUB 30B1B2) or Ø7-7/8" (CUB 65BB) — Scotch-Brite, abrasive or wire
- ✓ Motorized, independent pressure adjustment of each brush; brush heads positioned by handwheel
- ✓ Conveyor at variable speed, 3.3 – 23 ft/min (1 – 7 m/min); pressure rollers with independent adjustment
- ✓ Independent motors; heads open on the operator side for parts wider than the conveyor
- ✓ Parts from 3-15/16" (100 mm) long
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Variable brush speed
- + Brushes for other finishes
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

CUB 30 · CUB 65BB · CUB 30B1B2 BRUSH DEBURRING MACHINES, 11-13/16" AND 25-9/16" WIDE




Compact CUB brush deburring machine

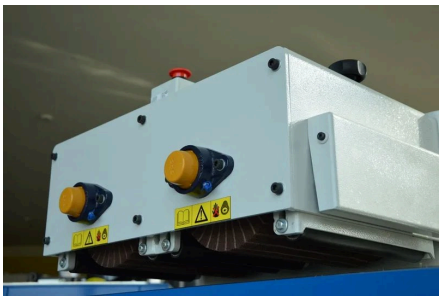

Two cylindrical brush heads with independent pressure adjustment



CUB brush heads, positioned by handwheel

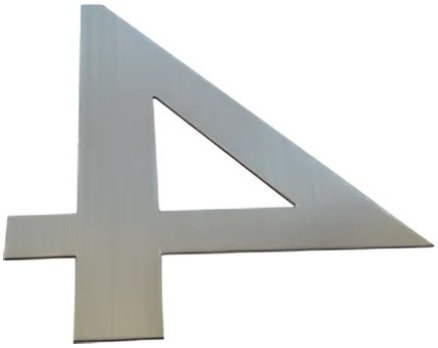

Sample: Scotch-Brite finish with a cylindrical brush (B group)

TECHNICAL SPECIFICATIONS

CUB 30 · CUB 65BB · CUB 30B1B2 BRUSH DEBURRING MACHINES, 11-13/16" AND 25-9/16" WIDE

CUB 30 · CUB 65BB · CUB 30B1B2

Brush deburring machines

Model	CUB 30	CUB 65BB	CUB 30B1B2
Working width	**11-13/16" (300 mm)**	**25-9/16" (650 mm)**	**11-13/16" (300 mm)**
Part thickness min – max	**.020" – 9-13/16" (0.5 – 250 mm)**	**.020" – 4-3/4" (0.5 – 120 mm)**	**.020" – 9-13/16" (0.5 – 250 mm)**
Brush Ø cylindrical	**Ø7-1/16" (180 mm)**	**Ø7-7/8" (200 mm)**	**Ø7-1/16" (180 mm)**
Feed speed variable	**3.3 – 23 ft/min (1 – 7 m/min)**	**3.3 – 23 ft/min (1 – 7 m/min)**	**3.3 – 23 ft/min (1 – 7 m/min)**
Min. part length	3-15/16" (100 mm)	3-15/16" (100 mm)	3-15/16" (100 mm)
Dimensions L × W × H	44 × 42 × 54" (1,120 × 1,068 × 1,360 mm)	48 × 67 × 55" (1,220 × 1,700 × 1,400 mm)	45 × 30 × 47" (1,150 × 750 × 1,200 mm)
Weight	**849 lb (385 kg)**	**1,543 lb (700 kg)**	**992 lb (450 kg)**

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded. Weights are approximate and depend on the working groups fitted. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Italy by Gecam — 100 % Italian
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

EASY T · WORKSTATION


EASY T BRUSHING WORKSTATION WITH VACUUM TABLE, 31-1/2 × 51-3/16", PARTS TO 5-7/8"



MODEL EASY · GECAM EASY T BRUSHING WORKSTATION WITH VACUUM TABLE



Two tools on the 180° tilting arm



Brushing a part held down by the vacuum table

Table 31-1/2 × 51-3/16" · parts to 5-7/8" · two tools on a 180° tilting arm

A bench for the parts a conveyor machine cannot take — heavy, thick, shaped or one-off: the vacuum table holds the part and the operator guides a Ø5-7/8" top brush over it on a swinging arm, deburring, rounding the edges or satin-finishing. The arm carries two tools and tilts through 180° to change from one to the other; the tool is switched on from the handlebar, and the dust is drawn off inside the table. Parts up to 5-7/8" thick on a 31-1/2 × 51-3/16" table.

STANDARD FEATURES

- ✓ Two tools on a swinging arm that tilts through 180° for a quick change from one to the other
- ✓ Vacuum table, vacuum area 9-13/16 × 13-3/4" (250 × 350 mm)
- ✓ Top brush Ø5-7/8" (150 mm) with quick release; adjustable speed; any brush type for the material and finish
- ✓ 1 HP (0.75 kW) motor; tool buttons on the handlebar
- ✓ Suction hood inside the table; working height 37-3/16" (945 mm)
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Brushes for deburring, edge rounding and satin finishing
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

EASY T — TECHNICAL SPECIFICATIONS

Model	EASY T
Work table	**31-1/2 × 51-3/16" (800 × 1,300 mm)**
Working height	37-3/16" (945 mm)
Vacuum area	9-13/16 × 13-3/4" (250 × 350 mm)
Max. part thickness	**5-7/8" (150 mm)**
Top brush (T) 2 tools on a 180° tilting arm	**Ø5-7/8" (150 mm), quick release**
Motor	**1 HP (0.75 kW)**

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded. Weights are approximate and depend on the working groups fitted. Dimensions are overall L × W × H.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

EASY T BRUSHING WORKSTATION WITH VACUUM TABLE, 31-1/2 × 51-3/16", PARTS TO 5-7/8"



Operator guiding the brush head along a part

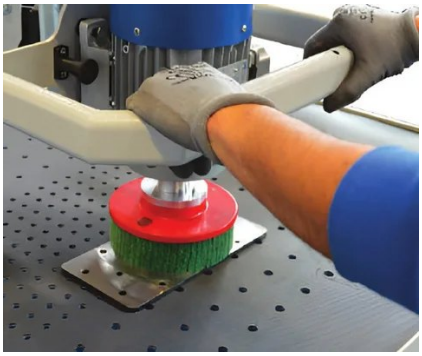


Top brush rounding the edges of a part

GCB 25 · GCB 30 · GCB 40 · 3 MODELS

GCB 25 · GCB 30 · GCB 40 DOUBLE CROSSED-BELT DEBURRING BENCHES, TABLES 98-7/16" TO 157-1/2"



MODEL GCB · GECAM GCB 25 RR DOUBLE CROSSED-BELT DEBURRING BENCH

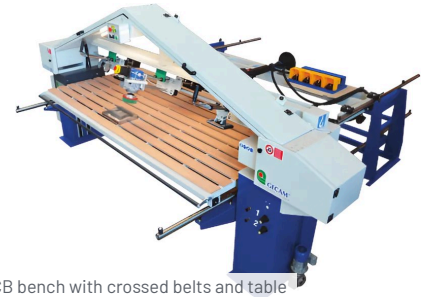

GCB bench with crossed belts and table



Operator deburring a part on the GCB

Tables 98-7/16", 118-1/8" and 157-1/2" × 31-1/2" · two crossed belts · manipulator for shaped parts

A manual station for large, heavy and awkward parts: two long abrasive belts cross over a motorized table, and the operator works the part against the belt — over a rubber roller, a shoe or a brush placed wherever along the belt the job needs — so long edges, profiles and shaped parts are deburred, satin-finished and rounded without a fixture. The belts are tensioned pneumatically and run at variable speed, a single independent brush (T) rounds edges, and a suction-cup manipulator holds shaped parts in any position. Tables 98-7/16", 118-1/8" or 157-1/2" long.

STANDARD FEATURES

- ✓ Double crossed abrasive belt 4-3/4" (120 mm) wide with pneumatic tensioning, variable belt speed
- ✓ Rubber roller, shoe or brush accessory placed at any point along the belt
- ✓ Motorized table with 23-5/8" (600 mm) vertical stroke; parts up to 220 lb (100 kg) on the table
- ✓ Single independent brush (T group) for edge rounding
- ✓ Control panel in front of the working area
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Suction-cup manipulator for shaped parts: 360° horizontal and 360° vertical rotation, 90° tilt, parts to 82 lb (37 kg)
- + Accessory storage rack on guided wheels
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

GCB 25 · GCB 30 · GCB 40 DOUBLE CROSSED-BELT DEBURRING BENCHES, TABLES 98-7/16" TO 157-1/2"



Single independent brush (T group) for edge rounding

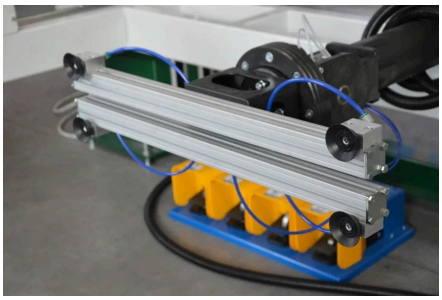

Suction-cup manipulator for shaped parts (optional)

TECHNICAL SPECIFICATIONS

GCB 25 · GCB 30 · GCB 40 DOUBLE CROSSED-BELT DEBURRING BENCHES, TABLES 98-7/16" TO 157-1/2"

GCB 25 · GCB 30 · GCB 40

Double crossed-belt deburring benches

Model	GCB 25	GCB 30	GCB 40
Work table	**98-7/16 × 31-1/2" (2,500 × 800 mm)**	**118-1/8 × 31-1/2" (3,000 × 800 mm)**	**157-1/2 × 31-1/2" (4,000 × 800 mm)**
Abrasive belts 2 crossed belts	**4-3/4 × 314-15/16" (120 × 8,000 mm)**	**4-3/4 × 354-5/16" (120 × 9,000 mm)**	**4-3/4 × 430-1/2" (120 × 10,935 mm)**
Table vertical stroke (Z)	23-5/8" (600 mm)	23-5/8" (600 mm)	23-5/8" (600 mm)
Max. part weight on the table	220 lb (100 kg)	220 lb (100 kg)	220 lb (100 kg)
Max. part weight on the clamping system	18 lb (8 kg)	18 lb (8 kg)	18 lb (8 kg)
Max. part weight on the manipulator optional	82 lb (37 kg)	82 lb (37 kg)	82 lb (37 kg)
Dimensions L × W × H	39 × 148 × 87" (1,000 × 3,750 × 2,200 mm)	39 × 148 × 87" (1,000 × 3,750 × 2,200 mm)	39 × 148 × 87" (1,000 × 3,750 × 2,200 mm)
Weight	**from 1,742 lb (790 kg)**	**from 1,742 lb (790 kg)**	**from 1,742 lb (790 kg)**

Metric values in brackets are the manufacturer's figures; imperial values are converted and rounded. Weights are approximate and depend on the working groups fitted. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Italy by Gecam — 100 % Italian
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

GECAM 131 · HAND-FED

GECAM 131 CORNER GRINDER FOR BOX AND DOOR WELDS, CORNERS TO 5-7/8" HIGH



MODEL GECAM · GECAM 131 CORNER GRINDER



GECAM 131 with its control panel, work table and dust extraction



GECAM 131 work table and belt housing

Corners to 5-7/8" high · radius 3/64" – 3/8" or sharp · table adjustable in height and inclination

The compact hand-fed corner grinder for welded boxes, cabinets, doors and trays: the abrasive belt runs over a fork with two rollers, and the operator slides the corner along it on the table. The fork oscillates both in angle and about its pivot, so it grinds the weld flush and leaves a radius from 3/64" to 3/8" (R1 – R10 mm) or a sharp corner. The 23-5/8 × 9-13/16" table is set in height and inclination by handwheel, with squaring guides adjusted by hand, for corners up to 5-7/8" high. Two belt speeds: the higher for steel, the lower for stainless steel and aluminum.

STANDARD FEATURES


- ✓ Fixed head with an oscillating two-roller fork: radius 3/64" – 3/8" (R1 – R10 mm) or a sharp corner
- ✓ Abrasive belt 5-7/8 × 78-3/4" (150 × 2,000 mm) at two speeds, 4,724 / 2,362 ft/min (24 / 12 m/s)
- ✓ 23-5/8 × 9-13/16" (600 × 250 mm) work table, height and inclination set by handwheel
- ✓ Squaring guides adjusted by hand; corners up to 5-7/8" (150 mm) high
- ✓ Dust hood; electrics in a sealed box
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Dust collector
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS


GECAM 131 CORNER GRINDER FOR BOX AND DOOR WELDS, CORNERS TO 5-7/8" HIGH

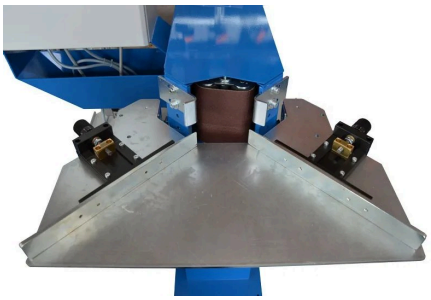

GECAM 131 work table with squaring guides

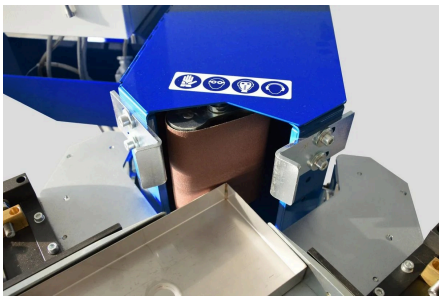

GECAM 131 belt fork at a box corner

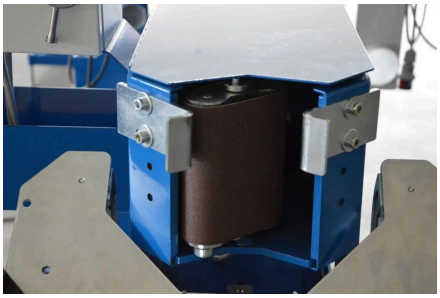

GECAM 131 abrasive belt between the guide plates




GECAM 131 with its dust extraction fan



GECAM 131 control panel



Dust extraction fan on the GECAM 131

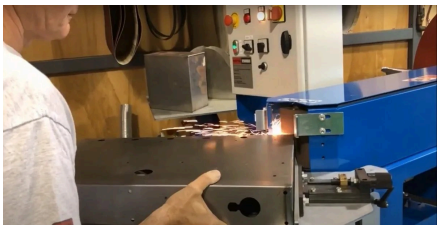

GECAM 131 grinding the corner weld of a steel box



Box corner after weld grinding

TECHNICAL SPECIFICATIONS

GECAM 131 CORNER GRINDER FOR BOX AND DOOR WELDS, CORNERS TO 5-7/8" HIGH

GECAM 131

Hand-fed corner grinder

Model	GECAM 131
Max. corner height	**5-7/8" (150 mm)**
Work table	**23-5/8 × 9-13/16" (600 × 250 mm)**
Table adjustment	Height and inclination by handwheel · squaring guides
Corner radius	**3/64" – 3/8" (R1 – R10 mm) or sharp**
Abrasive belt width × length	5-7/8 × 78-3/4" (150 × 2,000 mm)
Belt speed two speeds	4,724 / 2,362 ft/min (24 / 12 m/s)
Fork rollers	1-15/16 × 5-7/8" (50 × 150 mm)
Motor two speeds	**3.1 / 2 HP (2.3 / 1.5 kW)**
Dimensions L × W × H	28 × 55 × 59" (700 × 1,400 × 1,500 mm)
Weight	**265 lb (120 kg)**

Belt speeds are surface speeds; the corner grinders run at two speeds, the higher for steel and the lower for stainless and aluminum. Metric values in brackets are the manufacturer's figures.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Italy by Gecam — 100 % Italian
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

GECAM 136 · HAND-FED

GECAM 136 CORNER GRINDER FOR BOX AND CABINET WELDS, CORNERS TO 11-13/16" HIGH



MODEL GECAM · GECAM 136 CORNER GRINDER



GECAM 136 grinding the welded corner of a box



GECAM 136 with a box on the work table

Corners to 11-13/16" high (19-11/16" on request) · radius 3/64" – 3/8" or sharp · prismatic guide

The hand-fed corner grinder for taller boxes, cabinets and enclosures: the abrasive belt runs over a fork with two rollers, and the operator slides the corner along it on a 23-5/8 × 15-3/4" table with a prismatic guide. The fork oscillates both in angle and about its pivot, so it grinds the weld flush and leaves a radius from 3/64" to 3/8" (R1 – R10 mm) or a sharp corner. Corners 7-7/8" or 11-13/16" high — 19-11/16" on request — on parts 3-1/8" to 19-11/16" deep, and it also radiuses the edges of flat parts. Two belt speeds: the higher for steel, the lower for stainless steel and aluminum.

STANDARD FEATURES

- ✓ Fixed head with an oscillating two-roller fork: radius 3/64" – 3/8" (R1 – R10 mm) or a sharp corner
- ✓ Abrasive belt 5-7/8 × 78-3/4" (150 × 2,000 mm) at two speeds, 4,724 / 2,362 ft/min (24 / 12 m/s)
- ✓ 23-5/8 × 15-3/4" (600 × 400 mm) work table with prismatic guide
- ✓ Corners 7-7/8" or 11-13/16" (200 / 300 mm) high; parts 3-1/8" – 19-11/16" (80 – 500 mm) deep
- ✓ Also radiuses the edges of flat parts
- ✓ Dust hood; electrics in a sealed box
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Cyclone dust collector
- + Version for corners up to 19-11/16" (500 mm) high
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS · 1 / 2


GECAM 136 CORNER GRINDER FOR BOX AND CABINET WELDS, CORNERS TO 11-13/16" HIGH



GECAM 136 inclined belt head, dust hood and drive motor



GECAM 136 work table, part stop and dust hood

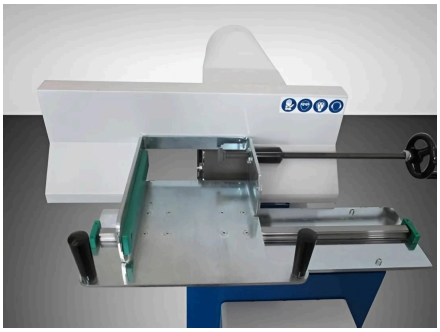

GECAM 136 work table with guides and hand wheel



GECAM 136 belt head with oscillating fork



Abrasive belt and part guide of the GECAM 136




GECAM 136 belt under the work table edge



GECAM 136 grinding the weld of a steel box



Box corner radiused on the GECAM 136

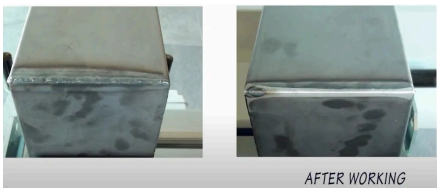

Welded box corner before and after grinding

DETAILS, COMPONENTS AND OPTIONS · 2 / 2

GECAM 136 CORNER GRINDER FOR BOX AND CABINET WELDS, CORNERS TO 11-13/16" HIGH



Box corner after weld grinding

TECHNICAL SPECIFICATIONS

GECAM 136 CORNER GRINDER FOR BOX AND CABINET WELDS, CORNERS TO 11-13/16" HIGH

GECAM 136

Hand-fed corner grinder

Model	GECAM 136
Max. corner height	**7-7/8" or 11-13/16" (200 / 300 mm) · 19-11/16" (500 mm) on request**
Part depth	3-1/8" – 19-11/16" (80 – 500 mm)
Work table	**23-5/8 × 15-3/4" (600 × 400 mm)**
Table adjustment	Prismatic guide
Corner radius	**3/64" – 3/8" (R1 – R10 mm) or sharp**
Abrasive belt width × length	5-7/8 × 78-3/4" (150 × 2,000 mm)
Belt speed two speeds	4,724 / 2,362 ft/min (24 / 12 m/s)
Fork rollers	1-15/16 × 5-7/8" (50 × 150 mm)
Motor two speeds	**3 / 2 HP (2.25 / 1.5 kW)**
Dimensions L × W × H	40 × 47 × 44" (1,006 × 1,200 × 1,130 mm)
Weight	**353 lb (160 kg)**

Belt speeds are surface speeds; the corner grinders run at two speeds, the higher for steel and the lower for stainless and aluminum. Metric values in brackets are the manufacturer's figures.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Italy by Gecam — 100 % Italian
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

GECAM 135 · 1 OR 2 HEADS


GECAM 135 AUTOMATIC CORNER GRINDER FOR WELDED BOXES, EDGES TO 59″



MODEL GECAM · GECAM 135 AUTOMATIC CORNER GRINDER



GECAM 135 two-head version



GECAM 135 grinding head on its carriage

Edges to 31-1/2″ or 59″ · automatic head travel · 1 or 2 heads

Grinds the weld on the outside corner of a welded box or cabinet without the operator holding anything: the box is clamped pneumatically on a large support base, the belt head comes in on a pneumatic carriage and then travels the full length of the edge on recirculating-ball guides at an inverter-set speed, stops at the end and releases the part, so the operator turns it to the next edge and starts again without returning to zero. One head as standard, a two-head version for more output, and a PLUS version with vertical, horizontal and oscillating head movement for radiusing. Edges up to 31-1/2″ or 59″.

STANDARD FEATURES


- ✓ Automatic head travel along the edge; head speed variable by inverter
- ✓ Large base with table support for the part; pneumatic clamping
- ✓ Abrasive belt 5-7/8 × 78-3/4″ (150 × 2,000 mm) pressed on the weld by a pad with contact rollers
- ✓ Belt speed 4,724 / 2,362 ft/min (24 / 12 m/s); 4 HP (3 kW)
- ✓ Working pressure set by bringing the head closer to the part
- ✓ Push-button control as standard
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Touch-screen control
- + Two-head version
- + PLUS version: vertical, horizontal and oscillating head movement for radiusing (touch-screen models)
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

GECAM 135 AUTOMATIC CORNER GRINDER FOR WELDED BOXES, EDGES TO 59”

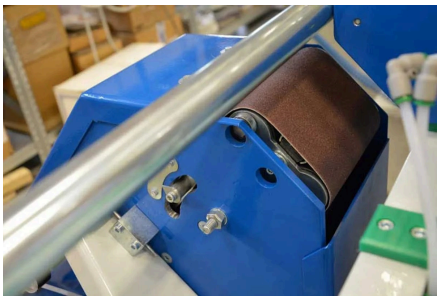

Pad and contact roller pressing the belt on the weld

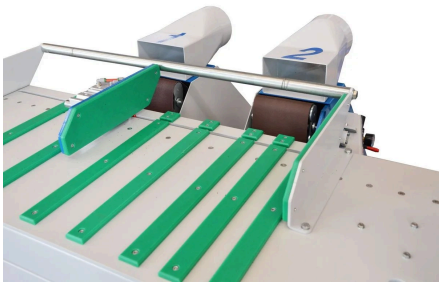

Two grinding heads over the part support with plastic slides



Touch-screen control (optional)



Box edge after weld grinding on the GECAM 135

TECHNICAL SPECIFICATIONS

GECAM 135 AUTOMATIC CORNER GRINDER FOR WELDED BOXES, EDGES TO 59″

GECAM 135

Automatic corner grinder

Model	GECAM 135
Max. edge length two base lengths	**31-1/2″ or 59-1/16″ (800 or 1,500 mm)**
Grinding heads	**1 · 2 on the two-head version**
Abrasive belt width × length	5-7/8 × 78-3/4″ (150 × 2,000 mm)
Belt speed two speeds	4,724 / 2,362 ft/min (24 / 12 m/s)
Contact rollers	1-15/16 × 5-7/8″ (50 × 150 mm)
Head travel	**Automatic, speed by inverter**
Clamping	Pneumatic
Motor	4 HP (3 kW)
Dimensions L × W × H one head	73 × 63 × 59″ (1,850 × 1,600 × 1,500 mm)
Weight	**from 1,058 lb (480 kg)**

Belt speeds are surface speeds; the corner grinders run at two speeds, the higher for steel and the lower for stainless and aluminum. Metric values in brackets are the manufacturer's figures.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Italy by Gecam — 100 % Italian
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

UPPER-CORNER · SIX-HEAD · TUBE-FRAME

UPPER-CORNER, SIX-HEAD AND TUBE-FRAME CORNER GRINDERS, BOXES TO 23-5/8", TUBE TO 3-1/8"



MODEL SPECIAL · GECAM AUTOMATIC UPPER-CORNER GRINDER WITH TWO HEADS



Gecam six-head PLC corner grinder



Gecam four-head corner grinder for 90° tube frames

Recipe-controlled corner grinding · boxes and 90° tube frames · built to the part

For corner welds in series, Gecam builds grinders that run from a stored recipe — the operator places the part and starts it. The upper-corner grinder brings two vertical heads down on the two top corners of a box at once and presses the belt on the weld with pads; time and pressure are set on the touch screen by how much weld there is to remove. The six-head grinder cleans the outside edges of boxes up to 5-7/8" high two corners at a time, about 30 seconds a pair. The four-head tube-frame grinder removes the welds on 90° corners of square-tube frames — table legs and frames from 3/4" to 3-1/8" tube — on all four sides in one cycle.

STANDARD FEATURES

- ✓ Upper-corner grinder: 2 heads with pads press a 1-3/8" (35 mm) belt on both top corners at once; time and pressure set on the touch screen
- ✓ Six-head grinder: 4 lower heads in pairs at 90° with rubber pads and 2 upper heads with oscillating rubber rollers; the heads close in pneumatically and travel along the corner
- ✓ Tube-frame grinder: 2 mirrored vertical heads for top and bottom and 2 horizontal heads for the sides; pneumatic belt tension; side heads travel vertically to use the whole belt
- ✓ PLC recipes with the data of each part; dust drawn off at the point of work
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS


UPPER-CORNER, SIX-HEAD AND TUBE-FRAME CORNER GRINDERS, BOXES TO 23-5/8", TUBE TO 3-1/8"



Touch-screen control of the upper-corner grinder

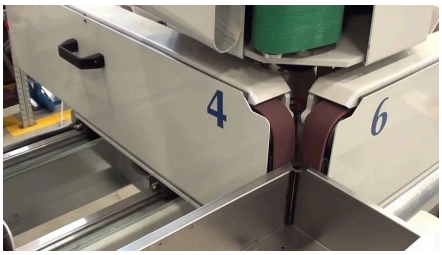

Lower heads of the six-head grinder at a box corner

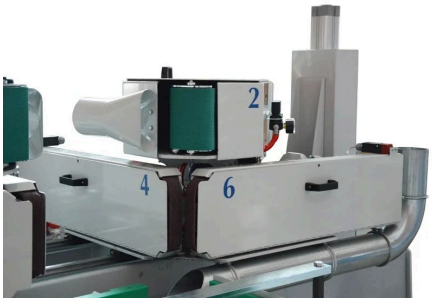

Rubber pads pressing the belts on two corners at once



Frame support of the tube corner grinder



Side heads of the tube corner grinder



Welded box corner before grinding



The same corner after grinding

TECHNICAL SPECIFICATIONS

UPPER-CORNER, SIX-HEAD AND TUBE-FRAME CORNER GRINDERS, BOXES TO 23-5/8", TUBE TO 3-1/8"

SPECIAL CORNER GRINDERS

PLC-controlled corner grinders for series work

Model	Upper-corner grinder	Six-head grinder	Tube-frame grinder
Workpiece	**Boxes, working width 7-7/8" / 23-5/8" (200 / 600 mm)**	**Boxes up to 5-7/8" (150 mm) high**	**Square tube 13/16" – 3-1/8" (20 – 80 mm) · frames from 17-11/16" (450 mm)**
Grinding heads	**2, vertical, on the two top corners**	**6: 4 lower in pairs at 90° + 2 upper**	**4: 2 vertical + 2 horizontal**
Corners per cycle	2	2, about 30 s per pair	1 corner, 4 sides
Abrasive belt width × length	1-3/8 × 60-7/16" (35 × 1,535 mm)	—	5-7/8 × 78-3/4" (150 × 2,000 mm)
Belt speed	4,724 / 2,362 ft/min (24 / 12 m/s)	—	4,921 ft/min (25 m/s)
Control	**Touch-screen PLC: time and pressure**	**PLC recipes**	**Touch-screen PLC: time for each head**

Special machines are configured for the part: send a drawing of the box or frame and the weld to be removed for a quote. Metric values in brackets are the manufacturer's figures.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Made in Italy by Gecam — 100 % Italian
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

CWS 200 · CWS 300 · WELCOR 400 X · 3 MODELS

CWS 200 · CWS 300 · WELCOR 400 X 1-AXIS CORNER WELDERS, CORNERS TO 15-3/4" HIGH



MODEL 1-AXIS · GECAM CWS 300 ONE-AXIS CORNER WELDING MACHINE



TIG torch welding a corner along the copper guide



Welded corner

One axis · corners 7-7/8", 11-13/16" or 15-3/4" high · parts to 59" square · TIG or plasma, 0 – 47 in/min

The torch is driven along one axis at a set speed and welds the straight corner seam of bent boxes, cabinets, trays and enclosures in mild steel, stainless steel and aluminum — with a TIG or a plasma source, instead of by hand. The operator places the part on the table with its corner against the external copper squaring guide and presses the lock button: a pneumatic cylinder presses it from inside against the copper guides, which hold the corner square and keep the heat of the part down. Start, and the machine welds the corner with the parameters of the recipe; release, and the next part goes in. The CWS 200 and CWS 300 take parts from 3-15/16 × 3-15/16" to 59-1/16 × 59-1/16" with corners 7-7/8" or 11-13/16" high; the WELCOR 400 X welds corners up to 15-3/4" high on parts to 39-3/8 × 39-3/8".

STANDARD FEATURES

- ✓ Welded steel base with guides that carry and move the torch unit
- ✓ Torch speed variable 0 – 47 in/min (0 – 20 mm/s), with acceleration and deceleration ramps
- ✓ Pneumatic clamping from inside against copper squaring guides that keep the heat of the part down
- ✓ Copper groups: outer unit 7-7/8" or 11-13/16" (200 or 300 mm) high; inner unit 1-15/16", 2-15/16", 3-15/16", 4-15/16", 5-7/8", 7-7/8", 11-13/16" (50, 75, 100, 125, 150, 200, 300 mm)
- ✓ CWS recipes: torch speed and its acceleration and deceleration ramps on the touch panel; welding current, start and end current ramps and gas pre-flow and post-flow on the welding power source
- ✓ WELCOR 400 X: numerical control storing 10 work parameters per job; signals a missing torch, gas, power or part
- ✓ Mild steel, stainless steel and aluminum; works with a TIG or a plasma welding power source
- ✓ CWS: work table 32-5/16 × 32-5/16" (820 × 820 mm); gap between the edges .008" (0.2 mm) at most
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Inner copper groups with cooling — recommended to avoid dark marks on the parts
- + Special inner copper group designed for your part
- + Work table 39-3/8 × 39-3/8" (1,000 × 1,000 mm) (WELCOR 400 X)
- + Lorch T 250 TIG power source with cooling unit: T 250 DC for mild and stainless steel, T 250 AC/DC also for aluminum
- + Torch group with 9′ 10" (3 m) cable
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS


CWS 200 · CWS 300 · WELCOR 400 X 1-AXIS CORNER WELDERS, CORNERS TO 15-3/4" HIGH




Copper groups that hold the corner and draw off the heat

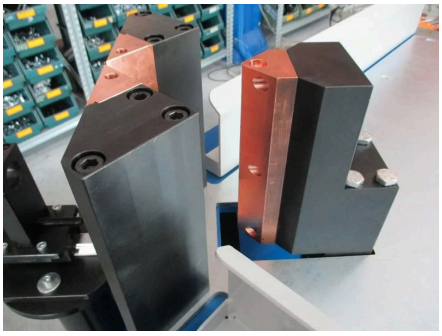


External copper squaring guide the corner rests against

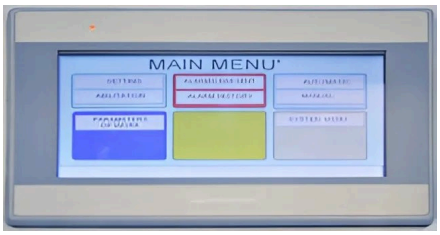


Touch panel of the CWS

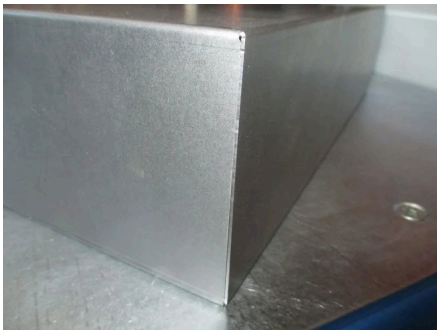


Bent corner before welding

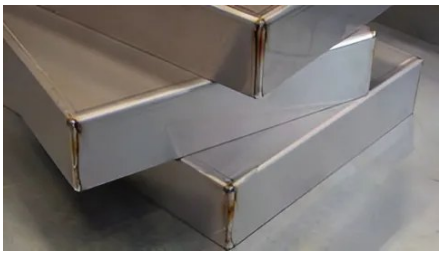

Corner-welded boxes

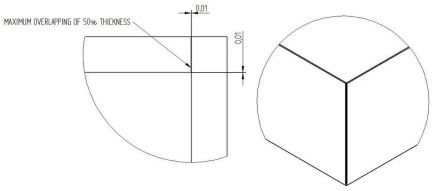

How the corner is bent for welding: the edges .0004" (0.01 mm) apart and centred, or overlapping by half the sheet thickness at most

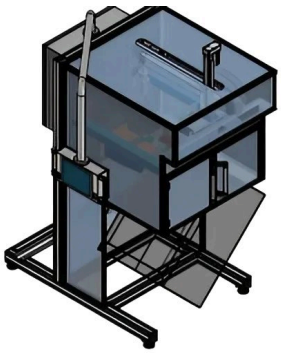

GECAM WELCOR 400 corner welder



Lorch T-series TIG power source — GECAM offers the T 250 with its corner welders

TECHNICAL SPECIFICATIONS

CWS 200 · CWS 300 · WELCOR 400 X 1-AXIS CORNER WELDERS, CORNERS TO 15-3/4" HIGH

1-AXIS CORNER WELDERS

CWS 200 · CWS 300 · WELCOR 400 X

Model	CWS 200	CWS 300	WELCOR 400 X
Torch axes	1 — X	1 — X	1 — X
Max. corner height	**7-7/8" (200 mm)**	**11-13/16" (300 mm)**	**15-3/4" (400 mm)**
Part size, min.	3-15/16 × 3-15/16" (100 × 100 mm)	3-15/16 × 3-15/16" (100 × 100 mm)	3-15/16 × 3-15/16" (100 × 100 mm)
Part size, max.	**59-1/16 × 59-1/16" (1,500 × 1,500 mm)**	**59-1/16 × 59-1/16" (1,500 × 1,500 mm)**	**39-3/8 × 39-3/8" (1,000 × 1,000 mm)**
Welding speed	**0 – 47 in/min (0 – 20 mm/s), variable**	**0 – 47 in/min (0 – 20 mm/s), variable**	**0 – 47 in/min (0 – 20 mm/s), variable**
Max. gap between the edges	.008" (0.2 mm)	.008" (0.2 mm)	—
Copper groups	Outer 7-7/8" (200 mm) · inner 1-15/16" – 11-13/16" (50 – 300 mm), 7 heights	Outer 11-13/16" (300 mm) · inner 1-15/16" – 11-13/16" (50 – 300 mm), 7 heights	Outer 7-7/8" or 11-13/16" (200 or 300 mm) · inner 1-15/16" – 11-13/16" (50 – 300 mm), 7 heights
Welding process	**TIG or plasma**	**TIG or plasma**	**TIG or plasma**
Materials	Mild steel, stainless steel, aluminum	Mild steel, stainless steel, aluminum	Mild steel, stainless steel, aluminum
Clamping	Pneumatic, from inside, against copper squaring guides	Pneumatic, from inside, against copper squaring guides	Pneumatic, from inside, against copper squaring guides
Control	Touch panel, parameters stored as recipes	Touch panel, parameters stored as recipes	Numerical control, 10 work parameters stored per job
Work table	32-5/16 × 32-5/16" (820 × 820 mm)	32-5/16 × 32-5/16" (820 × 820 mm)	—

Corner height is the longest corner seam the torch welds, on each axis. The welding power source is not included: GECAM offers the Lorch T 250 TIG source, and the machines also work with a plasma source. Bend the corner so the two edges meet on it — .0004" (0.01 mm) apart and centred on the corner — or, where the bend does not allow it, so they overlap by half the sheet thickness at most. Metric values in brackets are the manufacturer's figures.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Italy by Gecam — 100 % Italian
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

CWS 300 XY · WELCOR 400 XY · 2 MODELS


CWS 300 XY · WELCOR 400 XY 2-AXIS CORNER WELDERS, PARTS TO 59 × 59″



MODEL 2-AXIS · GECAM CWS 300 XY TWO-AXIS CORNER WELDING MACHINE



Box corner clamped against the copper groups, TIG torch at the seam



Torch and copper corner group of the CWS 300 XY

Two axes, X and Y · CWS 300 XY parts to 59″ square · WELCOR 400 XY corners 15-3/4″ on X, 4-5/16″ on Y

Here the torch is driven on two axes, X and Y. The CWS 300 XY takes parts from 3-15/16 × 3-15/16″ to 59-1/16 × 59-1/16″ with corners 7-7/8″ to 11-13/16″ high; its touch panel shows the X and Y positions, counts the parts and calls up the recipe. The WELCOR 400 XY welds corners up to 15-3/4″ on X and 4-5/16″ on Y — a seam that runs in two directions, in one cycle — on parts to 39-3/8 × 39-3/8″. The rest works as on the one-axis machines: the part is clamped pneumatically from inside against copper squaring guides, the torch welds at 0 to 47 in/min with a TIG or a plasma source, and the parameters of each part are stored.

STANDARD FEATURES


- ✓ Torch driven on two axes, X and Y; on the WELCOR 400 XY corners up to 15-3/4″ (400 mm) on X and 4-5/16″ (110 mm) on Y
- ✓ Welding speed variable 0 – 47 in/min (0 – 20 mm/s), with acceleration and deceleration ramps
- ✓ Welded steel base with guides that carry and move the torch unit
- ✓ Pneumatic clamping from inside against copper squaring guides that keep the heat of the part down
- ✓ Copper groups: outer unit 7-7/8″ or 11-13/16″ (200 or 300 mm) high; inner unit 1-15/16″, 2-15/16″, 3-15/16″, 4-15/16″, 5-7/8″, 7-7/8″, 11-13/16″ (50, 75, 100, 125, 150, 200, 300 mm)
- ✓ CWS 300 XY: touch panel with the X and Y positions, part counter and recipe number; welding current, current ramps and gas flow set on the welding power source
- ✓ WELCOR 400 XY: numerical control storing 10 work parameters per job; signals a missing torch, gas, power or part
- ✓ Mild steel, stainless steel and aluminum; TIG or plasma
- ✓ CWS 300 XY: work table 32-5/16 × 32-5/16″ (820 × 820 mm)
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Work table 39-3/8 × 39-3/8″ (1,000 × 1,000 mm)
- + Special inner copper group designed for your part
- + Inner copper group with cooling
- + Lorch T 250 TIG power source with cooling unit: T 250 DC for mild and stainless steel, T 250 AC/DC also for aluminum
- + Torch group with 9′ 10″ (3 m) cable
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS


CWS 300 XY · WELCOR 400 XY 2-AXIS CORNER WELDERS, PARTS TO 59 × 59″

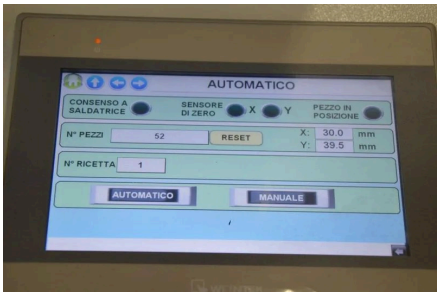

Touch panel of the CWS 300 XY: X and Y positions, part counter, recipe number

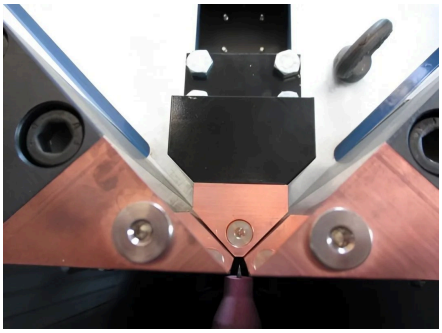

Inner copper group pressing the corner from inside, torch below

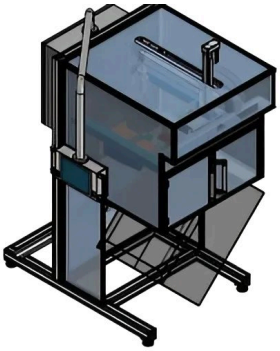

GECAM WELCOR 400 corner welder

TECHNICAL SPECIFICATIONS

CWS 300 XY · WELCOR 400 XY 2-AXIS CORNER WELDERS, PARTS TO 59 × 59″

2-AXIS CORNER WELDERS

CWS 300 XY · WELCOR 400 XY

Model	CWS 300 XY	WELCOR 400 XY
Torch axes	**2 — X, Y**	**2 — X, Y**
Max. corner height	**7-7/8″ – 11-13/16″ (200 – 300 mm)**	**X 15-3/4″ (400 mm) · Y 4-5/16″ (110 mm)**
Part size, min.	3-15/16 × 3-15/16″ (100 × 100 mm)	3-15/16 × 3-15/16″ (100 × 100 mm)
Part size, max.	**59-1/16 × 59-1/16″ (1,500 × 1,500 mm)**	**39-3/8 × 39-3/8″ (1,000 × 1,000 mm)**
Welding speed	**0 – 47 in/min (0 – 20 mm/s), variable**	**0 – 47 in/min (0 – 20 mm/s), variable**
Copper groups	Outer 7-7/8″ or 11-13/16″ (200 or 300 mm) · inner 1-15/16″ – 11-13/16″ (50 – 300 mm), 7 heights	Outer 7-7/8″ or 11-13/16″ (200 or 300 mm) · inner 1-15/16″ – 11-13/16″ (50 – 300 mm), 7 heights
Welding process	**TIG or plasma**	**TIG or plasma**
Materials	Mild steel, stainless steel, aluminum	Mild steel, stainless steel, aluminum
Clamping	Pneumatic, from inside, against copper squaring guides	Pneumatic, from inside, against copper squaring guides
Control	Touch panel: X and Y positions, part counter, recipes	Numerical control, 10 work parameters stored per job
Work table	32-5/16 × 32-5/16″ (820 × 820 mm)	—
Work table, to order	39-3/8 × 39-3/8″ (1,000 × 1,000 mm)	39-3/8 × 39-3/8″ (1,000 × 1,000 mm)

Corner height is the longest corner seam the torch welds, on each axis. The welding power source is not included: GECAM offers the Lorch T 250 TIG source, and the machines also work with a plasma source. Bend the corner so the two edges meet on it — .0004″ (0.01 mm) apart and centred on the corner — or, where the bend does not allow it, so they overlap by half the sheet thickness at most. Metric values in brackets are the manufacturer's figures.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Made in Italy by Gecam — 100 % Italian
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

WELCOR 400 XYZ · 3 AXES


WELCOR 400 XYZ 3-AXIS CORNER WELDER FOR SEAMS IN THREE DIRECTIONS, PARTS TO 39-3/8 × 39-3/8″

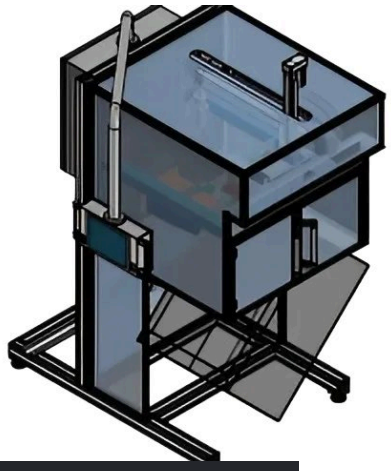

MODEL 3-AXIS · GECAM WELCOR 400 CORNER WELDER



WELCOR 400 front view with the largest box, 39-3/8 × 39-3/8″ (1,000 × 1,000 mm), corner up — machine 43-5/16″ (1,100 mm) wide



WELCOR 400 side view: torch axes, welding torch and pneumatic block — machine 87″ (2,210 mm) high, 61-3/4″ (1,569 mm) deep

Three axes, X, Y and Z · corners 15-3/4″ X, 4-5/16″ Y, 1-15/16″ Z · parts to 39-3/8″ square

With three driven axes — X, Y and Z — the torch follows a corner seam that runs in three directions and welds it in one cycle: up to 15-3/4″ on X, 4-5/16″ on Y and 1-15/16″ on Z, on parts from 3-15/16 × 3-15/16″ to 39-3/8 × 39-3/8″. The numerical control stores the work parameters of each job — torch speed with its acceleration and deceleration ramps, the welding speed set on the machine, interruptions of the weld, welding power and welding speed ramps up and down, power supply, shielding gas and cooling of the part during welding — and the machine signals a missing torch, welding gas, gas protection, welding power, electrical connection or part. The part is clamped pneumatically from inside against copper squaring guides; TIG or plasma, 0 to 47 in/min.

STANDARD FEATURES

- ✓ Torch driven on three axes: corners up to 15-3/4″ (400 mm) on X, 4-5/16″ (110 mm) on Y and 1-15/16″ (50 mm) on Z
- ✓ Welding speed variable 0 – 47 in/min (0 – 20 mm/s), adjusted directly on the machine
- ✓ Ten work parameters stored per job: torch speed, acceleration and deceleration ramps, welding speed, weld interruption, welding power ramps up and down, welding speed ramps up and down, power supply on/off, shielding gas on/off, cooling of the part during welding
- ✓ Signals a missing torch, welding gas, gas protection, welding power, electrical connection or part
- ✓ Welded steel base with guides that carry and move the torch unit
- ✓ Pneumatic clamping from inside against copper squaring guides; outer copper unit 7-7/8″ or 11-13/16″ (200 or 300 mm), inner unit 1-15/16″, 2-15/16″, 3-15/16″, 4-15/16″, 5-7/8″, 7-7/8″, 11-13/16″ (50, 75, 100, 125, 150, 200, 300 mm)
- ✓ Mild steel, stainless steel and aluminum; TIG or plasma
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Work table 39-3/8 × 39-3/8″ (1,000 × 1,000 mm)
- + Special inner copper group designed to the drawing of your part
- + Cooling unit for the inner copper group
- + External cooling unit
- + Lorch T 250 TIG power source: T 250 DC for mild and stainless steel, T 250 AC/DC also for aluminum
- + Torch group with 9′ 10″ (3 m) cable
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

TECHNICAL SPECIFICATIONS

WELCOR 400 XYZ 3-AXIS CORNER WELDER FOR SEAMS IN THREE DIRECTIONS, PARTS TO 39-3/8 × 39-3/8″

3-AXIS CORNER WELDER

WELCOR 400 XYZ

Model	WELCOR 400 XYZ
Torch axes	**3 — X, Y, Z**
Max. corner height, X axis	**15-3/4″ (400 mm)**
Max. corner height, Y axis	**4-5/16″ (110 mm)**
Max. corner height, Z axis	**1-15/16″ (50 mm)**
Part size, min.	3-15/16 × 3-15/16″ (100 × 100 mm)
Part size, max.	**39-3/8 × 39-3/8″ (1,000 × 1,000 mm)**
Welding speed	**0 – 47 in/min (0 – 20 mm/s), variable**
Copper groups	Outer 7-7/8″ or 11-13/16″ (200 or 300 mm) · inner 1-15/16″ – 11-13/16″ (50 – 300 mm), 7 heights
Welding process	**TIG or plasma**
Materials	Mild steel, stainless steel, aluminum
Clamping	Pneumatic, from inside, against copper squaring guides
Control	Numerical control, 10 work parameters stored per job
Signals	Missing torch, welding gas, gas protection, welding power, electrical connection or part
Work table, to order	39-3/8 × 39-3/8″ (1,000 × 1,000 mm)

Corner height is the longest corner seam the torch welds, on each axis. The welding power source is not included: GECAM offers the Lorch T 250 TIG source, and the machines also work with a plasma source. Bend the corner so the two edges meet on it — .0004″ (0.01 mm) apart and centred on the corner — or, where the bend does not allow it, so they overlap by half the sheet thickness at most. Metric values in brackets are the manufacturer's figures.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Made in Italy by Gecam — 100 % Italian
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

WELCOR 400 XYZ-Φ · 4 AXES


WELCOR 400 XYZ-Φ 4-AXIS CORNER WELDER WITH LASER SEAM READING, PARTS TO 39-3/8 × 39-3/8″

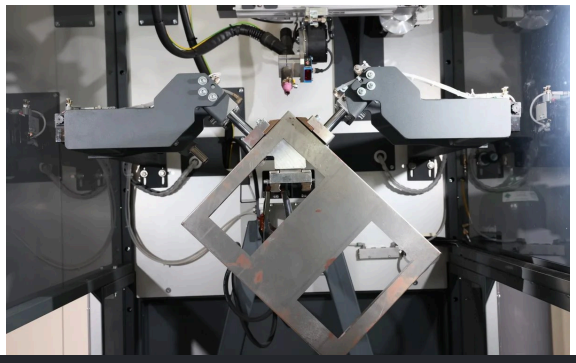

MODEL 4-AXIS · GECAM WELCOR 400 4-AXIS WELDING THE CORNER OF A SQUARE FRAME



Laser sensor beside the TIG torch on the rotary actuator



Pneumatic clamps and copper pads holding the corner

Four axes, X, Y, Z and torch rotation · laser seam reading · parts to 39-3/8″ square · 0 – 47 in/min

The three axes of the WELCOR 400 XYZ and a fourth: the torch is mounted on a rotary actuator that sets its angle in each phase of the weld, from vertical to about 120° as the job needs. Before it welds, the torch runs along the weld line while a laser sensor beside it checks that the edges are straight and how long they are; the machine memorizes the path and then welds it — a self-learning system that finds the corners by itself. Programs are saved for repeat work, the automatic welding program makes the machine easy to run even for operators who are not welders, and the color touch screen draws the welding process to help pick the right parameters. Pneumatic clamping positions the flaps; modular copper pads, matched to the size of the box, carry off the heat and limit burning of the part. Parts from 3-15/16 × 3-15/16″ to 39-3/8 × 39-3/8″, the smallest box 1-15/16″ high; torch path up to 15-3/4 × 1-7/8 × 4-7/16″.

STANDARD FEATURES

- ✓ Four axes: X, Y, Z and torch rotation Φ — travel 15-3/4″ (400 mm) on X, 4-5/16″ (110 mm) on Y, 7-7/8″ (200 mm) on Z
- ✓ Torch on a rotary actuator, 0 – 90°: its angle is set for each phase of the weld, from vertical to about 120° to the job
- ✓ Laser sensor beside the torch: the torch runs the weld line first, the laser checks the straightness and length of the edges, the path is memorized, then welded
- ✓ Color touch screen with a drawing of the welding process; programs saved for repeat parts; automatic welding program for operators who are not welders
- ✓ Ten work parameters per job — torch speed and its ramps, welding speed, weld interruption, welding power and speed ramps, power supply, shielding gas, cooling of the part
- ✓ Signals a missing torch, welding gas, gas protection, welding power, electrical connection or part
- ✓ Pneumatic clamping that positions the flaps; modular copper groups — aluminum support and copper unit — 3/8″, 13/16″, 1″, 1-3/16″, 1-15/16″, 3-15/16″, 7-7/8″ (10, 20, 25, 30, 50, 100, 200 mm) thick, matched to the box
- ✓ Welding speed variable 0 – 47 in/min (0 – 20 mm/s)
- ✓ Mild steel, stainless steel and aluminum; TIG or plasma
- ✓ Overall dimensions 59 × 47 × 98″ (1,500 × 1,200 × 2,500 mm)
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Lorch T 250 TIG power source: T 250 DC for mild and stainless steel, T 250 AC/DC also for aluminum
- + External cooling unit
- + Torch group with 9′ 10″ (3 m) cable
- + Special inner copper group designed to the drawing of your part
- + Cooling unit for the inner copper group
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS


WELCOR 400 XYZ-Φ 4-AXIS CORNER WELDER WITH LASER SEAM READING, PARTS TO 39-3/8 × 39-3/8"




Control panel with color touch screen and signal tower

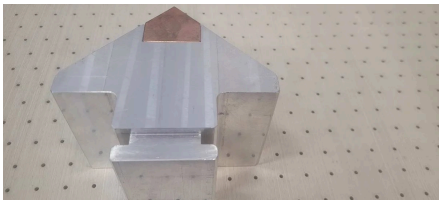

Copper group: aluminum support and copper unit, 3/8" to 7-7/8" (10 – 200 mm) thick

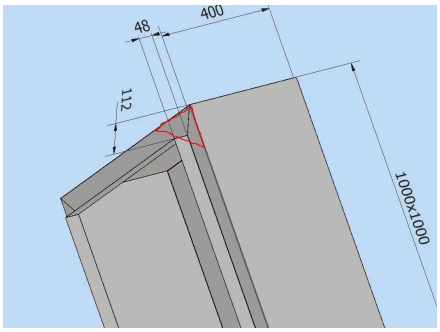

Largest torch path, 15-3/4 × 1-7/8 × 4-7/16" (400 × 48 × 112 mm), on a box up to 39-3/8 × 39-3/8" (1,000 × 1,000 mm)



WELCOR 400 side view: torch axes, welding torch and pneumatic block — machine 87" (2,210 mm) high, 61-3/4" (1,569 mm) deep

TECHNICAL SPECIFICATIONS

WELCOR 400 XYZ-Φ 4-AXIS CORNER WELDER WITH LASER SEAM READING, PARTS TO 39-3/8 × 39-3/8″

4-AXIS CORNER WELDER

WELCOR 400 XYZ-Φ

Model	WELCOR 400 XYZ-Φ
Torch axes	**4 — X, Y, Z and torch rotation Φ**
Max. corner height, X axis	**15-3/4″ (400 mm)**
Max. corner height, Y axis	**4-5/16″ (110 mm)**
Max. corner height, Z axis	**1-15/16″ (50 mm)**
Axis travel	X 15-3/4″ · Y 4-5/16″ · Z 7-7/8″ (400 · 110 · 200 mm)
Working range of an axis	3/8″ – 15-3/4″ (10 – 400 mm)
Torch rotation	**0 – 90° · from vertical to about 120° to the job**
Part size, min.	3-15/16 × 3-15/16″ (100 × 100 mm) · smallest box 1-15/16″ (50 mm) high
Part size, max.	**39-3/8 × 39-3/8″ (1,000 × 1,000 mm)**
Max. torch path	15-3/4 × 1-7/8 × 4-7/16″ (400 × 48 × 112 mm)
Welding speed	**0 – 47 in/min (0 – 20 mm/s), variable**
Seam reading	**Laser sensor beside the torch: edges checked, path memorized, then welded**
Control	Color touch screen with a drawing of the welding process · programs saved · automatic welding program
Work parameters	10 per job
Signals	Missing torch, welding gas, gas protection, welding power, electrical connection or part
Clamping	Pneumatic, positioning the flaps
Copper groups	Modular: aluminum support + copper unit, 3/8″ – 7-7/8″ (10 – 200 mm) thick
Welding process	**TIG or plasma**
Materials	Mild steel, stainless steel, aluminum
Dimensions L × W × H	59 × 47 × 98″ (1,500 × 1,200 × 2,500 mm)

Corner height is the longest corner seam the torch welds, on each axis. The welding power source is not included: GECAM offers the Lorch T 250 TIG source, and the machines also work with a plasma source. Bend the corner so the two edges meet on it — .0004″ (0.01 mm) apart and centred on the corner — or, where the bend does not allow it, so they overlap by half the sheet thickness at most. Metric values in brackets are the manufacturer's figures. The WELCOR 4-axis brochure gives 5-7/8 × 5-7/8″ (150 × 150 mm) as the smallest workable part, the technical specification 3-15/16 × 3-15/16″ (100 × 100 mm) — send us the part to confirm.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Italy by Gecam — 100 % Italian
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

141 · 144 · 2 MODELS

141 · 144 ORBITAL PIPE SANDERS FOR STRAIGHT AND BENT TUBE, Ø3/8" – 5-7/8"



MODEL 141 · EUROFINTEC 141 ORBITAL PIPE SANDER, Ø3/8" – 3-1/8"



Eurofintec 144 orbital pipe sander, Ø9/16" – 5-7/8", with feeder (optional)



141 sanding a bent tube

Round and oval tube Ø3/8" – 5-7/8" · straight and bent · two orbiting belts

The tube passes through the head while two abrasive belts orbit around it, so round and oval tube — straight or bent — is ground, satin-finished or cleaned all round without the operator turning it. The tube only moves along its axis, which gives an even finish and spares the operator. Belt tension and centering are electronic, belt speed is variable. The compact 141 takes tube from Ø3/8" to Ø3-1/8" — handrail, furniture and frame tube; the 144 Ø9/16" to Ø5-7/8". Feeding and extraction units are available, with reverse feed that brings the tube back for a second pass.

STANDARD FEATURES

- ✓ Two abrasive belts on an orbital wheel inside the head — the tube is worked all round without being turned
- ✓ Round and elliptical tube, straight and bent
- ✓ Electronic belt tensioning and centering
- ✓ Variable belt speed, 1,969 – 4,921 ft/min (10 – 25 m/s)
- ✓ 141: 2 belts 13/16 × 23-5/8" (20 × 600 mm), 2 HP (1.5 kW) · 144: 2 belts 1-15/16 × 43-5/16" (50 × 1,100 mm), 4 HP (3 kW)
- ✓ Connection for a dust extractor at the point of work
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Automatic feeding and extraction units
- + Reverse feed that returns the tube for a second pass
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

141 · 144 — TECHNICAL SPECIFICATIONS


Model	141	144
Tube Ø round and oval, straight and bent	**Ø3/8" – 3-1/8" (10 – 80 mm)**	**Ø9/16" – 5-7/8" (15 – 150 mm)**
Abrasive belts on an orbital wheel	**2 × 13/16 × 23-5/8" (20 × 600 mm)**	**2 × 1-15/16 × 43-5/16" (50 × 1,100 mm)**
Belt speed variable	1,969 – 4,921 ft/min (10 – 25 m/s)	1,969 – 4,921 ft/min (10 – 25 m/s)
Motor	**2 HP (1.5 kW)**	**4 HP (3 kW)**
Dimensions L × W × H	24 × 26 × 44" (620 × 650 × 1,110 mm)	47 × 26 × 49" (1,200 × 650 × 1,250 mm)
Weight	**408 lb (185 kg)**	**463 lb (210 kg)**

Tube capacities are outside diameters. Metric values in brackets are the manufacturer's figures; belt speeds are surface speeds. Dimensions are overall L × W × H.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

141 · 144 ORBITAL PIPE SANDERS FOR STRAIGHT AND BENT TUBE, Ø3/8" – 5-7/8"

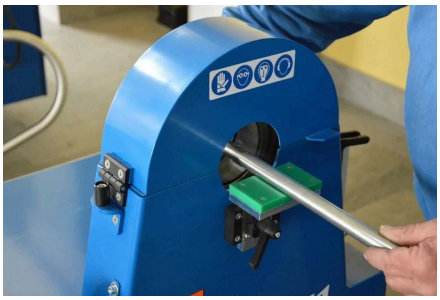

141 sanding small-diameter tube

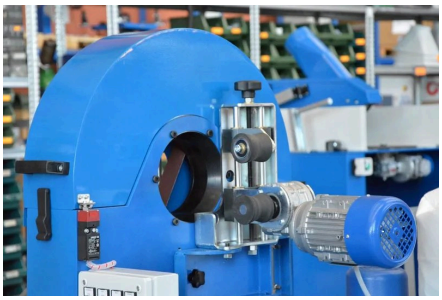

Automatic feeder kit on the 144 (optional)



144 control box

128 S · 128 SL · 2 MODELS


128 S · 128 SL SINGLE-HEAD CENTRELESS PIPE AND BAR SANDERS, Ø3/16" – 5-7/8"



MODEL 128 · EUROFINTEC 128 SL CENTRELESS PIPE SANDER



128 SL sanding a tube

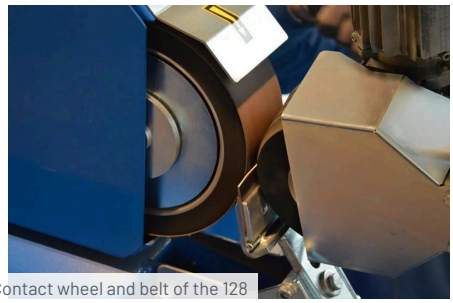

Contact wheel and belt of the 128

Round bar and tube Ø3/16" – 5-7/8" · centreless · single head · dry or wet

Single-head centreless belt grinders for satin-finishing and polishing round bar and tube: the part lies on a work rest and a grooved rubber wheel turns it against the abrasive belt while it is pushed through, so the whole surface is finished evenly along its length. The rubber wheel's speed is set for each diameter and the belt runs at two speeds. The 128 S takes Ø3/16" to Ø4-5/16" on a 2-15/16" belt and the 128 SL Ø3/16" to Ø5-7/8" on a 5-7/8" belt, both up to 39" long without extra supports. Dry or wet.

STANDARD FEATURES


- ✓ Centreless group with grooved rubber wheel; part rotation set electronically for the diameter, 15 – 75 rpm
- ✓ Two belt speeds: 2,953 / 5,906 ft/min (15 / 30 m/s); belt tensioning and centering
- ✓ 128 S: abrasive belt 2-15/16 × 78-3/4" (75 × 2,000 mm) for Ø3/16" – 4-5/16" · 128 SL: 5-7/8 × 78-3/4" (150 × 2,000 mm) for Ø3/16" – 5-7/8"
- ✓ Contact wheel Ø7-7/8" (200 mm)
- ✓ Parts up to 39-3/8" (1 m) long without support; extra support guides for longer parts
- ✓ Electrics in a sealed metal box
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Wet version with coolant on the belt
- + Extra work support guides for long parts
- + Contact wheels in other diameters
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

128 S · 128 SL SINGLE-HEAD CENTRELESS PIPE AND BAR SANDERS, Ø3/16" – 5-7/8"

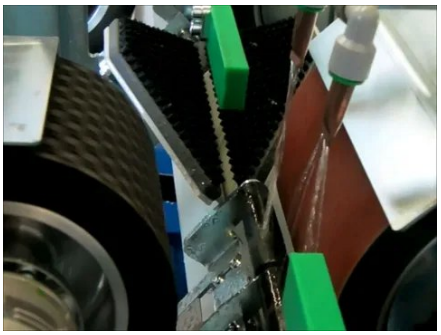

Wet version: coolant on the belt (optional)

TECHNICAL SPECIFICATIONS

128 S · 128 SL SINGLE-HEAD CENTRELESS PIPE AND BAR SANDERS, Ø3/16" – 5-7/8"

128 S · 128 SL

Single-head centreless pipe and bar sanders

Model	128 S	128 SL
Bar and tube Ø	**Ø3/16" – 4-5/16" (5 – 110 mm)**	**Ø3/16" – 5-7/8" (5 – 150 mm)**
Grinding heads	1	1
Abrasive belt width × length	**2-15/16 × 78-3/4" (75 × 2,000 mm)**	**5-7/8 × 78-3/4" (150 × 2,000 mm)**
Contact wheel Ø × width	7-7/8 × 2-15/16" (200 × 75 mm)	7-7/8 × 5-7/8" (200 × 150 mm)
Belt speed two speeds	2,953 / 5,906 ft/min (15 / 30 m/s)	2,953 / 5,906 ft/min (15 / 30 m/s)
Part rotation rubber wheel, variable	23 – 115 ft/min (7 – 35 m/min)	23 – 115 ft/min (7 – 35 m/min)
Max. length without support	39-3/8" (1,000 mm)	39-3/8" (1,000 mm)
Motor	**4.4 / 3.4 HP (3.3 / 2.5 kW)**	**4.4 / 3.4 HP (3.3 / 2.5 kW)**
Dimensions L × W × H	59 × 26 × 57" (1,500 × 650 × 1,450 mm)	59 × 28 × 63" (1,500 × 700 × 1,600 mm)
Weight	**309 lb (140 kg)**	**–**

Tube capacities are outside diameters. Metric values in brackets are the manufacturer's figures; belt speeds are surface speeds. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Italy by Gecam — 100 % Italian
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

128 DL · 2 HEADS


128 DL TWO-HEAD CENTRELESS PIPE AND BAR SANDER, Ø3/8" – 5-7/8"



MODEL 128 · EUROFINTEC 128 DL TWO-HEAD CENTRELESS SANDER



The two heads of the 128 DL

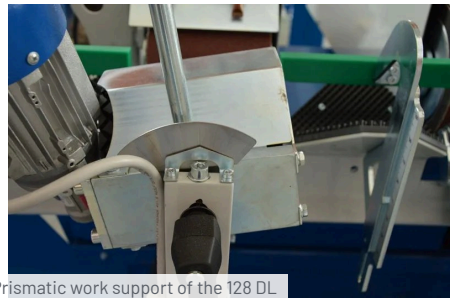

Prismatic work support of the 128 DL

Round bar and tube Ø3/8" – 5-7/8" · two heads in line · two grits in one pass · dry or wet

The two-head centreless sander for production finishing of round bar and tube: two independently controlled heads in line, so two grits — roughing and finishing, or two finishing steps — work in one pass. The part lies on a prismatic work support with an anti-friction lining, set by handwheel, and a grooved rubber wheel turns it against the belts while it is pushed through, so the whole surface is finished evenly along its length. Part rotation 20 – 100 rpm, set electronically for the diameter; two belt speeds. Bar and tube Ø3/8" to Ø5-7/8", dry or wet.

STANDARD FEATURES

- ✓ Two independently controlled heads in line, each with a 5-7/8 × 78-3/4" (150 × 2,000 mm) belt: two grits in one pass
- ✓ Centreless group with grooved rubber wheel; part rotation set electronically for the diameter, 20 – 100 rpm
- ✓ Two belt speeds: 2,953 / 5,906 ft/min (15 / 30 m/s); belt tensioning and centering
- ✓ Contact wheels Ø7-7/8" (200 mm)
- ✓ Prismatic work support with anti-friction lining, set by handwheel; 3 support accessories included
- ✓ Electrics in a sealed metal box
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Wet version with coolant on the belts
- + Contact wheels in other diameters
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

128 DL TWO-HEAD CENTRELESS PIPE AND BAR SANDER, Ø3/8" – 5-7/8"



Contact wheel and belt of the 128

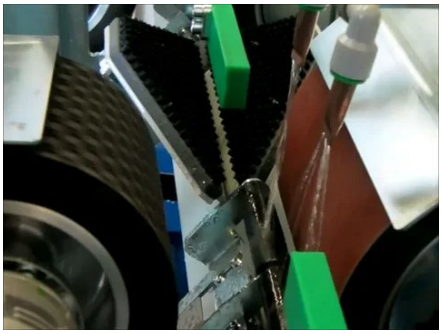

Wet version: coolant on the belt (optional)

TECHNICAL SPECIFICATIONS

128 DL TWO-HEAD CENTRELESS PIPE AND BAR SANDER, Ø3/8" – 5-7/8"

128 DL

Two-head centreless pipe and bar sander

Model	128 DL
Bar and tube Ø	**Ø3/8" – 5-7/8" (10 – 150 mm)**
Grinding heads	**2, independent, in line**
Abrasive belt width × length, each head	**5-7/8 × 78-3/4" (150 × 2,000 mm)**
Contact wheel Ø × width, each head	7-7/8 × 5-7/8" (200 × 150 mm)
Belt speed two speeds	2,953 / 5,906 ft/min (15 / 30 m/s)
Part rotation rubber wheel, variable	33 – 164 ft/min (10 – 50 m/min)
Work support	Prismatic, anti-friction lining, set by handwheel
Motor	**8.7 HP (6.5 kW)**
Dimensions L × W × H	67 × 55 × 63" (1,700 × 1,400 × 1,600 mm)
Weight	**992 lb (450 kg)**

Tube capacities are outside diameters. Metric values in brackets are the manufacturer's figures; belt speeds are surface speeds. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Italy by Gecam — 100 % Italian
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

228 · PIPE TO Ø15-3/4"

228 PIPE SANDER FOR LARGE PIPE, Ø3/8" – 15-3/4"



MODEL 228 · EUROFINTEC 228 PIPE SANDER, Ø3/8" – 15-3/4"



228 with pipe roller stands (optional)



Contrast roller and belt on a pipe

Pipe Ø3/8" – 15-3/4" · 3-15/16 × 157-1/2" free belt · feed 0 – 23 ft/min

For pipe too big for a centreless machine: a 3-15/16" free belt runs over two Vulkollan rollers on a compensated fork that follows any ovality of the pipe, while a contrast group with a grooved rubber roller — set to the diameter by handwheel — turns the pipe and carries it past at up to 23 ft/min. Pneumatic contact wheel, fully enclosed belt and a circular-grinding attachment; roller stands in line with the machine carry long pipe. Pipe and round bar from Ø3/8" to Ø15-3/4".

STANDARD FEATURES

- ✓ Free abrasive belt 3-15/16 × 157-1/2" (100 × 4,000 mm) on two Vulkollan rollers on a compensated fork
- ✓ Pneumatic contact wheel Ø9-13/16 × 3-15/16" (250 × 100 mm) on bearings, for pipe up to Ø15-3/4"
- ✓ Contrast group with grooved rubber roller on a guide set by handwheel to the pipe diameter; feed 0 – 23 ft/min (0 – 7 m/min)
- ✓ Fully enclosed belt; circular-grinding attachment included
- ✓ 4.3 / 5.4 HP (3.2 / 4 kW)
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Roller stands for long and heavy pipe
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

228 — TECHNICAL SPECIFICATIONS

Model	228
Pipe and bar Ø	**Ø3/8" – 15-3/4" (10 – 400 mm)**
Abrasive belt free belt, width × length	**3-15/16 × 157-1/2" (100 × 4,000 mm)**
Contact wheel Ø × width	9-13/16 × 3-15/16" (250 × 100 mm), pneumatic
Feed speed contrast roller	**0 – 23 ft/min (0 – 7 m/min)**
Motor	**4.3 / 5.4 HP (3.2 / 4 kW)**
Dimensions L × W × H	54 × 39 × 89" (1,380 × 990 × 2,270 mm)

Tube capacities are outside diameters. Metric values in brackets are the manufacturer's figures; belt speeds are surface speeds. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

228 PIPE SANDER FOR LARGE PIPE, Ø3/8" – 15-3/4"




Sanding large-diameter pipe

728

728 TUBE BRUSHING MACHINE, Ø3/8" – 5-7/8"



MODEL 728 · EUROFINTEC 728 TUBE BRUSHING MACHINE



728 brush and contrast roller



Handwheel adjustment of the brush as it wears

Tube Ø3/8" – 5-7/8" · cleaning, satin finishing and polishing

A heavy brushing machine for round tube: a Ø11-13/16" brush on a two-speed, self-braking motor works the tube while a grooved rubber contrast roller — tilted to feed it and pneumatically compensated — carries it past, cleaning, satin-finishing or polishing tube from Ø3/8" to Ø5-7/8", with handwheel adjustment as the brush wears.

STANDARD FEATURES

- ✓ Brush Ø11-13/16 × 3-15/16" (300 × 100 mm), 275 – 825 rpm; two-speed motor with electronic brake, V-belt drive
- ✓ Contrast group with grooved rubber roller, tilt and diameter adjustment, pneumatic position compensation with adjustable pressure; steel work rest
- ✓ Column base, extraction hood, electrics in a sealed box with inverter
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Self-filtering dust extraction
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

728 — TECHNICAL SPECIFICATIONS


Model	728
Tube size	**Round Ø3/8" – 5-7/8" (10 – 150 mm)**
Brush	**Ø11-13/16" (300 mm), 3-15/16" (100 mm) wide**
Brush speed	275 – 825 rpm, 2-speed motor
Work	Cleaning, satin finishing and polishing along the tube
Motor	**3.4 / 4.4 HP (2.5 / 3.3 kW)**
Dimensions L × W × H	31 × 51 × 55" (800 × 1,300 × 1,400 mm)
Weight	**705 lb (320 kg)**

Tube capacities are outside diameters. Metric values in brackets are the manufacturer's figures; belt speeds are surface speeds. Dimensions are overall L × W × H.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

728 TUBE BRUSHING MACHINE, Ø3/8" – 5-7/8"

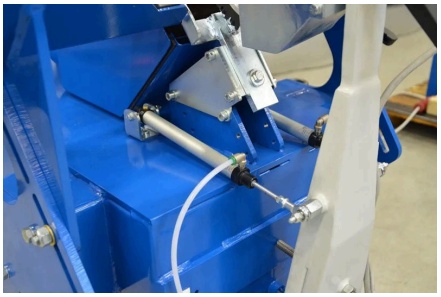

Pneumatic compensation of the contrast roller

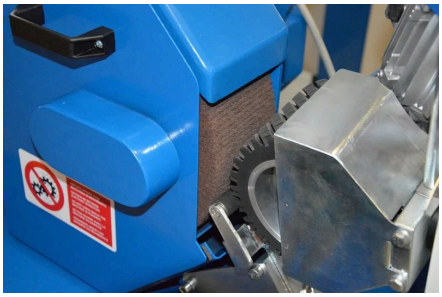

Grooved rubber contrast roller with tilt adjustment

143


143 TUBE END DEBURRING MACHINE — PIPE AND TUBE ENDS DEBURRED INSIDE AND OUTSIDE, Ø13/16" – 4-3/4"



MODEL 143 · EUROFINTEC 143 TUBE-END DEBURRING MACHINE



143 with its front guard, seen from the operator side



Wire brush of the 143

Tube ends Ø13/16" – 4-3/4", round and square · inside and outside in one cycle

Deburrs the cut ends of stainless tube and profiles inside and outside in one cycle: the tube end goes into an adjustable central prism against a wire brush that turns while its own axis rotates, changing direction so every edge is deburred evenly — on ends cut at 90° or 45° and on bent parts, round tube Ø13/16" to Ø4-3/4" and square 13/16" to 4-3/4".

STANDARD FEATURES

- ✓ Wire brush Ø9-13/16 × 3-15/16" (250 × 100 mm); two brush speeds and two speeds of brush-axis rotation
- ✓ Inside and outside of the tube end in one cycle; ends cut at 90° and 45°, bent parts too
- ✓ Entry with adjustable central prism
- ✓ Round tube Ø13/16" – 4-3/4" (20 – 120 mm), square 13/16" – 4-3/4"
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- \+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

143 — TECHNICAL SPECIFICATIONS

Model	143
Tube size	**Round Ø13/16" – 4-3/4" (20 – 120 mm) · square 13/16" – 4-3/4" (20 – 120 mm)**
Brush	**Wire, Ø9-13/16" (250 mm), 3-15/16" (100 mm) wide**
Brush speed	2 speeds · brush axis rotation 2 speeds
Work	Tube ends cut at 90° and 45°, inside and outside in one cycle
Motor	**4.4 / 6 HP (3.3 / 4.5 kW)**
Dimensions L × W × H	28 × 37 × 55" (700 × 930 × 1,400 mm)
Weight	**816 lb (370 kg)**

Tube capacities are outside diameters. Metric values in brackets are the manufacturer's figures; belt speeds are surface speeds. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

143 TUBE END DEBURRING MACHINE – PIPE AND TUBE ENDS DEBURRED INSIDE AND OUTSIDE, Ø13/16" – 4-3/4"



Support for tube ends cut at 45°

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.