NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH PREMIUM LINE · MADE IN TURKEY · SOLD & SERVICED IN CANADA BY NOVOTECH

HYDRAULIC IRONWORKERS AND PUNCHING MACHINES

HKM SINGLE- AND DOUBLE-PISTON IRONWORKERS 44 – 193 US TONS · HPM HYDRAULIC PUNCHES TO 193 US TONS · HPM DP, HPM CNC AND NC PUNCHING LINES







Turkey
MADE IN TURKEY

6
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

IRONWORKERS AND PUNCHING MACHINES

CONTENTS

HYDRAULIC IRONWORKERS

HKM 40 · 45 · 60 · 65 V single-piston hydraulic ironworkers HKM 40 (44 US tons) · HKM 45 (50) · HKM 60 (66) · HKM 65 V (72) 04

HKM 55 · 65 · 85 · 115 · 175 double-piston hydraulic ironworkers HKM 55 (61 US tons) · 65 (72) · 85 (94) · 115 (127) · 175 (193) 08

HYDRAULIC PUNCHING MACHINES

HPM 30 – 175 hydraulic punching machines HPM 30 (33 US tons) · 40 · 65 · 85 · 115 · 175 (193 US tons) 12

HPM 65 – 175 DP double-head hydraulic punching machines HPM 65 DP · 85 DP · 115 DP · 175 DP · 2 × 72 to 2 × 193 US tons 15

HPM 85 · 115 · 175 CNC punching machines HPM 85 CNC · 115 CNC · 175 CNC · Siemens control 16

HPM / HKM 65 – 175 NC punching and cutting lines HPM 65 · 85 · 115 · 175 NC · HKM 65 · 85 · 115 · 175 NC 18

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR IRONWORKERS AND PUNCHING MACHINES

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

NOVOTECH PREMIUM LINE · MADE IN TURKEY

FIVE STATIONS ON ONE MACHINE — PUNCH, SHEAR, NOTCH, CUT ANGLE AND BAR

The machines in this catalogue are NovoTech's premium line: built in Turkey to NovoTech's specification by a CE-certified metal-forming plant with more than 40 years of machine building and exports to over 100 countries, with European hydraulic and electrical components, inspected before shipping, and sold under NovoTech's name with a CSA-approved panel, a 1-year warranty and spare parts and technical support from NovoTech in Mississauga, Ontario, Canada.

The HKM ironworkers put the five jobs of the structural shop on one machine: punching, round and square bar shear, angle shear, flat-bar and sheet shear and rectangular notching, each with its own station and LED light — single-piston machines from the 44 US ton HKM 40 to the 193 US ton HKM 175, and double-piston machines with two cylinders and two pedals so two operators work at once. The HPM hydraulic punching machines make round, oblong and shaped holes in plate, angle and sections in one stroke — bench-height 33 and 44 ton punches, 72 to 193 ton machines with a 24.6" throat, double-head HPM DP, the HPM CNC with a Siemens-controlled table and the NC lines that copy hole patterns along angles, flat bar and beams. Punches and dies interchange across the range.

HKM 40 (44 US TONS) · HKM 45 (50) · HKM 60 (66) · HKM 65 V (72)


HKM 40 · 45 · 60 · 65 V SINGLE-PISTON HYDRAULIC IRONWORKERS



MODEL HKM · HKM 60 SINGLE-PISTON HYDRAULIC STEELWORKER WITH FIVE WORK STATIONS



HKM 40 single-piston hydraulic steelworker, 44 US tons



HKM 65 V vertical single-piston steelworker

44 – 72 US tons · punch to Ø1-1/8 × 9/16" · angle to L 4-3/4 × 4-3/4 × 1/2" · 4 – 5 work stations

Hydraulic steelworkers in which one cylinder serves every work station — compact and economical for the shop that punches, shears and notches one job at a time. Punching, round and square bar shear, angle shear at 90° and 45°, flat-bar shear and (except on the HKM 40) a rectangular notching station, all with LED lighting, central lubrication and adjustable piston stroke. The HKM 65 V puts the piston vertical for vertical punching and cutting. A Ø7/8" punch and die and the standard blade sets are included.

STANDARD FEATURES

- ✓ One hydraulic cylinder serves all work stations: punching, round and square bar shear, angle shear 90° / 45°, flat-bar shear, U-notching (not on HKM 40)
- ✓ Adjustable piston stroke for higher productivity; central lubrication; LED lighting on all stations
- ✓ Ø7/8" punch & die and standard punching tools; round and square bar blade set; angle blade set; U-notching blade set
- ✓ HKM 65 V: vertical piston layout for vertical punching and cutting; spot lubrication
- ✓ Punches up to Ø1-1/2" as standard — punches and dies change quickly, special punches at short notice

OPTIONAL EQUIPMENT


- + Large-hole punching tool — Ø1-1/2" (5/16" thick) up to Ø4-3/8" (1/8" thick)
- + Section punching tools for IPN, UPN, flat bar and angle
- + Section blades for UPN, IPN and T; V-notching blade
- + Press-brake tool on the punching station; hydraulic stripper
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

DETAILS, COMPONENTS AND OPTIONS


HKM 40 · 45 · 60 · 65 V SINGLE-PISTON HYDRAULIC IRONWORKERS



HKM 40 — bar shear and angle shear side

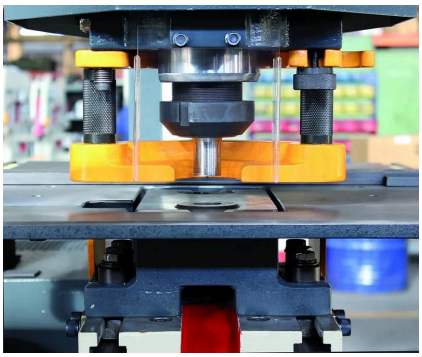

HKM punches and dies

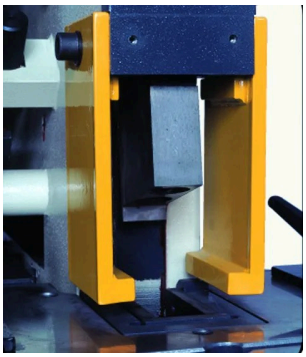

HKM rectangular notching tool

TECHNICAL SPECIFICATIONS · 1 / 2

HKM 40 · 45 · 60 · 65 V SINGLE-PISTON HYDRAULIC IRONWORKERS

HKM SINGLE PISTON

HKM 40 · 45 · 60 · 65 V

Model	HKM 40	HKM 45	HKM 60	HKM 65 V
Punching, max. thickness Ø × thickness	**Ø13/16 × 9/16"**	**Ø7/8 × 9/16"**	**Ø1-1/8 × 9/16"**	**Ø7/8 × 13/16"**
Punching, larger hole Ø × thickness	Ø1-1/8 × 3/8"	Ø1-1/2 × 5/16"*	Ø1-1/2 × 7/16"*	–
Punching, max. Ø Ø × thickness	Ø1-1/2 × 5/16"*	Ø3-7/8 × 1/8"**	Ø4-3/8 × 1/8"**	Ø1-1/2 × 7/16"*
Punching force	**44 US tons (40 t)**	**50 US tons (45 t)**	**66 US tons (60 t)**	**72 US tons (65 t)**
Stroke	1.2" (30 mm)	2.1" (55 mm)	2.2" (55 mm)	1.6" (40 mm)
Strokes per minute at 0.8" stroke	20	25	25	22 (5/8" stroke)
Throat depth	6.7" (170 mm)	8.7" (220 mm)	8.7" (220 mm)	9.4" (240 mm)
Bar shear – round · square	**Ø1-1/8" · □1"**	**Ø1-3/8" · □1-1/8"**	**Ø1-5/8" · □1-3/8"**	**Ø1-5/8" · □1-1/2"**
Angle shear 90°	**3-1/8 × 3-1/8 × 5/16"**	**3-7/8 × 3-7/8 × 3/8"**	**4-3/4 × 4-3/4 × 1/2"**	**3-7/8 × 3-7/8 × 3/8"**
Angle shear 45°	2 × 1/4"	2-3/4 × 1/4"	3-1/8 × 5/16"	–
Flat-bar shear width × thickness	**7-7/8" × 1/2"**	**7-7/8" × 9/16"**	**7-7/8" × 13/16"**	**13-3/4" × 9/16"**
Flat-bar shear, wide width × thickness	11-3/4" × 1/4"	11-3/4" × 1/2"	11-3/4" × 9/16"	9-7/8" × 3/4"
Blade length	13.9" (355 mm)	12.5" (320 mm)	12.5" (320 mm)	13.9" (355 mm)
Notching – thickness	–	5/16" (8 mm)	3/8" (10 mm)	5/16" (8 mm)
Notch width × depth	–	1.7 × 3.9" (40 × 100 mm)	1.7 × 3.9" (40 × 100 mm)	2 × 3.5" (50 × 90 mm)
Optional UPN / IPN blades	3 × 1-1/2"	3-1/8 × 1-3/4"	3-1/8 × 1-3/4"	3-7/8 × 2"
Optional Tee blades	1-3/8 × 3/16"	1-5/8 × 3/16"	3-1/8 × 3/8"	–

TECHNICAL SPECIFICATIONS · 2 / 2

HKM 40 · 45 · 60 · 65 V SINGLE-PISTON HYDRAULIC IRONWORKERS

HKM SINGLE PISTON (CONTINUED)

HKM 40 · 45 · 60 · 65 V

Model	HKM 40	HKM 45	HKM 60	HKM 65 V
Optional V-notching blade	—	3-7/8 × 3-7/8 × 5/16″	3-7/8 × 3-7/8 × 3/8″	3-1/2 × 3-1/2 × 5/16″
Optional press-brake tool — bar	—	3-7/8″ × 1/2″	3-7/8″ × 1/2″	4-3/8″ × 5/16″
Optional press-brake tool — sheet	—	—	—	9-7/8″ × 1/4″
Motor power	4 HP (3 kW)	5.4 HP (4 kW)	5.4 HP (4 kW)	7.4 HP (5.5 kW)
Dimensions L × W × H	43 × 33 × 60″ (1,100 × 840 × 1,500 mm)	59 × 37 × 66″ (1,500 × 940 × 1,700 mm)	60 × 37 × 70″ (1,500 × 940 × 1,800 mm)	46 × 37 × 76″ (1,150 × 940 × 1,950 mm)
Weight	1,279 lb (580 kg)	3,086 lb (1,400 kg)	3,175 lb (1,440 kg)	2,679 lb (1,215 kg)

Capacities are for mild steel of 65,000 psi (450 N/mm^2) tensile strength; thickness in gauge / common fraction. * with a special tool · ** with the optional large-hole punching tool. Dimensions are overall L × W × H. All models punch Ø1/4″ up to Ø1-1/2″ as standard.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HKM 55 (61 US TONS) · 65 (72) · 85 (94) · 115 (127) · 175 (193)

HKM 55 · 65 · 85 · 115 · 175 DOUBLE-PISTON HYDRAULIC IRONWORKERS



MODEL HKM · HKM 115 DOUBLE-PISTON HYDRAULIC STEELWORKER, 127 US TONS



HKM 85 double-piston hydraulic steelworker, 94 US tons



HKM 65 double-piston hydraulic steelworker, 72 US tons

61 – 193 US tons · two operators at once · angle to L 7-7/8 × 7-7/8 × 13/16" · holes to Ø2-1/4" × 7/8"

Two separate hydraulic cylinders and two foot pedals, so two operators work at the same time — one punching, the other shearing angle, bar or flat, or notching. Electrical back gauge, adjustable piston stroke, central lubrication and LED lighting on every station; the HKM 115 comes with a Ø1" punch and die and the HKM 175 with an oil cooling system. From 61 to 193 US tons: angle to L 7-7/8 × 7-7/8 × 13/16", flat bar to 15 × 1-1/8", round bar to Ø2-1/2" and holes to Ø2-1/4" in 7/8" plate on the HKM 175.

STANDARD FEATURES

- ✓ 2 separate hydraulic cylinders and foot pedals — 2 operators work at the same time
- ✓ Electrical back gauge; adjustable piston stroke; central lubrication; LED lighting on all work stations
- ✓ Punching, round and square bar shear, angle shear 90° / 45°, flat-bar shear and U-notching stations; Ø1" punch & die on HKM 115
- ✓ Oil cooling system on the HKM 175
- ✓ Ideal for cutting all ranges of angle, I-beam and U-section with the optional section blades

OPTIONAL EQUIPMENT

- + Large-hole punching tool — up to Ø4-7/8" × 3/16"
- + Section punching tools for IPN, UPN, flat bar and angle; section blades for UPN, IPN and T
- + V-notching blade; press-brake tool; hydraulic stripper
- + NC feeding table on the punching station
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

DETAILS, COMPONENTS AND OPTIONS

HKM 55 · 65 · 85 · 115 · 175 DOUBLE-PISTON HYDRAULIC IRONWORKERS



HKM 55 double-piston hydraulic steelworker with two foot pedals



HKM 175 double-piston hydraulic steelworker, 193 US tons



HKM 175 — two operators working at the same time on the punching and shearing stations




HKM 175 — electrical back gauge on the shear station




HKM 115 — punching station and angle shear with LED lighting




HKM — central lubrication pump

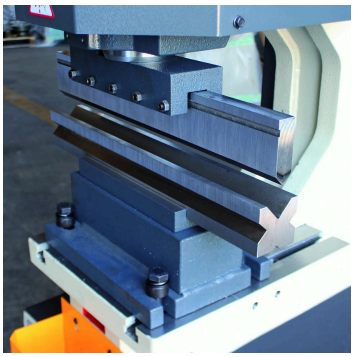

HKM optional press-brake tool

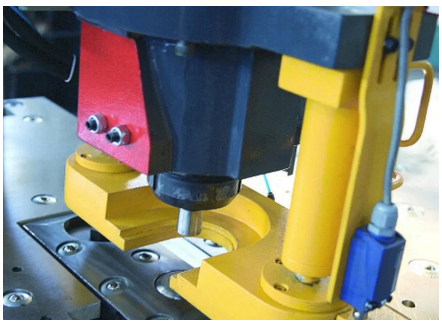

HKM optional hydraulic stripper

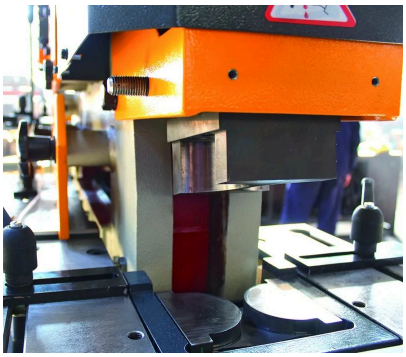

HKM flat-bar radius tool

TECHNICAL SPECIFICATIONS · 1 / 2

HKM 55 · 65 · 85 · 115 · 175 DOUBLE-PISTON HYDRAULIC IRONWORKERS

HKM DOUBLE PISTON

HKM 55 · 65 · 85 · 115 · 175

Model	HKM 55	HKM 65	HKM 85	HKM 115	HKM 175
Punching, max. thickness Ø × thickness	**Ø13/16 × 13/16″**	**Ø1 × 13/16″**	**Ø1-1/4 × 13/16″***	**Ø1-3/8 × 1″**	**Ø1-5/8 × 1-1/4″**
Punching, larger hole Ø × thickness	Ø1-5/8 × 3/8″**	Ø2-1/8 × 3/8″**	Ø2-1/8 × 1/2″**	Ø2-1/8 × 5/8″*	Ø2-1/4 × 7/8″
Punching, max. Ø Ø × thickness	Ø3-7/8 × 1/8″**	Ø4-3/8 × 1/8″**	Ø4-3/8 × 3/16″**	Ø4-3/8 × 3/16″**	Ø4-7/8 × 3/16″**
Punching force	**61 US tons (55 t)**	**72 US tons (65 t)**	**94 US tons (85 t)**	**127 US tons (115 t)**	**193 US tons (175 t)**
Stroke	2.4″ (60 mm)	2.2″ (55 mm)	3.1″ (80 mm)	3.1″ (80 mm)	3.1″ (80 mm)
Strokes per minute at 0.8″ stroke	25	25	25	25	22
Throat depth	12″ (305 mm)	12″ (305 mm)	14″ (355 mm)	14″ (355 mm)	24.6″ (625 mm)
Bar shear — round · square	**Ø1-5/8″ · □1-5/8″**	**Ø1-3/4″ · □1-3/4″**	**Ø2″ · □2″**	**Ø2-1/8″ · □2″**	**Ø2-1/2″ · □2-1/8″**
Angle shear 90°	**4-3/4 × 4-3/4 × 1/2″**	**4-3/4 × 4-3/4 × 1/2″**	**5-7/8 × 5-7/8 × 9/16″**	**5-7/8 × 5-7/8 × 5/8″**	**7-7/8 × 7-7/8 × 13/16″**
Angle shear 45°	2-3/4 × 3/8″	2-3/4 × 3/8″	3-1/8 × 5/16″	3-1/8 × 3/8″	3-1/8 × 3/8″
Flat-bar shear width × thickness	**7-7/8″ × 13/16″**	**11-3/4″ × 13/16″**	**15″ × 13/16″**	**15″ × 1″**	**15″ × 1-1/8″**
Flat-bar shear, wide width × thickness	11-3/4″ × 9/16″	14-3/4″ × 9/16″	19″ × 9/16″	23-1/2″ × 9/16″	23-1/2″ × 13/16″
Blade length	15″ (380 mm)	15″ (380 mm)	19″ (485 mm)	24″ (610 mm)	24″ (610 mm)
Notching — thickness	3/8″ (10 mm)	3/8″ (10 mm)	1/2″ (12 mm)	1/2″ (12 mm)	5/8″ (16 mm)
Notch width × depth	1.8 × 3.5″ (50 × 90 mm)	1.8 × 3.5″ (50 × 90 mm)	2 × 3.9″ (50 × 100 mm)	2.4 × 3.9″ (60 × 100 mm)	2.4 × 3.9″ (60 × 100 mm)
Optional UPN / IPN blades	4-3/4 × 2-1/4″	4-3/4 × 2-1/4″	6-1/4 × 2-7/8″	7-7/8 × 3-1/2″	11-3/4 × 4-7/8″
Optional Tee blades	3-1/8 × 3/8″	3-1/2 × 7/16″	3-7/8 × 7/16″	4-3/4 × 1/2″	5-7/8 × 9/16″
Optional V-notching blade	3-7/8 × 3-7/8 × 3/8″	3-7/8 × 3-7/8 × 3/8″	3-7/8 × 3-7/8 × 1/2″	3-7/8 × 3-7/8 × 1/2″	3-7/8 × 3-7/8 × 5/8″
Optional press-brake tool — bar	9-7/8″ × 1/2″	9-7/8″ × 9/16″	9-7/8″ × 13/16″	9-7/8″ × 7/8″	9-7/8″ × 1″
Optional press-brake tool — sheet	19-3/4″ × 11 ga	19-3/4″ × 11 ga	19-3/4″ × 8 ga	27-1/2″ × 11 ga	27-1/2″ × 8 ga
Motor power	7.4 HP (5.5 kW)	7.4 HP (5.5 kW)	10 HP (7.5 kW)	15 HP (11 kW)	15 HP (11 kW)

TECHNICAL SPECIFICATIONS · 2 / 2

HKM 55 · 65 · 85 · 115 · 175 DOUBLE-PISTON HYDRAULIC IRONWORKERS

HKM DOUBLE PISTON (CONTINUED)

HKM 55 · 65 · 85 · 115 · 175

Model	HKM 55	HKM 65	HKM 85	HKM 115	HKM 175
Dimensions L × W × H	67 × 37 × 74″ (1,700 × 940 × 1,900 mm)	68 × 37 × 74″ (1,750 × 940 × 1,900 mm)	76 × 37 × 80″ (1,950 × 940 × 2,050 mm)	80 × 37 × 86″ (2,050 × 940 × 2,200 mm)	107 × 45 × 90″ (2,700 × 1,150 × 2,300 mm)
Weight	3,417 lb (1,550 kg)	3,494 lb (1,585 kg)	5,115 lb (2,320 kg)	6,482 lb (2,940 kg)	13,228 lb (6,000 kg)

Capacities are for mild steel of 65,000 psi (450 N/mm^2) tensile strength; thickness in gauge / common fraction. * with a special tool · ** with the optional large-hole punching tool. Dimensions are overall L × W × H. All models punch Ø1/4″ up to Ø1-1/2″ as standard.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HPM 30 (33 US TONS) · 40 · 65 · 85 · 115 · 175 (193 US TONS)

HPM 30 – 175 HYDRAULIC PUNCHING MACHINES

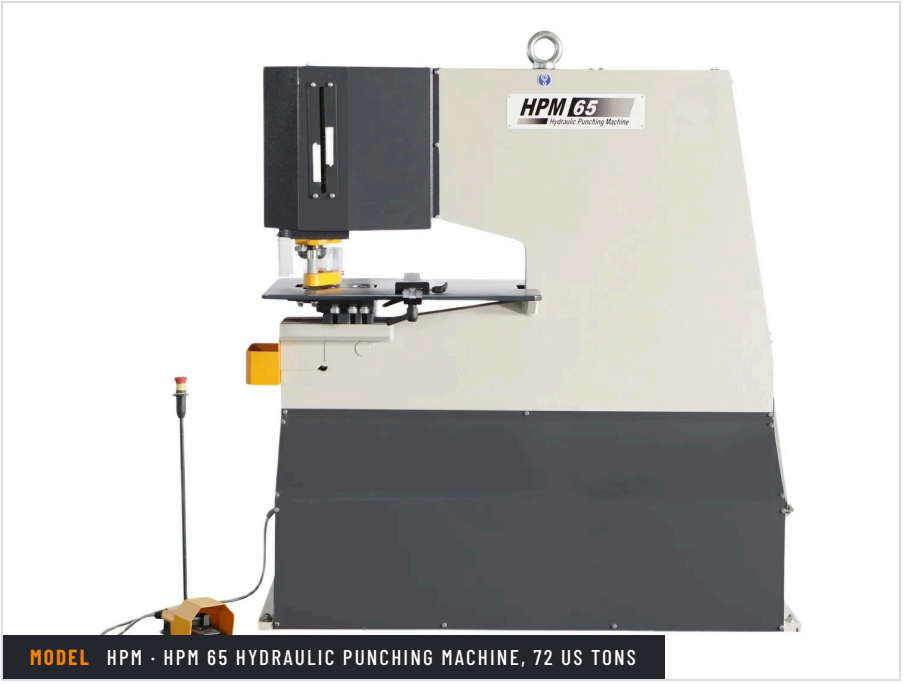

MODEL HPM · HPM 65 HYDRAULIC PUNCHING MACHINE, 72 US TONS



HPM 30 hydraulic punching machine



HPM 115 hydraulic punching machine, 127 US tons

33 – 193 US tons · holes Ø1/4" to Ø2-1/4" · plate to 1-1/4" · throat 11.8" / 24.6"

Single-station hydraulic punches for holes and shapes from Ø1/4" up to Ø2-1/4" in plate to 1-1/4" thick: the HPM 30 and 40 are the compact punches with an 11.8" throat, the HPM 65 to 175 have a 24.6" throat for punching deep into plate, angle and flat bar. A punch holder, a Ø7/8" (HPM 65 / 85) or Ø1" (HPM 115 / 175) punch and die, LED light and C-spanner are included; punches and dies interchange with the HKM steelworkers. A hydraulic stripper, press-brake tool and NC table system are optional.

STANDARD FEATURES

- ✓ Punch & die Ø7/8" (HPM 65 / 85) or Ø1" (HPM 115 / 175) included; punch holder; C-spanner
- ✓ LED light on the work station
- ✓ Throat depth 11.8" (HPM 30 / 40) or 24.6" (HPM 65 – 175)
- ✓ Punches and dies interchangeable with the HKM steelworkers — special tools on request

OPTIONAL EQUIPMENT

- + Punching tools from Ø1/4" up to Ø2-1/4" (max. 1-1/4" thick); special tools
- + Hydraulic stripper
- + Press-brake tool
- + NC table system
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

DETAILS, COMPONENTS AND OPTIONS

HPM 30 – 175 HYDRAULIC PUNCHING MACHINES



HPM — punching station with stripper and table



HPM — punch and die

TECHNICAL SPECIFICATIONS

HPM 30 – 175 HYDRAULIC PUNCHING MACHINES

HPM

hydraulic punching machines · 6 models

Model	HPM 30	HPM 40	HPM 65	HPM 85	HPM 115	HPM 175
Punching, max. thickness Ø × thickness	**Ø7/8 × 3/8″**	**Ø13/16 × 9/16″**	**Ø1 × 13/16″**	**Ø1-1/4 × 13/16″***	**Ø1-3/8 × 1″**	**Ø1-5/8 × 1-1/4″**
Punching, larger hole Ø × thickness	Ø1-1/8 × 1/4″	Ø1-1/8 × 3/8″	Ø2-1/4 × 3/8″**	Ø2-1/4 × 1/2″**	Ø2-1/8 × 5/8″*	Ø2-1/4 × 7/8″
Punching, max. Ø Ø × thickness	Ø1-1/2 × 3/16″*	Ø1-1/2 × 5/16″*	Ø4-3/8 × 1/8″**	Ø4-3/8 × 3/16″**	Ø4-3/8 × 3/16″**	Ø4-7/8 × 3/16″**
Punching force	**33 US tons (30 t)**	**44 US tons (40 t)**	**72 US tons (65 t)**	**94 US tons (85 t)**	**127 US tons (115 t)**	**193 US tons (175 t)**
Stroke	1.8″ (45 mm)	1.8″ (45 mm)	2.2″ (55 mm)	3.1″ (80 mm)	3.1″ (80 mm)	3.1″ (80 mm)
Strokes per minute at 0.8″ stroke	23	22	22	21	21	21
Throat depth	**11.8″ (300 mm)**	**11.8″ (300 mm)**	**24.6″ (625 mm)**	**24.6″ (625 mm)**	**24.6″ (625 mm)**	**24.6″ (625 mm)**
Working height	40.9″ (1040 mm)	40.9″ (1040 mm)	37.4″ (950 mm)	37.4″ (950 mm)	37.4″ (950 mm)	37.4″ (950 mm)
Optional press-brake tool — bar	—	—	9-7/8″ × 9/16″	9-7/8″ × 13/16″	9-7/8″ × 7/8″	9-7/8″ × 1″
Optional press-brake tool — sheet	—	—	19-3/4″ × 11 ga	19-3/4″ × 11 ga	27-1/2″ × 11 ga	27-1/2″ × 8 ga
Motor power	4 HP (3 kW)	4 HP (3 kW)	7.4 HP (5.5 kW)	10 HP (7.5 kW)	15 HP (11 kW)	15 HP (11 kW)
Dimensions L × W × H	46 × 35 × 67″ (1,150 × 890 × 1,700 mm)	46 × 35 × 67″ (1,150 × 890 × 1,700 mm)	64 × 35 × 71″ (1,650 × 890 × 1,800 mm)	73 × 37 × 76″ (1,850 × 940 × 1,950 mm)	79 × 37 × 78″ (2,000 × 940 × 2,000 mm)	83 × 39 × 83″ (2,100 × 990 × 2,100 mm)
Weight	1,653 lb (750 kg)	1,653 lb (750 kg)	5,258 lb (2,380 kg)	7,066 lb (3,210 kg)	8,289 lb (3,760 kg)	11,464 lb (5,200 kg)

Capacities are for mild steel of 65,000 psi (450 N/mm^2) tensile strength; thickness in gauge / common fraction. * with a special tool · ** with the optional large-hole punching tool. Dimensions are overall L × W × H. All models punch Ø1/4″ up to Ø1-1/2″ as standard.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HPM 65 DP · 85 DP · 115 DP · 175 DP · 2 × 72 TO 2 × 193 US TONS

HPM 65 – 175 DP DOUBLE-HEAD HYDRAULIC PUNCHING MACHINES

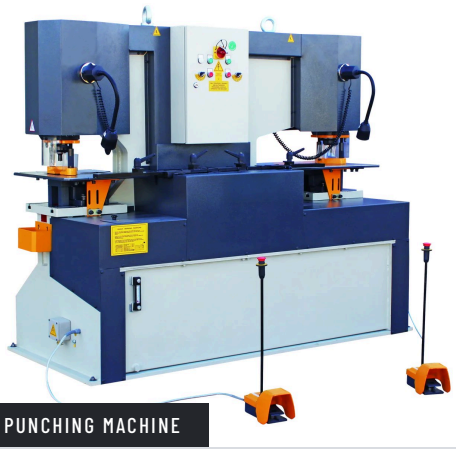

MODEL HPM · HPM 85 DP DOUBLE-HEAD HYDRAULIC PUNCHING MACHINE

2 × 72 to 2 × 193 US tons · two operators at once

Two punching heads on one frame with double motor and double foot-pedal control: two operators punch at the same time, or two different tools stay set up for the same part. Each head has the capacity of the single HPM of the same size — 2 × 72 to 2 × 193 US tons, holes to Ø2-1/4" — with a hydraulic stripper as the usual option.

STANDARD FEATURES

- ✓ Two punching heads, double motor and double foot-pedal control
- ✓ Each head with the full capacity of the single-head HPM; punch holders and punch & die included
- ✓ Two operators at once, or two tools set up for the same part
- ✓ LED lights on the work stations

OPTIONAL EQUIPMENT

- + Hydraulic stripper
- + Punching tools Ø1/4" – Ø2-1/4"; special tools
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

HPM DP — TECHNICAL SPECIFICATIONS

Model	HPM 65 DP	HPM 85 DP	HPM 115 DP	HPM 175 DP
Punching force	**2 × 72 US tons (2 × 65 t)**	**2 × 94 US tons (2 × 85 t)**	**2 × 127 US tons (2 × 115 t)**	**2 × 193 US tons (2 × 175 t)**
Dimensions L × W × H	79 × 35 × 71" (2,000 × 890 × 1,800 mm)	89 × 37 × 76" (2,250 × 940 × 1,950 mm)	89 × 37 × 78" (2,250 × 940 × 2,000 mm)	110 × 43 × 85" (2,800 × 1,100 × 2,150 mm)
Weight	7,099 lb (3,220 kg)	8,157 lb (3,700 kg)	10,251 lb (4,650 kg)	14,881 lb (6,750 kg)

Capacities are for mild steel of 65,000 psi (450 N/mm^2) tensile strength; thickness in gauge / common fraction. * with a special tool · ** with the optional large-hole punching tool. Dimensions are overall L × W × H. All models punch Ø1/4" up to Ø1-1/2" as standard. Punching capacities per head as the HPM of the same size.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

HPM 85 CNC · 115 CNC · 175 CNC · SIEMENS CONTROL

HPM 85 · 115 · 175 CNC PUNCHING MACHINES



MODEL HPM · HPM 115 CNC PUNCHING MACHINE WITH CNC TABLE AND SIEMENS CONTROL

94 – 193 US tons · 120 × 20" CNC table · ±0.004" · 14 ga to 1" plate

The HPM punch on a 120 × 20" CNC table (X 63" / Y 23.6" travel, 550 lb carriage load) with Siemens control: ideal for bolted steel-construction work where every hole must match — base plates, gussets, splice plates and flat bar from 14 ga to 1" thick at ±0.004" positioning accuracy. Material is held in hydraulic clamps on a divisible table, the axes run at 79 ft/min (98 ft/min on two axes) and the free software takes manual (MDI) punching or CAM programs with a 1-3/4" minimum edge distance. A 3-head punching unit is optional on the 115 and 175.

STANDARD FEATURES

- ✓ CNC table 120 × 20" · X 63" / Y 23.6" travel · 550 lb max. carriage load; divisible separate table with hydraulic clamps
- ✓ Material 14 ga to 1" thick; positioning accuracy ±0.004"; 79 ft/min on one axis, 98 ft/min on two axes
- ✓ Mobile CNC control panel (Siemens); free software — manual punching (MDI) and CAM program entry; min. 1-3/4" edge distance
- ✓ Punch & die Ø7/8" (HPM 85) or Ø1" (HPM 115 / 175); punch holder; automatic lubrication system; LED light; C-spanner

OPTIONAL EQUIPMENT

- + 3-head punching unit (HPM 115 / 175 CNC)
- + Punching tools Ø1/4" – Ø2-1/4"; special tools
- + Hydraulic stripper
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

TECHNICAL SPECIFICATIONS

HPM 85 · 115 · 175 CNC PUNCHING MACHINES

HPM CNC

CNC punching machines

Model	HPM 85 CNC	HPM 115 CNC	HPM 175 CNC
Punching force	**94 US tons (85 t)**	**127 US tons (115 t)**	**193 US tons (175 t)**
Punching, max. thickness Ø × thickness	**Ø1-1/4 × 13/16"***	**Ø1-3/8 × 1"**	**Ø1-5/8 × 1-1/4"**
Punching, max. Ø Ø × thickness	Ø4-3/8 × 3/16"**	Ø4-3/8 × 3/16"**	Ø4-7/8 × 3/16"**
CNC table	120 × 20" (3050 × 500 mm)	120 × 20" (3050 × 500 mm)	120 × 20" (3050 × 500 mm)
Axis travel X / Y	63" / 23.6" (1600 / 600 mm)	63" / 23.6" (1600 / 600 mm)	63" / 23.6" (1600 / 600 mm)
Material thickness	14 ga – 1" (2 – 25 mm)	14 ga – 1" (2 – 25 mm)	14 ga – 1" (2 – 25 mm)
Positioning accuracy	±0.004" (±0.1 mm)	±0.004" (±0.1 mm)	±0.004" (±0.1 mm)
Axis speed one axis / two axes	79 / 98 ft/min (24 / 30 m/min)	79 / 98 ft/min (24 / 30 m/min)	79 / 98 ft/min (24 / 30 m/min)
Max. carriage load	550 lb (250 kg)	550 lb (250 kg)	550 lb (250 kg)
Throat depth	24.6" (625 mm)	24.6" (625 mm)	24.6" (625 mm)
Motor power punch	10 HP (7.5 kW)	15 HP (11 kW)	15 HP (11 kW)

Capacities are for mild steel of 65,000 psi (450 N/mm²) tensile strength; thickness in gauge / common fraction. * with a special tool · ** with the optional large-hole punching tool. Dimensions are overall L × W × H. All models punch Ø1/4" up to Ø1-1/2" as standard.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HPM 65 · 85 · 115 · 175 NC · HKM 65 · 85 · 115 · 175 NC

HPM / HKM 65 – 175 NC PUNCHING AND CUTTING LINES



MODEL HPM · HPM 85 NC PUNCHING LINE WITH NC TABLE AND CONTROL CONSOLE

72 – 193 US tons · 307 × 31″ NC table · angles, flat bar, IPN and UPN · ±0.004″

Special punching and cutting lines for angles, flat bar, IPN and UPN sections: an HPM punch or HKM steelworker with a 307 × 31″ NC table, a 201 × 16″ loading table, X travel of 244″ and mechanical holders and feeders. The NC control copies the hole pattern along the bar — clean holes up to Ø2-1/4″ in 7/8″ material, 14 ga to 13/16″ thick at ±0.004″ — with free software, manual punching and a copy system, programmed by technical values. On the HKM NC the shear station cuts the punched bar to length.

STANDARD FEATURES

- ✓ NC table 307 × 31″ · loading table 201 × 16″ · X travel 244″; mechanical holders and feeders; roller conveyor
- ✓ Punching of angles, flat bar, IPN and UPN sections: holes up to Ø2-1/4″ in 7/8″ material, copied by NC
- ✓ Material 14 ga – 13/16″ thick; positioning accuracy ±0.004″
- ✓ Mobile NC control panel; free software — manual punching and copy system, program by technical values
- ✓ Punch & die Ø7/8″ (65 / 85) or Ø1″ (115 / 175); punch holder; divisible separate table with manual adjustment clamps; LED light

OPTIONAL EQUIPMENT

- + Angle punching tooling; section tools
- + Hydraulic stripper
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

HPM / HKM NC LINES — TECHNICAL SPECIFICATIONS

Model	HPM / HKM 65 NC	HPM / HKM 85 NC	HPM / HKM 115 NC	HPM / HKM 175 NC
Punching force	**72 US tons (65 t)**	**94 US tons (85 t)**	**127 US tons (115 t)**	**193 US tons (175 t)**
Punching, max. thickness Ø × thickness	**Ø1 × 13/16″**	**Ø1-1/4 × 13/16″***	**Ø1-3/8 × 1″**	**Ø1-5/8 × 1-1/4″**
NC table	307 × 31″ (7800 × 800 mm)	307 × 31″ (7800 × 800 mm)	307 × 31″ (7800 × 800 mm)	307 × 31″ (7800 × 800 mm)
Loading table	201 × 16″ (5100 × 400 mm)	201 × 16″ (5100 × 400 mm)	201 × 16″ (5100 × 400 mm)	201 × 16″ (5100 × 400 mm)
X travel	244″ (6200 mm)	244″ (6200 mm)	244″ (6200 mm)	244″ (6200 mm)
Material thickness	14 ga – 13/16″ (2 – 20 mm)	14 ga – 13/16″ (2 – 20 mm)	14 ga – 13/16″ (2 – 20 mm)	14 ga – 13/16″ (2 – 20 mm)
Positioning accuracy	±0.004″ (±0.1 mm)	±0.004″ (±0.1 mm)	±0.004″ (±0.1 mm)	±0.004″ (±0.1 mm)

Capacities are for mild steel of 65,000 psi (450 N/mm²) tensile strength; thickness in gauge / common fraction. * with a special tool · ** with the optional large-hole punching tool. Dimensions are overall L × W × H. All models punch Ø1/4″ up to Ø1-1/2″ as standard.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.