NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH PREMIUM LINE · MADE IN TURKEY · SOLD & SERVICED IN CANADA BY NOVOTECH

PLATE ROLLING MACHINES

4R HSS HEAVY-DUTY, 4R HS-L LINEAR AND 4R HS ORBITAL 4-ROLL PLATE ROLLS · 4RH CASSETTE ROLLS · 4R HC CONICAL ROLLS · 3R UHS AND 3R HS 3-ROLL PLATE ROLLS







Turkey
MADE IN TURKEY

7
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

PLATE ROLLING MACHINES

CONTENTS

FOUR-ROLL PLATE ROLLS

4R HSS hydraulic heavy-duty 4-roll plate rolls 4R HSS 20-280 – 4R HSS 60-620 · 42 models · 6.7 to 20 ft 04

4R HS-L hydraulic 4-roll plate rolls — linear, wedge pinch 4R HS-L 10-100 – 4R HS-L 20-130 · 7 models · 3.4 to 6.7 ft 11

4R HS hydraulic 4-roll plate rolls — orbital 4R HS 15-150 – 4R HS 40-260 · 22 models · 5.1 to 13.5 ft 14

4RH NC cassette-type hydraulic 4-roll plate rolls 4RH 10-60 – 4RH 15-130 · 7 models · 3.4 to 5.1 ft 18

4R HC hydraulic 4-roll conical plate rolls 4R HC 10-155 · 10-185 · 15-185 21

THREE-ROLL PLATE ROLLS

3R UHS 3-roll hydraulic translating heavy-duty plate rolls 3R UHS 30-450 – 3R UHS 30-680 · 6 models · 10.2 ft 23

3R HS 3-roll hydraulic plate rolls 3R HS 20-210 – 3R HS 30-280 · 12 models · 6.7 to 10.2 ft 25

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR PLATE ROLLING MACHINES

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

NOVOTECH PREMIUM LINE · MADE IN TURKEY

FOUR-ROLL AND THREE-ROLL PLATE ROLLS FOR SHELLS, TANKS, STACKS AND CONES

The machines in this catalogue are NovoTech's premium line: built in Turkey to NovoTech's specification by a CE-certified metal-forming plant with more than 40 years of machine building and exports to over 100 countries, with European hydraulic and electrical components, inspected before shipping, and sold under NovoTech's name with a CSA-approved panel, a 1-year warranty and spare parts and technical support from NovoTech in Mississauga, Ontario, Canada.


A four-roll plate roll pinches the plate between the top and bottom rolls and bends it with the two side rolls, so the sheet is pre-bent at both ends and rolled into a shell in one pass without a flat end — the 4R HSS heavy-duty machines with an NC console and hydraulic drop-end roll plate to 10 ft and more, the 4R HS-L and 4R HS are the linear and orbital versions for the general fabricator, the 4RH cassette rolls serve the sheet-metal shop and the 4R HC rolls cones on cone-machined rolls. The three-roll 3R UHS translating heavy-duty and 3R HS hydraulic plate rolls take thicker plate at a lower price. Overhead cranes, hydraulic side supports, cone-bending devices and digital readouts are options across the range.

4R HSS 20-280 – 4R HSS 60-620 · 42 MODELS · 6.7 TO 20 FT

4R HSS HYDRAULIC HEAVY-DUTY 4-ROLL PLATE ROLLS



MODEL 4R · 4R HSS 30-380 NC HYDRAULIC HEAVY-DUTY 4-ROLL PLATE ROLL, 10 FT, WITH THE NC CONSOLE

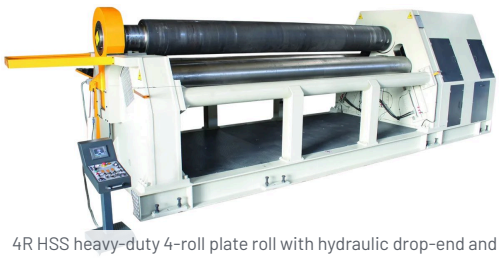

4R HSS heavy-duty 4-roll plate roll with hydraulic drop-end and mobile control console



4R HSS heavy-duty 4-roll plate roll with the overhead support, the side supports and the NC console

Working lengths 6.7 – 20 ft (2050 – 6100 mm) · rolls up to 3-3/8" (85 mm) plate

The heavy-duty 4-roll plate bending machines for wind-tower, shipyard, pressure-vessel and pipeline work: 42 models from 6.7 ft to 20 ft that roll plate up to 3-3/8" thick. The pinch roll and both side rolls travel on a pyramid linear path on hydraulic cylinders, so the cylinders put all their force into the plate; the top roll is driven by motor and planetary gearbox with two speeds. Three digital readouts, hydraulic roll balancing, a cone-bending device and a hydraulic tilting drop-end are standard; NC or CNC control (ESA, Italy), overhead crane, side supports and a plate ejector turn the machine into a wheel-rim or shell production line.

STANDARD FEATURES

- ✓ Pinch and side rolls move on a pyramid linear path with hydraulic cylinders; linear guide system puts the full cylinder force into the plate
- ✓ Top roll driven by motor and planetary gearbox, two-speed operation; overload protection
- ✓ Three digital readouts for easy roll positioning; mobile control panel
- ✓ Hydraulic roll balancing on Ø11" – 18.1" rolls, electronic balancing on Ø19.7" – 26.8" rolls; central lubrication (automatic on the large rolls)
- ✓ Hydraulic tilting drop-end for easy removal of finished parts; cone-bending device
- ✓ SAE 1050 (CK45-50) forged or hot-rolled, induction-hardened and polished rolls; welded steel frames; CE marked

OPTIONAL EQUIPMENT

- + Automation with NC or CNC control (ESA, Italy)
- + Overhead crane and hydraulic side supports for large diameters
- + Hydraulic plate ejector for series production
- + Ground rolls for special jobs; infinitely variable speed
- + Electronic roll balancing for parallel roll movement
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less
- + Accumulator system for rotating welded parts and welding safety system

DETAILS, COMPONENTS AND OPTIONS


4R HSS HYDRAULIC HEAVY-DUTY 4-ROLL PLATE ROLLS




4R HSS — optional overhead crane for large diameters



4R HSS — optional hydraulic side supports and overhead crane

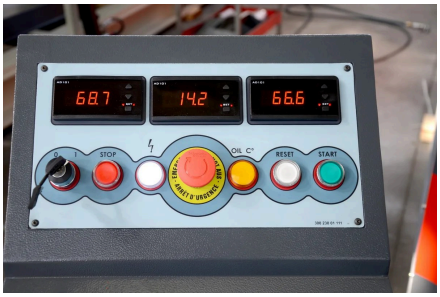

4R HSS — three digital readouts on the mobile control panel

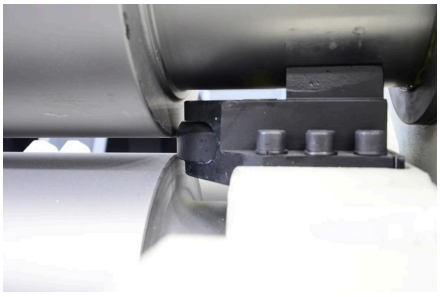


4R HSS — cone-bending device on the roll end




4R HSS 40-550 NC: 13.5 ft heavy-duty 4-roll plate roll at its NC console



4R HSS 30-350 set in a pit, with the overhead support and the hydraulic side supports

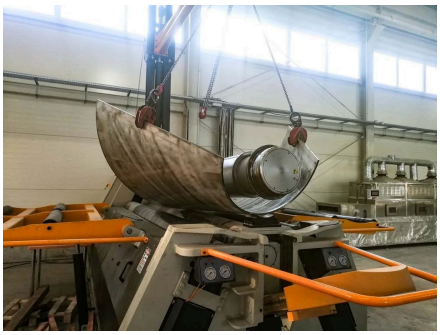

Rolling a cone on a 4R HSS: the overhead crane holds the shell while it rolls

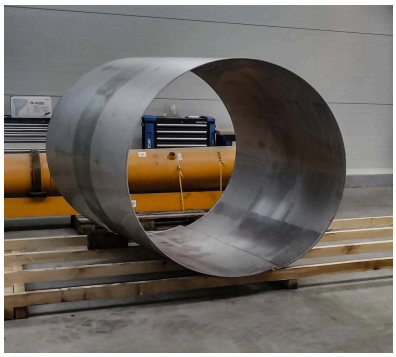

Shell rolled on a 4R HSS

TECHNICAL SPECIFICATIONS · 1 / 5

4R HSS HYDRAULIC HEAVY-DUTY 4-ROLL PLATE ROLLS

4R HSS 20 · 6.7 FT

working length 80.7" · 8 models

Model	4R HSS 20-280	4R HSS 20-320	4R HSS 20-350	4R HSS 20-380	4R HSS 20-400	4R HSS 20-460	4R HSS 20-500	4R HSS 20-550
Working length	**6.7 ft · 80.7" (2,050 mm)**	**6.7 ft · 80.7" (2,050 mm)**	**6.7 ft · 80.7" (2,050 mm)**	**6.7 ft · 80.7" (2,050 mm)**	**6.7 ft · 80.7" (2,050 mm)**	**6.7 ft · 80.7" (2,050 mm)**	**6.7 ft · 80.7" (2,050 mm)**	**6.7 ft · 80.7" (2,050 mm)**
Rolling capacity, with pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	**1/2" / 5/8" (12 / 16 mm)**	**5/8" / 13/16" (16 / 20 mm)**	**13/16" / 1" (20 / 25 mm)**	**1" / 1-1/8" (25 / 30 mm)**	**1-1/8" / 1-3/8" (30 / 35 mm)**	**1-3/8" / 1-5/8" (35 / 40 mm)**	**1-5/8" / 1-3/4" (40 / 45 mm)**	**1-3/4" / 2" (45 / 50 mm)**
Rolling capacity, no pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	5/8" / 13/16" (16 / 20 mm)	13/16" / 1" (20 / 25 mm)	1" / 1-1/8" (25 / 30 mm)	1-1/8" / 1-5/8" (30 / 40 mm)	1-3/8" / 1-3/4" (35 / 45 mm)	1-5/8" / 2" (40 / 50 mm)	1-3/4" / 2-1/8" (45 / 55 mm)	2" / 2-3/8" (50 / 60 mm)
Top & bottom roll Ø	11" (280 mm)	12.6" (320 mm)	13.8" (350 mm)	15" (380 mm)	15.7" (400 mm)	18.1" (460 mm)	19.7" (500 mm)	21.7" (550 mm)
Side roll Ø	8.7" (220 mm)	9.4" (240 mm)	10.2" (260 mm)	11.8" (300 mm)	11.8" (300 mm)	15" (380 mm)	15.7" (400 mm)	17.7" (450 mm)
Motor power	22 HP (16.5 kW)	27 HP (20 kW)	32 HP (23.5 kW)	42 HP (31.5 kW)	52 HP (38.5 kW)	52 HP (38.5 kW)	84 HP (63 kW)	94 HP (70 kW)
Rolling speed	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	3.3 – 13 ft/min (1 – 4 m/min)	3.3 – 13 ft/min (1 – 4 m/min)
Dimensions L × W × H	171 × 67 × 73" (4,350 × 1,700 × 1,850 mm)	171 × 71 × 77" (4,350 × 1,800 × 1,950 mm)	171 × 75 × 77" (4,350 × 1,900 × 1,950 mm)	191 × 89 × 93" (4,850 × 2,250 × 2,350 mm)	191 × 89 × 93" (4,850 × 2,250 × 2,350 mm)	191 × 91 × 93" (4,850 × 2,300 × 2,350 mm)	219 × 110 × 114" (5,550 × 2,800 × 2,900 mm)	224 × 114 × 116" (5,700 × 2,900 × 2,950 mm)
Weight	18,850 lb (8,550 kg)	23,149 lb (10,500 kg)	25,353 lb (11,500 kg)	32,298 lb (14,650 kg)	36,376 lb (16,500 kg)	43,652 lb (19,800 kg)	73,855 lb (33,500 kg)	88,185 lb (40,000 kg)

TECHNICAL SPECIFICATIONS · 2 / 5

4R HSS HYDRAULIC HEAVY-DUTY 4-ROLL PLATE ROLLS

4R HSS 25 · 8.4 FT

working length 100.4" · 8 models

Model	4R HSS 25-280	4R HSS 25-320	4R HSS 25-350	4R HSS 25-380	4R HSS 25-400	4R HSS 25-460	4R HSS 25-500	4R HSS 25-550
Working length	**8.4 ft · 100.4" (2,550 mm)**	**8.4 ft · 100.4" (2,550 mm)**	**8.4 ft · 100.4" (2,550 mm)**	**8.4 ft · 100.4" (2,550 mm)**	**8.4 ft · 100.4" (2,550 mm)**	**8.4 ft · 100.4" (2,550 mm)**	**8.4 ft · 100.4" (2,550 mm)**	**8.4 ft · 100.4" (2,550 mm)**
Rolling capacity, with pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	**3/8" / 1/2" (10 / 12 mm)**	**1/2" / 5/8" (12 / 16 mm)**	**5/8" / 13/16" (16 / 20 mm)**	**13/16" / 1" (20 / 25 mm)**	**1" / 1-1/8" (25 / 30 mm)**	**1-1/8" / 1-3/8" (30 / 35 mm)**	**1-3/8" / 1-5/8" (35 / 40 mm)**	**1-5/8" / 1-3/4" (40 / 45 mm)**
Rolling capacity, no pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	1/2" / 5/8" (12 / 16 mm)	5/8" / 13/16" (16 / 20 mm)	13/16" / 1" (20 / 25 mm)	1" / 1-1/8" (25 / 30 mm)	1-1/8" / 1-5/8" (30 / 40 mm)	1-3/8" / 1-3/4" (35 / 45 mm)	1-5/8" / 2" (40 / 50 mm)	1-3/4" / 2-1/8" (45 / 55 mm)
Top & bottom roll Ø	11" (280 mm)	12.6" (320 mm)	13.8" (350 mm)	15" (380 mm)	15.7" (400 mm)	18.1" (460 mm)	19.7" (500 mm)	21.7" (550 mm)
Side roll Ø	8.7" (220 mm)	9.4" (240 mm)	10.2" (260 mm)	11.8" (300 mm)	11.8" (300 mm)	15" (380 mm)	15.7" (400 mm)	17.7" (450 mm)
Motor power	22 HP (16.5 kW)	27 HP (20 kW)	32 HP (23.5 kW)	42 HP (31.5 kW)	52 HP (38.5 kW)	52 HP (38.5 kW)	84 HP (63 kW)	94 HP (70 kW)
Rolling speed	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	3.3 – 13 ft/min (1 – 4 m/min)	3.3 – 13 ft/min (1 – 4 m/min)
Dimensions L × W × H	191 × 67 × 73" (4,850 × 1,700 × 1,850 mm)	191 × 71 × 77" (4,850 × 1,800 × 1,950 mm)	191 × 75 × 77" (4,850 × 1,900 × 1,950 mm)	211 × 89 × 93" (5,350 × 2,250 × 2,350 mm)	211 × 89 × 93" (5,350 × 2,250 × 2,350 mm)	211 × 91 × 93" (5,350 × 2,300 × 2,350 mm)	238 × 110 × 114" (6,050 × 2,800 × 2,900 mm)	244 × 114 × 116" (6,200 × 2,900 × 2,950 mm)
Weight	21,275 lb (9,650 kg)	25,574 lb (11,600 kg)	28,219 lb (12,800 kg)	36,861 lb (16,720 kg)	39,242 lb (17,800 kg)	49,384 lb (22,400 kg)	79,366 lb (36,000 kg)	95,901 lb (43,500 kg)

TECHNICAL SPECIFICATIONS · 3 / 5

4R HSS HYDRAULIC HEAVY-DUTY 4-ROLL PLATE ROLLS

4R HSS 30 · 10.2 FT

working length 122" · models 280 – 460

Model	4R HSS 30-280	4R HSS 30-320	4R HSS 30-350	4R HSS 30-380	4R HSS 30-400	4R HSS 30-460
Working length	**10.2 ft · 122.0" (3,100 mm)**	**10.2 ft · 122.0" (3,100 mm)**	**10.2 ft · 122.0" (3,100 mm)**	**10.2 ft · 122.0" (3,100 mm)**	**10.2 ft · 122.0" (3,100 mm)**	**10.2 ft · 122.0" (3,100 mm)**
Rolling capacity, with pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	**5/16" / 3/8" (8 / 10 mm)**	**3/8" / 1/2" (10 / 12 mm)**	**1/2" / 5/8" (12 / 16 mm)**	**5/8" / 13/16" (16 / 20 mm)**	**13/16" / 1" (20 / 25 mm)**	**1" / 1-1/8" (25 / 30 mm)**
Rolling capacity, no pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	3/8" / 1/2" (10 / 12 mm)	1/2" / 5/8" (12 / 16 mm)	5/8" / 13/16" (16 / 20 mm)	13/16" / 1" (20 / 25 mm)	1" / 1-1/8" (25 / 30 mm)	1-1/8" / 1-5/8" (30 / 40 mm)
Top & bottom roll Ø	11" (280 mm)	12.6" (320 mm)	13.8" (350 mm)	15" (380 mm)	15.7" (400 mm)	18.1" (460 mm)
Side roll Ø	8.7" (220 mm)	9.4" (240 mm)	10.2" (260 mm)	11.8" (300 mm)	11.8" (300 mm)	15" (380 mm)
Motor power	22 HP (16.5 kW)	27 HP (20 kW)	32 HP (23.5 kW)	42 HP (31.5 kW)	52 HP (38.5 kW)	52 HP (38.5 kW)
Rolling speed	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)
Dimensions L × W × H	211 × 67 × 73" (5,350 × 1,700 × 1,850 mm)	211 × 71 × 77" (5,350 × 1,800 × 1,950 mm)	211 × 75 × 77" (5,350 × 1,900 × 1,950 mm)	230 × 89 × 93" (5,850 × 2,250 × 2,350 mm)	230 × 89 × 93" (5,850 × 2,250 × 2,350 mm)	230 × 91 × 93" (5,850 × 2,300 × 2,350 mm)
Weight	23,369 lb (10,600 kg)	28,109 lb (12,750 kg)	31,857 lb (14,450 kg)	42,329 lb (19,200 kg)	44,533 lb (20,200 kg)	55,336 lb (25,100 kg)

4R HSS 30 · 10.2 FT (CONT.)

working length 122" · models 500 – 680

Model	4R HSS 30-500	4R HSS 30-550	4R HSS 30-580	4R HSS 30-620	4R HSS 30-680
Working length	**10.2 ft · 122.0" (3,100 mm)**	**10.2 ft · 122.0" (3,100 mm)**	**10.2 ft · 122.0" (3,100 mm)**	**10.2 ft · 122.0" (3,100 mm)**	**10.2 ft · 122.0" (3,100 mm)**
Rolling capacity, with pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	**1-1/8" / 1-3/8" (30 / 35 mm)**	**1-3/8" / 1-5/8" (35 / 40 mm)**	**1-5/8" / 1-3/4" (40 / 45 mm)**	**2" / 2-3/8" (50 / 60 mm)**	**2-3/8" / 2-3/4" (60 / 70 mm)**
Rolling capacity, no pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	1-3/8" / 1-3/4" (35 / 45 mm)	1-5/8" / 2" (40 / 50 mm)	1-3/4" / 2-3/8" (45 / 60 mm)	2-3/8" / 2-3/4" (60 / 70 mm)	2-3/4" / 3-3/8" (70 / 85 mm)
Top & bottom roll Ø	19.7" (500 mm)	21.7" (550 mm)	22.8" (580 mm)	24.4" (620 mm)	26.8" (680 mm)
Side roll Ø	15.7" (400 mm)	17.7" (450 mm)	18.9" (480 mm)	20.5" (520 mm)	22.8" (580 mm)
Motor power	84 HP (63 kW)	94 HP (70 kW)	98 HP (73 kW)	165 HP (123 kW)	201 HP (150 kW)
Rolling speed	t/min 3.3 – 13	3.3 – 13 ft/min (1 – 4 m/min)	3.3 – 13 ft/min (1 – 4 m/min)	3.3 – 13 ft/min (1 – 4 m/min)	3.3 – 13 ft/min (1 – 4 m/min)
Dimensions L × W × H	260 × 110 × 114" (6,600 × 2,800 × 2,900 mm)	266 × 114 × 116" (6,750 × 2,900 × 2,950 mm)	266 × 116 × 116" (6,750 × 2,950 × 2,950 mm)	283 × 128 × 128" (7,200 × 3,250 × 3,250 mm)	303 × 138 × 142" (7,700 × 3,500 × 3,600 mm)
Weight	84,878 lb (38,500 kg)	103,617 lb (47,000 kg)	110,231 lb (50,000 kg)	136,687 lb (62,000 kg)	181,881 lb (82,500 kg)

TECHNICAL SPECIFICATIONS · 4 / 5

4R HSS HYDRAULIC HEAVY-DUTY 4-ROLL PLATE ROLLS

4R HSS 40 · 13.5 FT

working length 161.4" · 8 models

Model	4R HSS 40-280	4R HSS 40-320	4R HSS 40-350	4R HSS 40-380	4R HSS 40-400	4R HSS 40-460	4R HSS 40-500	4R HSS 40-550
Working length	**13.5 ft · 161.4" (4,100 mm)**	**13.5 ft · 161.4" (4,100 mm)**	**13.5 ft · 161.4" (4,100 mm)**	**13.5 ft · 161.4" (4,100 mm)**	**13.5 ft · 161.4" (4,100 mm)**	**13.5 ft · 161.4" (4,100 mm)**	**13.5 ft · 161.4" (4,100 mm)**	**13.5 ft · 161.4" (4,100 mm)**
Rolling capacity, with pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	**8 ga / 1/4" (4 / 6 mm)**	**1/4" / 5/16" (6 / 8 mm)**	**5/16" / 3/8" (8 / 10 mm)**	**3/8" / 1/2" (10 / 12 mm)**	**1/2" / 5/8" (12 / 16 mm)**	**5/8" / 13/16" (16 / 20 mm)**	**13/16" / 1" (20 / 25 mm)**	**1" / 1-1/8" (25 / 30 mm)**
Rolling capacity, no pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	1/4" / 5/16" (6 / 8 mm)	5/16" / 3/8" (8 / 10 mm)	3/8" / 1/2" (10 / 12 mm)	1/2" / 5/8" (12 / 16 mm)	5/8" / 13/16" (16 / 20 mm)	13/16" / 1" (20 / 25 mm)	1" / 1-3/8" (25 / 35 mm)	1-1/8" / 1-5/8" (30 / 40 mm)
Top & bottom roll Ø	11" (280 mm)	12.6" (320 mm)	13.8" (350 mm)	15" (380 mm)	15.7" (400 mm)	18.1" (460 mm)	19.7" (500 mm)	21.7" (550 mm)
Side roll Ø	8.7" (220 mm)	9.4" (240 mm)	10.2" (260 mm)	11.8" (300 mm)	11.8" (300 mm)	15" (380 mm)	15.7" (400 mm)	17.7" (450 mm)
Motor power	22 HP (16.5 kW)	27 HP (20 kW)	32 HP (23.5 kW)	42 HP (31.5 kW)	52 HP (38.5 kW)	52 HP (38.5 kW)	84 HP (63 kW)	94 HP (70 kW)
Rolling speed	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	3.3 – 13 ft/min (1 – 4 m/min)	3.3 – 13 ft/min (1 – 4 m/min)
Dimensions L × W × H	254 × 67 × 73" (6,450 × 1,700 × 1,850 mm)	254 × 71 × 77" (6,450 × 1,800 × 1,950 mm)	254 × 75 × 77" (6,450 × 1,900 × 1,950 mm)	274 × 89 × 93" (6,950 × 2,250 × 2,350 mm)	274 × 89 × 93" (6,950 × 2,250 × 2,350 mm)	274 × 91 × 93" (6,950 × 2,300 × 2,350 mm)	299 × 110 × 114" (7,600 × 2,800 × 2,900 mm)	305 × 114 × 116" (7,750 × 2,900 × 2,950 mm)
Weight	28,660 lb (13,000 kg)	32,518 lb (14,750 kg)	37,809 lb (17,150 kg)	48,502 lb (22,000 kg)	51,809 lb (23,500 kg)	65,036 lb (29,500 kg)	95,901 lb (43,500 kg)	119,050 lb (54,000 kg)

TECHNICAL SPECIFICATIONS · 5 / 5

4R HSS HYDRAULIC HEAVY-DUTY 4-ROLL PLATE ROLLS

4R HSS 60 · 20 FT

working length 240.2" · 7 models

Model	4R HSS 60-350	4R HSS 60-380	4R HSS 60-400	4R HSS 60-460	4R HSS 60-500	4R HSS 60-550	4R HSS 60-620
Working length	**20 ft · 240.2" (6,100 mm)**	**20 ft · 240.2" (6,100 mm)**	**20 ft · 240.2" (6,100 mm)**	**20 ft · 240.2" (6,100 mm)**	**20 ft · 240.2" (6,100 mm)**	**20 ft · 240.2" (6,100 mm)**	**20 ft · 240.2" (6,100 mm)**
Rolling capacity, with pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	**8 ga / 1/4" (4 / 6 mm)**	**1/4" / 5/16" (6 / 8 mm)**	**5/16" / 3/8" (8 / 10 mm)**	**3/8" / 1/2" (10 / 12 mm)**	**1/2" / 5/8" (12 / 16 mm)**	**5/8" / 13/16" (16 / 20 mm)**	**13/16" / 1" (20 / 25 mm)**
Rolling capacity, no pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	1/4" / 5/16" (6 / 8 mm)	5/16" / 3/8" (8 / 10 mm)	3/8" / 1/2" (10 / 12 mm)	1/2" / 9/16" (12 / 15 mm)	5/8" / 13/16" (16 / 20 mm)	13/16" / 1" (20 / 25 mm)	1" / 1-1/8" (25 / 30 mm)
Top & bottom roll Ø	13.8" (350 mm)	15" (380 mm)	15.7" (400 mm)	18.1" (460 mm)	19.7" (500 mm)	21.7" (550 mm)	24.4" (620 mm)
Side roll Ø	10.2" (260 mm)	11.8" (300 mm)	11.8" (300 mm)	15" (380 mm)	15.7" (400 mm)	17.7" (450 mm)	20.5" (520 mm)
Motor power	32 HP (23.5 kW)	42 HP (31.5 kW)	52 HP (38.5 kW)	52 HP (38.5 kW)	84 HP (63 kW)	94 HP (70 kW)	165 HP (123 kW)
Rolling speed	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 16 ft/min (1.5 – 5 m/min)	3.3 – 13 ft/min (1 – 4 m/min)	3.3 – 13 ft/min (1 – 4 m/min)	3.3 – 13 ft/min (1 – 4 m/min)
Dimensions L × W × H	333 × 75 × 77" (8,450 × 1,900 × 1,950 mm)	352 × 89 × 93" (8,950 × 2,250 × 2,350 mm)	352 × 89 × 93" (8,950 × 2,250 × 2,350 mm)	352 × 91 × 93" (8,950 × 2,300 × 2,350 mm)	378 × 100 × 93" (9,600 × 2,550 × 2,350 mm)	384 × 114 × 114" (9,750 × 2,900 × 2,900 mm)	402 × 128 × 128" (10,200 × 3,250 × 3,250 mm)
Weight	52,911 lb (24,000 kg)	62,281 lb (28,250 kg)	66,139 lb (30,000 kg)	88,185 lb (40,000 kg)	148,812 lb (67,500 kg)	154,324 lb (70,000 kg)	195,109 lb (88,500 kg)

Plate bending capacities are for mild steel with a yield strength of 37,700 psi (260 N/mm^2), given at a minimum rolling diameter of 5× and of 1.5× the top roll diameter, without and with pre-bending. Capacities without pre-bending leave a flat end depending on diameter. Thin sheet in gauge; metric values in brackets are the manufacturer's nominal figures. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

4R HS-L 10-100 – 4R HS-L 20-130 · 7 MODELS · 3.4 TO 6.7 FT

4R HS-L HYDRAULIC 4-ROLL PLATE ROLLS — LINEAR, WEDGE PINCH



MODEL 4R · 4R HS 30-190 HYDRAULIC 4-ROLL PLATE ROLL, 10 FT



4R HS 20-260 with the optional overhead crane and side supports



4R HS-L linear 4-roll plate roll with the NC console

Working lengths 3.4 – 6.7 ft (1050 – 2050 mm) · rolls up to 5/16" (8 mm)

Compact 4-roll plate rolls with Ø3.9" – 5.1" rolls for light and medium plate and stainless steel. The bottom pinch roll rises on a hydraulic wedge system and the two side rolls work in double-pinch pyramid action, so both ends of the sheet are pre-bent in one pass; the top roll is driven by a hydraulic motor through a planetary gearbox and the bottom roll through a cardan joint. Three digital readouts, hydraulic drop-end, cone-bending device and two speeds are standard — the 4R HS-L is also the base of the automatic wheel-rim body rolling line.

STANDARD FEATURES

- ✓ Bottom pinch roll on a hydraulic wedge system; two side rolls with double-pinch pyramid action — double pre-bend in one pass
- ✓ Top roll driven by hydraulic motor and planetary gearbox; bottom roll by cardan-joint system through gears
- ✓ Three digital readouts; mobile control panel; central lubrication; overload protection
- ✓ Hydraulic drop-end; cone-bending device; two-speed operation
- ✓ SAE 1050 (CK45-50) induction-hardened and polished rolls; welded steel frames; CE marked

OPTIONAL EQUIPMENT

- + Automation with NC or CNC control
- + Overhead crane and hydraulic side supports
- + Hydraulic plate ejector — automatic wheel-rim body rolling
- + Ground rolls; infinitely variable speed; electronic roll balancing
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

DETAILS, COMPONENTS AND OPTIONS


4R HS-L HYDRAULIC 4-ROLL PLATE ROLLS — LINEAR, WEDGE PINCH



4R HS-L NC with its electrical cabinet



4R HS-L from above: the top roll, the pinch roll and the two side rolls, with the pinch pressure regulator

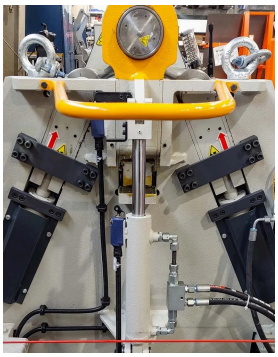

Linear guides of the side rolls on the 4R HS-L



Central lubrication pump on the 4R HS-L



Tubes rolled on a 4R HS-L

TECHNICAL SPECIFICATIONS

4R HS-L HYDRAULIC 4-ROLL PLATE ROLLS — LINEAR, WEDGE PINCH

4R HS-L · LINEAR

Ø3.9″ – 5.1″ rolls · 3.4 – 6.7 ft · 7 models

Model	4R HS-L 10-100	4R HS-L 10-130	4R HS-L 12-100	4R HS-L 12-130	4R HS-L 15-100	4R HS-L 15-130	4R HS-L 20-130
Working length	**3.4 ft · 41.3″ (1,050 mm)**	**3.4 ft · 41.3″ (1,050 mm)**	**4.2 ft · 50.0″ (1,270 mm)**	**4.2 ft · 50.0″ (1,270 mm)**	**5.1 ft · 61.0″ (1,550 mm)**	**5.1 ft · 61.0″ (1,550 mm)**	**6.7 ft · 80.7″ (2,050 mm)**
Rolling capacity, with pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	**12 ga / 11 ga (2.5 / 3 mm)**	**8 ga / 3/16″ (4 / 5 mm)**	**14 ga / 12 ga (2 / 2.5 mm)**	**11 ga / 8 ga (3 / 4 mm)**	**16 ga / 14 ga (1.5 / 2 mm)**	**12 ga / 10 ga (2.5 / 3.5 mm)**	**14 ga / 11 ga (2 / 3 mm)**
Rolling capacity, no pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	11 ga / 10 ga (3 / 3.5 mm)	3/16″ / 1/4″ (5 / 6 mm)	12 ga / 11 ga (2.5 / 3 mm)	8 ga / 3/16″ (4 / 5 mm)	14 ga / 12 ga (2 / 2.5 mm)	10 ga / 7 ga (3.5 / 4.5 mm)	11 ga / 8 ga (3 / 4 mm)
Top & bottom roll Ø	3.9″ (100 mm)	5.1″ (130 mm)	3.9″ (100 mm)	5.1″ (130 mm)	3.9″ (100 mm)	5.1″ (130 mm)	5.1″ (130 mm)
Side roll Ø	4.3″ (110 mm)	5.1″ (130 mm)	4.3″ (110 mm)	5.1″ (130 mm)	4.3″ (110 mm)	5.1″ (130 mm)	5.1″ (130 mm)
Motor power	3 HP (2.25 kW)	4 HP (3 kW)	3 HP (2.25 kW)	4 HP (3 kW)	3 HP (2.25 kW)	4 HP (3 kW)	4 HP (3 kW)
Rolling speed	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)
Dimensions L × W × H	122 × 43 × 43″ (3,100 × 1,100 × 1,100 mm)	122 × 43 × 45″ (3,100 × 1,100 × 1,150 mm)	132 × 43 × 43″ (3,350 × 1,100 × 1,100 mm)	132 × 43 × 45″ (3,350 × 1,100 × 1,150 mm)	142 × 43 × 43″ (3,600 × 1,100 × 1,100 mm)	142 × 43 × 45″ (3,600 × 1,100 × 1,150 mm)	161 × 43 × 45″ (4,100 × 1,100 × 1,150 mm)
Weight	4,431 lb (2,010 kg)	4,806 lb (2,180 kg)	4,850 lb (2,200 kg)	4,938 lb (2,240 kg)	4,960 lb (2,250 kg)	5,357 lb (2,430 kg)	5,952 lb (2,700 kg)

Plate bending capacities are for mild steel with a yield strength of 37,700 psi (260 N/mm^2), given at a minimum rolling diameter of 5× and of 1.5× the top roll diameter, without and with pre-bending. Capacities without pre-bending leave a flat end depending on diameter. Thin sheet in gauge; metric values in brackets are the manufacturer's nominal figures. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

4R HS 15-150 – 4R HS 40-260 · 22 MODELS · 5.1 TO 13.5 FT


4R HS HYDRAULIC 4-ROLL PLATE ROLLS — ORBITAL



MODEL 4R · 4R HS 25-245 HYDRAULIC 4-ROLL PLATE ROLL, 8.4 FT, WITH THE MOBILE CONTROL CONSOLE



4R HS hydraulic 4-roll plate roll with the overhead support and the mobile console



4R HS — cone-bending device

Working lengths 5.1 – 13.5 ft (1550 – 4100 mm) · rolls up to 1" (25 mm)

Mid-range 4-roll plate bending machines with Ø5.9" – 10.2" rolls: the pinch and side rolls move on an orbital path with hydraulic cylinders, the top roll is driven by hydromotor and planetary gearbox and the bottom roll by gear and cardan system. Hydraulic balancing keeps the rolls parallel; three digital readouts, cone-bending device and two speeds are standard. From 5.1 ft to 13.5 ft and plate up to 1" — the 4-roll machine of the general fabrication shop, available with NC or CNC control, overhead crane and side supports.

STANDARD FEATURES

- ✓ Pinch and side rolls move on an orbital path with hydraulic cylinders; hydraulic balancing system
- ✓ Top roll driven by hydromotor and planetary gearbox; bottom roll by gear and cardan system
- ✓ Three digital readouts for easy roll positioning; mobile control panel; overload protection
- ✓ Hydraulic drop-end; cone-bending device; two-speed operation
- ✓ SAE 1050 (CK45-50) forged or hot-rolled, induction-hardened and polished rolls; welded steel frames; CE marked

OPTIONAL EQUIPMENT

- + Automation with NC or CNC control (ESA, Italy)
- + Overhead crane and hydraulic side supports for large diameters
- + Hydraulic plate ejector for series production
- + Ground rolls for special jobs; infinitely variable speed
- + Electronic roll balancing for parallel roll movement
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

4R HS 15 · 5.1 FT — TECHNICAL SPECIFICATIONS

Model	4R HS 15-150	4R HS 15-180	4R HS 15-200	4R HS 15-220	4R HS 15-245
Working length	**5.1 ft · 61.0" (1,550 mm)**	**5.1 ft · 61.0" (1,550 mm)**	**5.1 ft · 61.0" (1,550 mm)**	**5.1 ft · 61.0" (1,550 mm)**	**5.1 ft · 61.0" (1,550 mm)**
Rolling capacity, with pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	**10 ga / 7 ga (3.5 / 4.5 mm)**	**3/16" / 1/4" (5 / 6 mm)**	**1/4" / 3/8" (6 / 10 mm)**	**5/16" / 3/8" (8 / 10 mm)**	**3/8" / 1/2" (10 / 12 mm)**
Rolling capacity, no pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	7 ga / 1/4" (4.5 / 6 mm)	1/4" / 3/8" (6 / 10 mm)	3/8" / 7/16" (10 / 11 mm)	3/8" / 1/2" (10 / 12 mm)	1/2" / 9/16" (12 / 15 mm)
Top & bottom roll Ø	5.9" (150 mm)	7.1" (180 mm)	7.9" / 8.7" (200 / 220 mm)	8.7" (220 mm)	9.6" (245 mm)
Side roll Ø	5.1" (130 mm)	5.9" (150 mm)	6.3" (160 mm)	6.3" (160 mm)	7.1" (180 mm)
Motor power	5.4 HP (4 kW)	7.4 HP (5.5 kW)	7.4 HP (5.5 kW)	7.4 HP (5.5 kW)	10 HP (7.5 kW)
Rolling speed	t/min 4.9 – 20	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)
Dimensions L × W × H	148 × 38 × 43" (3,750 × 970 × 1,100 mm)	154 × 45 × 49" (3,900 × 1,150 × 1,250 mm)	154 × 45 × 49" (3,900 × 1,150 × 1,250 mm)	154 × 45 × 49" (3,900 × 1,150 × 1,250 mm)	150 × 63 × 58" (3,800 × 1,600 × 1,450 mm)
Weight	5,809 lb (2,630 kg)	7,297 lb (3,310 kg)	7,716 lb (3,500 kg)	7,937 lb (3,600 kg)	10,803 lb (4,900 kg)

DETAILS, COMPONENTS AND OPTIONS

4R HS HYDRAULIC 4-ROLL PLATE ROLLS – ORBITAL



4R HS 20-260: 6.7 ft hydraulic 4-roll plate roll



4R HS 25-260 NC, 8.4 ft, with both side supports raised



Cone rolled on a 4R HS

TECHNICAL SPECIFICATIONS · 1 / 2

4R HS HYDRAULIC 4-ROLL PLATE ROLLS — ORBITAL

4R HS 20 · 6.7 FT

working length 80.7" · 6 models

Model	4R HS 20-150	4R HS 20-180	4R HS 20-200	4R HS 20-220	4R HS 20-245	4R HS 20-260
Working length	**6.7 ft · 80.7" (2,050 mm)**	**6.7 ft · 80.7" (2,050 mm)**	**6.7 ft · 80.7" (2,050 mm)**	**6.7 ft · 80.7" (2,050 mm)**	**6.7 ft · 80.7" (2,050 mm)**	**6.7 ft · 80.7" (2,050 mm)**
Rolling capacity, with pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	**11 ga / 8 ga (3 / 4 mm)**	**8 ga / 1/4" (4 / 6 mm)**	**1/4" / 5/16" (6 / 8 mm)**	**1/4" / 3/8" (6 / 10 mm)**	**5/16" / 3/8" (8 / 10 mm)**	**3/8" / 1/2" (10 / 12 mm)**
Rolling capacity, no pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	8 ga / 1/4" (4 / 6 mm)	1/4" / 5/16" (6 / 8 mm)	5/16" / 3/8" (8 / 10 mm)	3/8" / 7/16" (10 / 11 mm)	3/8" / 1/2" (10 / 12 mm)	1/2" / 5/8" (12 / 16 mm)
Top & bottom roll Ø	5.9" (150 mm)	7.1" (180 mm)	7.9" / 8.7" (200 / 220 mm)	8.7" (220 mm)	9.6" (245 mm)	10.2" (260 mm)
Side roll Ø	5.1" (130 mm)	5.9" (150 mm)	6.3" (160 mm)	6.3" (160 mm)	7.1" (180 mm)	7.9" (200 mm)
Motor power	5.4 HP (4 kW)	7.4 HP (5.5 kW)	7.4 HP (5.5 kW)	7.4 HP (5.5 kW)	10 HP (7.5 kW)	10 HP (7.5 kW)
Rolling speed	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)
Dimensions L × W × H	167 × 38 × 43" (4,250 × 970 × 1,100 mm)	173 × 45 × 49" (4,400 × 1,150 × 1,250 mm)	173 × 45 × 49" (4,400 × 1,150 × 1,250 mm)	173 × 45 × 49" (4,400 × 1,150 × 1,250 mm)	169 × 63 × 58" (4,300 × 1,600 × 1,450 mm)	169 × 63 × 61" (4,300 × 1,600 × 1,550 mm)
Weight	6,173 lb (2,800 kg)	8,300 lb (3,760 kg)	8,874 lb (4,030 kg)	8,995 lb (4,080 kg)	12,015 lb (5,450 kg)	13,448 lb (6,100 kg)

4R HS 25 · 8.4 FT

working length 100.4" · 5 models

Model	4R HS 25-180	4R HS 25-200	4R HS 25-220	4R HS 25-245	4R HS 25-260
Working length	**8.4 ft · 100.4" (2,550 mm)**	**8.4 ft · 100.4" (2,550 mm)**	**8.4 ft · 100.4" (2,550 mm)**	**8.4 ft · 100.4" (2,550 mm)**	**8.4 ft · 100.4" (2,550 mm)**
Rolling capacity, with pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	**11 ga / 8 ga (3 / 4 mm)**	**8 ga / 1/4" (4 / 6 mm)**	**3/16" / 1/4" (5 / 6 mm)**	**1/4" / 5/16" (6 / 8 mm)**	**5/16" / 3/8" (8 / 10 mm)**
Rolling capacity, no pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	8 ga / 1/4" (4 / 6 mm)	1/4" / 5/16" (6 / 8 mm)	1/4" / 3/8" (6 / 10 mm)	5/16" / 3/8" (8 / 10 mm)	3/8" / 1/2" (10 / 12 mm)
Top & bottom roll Ø	7.1" (180 mm)	7.9" / 8.7" (200 / 220 mm)	8.7" (220 mm)	9.6" (245 mm)	10.2" (260 mm)
Side roll Ø	5.9" (150 mm)	6.3" (160 mm)	6.3" (160 mm)	7.1" (180 mm)	7.9" (200 mm)
Motor power	7.4 HP (5.5 kW)	7.4 HP (5.5 kW)	7.4 HP (5.5 kW)	10 HP (7.5 kW)	10 HP (7.5 kW)
Rolling speed	t/min 4.9 – 20	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)
Dimensions L × W × H	193 × 45 × 49" (4,900 × 1,150 × 1,250 mm)	193 × 45 × 49" (4,900 × 1,150 × 1,250 mm)	193 × 45 × 49" (4,900 × 1,150 × 1,250 mm)	189 × 63 × 58" (4,800 × 1,600 × 1,450 mm)	189 × 63 × 61" (4,800 × 1,600 × 1,550 mm)
Weight	8,598 lb (3,900 kg)	10,274 lb (4,660 kg)	10,141 lb (4,600 kg)	13,603 lb (6,170 kg)	14,991 lb (6,800 kg)

TECHNICAL SPECIFICATIONS · 2 / 2

4R HS HYDRAULIC 4-ROLL PLATE ROLLS — ORBITAL

4R HS 30 · 10.2 FT

working length 122" · 5 models

Model	4R HS 30-180	4R HS 30-200	4R HS 30-220	4R HS 30-245	4R HS 30-260
Working length	**10.2 ft · 122.0" (3,100 mm)**	**10.2 ft · 122.0" (3,100 mm)**	**10.2 ft · 122.0" (3,100 mm)**	**10.2 ft · 122.0" (3,100 mm)**	**10.2 ft · 122.0" (3,100 mm)**
Rolling capacity, with pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	**14 ga / 11 ga (2 / 3 mm)**	**11 ga / 8 ga (3 / 4 mm)**	**8 ga / 1/4" (4 / 6 mm)**	**3/16" / 1/4" (5 / 6 mm)**	**1/4" / 5/16" (6 / 8 mm)**
Rolling capacity, no pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	11 ga / 3/16" (3 / 5 mm)	8 ga / 1/4" (4 / 6 mm)	1/4" / 5/16" (6 / 8 mm)	1/4" / 3/8" (6 / 10 mm)	5/16" / 3/8" (8 / 10 mm)
Top & bottom roll Ø	7.1" (180 mm)	7.9" / 8.7" (200 / 220 mm)	8.7" (220 mm)	9.6" (245 mm)	10.2" (260 mm)
Side roll Ø	5.9" (150 mm)	6.3" (160 mm)	6.3" (160 mm)	7.1" (180 mm)	7.9" (200 mm)
Motor power	7.4 HP (5.5 kW)	7.4 HP (5.5 kW)	7.4 HP (5.5 kW)	10 HP (7.5 kW)	10 HP (7.5 kW)
Rolling speed	t/min 4.9 – 20	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)	4.9 – 20 ft/min (1.5 – 6 m/min)
Dimensions L × W × H	215 × 45 × 49" (5,450 × 1,150 × 1,250 mm)	215 × 45 × 49" (5,450 × 1,150 × 1,250 mm)	215 × 45 × 49" (5,450 × 1,150 × 1,250 mm)	211 × 63 × 58" (5,350 × 1,600 × 1,450 mm)	211 × 63 × 61" (5,350 × 1,600 × 1,550 mm)
Weight	9,480 lb (4,300 kg)	11,211 lb (5,090 kg)	11,464 lb (5,200 kg)	15,102 lb (6,850 kg)	17,108 lb (7,760 kg)

4R HS 40 · 13.5 FT

working length 161.4"

Model	4R HS 40-260
Working length	**13.5 ft · 161.4" (4,100 mm)**
Rolling capacity, with pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	**11 ga / 8 ga (3 / 4 mm)**
Rolling capacity, no pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	8 ga / 1/4" (4 / 6 mm)
Top & bottom roll Ø	10.2" (260 mm)
Side roll Ø	7.9" (200 mm)
Motor power	10 HP (7.5 kW)
Rolling speed	t/min 4.9 – 20
Dimensions L × W × H	258 × 63 × 61" (6,550 × 1,600 × 1,550 mm)
Weight	19,621 lb (8,900 kg)

Plate bending capacities are for mild steel with a yield strength of 37,700 psi (260 N/mm²), given at a minimum rolling diameter of 5× and of 1.5× the top roll diameter, without and with pre-bending. Capacities without pre-bending leave a flat end depending on diameter. Thin sheet in gauge; metric values in brackets are the manufacturer's nominal figures. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

4RH 10-60 – 4RH 15-130 · 7 MODELS · 3.4 TO 5.1 FT

4RH NC CASSETTE-TYPE HYDRAULIC 4-ROLL PLATE ROLLS



MODEL 4RH · 4RH 10-90 NC CASSETTE-TYPE HYDRAULIC 4-ROLL PLATE ROLL WITH NC CONSOLE



4RH 10-130 NC with the NC control console



4RH 10-75 NC cassette-type 4-roll plate roll with the feed table and the NC console

Working lengths 3.4 – 5.1 ft (1050 – 1550 mm) · sheet up to 3/16" (5 mm) · NC control standard

Compact NC-controlled 4-roll machines for light plate, aluminum and stainless steel from 22 ga to 3/16": all rolls move with one hydraulic cylinder through a cassette-type frame, the top roll is driven by planetary gearbox and the bottom and side rolls by gear system. NC control panel, feeding table and hydraulic drop-end are standard. The cassette design is also built as special mass-production systems for the automotive sector — elliptical and cylindrical shapes such as exhaust mufflers.

STANDARD FEATURES


- ✓ NC control panel standard; mobile control panel
- ✓ Rolls move with one hydraulic cylinder through a cassette-type frame
- ✓ Top roll driven by planetary gearbox; bottom and side rolls by gear system
- ✓ Feeding table; hydraulic drop-end for easy removal of finished parts
- ✓ Welded steel frames; overload protection; CE marked
- ✓ Special cassette systems for mass production of mufflers and similar cylindrical / elliptical parts

OPTIONAL EQUIPMENT

- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

DETAILS, COMPONENTS AND OPTIONS


4RH NC CASSETTE-TYPE HYDRAULIC 4-ROLL PLATE ROLLS

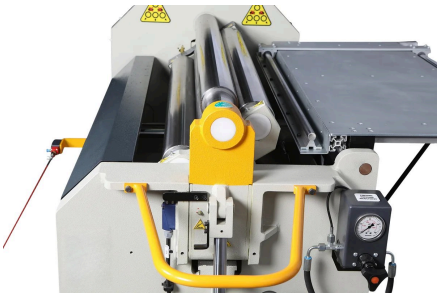

4RH — the four rolls move in a cassette-type frame; hydraulic drop-end and feeding table



4RH 10-90 NC — feeding table and drop-end side

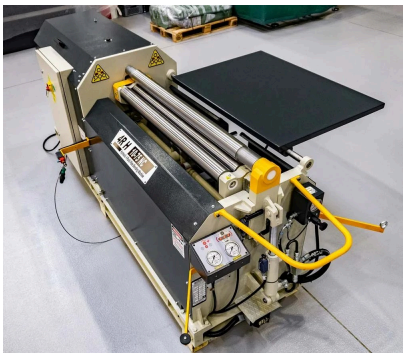

4RH 10-75 NC from above: the rolls in their cassette frame and the feed table



4RH from the drop end: the pressure gauges and the feed table



Sheet rolled on the 4RH, with the pinch pressure regulator in front

TECHNICAL SPECIFICATIONS

4RH NC CASSETTE-TYPE HYDRAULIC 4-ROLL PLATE ROLLS

4RH · CASSETTE TYPE

3.4 – 5.1 ft · 7 models

Model	4RH 10-60	4RH 10-75	4RH 10-90	4RH 10-130	4RH 13-115	4RH 15-90	4RH 15-130
Working length	**3.4 ft · 41.3″ (1,050 mm)**	**3.4 ft · 41.3″ (1,050 mm)**	**3.4 ft · 41.3″ (1,050 mm)**	**3.4 ft · 41.3″ (1,050 mm)**	**4.4 ft · 53.1″ (1,350 mm)**	**5.1 ft · 61.0″ (1,550 mm)**	**5.1 ft · 61.0″ (1,550 mm)**
Rolling capacity, with pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	**22 ga / 20 ga (0.8 / 1 mm)**	**20 ga / 16 ga (1 / 1.5 mm)**	**16 ga / 14 ga (1.5 / 2 mm)**	**11 ga / 8 ga (3 / 4 mm)**	**14 ga / 11 ga (2 / 3 mm)**	**20 ga / 16 ga (1 / 1.5 mm)**	**14 ga / 11 ga (2 / 3 mm)**
Rolling capacity, no pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	20 ga / 16 ga (1 / 1.5 mm)	16 ga / 14 ga (1.5 / 2 mm)	14 ga / 12 ga (2 / 2.5 mm)	8 ga / 3/16″ (4 / 5 mm)	11 ga / 8 ga (3 / 4 mm)	16 ga / 14 ga (1.5 / 2 mm)	11 ga / 8 ga (3 / 4 mm)
Top & bottom roll Ø	2.4″ / 3.1″ (60 / 80 mm)	3″ / 3.1″ (75 / 80 mm)	3.5″ / 3.9″ (90 / 100 mm)	5.1″ / 5.1″ (130 / 130 mm)	4.5″ / 4.5″ (115 / 115 mm)	3.5″ / 3.9″ (90 / 100 mm)	5.1″ / 5.1″ (130 / 130 mm)
Side roll Ø	3.1″ (80 mm)	3.1″ (80 mm)	3.9″ (100 mm)	4.3″ (110 mm)	4.5″ (115 mm)	3.9″ (100 mm)	4.3″ (110 mm)
Motor power	3 HP (2.25 kW)	3 HP (2.25 kW)	3 HP (2.25 kW)	4 HP (3 kW)	4 HP (3 kW)	3 HP (2.25 kW)	4 HP (3 kW)
Rolling speed	15 ft/min (4.5 m/min)	15 ft/min (4.5 m/min)	15 ft/min (4.5 m/min)	15 ft/min (4.5 m/min)	15 ft/min (4.5 m/min)	15 ft/min (4.5 m/min)	16 ft/min (5 m/min)
Dimensions L × W × H	104 × 33 × 42″ (2,650 × 840 × 1,050 mm)	104 × 33 × 42″ (2,650 × 840 × 1,050 mm)	104 × 33 × 43″ (2,650 × 840 × 1,100 mm)	104 × 35 × 47″ (2,650 × 890 × 1,200 mm)	110 × 33 × 43″ (2,800 × 840 × 1,100 mm)	124 × 33 × 43″ (3,150 × 840 × 1,100 mm)	124 × 35 × 47″ (3,150 × 890 × 1,200 mm)
Weight	3,086 lb (1,400 kg)	3,153 lb (1,430 kg)	3,197 lb (1,450 kg)	3,638 lb (1,650 kg)	3,858 lb (1,750 kg)	4,123 lb (1,870 kg)	4,817 lb (2,180 kg)

Plate bending capacities are for mild steel with a yield strength of 37,700 psi (260 N/mm^2), given at a minimum rolling diameter of 5× and of 1.5× the top roll diameter, without and with pre-bending. Capacities without pre-bending leave a flat end depending on diameter. Thin sheet in gauge; metric values in brackets are the manufacturer's nominal figures. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

4R HC 10-155 · 10-185 · 15-185

4R HC HYDRAULIC 4-ROLL CONICAL PLATE ROLLS



MODEL 4R · 4R HC 10-155 HYDRAULIC 4-ROLL CONICAL PLATE ROLL WITH CONE-MACHINED ROLLS



4R HC from the roll end: the conical rolls between the feed tables



4R HC 10-185 with its console: digital read-outs for every roll

Working lengths 3.4 – 5.1 ft (1050 – 1550 mm) · cones in sheet to 8 ga (4 mm)

Purpose-built cone rolling machines: four polished, cone-machined rolls driven by a gear system from a single planetary gearbox and hydromotor, with the pinch and side rolls on hydraulic cylinders. Five digital readouts set the roll positions for repeat cones in light plate, aluminum and stainless steel up to 8 ga — hoppers, funnels, reducers and lamp posts — with a hydraulic drop-end to release the finished cone.

STANDARD FEATURES

- ✓ Special polished, cone-machined rolls — made for rolling cones
- ✓ Four rolls driven by a gear system from a single planetary gearbox and hydromotor
- ✓ Pinch and side rolls move with hydraulic cylinders; 5 digital readouts for easy roll positioning
- ✓ Hydraulic drop-end; mobile control panel; manual central lubrication
- ✓ SAE 1050 (CK45-50) induction-hardened and polished rolls; welded steel frames; overload protection

OPTIONAL EQUIPMENT

- \+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

4R HC · CONICAL — TECHNICAL SPECIFICATIONS


Model	4R HC 10-155	4R HC 10-185	4R HC 15-185
Working length	**3.4 ft · 41.3″ (1,050 mm)**	**3.4 ft · 41.3″ (1,050 mm)**	**5.1 ft · 61.0″ (1,550 mm)**
Rolling capacity mild steel	**11 ga (3 mm)**	**8 ga (4 mm)**	**11 ga (3 mm)**
Largest roll Ø (cone end)	6.1″ (155 mm)	7.3″ (185 mm)	7.3″ (185 mm)
Smallest roll Ø (cone end)	1.6″ (40 mm)	2.8″ (70 mm)	2.8″ (70 mm)
Min. rolling Ø	2.5″ (65 mm)	4.1″ (105 mm)	4.1″ (105 mm)
Motor power	5.4 HP (4 kW)	7.4 HP (5.5 kW)	7.4 HP (5.5 kW)
Rolling speed	16 ft/min (5 m/min)	16 ft/min (5 m/min)	16 ft/min (5 m/min)
Dimensions L × W × H	138 × 43 × 46″ (3,500 × 1,100 × 1,150 mm)	138 × 43 × 47″ (3,500 × 1,100 × 1,200 mm)	157 × 43 × 47″ (4,000 × 1,100 × 1,200 mm)
Weight	4,828 lb (2,190 kg)	5,478 lb (2,480 kg)	6,272 lb (2,840 kg)

Capacities are for mild steel unless stated; metric values in brackets are the manufacturer's nominal figures. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

4R HC HYDRAULIC 4-ROLL CONICAL PLATE ROLLS

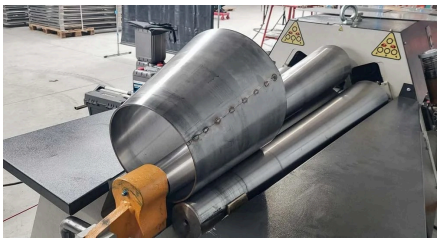

Rolling a cone on the 4R HC



Cones rolled on the 4R HC

3R UHS 30-450 – 3R UHS 30-680 · 6 MODELS · 10.2 FT

3R UHS 3-ROLL HYDRAULIC TRANSLATING HEAVY-DUTY PLATE ROLLS



MODEL 3R · 3R UHS 30-550 HYDRAULIC TRANSLATING HEAVY-DUTY 3-ROLL PLATE ROLL, 10 FT

Working length 10.2 ft (3100 mm) · rolls up to 3-1/2" (90 mm) plate

Three-roll plate rolls of the translating type: the two bottom rolls move horizontally, which gives a low working height, a smaller foundation pit (none on the smaller models), the best pre-bending on every diameter and more plate thickness than equivalent 3- or 4-roll machines — up to 3-1/2" on the 3R UHS 30-680. Reducing the side-roll distance improves pre-bending on small diameters, heavy cones are rolled in several strokes and the solid frame also works as a press for re-rolling and calibrating tubes. Hydraulic drop-end, brake system, cone-bending device and electronic roll balancing are standard.

STANDARD FEATURES

- ✓ Horizontally moving bottom rolls — lower working height, smaller or no foundation pit, reduced overall dimensions
- ✓ Best pre-bending on every required diameter; large working stroke; no need to tilt the top roll to remove finished tubes
- ✓ Bends thicker plate than equivalent 3- or 4-roll machines; heavy cones produced in several strokes
- ✓ Solid construction lets the machine work as a press brake for re-rolling and calibrating tubes
- ✓ Two-speed operation; cone-bending device; electronic roll balancing; standard brake system; hydraulic drop-end
- ✓ SAE 1050 (CK45-50) forged or hot-rolled, induction-hardened and polished rolls

OPTIONAL EQUIPMENT

- + NC control system
- + Overhead crane and hydraulic side supports for large diameters
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

TECHNICAL SPECIFICATIONS

3R UHS 3-ROLL HYDRAULIC TRANSLATING HEAVY-DUTY PLATE ROLLS

3R UHS 30 · 10.2 FT

working length 122″ · 6 models

Model	3R UHS 30-450	3R UHS 30-500	3R UHS 30-550	3R UHS 30-580	3R UHS 30-620	3R UHS 30-680
Working length	**10.2 ft · 122.0″ (3,100 mm)**	**10.2 ft · 122.0″ (3,100 mm)**	**10.2 ft · 122.0″ (3,100 mm)**	**10.2 ft · 122.0″ (3,100 mm)**	**10.2 ft · 122.0″ (3,100 mm)**	**10.2 ft · 122.0″ (3,100 mm)**
Rolling capacity, with pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	**1-1/8″ / 1-5/8″ (30 / 40 mm)**	**1-3/8″ / 1-3/4″ (35 / 45 mm)**	**1-5/8″ / 2″ (40 / 50 mm)**	**1-3/4″ / 2-3/8″ (45 / 60 mm)**	**2-1/8″ / 2-1/2″ (55 / 65 mm)**	**2-1/2″ / 3″ (65 / 75 mm)**
Rolling capacity, no pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	1-5/8″ / 2-1/8″ (40 / 55 mm)	1-3/4″ / 2-3/8″ (45 / 60 mm)	2″ / 2-1/2″ (50 / 65 mm)	2-3/8″ / 2-3/4″ (60 / 70 mm)	2-1/2″ / 3-1/8″ (65 / 80 mm)	3″ / 3-1/2″ (75 / 90 mm)
Top roll Ø	17.7″ (450 mm)	19.7″ (500 mm)	21.7″ (550 mm)	22.8″ (580 mm)	24.4″ (620 mm)	26.8″ (680 mm)
Bottom rolls Ø	16.5″ (420 mm)	18.1″ (460 mm)	19.7″ (500 mm)	19.7″ (500 mm)	22″ (560 mm)	23.6″ (600 mm)
Motor power	70 HP (52 kW)	99 HP (73 kW)	99 HP (73 kW)	99 HP (73 kW)	227 HP (170 kW)	241 HP (180 kW)
Rolling speed	4.9 – 16 ft/min (1.5 – 5 m/min)	4.9 – 13 ft/min (1.5 – 4 m/min)	4.9 – 13 ft/min (1.5 – 4 m/min)	4.9 – 13 ft/min (1.5 – 4 m/min)	4.9 – 13 ft/min (1.5 – 4 m/min)	4.9 – 13 ft/min (1.5 – 4 m/min)
Dimensions L × W × H	262 × 110 × 87″ (6,650 × 2,800 × 2,200 mm)	293 × 122 × 104″ (7,450 × 3,100 × 2,650 mm)	299 × 132 × 106″ (7,600 × 3,350 × 2,700 mm)	315 × 150 × 112″ (8,000 × 3,800 × 2,850 mm)	354 × 173 × 118″ (9,000 × 4,400 × 3,000 mm)	362 × 177 × 118″ (9,200 × 4,500 × 3,000 mm)
Weight	55,116 lb (25,000 kg)	72,753 lb (33,000 kg)	99,208 lb (45,000 kg)	110,231 lb (50,000 kg)	143,300 lb (65,000 kg)	160,937 lb (73,000 kg)

Plate bending capacities are for mild steel with a yield strength of 37,700 psi (260 N/mm^2), given at a minimum rolling diameter of 5× and of 1.5× the top roll diameter, without and with pre-bending. Capacities without pre-bending leave a flat end depending on diameter. Thin sheet in gauge; metric values in brackets are the manufacturer's nominal figures. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

3R HS 20-210 – 3R HS 30-280 · 12 MODELS · 6.7 TO 10.2 FT


3R HS 3-ROLL HYDRAULIC PLATE ROLLS



MODEL 3R · 3R HS 20-210 HYDRAULIC 3-ROLL PLATE ROLL, 6.7 FT, WITH THE MOBILE CONTROL CONSOLE



3R HS 20-240 3-roll hydraulic plate roll with its console



3R HS — hydraulic drop-end and roll ends with extended shafts

Working lengths 6.7 – 10.2 ft (2050 – 3100 mm) · rolls up to 1-1/8" (30 mm)

Double-pinch 3-roll plate bending machines for light and medium plate, aluminum and stainless steel: the side rolls move on an orbital path with hydraulic cylinders, all three rolls are driven by a single planetary gearbox and gear system and hydraulic balancing keeps them parallel. Cone-bending device with ball bearing, hydraulic drop-end and extended roll shafts for profile and pipe bending rolls are standard — one machine rolls cylinders, cones and, with the optional roll set, angle and pipe.

STANDARD FEATURES

- ✓ Side rolls move on an orbital path with hydraulic cylinders; hydraulic balancing for parallel roll movement
- ✓ All 3 rolls driven by a single planetary gearbox and gear system
- ✓ Cone-bending device with ball bearing; hydraulic drop-end
- ✓ Extended shafts for profile and pipe bending rolls
- ✓ Mobile control panel; overload protection
- ✓ SAE 1050 (CK45-50) forged or hot-rolled, induction-hardened and polished rolls; welded steel frames; CE marked

OPTIONAL EQUIPMENT

- + Profile bending roll set on the extended shafts
- + Overhead crane and hydraulic side supports for large diameters
- + Ground rolls; infinitely variable speed; electronic roll balancing
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

3R HS 20 · 6.7 FT — TECHNICAL SPECIFICATIONS

Model	3R HS 20-210	3R HS 20-240	3R HS 20-280	3R HS 20-300
Working length	**6.7 ft · 80.7" (2,050 mm)**	**6.7 ft · 80.7" (2,050 mm)**	**6.7 ft · 80.7" (2,050 mm)**	**6.7 ft · 80.7" (2,050 mm)**
Rolling capacity, with pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	**5/16" / 3/8" (8 / 10 mm)**	**3/8" / 1/2" (10 / 12 mm)**	**1/2" / 5/8" (12 / 16 mm)**	**5/8" / 13/16" (16 / 20 mm)**
Rolling capacity, no pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	3/8" / 1/2" (10 / 12 mm)	1/2" / 9/16" (12 / 15 mm)	5/8" / 11/16" (16 / 18 mm)	13/16" / 7/8" (20 / 22 mm)
Top roll Ø	8.3" (210 mm)	9.4" (240 mm)	11" (280 mm)	11.8" (300 mm)
Bottom rolls Ø	7.5" (190 mm)	8.7" (220 mm)	10.2" (260 mm)	11" (280 mm)
Motor power	10 HP (7.5 kW)	10 HP (7.5 kW)	10 HP (7.5 kW)	15 HP (11 kW)
Rolling speed	t/min 16	16 ft/min (5 m/min)	16 ft/min (5 m/min)	16 ft/min (5 m/min)
Dimensions L × W × H	134 × 47 × 51" (3,400 × 1,200 × 1,300 mm)	134 × 51 × 57" (3,400 × 1,300 × 1,450 mm)	161 × 55 × 61" (4,100 × 1,400 × 1,550 mm)	161 × 59 × 61" (4,100 × 1,500 × 1,550 mm)
Weight	9,039 lb (4,100 kg)	11,078 lb (5,020 kg)	15,102 lb (6,850 kg)	16,314 lb (7,400 kg)

DETAILS, COMPONENTS AND OPTIONS

3R HS 3-ROLL HYDRAULIC PLATE ROLLS



3R HS — drop-end side with the hydraulic system and pressure gauges

TECHNICAL SPECIFICATIONS

3R HS 3-ROLL HYDRAULIC PLATE ROLLS

3R HS 25 · 8.4 FT

working length 100.4" · 4 models

Model	3R HS 25-210	3R HS 25-240	3R HS 25-280	3R HS 25-300
Working length	**8.4 ft · 100.4" (2,550 mm)**	**8.4 ft · 100.4" (2,550 mm)**	**8.4 ft · 100.4" (2,550 mm)**	**8.4 ft · 100.4" (2,550 mm)**
Rolling capacity, with pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	**1/4" / 5/16" (6 / 8 mm)**	**5/16" / 3/8" (8 / 10 mm)**	**3/8" / 1/2" (10 / 12 mm)**	**1/2" / 5/8" (12 / 16 mm)**
Rolling capacity, no pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	5/16" / 3/8" (8 / 10 mm)	3/8" / 1/2" (10 / 12 mm)	1/2" / 9/16" (12 / 15 mm)	5/8" / 11/16" (16 / 18 mm)
Top roll Ø	8.3" (210 mm)	9.4" (240 mm)	11" (280 mm)	11.8" (300 mm)
Bottom rolls Ø	7.5" (190 mm)	8.7" (220 mm)	10.2" (260 mm)	11" (280 mm)
Motor power	10 HP (7.5 kW)	10 HP (7.5 kW)	10 HP (7.5 kW)	15 HP (11 kW)
Rolling speed	t/min 16	16 ft/min (5 m/min)	16 ft/min (5 m/min)	16 ft/min (5 m/min)
Dimensions L × W × H	154 × 47 × 51" (3,900 × 1,200 × 1,300 mm)	154 × 51 × 57" (3,900 × 1,300 × 1,450 mm)	181 × 55 × 61" (4,600 × 1,400 × 1,550 mm)	181 × 59 × 61" (4,600 × 1,500 × 1,550 mm)
Weight	10,075 lb (4,570 kg)	12,346 lb (5,600 kg)	17,020 lb (7,720 kg)	18,519 lb (8,400 kg)

3R HS 30 · 10.2 FT

working length 122" · 4 models

Model	3R HS 30-210	3R HS 30-240	3R HS 30-280	3R HS 30-300
Working length	**10.2 ft · 122.0" (3,100 mm)**	**10.2 ft · 122.0" (3,100 mm)**	**10.2 ft · 122.0" (3,100 mm)**	**10.2 ft · 122.0" (3,100 mm)**
Rolling capacity, with pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	**8 ga / 1/4" (4 / 6 mm)**	**1/4" / 5/16" (6 / 8 mm)**	**5/16" / 3/8" (8 / 10 mm)**	**3/8" / 1/2" (10 / 12 mm)**
Rolling capacity, no pre-bend at min. rolling Ø ≥ 1.5× / 5× top roll Ø	1/4" / 1/4" (6 / 6 mm)	5/16" / 3/8" (8 / 10 mm)	3/8" / 1/2" (10 / 12 mm)	1/2" / 9/16" (12 / 15 mm)
Top roll Ø	8.3" (210 mm)	9.4" (240 mm)	11" (280 mm)	11.8" (300 mm)
Bottom rolls Ø	7.5" (190 mm)	8.7" (220 mm)	10.2" (260 mm)	11" (280 mm)
Motor power	10 HP (7.5 kW)	10 HP (7.5 kW)	10 HP (7.5 kW)	15 HP (11 kW)
Rolling speed	t/min 16	16 ft/min (5 m/min)	16 ft/min (5 m/min)	16 ft/min (5 m/min)
Dimensions L × W × H	175 × 47 × 51" (4,450 × 1,200 × 1,300 mm)	175 × 51 × 57" (4,450 × 1,300 × 1,450 mm)	203 × 55 × 61" (5,150 × 1,400 × 1,550 mm)	203 × 59 × 61" (5,150 × 1,500 × 1,550 mm)
Weight	11,475 lb (5,200 kg)	14,551 lb (6,600 kg)	18,453 lb (8,370 kg)	19,952 lb (9,050 kg)

Plate bending capacities are for mild steel with a yield strength of 37,700 psi (260 N/mm^2), given at a minimum rolling diameter of 5× and of 1.5× the top roll diameter, without and with pre-bending. Capacities without pre-bending leave a flat end depending on diameter. Thin sheet in gauge; metric values in brackets are the manufacturer's nominal figures. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.