
ULE-3015 · 6,000 W · DOUBLE TABLE FIBER LASER CUTTING MACHINE

ULE FIBER LASER TECHNICAL SPECIFICATION

BUILT IN CHINA TO NORTH AMERICAN STANDARDS











10 × 5 ft	6,000 W	492 ft/min	1.5 G
CUTTING RANGE	RAYCUS FIBER LASER	MAX. MOVING SPEED	MAX. ACCELERATION

NovoTech Machine Tools Inc.
1365 Mid-Way Blvd, 26, Mississauga, ON L5T 2J5, Canada
NovoTechMachineTools.com | info@NovoTechMachineTools.com | +1 647 526 5510

FULL TECHNICAL SPECIFICATION · ULE-3015 · 6,000 W

CONTENTS

Company profile 03
Equipment 04
Mechanical bed · crossbeam · control system 05
Cutting head · laser source · servo motor 06
Gear, rack, linear guide · gearbox · automatic lubrication 07
Water chiller · air cooler · electric components 08
Optional: Precitec head · IPG laser · aluminum crossbeam 09
Specifications · configuration 10
Cutting parameters — carbon steel, oxygen 11
Cutting parameters — stainless steel, nitrogen 12
Cutting parameters — aluminum, nitrogen 13
Cutting parameters — copper, nitrogen 14
Conditions for on-site installation · consumables 15
Quality control · delivery 16
Service 17
ULE in pictures 18

INCLUDED WITH EVERY NOVOTECH MACHINE


- Built in China to North American standards
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

SOLD & SERVICED IN CANADA
by NovoTech Machine Tools — Mississauga, ON

COMPANY PROFILE

OUR MANUFACTURING PARTNER

The ULE is built for NovoTech in China, to North American standards, by NovoTech's value-line manufacturing partner — and sold, installed and serviced in Canada by NovoTech.

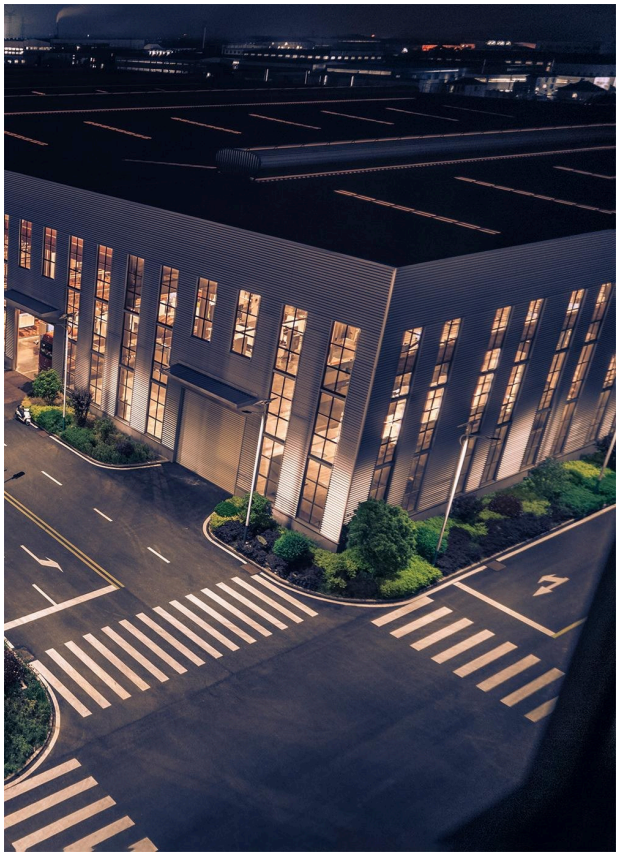

2002
Founded in March 2002

5000 +
Annual production capacity of 5000+ sets

120 +
More than 120 R&D personnel

100 +
Exported to over 100 countries

MISSION
Dedicated to research and development and to better product and service quality, in order to establish a globally renowned hub for sheet metal manufacturing machinery.

VISION
To be a respected provider of sheet metal support services, earning the trust of its customers and the pride of its staff.

VALUES
Innovation, Lean, Integrity, Win-Win.

Since its establishment the company has gone through 20 years of development. Through the joint efforts of two generations it has become the largest local machine tool manufacturer — its strength speaks for itself.

An enterprise that does not prioritize technology and R&D cannot sustain continuous development. Its leadership places technology first, allowing its machines to stay highly competitive in the current market environment — this sets it apart from many competitors in the industry.

It has always prioritized giving customers the highest-quality machines. Customers feel excitement when they receive a machine of excellent quality, as it helps them in production and achieves career success — this is also its success.

EQUIPMENT

FACTORY EQUIPMENT

Machining, welding and assembly equipment in the factory where the ULE is built.




PRODUCT DETAILS

BED · CROSSBEAM · CONTROL


MECHANICAL BED

- High-quality steel structural materials and meticulous welding, tempering and aging treatments maintain the machine tool bed's undistorted rigidity, stability and long-term accuracy.
- Dust funnel structure with separate chambers, a tracking dust removal system and precision processing on imported large-scale CNC equipment ensure superior precision exceeding design standards, improving the working environment and the life of consumables.

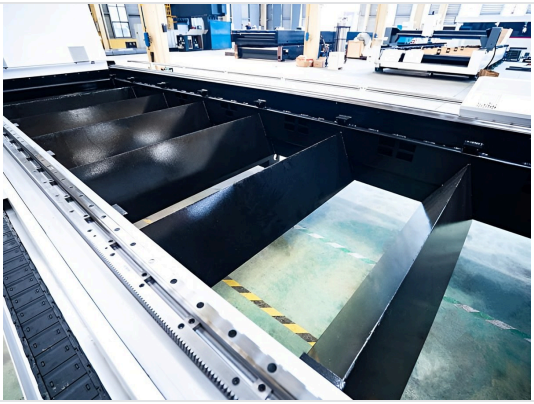

CROSSBEAM

- The crossbeam undergoes annealing treatment and is machined as a whole in the machining center for long-term stability during high-speed operation.
- The crossbeam structure is lightweight yet impact-resistant, with high rigidity optimized by finite element methods and precision machining, minimizing the load on the gantry for optimal dynamic performance.

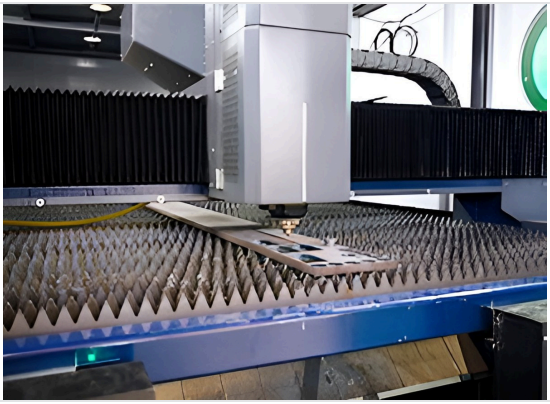

CONTROL SYSTEM

- It stands out for its user-friendly features, including easy installation, simple calibration and adjustable speed control through power settings, enhancing operational efficiency.
- The software provides advanced customization options, such as individual adjustments for imported linear speed, and a comprehensive cutting process database, ensuring precise and optimized cutting operations.



PRODUCT DETAILS

CUTTING HEAD · LASER SOURCE · SERVO MOTOR


CUTTING HEAD

- Auto-focusing laser cutting head adjusts the focus to the material thickness, reducing cutting time and enhancing cutting quality.
- Patented anti-collision protection structure and micro-joints in waste cutting prevent plate warping, ensuring high-speed and stable cutting operations.




LASER SOURCE

- The laser allows direct control of all functions and supports synchronized laser source control, enhancing cutting capabilities and efficiency while delivering maintenance cost savings of 15% to 20%.
- With an independently developed core light source, this fiber laser offers convenient maintenance, lower procurement costs and reliable operation — a cost-effective, top-performing solution for industrial applications.

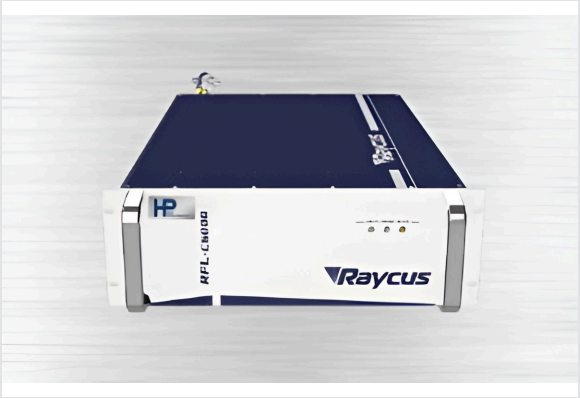

SERVO MOTOR

- The machine features Delta servo motors from Taiwan, renowned for their high speed, precision, feedback and inertia capabilities, ensuring optimal performance in high-quality, high-productivity operation.
- The imported high-inertia servo system and amplifier offer exceptional responsiveness, significantly cutting down tuning time and enabling rapid acceleration and deceleration for improved mechanical stability.

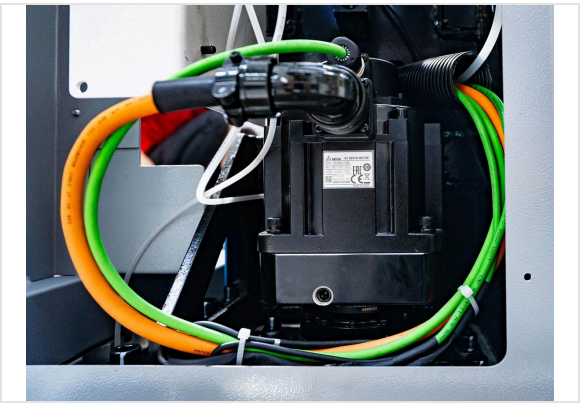

PRODUCT DETAILS

GEAR, RACK, LINEAR GUIDE · GEARBOX · LUBRICATION


GEAR, RACK, LINEAR GUIDE

- The precision-ground gear and rack transmission system of this machine goes beyond the vibration limits of screw-driven systems, ensuring high-speed, high-precision transmission over long distances.
- The YYC gear and rack transmission system, an original imported component, guarantees accuracy and long life even under the intense high-speed operation of a 10 kW-class laser.



GEARBOX

- The machine features DESBOER gearboxes from Japan, known for high torque, precision, stability and durability, ensuring reliable performance.
- The innovative technology integrated into the gearboxes enhances their performance and sets them apart in the market for quality and longevity.

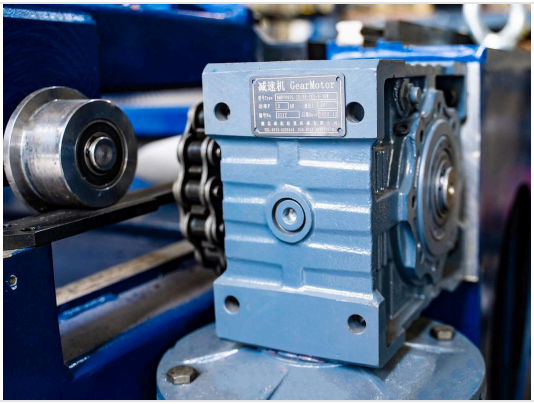

AUTOMATIC LUBRICATION

- The timed automatic lubrication system starts and dispenses lubricating oil according to the machine's running time, ensuring swift and efficient service.
- By precisely timing the lubrication cycles, the system optimizes equipment performance and prolongs its life, saving maintenance costs and improving operational efficiency.



PRODUCT DETAILS

WATER CHILLER · AIR COOLER · ELECTRIC COMPONENTS

WATER CHILLER

- The water chiller comes with over-temperature alarms, flow protection, water level protection and further safety alarms to ensure operational safety and prevent potential hazards.
- These safety features provide comprehensive protection against overheating, flow issues and water level fluctuations, enhancing the reliability and life of the water chiller.




AIR COOLER

- Air coolers regulate the temperature inside the electrical cabinet to ensure optimal performance of the components.
- Stable temperatures held by the air coolers prevent overheating and potential damage to electronic equipment.
- Effective cooling enhances the overall efficiency and life of the electrical cabinet systems.



ELECTRIC COMPONENTS

- The machine is designed to meet European electrical standards and incorporates Schneider Electric components.

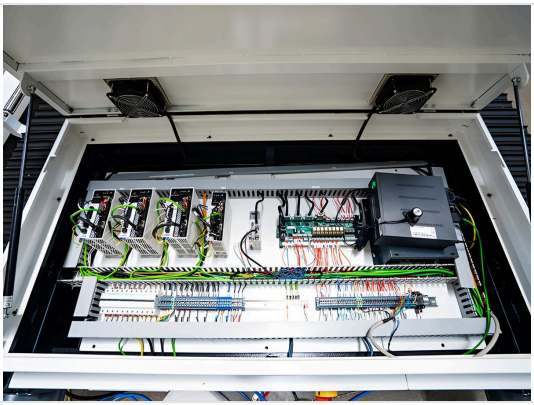

OPTIONAL

PRECITEC HEAD · IPG LASER · ALUMINUM CROSSBEAM

PRECITEC CUTTING HEAD — GERMANY OPTION

- The PROCUTTER high-power fiber cutting head from PRECITEC, imported from Germany, offers stable and reliable performance thanks to its electric focus position adjustment, making automated machine setup and piercing easier.
- Its compact and slim design, with fast acceleration and cutting speed, enhances efficiency in a wide range of cutting applications.



IPG LASER OPTION

- With a photoelectric conversion rate above 30%, the fiber laser operates at temperatures between 50 and 104 °F (10 – 40 °C), with optional temperature control by air conditioning.
- With a wavelength range of 1070 – 1090 nm, high beam quality in TEM00 mode and an M^2 value below 1.4, it ensures precise cutting of highly reflective materials such as aluminum and copper.



ALUMINUM CROSSBEAM OPTION

- Die-cast integrated aluminum crossbeam made from aerospace-grade aluminum alloy.
- CNC high-temperature annealing treatment for a lightweight design and resistance to deformation.
- Faster dynamic response and higher cutting accuracy thanks to minimal deformation, lower weight and higher strength.



SPECIFICATIONS

SPECIFICATIONS · CONFIGURATION

SPECIFICATIONS	ULE
Model	ULE (ULE-3015)
Laser power	6,000 W
Cutting range	10 × 5 ft (3,000 × 1,500 mm)
Maximum moving speed	492 ft/min (150 m/min)
Maximum acceleration	1.5 G
Positioning accuracy	±0.002" (±0.05 mm)
Repeated positioning accuracy	±0.0008" (±0.02 mm)
Operating voltage	380 V / 50 Hz — factory standard; supplied with a CSA-approved panel for 600 V 3-phase in Canada
Cooling method	Water-cooled

CONFIGURATION

COMPONENT FUNCTION	BRAND / MANUFACTURER
Bed	NovoTech (built in-house)
Control system	CypCut 4000E
Laser	Raycus
Cutting head	BOCI BLT421
Servo motor	Delta
Gearbox	DESBOER
Gear, rack	YYC
Linear guide	Hiwin
Water chiller	Hanli
Electrical components	NovoTech (built in-house)
Automatic lubrication device	NovoTech (built in-house)

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ **7-day money-back guarantee** (in-stock machines only)
- ✓ Spare parts & technical support readily available in Canada
- ✓ **Order Today with Just 10% Down — 0% Down Financing Available**
- ✓ **Installation and training available**

COMPARISON TABLE OF CUTTING PARAMETERS · 1 OF 4

CARBON STEEL · OXYGEN

Cutting speed by laser source power, in inches per minute; the metres per minute of the factory's table are given below each value. Carbon steel, oxygen assist gas. "—" = not cut at that power.

Thickness	1,000 W	1,500 W	2,000 W	3,000 W	4,000 W	6,000 W	8,000 W	10,000 W
0.039" 1 mm	315 – 394 8.0 – 10	591 – 1,024 15 – 26	945 – 1,181 24 – 30	1,181 – 1,575 30 – 40	1,299 – 1,693 33 – 43	1,378 – 1,732 35 – 44	1,378 – 1,654 35 – 42	1,378 – 1,654 35 – 42
0.079" 2 mm	157 – 256 4.0 – 6.5	177 – 256 4.5 – 6.5	185 – 256 4.7 – 6.5	189 – 295 4.8 – 7.5	591 – 984 15 – 25	787 – 1,102 20 – 28	244 – 394 6.2 – 10	276 – 472 7.0 – 12
0.118" 3 mm	94 – 118 2.4 – 3.0	102 – 157 2.6 – 4.0	118 – 189 3.0 – 4.8	130 – 197 3.3 – 5.0	276 – 472 7.0 – 12	512 – 669 13 – 17	157 – 276 4.0 – 7.0	165 – 295 4.2 – 7.5
0.157" 4 mm	79 – 94 2.0 – 2.4	98 – 118 2.5 – 3.0	110 – 138 2.8 – 3.5	118 – 165 3.0 – 4.2	118 – 157 3.0 – 4.0	118 – 177 3.0 – 4.5	138 – 217 3.5 – 5.5	138 – 217 3.5 – 5.5
0.197" 5 mm	59 – 79 1.5 – 2.0	79 – 98 2.0 – 2.5	87 – 118 2.2 – 3.0	102 – 138 2.6 – 3.5	106 – 142 2.7 – 3.6	118 – 165 3.0 – 4.2	130 – 177 3.3 – 4.5	130 – 177 3.3 – 4.5
0.236" 6 mm	55 – 63 1.4 – 1.6	63 – 87 1.6 – 2.2	71 – 102 1.8 – 2.6	91 – 126 2.3 – 3.2	98 – 134 2.5 – 3.4	98 – 138 2.5 – 3.5	118 – 165 3.0 – 4.2	118 – 165 3.0 – 4.2
0.315" 8 mm	31 – 47 0.8 – 1.2	39 – 55 1.0 – 1.4	47 – 71 1.2 – 1.8	71 – 102 1.8 – 2.6	79 – 118 2.0 – 3.0	87 – 126 2.2 – 3.2	98 – 138 2.5 – 3.5	98 – 138 2.5 – 3.5
0.394" 10 mm	24 – 39 0.6 – 1.0	31 – 43 0.8 – 1.1	43 – 51 1.1 – 1.3	47 – 79 1.2 – 2.0	59 – 94 1.5 – 2.4	71 – 98 1.8 – 2.5	87 – 106 2.2 – 2.7	87 – 106 2.2 – 2.7
0.472" 12 mm	20 – 31 0.5 – 0.8	28 – 39 0.7 – 1.0	35 – 47 0.9 – 1.2	39 – 63 1.0 – 1.6	47 – 71 1.2 – 1.8	47 – 79 1.2 – 2.0	47 – 83 1.2 – 2.1	47 – 83 1.2 – 2.1
0.551" 14 mm	—	20 – 28 0.5 – 0.7	28 – 31 0.7 – 0.8	35 – 55 0.9 – 1.4	35 – 47 0.9 – 1.2	47 – 71 1.2 – 1.8	67 – 75 1.7 – 1.9	67 – 75 1.7 – 1.9
0.630" 16 mm	—	—	24 – 28 0.6 – 0.7	28 – 39 0.7 – 1.0	31 – 39 0.8 – 1.0	31 – 51 0.8 – 1.3	35 – 67 0.9 – 1.7	35 – 67 0.9 – 1.7
0.709" 18 mm	—	—	16 – 24 0.4 – 0.6	24 – 31 0.6 – 0.8	24 – 35 0.6 – 0.9	24 – 35 0.6 – 0.9	26 – 35 0.65 – 0.9	26 – 35 0.65 – 0.9
0.787" 20 mm	—	—	—	20 – 31 0.5 – 0.8	20 – 31 0.5 – 0.8	20 – 31 0.5 – 0.8	24 – 35 0.6 – 0.9	24 – 35 0.6 – 0.9
0.866" 22 mm	—	—	—	—	16 – 31 0.4 – 0.8	16 – 31 0.4 – 0.8	20 – 31 0.5 – 0.8	20 – 31 0.5 – 0.8
0.984" 25 mm	—	—	—	—	—	12 – 22 0.3 – 0.55	12 – 28 0.3 – 0.7	12 – 28 0.3 – 0.7

INCLUDED WITH EVERY NOVOTECH MACHINE

- Built in China to North American standards
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

COMPARISON TABLE OF CUTTING PARAMETERS · 2 OF 4

STAINLESS STEEL · NITROGEN

Cutting speed by laser source power, in inches per minute; the metres per minute of the factory's table are given below each value. Stainless steel, nitrogen assist gas. "—" = not cut at that power.

Thickness	1,000 W	1,500 W	2,000 W	3,000 W	4,000 W	6,000 W	8,000 W	10,000 W
0.039" 1 mm	591 – 984 15 – 25	787 – 1,063 20 – 27	945 – 1,181 24 – 30	1,181 – 1,378 30 – 35	1,260 – 1,772 32 – 45	1,654 – 2,047 42 – 52	1,969 – 2,598 50 – 66	2,362 – 2,953 60 – 75
0.079" 2 mm	197 – 295 5 – 7.5	315 – 472 8.0 – 12	354 – 591 9.0 – 15	512 – 827 13 – 21	630 – 1,102 16 – 28	787 – 1,299 20 – 33	1,181 – 1,654 30 – 42	1,575 – 2,165 40 – 55
0.118" 3 mm	71 – 98 1.8 – 2.5	118 – 197 3.0 – 5.0	157 – 256 4.0 – 6.5	236 – 394 6.0 – 10	276 – 591 7.0 – 15	591 – 866 15 – 22	787 – 1,181 20 – 30	1,063 – 1,496 27 – 38
0.157" 4 mm	47 – 51 1.2 – 1.3	59 – 94 1.5 – 2.4	118 – 177 3.0 – 4.5	157 – 236 4.0 – 6.0	197 – 315 5.0 – 8.0	394 – 591 10.0 – 15.0	551 – 827 14 – 21	709 – 984 18 – 25
0.197" 5 mm	24 – 28 0.6 – 0.7	28 – 51 0.7 – 1.3	71 – 98 1.8 – 2.5	118 – 197 3.0 – 5.0	138 – 197 3.5 – 5.0	315 – 472 8.0 – 12	472 – 669 12 – 17	591 – 866 15 – 22
0.236" 6 mm	—	28 – 39 0.7 – 1.0	47 – 79 1.2 – 2.0	79 – 157 2.0 – 4.0	98 – 177 2.5 – 4.5	189 – 315 4.8 – 8.0	315 – 551 8.0 – 14.0	472 – 591 12 – 15
0.315" 8 mm	—	—	28 – 39 0.7 – 1.0	59 – 79 1.5 – 2.0	47 – 79 1.2 – 2.0	118 – 157 3.0 – 4.0	236 – 315 6.0 – 8.0	315 – 472 8.0 – 12.0
0.394" 10 mm	—	—	—	24 – 31 0.6 – 0.8	31 – 47 0.8 – 1.2	63 – 98 1.6 – 2.5	118 – 197 3.0 – 5.0	236 – 315 6.0 – 8.0
0.472" 12 mm	—	—	—	16 – 24 0.4 – 0.6	20 – 31 0.5 – 0.8	31 – 59 0.8 – 1.5	71 – 118 1.8 – 3.0	118 – 197 3.0 – 5.0
0.551" 14 mm	—	—	—	—	16 – 24 0.4 – 0.6	24 – 31 0.6 – 0.8	47 – 71 1.2 – 1.8	71 – 118 1.8 – 3.0
0.787" 20 mm	—	—	—	—	—	12 – 22 0.3 – 0.55	24 – 28 0.6 – 0.7	47 – 71 1.2 – 1.8
0.984" 25 mm	—	—	—	—	—	8 – 16 0.2 – 0.4	20 – 24 0.5 – 0.6	24 – 28 0.6 – 0.7

INCLUDED WITH EVERY NOVOTECH MACHINE

- Built in China to North American standards
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

COMPARISON TABLE OF CUTTING PARAMETERS · 3 OF 4

ALUMINUM SHEET · NITROGEN

Cutting speed by laser source power, in inches per minute; the metres per minute of the factory's table are given below each value. Aluminum sheet, nitrogen assist gas. "—" = not cut at that power.

Thickness	1,000 W	1,500 W	2,000 W	3,000 W	4,000 W	6,000 W	8,000 W	10,000 W
0.039" 1 mm	236 – 394 6.0 – 10.0	394 – 787 10.0 – 20.0	591 – 984 15 – 25	984 – 1,496 25 – 38	1,378 – 1,772 35 – 45	1,654 – 2,165 42 – 55	1,969 – 2,559 50 – 65	2,362 – 2,953 60 – 75
0.079" 2 mm	110 – 138 2.8 – 3.5	197 – 276 5.0 – 7.0	276 – 394 7 – 10.0	394 – 709 10.0 – 18.0	512 – 945 13 – 24	787 – 1,575 20 – 40	984 – 1,496 25 – 38	1,299 – 1,772 33 – 45
0.118" 3 mm	28 – 59 0.7 – 1.5	79 – 157 2.0 – 4.0	157 – 236 4.0 – 6.0	256 – 315 6.5 – 8.0	276 – 512 7.0 – 13	591 – 984 15 – 25	787 – 1,181 20 – 30	984 – 1,378 25 – 35
0.157" 4 mm	–	39 – 59 1.0 – 1.5	79 – 118 2.0 – 3.0	138 – 197 3.5 – 5.0	157 – 217 4.0 – 5.5	374 – 472 9.5 – 12.0	512 – 709 13 – 18	827 – 1,181 21 – 30
0.197" 5 mm	–	28 – 39 0.7 – 1.0	47 – 71 1.2 – 1.8	98 – 138 2.5 – 3.5	118 – 177 3.0 – 4.5	197 – 315 5.0 – 8.0	354 – 472 9.0 – 12	512 – 787 13 – 20
0.236" 6 mm	–	–	28 – 39 0.7 – 1.0	59 – 98 1.5 – 2.5	79 – 138 2.0 – 3.5	150 – 197 3.8 – 5.0	177 – 315 4.5 – 8.0	354 – 472 9.0 – 12
0.315" 8 mm	–	–	24 – 31 0.6 – 0.8	28 – 39 0.7 – 1.0	35 – 63 0.9 – 1.6	79 – 98 2.0 – 2.5	157 – 236 4.0 – 6.0	177 – 315 4.5 – 8.0
0.394" 10 mm	–	–	–	16 – 28 0.4 – 0.7	24 – 47 0.6 – 1.2	39 – 59 1.0 – 1.5	87 – 118 2.2 – 3.0	157 – 236 4.0 – 6.0
0.472" 12 mm	–	–	–	12 – 18 0.3 – 0.45	16 – 24 0.4 – 0.6	31 – 39 0.8 – 1.0	59 – 79 1.5 – 2.0	87 – 118 2.2 – 3.0
0.630" 16 mm	–	–	–	–	12 – 16 0.3 – 0.4	20 – 31 0.5 – 0.8	39 – 63 1.0 – 1.6	59 – 79 1.5 – 2.0
0.787" 20 mm	–	–	–	–	–	20 – 28 0.5 – 0.7	28 – 39 0.7 – 1.0	39 – 63 1.0 – 1.6
0.984" 25 mm	–	–	–	–	–	12 – 20 0.3 – 0.5	20 – 28 0.5 – 0.7	28 – 39 0.7 – 1.0
1.181" 30 mm	–	–	–	–	–	–	–	20 – 28 0.5 – 0.7
1.575" 40 mm	–	–	–	–	–	–	–	–
1.969" 50 mm	–	–	–	–	–	–	–	–

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ **7-day money-back guarantee** (in-stock machines only)
- ✓ Spare parts & technical support readily available in Canada
- ✓ **Order Today with Just 10% Down — 0% Down Financing Available**
- ✓ **Installation and training available**

COMPARISON TABLE OF CUTTING PARAMETERS · 4 OF 4

COPPER SHEET · NITROGEN

Cutting speed by laser source power, in inches per minute; the metres per minute of the factory's table are given below each value. Copper sheet, nitrogen assist gas. "—" = not cut at that power.

Thickness	1,000 W	1,500 W	2,000 W	3,000 W	4,000 W	6,000 W	8,000 W	10,000 W
0.039" 1 mm	236 – 394 6.0 – 10.0	315 – 512 8.0 – 13	394 – 630 10.0 – 16.0	787 – 1,378 20 – 35	984 – 1,378 25 – 35	1,378 – 1,772 35 – 45	2,165 – 2,559 55 – 65	2,559 – 2,953 65 – 75
0.079" 2 mm	110 – 142 2.8 – 3.6	118 – 177 3.0 – 4.5	177 – 295 4.5 – 7.5	236 – 394 6.0 – 10	315 – 472 8.0 – 12	787 – 1,181 20 – 30	1,181 – 1,575 30 – 40	1,299 – 1,772 33 – 45
0.118" 3 mm	20 – 39 0.5 – 1.0	59 – 98 1.5 – 2.5	98 – 157 2.5 – 4.0	157 – 236 4.0 – 6.0	197 – 315 5.0 – 8.0	472 – 709 12 – 18	787 – 1,181 20 – 30	984 – 1,575 25 – 40
0.157" 4 mm	—	39 – 63 1.0 – 1.6	59 – 79 1.5 – 2.0	118 – 197 3.0 – 5.0	126 – 217 3.2 – 5.5	197 – 315 5.0 – 8.0	394 – 709 10 – 18	551 – 945 14 – 24
0.197" 5 mm	—	20 – 28 0.5 – 0.7	35 – 47 0.9 – 1.2	59 – 79 1.5 – 2.0	79 – 118 2.0 – 3.0	177 – 236 4.5 – 6.0	276 – 354 7.0 – 9.0	354 – 591 9.0 – 15
0.236" 6 mm	—	—	16 – 28 0.4 – 0.7	39 – 71 1.0 – 1.8	55 – 79 1.4 – 2.0	118 – 177 3.0 – 4.5	177 – 256 4.5 – 6.5	276 – 354 7.0 – 9.0
0.315" 8 mm	—	—	—	20 – 28 0.5 – 0.7	28 – 47 0.7 – 1.2	63 – 87 1.6 – 2.2	94 – 157 2.4 – 4.0	177 – 256 4.5 – 6.5
0.394" 10 mm	—	—	—	—	8 – 20 0.2 – 0.5	31 – 47 0.8 – 1.2	59 – 87 1.5 – 2.2	94 – 157 2.4 – 4.0
0.472" 12 mm	—	—	—	—	—	12 – 20 0.3 – 0.5	31 – 59 0.8 – 1.5	59 – 87 1.5 – 2.2

INCLUDED WITH EVERY NOVOTECH MACHINE

- Built in China to North American standards
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

INSTALLATION

CONDITIONS FOR ON-SITE INSTALLATION


NO.	CONTENT	REQUIREMENTS
1	**Power supply capacity**	• Not less than 120 kVA
2	**Power supply quality**	• Three-phase voltage instability ≤ ±5% • Three-phase power imbalance ≤ 2.5% • Grounding resistance ≤ 3 ohms; the power supply voltage must not cut off suddenly
3	**Compressed air**	• For high-pressure air cutting, the pressure should be ≥ 185 psi (13 kgf/cm^2) and the flow rate ≥ 53 cfm (1.5 m^3/min) • The dew point temperature must stay low — the limit is not given in the factory's sheet; NovoTech confirms it for your air dryer • Oil content ≤ 0.01 ppm; solid particles ≤ 0.01 μm
4	**Auxiliary gases**	• The purity of oxygen and nitrogen should be ≥ 99.96%
5	**Cutting material**	• Smooth, flat, rust-free and uniformly rolled, meeting ISO standards
6	**Foundation requirements**	• The installation foundation must have no settlement and be built to the foundation drawings provided by NovoTech
7	**On-site conditions**	• The working environment should have a stable temperature of 41 – 86 °F (5 – 30 °C) • Humidity below 70% • After installation and commissioning, the laser should be isolated and an air conditioner installed
8	**Operators**	• Personnel with basic skills in electrical work, mechatronics and CNC machine tool operation
9	**Other supporting equipment**	• A computer for programming and monitoring the laser operation • The cables needed for on-site installation of the equipment

CONSUMABLE SUPPLIES

NAME	LIFESPAN	RECOMMENDED STOCK QUANTITY
Focusing protective lens	40 hours	3 – 5 pieces
Collimating protective lens	500 hours	1 – 3 pieces
Focusing lens	Approx. 3,000 hours	2 sets
Collimating lens	Approx. 3,000 hours	1 set
Nozzle	120 hours	3 – 10 of each model needed, depending on the variety of sheet metal you cut

QUALITY · DELIVERY

QUALITY CONTROL · DELIVERY

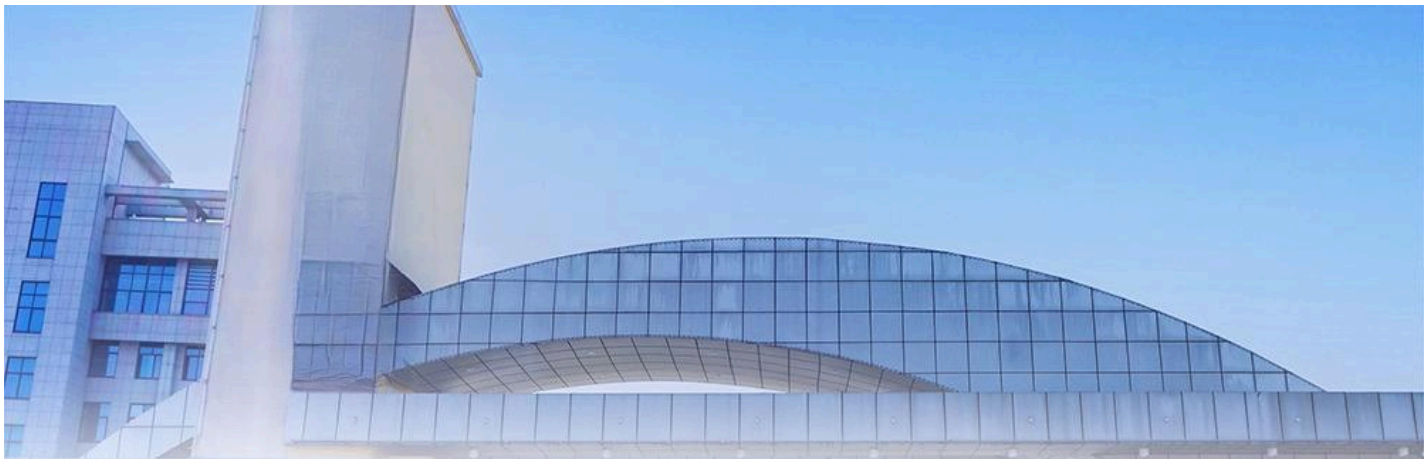



Testing center



Container loading

QUALITY CONTROL

- The factory's press brake manufacturing leads the industry in China, setting benchmarks for quality and performance.
- Its quality inspection rigorously follows industry standards, ensuring the reliability of the machines.
- Testing machines run continuously, so every product meets the highest standards before it is dispatched.

DELIVERY PACKAGING

- Customizable packaging, including wooden cases, for sea transportation keeps the machine intact on delivery.
- Standard machines are ready to ship from the factory within 20 days.
- An advanced fixing method keeps the machine stable and free of vibration in container transport.


SERVICE

SERVICE




Pre sale

- Custom-tailored selection of press brakes and tooling to match each customer's processing needs, optimizing bending quality and operational efficiency.
- A comprehensive engineering review recommends the most cost-effective solution for the user.
- A finalized, engineer-approved solution that best fits the user's requirements.

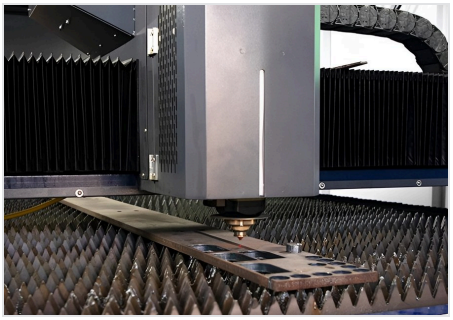


On sale

- Commitment to customer satisfaction through strict adherence to the contract terms.
- Rigorous quality assurance for all equipment delivered.
- Continuous, proactive communication keeps the customer informed throughout the sale.

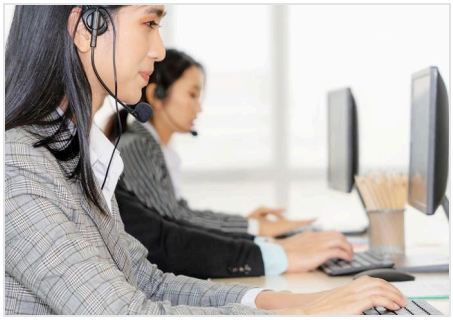

After sales

- NovoTech's 1-year warranty with complimentary part replacements ensures long-term reliability and user satisfaction.
- Professional remote assistance and on-site service, for personalized and convenient support.
- Tracking services and a service file for each user streamline maintenance for regular customers.

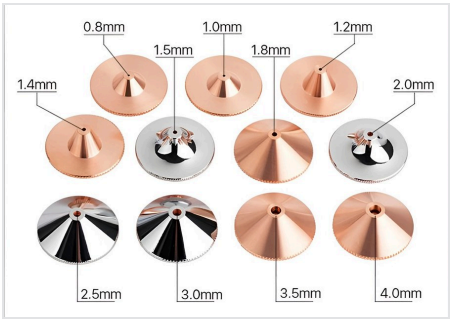

Parts

- Prompt delivery of custom accessories to meet specific customer requirements.
- Focused on minimizing downtime and keeping the machine running.

Generality

- Components from globally recognized brands make replacement parts easy to find worldwide.
- Identical parts can be sourced locally, which makes maintenance and repair convenient.



Customization

- We specialize in tailored machinery and tooling solutions designed for the unique specifications of each customer's workpieces.
- Customization ensures optimal compatibility and efficiency for a wide range of workpieces.

DOUBLE TABLE FIBER LASER CUTTING MACHINE

ULE IN PICTURES



The ULE: the enclosed cutting cabin, its viewing windows and the shuttle table at the end



Exchange table — the second table runs out of the cabin, so the next sheet is loaded while the first is cut



Sheets laid on the outside exchange table, ready to go into the cabin



Cut parts taken off the exchange table while the other table is in the cabin



Sheet on the replaceable support slats of the table



Automatic sheet loading beside an enclosed ULE (option)

DOUBLE TABLE FIBER LASER CUTTING MACHINE

ULE IN PICTURES (CONTINUED)



Gantry with the cutting head, the cable carrier and the bellows over the guides



Welded bed with the rails of the shuttle table



Cutting heads matched to the laser power



Water chillers sized to the laser source



CNC touchscreen with the camera view of the table and the cutting program

NovoTech MACHINE TOOLS Inc.

LET'S FIND THE RIGHT FIBER LASER FOR YOUR SHOP.

Call or visit us for quotes, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com


ADDRESS

1365 Mid-Way Blvd, 26
Mississauga, ON L5T 2J5
Canada


INCLUDED WITH EVERY NOVOTECH MACHINE

- Built in China to North American standards
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**







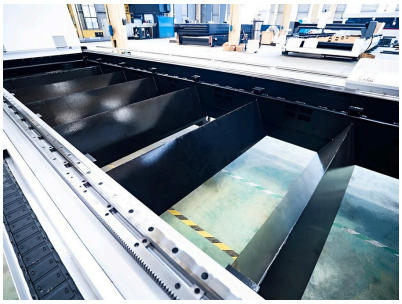

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: sheet thicknesses in decimal inches, cutting speeds in inches per minute. Model numbers are manufacturer designations. Photos may show optional equipment.