NovoTech
MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

SENFENG LASER · MADE IN CHINA · SOLD & SERVICED IN CANADA BY NOVOTECH

FIBER LASER CUTTING MACHINES

SENFENG SHEET LASERS · COMPACT, NP OPEN-TYPE, H SERIES WITH PALLET CHANGER, SHEET + TUBE, LARGE-FORMAT PLATE, 3D AND COIL-FED · 1.5 – 80 KW

SENFENG
SF-3015H
SENFENG
SF-3015NP
SENFENG
SENFENG

China	12	1-year	Canada
MADE IN CHINA	MACHINE FAMILIES	WARRANTY	PARTS & TECHNICAL SUPPORT

SENFENG FIBER LASERS

CONTENTS

SHEET LASERS

Compact single-table sheet lasers G, N and NP, 5 × 10 ft, 1.5 – 12 kW SF1530G · SF1530N · SF1530NP 04
NP single-table sheet lasers with gantry cover, 5 × 10 to 6.6 × 20 ft, 3 – 12 kW SF3015NP – SF6020NP · 5 models 08
SF1313G compact fiber laser, 4 × 4 ft, 1.5 – 3 kW SF1313G 11
H series sheet lasers with pallet changer, 5 × 10 to 8.3 × 40 ft, 1.5 – 80 kW SF3015H – SF12025H · HC, H4 and H5 · 14 models 14
HM sheet and tube combination lasers, 5 × 10 to 8.3 × 20 ft sheet plus Ø8.6″ × 20 ft tube, 1.5 – 30 kW SF3015HM – SF6025HM · 4 models 20

PLATE, 3D AND COIL-FED LASERS

R / TX ultra-large plate lasers, 10 × 20 to 10 × 164 ft, 6 – 60 kW, ±45° bevel SF6030R – SF50030R · SF6030TX – SF50030TX · SF12030TXP · 16 models 24
3D laser cutting — five-axis SF3015TD, 5 × 10 ft, 3 – 20 kW SF3015TD 28
SF1503CH coil-fed fiber laser, thin coil 0.031 – 0.118″, 5 × 10 ft, 3 – 6 kW SF1503CH 31
SF15015C open-style thin-sheet coil-fed laser, coil 0.031 – 0.047″, 5 × 10 ft, 1.5 – 3 kW SF15015C 34
TOP series automated metal processing line — coil to cut, bent, welded and stacked parts SF1503CH-TOP RC3000W 36
SF1503CLH aluminum coil-fed fiber laser, coil 0.023 – 0.118″, 6 kW SF1503CLH 39
SF2012CH coil-fed laser blanking line for thick coil 5/16 – 9/16″, 13 × 6.6 ft, 12 – 80 kW SF2012CH 40

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR SENFENG FIBER LASERS

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SENFENG LASER · JINAN, CHINA

A FIBER LASER FOR EVERY SHOP, FROM THE FIRST 4 × 4 FT MACHINE TO 60 KW PLATE GANTRIES

A fiber laser cutting machine cuts sheet and plate from a DXF file with a focused beam — mild steel to 2″ and beyond with the high-power sources — at speeds no plasma or punch can match, with a clean edge and no tooling. Senfeng's range starts with single-table enclosed machines that ship in one container and plug in the day they arrive, and the NP open-type laser that is the lowest-priced 12 kW machine in the catalogue; the H series adds a full enclosure and a 20-second pallet changer for production, in 1.5 to 80 kW; the HM cuts sheet and tube on one machine; the R and TX gantries take plate to 10 × 164 ft with ±45° bevels; the TD five-axis machine trims formed parts; and the coil-fed lines cut straight from the coil with no sheet handling.

Senfeng Laser has built fiber laser machines in Jinan, Shandong, since 2004: a 1.8 million ft^2 campus, its own laser sources, cutting heads and welding guns, around 15,000 machines a year, 20 overseas branches and Senfeng Laser USA with a warehouse and service team. CE, FDA and ETL certified and CSA approved. NovoTech sells, installs and supports the machines in Canada from Mississauga, ON, Canada — layout for your building, installation, operator training, a CSA-approved panel, a 1-year warranty and parts and technical support in Canada.

SF1530G · SF1530N · SF1530NP

COMPACT SINGLE-TABLE SHEET LASERS G, N AND NP, 5 × 10 FT, 1.5 – 12 KW

SENFENG
SF-1530N

MODEL G · N · NP · SF1530N — THE SINGLE TABLE PULLED OUT FOR LOADING

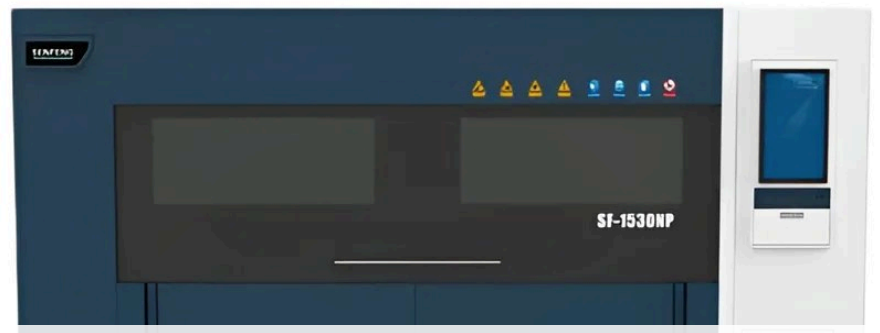

Senfeng SF1530NP compact fiber laser with electric lifting door — 5 × 10 ft, 1.5 – 6 kW

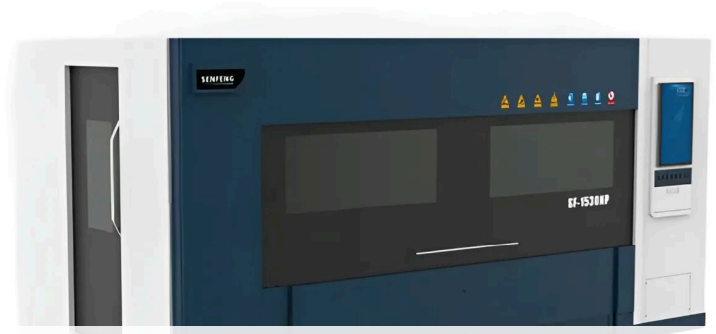

SF1530NP — fully enclosed cabin with the integrated source and control cabinet

The entry into production laser cutting: fully enclosed 5 × 10 ft single-table machines that ship in one 20 ft container without disassembly, plug in and cut the day they arrive. The SF1530G takes 1.5 to 4 kW, the SF1530N with its pull-out platform 1.5 to 12 kW — enough for 3/4″ mild steel at 6 kW — and the new-generation SF1530NP 1.5 to 6 kW, with the source and a thermostatic electrical cabinet built in, an electric lifting door, integrated leg supports and a pick-up trolley with an inner hopper. Smoke-free extraction through a double air duct with three zones and follow-up air valves, an anti-burning platform, safety light curtains at the front and rear of the beam and smart cameras with a safety-lock alarm; 328 ft/min, 1 G and 2,425 lb on the table (N and NP).

STANDARD FEATURES

- 1.5 – 12 kW; 5 × 10 ft single table; 262 – 328 ft/min, 1 G; 1,543 – 2,425 lb table load
- SF1530NP: electric lifting door with CE protective acrylic laser shields and safety locks on both sides; source and thermostatic electrical cabinet built in
- Pull-out platform (N) or push-pull platform with integrated leg supports and a pick-up trolley with an inner hopper (NP)
- Smoke-free extraction: double air duct, three zones and follow-up air valves; anti-burning platform protects the dust cover
- Safety light curtains at the front and rear of the beam; smart cameras with a safety-lock alarm
- Fiber laser source 1.5 – 80 kW (IPG, Raycus or Max) with the autofocus cutting head (Raytools / BOCI) and capacitive height sensing
- Bus-based CNC with a 21.5″ touchscreen (Cypcut / BOCHU), nesting software and a cutting-parameter database; one-click centring, collision avoidance
- Stress-relieved welded bed, aerospace-grade aluminum beam, Schneider servo drives, HIWIN / rack-and-pinion drives
- Zoned negative-pressure dust extraction under the table; double air ducts; water chiller included
- Intelligent air-cutting option: compressed air instead of nitrogen on sheet to about 3/8″
- CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- Loading / unloading unit, servo swing-arm loader or storage tower
- Automatic pallet changer (NP) and bevel head (R / TX)
- Dust collector and compressor sized to the machine
- Higher laser power at order; nitrogen generator
- Custom voltage transformer

DETAILS, COMPONENTS AND OPTIONS · 1 / 2

COMPACT SINGLE-TABLE SHEET LASERS G, N AND NP, 5 × 10 FT, 1.5 – 12 KW

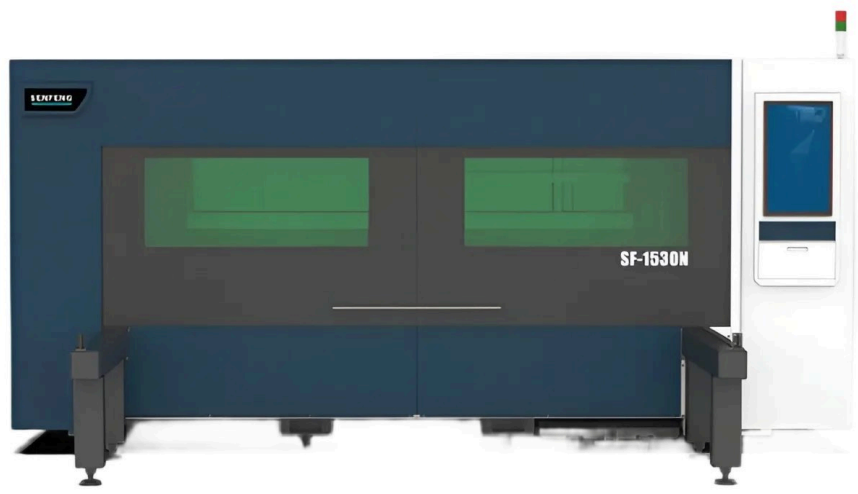
SENFENG
SF-1530N

Senfeng SF1530N fiber laser with full cover and pull-out single table — 5 × 10 ft, 1.5 – 12 kW

SENFENG
SF-1530N

SF1530N — full cover with the pull-out platform rails

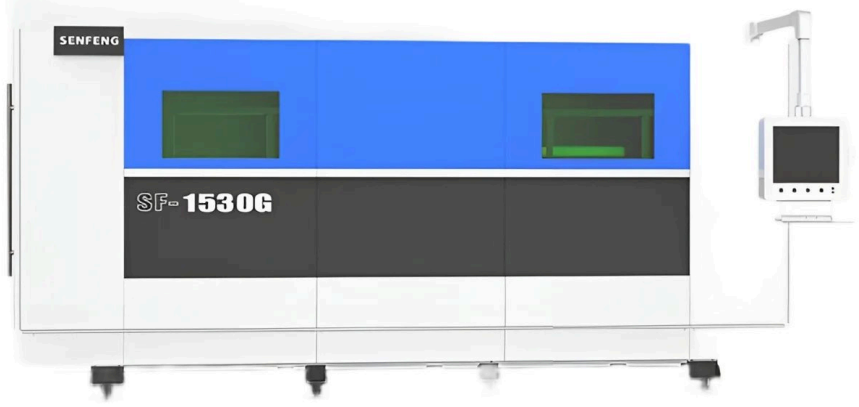
SENFENG
SF-1530G

Senfeng SF1530G fiber laser with full cover — 5 × 10 ft, 1.5 – 4 kW

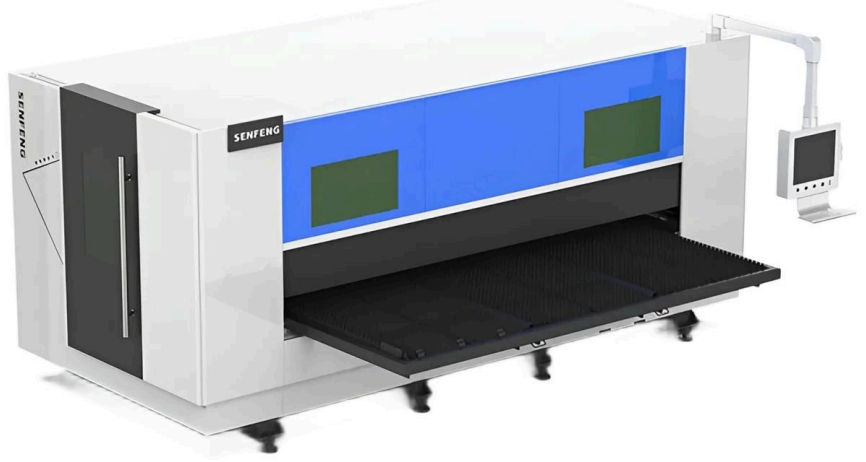

SF1530G with the single table pulled out for loading

SENFENG
SF-1530NP

SF1530NP — pull-out platform with integrated leg supports

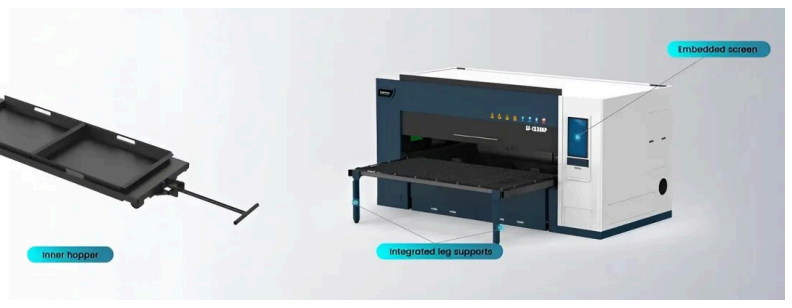
Embedded screen
Inner hopper
Integrated leg supports

SF1530NP — pick-up trolley with an inner hopper and the integrated leg supports

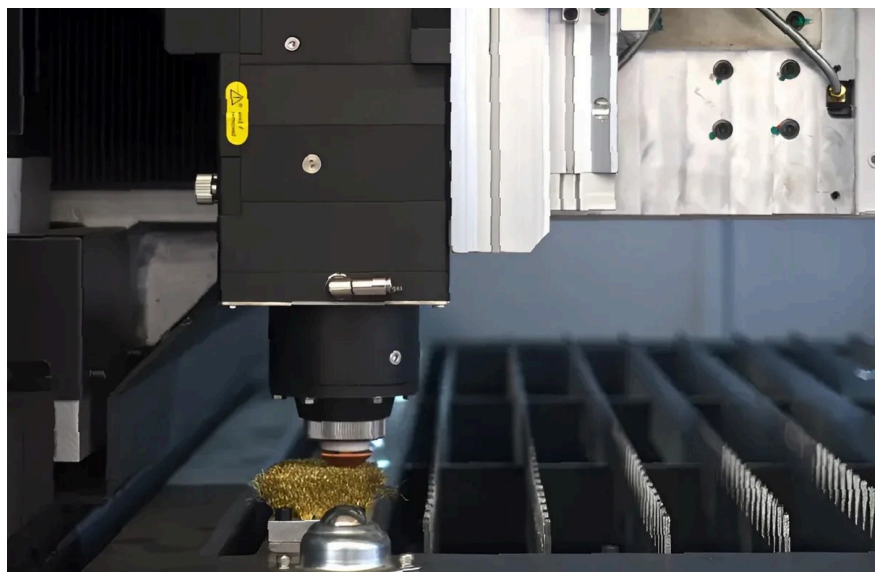

SF1530NP — autofocus cutting head over the slat table

SF1530NP fits one 20 ft container without disassembly

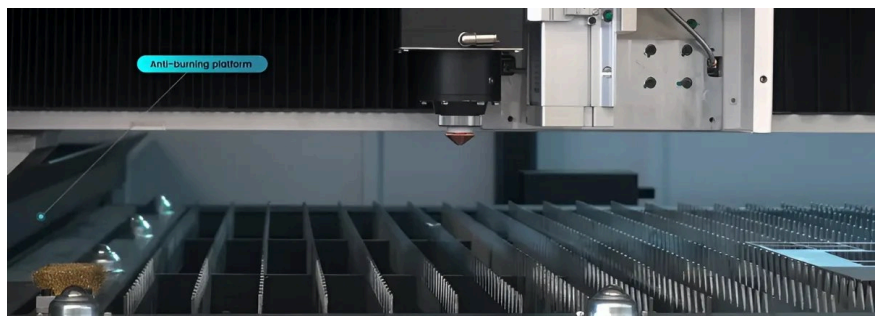
Anti-burning platform

Anti-burning platform — side guards keep the sparks off the dust cover

DETAILS, COMPONENTS AND OPTIONS · 2 / 2

COMPACT SINGLE-TABLE SHEET LASERS G, N AND NP, 5 × 10 FT, 1.5 – 12 KW

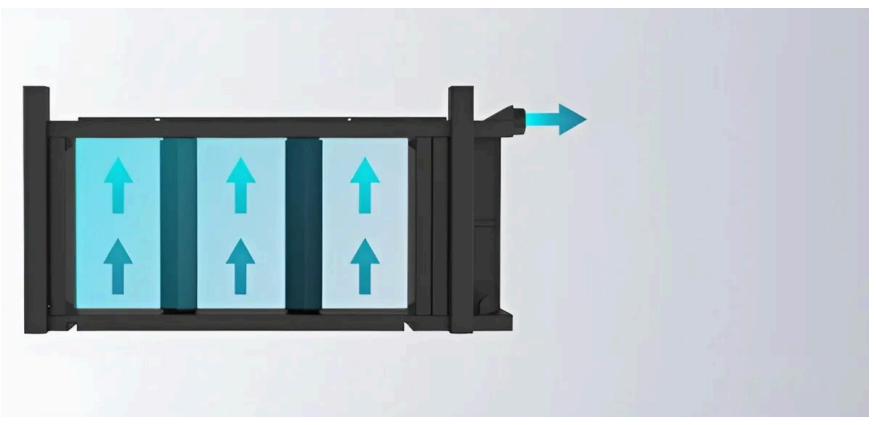

Smoke-free extraction — double air duct, three zones and follow-up air valves

TECHNICAL SPECIFICATIONS

COMPACT SINGLE-TABLE SHEET LASERS G, N AND NP, 5 × 10 FT, 1.5 – 12 KW

COMPACT SINGLE-TABLE SHEET LASERS G · N · NP

3 models · 5 × 10 ft · 1.5 – 12 kW

Model	SF1530G	SF1530N	SF1530NP
Working area	**10 × 5 ft (3,000 × 1,500 mm)**	**10 × 5 ft (3,000 × 1,500 mm)**	**10 × 5 ft (3,000 × 1,500 mm)**
Laser power	1.5 – 4 kW	1.5 – 12 kW	1.5 – 6 kW
Type	full cover, single table	full cover, pull-out single table	full cover, electric lifting door, integrated source
Max. no-load speed	262 ft/min (80 m/min)	328 ft/min (100 m/min)	328 ft/min (100 m/min)
Max. acceleration	1 G	1 G	1 G
Positioning accuracy	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)
Max. table load	1,543 lb (700 kg)	2,425 lb (1,100 kg)	2,425 lb (1,100 kg)
Z travel	—	—	5.1″ (130 mm)
Machine weight by source power	—	—	10,381 lb (4,709 kg) at 3 kW · 11,530 lb (5,230 kg) at 6 kW with fire bricks
Laser source · cutting head	—	—	Maxphotonics · Raytools
CNC	FSCUT2000E	FSCUT2000	FSCUT
Power supply protection	—	—	IP54
Dimensions L × W × H	191 × 159 × 82″ (4,850 × 4,040 × 2,080 mm)	197 × 91 × 81″ (5,000 × 2,310 × 2,060 mm)	194 × 88 × 91″ (4,920 × 2,220 × 2,320 mm)

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF3015NP – SF6020NP · 5 MODELS

NP SINGLE-TABLE SHEET LASERS WITH GANTRY COVER, 5 × 10 TO 6.6 × 20 FT, 3 – 12 KW

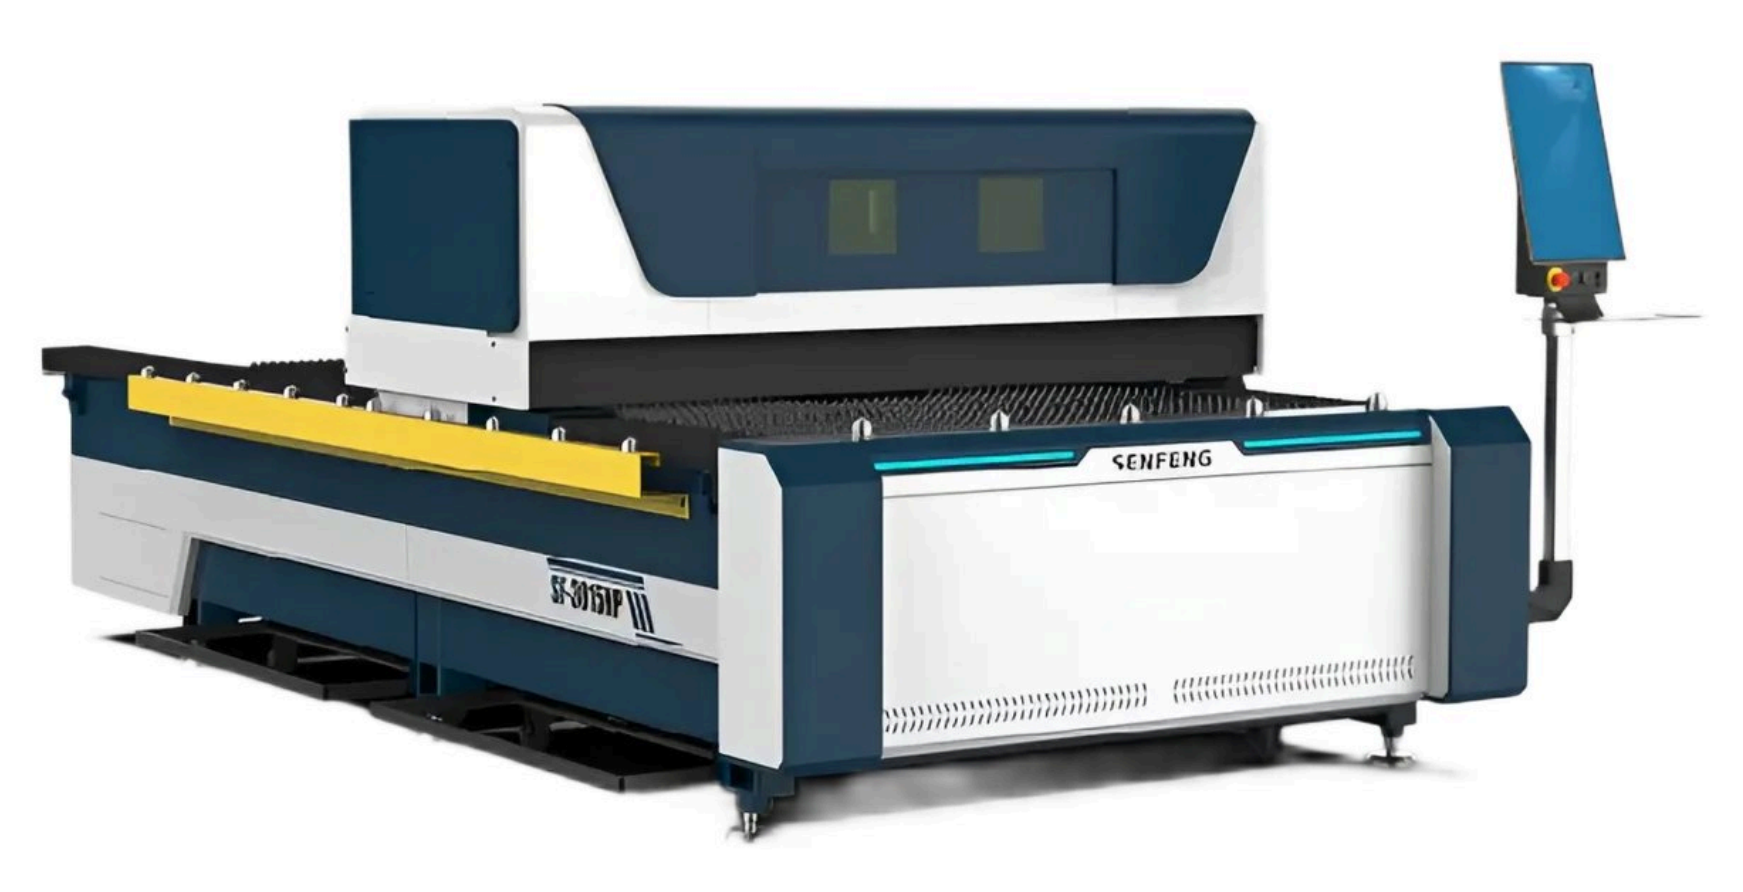

MODEL NP · SENFENG SF3015NP FIBER LASER WITH THE LASER COVER ON THE GANTRY — 5 × 10 FT, 3 – 12 KW

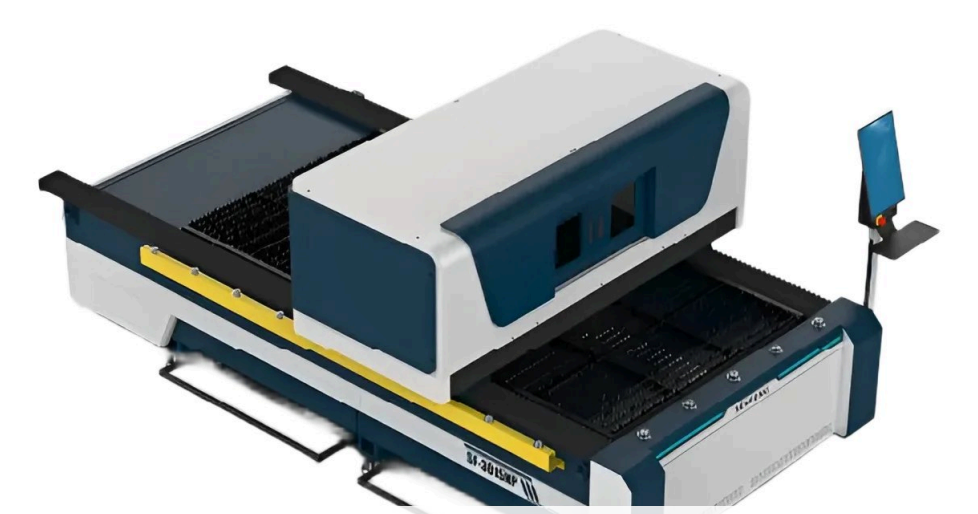

NP series laser — the laser cover travels with the gantry over the table, seen from the loading side

NP series laser from the rear — the gantry cover over the table and the control console

A single-table laser with a laser cover on the gantry that travels with the head over the cut: the table stays open for loading from three sides over ball-transfer units, the cover keeps the beam and the spatter in, and a built-in source and cabinet and double ventilation ducts keep the machine clean. Five table sizes from 5 × 10 to 6.6 × 20 ft, 3 to 12 kW, 394 ft/min and 1.2 G; six 3015NP machines fit in one 40 ft container, which is why it is the lowest-priced 12 kW laser in Senfeng's range. The intelligent air-cutting package cuts sheet to 3/8″ on compressed air.

STANDARD FEATURES

- 3 – 12 kW; 5 × 10 to 6.6 × 20 ft; 394 ft/min, 1.2 G; 2,400 – 6,200 lb table load
- Fiber laser source 1.5 – 80 kW (IPG, Raycus or Max) with the autofocus cutting head (Raytools / BOCI) and capacitive height sensing
- Bus-based CNC with a 21.5″ touchscreen (Cypcut / BOCHU), nesting software and a cutting-parameter database; one-click centring, collision avoidance
- Stress-relieved welded bed, aerospace-grade aluminum beam, Schneider servo drives, HIWIN / rack-and-pinion drives
- Zoned negative-pressure dust extraction under the table; double air ducts; water chiller included
- Intelligent air-cutting option: compressed air instead of nitrogen on sheet to about 3/8″
- CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- Loading / unloading unit, servo swing-arm loader or storage tower
- Automatic pallet changer (NP) and bevel head (R / TX)
- Dust collector and compressor sized to the machine
- Higher laser power at order; nitrogen generator
- Custom voltage transformer

DETAILS, COMPONENTS AND OPTIONS

NP SINGLE-TABLE SHEET LASERS WITH GANTRY COVER, 5 × 10 TO 6.6 × 20 FT, 3 – 12 KW

NP series laser — the open table under the gantry cover, loaded from three sides

TECHNICAL SPECIFICATIONS

NP SINGLE-TABLE SHEET LASERS WITH GANTRY COVER, 5 × 10 TO 6.6 × 20 FT, 3 – 12 KW

NP SINGLE-TABLE SHEET LASERS WITH GANTRY COVER

5 models · 5 × 10 to 6.6 × 20 ft · 3 – 12 kW

Model	SF3015NP	SF4015NP	SF4020NP	SF6015NP	SF6020NP
Working area	**10 × 5 ft (3,000 × 1,500 mm)**	**13 × 5 ft (4,000 × 1,500 mm)**	**13 × 6.6 ft (4,000 × 2,000 mm)**	**20 × 5 ft (6,000 × 1,500 mm)**	**20 × 6.6 ft (6,000 × 2,000 mm)**
Laser power	3 – 12 kW	3 – 12 kW	3 – 12 kW	3 – 12 kW	3 – 12 kW
Max. no-load speed	394 ft/min (120 m/min)	394 ft/min (120 m/min)	394 ft/min (120 m/min)	394 ft/min (120 m/min)	394 ft/min (120 m/min)
Max. acceleration	1.2 G	1.2 G	1.2 G	1.2 G	1.2 G
Positioning accuracy	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)
Max. table load	2,425 lb (1,100 kg)	3,086 lb (1,400 kg)	4,189 lb (1,900 kg)	4,630 lb (2,100 kg)	6,173 lb (2,800 kg)
Dimensions L × W × H	177 × 114 × 83″ (4,500 × 2,900 × 2,100 mm)	216 × 114 × 83″ (5,500 × 2,900 × 2,100 mm)	216 × 134 × 75″ (5,500 × 3,400 × 1,900 mm)	319 × 114 × 75″ (8,100 × 2,900 × 1,900 mm)	319 × 134 × 75″ (8,100 × 3,400 × 1,900 mm)

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF1313G

SF1313G COMPACT FIBER LASER, 4 × 4 FT, 1.5 – 3 KW

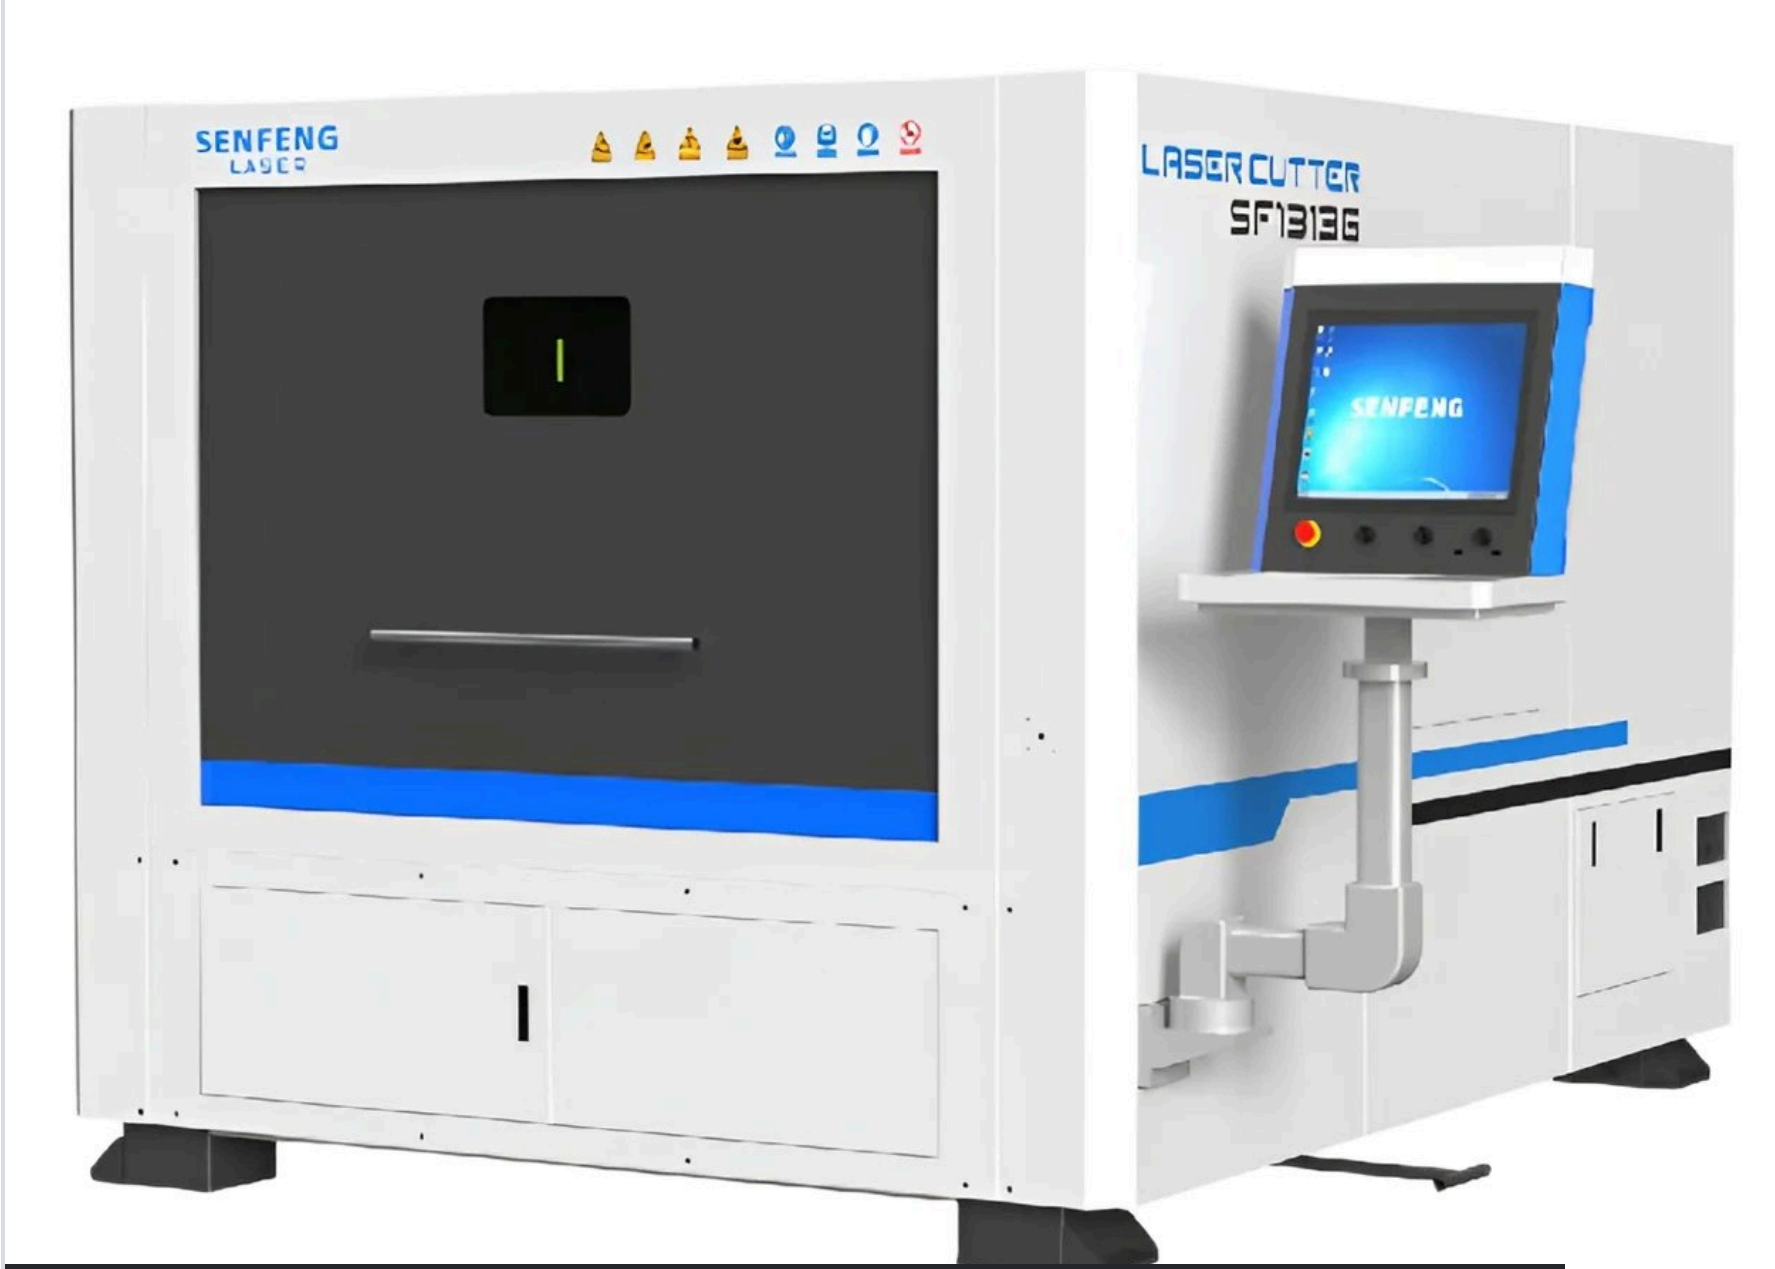

MODEL G · SF1313G — TOP COVER, LIFTING DOOR AND THE CONSOLE ON ITS ARM

Senfeng SF1313G in a workshop — 4 × 4 ft, fully enclosed, 1.5 – 3 kW

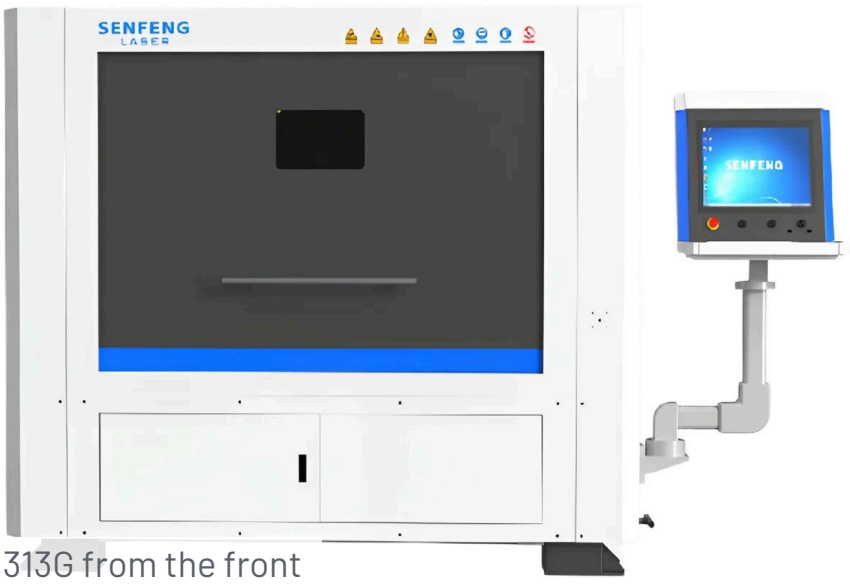

SF1313G from the front

The smallest Senfeng laser, for the small shop: a fully enclosed single-table machine with a 4 × 4 ft working area and a 1.5 to 3 kW source that cuts small, thin and light parts at high precision. Laser energy is controlled to the sheet thickness, so thin sheet comes out free of overburning and burr, and the compact custom source with anti-back-reflection modules cuts aluminum, stainless, copper and brass with an electro-optical efficiency above 40 %. The sidewise push-pull table saves floor space and makes loading easy, the zoned smoke exhaust follows the cut, and the whole machine — 118 × 85 × 79″ — ships in one 20 ft container without disassembly.

STANDARD FEATURES

- ✓ 1.5 – 3 kW; 4 × 4 ft (1,300 × 1,300 mm) single table; 262 ft/min; 485 lb table load; cuts sheet to 0.787″ (20 mm)
- ✓ Fully enclosed with a top cover — no laser radiation outside the machine
- ✓ Sidewise push-pull table: small footprint, easy loading and unloading
- ✓ Zoned smoke exhaust synchronized with the cut keeps the shop clean
- ✓ Compact custom source with anti-back-reflection modules for aluminum, stainless, copper and brass; electro-optical efficiency above 40 %
- ✓ FSCUT2000 CNC with a cutting-process database for each thickness and material
- ✓ Water chiller, transformer, voltage stabilizer and fan supplied
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- + Dust collector and compressor sized to the machine
- + Custom voltage transformer

DETAILS, COMPONENTS AND OPTIONS

SF1313G COMPACT FIBER LASER, 4 × 4 FT, 1.5 – 3 KW

LASER CUTTER
SF1313G

SF1313G from the side — compact single-table body

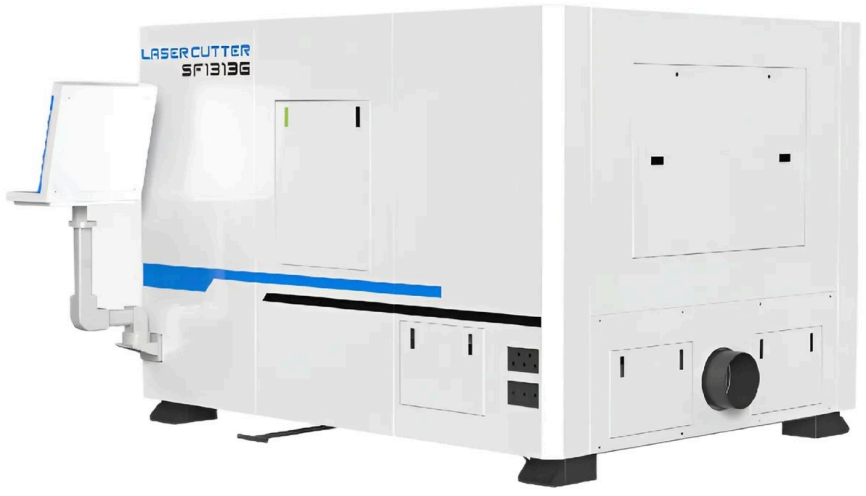

SF1313G from the rear — extraction fan and service doors

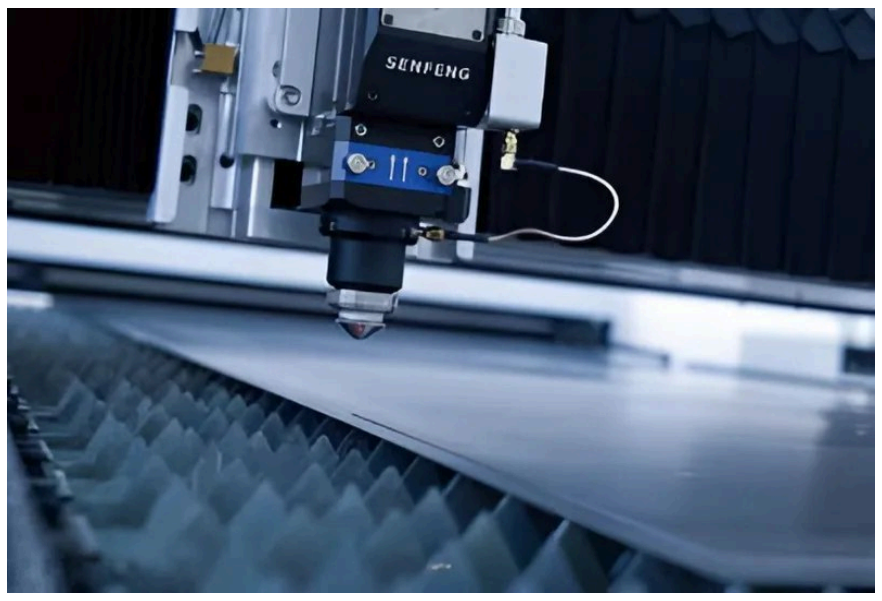

Cutting thin sheet — laser energy matched to the thickness, no overburning or burr

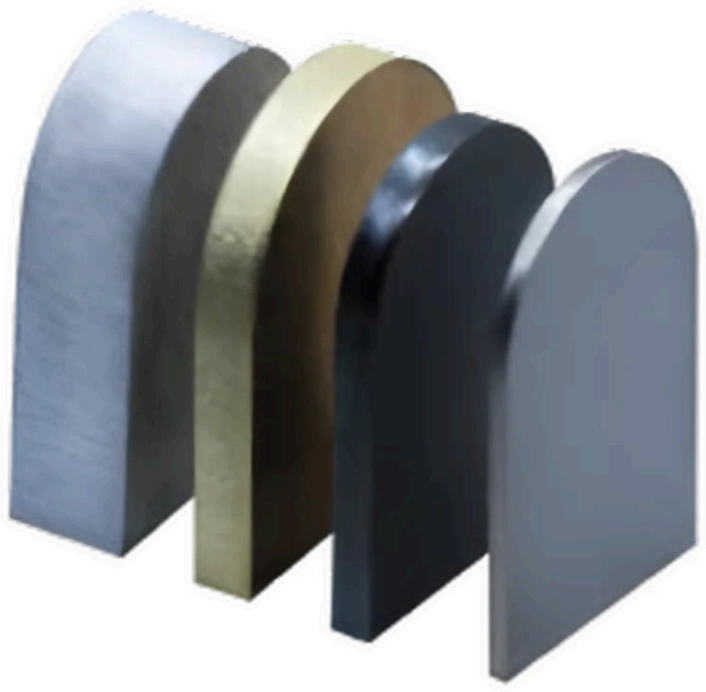

Aluminum, brass and steel cut on the SF1313G — anti-back-reflection source

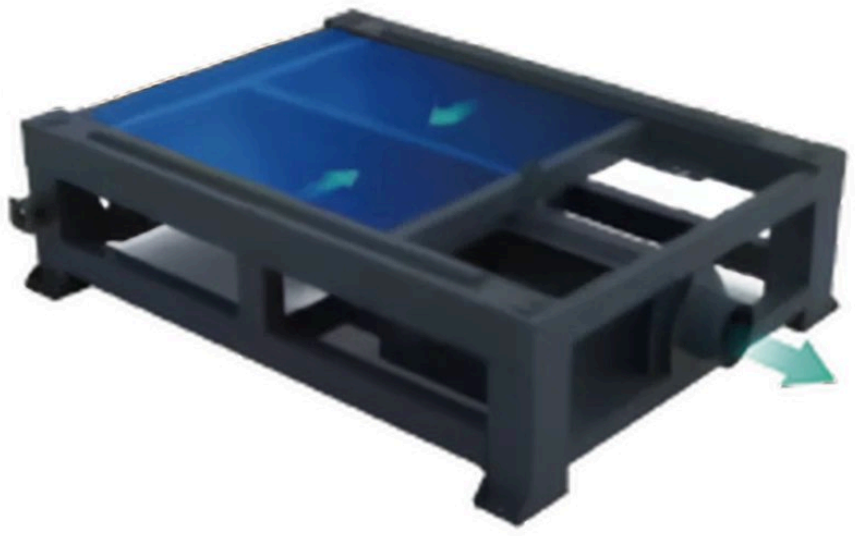

Sidewise push-pull table with zoned smoke exhaust

SF1313G ships in one 20 ft container

TECHNICAL SPECIFICATIONS

SF1313G COMPACT FIBER LASER, 4 × 4 FT, 1.5 – 3 KW

SF1313G COMPACT SHEET LASER

4 × 4 ft · 1.5 – 3 kW · single table

Model	SF1313G
Working area	**4 × 4 ft (1,300 × 1,300 mm)**
Laser power	1.5 – 3 kW
X / Y travel	4 × 4 ft
Z travel	4″ (100 mm)
Max. no-load speed	262 ft/min (80 m/min)
Max. acceleration	1 G
Positioning accuracy	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)
Max. table load	485 lb (220 kg)
Max. cutting thickness	0.787″ (20 mm)
CNC	FSCUT2000
Dimensions L × W × H	118 × 85 × 79″ (2,985 × 2,160 × 2,000 mm)

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF3015H – SF12025H · HC, H4 AND H5 · 14 MODELS

H SERIES SHEET LASERS WITH PALLET CHANGER, 5 × 10 TO 8.3 × 40 FT, 1.5 – 80 KW

SENFENG
SF3015H
SF3015H

MODEL H · SENFENG SF3015H4 FIBER LASER CUTTING MACHINE WITH PALLET CHANGER — 5 × 10 FT, 6 – 30 KW

Senfeng SF3015H space-saver fiber laser — 5 × 10 ft, 1.5 – 12 kW

SENFENG
SF3015H

SF3015H5 heavy-load fiber laser for 40 – 80 kW sources

Senfeng's production laser: a full-cover cabin, a double pallet changer that swaps tables in 20 seconds and a thermally isolated hollow bed with graphite protection for high-power cutting. Three builds on the same platform — the HC space saver with 1.5 to 12 kW in a 19 m^2 footprint, the fourth-generation H4 with 6 to 30 kW, 656 ft/min and up to 2.8 G on tables to 8.3 × 40 ft, and the H5 heavy-load machine with hydraulic table lifts to 30 t for 40 to 80 kW sources and 2″ plate. CE / FDA / ETL certified and CSA approved, with loading towers, sheet storage and loading arms as options.

STANDARD FEATURES

- ✓ Pallet changer, 20 s table exchange; 1.5 – 80 kW; 5 × 10 to 8.3 × 40 ft; to 656 ft/min and 2.8 G
- ✓ Fiber laser source 1.5 – 80 kW (IPG, Raycus or Max) with the autofocus cutting head (Raytools / BOCI) and capacitive height sensing
- ✓ Bus-based CNC with a 21.5″ touchscreen (Cypcut / BOCHU), nesting software and a cutting-parameter database; one-click centring, collision avoidance
- ✓ Stress-relieved welded bed, aerospace-grade aluminum beam, Schneider servo drives, HIWIN / rack-and-pinion drives
- ✓ Zoned negative-pressure dust extraction under the table; double air ducts; water chiller included
- ✓ Intelligent air-cutting option: compressed air instead of nitrogen on sheet to about 3/8″
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- + Loading / unloading unit, servo swing-arm loader or storage tower
- + Automatic pallet changer (NP) and bevel head (R / TX)
- + Dust collector and compressor sized to the machine
- + Higher laser power at order; nitrogen generator
- + Custom voltage transformer

DETAILS, COMPONENTS AND OPTIONS · 1 / 3

H SERIES SHEET LASERS WITH PALLET CHANGER, 5 × 10 TO 8.3 × 40 FT, 1.5 – 80 KW

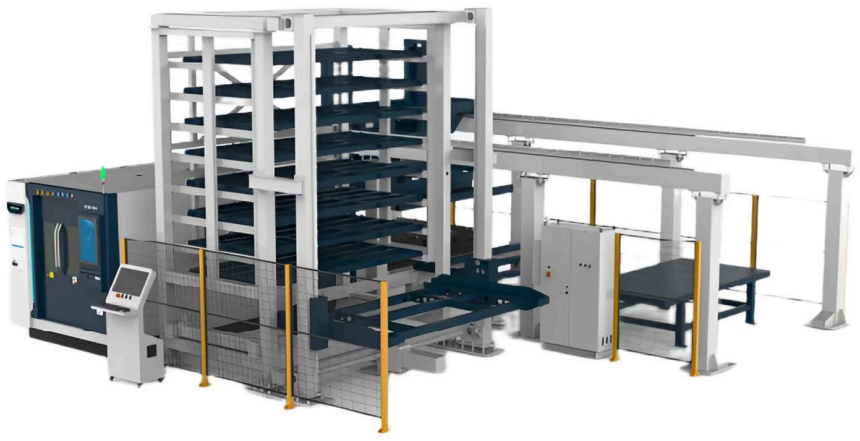

H4 fiber laser with the optional loading / unloading tower and sheet storage

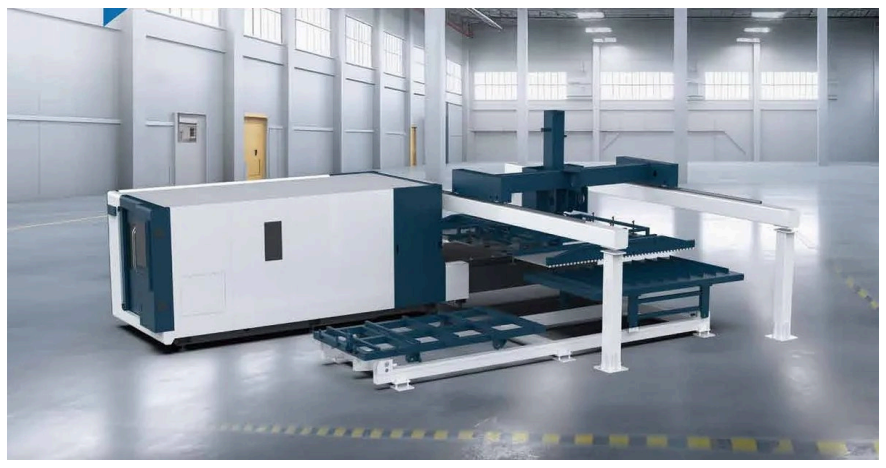

SF3015H with the automatic loading and unloading gantry

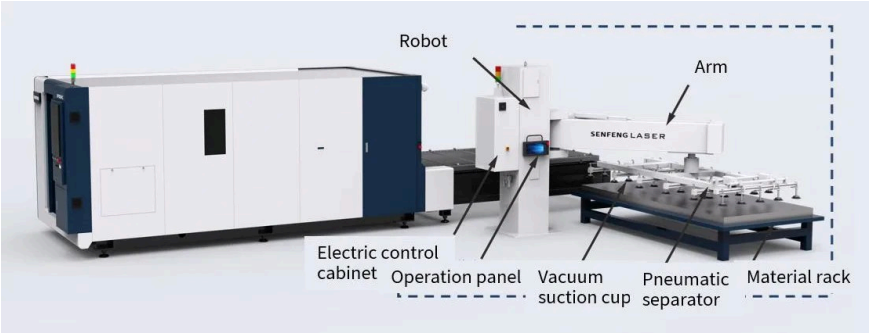
Robot
Arm
SENFENG LASER
Electric control cabinet
Operation panel
Vacuum suction cup
Pneumatic separator
Material rack

Servo swing-arm loading system for 1,100 lb sheets (optional)

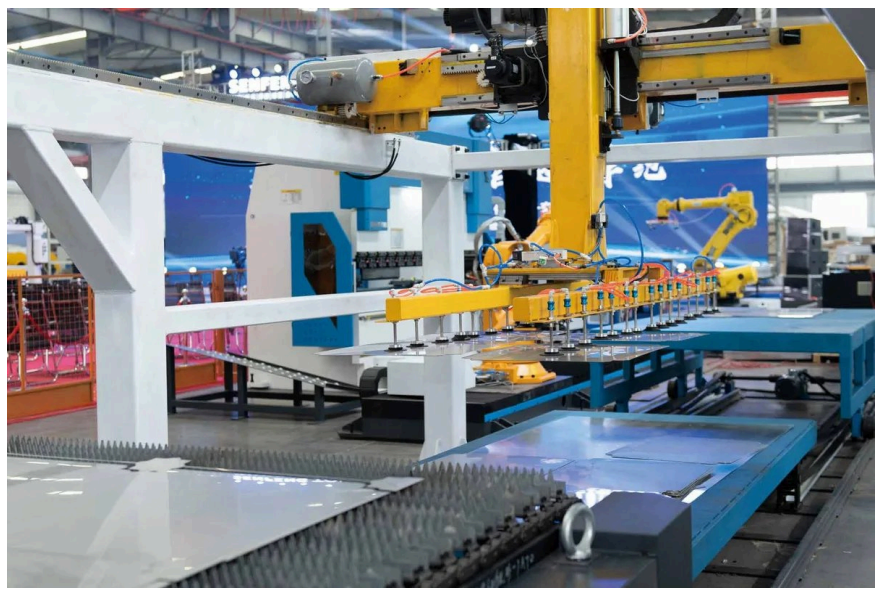

Automated laser line — gantry loader and sorting robot behind the laser

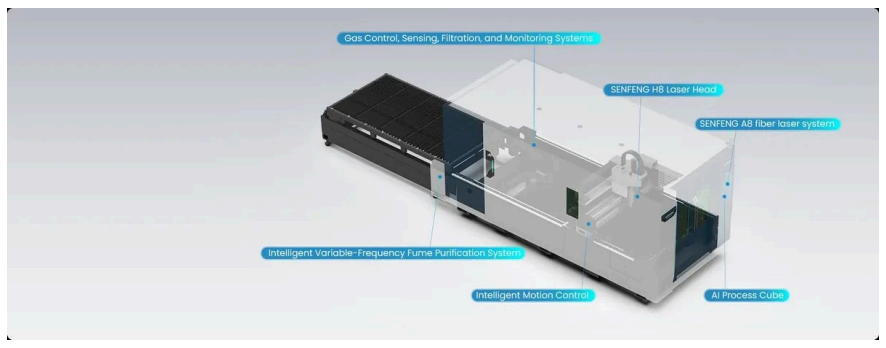
Gas Control, Sensing, Filtration, and Monitoring Systems
SENFENG H8 Laser Head
SENFENG A8 fiber laser system
Intelligent Variable-Frequency Fume Purification System
Intelligent Motion Control
AI Process Cube

AI Intelligent Air Cutting (optional) — air monitoring, H8 head, A8 control and AI Process Cube

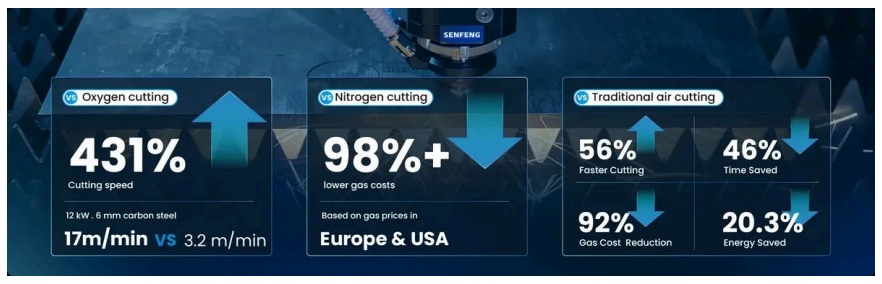
SENFENG
VS Oxygen cutting
431%
Cutting speed
12 kW . 6 mm carbon steel
17m/min VS 3.2 m/min
VS Nitrogen cutting
98%+
lower gas costs
Based on gas prices in
Europe & USA
VS Traditional air cutting
56%
Faster Cutting
46%
Time Saved
92%
Gas Cost Reduction
20.3%
Energy Saved

AI Intelligent Air Cutting (optional) — 431 % faster than oxygen, 98 % lower gas cost than nitrogen

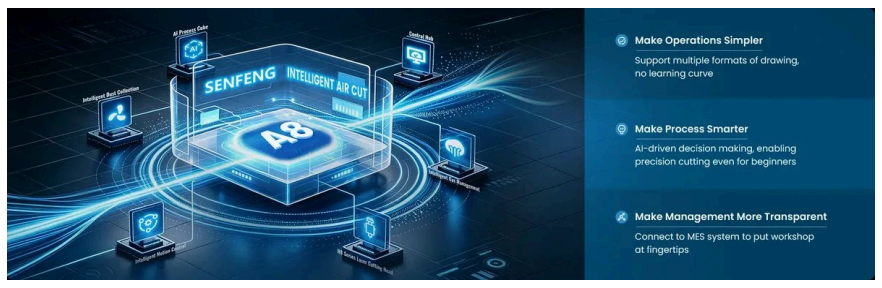
AI Process Cube
Control Hub
Intelligent Dust Collection
SENFENG
INTELLIGENT AIR CUT
A8
Intelligent Gas Management
Intelligent Motion Control
H8 Series Laser Cutting Head
Make Operations Simpler
Support multiple formats of drawing, no learning curve
Make Process Smarter
AI-driven decision making, enabling precision cutting even for beginners
Make Management More Transparent
Connect to MES system to put workshop at fingertips

AI Intelligent Air Cutting (optional) — the A8 control runs gas, dust collection, motion and the AI Process Cube

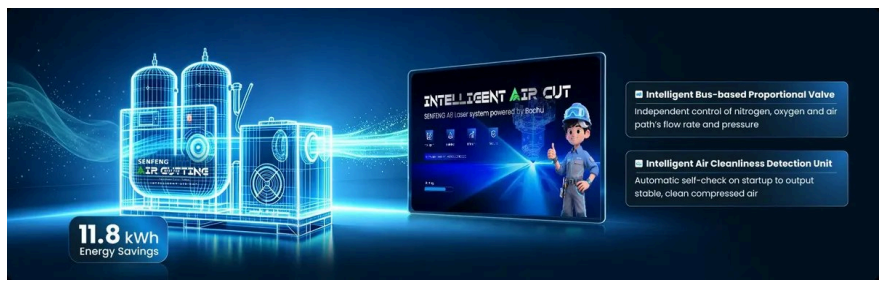
SENFENG
AIR CUTTING
11.8 kWh
Energy Savings
INTELLIGENT AIR CUT
SENFENG A8 Laser system powered by Bochu
Intelligent Bus-based Proportional Valve
Independent control of nitrogen, oxygen and air path's flow rate and pressure
Intelligent Air Cleanliness Detection Unit
Automatic self-check on startup to output stable, clean compressed air

AI Intelligent Air Cutting (optional) — bus-connected compressor and air check, 11.8 kWh saved per hour

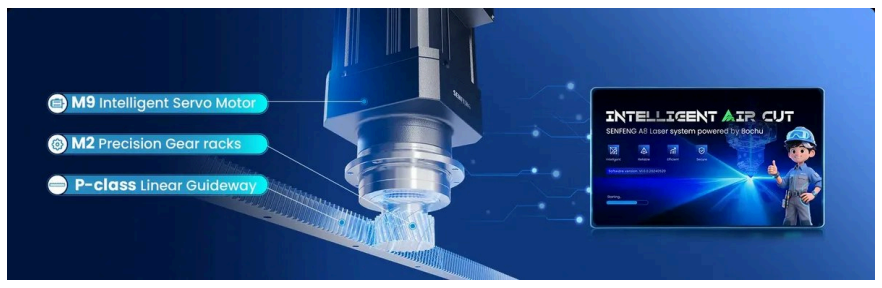
M9 Intelligent Servo Motor
M2 Precision Gear racks
P-class Linear Guideway
INTELLIGENT AIR CUT
SENFENG A8 Laser system powered by Bochu

AI Intelligent Air Cutting (optional) — M9 servo motors, M2 precision racks, P-class guideways

DETAILS, COMPONENTS AND OPTIONS · 2 / 3

H SERIES SHEET LASERS WITH PALLET CHANGER, 5 × 10 TO 8.3 × 40 FT, 1.5 – 80 KW

Heavy-duty, thermally isolated hollow bed of the high-power H — no internal joints, stress-relieved and aged

Aviation-grade high-strength aluminum crossbeam — extruded, quenched, aged and precision-machined

Bed with zoned spiral negative-pressure dust extraction and a sealed bottom for smoke-free cutting

Fully enclosed lift door of the SF3015H — better sealing for dust and smoke extraction

Modular Z axis — sealed against contamination, replaced as one unit

Visual monitoring of the cutting area on the CNC screen

Raycus
RFL-C30000
Raycus RFL-C30000 fiber laser source — 12 to 30 kW on the high-power SF3015H

MAX
MFSC-6000C
MAX fiber laser source of the 1.5 – 6 kW SF3015H


BOCI cutting head for 30 kW — anti-collision, lens temperature and gas pressure monitoring

DETAILS, COMPONENTS AND OPTIONS · 3 / 3

H SERIES SHEET LASERS WITH PALLET CHANGER, 5 × 10 TO 8.3 × 40 FT, 1.5 – 80 KW

RAYTOOLS
RAYTOOLS

Raytools autofocus cutting head for 4 – 6 kW

Thick-plate sample cut on the high-power SF3015H, checked with a caliper

Thick-plate sample part cut on the high-power SF3015H

TECHNICAL SPECIFICATIONS · 1 / 2

H SERIES SHEET LASERS WITH PALLET CHANGER, 5 × 10 TO 8.3 × 40 FT, 1.5 – 80 KW

H SERIES SPACE-SAVER LASERS · 1.5 – 12 KW

5 models · 5 × 10 to 6.6 × 20 ft · pallet changer

Model	SF3015H	SF4015H	SF4020H	SF6015H	SF6020H
Working area	**10 × 5 ft (3,000 × 1,500 mm)**	**13 × 5 ft (4,000 × 1,500 mm)**	**13 × 6.6 ft (4,000 × 2,000 mm)**	**20 × 5 ft (6,000 × 1,500 mm)**	**20 × 6.6 ft (6,000 × 2,000 mm)**
Laser power	1.5 – 12 kW	1.5 – 12 kW	1.5 – 12 kW	1.5 – 12 kW	1.5 – 12 kW
Max. no-load speed	426 ft/min (130 m/min)	426 ft/min (130 m/min)	426 ft/min (130 m/min)	426 ft/min (130 m/min)	426 ft/min (130 m/min)
Max. acceleration	1.2 G	1.2 G	1.2 G	1.2 G	1.2 G
Positioning accuracy	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)
Max. table load	2,425 lb (1,100 kg)	3,307 lb (1,500 kg)	4,189 lb (1,900 kg)	4,850 lb (2,200 kg)	6,393 lb (2,900 kg)
Z travel	8.7″ (220 mm)	—	—	—	—
Machine weight by source power	11,552 – 11,729 lb (5,240 – 5,320 kg)	—	—	—	—
Power supply protection	IP54	—	—	—	—
Dimensions L × W × H	27.9 × 7.4 × 7.1 ft (8.5 × 2.3 × 2.2 m)	35.8 × 7.4 × 7.2 ft (10.9 × 2.3 × 2.2 m)	36.2 × 10.6 × 7.4 ft (11.0 × 3.2 × 2.3 m)	48.3 × 7.4 × 7.2 ft (14.7 × 2.3 × 2.2 m)	48.8 × 10.6 × 7.4 ft (14.9 × 3.2 × 2.3 m)

H4 SERIES HIGH-POWER LASERS · 6 – 30 KW

6 models · 5 × 10 to 8.3 × 40 ft · pallet changer, 2 G

Model	SF3015H	SF4020H	SF6020H	SF6025H	SF8025H	SF12025H
Working area	**10 × 5 ft (3,000 × 1,500 mm)**	**13 × 6.6 ft (4,000 × 2,000 mm)**	**20 × 6.6 ft (6,000 × 2,000 mm)**	**20 × 8.2 ft (6,000 × 2,500 mm)**	**26 × 8.2 ft (8,000 × 2,500 mm)**	**39 × 8.2 ft (12,000 × 2,500 mm)**
Laser power	6 – 30 kW	6 – 30 kW	6 – 30 kW	6 – 30 kW	6 – 30 kW	6 – 30 kW
Max. no-load speed	656 ft/min (200 m/min)	656 ft/min (200 m/min)	656 ft/min (200 m/min)	656 ft/min (200 m/min)	656 ft/min (200 m/min)	656 ft/min (200 m/min)
Max. acceleration	2.8 G	2 G	2 G	2 G	2 G	2 G
Positioning accuracy	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.004″ per 33 ft (±0.1 mm / 10 m) · repeat ±0.001″ (±0.02 mm)	±0.004″ per 33 ft (±0.1 mm / 10 m) · repeat ±0.001″ (±0.02 mm)	±0.004″ per 33 ft (±0.1 mm / 10 m) · repeat ±0.001″ (±0.02 mm)	±0.004″ per 33 ft (±0.1 mm / 10 m) · repeat ±0.001″ (±0.02 mm)	±0.004″ per 33 ft (±0.1 mm / 10 m) · repeat ±0.001″ (±0.02 mm)
Max. table load	6,614 lb (3,000 kg)	11,023 lb (5,000 kg)	16,645 lb (7,550 kg)	19,842 lb (9,000 kg)	26,455 lb (12,000 kg)	41,579 lb (18,860 kg)
Z travel	15.4″ (390 mm)	—	—	—	—	—
Machine weight by source power	13,735 – 15,763 lb (6,230 – 7,150 kg)	—	—	—	—	—
Power supply protection	IP54	—	—	—	—	—
Dimensions L × W × H	332 × 89 × 92″ (8,440 × 2,270 × 2,340 mm)	425 × 125 × 95″ (10,790 × 3,180 × 2,410 mm)	590 × 125 × 95″ (14,980 × 3,180 × 2,410 mm)	580 × 149 × 95″ (14,730 × 3,780 × 2,410 mm)	743 × 149 × 95″ (18,870 × 3,780 × 2,410 mm)	1093 × 149 × 95″ (27,770 × 3,780 × 2,410 mm)

TECHNICAL SPECIFICATIONS · 2 / 2

H SERIES SHEET LASERS WITH PALLET CHANGER, 5 × 10 TO 8.3 × 40 FT, 1.5 – 80 KW

H5 HEAVY-LOAD LASERS · 12 – 80 KW

3 models · hydraulic table lift to 30 t · 2″ plate

Model	SF3015H5	SF4020H5	SF6025H5
Working area	**10 × 5 ft (3,000 × 1,500 mm)**	**13 × 6.6 ft (4,000 × 2,000 mm)**	**20 × 8.2 ft (6,000 × 2,500 mm)**
Laser power	12 – 30 kW	40 – 80 kW	12 – 30 kW
Max. no-load speed	656 ft/min (200 m/min)	656 ft/min (200 m/min)	656 ft/min (200 m/min)
Positioning accuracy	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)
Hydraulic table lift	44,092 lb (20,000 kg)	66,139 lb (30,000 kg)	66,139 lb (30,000 kg)
Dimensions L × W × H	28.1 × 9.4 × 7.8 ft (8.6 × 2.9 × 2.4 m)	35.2 × 11.1 × 7.8 ft (10.7 × 3.4 × 2.4 m)	49.5 × 12.7 × 7.8 ft (15.1 × 3.9 × 2.4 m)

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF3015HM – SF6025HM · 4 MODELS

HM SHEET AND TUBE COMBINATION LASERS, 5 × 10 TO 8.3 × 20 FT SHEET PLUS Ø8.6″ × 20 FT TUBE, 1.5 – 30 KW

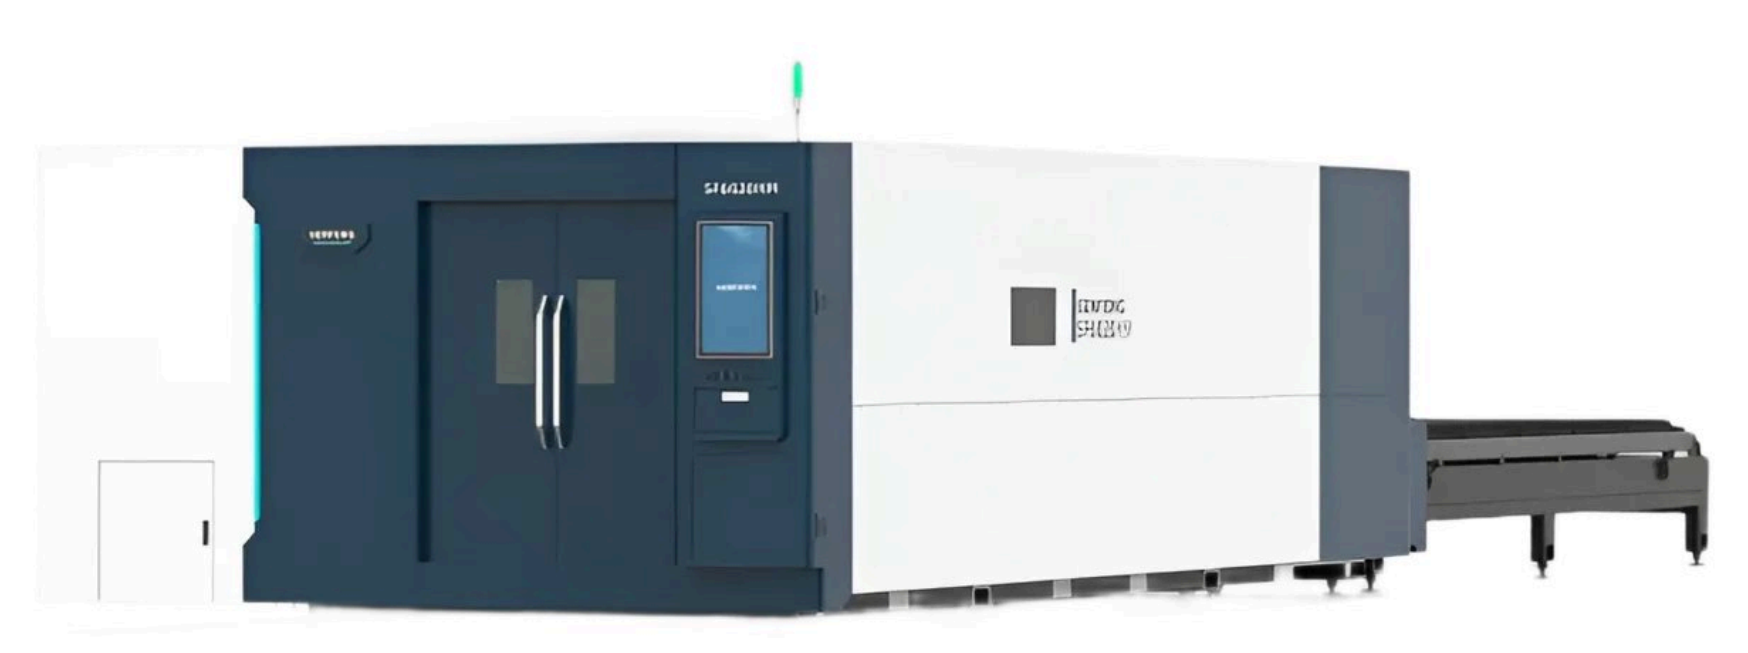

MODEL HM · SENFENG SF3015HM SHEET AND TUBE FIBER LASER — 5 × 10 FT TABLE PLUS Ø8.6″ × 20 FT TUBE ATTACHMENT

SF3015HM — the tube attachment on the side of the cabin

SF3015HM — rear view with the tube support

One machine for sheet and tube: the fully enclosed H series laser with a dual exchange table and, on the side, a rotary chuck and tube supports for round, square and rectangular tube from Ø0.7 to 8.6″ and up to 20 ft long. The same source and autofocus head serve both, so a shop cuts plate and tube on one machine at an affordable price, and the two exchange tables load one sheet while the other is cut. Four sheet sizes from 5 × 10 to 8.3 × 20 ft with 6 to 30 kW, and the SF3015HM also as a medium-power machine from 1.5 to 6 kW with its own full technical specification.

STANDARD FEATURES

- ✓ Sheet 5 × 10 to 8.3 × 20 ft on a dual exchange table; tube Ø0.7 – 8.6″ × 20 ft; 1.5 – 30 kW; to 656 ft/min
- ✓ Fully enclosed cabin around both tables — no laser radiation outside the machine
- ✓ Autofocus cutting head sets the focus for each material and thickness
- ✓ FSCUT3000 CNC for sheet and tube, with a cutting-process database for each thickness, sheet and tube
- ✓ High-strength welded bed, annealed and aged; aircraft-grade aluminum beam; AVENTICS gas valves
- ✓ Zoned negative-pressure dust extraction; modular sealed Z axis; water chiller included
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- + Loading / unloading unit, servo swing-arm loader or storage tower
- + Automatic pallet changer (NP) and bevel head (R / TX)
- + Dust collector and compressor sized to the machine
- + Higher laser power at order; nitrogen generator
- + Custom voltage transformer
- + Tube bundle loader

HM SHEET AND TUBE COMBINATION LASERS — TECHNICAL SPECIFICATIONS

Model	SF3015HM	SF4020HM	SF6020HM	SF6025HM
Sheet working area	10 × 5 ft (3,000 × 1,500 mm)	13 × 6.6 ft (4,000 × 2,000 mm)	20 × 6.6 ft (6,000 × 2,000 mm)	20 × 8.2 ft (6,000 × 2,500 mm)
Tube diameter	**Ø0.7 – 8.6″ (Ø18 – 218 mm)**	**Ø0.7 – 8.6″ (Ø18 – 218 mm)**	**Ø0.7 – 8.6″ (Ø18 – 218 mm)**	**Ø0.7 – 8.6″ (Ø18 – 218 mm)**
Max. tube length	20 ft (6,000 mm)	20 ft (6,000 mm)	20 ft (6,000 mm)	20 ft (6,000 mm)
Laser power	6 – 30 kW	6 – 30 kW	6 – 30 kW	6 – 30 kW
Max. no-load speed	656 ft/min (200 m/min)	656 ft/min (200 m/min)	656 ft/min (200 m/min)	656 ft/min (200 m/min)
Positioning accuracy	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)
Max. table load	6,614 lb (3,000 kg)	11,023 lb (5,000 kg)	16,645 lb (7,550 kg)	19,842 lb (9,000 kg)
Dimensions L × W × H	30.3 × 11.4 × 7.7 ft (9.2 × 3.5 × 2.3 m)	35.3 × 14.1 × 7.9 ft (10.8 × 4.3 × 2.4 m)	49.1 × 14.1 × 7.9 ft (15.0 × 4.3 × 2.4 m)	48.6 × 16 × 7.9 ft (14.8 × 4.9 × 2.4 m)

DETAILS, COMPONENTS AND OPTIONS · 1 / 2

HM SHEET AND TUBE COMBINATION LASERS, 5 × 10 TO 8.3 × 20 FT SHEET PLUS Ø8.6″ × 20 FT TUBE, 1.5 – 30 KW

Sheet and tube laser — cabin doors open

SF3015HM from the tube side — the exchange table and the enclosed cabin

SF3015HM tube and plate laser — the tube chuck and supports beside the enclosed cabin

Raytools autofocus cutting head, 4 – 6 kW

Raytools autofocus cutting head, 1.5 – 3 kW

Max fiber laser source

SF3015HM high-strength welded bed — annealed, aged and precision-milled

Aircraft-grade extruded aluminum beam

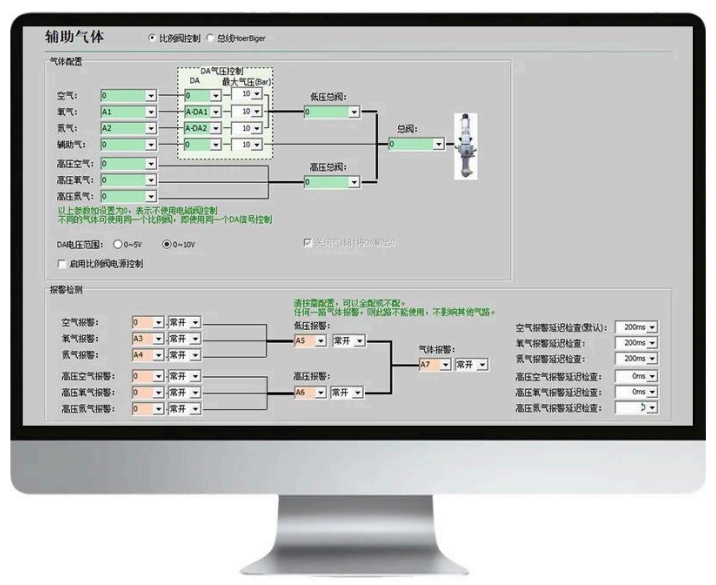
Pneumatic system — AVENTICS valves and proportional regulators for each gas path

DETAILS, COMPONENTS AND OPTIONS · 2 / 2

HM SHEET AND TUBE COMBINATION LASERS, 5 × 10 TO 8.3 × 20 FT SHEET PLUS Ø8.6″ × 20 FT TUBE, 1.5 – 30 KW

Modular sealed Z axis

TECHNICAL SPECIFICATIONS

HM SHEET AND TUBE COMBINATION LASERS, 5 × 10 TO 8.3 × 20 FT SHEET PLUS Ø8.6″ × 20 FT TUBE, 1.5 – 30 KW

SF3015HM MEDIUM POWER, 1.5 – 6 KW

from the SF3015HM technical solution · 5 kW steps 1.5 / 2 / 3 / 4 / 6 kW

Model	SF3015HM 1.5 – 6 kW
Sheet working area	120.1 × 60.2″ (3,050 × 1,530 mm)
X / Y / Z travel	60.2 × 120.1 × 13.0″ (1,530 × 3,050 × 330 mm)
Tube diameter	**Ø0.8 – 8.7″ (Ø20 – 220 mm)**
Tube length	**1.6 – 20 ft (500 – 6,000 mm)**
Laser power	1.5 – 6 kW
Max. no-load speed	427 ft/min (130 m/min)
Max. acceleration	1 G
Positioning accuracy	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)
Max. table load	2,425 lb (1,100 kg)
Machine weight	15,653 – 15,851 lb (7,100 – 7,190 kg)
Power supply protection	IP54
Dimensions L × W × H	30.5 × 11.4 × 7.2 ft (9.3 × 3.5 × 2.2 m)

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF6030R – SF50030R · SF6030TX – SF50030TX · SF12030TXP · 16 MODELS

R / TX ULTRA-LARGE PLATE LASERS, 10 × 20 TO 10 × 164 FT, 6 – 60 KW, ±45° BEVEL

SENFENG
SENFENG

MODEL R · TX · TXP · SENFENG R SERIES ULTRA-LARGE PLATE LASER — 10 FT WIDE TABLE TO 164 FT LONG, 6 – 60 KW

Senfeng TX series plate laser with ±45° bevel head — 10 × 20 ft to 10 × 164 ft

SENFENG
SENFENG

R series plate laser — gantry over the long table

For shipyards, structural steel, heavy equipment and bridge fabrication: gantry lasers with 10 and 13 ft wide tables from 20 to 164 ft long that replace plasma and flame cutting of plate to 2″ and beyond with 6 to 60 kW sources. The R series cuts straight; the TX adds a ±45° bevel head for weld preparation in one pass; the TXP combines a 20 kW laser with an oxy-fuel torch for plate to 4″ on the same table. Protective curtains, blow-suction dust collection under the slats and a beam with a protective chamber are standard.

STANDARD FEATURES

- 10 × 20 to 10 × 164 ft tables; 6 – 60 kW; ±45° bevel (TX); laser + flame (TXP); 328 – 394 ft/min
- Fiber laser source 1.5 – 80 kW (IPG, Raycus or Max) with the autofocus cutting head (Raytools / BOCI) and capacitive height sensing
- Bus-based CNC with a 21.5″ touchscreen (Cypcut / BOCHU), nesting software and a cutting-parameter database; one-click centring, collision avoidance
- Stress-relieved welded bed, aerospace-grade aluminum beam, Schneider servo drives, HIWIN / rack-and-pinion drives
- Zoned negative-pressure dust extraction under the table; double air ducts; water chiller included
- Intelligent air-cutting option: compressed air instead of nitrogen on sheet to about 3/8″
- CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- Loading / unloading unit, servo swing-arm loader or storage tower
- Automatic pallet changer (NP) and bevel head (R / TX)
- Dust collector and compressor sized to the machine
- Higher laser power at order; nitrogen generator
- Custom voltage transformer

DETAILS, COMPONENTS AND OPTIONS

R / TX ULTRA-LARGE PLATE LASERS, 10 × 20 TO 10 × 164 FT, 6 – 60 KW, ±45° BEVEL

TX series bevel plate laser — three-quarter view

Senfeng SF12030TXP laser and flame hybrid plate cutter — 20 kW laser plus oxy-fuel to 4″

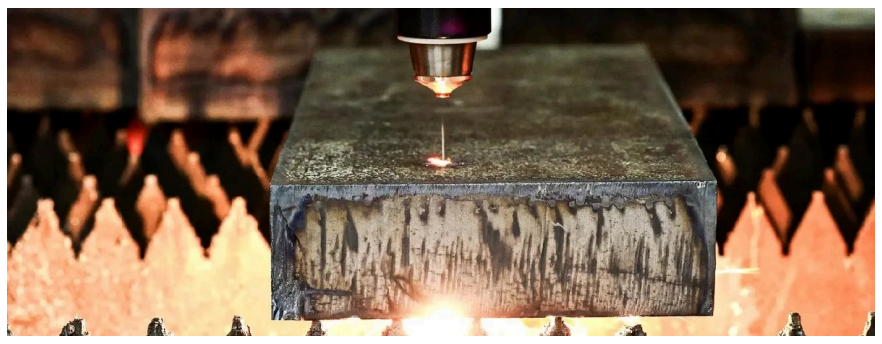

R series laser cutting 4″ (100 mm) plate

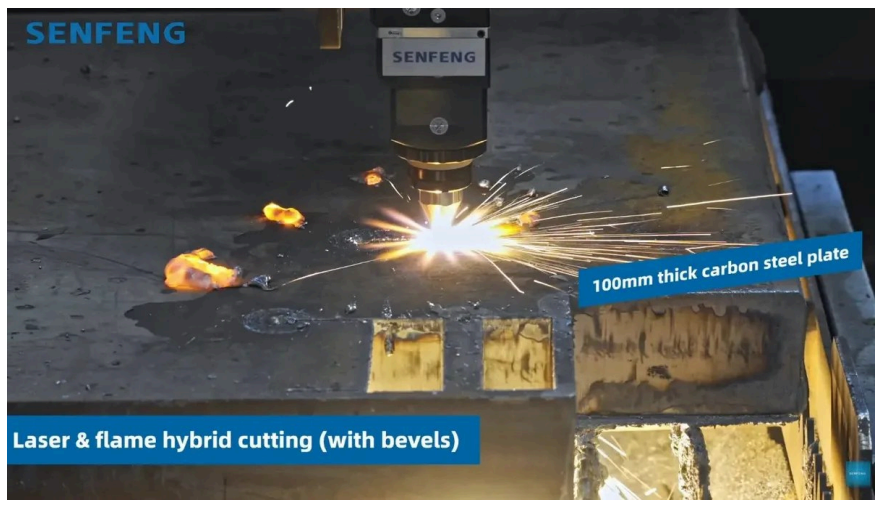
SENFENG
SENFENG
100mm thick carbon steel plate
Laser & flame hybrid cutting (with bevels)

TXP — laser and flame hybrid cutting of 4″ carbon steel plate with bevels

TECHNICAL SPECIFICATIONS · 1 / 2

R / TX ULTRA-LARGE PLATE LASERS, 10 × 20 TO 10 × 164 FT, 6 – 60 KW, ±45° BEVEL

R SERIES ULTRA-LARGE PLATE LASERS

8 models · 10 × 20 to 10 × 164 ft · 6 – 60 kW

Model	SF6030R	SF8030R	SF12030R	SF14030R	SF24040R	SF30040R	SF36030R	SF50030R
Working area	**20 × 10 ft (6,000 × 3,000 mm)**	**26 × 10 ft (8,000 × 3,000 mm)**	**39 × 10 ft (12,000 × 3,000 mm)**	**46 × 10 ft (14,000 × 3,000 mm)**	**79 × 13 ft (24,000 × 4,000 mm)**	**98 × 13 ft (30,000 × 4,000 mm)**	**118 × 10 ft (36,000 × 3,000 mm)**	**164 × 10 ft (50,000 × 3,000 mm)**
Laser power	6 – 60 kW	6 – 60 kW	6 – 60 kW	6 – 60 kW	6 – 60 kW	6 – 60 kW	12 – 60 kW	12 – 60 kW
Max. no-load speed	394 ft/min (120 m/min)	394 ft/min (120 m/min)	394 ft/min (120 m/min)	394 ft/min (120 m/min)	394 ft/min (120 m/min)	394 ft/min (120 m/min)	394 ft/min (120 m/min)	394 ft/min (120 m/min)
Positioning accuracy	±0.004″ per 33 ft (±0.1 mm / 10 m) · repeat ±0.002″ (±0.05 mm)	±0.004″ per 33 ft (±0.1 mm / 10 m) · repeat ±0.002″ (±0.05 mm)	±0.004″ per 33 ft (±0.1 mm / 10 m) · repeat ±0.002″ (±0.05 mm)	±0.004″ per 33 ft (±0.1 mm / 10 m) · repeat ±0.002″ (±0.05 mm)	±0.004″ per 33 ft (±0.1 mm / 10 m) · repeat ±0.002″ (±0.05 mm)	±0.004″ per 33 ft (±0.1 mm / 10 m) · repeat ±0.002″ (±0.05 mm)	±0.004″ per 33 ft (±0.1 mm / 10 m) · repeat ±0.002″ (±0.05 mm)	±0.004″ per 33 ft (±0.1 mm / 10 m) · repeat ±0.002″ (±0.05 mm)
Max. table load	31,184 lb (14,140 kg)	41,570 lb (18,860 kg)	62,355 lb (28,280 kg)	72,741 lb (32,990 kg)	166,156 lb (75,370 kg)	103,620 lb (47,000 kg)	186,982 lb (84,810 kg)	259,036 lb (117,500 kg)
Dimensions L × W × H	27.4 × 15.6 × 6.4 ft (8.4 × 4.8 × 2.0 m)	35 × 15.6 × 6.4 ft (10.7 × 4.8 × 2.0 m)	51.3 × 15.6 × 6.4 ft (15.6 × 4.8 × 2.0 m)	58.5 × 15.6 × 6.4 ft (17.8 × 4.8 × 2.0 m)	98 × 15.6 × 6.4 ft (29.9 × 4.8 × 2.0 m)	121.3 × 15.6 × 6.4 ft (37.0 × 4.8 × 2.0 m)	149.3 × 15.6 × 6.4 ft (45.5 × 4.8 × 2.0 m)	206.7 × 15.6 × 6.4 ft (63.0 × 4.8 × 2.0 m)

TX SERIES BEVEL PLATE LASERS · ±45°

7 models · 10 × 20 to 10 × 164 ft · 12 – 60 kW

Model	SF6030TX	SF8040TX	SF12030TX	SF14030TX	SF30040TX	SF36030TX	SF50030TX
Working area, straight cut	**20 × 10 ft (6,000 × 3,000 mm)**	**26 × 13 ft (8,000 × 4,000 mm)**	**39 × 10 ft (12,000 × 3,000 mm)**	**46 × 10 ft (14,000 × 3,000 mm)**	**98 × 13 ft (30,000 × 4,000 mm)**	**118 × 10 ft (36,000 × 3,000 mm)**	**164 × 10 ft (50,000 × 3,000 mm)**
Working area, bevel cut	**20 × 10 ft (6,000 × 3,000 mm)**	**26 × 13 ft (8,000 × 4,000 mm)**	**39 × 10 ft (12,000 × 3,000 mm)**	**46 × 10 ft (14,000 × 3,000 mm)**	**98 × 13 ft (30,000 × 4,000 mm)**	**118 × 10 ft (36,000 × 3,000 mm)**	**164 × 10 ft (50,000 × 3,000 mm)**
Laser power	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW
Bevel angle	±45°	±45°	±45°	±45°	±45°	±45°	±45°
Max. no-load speed	328 ft/min (100 m/min)	328 ft/min (100 m/min)	328 ft/min (100 m/min)	328 ft/min (100 m/min)	328 ft/min (100 m/min)	328 ft/min (100 m/min)	328 ft/min (100 m/min)
Max. table load	31,184 lb (14,140 kg)	55,334 lb (25,100 kg)	62,355 lb (28,280 kg)	72,741 lb (32,990 kg)	207,235 lb (94,000 kg)	186,982 lb (84,810 kg)	259,036 lb (117,500 kg)
Dimensions L × W × H	27.4 × 15.6 × 6.4 ft (8.4 × 4.8 × 2.0 m)	35 × 18.8 × 6.4 ft (10.7 × 5.7 × 2.0 m)	51.3 × 15.6 × 6.4 ft (15.6 × 4.8 × 2.0 m)	58.5 × 15.6 × 6.4 ft (17.8 × 4.8 × 2.0 m)	121.1 × 18.8 × 6.4 ft (36.9 × 5.7 × 2.0 m)	149.3 × 15.6 × 6.4 ft (45.5 × 4.8 × 2.0 m)	206.7 × 15.6 × 6.4 ft (63.0 × 4.8 × 2.0 m)

TECHNICAL SPECIFICATIONS · 2 / 2

R / TX ULTRA-LARGE PLATE LASERS, 10 × 20 TO 10 × 164 FT, 6 – 60 KW, ±45° BEVEL

TXP LASER AND FLAME HYBRID PLATE CUTTER

1 model · 10 × 40 ft · 20 kW laser + oxy-fuel bevel torch

Model	SF12030TXP
Working area, straight cut	**39 × 10 ft (12,000 × 3,000 mm)**
Working area, bevel cut	**37 × 6.6 ft (11,400 × 2,000 mm)**
Laser power	20 kW
Flame cutting	oxy-fuel torch for plate to 4″ (100 mm) with bevels
Max. no-load speed	328 ft/min (100 m/min)
Max. acceleration	0.8 G
Max. table load	62,355 lb (28,280 kg)
Dimensions L × W × H	51.3 × 15.6 × 6.4 ft (15.6 × 4.8 × 2.0 m)

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF3015TD

3D LASER CUTTING — FIVE-AXIS SF3015TD, 5 × 10 FT, 3 – 20 KW

SENFENG
SF-3015TD

MODEL TD · SENFENG SF3015TD FIVE-AXIS 3D FIBER LASER — 5 × 10 FT TRAVEL, 3 - 20 KW

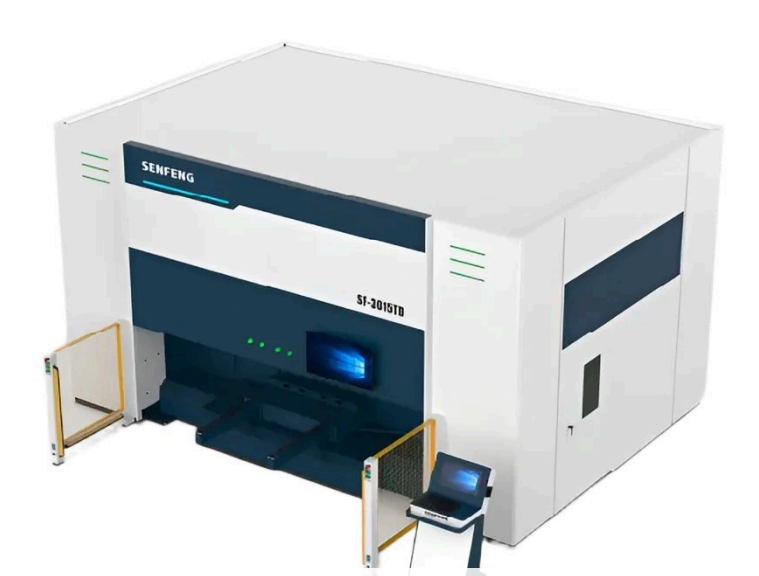

SF3015TD — the five-axis cell in its safety cabin

SF3015TD — dual-station table behind the light curtains, the console on its stand

Trimming and piercing formed parts: the SF3015TD carries a 3 to 20 kW five-axis head that turns endlessly (n × 360°) and swings ±135° over a 5 × 10 ft envelope at 328 ft/min, so it cuts trim lines, holes and slots in hot-stamped, pressed and drawn parts and pipe fittings where a flat-bed laser cannot reach — in place of trimming and piercing dies. A marble base with marble guide rails and racks damps vibration for accuracy, the 180° dual-station rotary table loads one part while the other is cut, and the fully enclosed cabin with interlocked doors and a light curtain keeps the operator out of the work zone.

STANDARD FEATURES

- ✓ Five-axis head: endless C rotation (n × 360°) and ±135° A swing; 3 – 20 kW; 5 × 10 ft travel, 27.6″ Z stroke; 328 ft/min, 1 G; air-cooled
- ✓ Collision-proof, self-resetting 3D cutting head with autofocus and fast follow-up
- ✓ Marble base with marble guide rails and racks — less resonance, more rigidity, higher positioning accuracy; modular build, easy to service
- ✓ Senfeng 3D five-axis CNC with a cutting-process database, dual-screen monitoring, teaching, speed limiting and RTCP; offline programming software from the 3D model; remote assistance module (optional)
- ✓ 180° dual-station rotary table, or a dual-drive servo high-speed shuttle table
- ✓ Fully enclosed cabin with safety-interlocked doors and an intelligent light curtain
- ✓ For hot-stamped and pressed automotive parts, pipe fittings, exhaust parts and stainless metalwork
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- + Fixtures made for your parts
- + Remote assistance module
- + Dual-drive servo shuttle table in place of the rotary table

DETAILS, COMPONENTS AND OPTIONS

3D LASER CUTTING — FIVE-AXIS SF3015TD, 5 × 10 FT, 3 - 20 KW

SF3015TD from the rear — the fully enclosed cabin and its service doors

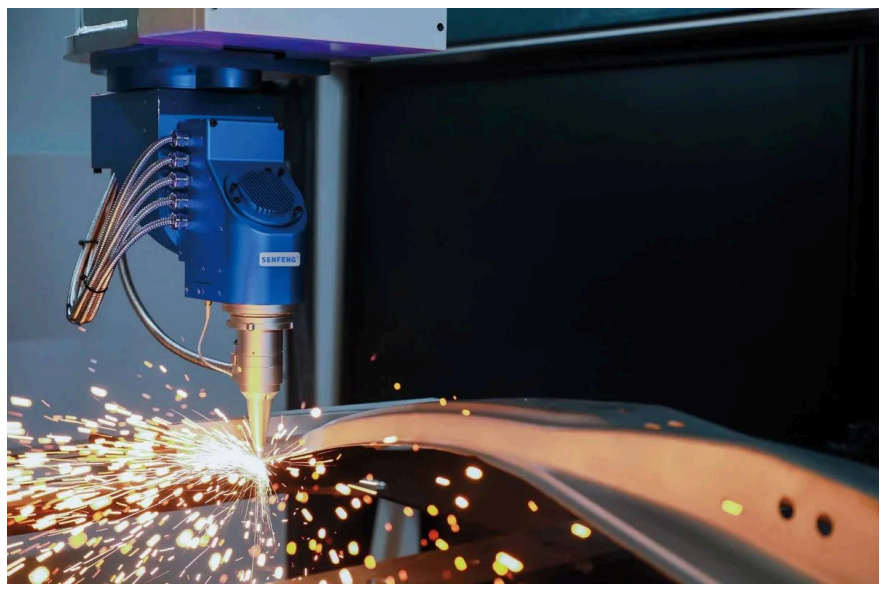

Five-axis head trimming a formed part

3D laser cutting a hot-stamped automotive part

SF3015TD semi-enclosed model with open guarded sides

SF3015TD fully-enclosed model — front view

Hot-formed automotive parts — body frame, door ring and pillars — trimmed on a five-axis laser

Pipe fittings cut on a five-axis laser — tees, laterals, elbows and reducers

Pressed parts and exhaust pipes cut in 3D

Stainless metalwork cut in 3D — pots, trays, dishes and perforated covers

TECHNICAL SPECIFICATIONS

3D LASER CUTTING — FIVE-AXIS SF3015TD, 5 × 10 FT, 3 - 20 KW

SF3015TD FIVE-AXIS 3D LASER

1 model · 5 × 10 ft travel · 3 – 20 kW

Model	SF3015TD
Travel range X × Y	10 × 5 ft (3,000 × 1,500 mm)
Stroke X / Y / Z	118.1 × 59.1 × 27.6″ (3,000 × 1,500 × 700 mm)
Laser power	3 – 20 kW
A axis · C axis	±135° · n × 360° (endless)
Positioning accuracy	±0.004″ (±0.1 mm) · repeat ±0.002″ (±0.05 mm)
Max. no-load speed	328 ft/min (100 m/min)
Max. acceleration	1 G
Machine cooling	air-cooled
Worktable	180° dual-station rotary table, or dual-drive servo shuttle table
Dimensions L × W × H	19.6 × 9.1 × 9 ft (6.0 × 2.8 × 2.7 m)

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF1503CH

SF1503CH COIL-FED FIBER LASER, THIN COIL 0.031 – 0.118″, 5 × 10 FT, 3 – 6 KW

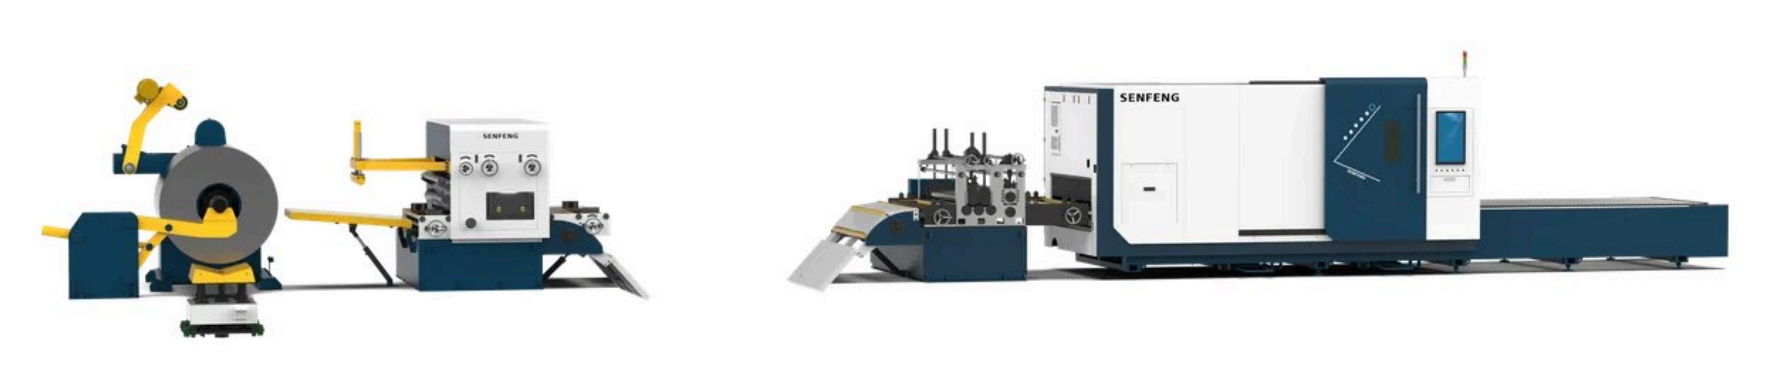

MODEL CH · SENFENG SF1503CH COIL-FED FIBER LASER CUTTING LINE — DECOILER, LEVELLER AND 5 × 10 FT LASER, 3 – 6 KW

SF1503CH — decoiler, leveller and the 5 × 10 ft laser in one line

SF1503CH coil-fed line from the front

Thin coil cut to net size with no sheet handling: a feeding trolley, single-support decoiler, leveller, positioning and correction device and a 5 × 10 ft laser run on one control, so coil from 0.031 to 0.118″ (0.8 – 3 mm) and up to 16.5 US tons goes from loading to finished blanks automatically. Levelling relieves the coil's internal stress for flatter sheet and cleaner cuts, lead-screw correction rollers guide the strip without scratching it and position it without laser edge-finding, and the line works at least 30 % faster than cutting sheets, with close to zero waste — on coil that costs less than cut-to-length sheet. Made for high-variety, small-batch thin work: automotive sheet-metal parts, aluminum veneer, electrical cabinets, metal doors, kitchenware and equipment enclosures.

STANDARD FEATURES

- ✓ Coil 0.031 – 0.118″ (0.8 – 3 mm) to 16.5 US tons; 5 × 10 ft working area; feeding to 49 ft/min; 3 – 6 kW
- ✓ Feeding trolley, single-support decoiler for 22,000 lb, auxiliary support, feeder, leveller, positioning and correction device and laser on one electronic control
- ✓ Stepless speed regulation: a geared motor drives the support roller so the strip hangs free between decoiler and feeder and its stress is relieved
- ✓ Ultra-precision correction: lead-screw-driven rollers straighten and guide the sheet without scratches and position it without laser edge-finding
- ✓ Process package for fast, mirror-finish cutting of thin stainless; at least 30 % faster than cutting sheets, close to zero waste
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- + Automatic unloading, sorting and stacking
- + Nesting software
- + Custom voltage transformer

DETAILS, COMPONENTS AND OPTIONS

SF1503CH COIL-FED FIBER LASER, THIN COIL 0.031 – 0.118″, 5 × 10 FT, 3 – 6 KW

SF1503CH — the leveller feeding coil into the laser

SF1503CH line with automatic unloading and stacking

SF1503CH with sorting tables after the laser

Coil-fed laser line — decoiler, leveller, laser and sorting robot

Parts cut straight from coil

TECHNICAL SPECIFICATIONS

SF1503CH COIL-FED FIBER LASER, THIN COIL 0.031 – 0.118″, 5 × 10 FT, 3 – 6 KW

SF1503CH COIL-FED FIBER LASER

1 model · thin coil 0.031 – 0.118″ · 5 × 10 ft · 3 – 6 kW

Model	SF1503CH
Coil thickness	0.031 – 0.118″ (0.8 – 3 mm)
Working area	**10 × 5 ft (3,000 × 1,500 mm)**
Coil inside Ø · max. outside Ø	Ø20″ (508 mm) · Ø55.1″ (1,400 mm)
Max. coil weight	16.5 US tons (15 t)
Max. feeding speed	49 ft/min (15 m/min)
Levelling accuracy	±0.00007 in/ft^2
Laser power	3 – 6 kW
Positioning accuracy	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF15015C

SF15015C OPEN-STYLE THIN-SHEET COIL-FED LASER, COIL 0.031 – 0.047″, 5 × 10 FT, 1.5 – 3 KW

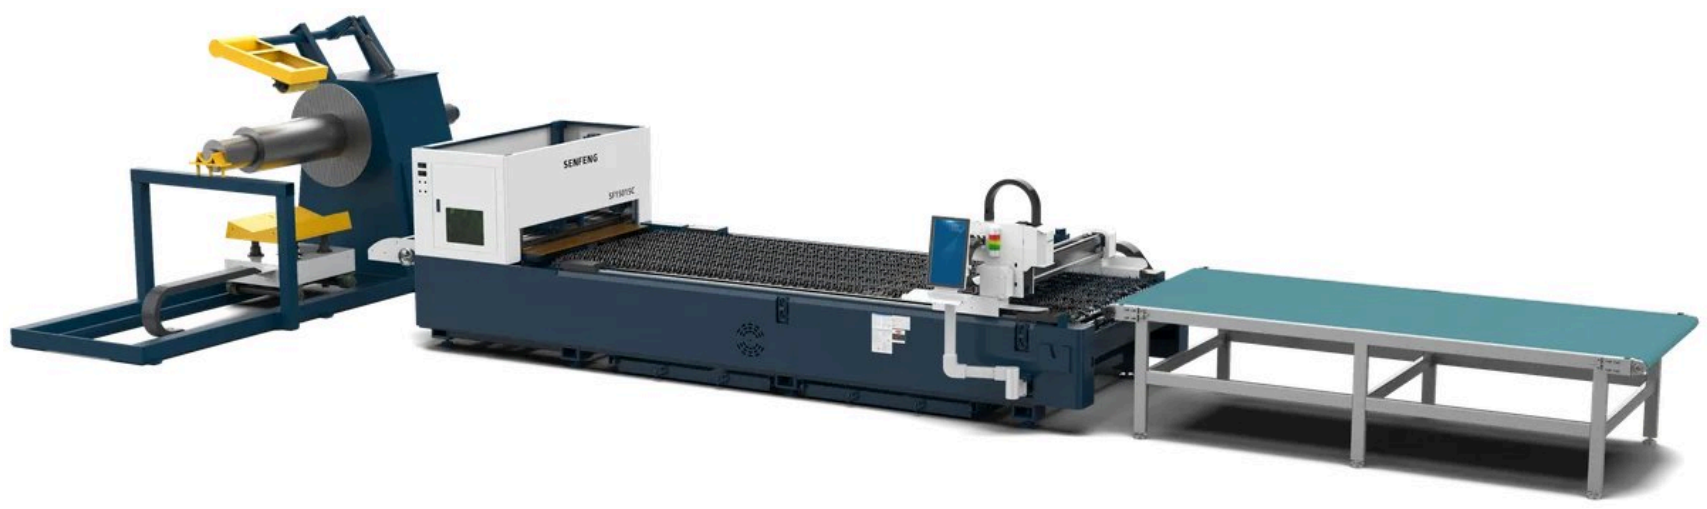

MODEL C · SENFENG SF15015C OPEN-TYPE THIN-SHEET COIL-FED LASER — 0.031 – 0.047″ COIL

SF15015C with a longer unloading conveyor (optional)

The affordable way into coil-fed cutting: an open-style, low-power line for regular-sized thin coil from 0.031 to 0.047″ (0.8 – 1.2 mm) that loads, decoils, levels, feeds, cuts and unloads with basically no manual work. The leveller and the cutter are built as one unit, so the line needs at most half the floor space of others and ships, installs and commissions as one machine. Correcting rollers follow the coil's width for accurate positioning without scratches, the control picks the assist gas and its pressure for each job, and Senfeng puts the total running cost about 10 % below comparable lines — at least 30 % faster than before, with no coil wasted.

STANDARD FEATURES

- ✓ Coil 0.031 – 0.047″ (0.8 – 1.2 mm), 31.4 – 59″ wide, 3 to 15 t; 5 × 10 ft working area; 1.5 – 3 kW at 37 % electro-optical efficiency
- ✓ Fully automatic loading, decoiling, levelling, feeding, cutting and unloading — at least 30 % faster, no coil wasted
- ✓ Leveller and cutter built as one unit: half the footprint, easier to ship, install and commission
- ✓ Real-time correction rollers set the coil position by its width for accurate cuts without scratches
- ✓ Assist gas and pressure chosen automatically; total running cost about 10 % below comparable lines
- ✓ 11 levelling rollers; feeding 0 – 49 ft/min
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- + Longer unloading conveyor
- + Custom voltage transformer

TECHNICAL SPECIFICATIONS

SF15015C OPEN-STYLE THIN-SHEET COIL-FED LASER, COIL 0.031 – 0.047", 5 × 10 FT, 1.5 – 3 KW

SF15015C OPEN-STYLE THIN-SHEET COIL-FED LASER

1 model · coil 0.031 – 0.047" · 5 × 10 ft · 1.5 – 3 kW

Model	SF15015C
Coil thickness	0.031 – 0.047" (0.8 – 1.2 mm)
Sheet width	31.4 – 59.0" (800 – 1,500 mm)
Working area	**10 × 5 ft (3,000 × 1,500 mm)**
Coil inside Ø · outside Ø	Ø20 or 24" (508 / 610 mm) · Ø31.4 – 59.0" (800 – 1,500 mm)
Max. coil weight	3, 8, 10 or 15 t (3.3 – 16.5 US tons)
Max. feeding speed	0 – 49 ft/min (0 – 15 m/min)
Sheet flatness	±0.079" per ft^2 (±2 mm/m^2)
Levelling rollers	11
Laser power	1.5 – 3 kW
Electro-optical efficiency	37 %
Positioning accuracy	±0.002" (±0.05 mm) · repeat ±0.0008" (±0.02 mm)

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF1503CH-TOP RC3000W

TOP SERIES AUTOMATED METAL PROCESSING LINE — COIL TO CUT, BENT, WELDED AND STACKED PARTS

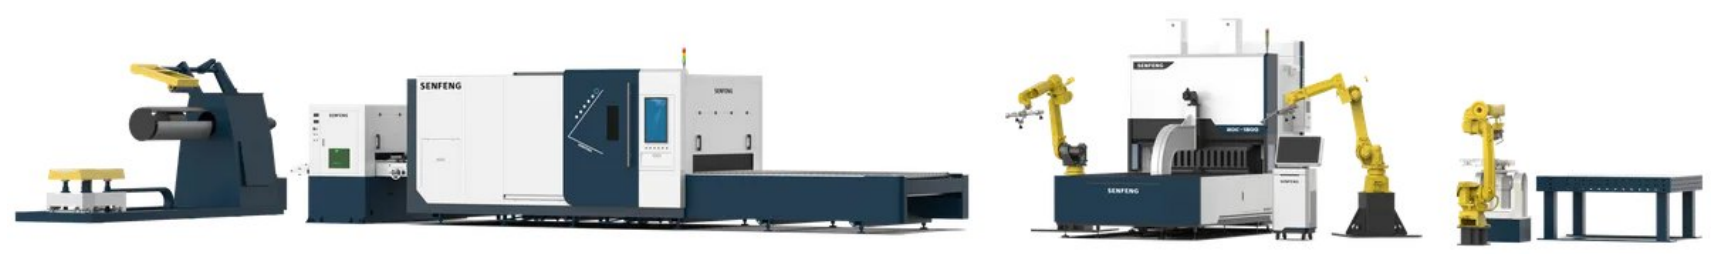

MODEL TOP · SENFENG TOP SERIES AUTOMATED LINE — COIL, LASER CUTTING, ROBOT SORTING, PANEL BENDING AND WELDING

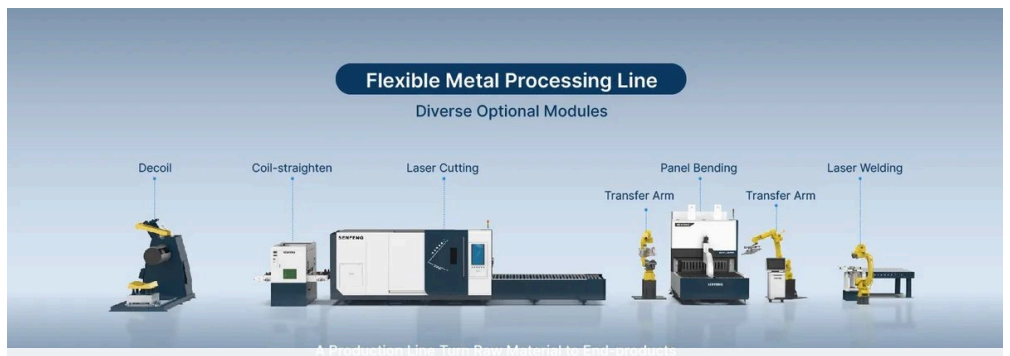

TOP flexible metal processing line — decoiler, coil straightener, laser cutting, transfer, panel bending and laser welding modules

TOP line — coil feeding the laser, robots and the panel bender downstream

From coil to finished parts with no one at the machine: the TOP line puts a coil-fed laser, robot sorting, a panel bending centre, a laser welding station and stacking in one line, so coil from 0.024 to 0.079″ is decoiled, levelled, cut, unloaded, bent, welded and stacked in one run — 24/7 unmanned production at lower labour cost and consistent quality. It is an open line: modules can be added for more processes as production changes, and any module or the whole line connects to an MES for unified management. Several industrial robots move the parts and safety monitoring is built in. For automotive, sheet-metal, furniture and signage work in mild and stainless steel, aluminum and brass.

STANDARD FEATURES

- ✓ Coil 0.024 – 0.079″ (0.6 – 2 mm), 23.6 – 59.1″ wide, to 11 US tons; 5 × 10 ft laser, 3 kW; feeding to 33 ft/min
- ✓ Decoiling, levelling, cutting, unloading, panel bending, laser welding and stacking in one line
- ✓ Several industrial robots between the stations; built-in safety monitoring
- ✓ Open line: add modules as production changes; each module or the whole line connects to an MES
- ✓ High-power laser cutting, an automatic bending centre and a laser welding platform for the most output
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- + Nesting software
- + Film laminating
- + Ink-jet marking
- + Safety fencing

DETAILS, COMPONENTS AND OPTIONS

TOP SERIES AUTOMATED METAL PROCESSING LINE — COIL TO CUT, BENT, WELDED AND STACKED PARTS

TOP line from the side — coil to finished parts

TOP line — robot cell at the panel bender

Cutting, bending and welding in one line

Teach pendant of the TOP line's robots

TECHNICAL SPECIFICATIONS

TOP SERIES AUTOMATED METAL PROCESSING LINE — COIL TO CUT, BENT, WELDED AND STACKED PARTS

TOP SERIES FLEXIBLE METAL PROCESSING LINE

SF1503CH-TOP RC3000W · coil 0.024 – 0.079″ · 5 × 10 ft laser

Model	SF1503CH-TOP RC3000W
Coil thickness	0.024 – 0.079″ (0.6 – 2 mm); max. coil 118.1 × 59.0 × 0.12″ (3,000 × 1,500 × 3 mm)
Coil width	23.6 – 59.1″ (600 – 1,500 mm)
Working area	**10 × 5 ft (3,000 × 1,500 mm)**
Coil inside Ø · max. outside Ø	Ø20″ (508 mm) · Ø55.1″ (1,400 mm)
Max. coil weight	11 US tons (10 t)
Max. feeding speed	33 ft/min (10 m/min)
Levelling accuracy	±0.00007 in/ft^2
Laser power	3 kW
Positioning accuracy	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)
Stations	decoiler and leveller, laser cutting, robot unloading and sorting, panel bending, laser welding, stacking

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF1503CLH

SF1503CLH ALUMINUM COIL-FED FIBER LASER, COIL 0.023 – 0.118″, 6 KW

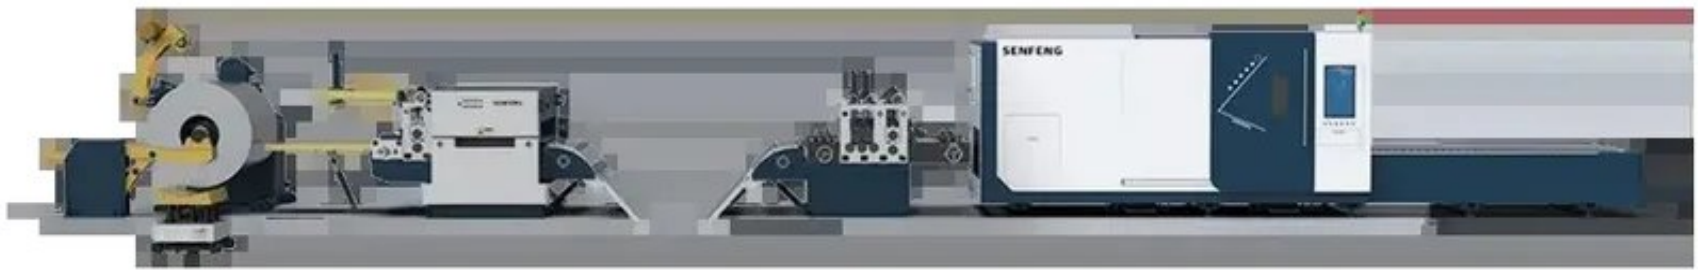

MODEL CLH · SF1503CLH ALUMINUM COIL-FED LASER — DECOILER, ALUMINUM STRAIGHTENER AND 6 KW LASER



Senfeng sheet-coil laser blanking line — enclosed laser, leveller and decoiler

Made for aluminum coil: a decoiler, a high-precision straightener built for aluminum, a feeding system and a 6 kW laser flatten the coil into sheet and cut it with no treatment in between, for coil from 0.023 to 0.118″ (0.6 – 3 mm). The processes are coordinated so modules can be added for a chain from coil to finished product, the open system connects to an MES, and a film laminating or a spraying machine can join the line. The laser source has protection against back reflection for aluminum and other non-ferrous metals. For aluminum panels, kitchenware, doors, appliances and cabinets, automotive components and construction machinery.

STANDARD FEATURES

- ✓ Aluminum coil 0.023 – 0.118″ (0.6 – 3 mm) to 11 US tons; 10 × 5 ft working area (19.7 × 4.9 ft long-table version); 6 kW
- ✓ High-precision straightener built for aluminum: the coil is flattened and cut with no treatment in between
- ✓ Decoiler, straightener, feeding system and laser in one line; modules can be added from coil to finished product
- ✓ Open system that connects to an MES
- ✓ Laser source protected against back reflection from aluminum and other non-ferrous metals
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- + Film laminating machine
- + Spraying machine
- + Custom voltage transformer

SF1503CLH ALUMINUM COIL-FED FIBER LASER — TECHNICAL SPECIFICATIONS

Model	SF1503CLH
Coil thickness	0.023 – 0.118″ (0.6 – 3 mm)
Working area	**10 × 5 ft (3,000 × 1,500 mm); 19.7 × 4.9 ft (6,000 × 1,500 mm) long-table version**
Coil inside Ø · max. outside Ø	Ø20″ (508 mm) · Ø55.1″ (1,400 mm)
Max. coil weight	11 US tons (10 t); 16.5 US tons (15 t) on the long-table version
Max. feeding speed	33 ft/min (10 m/min)
Levelling accuracy	±0.00005 in/ft^2
Laser power	6 kW
Positioning accuracy	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SF2012CH

SF2012CH COIL-FED LASER BLANKING LINE FOR THICK COIL 5/16 – 9/16″, 13 × 6.6 FT, 12 – 80 KW

MODEL CH · SENFENG SF2012CH COIL-FED LASER LINE FOR 5/16″ – 9/16″ (8 – 14 MM) COIL, 12 – 80 KW

SF2012CH — double-sided decoiler, leveller and enclosed 12 – 80 kW laser

SF2012CH from the laser end

Coil-fed cutting for medium-thick plate: Senfeng pushed coil thickness to 0.551″ (14 mm) and was the first to put it into production. The SF2012CH combines a double-sided decoiler, a leveller, a 12 to 80 kW laser and automatic stacking for 0.314 to 0.551″ (8 – 14 mm) coil up to 22 US tons on a 13 × 6.6 ft working area. The double-sided decoiler holds up to 66,138 lb, so one loading runs for a long time; a positioning and correction device sets the plate precisely; the fully enclosed laser keeps the fume in; and the line runs with close to zero waste. Coil costs less than cut plate, and the line is made to the material. For sheet-metal processing, machinery, auto parts, electrical and elevator manufacturing, petroleum and food machinery, and signage.

STANDARD FEATURES

- ✓ Coil 0.314 – 0.551″ (8 – 14 mm) to 22 US tons; 13 × 6.6 ft (4,000 × 2,000 mm) working area; 12 – 80 kW; feeding to 33 ft/min
- ✓ Double-sided decoiler holding up to 66,138 lb (30 t): one loading runs for hours
- ✓ Plate positioning and correction device — a correction-roller slider and wheel set the plate precisely
- ✓ Fully enclosed laser keeps the fume in; automatic stacking; fully automated for close to zero waste
- ✓ Line made to the material: coil width, thickness and weight
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- + Safety light curtain
- + Nesting software
- + Ink-jet marking
- + Custom voltage transformer

DETAILS, COMPONENTS AND OPTIONS

SF2012CH COIL-FED LASER BLANKING LINE FOR THICK COIL 5/16 – 9/16”, 13 × 6.6 FT, 12 – 80 KW

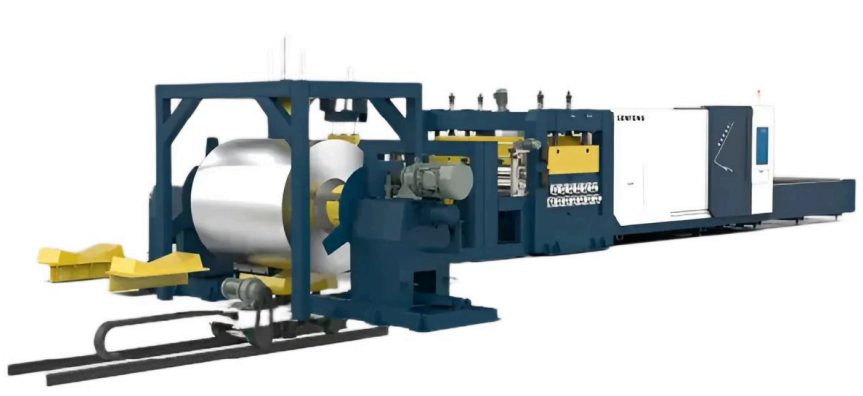
SF2012CH — the double-sided decoiler and the leveller

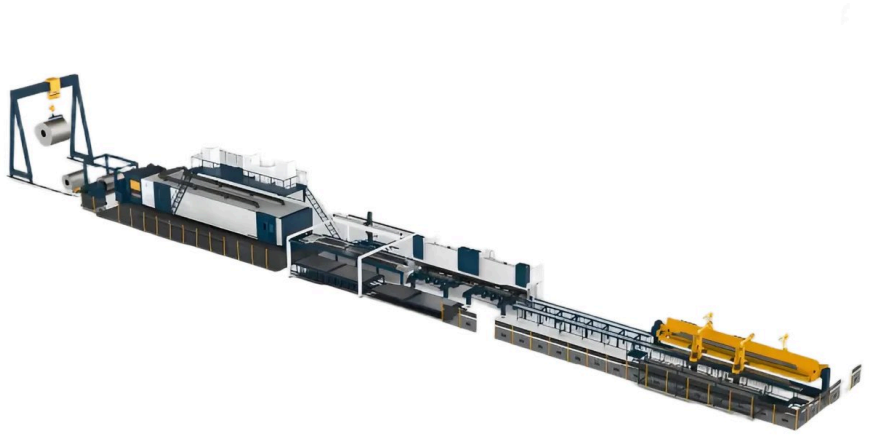
SF2012CH with unloading and sorting conveyors (optional)

The maximum loading capacity
66,138 lb
Double-sided decoiler — 66,138 lb (30 t) loading capacity

Plate positioning and correction under the cutting head

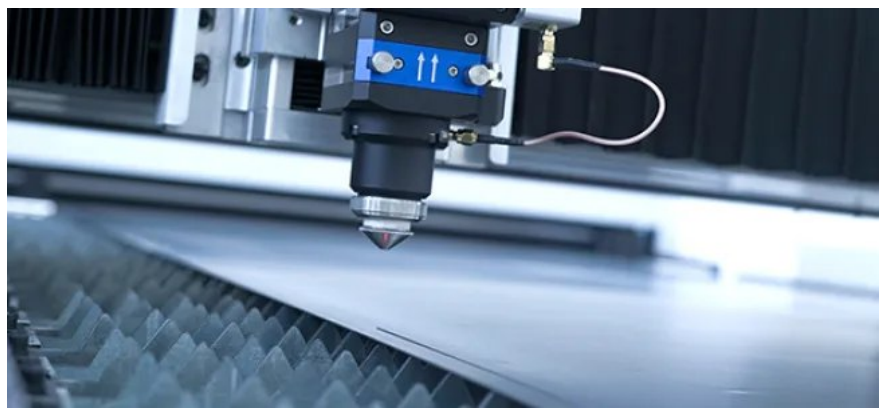
Fully automated line — close to zero waste

TECHNICAL SPECIFICATIONS

SF2012CH COIL-FED LASER BLANKING LINE FOR THICK COIL 5/16 – 9/16″, 13 × 6.6 FT, 12 – 80 KW

SF2012CH COIL-FED LASER BLANKING LINE FOR THICK COIL

1 model · coil 5/16 – 9/16″ · 13 × 6.6 ft · 12 – 80 kW

Model	SF2012CH
Coil thickness	0.314 – 0.551″ (8 – 14 mm)
Working area	**13 × 6.6 ft (4,000 × 2,000 mm)**
Coil inside Ø · outside Ø	Ø24 or 30″ (610 / 762 mm) · Ø39.3 – 70.8″ (1,000 – 1,800 mm)
Max. coil weight	22 US tons (20 t); the double-sided decoiler holds 66,138 lb (30 t)
Max. feeding speed	33 ft/min (10 m/min)
Levelling accuracy	±0.00019 in/ft^2
Laser power	12 – 80 kW
Positioning accuracy	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.