NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

ISITAN · MADE IN TURKEY · SOLD & SERVICED IN CANADA BY NOVOTECH

SHEET METAL FORMING AND TUBE BENDING MACHINERY

PLATE ROLLS · BEAD ROLLERS · CIRCLE CUTTING MACHINES · CNC, NC AND ROTARY DRAW TUBE BENDERS · PIPE NOTCHERS, PIPE-END FORMING MACHINES AND CIRCULAR COLD SAWS







Turkey
MADE IN TURKEY

21
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

ISITAN MACHINERY

CONTENTS

PLATE ROLLS

4R HMS hydraulic 4-roll plate rollers 4R HMS 650x80 – 4R HMS 3100x250 · 36 models 04
4R OM / 4R HOM / 4RH corrugated sheet and special 4-roll machines 4R OM · 4R HOM · 4RH 10x90 12
MRM-H hydraulic asymmetrical 3-roll plate rollers MRM-H 650x80 – MRM-H 3100x250 · 32 models 14
3R HMD mechanical-hydraulic 3-roll plate rollers 3R HMD 1270x90 · 1550x90 · 2050x95 22
MRM-S mechanical asymmetrical 3-roll plate rollers MRM-S 1050x130 – MRM-S 3050x220 · 21 models 23
IRM mechanical asymmetrical 3-roll plate rollers IRM 1050x110 – IRM 2550x140 · 10 models 27
RM motorized 3-roll asymmetrical plate rollers RM 1050x90 · 1270x90 · 1550x90 · 2050x95 30

BEAD ROLLERS

HIBKS / IBKS hydraulic and motorized bead rollers HIBKS 4.0 · IBKS 4.0 · HIBKS 2.5 · IBKS 2.5 32
IBKS 1.8 / IKM / IKMP motorized and pneumatic bead rollers IBKS 1.8 · IKM 1.2 · IKMP 1.2 · IKMP 1.2 P 35

CIRCLE CUTTING MACHINES

IDK circle cutting machines — hydraulic and motorized circle shears IDK-5 · IDK-3.5 · IDK-2 · IDK-1.8 38

TUBE AND PIPE BENDERS

SFB CNC/A5 — 5-axis servo CNC mandrel tube benders SFB 38-CNC/A5 · 51-CNC/A5 · 65-CNC/A5 41
SFB CNC/A3 — 3-axis servo CNC mandrel tube & pipe benders SFB 38 · 51 · 65 · 76 · 90-CNC/A3 44
SFB 32-HD · SFB 32-M — compact mandrel tube benders SFB 32-HD (PLC hydraulic) · SFB 32-M (motorized) 47
SFB 38-NC/A2 · SFB 38-NC/A — NC aluminum-profile bending machines SFB 38-NC/A2 (with carrier) · SFB 38-NC/A 49
SFB NC/C — NC mandrel tube benders with servo-rotation carrier SFB 38 · 51 · 65 · 76-NC/C 51
SFB NC — NC mandrel tube & pipe benders SFB 38 · 51 · 65 · 76 · 90-NC 54
BK series — rotary draw tube & profile benders (non-mandrel) BK-42 · BK-050 · BK-H 060 · BK 030 (76) 57

PIPE NOTCHERS, PIPE-END FORMING MACHINES AND CIRCULAR COLD SAWS

PN 17/90 · PN 20/76 — motorized pipe notching machines PN 17/90 · PN 20/76 60
SFF 90-1 · SFF 60-1 — single-station hydraulic pipe-end forming machines SFF 90-1 · SFF 60-1 61
SFC 350-VX — semi-automatic circular cold saw SFC 350-VX · 13-3/4" blade 62
SFC 275 / 315-VP · SFC 275 / 315-V — circular cold saws with pneumatic or manual vise SFC 275-VP · 315-VP · 275-V · 315-V 64

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR ISITAN SHEET METAL FORMING AND TUBE BENDING MACHINERY

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by ISITAN — CE certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

ISITAN · BURSA, TURKEY

SHEET-METAL AND TUBE MACHINERY FROM BURSA, TURKEY, SINCE 1959

ISITAN was founded in 1959 in a small workshop in Bursa, Turkey, building beading and plate-rolling machines for tinsmiths. Through the 1970s the range grew to larger pyramid plate rolls, circular cutting shears and flanging machines, and the company began exporting in 1996. Today ISITAN builds in two factories with about 160 employees: 3- and 4-roll plate rolls, bead rollers, circle cutting machines, CNC, NC and rotary draw tube and profile benders, pipe notchers, pipe-end forming machines and circular cold saws — CE certified and built with European components.

NovoTech sells, installs and supports ISITAN machines in Canada from Mississauga, ON — the machine matched to your material and sizes, a CSA-approved panel, operator training, a 1-year warranty and parts and technical support in Canada.

4R HMS 650X80 – 4R HMS 3100X250 · 36 MODELS

4R HMS HYDRAULIC 4-ROLL PLATE ROLLERS



MODEL 4R · ISITAN 4R HMS 3100X250 HYDRAULIC 4-ROLL PLATE ROLLER, 10.2 FT



ISITAN 4R HMS 2050x180 hydraulic 4-roll plate roller with NC control and plate ejector



ISITAN 4R HMS 1550x220 4-roll plate roller with overhead crane and side supports

Working lengths 2.1–10.2 ft (650–3100 mm) · rolls up to 1/2" (12 mm)

ISITAN's main line of 4-roll plate rolling machines, from a 2.1 ft bench-size roll to 10.2 ft machines that roll 3/8" plate. The pinch roll and both side rolls move on a pyramid-style linear path driven by hydraulic cylinders, while the top roll is powered by an electric motor through a planetary gearbox — so the sheet is pinched, pre-bent at both ends and rolled into a full cylinder without being removed from the machine. Cone bending, hydraulic drop-end and three digital readouts are standard; NC control with programmed roll positions, overhead crane and side supports turn it into a semi- or fully automatic production line.

STANDARD FEATURES

- ✓ Pinch and side rolls moved linearly by hydraulic cylinders; top roll driven by motor and planetary gearbox, bottom roll through a cardan joint
- ✓ Three digital readouts for easy roll positioning; mobile control panel
- ✓ Hydraulic drop-end for easy removal of finished cylinders; hydraulic balancing system
- ✓ Induction-hardened forged or rolled SAE 1050 (CK45) steel rolls; welded steel frames
- ✓ Cone-bending device and overload protection standard
- ✓ Remote technical support via Wi-Fi; built to EC safety directives (CE marked)

OPTIONAL EQUIPMENT

- + NC control with remote assistance — teach mode, stored programs, 4 axes expandable to 7
- + Overhead crane and hydraulic side supports for large diameters
- + Vacuum sheet feeder and part ejector for full automation
- + Ground and polished rolls; two-speed or infinitely variable speed; hydraulic motor for rotation
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

DETAILS, COMPONENTS AND OPTIONS

4R HMS HYDRAULIC 4-ROLL PLATE ROLLERS



ISITAN 4R HMS 1270x100 4-roll plate roller with NC control, ejector and mechanical overhead crane



ISITAN 4R HMS 2050x130 4-roll plate roller — full automation with vacuum sheet feeder and ejector



ISITAN 4R HMS 650x80 compact hydraulic 4-roll plate roller, 2.1 ft



4R HMS — full automation line with sheet feeder, NC control and part ejector



4R HMS — hydraulic plate ejector system



4R HMS — standard cone-bending device



4R HMS — pressure adjustment on the bottom roll



4R HMS — safety switch on the drop-end

TECHNICAL SPECIFICATIONS · 1 / 6

4R HMS HYDRAULIC 4-ROLL PLATE ROLLERS

4R HMS 650 – 1050

2.1–3.4 ft · 4 models

Model	4R HMS 650x80	4R HMS 1050x80	4R HMS 1050x100	4R HMS 1050x130
Working length	**2.1 ft · 25.6" (650 mm)**	**3.4 ft · 41.3" (1050 mm)**	**3.4 ft · 41.3" (1050 mm)**	**3.4 ft · 41.3" (1050 mm)**
Pre-bending capacity at 1.5× / 5× top roll Ø	12 ga / 11 ga (2.5 / 3 mm)	16 ga / 14 ga (1.5 / 2 mm)	14 ga / 12 ga (2 / 2.5 mm)	8 ga / 3/16" (4 / 5 mm)
Rolling capacity at 1.5× / 5× top roll Ø	**11 ga / 10 ga (3 / 3.5 mm)**	**14 ga / 12 ga (2 / 2.5 mm)**	**12 ga / 10 ga (2.5 / 3.5 mm)**	**3/16" / 1/4" (5 / 6 mm)**
Top & bottom roll Ø	3.15" (80 mm)	3.15" (80 mm)	3.94" (100 mm)	5.12" (130 mm)
Side roll Ø	3.15" (80 mm)	3.15" (80 mm)	3.54" (90 mm)	5.12" (130 mm)
Min. rolling Ø at 1.5× / 5× top roll Ø	4.7" / 15.7" (120 / 400 mm)	4.7" / 15.7" (120 / 400 mm)	5.9" / 19.7" (150 / 500 mm)	7.7" / 25.6" (195 / 650 mm)
Motor power	1.5 + 1 HP (1.1 + 0.75 kW)	1.5 + 1 HP (1.1 + 0.75 kW)	1.5 + 1 HP (1.1 + 0.75 kW)	3 + 1.5 HP (2.2 + 1.1 kW)
Rolling speed	16 ft/min (5 m/min)	16 ft/min (5 m/min)	21 ft/min (6.5 m/min)	16 ft/min (5 m/min)
Hydraulic oil tank	15 L	15 L	15 L	40 L
Dimensions L × W × H	77 × 37 × 38" (1960 × 940 × 970 mm)	93 × 37 × 38" (2360 × 940 × 970 mm)	93 × 45 × 38" (2360 × 1140 × 970 mm)	109 × 45 × 43" (2770 × 1140 × 1090 mm)
Weight	2,094 lb (950 kg)	2,535 lb (1,150 kg)	2,756 lb (1,250 kg)	4,519 lb (2,050 kg)

TECHNICAL SPECIFICATIONS · 2 / 6

4R HMS HYDRAULIC 4-ROLL PLATE ROLLERS

4R HMS 1270

4.2 ft · 6 models

Model	4R HMS 1270x80	4R HMS 1270x100	4R HMS 1270x130	4R HMS 1270x150	4R HMS 1270x180	4R HMS 1270x200
Working length	**4.2 ft · 50.0" (1270 mm)**	**4.2 ft · 50.0" (1270 mm)**	**4.2 ft · 50.0" (1270 mm)**	**4.2 ft · 50.0" (1270 mm)**	**4.2 ft · 50.0" (1270 mm)**	**4.2 ft · 50.0" (1270 mm)**
Pre-bending capacity at 1.5× / 5× top roll Ø	20 ga / 16 ga (1 / 1.5 mm)	16 ga / 14 ga (1.5 / 2 mm)	11 ga / 8 ga (3 / 4 mm)	8 ga / 3/16" (4 / 5 mm)	3/16" / 5/16" (5 / 8 mm)	5/16" / 3/8" (8 / 10 mm)
Rolling capacity at 1.5× / 5× top roll Ø	**16 ga / 14 ga (1.5 / 2 mm)**	**14 ga / 11 ga (2 / 3 mm)**	**8 ga / 3/16" (4 / 5 mm)**	**3/16" / 1/4" (5 / 6 mm)**	**5/16" / 3/8" (8 / 10 mm)**	**3/8" / 1/2" (10 / 12 mm)**
Top & bottom roll Ø	3.15" (80 mm)	3.94" (100 mm)	5.12" (130 mm)	5.91" (150 mm)	7.09" (180 mm)	7.87" (200 mm)
Side roll Ø	3.15" (80 mm)	3.54" (90 mm)	5.12" (130 mm)	5.12" (130 mm)	5.91" (150 mm)	7.09" (180 mm)
Min. rolling Ø at 1.5× / 5× top roll Ø	4.7" / 15.7" (120 / 400 mm)	5.9" / 17.7" (150 / 450 mm)	7.7" / 25.6" (195 / 650 mm)	8.9" / 29.5" (225 / 750 mm)	10.6" / 35.4" (270 / 900 mm)	11.8" / 39.4" (300 / 1000 mm)
Motor power	1.5 + 1.5 HP (1.1 + 1.1 kW)	1.5 + 1.5 HP (1.1 + 1.1 kW)	3 + 1.5 HP (2.2 + 1.1 kW)	3 + 1.5 HP (2.2 + 1.1 kW)	5.4 + 2 HP (4 + 1.5 kW)	5.4 + 2 HP (4 + 1.5 kW)
Rolling speed	16 ft/min (5 m/min)	21 ft/min (6.5 m/min)	16 ft/min (5 m/min)	20 ft/min (6 m/min)	16 ft/min (5 m/min)	20 ft/min (6 m/min)
Hydraulic oil tank	15 L	15 L	40 L	40 L	40 L	40 L
Dimensions L × W × H	101 × 37 × 38" (2570 × 940 × 970 mm)	105 × 41 × 38" (2670 × 1040 × 970 mm)	114 × 45 × 44" (2900 × 1140 × 1120 mm)	119 × 45 × 44" (3020 × 1140 × 1120 mm)	121 × 53 × 51" (3070 × 1350 × 1300 mm)	121 × 53 × 51" (3070 × 1350 × 1300 mm)
Weight	2,756 lb (1,250 kg)	2,976 lb (1,350 kg)	4,740 lb (2,150 kg)	5,027 lb (2,280 kg)	5,952 lb (2,700 kg)	6,614 lb (3,000 kg)

TECHNICAL SPECIFICATIONS · 3 / 6

4R HMS HYDRAULIC 4-ROLL PLATE ROLLERS

4R HMS 1550

5.1 ft · 7 models

Model	4R HMS 1550x100	4R HMS 1550x130	4R HMS 1550x150	4R HMS 1550x180	4R HMS 1550x200	4R HMS 1550x220	4R HMS 1550x250
Working length	**5.1 ft · 61.0" (1550 mm)**	**5.1 ft · 61.0" (1550 mm)**	**5.1 ft · 61.0" (1550 mm)**	**5.1 ft · 61.0" (1550 mm)**	**5.1 ft · 61.0" (1550 mm)**	**5.1 ft · 61.0" (1550 mm)**	**5.1 ft · 61.0" (1550 mm)**
Pre-bending capacity at 1.5× / 5× top roll Ø	20 ga / 16 ga (1 / 1.5 mm)	12 ga / 10 ga (2.5 / 3.5 mm)	10 ga / 7 ga (3.5 / 4.5 mm)	3/16" / 1/4" (5 / 6 mm)	1/4" / 3/8" (6 / 10 mm)	5/16" / 3/8" (8 / 10 mm)	3/8" / 1/2" (10 / 12 mm)
Rolling capacity at 1.5× / 5× top roll Ø	**16 ga / 14 ga (1.5 / 2 mm)**	**10 ga / 7 ga (3.5 / 4.5 mm)**	**7 ga / 1/4" (4.5 / 6 mm)**	**1/4" / 3/8" (6 / 10 mm)**	**3/8" / 7/16" (10 / 11 mm)**	**3/8" / 1/2" (10 / 12 mm)**	**1/2" / 9/16" (12 / 14 mm)**
Top & bottom roll Ø	3.94" (100 mm)	5.12" (130 mm)	5.91" (150 mm)	7.09" (180 mm)	7.87" (200 mm)	8.66" (220 mm)	9.84" (250 mm)
Side roll Ø	3.54" (90 mm)	5.12" (130 mm)	5.12" (130 mm)	5.91" (150 mm)	7.09" (180 mm)	7.09" (180 mm)	7.87" (200 mm)
Min. rolling Ø at 1.5× / 5× top roll Ø	5.9" / 17.7" (150 / 450 mm)	7.7" / 25.6" (195 / 650 mm)	8.9" / 29.5" (225 / 750 mm)	10.6" / 35.4" (270 / 900 mm)	11.8" / 39.4" (300 / 1000 mm)	13.0" / 43.3" (330 / 1100 mm)	14.8" / 49.2" (375 / 1250 mm)
Motor power	1.5 + 1.5 HP (1.1 + 1.1 kW)	3 + 1.5 HP (2.2 + 1.1 kW)	3 + 1.5 HP (2.2 + 1.1 kW)	5.4 + 2 HP (4 + 1.5 kW)	5.4 + 2 HP (4 + 1.5 kW)	7.4 + 2 HP (5.5 + 1.5 kW)	10 + 2 HP (7.5 + 1.5 kW)
Rolling speed	21 ft/min (6.5 m/min)	16 ft/min (5 m/min)	20 ft/min (6 m/min)	16 ft/min (5 m/min)	20 ft/min (6 m/min)	16 ft/min (5 m/min)	16 ft/min (5 m/min)
Hydraulic oil tank	15 L	40 L	40 L	40 L	40 L	40 L	40 L
Dimensions L × W × H	112 × 37 × 38" (2840 × 940 × 970 mm)	130 × 45 × 44" (3300 × 1140 × 1120 mm)	130 × 45 × 44" (3300 × 1140 × 1120 mm)	132 × 53 × 51" (3350 × 1350 × 1300 mm)	132 × 53 × 51" (3350 × 1350 × 1300 mm)	138 × 59 × 54" (3510 × 1500 × 1370 mm)	138 × 59 × 54" (3510 × 1500 × 1370 mm)
Weight	3,307 lb (1,500 kg)	4,960 lb (2,250 kg)	5,225 lb (2,370 kg)	6,393 lb (2,900 kg)	7,165 lb (3,250 kg)	9,370 lb (4,250 kg)	10,251 lb (4,650 kg)

TECHNICAL SPECIFICATIONS · 4 / 6

4R HMS HYDRAULIC 4-ROLL PLATE ROLLERS

4R HMS 2050

6.7 ft · 6 models

Model	4R HMS 2050x130	4R HMS 2050x150	4R HMS 2050x180	4R HMS 2050x200	4R HMS 2050x220	4R HMS 2050x250
Working length	**6.7 ft · 80.7" (2050 mm)**	**6.7 ft · 80.7" (2050 mm)**	**6.7 ft · 80.7" (2050 mm)**	**6.7 ft · 80.7" (2050 mm)**	**6.7 ft · 80.7" (2050 mm)**	**6.7 ft · 80.7" (2050 mm)**
Pre-bending capacity at 1.5× / 5× top roll Ø	14 ga / 11 ga (2 / 3 mm)	11 ga / 8 ga (3 / 4 mm)	8 ga / 1/4" (4 / 6 mm)	1/4" / 5/16" (6 / 8 mm)	1/4" / 3/8" (6 / 10 mm)	5/16" / 3/8" (8 / 10 mm)
Rolling capacity at 1.5× / 5× top roll Ø	**11 ga / 8 ga (3 / 4 mm)**	**8 ga / 1/4" (4 / 6 mm)**	**1/4" / 5/16" (6 / 8 mm)**	**5/16" / 3/8" (8 / 10 mm)**	**3/8" / 7/16" (10 / 11 mm)**	**3/8" / 1/2" (10 / 12 mm)**
Top & bottom roll Ø	5.12" (130 mm)	5.91" (150 mm)	7.09" (180 mm)	7.87" (200 mm)	8.66" (220 mm)	9.84" (250 mm)
Side roll Ø	5.12" (130 mm)	5.12" (130 mm)	5.91" (150 mm)	7.09" (180 mm)	7.09" (180 mm)	7.87" (200 mm)
Min. rolling Ø at 1.5× / 5× top roll Ø	7.7" / 25.6" (195 / 650 mm)	8.9" / 29.5" (225 / 750 mm)	10.6" / 35.4" (270 / 900 mm)	11.8" / 39.4" (300 / 1000 mm)	13.0" / 43.3" (330 / 1100 mm)	14.8" / 49.2" (375 / 1250 mm)
Motor power	3 + 1.5 HP (2.2 + 1.1 kW)	3 + 1.5 HP (2.2 + 1.1 kW)	5.4 + 2 HP (4 + 1.5 kW)	5.4 + 2 HP (4 + 1.5 kW)	7.4 + 2 HP (5.5 + 1.5 kW)	10 + 2 HP (7.5 + 1.5 kW)
Rolling speed	16 ft/min (5 m/min)	20 ft/min (6 m/min)	16 ft/min (5 m/min)	20 ft/min (6 m/min)	16 ft/min (5 m/min)	16 ft/min (5 m/min)
Hydraulic oil tank	40 L	40 L	40 L	40 L	40 L	40 L
Dimensions L × W × H	142 × 47 × 44" (3610 × 1190 × 1120 mm)	142 × 47 × 44" (3610 × 1190 × 1120 mm)	152 × 53 × 51" (3860 × 1350 × 1300 mm)	152 × 56 × 51" (3860 × 1420 × 1300 mm)	157 × 59 × 54" (3990 × 1500 × 1370 mm)	157 × 59 × 54" (3990 × 1500 × 1370 mm)
Weight	4,982 lb (2,260 kg)	6,173 lb (2,800 kg)	7,275 lb (3,300 kg)	8,267 lb (3,750 kg)	10,582 lb (4,800 kg)	11,795 lb (5,350 kg)

TECHNICAL SPECIFICATIONS · 5 / 6

4R HMS HYDRAULIC 4-ROLL PLATE ROLLERS

4R HMS 2550

8.4 ft · 5 models

Model	4R HMS 2550x150	4R HMS 2550x180	4R HMS 2550x200	4R HMS 2550x220	4R HMS 2550x250
Working length	**8.4 ft · 100.4" (2550 mm)**	**8.4 ft · 100.4" (2550 mm)**	**8.4 ft · 100.4" (2550 mm)**	**8.4 ft · 100.4" (2550 mm)**	**8.4 ft · 100.4" (2550 mm)**
Pre-bending capacity at 1.5× / 5× top roll Ø	14 ga / 11 ga (2 / 3 mm)	11 ga / 8 ga (3 / 4 mm)	8 ga / 1/4" (4 / 6 mm)	3/16" / 1/4" (5 / 6 mm)	1/4" / 5/16" (6 / 8 mm)
Rolling capacity at 1.5× / 5× top roll Ø	**11 ga / 8 ga (3 / 4 mm)**	**8 ga / 1/4" (4 / 6 mm)**	**1/4" / 5/16" (6 / 8 mm)**	**1/4" / 3/8" (6 / 10 mm)**	**5/16" / 3/8" (8 / 10 mm)**
Top & bottom roll Ø	5.91" (150 mm)	7.09" (180 mm)	7.87" (200 mm)	8.66" (220 mm)	9.84" (250 mm)
Side roll Ø	5.12" (130 mm)	5.91" (150 mm)	7.09" (180 mm)	7.09" (180 mm)	7.87" (200 mm)
Min. rolling Ø at 1.5× / 5× top roll Ø	8.9" / 29.5" (225 / 750 mm)	10.6" / 35.4" (270 / 900 mm)	11.8" / 39.4" (300 / 1000 mm)	13.0" / 43.3" (330 / 1100 mm)	14.8" / 49.2" (375 / 1250 mm)
Motor power	3 + 1.5 HP (2.2 + 1.1 kW)	5.4 + 2 HP (4 + 1.5 kW)	5.4 + 2 HP (4 + 1.5 kW)	7.4 + 2 HP (5.5 + 1.5 kW)	10 + 2 HP (7.5 + 1.5 kW)
Rolling speed	20 ft/min (6 m/min)	16 ft/min (5 m/min)	20 ft/min (6 m/min)	16 ft/min (5 m/min)	16 ft/min (5 m/min)
Hydraulic oil tank	40 L	40 L	40 L	40 L	40 L
Dimensions L × W × H	169 × 45 × 44" (4290 × 1140 × 1120 mm)	171 × 53 × 51" (4340 × 1350 × 1300 mm)	171 × 53 × 51" (4340 × 1350 × 1300 mm)	177 × 59 × 54" (4500 × 1500 × 1370 mm)	177 × 59 × 54" (4500 × 1500 × 1370 mm)
Weight	7,121 lb (3,230 kg)	8,157 lb (3,700 kg)	9,370 lb (4,250 kg)	11,905 lb (5,400 kg)	13,448 lb (6,100 kg)

TECHNICAL SPECIFICATIONS · 6 / 6

4R HMS HYDRAULIC 4-ROLL PLATE ROLLERS

4R HMS 3100

10.2 ft · 4 models

Model	4R HMS 3100x180	4R HMS 3100x200	4R HMS 3100x220	4R HMS 3100x250
Working length	**10.2 ft · 122.0" (3100 mm)**	**10.2 ft · 122.0" (3100 mm)**	**10.2 ft · 122.0" (3100 mm)**	**10.2 ft · 122.0" (3100 mm)**
Pre-bending capacity at 1.5× / 5× top roll Ø	14 ga / 11 ga (2 / 3 mm)	11 ga / 8 ga (3 / 4 mm)	8 ga / 1/4" (4 / 6 mm)	3/16" / 1/4" (5 / 6 mm)
Rolling capacity at 1.5× / 5× top roll Ø	**11 ga / 8 ga (3 / 4 mm)**	**8 ga / 1/4" (4 / 6 mm)**	**1/4" / 5/16" (6 / 8 mm)**	**1/4" / 3/8" (6 / 10 mm)**
Top & bottom roll Ø	7.09" (180 mm)	7.87" (200 mm)	8.66" (220 mm)	9.84" (250 mm)
Side roll Ø	5.91" (150 mm)	7.09" (180 mm)	7.09" (180 mm)	7.87" (200 mm)
Min. rolling Ø at 1.5× / 5× top roll Ø	10.6" / 35.4" (270 / 900 mm)	11.8" / 39.4" (300 / 1000 mm)	13.0" / 43.3" (330 / 1100 mm)	14.8" / 49.2" (375 / 1250 mm)
Motor power	5.4 + 2 HP (4 + 1.5 kW)	5.4 + 2 HP (4 + 1.5 kW)	7.4 + 2 HP (5.5 + 1.5 kW)	10 + 2 HP (7.5 + 1.5 kW)
Rolling speed	16 ft/min (5 m/min)	20 ft/min (6 m/min)	16 ft/min (5 m/min)	16 ft/min (5 m/min)
Hydraulic oil tank	40 L	40 L	40 L	40 L
Dimensions L × W × H	191 × 53 × 51" (4850 × 1350 × 1300 mm)	191 × 53 × 51" (4850 × 1350 × 1300 mm)	197 × 59 × 54" (5000 × 1500 × 1370 mm)	197 × 59 × 54" (5000 × 1500 × 1370 mm)
Weight	9,039 lb (4,100 kg)	10,472 lb (4,750 kg)	13,228 lb (6,000 kg)	14,991 lb (6,800 kg)

Capacities are for mild steel with a yield strength of 34,100 psi (24 kg/mm^2), shown as two values where the manufacturer states them: at a minimum rolling diameter of 1.5× the top roll diameter / at 5× the top roll diameter. Thin sheet is given in gauge; metric values in brackets are the manufacturer's nominal figures. Dimensions are overall L × W × H. 4R HMS 4100 models are available on request.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Made in Bursa, Turkey, by ISITAN — CE certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

4R OM · 4R HOM · 4RH 10X90

4R OM / 4R HOM / 4RH CORRUGATED SHEET AND SPECIAL 4-ROLL MACHINES



MODEL 4R · ISITAN 4R OM 1550X220 4-ROLL CORRUGATED SHEET BENDING MACHINE

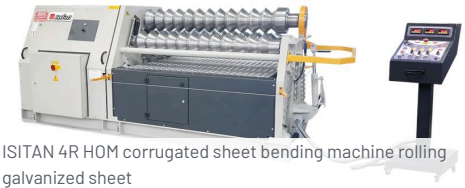

ISITAN 4R HOM corrugated sheet bending machine rolling galvanized sheet



4R OM 1550x220 with rolled corrugated rings

Corrugated sheet to 11 ga (3 mm) · widths to 6.7 ft (2050 mm) · special builds to order

Purpose-built 4-roll machines for corrugated galvanized sheet up to 11 ga — the material of tanks, roofs and silos. The rolls carry a corrugation profile that can be custom made to the customer's sheet, with motor + reducer drive and motorized (4R OM, 4R HOM) or hydraulic (4RH) linear roll movement. ISITAN also builds special plate rolls to order for widths, profiles and automation that the standard range does not cover.

STANDARD FEATURES

- ✓ Rolls machined to the customer's corrugation profile
- ✓ Motor + reducer drive; motorized or hydraulic linear roll movement
- ✓ 4RH 10x90: standard NC control, motor + planetary reducer and hydraulic linear movement
- ✓ Built to EC safety directives (CE marked)

OPTIONAL EQUIPMENT

- \+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

4RH 10X90 — TECHNICAL SPECIFICATIONS

Model	4RH 10x90
Working length	**3.4 ft · 41.3"**
Pre-bending capacity	14 ga (2 mm)
Rolling capacity	**12 ga (2.5 mm)**
Roll Ø	3.54" (90 mm)
Motor power	3 HP (2.2 kW)
Rolling speed	15 ft/min (4.5 m/min)
Dimensions L × W × H	89 × 39 × 59" (2260 × 990 × 1500 mm)
Weight	1,984 lb (900 kg)

Capacities are for mild steel with a yield strength of 34,100 psi (24 kg/mm^2); thin sheet is given in gauge with the manufacturer's nominal metric value in brackets. Dimensions are overall L × W × H. 4R OM and 4R HOM machines are built to order — ask for the data sheet of your profile.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

DETAILS, COMPONENTS AND OPTIONS

4R OM / 4R HOM / 4RH CORRUGATED SHEET AND SPECIAL 4-ROLL MACHINES



ISITAN 4R HOM 1270x220 special-production corrugated sheet bending machine



ISITAN 4R HOM 2050x250 4-roll corrugated sheet bending machine



ISITAN 4RH 10x90 NC-controlled special sheet bending machine

MRM-H 650X80 – MRM-H 3100X250 · 32 MODELS

MRM-H HYDRAULIC ASYMMETRICAL 3-ROLL PLATE ROLLERS



MODEL MRM-H · ISITAN MRM-H 3100X250 HYDRAULIC 3-ROLL PLATE ROLLER, 10 FT



ISITAN MRM-H 2050x180 hydraulic 3-roll plate roller — motor + planetary reducer drive



ISITAN MRM-H 2550x180 hydraulic 3-roll plate roller, 8.4 ft

Working lengths 2.1–10 ft (650–3100 mm) · rolls up to 1/2" (12 mm)

Initial-pinch 3-roll plate rolls with hydraulic movement of the back and bottom rolls and motor-driven rolls through planetary gearboxes — the hydraulic version of the MRM-S. The sheet is pinched between the top and bottom roll, pre-bent against the back roll, then rolled; the back roll runs on ball bearings for thin-sheet work and a hydraulic drop-end releases the finished cylinder. Cone bending and two digital readouts are standard; NC control, overhead crane and side supports are available for larger diameters.

STANDARD FEATURES

- ✓ Hydraulic movement of back and bottom rolls; motor-driven centralized rolls with planetary gearbox drive on two rolls
- ✓ Hydraulic drop-end; mobile control panel with 2 digital readouts
- ✓ Main motor with brake system for precise positioning
- ✓ Cone bending and pre-bending; back roll on ball bearings for thin-sheet work
- ✓ Certified SAE 1050 (CK45) forged steel rolls, hardened; welded steel main frames
- ✓ Built to EC safety directives (CE marked)

OPTIONAL EQUIPMENT

- + Overhead crane and hydraulic side supports for large diameters
- + Ground and polished rolls; wire grooves on roll ends
- + NC control
- + Two-speed operation or adjustable stepless speed; hydraulic motor drive
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

DETAILS, COMPONENTS AND OPTIONS

MRM-H HYDRAULIC ASYMMETRICAL 3-ROLL PLATE ROLLERS



ISITAN MRM-H 1550x150 hydraulic 3-roll plate roller with digital readouts



ISITAN MRM-H 1270x180 hydraulic 3-roll plate roller, 4.2 ft



ISITAN MRM-H 1050x100 hydraulic 3-roll plate roller, 3.4 ft



MRM-H — hydraulic drop-end and roll-end detail



MRM-H — optional wire grooves on the roll ends

TECHNICAL SPECIFICATIONS · 1 / 6

MRM-H HYDRAULIC ASYMMETRICAL 3-ROLL PLATE ROLLERS

MRM-H 650 – 1050

2.1–3.4 ft · 4 models

Model	MRM-H 650x80	MRM-H 1050x80	MRM-H 1050x100	MRM-H 1050x130
Working length	**2.1 ft · 25.6" (650 mm)**	**3.4 ft · 41.3" (1050 mm)**	**3.4 ft · 41.3" (1050 mm)**	**3.4 ft · 41.3" (1050 mm)**
Pre-bending capacity at 1.5× / 5× top roll Ø	12 ga / 11 ga (2.5 / 3 mm)	16 ga / 14 ga (1.5 / 2 mm)	14 ga / 12 ga (2 / 2.5 mm)	12 ga / 11 ga (2.5 / 3 mm)
Rolling capacity at 1.5× / 5× top roll Ø	**11 ga / 10 ga (3 / 3.5 mm)**	**14 ga / 12 ga (2 / 2.5 mm)**	**12 ga / 11 ga (2.5 / 3 mm)**	**11 ga / 3/16" (3 / 5 mm)**
Top & bottom roll Ø	3.15" (80 mm)	3.15" (80 mm)	3.94" (100 mm)	5.12" (130 mm)
Side roll Ø	3.15" (80 mm)	3.15" (80 mm)	3.54" (90 mm)	5.12" (130 mm)
Min. rolling Ø at 1.5× / 5× top roll Ø	4.7" / 15.7" (120 / 400 mm)	4.7" / 15.7" (120 / 400 mm)	5.9" / 19.7" (150 / 500 mm)	7.7" / 25.6" (195 / 650 mm)
Motor power	1.5 + 1 HP (1.1 + 0.75 kW)	1.5 + 1.5 HP (1.1 + 1.1 kW)	1.5 + 1 HP (1.1 + 0.75 kW)	3 + 1.5 HP (2.2 + 1.1 kW)
Rolling speed	16 ft/min (5 m/min)	16 ft/min (5 m/min)	21 ft/min (6.5 m/min)	16 ft/min (5 m/min)
Hydraulic oil tank	15 L	15 L	15 L	25 L
Dimensions L × W × H	77 × 30 × 38" (1960 × 760 × 970 mm)	93 × 30 × 38" (2360 × 760 × 970 mm)	93 × 30 × 38" (2360 × 760 × 970 mm)	93 × 37 × 44" (2360 × 940 × 1120 mm)
Weight	1,764 lb (800 kg)	2,028 lb (920 kg)	2,469 lb (1,120 kg)	3,792 lb (1,720 kg)

TECHNICAL SPECIFICATIONS · 2 / 6

MRM-H HYDRAULIC ASYMMETRICAL 3-ROLL PLATE ROLLERS

MRM-H 1270

4.2 ft · 6 models

Model	MRM-H 1270x80	MRM-H 1270x100	MRM-H 1270x130	MRM-H 1270x150	MRM-H 1270x180	MRM-H 1270x200
Working length	**4.2 ft · 50.0" (1270 mm)**	**4.2 ft · 50.0" (1270 mm)**	**4.2 ft · 50.0" (1270 mm)**	**4.2 ft · 50.0" (1270 mm)**	**4.2 ft · 50.0" (1270 mm)**	**4.2 ft · 50.0" (1270 mm)**
Pre-bending capacity at 1.5× / 5× top roll Ø	20 ga / 16 ga (1 / 1.5 mm)	16 ga / 14 ga (1.5 / 2 mm)	11 ga / 8 ga (3 / 4 mm)	8 ga / 3/16" (4 / 5 mm)	3/16" / 5/16" (5 / 8 mm)	5/16" / 3/8" (8 / 10 mm)
Rolling capacity at 1.5× / 5× top roll Ø	**16 ga / 14 ga (1.5 / 2 mm)**	**14 ga / 11 ga (2 / 3 mm)**	**8 ga / 3/16" (4 / 5 mm)**	**3/16" / 1/4" (5 / 6 mm)**	**5/16" / 3/8" (8 / 10 mm)**	**3/8" / 1/2" (10 / 12 mm)**
Top & bottom roll Ø	3.15" (80 mm)	3.94" (100 mm)	5.12" (130 mm)	5.91" (150 mm)	7.09" (180 mm)	7.87" (200 mm)
Side roll Ø	3.15" (80 mm)	3.54" (90 mm)	5.12" (130 mm)	5.12" (130 mm)	5.91" (150 mm)	7.09" (180 mm)
Min. rolling Ø at 1.5× / 5× top roll Ø	4.7" / 15.7" (120 / 400 mm)	5.9" / 17.7" (150 / 450 mm)	7.7" / 25.6" (195 / 650 mm)	8.9" / 29.5" (225 / 750 mm)	10.6" / 35.4" (270 / 900 mm)	11.8" / 39.4" (300 / 1000 mm)
Motor power	1.5 + 1.5 HP (1.1 + 1.1 kW)	1.5 + 1.5 HP (1.1 + 1.1 kW)	3 + 1.5 HP (2.2 + 1.1 kW)	3 + 1.5 HP (2.2 + 1.1 kW)	5.4 + 1.5 HP (4 + 1.1 kW)	5.4 + 2 HP (4 + 1.5 kW)
Rolling speed	16 ft/min (5 m/min)	21 ft/min (6.5 m/min)	16 ft/min (5 m/min)	20 ft/min (6 m/min)	16 ft/min (5 m/min)	20 ft/min (6 m/min)
Hydraulic oil tank	15 L	15 L	25 L	25 L	25 L	25 L
Dimensions L × W × H	101 × 30 × 38" (2570 × 760 × 970 mm)	101 × 30 × 38" (2570 × 760 × 970 mm)	119 × 37 × 44" (3020 × 940 × 1120 mm)	119 × 37 × 44" (3020 × 940 × 1120 mm)	121 × 43 × 51" (3070 × 1090 × 1300 mm)	121 × 43 × 51" (3070 × 1090 × 1300 mm)
Weight	2,094 lb (950 kg)	2,535 lb (1,150 kg)	3,858 lb (1,750 kg)	4,134 lb (1,875 kg)	4,630 lb (2,100 kg)	4,850 lb (2,200 kg)

TECHNICAL SPECIFICATIONS · 3 / 6

MRM-H HYDRAULIC ASYMMETRICAL 3-ROLL PLATE ROLLERS

MRM-H 1550

5.1 ft · 7 models

Model	MRM-H 1550x100	MRM-H 1550x130	MRM-H 1550x150	MRM-H 1550x180	MRM-H 1550x200	MRM-H 1550x220	MRM-H 1550x250
Working length	**5.1 ft · 61.0" (1550 mm)**	**5.1 ft · 61.0" (1550 mm)**	**5.1 ft · 61.0" (1550 mm)**	**5.1 ft · 61.0" (1550 mm)**	**5.1 ft · 61.0" (1550 mm)**	**5.1 ft · 61.0" (1550 mm)**	**5.1 ft · 61.0" (1550 mm)**
Pre-bending capacity at 1.5× / 5× top roll Ø	20 ga / 16 ga (1 / 1.5 mm)	12 ga / 10 ga (2.5 / 3.5 mm)	10 ga / 7 ga (3.5 / 4.5 mm)	3/16" / 1/4" (5 / 6 mm)	1/4" / 3/8" (6 / 10 mm)	5/16" / 3/8" (8 / 10 mm)	3/8" / 1/2" (10 / 12 mm)
Rolling capacity at 1.5× / 5× top roll Ø	**16 ga / 14 ga (1.5 / 2 mm)**	**10 ga / 7 ga (3.5 / 4.5 mm)**	**7 ga / 1/4" (4.5 / 6 mm)**	**1/4" / 3/8" (6 / 10 mm)**	**3/8" / 7/16" (10 / 11 mm)**	**3/8" / 1/2" (10 / 12 mm)**	**1/2" / 9/16" (12 / 14 mm)**
Top & bottom roll Ø	3.94" (100 mm)	5.12" (130 mm)	5.91" (150 mm)	7.09" (180 mm)	7.87" (200 mm)	8.66" (220 mm)	9.84" (250 mm)
Side roll Ø	3.54" (90 mm)	5.12" (130 mm)	5.12" (130 mm)	5.91" (150 mm)	7.09" (180 mm)	7.09" (180 mm)	7.87" (200 mm)
Min. rolling Ø at 1.5× / 5× top roll Ø	5.9" / 17.7" (150 / 450 mm)	7.7" / 25.6" (195 / 650 mm)	8.9" / 29.5" (225 / 750 mm)	10.6" / 35.4" (270 / 900 mm)	11.8" / 39.4" (300 / 1000 mm)	13.0" / 43.3" (330 / 1100 mm)	14.8" / 49.2" (375 / 1250 mm)
Motor power	1.5 + 1.5 HP (1.1 + 1.1 kW)	3 + 1.5 HP (2.2 + 1.1 kW)	3 + 1.5 HP (2.2 + 1.1 kW)	5.4 + 1.5 HP (4 + 1.1 kW)	5.4 + 2 HP (4 + 1.5 kW)	7.4 + 2 HP (5.5 + 1.5 kW)	10 + 2 HP (7.5 + 1.5 kW)
Rolling speed	21 ft/min (6.5 m/min)	16 ft/min (5 m/min)	20 ft/min (6 m/min)	16 ft/min (5 m/min)	20 ft/min (6 m/min)	16 ft/min (5 m/min)	16 ft/min (5 m/min)
Hydraulic oil tank	15 L	25 L	25 L	25 L	25 L	25 L	25 L
Dimensions L × W × H	112 × 30 × 38" (2840 × 760 × 970 mm)	130 × 37 × 44" (3300 × 940 × 1120 mm)	130 × 37 × 44" (3300 × 940 × 1120 mm)	132 × 43 × 51" (3350 × 1090 × 1300 mm)	132 × 43 × 51" (3350 × 1090 × 1300 mm)	138 × 47 × 54" (3510 × 1190 × 1370 mm)	138 × 47 × 54" (3510 × 1190 × 1370 mm)
Weight	2,646 lb (1,200 kg)	4,079 lb (1,850 kg)	4,409 lb (2,000 kg)	5,093 lb (2,310 kg)	5,401 lb (2,450 kg)	7,165 lb (3,250 kg)	7,937 lb (3,600 kg)

TECHNICAL SPECIFICATIONS · 4 / 6

MRM-H HYDRAULIC ASYMMETRICAL 3-ROLL PLATE ROLLERS

MRM-H 2050

6.7 ft · 6 models

Model	MRM-H 2050x130	MRM-H 2050x150	MRM-H 2050x180	MRM-H 2050x200	MRM-H 2050x220	MRM-H 2050x250
Working length	**6.7 ft · 80.7" (2050 mm)**	**6.7 ft · 80.7" (2050 mm)**	**6.7 ft · 80.7" (2050 mm)**	**6.7 ft · 80.7" (2050 mm)**	**6.7 ft · 80.7" (2050 mm)**	**6.7 ft · 80.7" (2050 mm)**
Pre-bending capacity at 1.5× / 5× top roll Ø	14 ga / 11 ga (2 / 3 mm)	11 ga / 8 ga (3 / 4 mm)	8 ga / 1/4" (4 / 6 mm)	1/4" / 5/16" (6 / 8 mm)	1/4" / 3/8" (6 / 10 mm)	5/16" / 3/8" (8 / 10 mm)
Rolling capacity at 1.5× / 5× top roll Ø	**11 ga / 8 ga (3 / 4 mm)**	**8 ga / 1/4" (4 / 6 mm)**	**1/4" / 5/16" (6 / 8 mm)**	**5/16" / 3/8" (8 / 10 mm)**	**3/8" / 7/16" (10 / 11 mm)**	**3/8" / 1/2" (10 / 12 mm)**
Top & bottom roll Ø	5.12" (130 mm)	5.91" (150 mm)	7.09" (180 mm)	7.87" (200 mm)	8.66" (220 mm)	9.84" (250 mm)
Side roll Ø	5.12" (130 mm)	5.12" (130 mm)	5.91" (150 mm)	7.09" (180 mm)	7.09" (180 mm)	7.87" (200 mm)
Min. rolling Ø at 1.5× / 5× top roll Ø	7.7" / 25.6" (195 / 650 mm)	8.9" / 29.5" (225 / 750 mm)	10.6" / 35.4" (270 / 900 mm)	11.8" / 39.4" (300 / 1000 mm)	13.0" / 43.3" (330 / 1100 mm)	14.8" / 49.2" (375 / 1250 mm)
Motor power	3 + 1.5 HP (2.2 + 1.1 kW)	3 + 1.5 HP (2.2 + 1.1 kW)	5.4 + 1.5 HP (4 + 1.1 kW)	5.4 + 2 HP (4 + 1.5 kW)	7.4 + 2 HP (5.5 + 1.5 kW)	10 + 2 HP (7.5 + 1.5 kW)
Rolling speed	16 ft/min (5 m/min)	20 ft/min (6 m/min)	16 ft/min (5 m/min)	20 ft/min (6 m/min)	16 ft/min (5 m/min)	16 ft/min (5 m/min)
Hydraulic oil tank	25 L	25 L	25 L	25 L	25 L	25 L
Dimensions L × W × H	150 × 37 × 44" (3810 × 940 × 1120 mm)	150 × 37 × 44" (3810 × 940 × 1120 mm)	152 × 43 × 51" (3860 × 1090 × 1300 mm)	152 × 43 × 51" (3860 × 1090 × 1300 mm)	157 × 47 × 54" (3990 × 1190 × 1370 mm)	157 × 47 × 54" (3990 × 1190 × 1370 mm)
Weight	4,519 lb (2,050 kg)	4,960 lb (2,250 kg)	5,930 lb (2,690 kg)	6,504 lb (2,950 kg)	8,267 lb (3,750 kg)	9,259 lb (4,200 kg)

TECHNICAL SPECIFICATIONS · 5 / 6

MRM-H HYDRAULIC ASYMMETRICAL 3-ROLL PLATE ROLLERS

MRM-H 2550

8.4 ft · 5 models

Model	MRM-H 2550x150	MRM-H 2550x180	MRM-H 2550x200	MRM-H 2550x220	MRM-H 2550x250
Working length	**8.4 ft · 100.4" (2550 mm)**	**8.4 ft · 100.4" (2550 mm)**	**8.4 ft · 100.4" (2550 mm)**	**8.4 ft · 100.4" (2550 mm)**	**8.4 ft · 100.4" (2550 mm)**
Pre-bending capacity at 1.5× / 5× top roll Ø	14 ga / 11 ga (2 / 3 mm)	11 ga / 8 ga (3 / 4 mm)	8 ga / 1/4" (4 / 6 mm)	3/16" / 1/4" (5 / 6 mm)	1/4" / 5/16" (6 / 8 mm)
Rolling capacity at 1.5× / 5× top roll Ø	**11 ga / 8 ga (3 / 4 mm)**	**8 ga / 1/4" (4 / 6 mm)**	**1/4" / 5/16" (6 / 8 mm)**	**1/4" / 3/8" (6 / 10 mm)**	**5/16" / 3/8" (8 / 10 mm)**
Top & bottom roll Ø	5.91" (150 mm)	7.09" (180 mm)	7.87" (200 mm)	8.66" (220 mm)	9.84" (250 mm)
Side roll Ø	5.12" (130 mm)	5.91" (150 mm)	7.09" (180 mm)	7.09" (180 mm)	7.87" (200 mm)
Min. rolling Ø at 1.5× / 5× top roll Ø	8.9" / 29.5" (225 / 750 mm)	10.6" / 35.4" (270 / 900 mm)	11.8" / 39.4" (300 / 1000 mm)	13.0" / 43.3" (330 / 1100 mm)	14.8" / 49.2" (375 / 1250 mm)
Motor power	3 + 1.5 HP (2.2 + 1.1 kW)	5.4 + 1.5 HP (4 + 1.1 kW)	5.4 + 2 HP (4 + 1.5 kW)	7.4 + 2 HP (5.5 + 1.5 kW)	10 + 2 HP (7.5 + 1.5 kW)
Rolling speed	20 ft/min (6 m/min)	16 ft/min (5 m/min)	20 ft/min (6 m/min)	16 ft/min (5 m/min)	16 ft/min (5 m/min)
Hydraulic oil tank	25 L	25 L	25 L	25 L	25 L
Dimensions L × W × H	169 × 37 × 44" (4290 × 940 × 1120 mm)	171 × 43 × 51" (4340 × 1090 × 1300 mm)	171 × 43 × 51" (4340 × 1090 × 1300 mm)	177 × 47 × 54" (4500 × 1190 × 1370 mm)	177 × 47 × 54" (4500 × 1190 × 1370 mm)
Weight	5,512 lb (2,500 kg)	6,768 lb (3,070 kg)	7,606 lb (3,450 kg)	9,370 lb (4,250 kg)	10,582 lb (4,800 kg)

TECHNICAL SPECIFICATIONS · 6 / 6

MRM-H HYDRAULIC ASYMMETRICAL 3-ROLL PLATE ROLLERS

MRM-H 3100

10 ft · 4 models

Model	MRM-H 3100x180	MRM-H 3100x200	MRM-H 3100x220	MRM-H 3100x250
Working length	**10 ft · 120.1" (3100 mm)**	**10 ft · 120.1" (3100 mm)**	**10 ft · 120.1" (3100 mm)**	**10 ft · 120.1" (3100 mm)**
Pre-bending capacity at 1.5× / 5× top roll Ø	14 ga / 11 ga (2 / 3 mm)	11 ga / 8 ga (3 / 4 mm)	8 ga / 1/4" (4 / 6 mm)	3/16" / 1/4" (5 / 6 mm)
Rolling capacity at 1.5× / 5× top roll Ø	**11 ga / 8 ga (3 / 4 mm)**	**8 ga / 1/4" (4 / 6 mm)**	**1/4" / 5/16" (6 / 8 mm)**	**1/4" / 3/8" (6 / 10 mm)**
Top & bottom roll Ø	7.09" (180 mm)	7.87" (200 mm)	8.66" (220 mm)	9.84" (250 mm)
Side roll Ø	5.91" (150 mm)	7.09" (180 mm)	7.09" (180 mm)	7.87" (200 mm)
Min. rolling Ø at 1.5× / 5× top roll Ø	10.6" / 35.4" (270 / 900 mm)	11.8" / 39.4" (300 / 1000 mm)	13.0" / 43.3" (330 / 1100 mm)	14.8" / 49.2" (375 / 1250 mm)
Motor power	5.4 + 1.5 HP (4 + 1.1 kW)	5.4 + 2 HP (4 + 1.5 kW)	7.4 + 2 HP (5.5 + 1.5 kW)	10 + 2 HP (7.5 + 1.5 kW)
Rolling speed	16 ft/min (5 m/min)	20 ft/min (6 m/min)	16 ft/min (5 m/min)	16 ft/min (5 m/min)
Hydraulic oil tank	25 L	25 L	25 L	25 L
Dimensions L × W × H	191 × 43 × 51" (4850 × 1090 × 1300 mm)	191 × 43 × 51" (4850 × 1090 × 1300 mm)	197 × 47 × 54" (5000 × 1190 × 1370 mm)	197 × 47 × 54" (5000 × 1190 × 1370 mm)
Weight	7,606 lb (3,450 kg)	8,708 lb (3,950 kg)	10,472 lb (4,750 kg)	11,905 lb (5,400 kg)

Capacities are for mild steel with a yield strength of 34,100 psi (24 kg/mm^2), shown as two values where the manufacturer states them: at a minimum rolling diameter of 1.5× the top roll diameter / at 5× the top roll diameter. Thin sheet is given in gauge; metric values in brackets are the manufacturer's nominal figures. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by ISITAN — CE certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

3R HMD 1270X90 · 1550X90 · 2050X95

3R HMD MECHANICAL-HYDRAULIC 3-ROLL PLATE ROLLERS



MODEL 3R · ISITAN 3R HMD 1270X90 MECHANICAL-HYDRAULIC 3-ROLL PLATE ROLLER

Working lengths 4.2–6.7 ft (1270–2050 mm) · rolls up to 12 ga (2.5 mm)

A new compact series in which all three rolls are powered by one motor and planetary reducer, with a hydraulic piston moving the back roll: joystick positioning with a digital readout makes cone bending and repeat radii easy. Cast-iron frames, induction-hardened SAE 1050 rolls and wire grooves as standard — a step up from a slip roll for HVAC ducting, signage and light fabrication up to 12 ga.

STANDARD FEATURES

- ✓ All three rolls driven by a single gearbox and gear system
- ✓ Hydraulic back-roll piston with digital readout and joystick control
- ✓ Cone bending with easy joystick positioning; manual drop-end
- ✓ Certified SAE 1050 induction-hardened steel rolls with wire grooves Ø3/16", 1/4", 3/8"
- ✓ Cast-iron main frames; mobile control panel with foot pedal; brake motor for precision bending
- ✓ Built to EC safety directives (CE marked)

OPTIONAL EQUIPMENT

- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

3R HMD — TECHNICAL SPECIFICATIONS

Model	3R HMD 1270x90	3R HMD 1550x90	3R HMD 2050x95
Working length	**4.2 ft · 50.0" (1270 mm)**	**5.1 ft · 61.0" (1550 mm)**	**6.7 ft · 80.7" (2050 mm)**
Rolling capacity	**12 ga (2.5 mm)**	**14 ga (2 mm)**	**16 ga (1.5 mm)**
Roll Ø	3.54" (90 mm)	3.54" (90 mm)	3.74" (95 mm)
Rolling speed	20 ft/min (6 m/min)	20 ft/min (6 m/min)	20 ft/min (6 m/min)
Motor power	1.5 + 1 HP (1.1 + 0.75 kW)	2 + 1 HP (1.5 + 0.75 kW)	2 + 1 HP (1.5 + 0.75 kW)
Wire grooves Ø	3/16", 1/4", 3/8" (4, 6, 10 mm)	3/16", 1/4", 3/8" (4, 6, 10 mm)	3/16", 1/4", 3/8" (4, 6, 10 mm)
Hydraulic oil tank	6 L	6 L	6 L
Dimensions L × W × H	93 × 28 × 30" (2360 × 710 × 760 mm)	104 × 28 × 30" (2640 × 710 × 760 mm)	120 × 28 × 30" (3050 × 710 × 760 mm)
Weight	1,146 lb (520 kg)	1,279 lb (580 kg)	1,576 lb (715 kg)

Capacities are for mild steel with a yield strength of 34,100 psi (24 kg/mm²); thin sheet is given in gauge with the manufacturer's nominal metric value in brackets. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

MRM-S 1050X130 – MRM-S 3050X220 · 21 MODELS

MRM-S MECHANICAL ASYMMETRICAL 3-ROLL PLATE ROLLERS



MODEL MRM-S · ISITAN MRM-S 2050X190 MOTORIZED 3-ROLL PLATE ROLLER, 6.7 FT



ISITAN MRM-S 1050x150 motorized 3-roll plate roller, 3.4 ft



ISITAN MRM-S 1550x150 motorized 3-roll plate roller, 5.1 ft

Working lengths 3.4–10 ft (1050–3050 mm) · rolls up to 3/8" (10 mm)

Motorized initial-pinch plate rolls for light to medium-duty work up to 3/8" plate: a planetary gearbox drives the rolls, the back roll moves linearly on a motorized adjustment and a manual drop-end with safety switch releases the finished cylinder. Ideal for aluminum forming, HVAC and ventilation ducting, signage panels, machine guards and sheet-metal enclosures. A special version carries a top roll of segmented hard-plastic (Delrin) rings for rolling aluminum composite panels (Alucobond / ACM) without marking the surface.

STANDARD FEATURES

- ✓ Planetary gearbox drive on all models; precision rolling with brake motor
- ✓ Motorized back-roll adjustment; manual drop-end top roll with safety switch
- ✓ Cone-bending device, top-roll support system and central lubrication
- ✓ High-tensile rolls in certified SAE 1050 (CK45) steel; fabricated welded-steel main frames
- ✓ Mobile pendant control panel
- ✓ Built to EC safety directives (CE certified)

OPTIONAL EQUIPMENT

- + Digital readout (DRO) for the back roll; NC control
- + Induction-hardened rolls; variable stepless speed; motorized bottom roll
- + Extended roll shafts and profile & section bending roll set
- + Plastic-coated segmented top roll for Alucobond / ACM composite panels
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

MRM-S 1050 — TECHNICAL SPECIFICATIONS

Model	MRM-S 1050x130	MRM-S 1050x150	MRM-S 1050x170	MRM-S 1050x190
Working length	**3.4 ft · 41.3" (1050 mm)**	**3.4 ft · 41.3" (1050 mm)**	**3.4 ft · 41.3" (1050 mm)**	**3.4 ft · 41.3" (1050 mm)**
Pre-bending capacity at 1.5× / 5× top roll Ø	3/16" / 1/4" (5 / 6 mm)	1/4" / 1/4" (6 / 6 mm)	1/4" / 5/16" (6 / 8 mm)	5/16" / 3/8" (8 / 10 mm)
Rolling capacity at 1.5× / 5× top roll Ø	**1/4" / 1/4" (6 / 6 mm)**	**1/4" / 5/16" (6 / 8 mm)**	**5/16" / 3/8" (8 / 10 mm)**	**3/8" / 3/8" (10 / 10 mm)**
Top & bottom roll Ø	5.12" (130 mm)	5.91" (150 mm)	6.69" (170 mm)	7.48" (190 mm)
Min. rolling Ø at 1.5× / 5× top roll Ø	7.7" (195 mm)	8.9" (225 mm)	10.0" (255 mm)	11.2" (285 mm)
Motor power	3 HP (2.2 kW)	3 HP (2.2 kW)	5.4 HP (4 kW)	5.4 HP (4 kW)
Back roll motor	1.5 HP (1.1 kW)	1.5 HP (1.1 kW)	1.5 HP (1.1 kW)	2 HP (1.5 kW)
Dimensions L × W × H	108 × 26 × 40" (2740 × 660 × 1020 mm)	108 × 27 × 41" (2740 × 690 × 1040 mm)	112 × 28 × 41" (2840 × 710 × 1040 mm)	126 × 37 × 51" (3200 × 940 × 1300 mm)
Weight	2,646 lb (1,200 kg)	3,197 lb (1,450 kg)	3,527 lb (1,600 kg)	5,401 lb (2,450 kg)

DETAILS, COMPONENTS AND OPTIONS

MRM-S MECHANICAL ASYMMETRICAL 3-ROLL PLATE ROLLERS



ISITAN MRM-S 2550x190 motorized 3-roll plate roller, 8.4 ft



ISITAN MRM-S 3050x190 motorized 3-roll plate roller, 10 ft



ISITAN MRM-S special model with segmented plastic-coated top roll for aluminum composite panels



MRM-S — segmented plastic (Delrin) top roll for composite panels



MRM-S — optional control panel with digital readout



MRM-S — optional extended roll shafts and section bending roll set



MRM-S — standard cone-bending device



MRM-S — manual drop-end with safety switch

TECHNICAL SPECIFICATIONS · 1 / 2

MRM-S MECHANICAL ASYMMETRICAL 3-ROLL PLATE ROLLERS

MRM-S 1550

5.1 ft · 4 models

Model	MRM-S 1550x130	MRM-S 1550x150	MRM-S 1550x170	MRM-S 1550x190
Working length	**5.1 ft · 61.0" (1550 mm)**	**5.1 ft · 61.0" (1550 mm)**	**5.1 ft · 61.0" (1550 mm)**	**5.1 ft · 61.0" (1550 mm)**
Pre-bending capacity at 1.5× / 5× top roll Ø	8 ga / 3/16" (4 / 5 mm)	3/16" / 1/4" (5 / 6 mm)	1/4" / 1/4" (6 / 6 mm)	1/4" / 5/16" (6 / 8 mm)
Rolling capacity at 1.5× / 5× top roll Ø	**3/16" / 1/4" (5 / 6 mm)**	**1/4" / 1/4" (6 / 6 mm)**	**1/4" / 5/16" (6 / 8 mm)**	**5/16" / 3/8" (8 / 10 mm)**
Top & bottom roll Ø	5.12" (130 mm)	5.91" (150 mm)	6.69" (170 mm)	7.48" (190 mm)
Min. rolling Ø at 1.5× / 5× top roll Ø	7.7" (195 mm)	8.9" (225 mm)	10.0" (255 mm)	11.2" (285 mm)
Motor power	3 HP (2.2 kW)	3 HP (2.2 kW)	5.4 HP (4 kW)	5.4 HP (4 kW)
Back roll motor	1.5 HP (1.1 kW)	1.5 HP (1.1 kW)	1.5 HP (1.1 kW)	2 HP (1.5 kW)
Dimensions L × W × H	128 × 26 × 40" (3250 × 660 × 1020 mm)	128 × 27 × 41" (3250 × 690 × 1040 mm)	132 × 28 × 41" (3350 × 710 × 1040 mm)	146 × 37 × 51" (3710 × 940 × 1300 mm)
Weight	3,086 lb (1,400 kg)	3,638 lb (1,650 kg)	4,079 lb (1,850 kg)	6,063 lb (2,750 kg)

MRM-S 2050

6.7 ft · 5 models

Model	MRM-S 2050x130	MRM-S 2050x150	MRM-S 2050x170	MRM-S 2050x190	MRM-S 2050x220
Working length	**6.7 ft · 80.7" (2050 mm)**	**6.7 ft · 80.7" (2050 mm)**	**6.7 ft · 80.7" (2050 mm)**	**6.7 ft · 80.7" (2050 mm)**	**6.7 ft · 80.7" (2050 mm)**
Pre-bending capacity at 1.5× / 5× top roll Ø	14 ga / 11 ga (2 / 3 mm)	11 ga / 8 ga (3 / 4 mm)	8 ga / 3/16" (4 / 5 mm)	3/16" / 1/4" (5 / 6 mm)	1/4" / 1/4" (6 / 6 mm)
Rolling capacity at 1.5× / 5× top roll Ø	**11 ga / 8 ga (3 / 4 mm)**	**8 ga / 3/16" (4 / 5 mm)**	**3/16" / 1/4" (5 / 6 mm)**	**1/4" / 1/4" (6 / 6 mm)**	**1/4" / 5/16" (6 / 8 mm)**
Top & bottom roll Ø	5.12" (130 mm)	5.91" (150 mm)	6.69" (170 mm)	7.48" (190 mm)	8.66" (220 mm)
Min. rolling Ø at 1.5× / 5× top roll Ø	7.7" (195 mm)	8.9" (225 mm)	10.0" (255 mm)	11.2" (285 mm)	—
Motor power	3 HP (2.2 kW)	3 HP (2.2 kW)	5.4 HP (4 kW)	5.4 HP (4 kW)	5.4 HP (4 kW)
Back roll motor	1.5 HP (1.1 kW)	1.5 HP (1.1 kW)	1.5 HP (1.1 kW)	2 HP (1.5 kW)	3 HP (2.2 kW)
Dimensions L × W × H	148 × 26 × 40" (3760 × 660 × 1020 mm)	148 × 27 × 41" (3760 × 690 × 1040 mm)	152 × 28 × 41" (3860 × 710 × 1040 mm)	165 × 37 × 51" (4190 × 940 × 1300 mm)	165 × 45 × 55" (4190 × 1140 × 1400 mm)
Weight	3,527 lb (1,600 kg)	4,156 lb (1,885 kg)	4,630 lb (2,100 kg)	6,834 lb (3,100 kg)	8,818 lb (4,000 kg)

TECHNICAL SPECIFICATIONS · 2 / 2

MRM-S MECHANICAL ASYMMETRICAL 3-ROLL PLATE ROLLERS

MRM-S 2550

8.4 ft · 4 models

Model	MRM-S 2550x150	MRM-S 2550x180	MRM-S 2550x190	MRM-S 2550x220
Working length	**8.4 ft · 100.4" (2550 mm)**	**8.4 ft · 100.4" (2550 mm)**	**8.4 ft · 100.4" (2550 mm)**	**8.4 ft · 100.4" (2550 mm)**
Pre-bending capacity at 1.5× / 5× top roll Ø	14 ga / 11 ga (2 / 3 mm)	11 ga / 8 ga (3 / 4 mm)	8 ga / 3/16" (4 / 5 mm)	3/16" / 1/4" (5 / 6 mm)
Rolling capacity at 1.5× / 5× top roll Ø	**11 ga / 8 ga (3 / 4 mm)**	**8 ga / 3/16" (4 / 5 mm)**	**3/16" / 1/4" (5 / 6 mm)**	**1/4" / 1/4" (6 / 6 mm)**
Top & bottom roll Ø	5.91" (150 mm)	7.09" (180 mm)	7.48" (190 mm)	8.66" (220 mm)
Min. rolling Ø at 1.5× / 5× top roll Ø	8.9" (225 mm)	10.6" (270 mm)	11.2" (285 mm)	13.0" (330 mm)
Motor power	3 HP (2.2 kW)	5.4 HP (4 kW)	5.4 HP (4 kW)	5.4 HP (4 kW)
Back roll motor	1.5 HP (1.1 kW)	2 HP (1.5 kW)	2 HP (1.5 kW)	3 HP (2.2 kW)
Dimensions L × W × H	167 × 26 × 40" (4240 × 660 × 1020 mm)	171 × 37 × 51" (4340 × 940 × 1300 mm)	185 × 37 × 51" (4700 × 940 × 1300 mm)	185 × 45 × 55" (4700 × 1140 × 1400 mm)
Weight	4,740 lb (2,150 kg)	6,724 lb (3,050 kg)	7,496 lb (3,400 kg)	11,023 lb (5,000 kg)

MRM-S 3050

10 ft · 4 models

Model	MRM-S 3050x160	MRM-S 3050x190	MRM-S 3050x200	MRM-S 3050x220
Working length	**10 ft · 120.1" (3050 mm)**	**10 ft · 120.1" (3050 mm)**	**10 ft · 120.1" (3050 mm)**	**10 ft · 120.1" (3050 mm)**
Pre-bending capacity at 1.5× / 5× top roll Ø	16 ga / 14 ga (1.5 / 2 mm)	14 ga / 11 ga (2 / 3 mm)	11 ga / 8 ga (3 / 4 mm)	8 ga / 3/16" (4 / 5 mm)
Rolling capacity at 1.5× / 5× top roll Ø	**14 ga / 11 ga (2 / 3 mm)**	**11 ga / 8 ga (3 / 4 mm)**	**8 ga / 3/16" (4 / 5 mm)**	**3/16" / 1/4" (5 / 6 mm)**
Top & bottom roll Ø	6.30" (160 mm)	7.48" (190 mm)	7.87" (200 mm)	8.66" (220 mm)
Min. rolling Ø at 1.5× / 5× top roll Ø	9.4" (240 mm)	11.2" (285 mm)	11.8" (300 mm)	13.0" (330 mm)
Motor power	3 HP (2.2 kW)	5.4 HP (4 kW)	5.4 HP (4 kW)	5.4 HP (4 kW)
Back roll motor	1.5 HP (1.1 kW)	2 HP (1.5 kW)	2 HP (1.5 kW)	3 HP (2.2 kW)
Dimensions L × W × H	191 × 28 × 41" (4850 × 710 × 1040 mm)	205 × 37 × 51" (5210 × 940 × 1300 mm)	205 × 37 × 51" (5210 × 940 × 1300 mm)	205 × 45 × 55" (5210 × 1140 × 1400 mm)
Weight	5,842 lb (2,650 kg)	8,267 lb (3,750 kg)	8,818 lb (4,000 kg)	13,228 lb (6,000 kg)

Capacities are for mild steel with a yield strength of 34,100 psi (24 kg/mm^2); thin sheet is given in gauge with the manufacturer's nominal metric value in brackets. Dimensions are overall L × W × H. Capacity pairs are as published by the manufacturer.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by ISITAN — CE certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

IRM 1050X110 – IRM 2550X140 · 10 MODELS

IRM MECHANICAL ASYMMETRICAL 3-ROLL PLATE ROLLERS



MODEL IRM · ISITAN IRM 1550X140 MOTORIZED 3-ROLL PLATE ROLLER, 5.1 FT



ISITAN IRM 1050x130 motorized 3-roll plate roller — compact cast-frame model



ISITAN IRM 1270x140 motorized 3-roll plate roller, 4.2 ft

Working lengths 3.4–8.4 ft (1050–2550 mm) · rolls up to 3/16" (5 mm)

Value-priced motorized plate rolls, a favourite of small workshops: top and bottom rolls driven by a single gearbox and gear system, spheroidal cast-iron frames, wire grooves at the roll ends and a cone-bending device, with a mobile control panel and foot pedal. Designed for light to medium work up to 3/16" — aluminum forming, HVAC ducting, signage panels and sheet-metal enclosures.

STANDARD FEATURES

- ✓ Top and bottom rolls driven by a single gearbox and gear system
- ✓ Certified SAE 1050 steel rolls with high tensile strength; spheroidal cast-iron frames
- ✓ Mobile control panel with foot pedal; precision bending with brake motor
- ✓ Cone-bending device, manual drop-end, top-roll support with bearing
- ✓ Wire grooves at the roll ends; IRM 2550x140 with motorized back roll as standard
- ✓ Built to EC safety directives (CE certified)

OPTIONAL EQUIPMENT

- + Motorized back-roll adjustment with digital readout
- + Induction-hardened rolls; adjustable stepless speed
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

IRM 1050 – 1550 — TECHNICAL SPECIFICATIONS

Model	IRM 1050x110	IRM 1050x130	IRM 1270x120	IRM 1270x140	IRM 1550x110
Working length	**3.4 ft · 41.3" (1050 mm)**	**3.4 ft · 41.3" (1050 mm)**	**4.2 ft · 50.0" (1270 mm)**	**4.2 ft · 50.0" (1270 mm)**	**5.1 ft · 61.0" (1550 mm)**
Rolling capacity	**8 ga (4 mm)**	**3/16" (5 mm)**	**8 ga (4 mm)**	**3/16" (5 mm)**	**11 ga (3 mm)**
Roll Ø	4.33" (110 mm)	5.12" (130 mm)	4.72" (120 mm)	5.51" (140 mm)	4.33" (110 mm)
Rolling speed	10 ft/min (3 m/min)	11 ft/min (3.5 m/min)	10 ft/min (3 m/min)	11 ft/min (3.5 m/min)	10 ft/min (3 m/min)
Motor power	3 HP (2.2 kW)	3 HP (2.2 kW)	3 HP (2.2 kW)	3 HP (2.2 kW)	3 HP (2.2 kW)
Wire grooves Ø	3/16", 1/4", 3/8", 1/2" (4, 6, 10, 12 mm)	3/16", 1/4", 3/8", 1/2" (4, 6, 10, 12 mm)	3/16", 1/4", 3/8", 1/2" (4, 6, 10, 12 mm)	3/16", 1/4", 3/8", 1/2" (4, 6, 10, 12 mm)	3/16", 1/4", 3/8", 1/2" (4, 6, 10, 12 mm)
Dimensions L × W × H	87 × 30 × 39" (2210 × 760 × 990 mm)	87 × 30 × 39" (2210 × 760 × 990 mm)	98 × 33 × 39" (2490 × 840 × 990 mm)	97 × 30 × 39" (2460 × 760 × 990 mm)	106 × 30 × 39" (2690 × 760 × 990 mm)
Weight	2,183 lb (990 kg)	2,646 lb (1,200 kg)	2,381 lb (1,080 kg)	2,976 lb (1,350 kg)	2,646 lb (1,200 kg)

DETAILS, COMPONENTS AND OPTIONS

IRM MECHANICAL ASYMMETRICAL 3-ROLL PLATE ROLLERS



ISITAN IRM 2050x130 motorized 3-roll plate roller, 6.7 ft



ISITAN IRM 2550x140 motorized 3-roll plate roller, 8.4 ft



IRM — standard manual drop-end

TECHNICAL SPECIFICATIONS

IRM MECHANICAL ASYMMETRICAL 3-ROLL PLATE ROLLERS

IRM 1550 – 2550

5.1–8.4 ft · 5 models

Model	IRM 1550x140	IRM 2050x110	IRM 2050x130	IRM 2050x140	IRM 2550x140
Working length	**5.1 ft · 61.0" (1550 mm)**	**6.7 ft · 80.7" (2050 mm)**	**6.7 ft · 80.7" (2050 mm)**	**6.7 ft · 80.7" (2050 mm)**	**8.4 ft · 100.4" (2550 mm)**
Rolling capacity	**8 ga (4 mm)**	**14 ga (2 mm)**	**11 ga (3 mm)**	**8 ga (4 mm)**	**12 ga (2.5 mm)**
Roll Ø	5.51" (140 mm)	4.33" (110 mm)	5.12" (130 mm)	5.51" (140 mm)	5.51" (140 mm)
Rolling speed	11 ft/min (3.5 m/min)	10 ft/min (3 m/min)	11 ft/min (3.5 m/min)	11 ft/min (3.5 m/min)	11 ft/min (3.5 m/min)
Motor power	3 HP (2.2 kW)	3 HP (2.2 kW)	3 HP (2.2 kW)	3 HP (2.2 kW)	3 + 1 HP (2.2 + 0.75 kW)
Wire grooves Ø	3/16", 1/4", 3/8", 1/2" (4, 6, 10, 12 mm)	3/16", 1/4", 3/8", 1/2" (4, 6, 10, 12 mm)	3/16", 1/4", 3/8", 1/2" (4, 6, 10, 12 mm)	3/16", 1/4", 3/8", 1/2" (4, 6, 10, 12 mm)	3/16", 1/4", 3/8", 1/2" (4, 6, 10, 12 mm)
Dimensions L × W × H	106 × 30 × 39" (2690 × 760 × 990 mm)	126 × 30 × 39" (3200 × 760 × 990 mm)	126 × 30 × 39" (3200 × 760 × 990 mm)	126 × 30 × 39" (3200 × 760 × 990 mm)	146 × 30 × 39" (3710 × 760 × 990 mm)
Weight	3,131 lb (1,420 kg)	3,042 lb (1,380 kg)	3,307 lb (1,500 kg)	3,638 lb (1,650 kg)	4,079 lb (1,850 kg)

Capacities are for mild steel with a yield strength of 34,100 psi (24 kg/mm^2); thin sheet is given in gauge with the manufacturer's nominal metric value in brackets. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by ISITAN — CE certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

RM 1050X90 · 1270X90 · 1550X90 · 2050X95

RM MOTORIZED 3-ROLL ASYMMETRICAL PLATE ROLLERS



MODEL RM · ISITAN RM 1270X90 MOTORIZED 3-ROLL PLATE ROLLER WITH FOOT-PEDAL CONTROL



ISITAN RM 1050x90 motorized 3-roll plate roller, 3.4 ft



ISITAN RM 1550x90 motorized 3-roll plate roller, 5.1 ft

Working lengths 3.4–6.7 ft (1050–2050 mm) · rolls up to 11 ga (3 mm)

Motorized 3-roll plate rolls on a reinforced steel frame with a single gearbox and chain/gear drive, foot-pedal control and a brake motor for precise stops. Rolls up to 11 ga, with wire grooves and a cone-bending device as standard — the value-priced motorized roll for ducting, cylinders and light sheet-metal work.

STANDARD FEATURES

- ✓ Top and bottom rolls driven by a single gearbox and chain/gear system
- ✓ Certified SAE 1050 steel rolls; reinforced steel main frame
- ✓ Mobile control panel with foot pedal; precision bending with brake motor
- ✓ Cone-bending device, manual drop-end and wire grooves at the roll ends
- ✓ Built to EC safety directives (CE)

OPTIONAL EQUIPMENT

- + Motorized back-roll adjustment with digital readout
- + Induction-hardened or coated rolls; variable speed
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

RM — MOTORIZED — TECHNICAL SPECIFICATIONS

Model	RM 1050x90	RM 1270x90	RM 1550x90	RM 2050x95
Working length	**3.4 ft · 41.3" (1050 mm)**	**4.2 ft · 50.0" (1270 mm)**	**5.1 ft · 61.0" (1550 mm)**	**6.7 ft · 80.7" (2050 mm)**
Rolling capacity	**11 ga (3 mm)**	**12 ga (2.5 mm)**	**14 ga (2 mm)**	**16 ga (1.5 mm)**
Roll Ø	3.54" (90 mm)	3.54" (90 mm)	3.54" (90 mm)	3.74" (95 mm)
Rolling speed	20 ft/min (6 m/min)	20 ft/min (6 m/min)	20 ft/min (6 m/min)	20 ft/min (6 m/min)
Motor power	1.5 HP (1.1 kW)	1.5 HP (1.1 kW)	2 HP (1.5 kW)	2 HP (1.5 kW)
Wire grooves Ø	3/16", 1/4", 3/8" (4, 6, 10 mm)	3/16", 1/4", 3/8" (4, 6, 10 mm)	3/16", 1/4", 3/8" (4, 6, 10 mm)	3/16", 1/4", 3/8" (4, 6, 10 mm)
Dimensions L × W × H	64 × 28 × 47" (1630 × 710 × 1190 mm)	73 × 28 × 47" (1850 × 710 × 1190 mm)	84 × 28 × 47" (2130 × 710 × 1190 mm)	104 × 28 × 47" (2640 × 710 × 1190 mm)
Weight	1,014 lb (460 kg)	1,146 lb (520 kg)	1,279 lb (580 kg)	1,576 lb (715 kg)

Capacities are for mild steel with a yield strength of 34,100 psi (24 kg/mm^2); thin sheet is given in gauge with the manufacturer's nominal metric value in brackets. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

DETAILS, COMPONENTS AND OPTIONS

RM MOTORIZED 3-ROLL ASYMMETRICAL PLATE ROLLERS



ISITAN RM 2050x95 motorized 3-roll plate roller, 6.7 ft



RM — standard manual drop-end



RM — standard drop-end safety switch

HIBKS 4.0 · IBKS 4.0 · HIBKS 2.5 · IBKS 2.5

HIBKS / IBKS HYDRAULIC AND MOTORIZED BEAD ROLLERS



MODEL HIBKS · ISITAN HIBKS 4.0 HYDRAULIC BEAD ROLLER FOR SHEET UP TO 8 GA



ISITAN IBKS 4.0 motorized bead roller with manual top-roll setting



ISITAN HIBKS 2.5 hydraulic bead roller for sheet up to 12 ga

Beads sheet up to 8 ga (4 mm) · shafts 9.8″ and 11.8″ · hydraulic or motorized

Heavy-duty beading and trimming machines for sheet up to 8 ga (4.0 models) or 12 ga (2.5 models): a welded steel frame, a gearbox motor with brake, foot-pedal control and shafts in tapered roller bearings. The HIBKS moves the top roll hydraulically — the bead is formed under constant pressure without the operator cranking — while the IBKS has a manual top-roll setting at a lower price. Four sets of standard rolls and the roll spanner key are included; the bottom roll and the sheet support adjust forward and backward for ducts, drums, tanks and HVAC fittings.

STANDARD FEATURES

- ✓ Welded steel construction frame; complete with floor stand
- ✓ HIBKS: hydraulic up/down top roll · IBKS: manual top-roll setting
- ✓ Forward-backward adjustable bottom roll and sheet support
- ✓ Special-steel shafts in tapered roller bearings; low-maintenance ball-bearing design
- ✓ Gearbox motor with brake; foot-pedal control
- ✓ 4 sets of standard rolls (S1–S4) and roll spanner key included; built to EC safety directives (CE)

OPTIONAL EQUIPMENT

- + Extra roll sets E1–E8; rolls for special jobs made to order
- + Digital readout (HIBKS)
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

HIBKS 4.0 · IBKS 4.0 — TECHNICAL SPECIFICATIONS


Model	HIBKS 4.0 · hydraulic	IBKS 4.0 · motorized
Shaft length	**11.8″ (300 mm)**	**11.8″ (300 mm)**
Beading capacity mild steel	**8 ga (4 mm)**	**8 ga (4 mm)**
Roll Ø	4.96″ (126 mm)	4.96″ (126 mm)
Throat depth	7.9″ (200 mm)	7.9″ (200 mm)
Spindle speed	10 rpm	10 rpm
Motor power	3 + 1 HP (2.2 + 0.75 kW)	3 HP (2.2 kW)
Hydraulic oil tank	6 L	—
Dimensions L × W × H	68 × 23 × 50″ (1730 × 580 × 1270 mm)	58 × 22 × 47″ (1470 × 560 × 1190 mm)
Weight	1,213 lb (550 kg)	1,014 lb (460 kg)

DETAILS, COMPONENTS AND OPTIONS


HIBKS / IBKS HYDRAULIC AND MOTORIZED BEAD ROLLERS



ISITAN IBKS 2.5 motorized bead roller

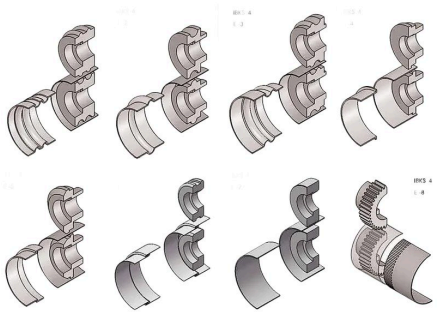

HIBKS / IBKS 4.0 — standard roll sets S1–S4 and extra roll sets E1–E8

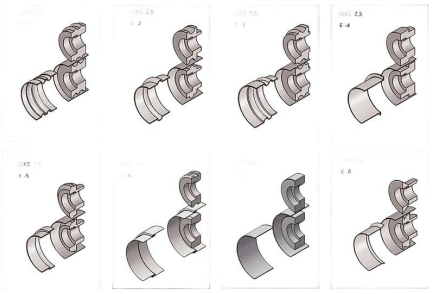

HIBKS / IBKS 2.5 — standard roll sets S1–S4 and extra roll sets E1–E8

TECHNICAL SPECIFICATIONS

HIBKS / IBKS HYDRAULIC AND MOTORIZED BEAD ROLLERS

HIBKS 2.5 · IBKS 2.5

sheet up to 12 ga · hydraulic / motorized

Model	HIBKS 2.5 · hydraulic	IBKS 2.5 · motorized
Shaft length	**9.8" (250 mm)**	**9.8" (250 mm)**
Beading capacity mild steel	**12 ga (2.5 mm)**	**12 ga (2.5 mm)**
Roll Ø	3.78" (96 mm)	3.78" (96 mm)
Throat depth	6.3" (160 mm)	6.3" (160 mm)
Spindle speed	13 rpm	13 rpm
Motor power	2 + 0.75 HP (1.5 + 0.55 kW)	2 HP (1.5 kW)
Hydraulic oil tank	6 L	—
Dimensions L × W × H	68 × 23 × 50" (1730 × 580 × 1270 mm)	58 × 22 × 47" (1470 × 560 × 1190 mm)
Weight	838 lb (380 kg)	705 lb (320 kg)

Beading capacity is for mild steel; thin sheet is given in gauge with the manufacturer's nominal metric value in brackets. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by ISITAN — CE certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

IBKS 1.8 · IKM 1.2 · IKMP 1.2 · IKMP 1.2 P

IBKS 1.8 / IKM / IKMP MOTORIZED AND PNEUMATIC BEAD ROLLERS



MODEL IKM · ISITAN IBKS 1.8 MOTORIZED BEAD ROLLER — 3 SETS OF STANDARD ROLLS



ISITAN IKM 1.2 motorized bead roller with 8 sets of standard rolls



ISITAN IKMP 1.2 motorized bead roller on floor stand

Beads sheet up to 14 ga (1.8 mm) · motorized · pneumatic top shaft on the IKMP 1.2 P

Motorized bead rollers for 14–18 ga sheet, each complete with a floor stand and foot-pedal control. The IBKS 1.8 has a welded steel-plate frame with an 11" throat and a gearbox motor with brake; the IKM 1.2 and IKMP 1.2 are cast-iron machines with 8 sets of standard rolls — the IKM with four pulley speeds, the IKMP 1.2 P with a pneumatic top shaft that closes the rolls at the press of the pedal for repeat work.

STANDARD FEATURES

- ✓ IBKS 1.8: welded steel-plate frame, 11" (280 mm) throat, 3 sets of standard rolls, easy to move around the shop
- ✓ IKM 1.2: heavy-duty cast-iron frame, 8 sets of standard rolls, tooling cupboard, 4 working speeds (30 / 60 / 90 / 120 rpm)
- ✓ IKMP 1.2 / 1.2 P: cast-iron frame, 8 sets of standard rolls, adjustable bottom roll; the P version with pneumatic top shaft
- ✓ Forward-backward adjustable sheet support; special-steel roll shafts
- ✓ Foot-pedal control; complete with floor stand; built to EC safety directives (CE)

OPTIONAL EQUIPMENT

- + Extra roll sets; rolls for special jobs made to order
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

IBKS 1.8 · IKM 1.2 — TECHNICAL SPECIFICATIONS


Model	IBKS 1.8	IKM 1.2
Shaft length	**4.7" (120 mm)**	**5.5" (140 mm)**
Beading capacity mild steel	**14 ga (1.8 mm)**	**18 ga (1.2 mm)**
Roll Ø	3.23" (82 mm)	2.44" (62 mm)
Throat depth	11.0" (280 mm)	3.9" (100 mm)
Spindle speed	48 rpm	30 / 60 / 90 / 120 rpm
Motor power	2 HP (1.5 kW)	1 HP (0.75 kW)
Dimensions L × W × H	33 × 16 × 48" (840 × 410 × 1220 mm)	35 × 18 × 53" (890 × 460 × 1350 mm)
Weight	309 lb (140 kg)	298 lb (135 kg)

DETAILS, COMPONENTS AND OPTIONS


IBKS 1.8 / IKM / IKMP MOTORIZED AND PNEUMATIC BEAD ROLLERS



ISITAN IKMP 1.2 P bead roller with pneumatic top shaft

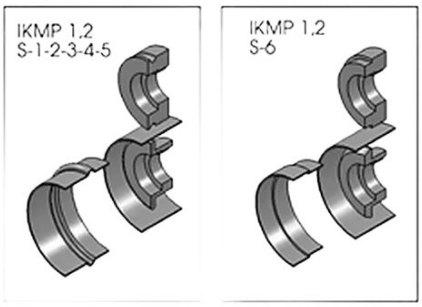

Standard roll sets for IKMP and IKM bead rollers

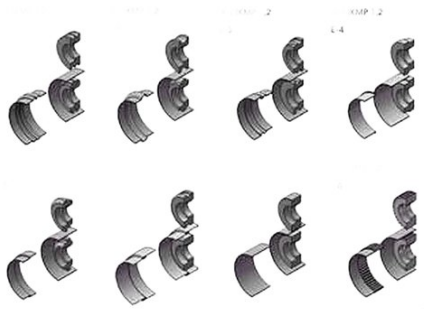

Extra roll sets for IKMP and IKM bead rollers

TECHNICAL SPECIFICATIONS

IBKS 1.8 / IKM / IKMP MOTORIZED AND PNEUMATIC BEAD ROLLERS

IKMP 1.2 · IKMP 1.2 P

motorized · pneumatic top shaft

Model	IKMP 1.2	IKMP 1.2 P
Shaft length	**5.5" (140 mm)**	**5.5" (140 mm)**
Beading capacity mild steel	**18 ga (1.2 mm)**	**18 ga (1.2 mm)**
Roll Ø	2.44" (62 mm)	2.44" (62 mm)
Throat depth	3.9" (100 mm)	3.9" (100 mm)
Spindle speed	32 rpm	32 rpm
Motor power	1 HP (0.75 kW)	1 HP (0.75 kW)
Dimensions L × W × H	39 × 18 × 53" (990 × 460 × 1350 mm)	35 × 18 × 65" (890 × 460 × 1650 mm)
Weight	287 lb (130 kg)	331 lb (150 kg)

Beading capacity is for mild steel; thin sheet is given in gauge with the manufacturer's nominal metric value in brackets. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by ISITAN — CE certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

IDK-5 · IDK-3.5 · IDK-2 · IDK-1.8

IDK CIRCLE CUTTING MACHINES — HYDRAULIC AND MOTORIZED CIRCLE SHEARS



MODEL IDK · ISITAN IDK-5 HYDRAULIC CIRCLE CUTTING AND FLANGING MACHINE — DISCS UP TO 78.7" IN 3/16" SHEET



ISITAN IDK-3.5 motorized circle cutting shear with pneumatic centre clamp



ISITAN IDK-2 heavy-duty motorized circle cutting machine

Discs Ø4.3" – 78.7" (110–2000 mm) · sheet to 3/16" (5 mm) · inside-diameter cutting

Circle cutting shears cut round blanks — and on the IDK-5, 3.5 and 2 also inside diameters (rings) — from sheet clamped at its centre and rotated between two circular blades. The IDK-5 is the production machine: hydraulic centre clamp, motorized cutting-diameter adjustment, discs up to 78.7" in 3/16" steel and an optional flanging attachment that turns the edge of the disc up to 3/8" for tank heads. The IDK-3.5 adds a pneumatic clamp to a 47" machine, the IDK-2 and IDK-1.8 are rigid cast-frame motorized cutters for 14 ga sheet with foot-pedal control.

STANDARD FEATURES

- ✓ IDK-5: welded steel frame, hydraulic centre clamp, motorized cutting-diameter adjustment, inside-diameter cutting, mobile control panel
- ✓ IDK-3.5: pneumatic centre clamp (116 psi air supply), motorized diameter adjustment, inside-diameter cutting
- ✓ IDK-2: rigid cast frame, blades in bearings, foot pedal, inside-diameter cutting
- ✓ IDK-1.8: rigid cast frame, blades in bronze bushings, foot pedal
- ✓ Special-steel (1.2379) blades; shafts on conical bearings for long blade life; gearbox motor with brake
- ✓ Built to EC safety directives (CE)

OPTIONAL EQUIPMENT

- + IDK-5: flanging attachment for edge flanging up to 3/8"; digital readout
- + IDK-2: pneumatic sheet-centring device
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

DETAILS, COMPONENTS AND OPTIONS


IDK CIRCLE CUTTING MACHINES — HYDRAULIC AND MOTORIZED CIRCLE SHEARS



ISITAN IDK-1.8 motorized circle cutter with foot pedal



IDK-5 — hydraulic clamping and cutting system

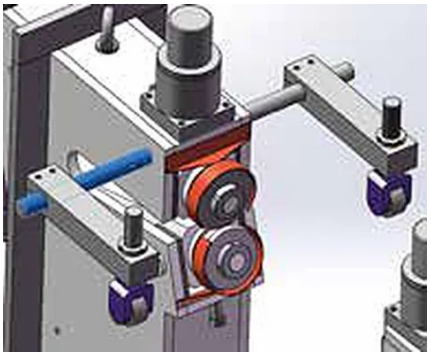

IDK-5 — optional flanging attachment for edge flanging up to 3/8″

TECHNICAL SPECIFICATIONS

IDK CIRCLE CUTTING MACHINES — HYDRAULIC AND MOTORIZED CIRCLE SHEARS

IDK SERIES

4 models · circles Ø4.3″ – 78.7″

Model	IDK-5	IDK-3.5	IDK-2	IDK-1.8
Min. cutting Ø	9.8″ (250 mm)	7.9″ (200 mm)	4.7″ (120 mm)	4.3″ (110 mm)
Max. cutting Ø	**78.7″ (2000 mm)**	**47.2″ (1200 mm)**	**39.4″ (1000 mm)**	**39.4″ (1000 mm)**
Cutting capacity mild steel	**3/16″ (5 mm)**	**10 ga (3.5 mm)**	**14 ga (2 mm)**	**14 ga (2 mm)**
Cutting speed	13 ft/min (4 m/min)	20 ft/min (6 m/min)	25 ft/min (7.5 m/min)	25 ft/min (7.5 m/min)
Blade material	1.2379 tool steel	1.2379 tool steel	1.2379 tool steel	1.2379 tool steel
Motor power	3 + 1 HP (2.2 + 0.75 kW)	3 HP (2.2 kW)	1.5 HP (1.1 kW)	1.5 HP (1.1 kW)
Hump depth	47.2″ (1200 mm)	29.5″ (750 mm)	27.6″ (700 mm)	24.0″ (610 mm)
Throat depth	11.8″ (300 mm)	9.8″ (250 mm)	11.0″ (280 mm)	8.5″ (215 mm)
Inside-diameter cutting	Yes	Yes	Yes	No
Centre clamp	Hydraulic	Pneumatic (116 psi air)	Manual	Manual
Dimensions L × W × H	118 × 30 × 55″ (3000 × 760 × 1400 mm)	79 × 24 × 55″ (2000 × 610 × 1400 mm)	55 × 16 × 51″ (1400 × 410 × 1300 mm)	59 × 16 × 51″ (1500 × 410 × 1300 mm)
Weight	2,976 lb (1,350 kg)	1,653 lb (750 kg)	772 lb (350 kg)	529 lb (240 kg)

Cutting capacities are for mild steel; thin sheet is given in gauge with the manufacturer's nominal metric value in brackets. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by ISITAN — CE certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SFB 38-CNC/A5 · 51-CNC/A5 · 65-CNC/A5

SFB CNC/A5 — 5-AXIS SERVO CNC MANDREL TUBE BENDERS



MODEL SFB · ISITAN SFB 38-CNC/A5 5-AXIS SERVO CNC MANDREL TUBE BENDER WITH 21" TOUCHSCREEN CONTROL



SFB 38-CNC with the mobile 21" touchscreen CNC control unit



SFB CNC control — 3D bending simulation with collision warning

Ø1-1/2" – Ø2-1/2" × 11 ga · 5 servo axes · 21" touchscreen CNC with 3D simulation

Fully servo-driven CNC mandrel benders with five axes: servo feed (Y), rotation (B) and bend (C) plus two servo roll-bending axes, so the same machine draw-bends tight radii with the mandrel and roll-bends large sweeps without a tooling change. A mobile 21" touchscreen CNC with 3D simulation, spring-back and hardness compensation, X-Y-Z to Y-B-C conversion and automatic job reports — for exhaust, chassis, seating and fitness-frame production in Ø1-1/2" to Ø2-1/2" tube.

STANDARD FEATURES

- ✓ Servo-motorized feeding (Y), rotation (B) and bending (C) axes; two axes move together; rotation tolerance ±0.1°
- ✓ Servo roll-bending axes for large-radius sweeps on the same machine
- ✓ Mobile CNC control unit with 21" TFT touchscreen; 3D bending simulation with collision warning; spring-back calculation; hardness compensation
- ✓ X-Y-Z to Y-B-C conversion; tube-length and bending-time calculation; daily, weekly and monthly reports e-mailed automatically; remote assistance
- ✓ Hydraulic clamping, mandrel, pressure die, linear slider and collet; bending with or without mandrel; manual and automatic operation
- ✓ Safety plate behind the bending head; mobile foot pedal with emergency stop; electrical cabinet cooler; lockable panel with safety interlock; overload protection; 1 die set (3 pieces) in requested size

OPTIONAL EQUIPMENT


- + Extra die sets; ball mandrel and wiper die
- + Extended mandrel length (up to 20 ft)
- + Automatic mandrel lubrication (SFB 51 / 65)
- + Hydraulic oil cooler and oil heater
- + Safety mat 30 × 39" or 39 × 59"
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

DETAILS, COMPONENTS AND OPTIONS

SFB CNC/A5 — 5-AXIS SERVO CNC MANDREL TUBE BENDERS



SFB CNC — hydraulic mandrel and collet

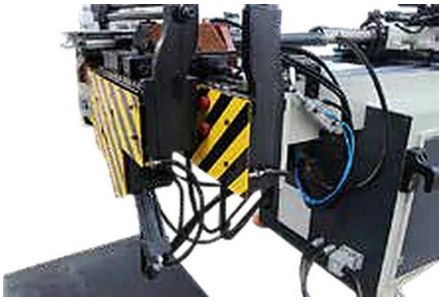

SFB CNC — safety plate behind the bending head



SFB CNC — hydraulic oil cooler



Typical CNC-bent part — seating frame



Typical CNC-bent part — fitness equipment frame

TECHNICAL SPECIFICATIONS

SFB CNC/A5 — 5-AXIS SERVO CNC MANDREL TUBE BENDERS

SFB CNC/A5 — 5-AXIS

Y + B + C servo axes plus servo roll-bending axes

Model	SFB 38-CNC/A5	SFB 51-CNC/A5	SFB 65-CNC/A5
Max. tube capacity OD × wall, mild steel	**Ø1-1/2" × 11 ga (Ø38 × 3 mm)**	**Ø2" × 11 ga (Ø51 × 3 mm)**	**Ø2-1/2" × 11 ga (Ø65 × 3 mm)**
Max. bending radius (CLR)	9.8" (250 mm)	9.8" (250 mm)	9.8" (250 mm)
Max. bending angle	190°	190°	190°
Hydraulic pressure	730 – 2,900 psi (50 – 200 bar)	730 – 2,900 psi (50 – 200 bar)	730 – 2,900 psi (50 – 200 bar)
Working length	**9.8 ft · 118.1" (3000 mm)**	**9.8 ft · 118.1" (3000 mm)**	**9.8 ft · 118.1" (3000 mm)**
Rotation tolerance	±0.1°	±0.1°	±0.1°
Bending speed	Adjustable	Adjustable	Adjustable
Motor power	20 HP (15 kW)	30 HP (22 kW)	30 HP (22 kW)
Dimensions L × W × H	217 × 51 × 63" (5500 × 1300 × 1600 mm)	250 × 55 × 63" (6350 × 1400 × 1600 mm)	250 × 55 × 63" (6350 × 1400 × 1600 mm)
Weight	4,960 lb (2,250 kg)	8,267 lb (3,750 kg)	8,708 lb (3,950 kg)

Tube capacities are for mild steel tube, shown as outside diameter × wall (nearest gauge or fraction). CLR = centreline radius of the bend die. Working length is the maximum tube length fed into the bender with the standard mandrel rod. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by ISITAN — CE certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SFB 38 · 51 · 65 · 76 · 90-CNC/A3

SFB CNC/A3 — 3-AXIS SERVO CNC MANDREL TUBE & PIPE BENDERS



MODEL SFB · ISITAN SFB 38-CNC/A3 CNC MANDREL TUBE BENDER, Ø1-1/2" × 11 GA



ISITAN SFB 51-CNC/A3 CNC mandrel tube bender, Ø2" × 11 ga



ISITAN SFB 76-CNC/A3 CNC mandrel pipe bender, Ø3" × 8 ga

Ø1-1/2" × 11 ga to Ø3-1/2" × 8 ga · 3 servo axes · 9.8 / 13.1 ft feed

The production CNC mandrel bender in five sizes from Ø1-1/2" tube to Ø3-1/2" × 8 ga pipe. Servo feed, rotation and bend axes on the 38, 51 and 65 (geared electric bending drive on the 76 and 90), the same 21" touchscreen CNC with 3D simulation as the A5, hydraulic mandrel, collet and clamping, and a standard oil cooler for shift work. The CNC tube bender for multi-bend parts — handrails, exhaust and automotive tube, furniture and fabricated assemblies — with 9.8 or 13.1 ft of feed.

STANDARD FEATURES

- ✓ Servo-motorized feeding (Y) and rotation (B) axes; servo bending axis on SFB 38 / 51 / 65, geared electric bending drive on SFB 76 / 90
- ✓ Mobile CNC control unit with 21" TFT touchscreen; 3D simulation; spring-back calculation; hardness compensation; all profile types (round, square, rectangular)
- ✓ X-Y-Z to Y-B-C conversion; tube-length and cycle-time estimate; job reports over the local network; remote assistance
- ✓ Hydraulic clamping, mandrel, pressure die, linear slider and collet; hydraulic oil cooler standard; automatic mandrel lubrication on SFB 38-CNC/A3
- ✓ Bending with or without mandrel; manual and automatic operation; mobile foot pedal with emergency stop
- ✓ Safety plate behind the bending head; electrical cabinet cooler; lockable panel with safety interlock; overload protection; 1 die set (3 pieces) in requested size

OPTIONAL EQUIPMENT

- + Extra die sets; ball mandrel and wiper die
- + Extended mandrel length (up to 20 ft)
- + Automatic mandrel lubrication (SFB 51 / 65 / 76 / 90)
- + Hydraulic oil heater
- + Safety mat 30 × 39" or 39 × 59"
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

DETAILS, COMPONENTS AND OPTIONS

SFB CNC/A3 — 3-AXIS SERVO CNC MANDREL TUBE & PIPE BENDERS



ISITAN SFB 90-CNC/A3 CNC mandrel pipe bender, Ø3-1/2" × 8 ga



ISITAN SFB 38-CNC — bending head, servo rotation and feed axes

TECHNICAL SPECIFICATIONS

SFB CNC/A3 — 3-AXIS SERVO CNC MANDREL TUBE & PIPE BENDERS

SFB CNC/A3 — 3-AXIS

Y + B + C servo axes

Model	SFB 38-CNC/A3	SFB 51-CNC/A3	SFB 65-CNC/A3	SFB 76-CNC/A3	SFB 90-CNC/A3
Max. tube capacity OD × wall, mild steel	**Ø1-1/2″ × 11 ga (Ø38 × 3 mm)**	**Ø2″ × 11 ga (Ø51 × 3 mm)**	**Ø2-1/2″ × 11 ga (Ø65 × 3 mm)**	**Ø3″ × 8 ga (Ø76 × 4 mm)**	**Ø3-1/2″ × 8 ga (Ø90 × 4 mm)**
Max. bending radius (CLR)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)
Max. bending angle	190°	190°	190°	190°	190°
Hydraulic pressure	730 – 2,610 psi (50 – 180 bar)	730 – 2,610 psi (50 – 180 bar)	730 – 2,610 psi (50 – 180 bar)	730 – 2,610 psi (50 – 180 bar)	730 – 2,610 psi (50 – 180 bar)
Working length	**9.8 ft · 118.1″ (3000 mm)**	**9.8 ft · 118.1″ (3000 mm)**	**9.8 ft · 118.1″ (3000 mm)**	**13.1 ft · 157.5″ (4000 mm)**	**13.1 ft · 157.5″ (4000 mm)**
Rotation tolerance	±0.1°	±0.1°	±0.1°	±0.1°	±0.1°
Bending speed	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable
Bending drive	Servo	Servo	Servo	Geared electric	Geared electric
Motor power	14 HP (11 kW)	21 HP (15 kW)	21 HP (15 kW)	27 HP (20 kW)	34 HP (25 kW)
Dimensions L × W × H	177 × 47 × 59″ (4500 × 1200 × 1500 mm)	195 × 51 × 63″ (4950 × 1300 × 1600 mm)	195 × 51 × 63″ (4950 × 1300 × 1600 mm)	236 × 57 × 69″ (6000 × 1450 × 1750 mm)	236 × 57 × 69″ (6000 × 1450 × 1750 mm)
Weight	2,866 lb (1,300 kg)	3,858 lb (1,750 kg)	4,079 lb (1,850 kg)	6,945 lb (3,150 kg)	7,385 lb (3,350 kg)

Tube capacities are for mild steel tube, shown as outside diameter × wall (nearest gauge or fraction). CLR = centreline radius of the bend die. Working length is the maximum tube length fed into the bender with the standard mandrel rod. Dimensions are overall L × W × H.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by ISITAN — CE certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SFB 32-HD (PLC HYDRAULIC) · SFB 32-M (MOTORIZED)

SFB 32-HD · SFB 32-M — COMPACT MANDREL TUBE BENDERS

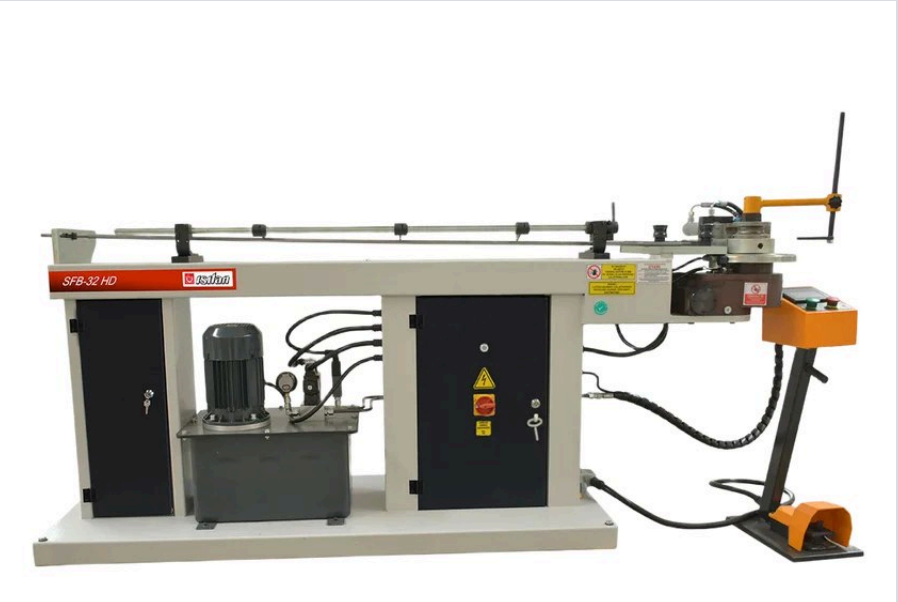

MODEL SFB · ISITAN SFB 32-HD COMPACT PLC HYDRAULIC MANDREL TUBE BENDER, Ø1-1/4" × 11 GA



ISITAN SFB 32-M compact motorized mandrel tube bender, Ø1-1/4" × 11 ga

Ø1-1/4" × 11 ga · PLC hydraulic or motorized · 91" footprint

Compact mandrel benders for Ø1-1/4" × 11 ga tube in a 91" footprint: the SFB 32-HD with PLC control, 4.7" touchscreen, 20 programs of 10 bends and hydraulic clamping, and the SFB 32-M, a motorized bender with manual clamping and angle scale. Both have a direct gear-drive reducer, brake motor, square attachment and support pulley — the entry point to mandrel bending for handrail, furniture and small-tube work.

STANDARD FEATURES

- ✓ SFB 32-HD: PLC control with 4.7" TFT touchscreen, 20-program memory with 10 sequential bends per program, hydraulic clamping, gauge-distance attachment, overload protection
- ✓ SFB 32-M: motorized bending with manual clamping and manual angle scale, gauge-distance bracket
- ✓ Bending system with special direct gear-drive reducer; brake motor for precise bends
- ✓ Square attachment and support pulley; mobile foot pedal with emergency stop
- ✓ Lockable electrical panel with safety interlock; CE certified; 1 die set in requested size

OPTIONAL EQUIPMENT

- + Extra die sets in requested size
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

TECHNICAL SPECIFICATIONS

SFB 32-HD · SFB 32-M — COMPACT MANDREL TUBE BENDERS

SFB 32 — COMPACT MANDREL BENDERS

PLC hydraulic and motorized

Model	SFB 32-HD	SFB 32-M
Max. tube capacity OD × wall, mild steel	**Ø1-1/4" × 11 ga (Ø32 × 3 mm)**	**Ø1-1/4" × 11 ga (Ø32 × 3 mm)**
Max. bending radius (CLR)	9.8" (250 mm)	9.8" (250 mm)
Max. bending angle	190°	190°
Hydraulic pressure	730 – 2,610 psi (50 – 180 bar)	— (motorized)
Working length	**6.9 ft · 82.7" (2100 mm)**	**4.9 ft · 59.1" (1500 mm)**
Control	PLC with 4.7" touchscreen · 20 programs	Manual angle scale · foot pedal
Clamping	Hydraulic	Manual
Motor power	5 HP (3.7 kW)	3 HP (2.2 kW)
Hydraulic oil tank	20 L	—
Dimensions L × W × H	91 × 43 × 45" (2300 × 1100 × 1150 mm)	91 × 43 × 45" (2300 × 1100 × 1150 mm)
Weight	794 lb (360 kg)	639 lb (290 kg)

Tube capacities are for mild steel tube, shown as outside diameter × wall (nearest gauge or fraction). CLR = centreline radius of the bend die. Working length is the maximum tube length fed into the bender with the standard mandrel rod. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by ISITAN — CE certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SFB 38-NC/A2 (WITH CARRIER) · SFB 38-NC/A

SFB 38-NC/A2 · SFB 38-NC/A — NC ALUMINUM-PROFILE BENDING MACHINES



MODEL SFB · ISITAN SFB 38-NC/A2 NC ALUMINUM-PROFILE BENDER WITH CARRIER



ISITAN SFB 38-NC/A NC aluminum-profile bender for window and door frames

Aluminum window & door profiles · 10" touchscreen NC · dies to your profile drawing

NC benders built for aluminum window, door and frame profiles: special profile dies made to your section drawing, hydraulic support and clamping, a hydraulic tooling clamp and the 10" touchscreen NC with 100 programs. The NC/A2 adds a carrier with rotation and feed for arched frames and repeat work. Special production — quoted with the profile drawing.

STANDARD FEATURES

- ✓ 1 special aluminum-profile bending die set in requested size; hydraulic tooling clamp
- ✓ Mobile NC control unit with 10" TFT touchscreen; 100-program memory, 20 bends per program; working-status reports, error and warning messages
- ✓ Electric bending drive with reducer; bending angle measured by encoder; hydraulic support and clamping
- ✓ Mobile foot pedal with emergency stop; safety plate behind the bending head; gauge-distance bracket
- ✓ Lockable electrical panel with safety interlock; overload protection

OPTIONAL EQUIPMENT

- + Additional profile die sets
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

TECHNICAL SPECIFICATIONS

SFB 38-NC/A2 · SFB 38-NC/A — NC ALUMINUM-PROFILE BENDING MACHINES

SFB 38-NC/A2 · NC/A — ALUMINUM-PROFILE BENDERS

Special tooling for window, door and frame profiles

Model	SFB 38-NC/A2	SFB 38-NC/A
Profile capacity	**Aluminum window and door profiles — quoted per profile drawing**	**Aluminum window and door profiles — quoted per profile drawing**
Max. bending radius (CLR)	9.8" (250 mm)	9.8" (250 mm)
Max. bending angle	190°	190°
Hydraulic pressure	730 – 2,610 psi (50 – 180 bar)	730 – 2,610 psi (50 – 180 bar)
Working length	**9.8 ft · 118.1" (3000 mm)**	**9.8 ft · 118.1" (3000 mm)**
Carrier	Yes — rotation and feed on carrier	No — standard feed
Bending speed	Adjustable	Adjustable
Motor power	9.4 HP (7 kW)	7.4 HP (5.5 kW)
Dimensions L × W × H	177 × 45 × 39" (4500 × 1150 × 1000 mm)	177 × 45 × 53" (4500 × 1150 × 1350 mm)

Profile-bending dies are made to the customer's profile drawing; capacity depends on the profile section and alloy. Tube capacities are for mild steel tube, shown as outside diameter × wall (nearest gauge or fraction). CLR = centreline radius of the bend die. Working length is the maximum tube length fed into the bender with the standard mandrel rod. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by ISITAN — CE certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SFB 38 · 51 · 65 · 76-NC/C

SFB NC/C — NC MANDREL TUBE BENDERS WITH SERVO-ROTATION CARRIER



MODEL SFB · ISITAN SFB 38-NC/C NC MANDREL TUBE BENDER WITH CARRIER, Ø1-1/2" × 11 GA



ISITAN SFB 51-NC/C NC mandrel tube bender with carrier, Ø2" × 11 ga



ISITAN SFB 90-NC/C NC mandrel pipe bender with servo-rotation carrier, Ø3-1/2" × 8 ga

Ø1-1/2" × 11 ga to Ø3" × 8 ga · servo rotation on carrier · 10" touchscreen NC

An NC mandrel bender with a carrier: the hydraulic collet holds the tube, a servo motor — the same as on the CNC models — rotates it between bends to very low tolerance, and the operator feeds to adjustable stops on the carrier slide while a screen on the carrier shows feed length and rotation angle. Faster and more repeatable than a standard NC bender for series production of furniture, lighting, metal accessories and handrail parts, at a fraction of the price of a CNC.

STANDARD FEATURES

- ✓ NC carrier: servo-motorized rotation axis (B), hydraulic collet, manual feeding axis (Y) with adjustable stoppers, screen on the carrier
- ✓ Five hydraulic cylinders: slider support, clamping, mandrel, pressure die and collet
- ✓ NC control unit with 10" touchscreen on a mobile panel; 100-program memory, 20 bends per program; working-status reports, error and warning messages
- ✓ Electric bending axis (C) with reducer and brake motor for precise bends; bending angle measured by encoder; bending with or without mandrel
- ✓ Mobile foot pedal with emergency stop; safety plate behind the bending head; overload protection; CE certified; 1 die set in requested size

OPTIONAL EQUIPMENT

- + Motorized feeding (Y axis)
- + Extra die sets; ball mandrel; wiper die
- + Extended mandrel length (up to 20 ft)
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

DETAILS, COMPONENTS AND OPTIONS

SFB NC/C — NC MANDREL TUBE BENDERS WITH SERVO-ROTATION CARRIER



SFB NC/C — servo rotation axis and hydraulic collet on the carrier



SFB NC/C — servo-motorized rotation axis, the same servo as the CNC models

TECHNICAL SPECIFICATIONS

SFB NC/C — NC MANDREL TUBE BENDERS WITH SERVO-ROTATION CARRIER

SFB NC/C — WITH CARRIER

Servo rotation axis and hydraulic collet on the carrier

Model	SFB 38-NC/C	SFB 51-NC/C	SFB 65-NC/C	SFB 76-NC/C
Max. tube capacity OD × wall, mild steel	**Ø1-1/2″ × 11 ga (Ø38 × 3 mm)**	**Ø2″ × 11 ga (Ø51 × 3 mm)**	**Ø2-1/2″ × 11 ga (Ø65 × 3 mm)**	**Ø3″ × 8 ga (Ø76 × 4 mm)**
Max. bending radius (CLR)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)	9.8″ (250 mm)
Max. bending angle	190°	190°	190°	190°
Hydraulic pressure	730 – 2,610 psi (50 – 180 bar)	730 – 2,610 psi (50 – 180 bar)	730 – 2,610 psi (50 – 180 bar)	730 – 2,610 psi (50 – 180 bar)
Working length	**9.8 ft · 118.1″ (3000 mm)**	**9.8 ft · 118.1″ (3000 mm)**	**9.8 ft · 118.1″ (3000 mm)**	**13.1 ft · 157.5″ (4000 mm)**
Bending speed	Adjustable	Adjustable	Adjustable	Adjustable
Motor power	7.1 HP (5.3 kW)	12 HP (9 kW)	15 HP (11 kW)	22 HP (16.5 kW)
Dimensions L × W × H	177 × 45 × 65″ (4500 × 1150 × 1650 mm)	191 × 59 × 73″ (4850 × 1500 × 1850 mm)	191 × 59 × 73″ (4850 × 1500 × 1850 mm)	236 × 63 × 73″ (6000 × 1600 × 1850 mm)
Weight	2,646 lb (1,200 kg)	3,638 lb (1,650 kg)	3,858 lb (1,750 kg)	6,614 lb (3,000 kg)

Tube capacities are for mild steel tube, shown as outside diameter × wall (nearest gauge or fraction). CLR = centreline radius of the bend die. Working length is the maximum tube length fed into the bender with the standard mandrel rod. Dimensions are overall L × W × H. The SFB 90-NC/C carrier model is built to order.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by ISITAN — CE certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SFB 38 · 51 · 65 · 76 · 90-NC

SFB NC — NC MANDREL TUBE & PIPE BENDERS



MODEL SFB · ISITAN SFB 38-NC NC MANDREL TUBE BENDER, Ø1-1/2" × 11 GA



ISITAN SFB 51-NC NC mandrel tube bender, Ø2" × 11 ga



ISITAN SFB 65-NC NC mandrel tube bender, Ø2-1/2" × 11 ga

Ø1-1/2" × 11 ga to Ø3-1/2" × 8 ga · 10" touchscreen NC · 11.8 / 15.1 ft feed

ISITAN's best-selling mandrel bender: a 10" touchscreen NC with 100 programs of 20 sequential bends, hydraulic mandrel, clamping and pressure die, an electric bending drive with brake motor and encoder angle measurement, and the longest feed in the range at 11.8 or 15.1 ft. Five sizes from Ø1-1/2" × 11 ga to Ø3-1/2" × 8 ga — the pipe bending machine for exhaust shops, handrail and fence fabricators, trailer and chassis builders and job shops bending with or without a mandrel.

STANDARD FEATURES

- ✓ NC control unit with 10" TFT touchscreen; 100-program memory, 20 sequential bends per program; working-status reports, error and warning messages
- ✓ Electric bending drive with reducer (direct-drive reducer on 76 and 90 NC); brake motor for precise bends; bending angle measured by encoder
- ✓ Four hydraulic cylinders: slider support, clamping, mandrel and pressure die; bending with or without mandrel
- ✓ Gauge-distance bracket; mobile foot pedal with emergency stop; safety plate on the bending head
- ✓ Lockable electrical panel with safety interlock; overload protection; 1 die set in requested size

OPTIONAL EQUIPMENT

- + Manual carrier
- + Extra die sets in requested size; ball mandrel; wiper die
- + Extended mandrel length (up to 20 ft)
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

DETAILS, COMPONENTS AND OPTIONS

SFB NC — NC MANDREL TUBE & PIPE BENDERS



ISITAN SFB 76-NC NC mandrel pipe bender, Ø3" × 8 ga



ISITAN SFB 90-NC NC mandrel pipe bender, Ø3-1/2" × 8 ga



ISITAN SFB 38-NC with the optional manual carrier



SFB 65-NC — electric bending drive with reducer and 10" touchscreen NC



SFB 90-NC — direct-drive reducer on the 76 and 90 models

TECHNICAL SPECIFICATIONS

SFB NC — NC MANDREL TUBE & PIPE BENDERS

SFB NC

10" touchscreen NC, hydraulic mandrel

Model	SFB 38-NC	SFB 51-NC	SFB 65-NC	SFB 76-NC	SFB 90-NC
Max. tube capacity OD × wall, mild steel	**Ø1-1/2" × 11 ga (Ø38 × 3 mm)**	**Ø2" × 11 ga (Ø51 × 3 mm)**	**Ø2-1/2" × 11 ga (Ø65 × 3 mm)**	**Ø3" × 8 ga (Ø76 × 4 mm)**	**Ø3-1/2" × 8 ga (Ø90 × 4 mm)**
Max. bending radius (CLR)	9.8" (250 mm)	9.8" (250 mm)	9.8" (250 mm)	9.8" (250 mm)	9.8" (250 mm)
Max. bending angle	190°	190°	190°	190°	190°
Hydraulic pressure	730 – 2,610 psi (50 – 180 bar)	730 – 2,610 psi (50 – 180 bar)	730 – 2,610 psi (50 – 180 bar)	730 – 2,610 psi (50 – 180 bar)	730 – 2,610 psi (50 – 180 bar)
Working length	**11.8 ft · 141.7" (3600 mm)**	**11.8 ft · 141.7" (3600 mm)**	**11.8 ft · 141.7" (3600 mm)**	**15.1 ft · 181.1" (4600 mm)**	**15.1 ft · 181.1" (4600 mm)**
Bending speed	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable
Bending drive	Electric with reducer	Electric with reducer	Electric with reducer	Direct-drive reducer	Direct-drive reducer
Hydraulic oil tank	40 L	70 L	70 L	100 L	100 L
Motor power	7 HP (5.2 kW)	11 HP (8 kW)	14 HP (10.5 kW)	20 HP (15 kW)	25 HP (18.5 kW)
Dimensions L × W × H	177 × 45 × 55" (4500 × 1150 × 1400 mm)	191 × 59 × 59" (4850 × 1500 × 1500 mm)	191 × 59 × 59" (4850 × 1500 × 1500 mm)	236 × 63 × 63" (6000 × 1600 × 1600 mm)	236 × 63 × 63" (6000 × 1600 × 1600 mm)
Weight	2,205 lb (1,000 kg)	3,417 lb (1,550 kg)	3,527 lb (1,600 kg)	5,842 lb (2,650 kg)	6,283 lb (2,850 kg)

Tube capacities are for mild steel tube, shown as outside diameter × wall (nearest gauge or fraction). CLR = centreline radius of the bend die. Working length is the maximum tube length fed into the bender with the standard mandrel rod. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by ISITAN — CE certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

BK-42 · BK-050 · BK-H 060 · BK 030 (76)

BK SERIES — ROTARY DRAW TUBE & PROFILE BENDERS (NON-MANDREL)



MODEL BK · ISITAN BK-42 ROTARY DRAW TUBE BENDER, Ø1-5/8" × 11 GA STEEL TUBE



ISITAN BK-050 rotary draw tube bender, Ø2-3/8" × 11 ga steel tube, NC touchscreen



ISITAN BK-H 060 hydraulic rotary draw tube bender, 0–210°

1/8" to 2-1/2" NPS pipe · Ø3" × 11 ga steel tube · touchscreen NC or one-touch control

Compact rotary draw benders for tube, pipe, solid bar, flat bar and box section — one tooling set included. The BK-42 and BK 030 (76) have touchscreen NC (PLC) programming with 20 programs of 10 bends, quick-change tooling and a digital angle display; the BK-050 and hydraulic BK-H 060 use a one-touch control any operator can program, with two bending speeds and a foot pedal. From 1-1/4" NPS pipe on the BK-42 to Ø3" × 11 ga steel tube on the BK 030 — the bench of handrail, gate, fence and furniture shops.

STANDARD FEATURES

- ✓ BK-42 and BK 030 (76): touchscreen programming of bend angle, multilingual diagnostics, 20 programs of 10 lines with NC (PLC) control, quick-change tooling, sequential bends with high repeatability, digital display of bend angle
- ✓ BK-050 and BK-H 060: one-touch control — any operator can program and store bend angles; two bending speeds; bend from the control panel or the foot pedal
- ✓ BK-H 060: hydraulic, draws the tube from one direction for easier sequential bending; one-piece solid bronze counter-bend die, swiveling bend head, angle indicator, 0–210°
- ✓ Foot-pedal control for hands-free operation; mobile on rollers with handle; compact design
- ✓ 1 tooling set (bend die, clamp die, counter die) in requested size; CE certified

OPTIONAL EQUIPMENT


- + Additional tooling for other diameters and profiles
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

DETAILS, COMPONENTS AND OPTIONS

BK SERIES — ROTARY DRAW TUBE & PROFILE BENDERS (NON-MANDREL)



ISITAN BK 030 (76) rotary draw pipe bender, Ø3" × 11 ga steel tube

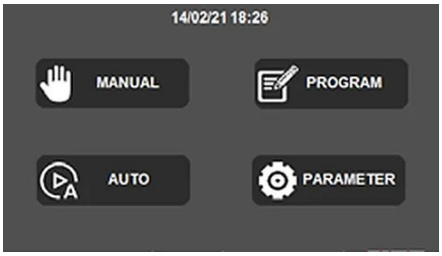

BK series — touchscreen with manual, program, auto and parameter modes



BK series — NC (PLC) control panel with digital angle display



Tooling sets for BK rotary draw benders — bend die, clamp die and counter die



Typical rotary-draw-bent part — stainless tube frame

TECHNICAL SPECIFICATIONS

BK SERIES — ROTARY DRAW TUBE & PROFILE BENDERS (NON-MANDREL)

BK SERIES — ROTARY DRAW BENDERS (NON-MANDREL)

Machine data

Model	BK-42	BK-050	BK-H 060	BK 030 (76)
Tube capacity pipe size, NPS	**1/8" – 1-1/4"**	**1/8" – 2"**	**1/8" – 2"**	**1/8" – 2-1/2"**
Max. bending radius (CLR)	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)
Bending angle	Programmed	Programmed	0 – 210°	Programmed
Control	Touchscreen NC (PLC) · 20 programs	One-touch control · two speeds	One-touch control · two speeds · hydraulic	Touchscreen NC (PLC) · 20 programs
Motor power	1 HP (0.75 kW)	3 HP (2.2 kW)	3 HP (2.2 kW)	3 HP (2.2 kW)
Hydraulic oil tank	—	—	25 L	—
Dimensions L × W × H	22 × 18 × 41" (560 × 460 × 1040 mm)	30 × 22 × 43" (760 × 560 × 1090 mm)	30 × 22 × 43" (760 × 560 × 1090 mm)	30 × 22 × 43" (760 × 560 × 1090 mm)
Weight	243 lb (110 kg)	309 lb (140 kg)	311 lb (141 kg)	397 lb (180 kg)

BK SERIES — MAXIMUM BENDING CAPACITIES

At maximum, with matching tooling · tube as OD × wall

Model	BK-42	BK-050	BK-H 060	BK 030 (76)
Gas pipe (Sch. 40)	1-1/4" NPS	2" NPS	—	—
Steel tube	**Ø1-5/8" × 11 ga**	**Ø2-3/8" × 11 ga**	**Ø2-3/8" × 11 ga**	**Ø3" × 11 ga**
Stainless steel tube (304/316)	Ø1-5/8" × 14 ga	Ø2-3/8" × 14 ga	Ø2-3/8" × 12 ga	Ø2-3/4" × 8 ga
Hard copper & aluminum tube	Ø2-1/8" × 14 ga	Ø2-1/2" × 8 ga	Ø2-3/8" × 3/16"	Ø3" × 1/4"
Solid round bar	Ø1-1/8"	Ø1-3/8"	Ø1-3/4"	Ø1-3/4"
Solid square / rectangular bar	1/4" × 1-5/8"	3/8" × 2-3/8"	1-1/8" × 2-3/8"	3/8" × 3-1/2"
Flat bar — hard way	1-5/8" × 1/2"	2-3/8" × 5/8"	2-3/8" × 5/8"	3" × 9/16"
Flat bar — easy way	1-5/8" × 13/16"	2-3/8" × 1-1/8"	2-3/8" × 1-1/8"	3" × 1-1/8"
Box section	1-5/8" × 13/16" × 12 ga	2-3/8" × 1-1/8" × 8 ga	2-3/8" × 1-1/8" × 8 ga	2-3/4" × 1-5/8" × 8 ga

Rotary draw (non-mandrel) bending — tube is bent around a die without an internal mandrel, so wall thickness and CLR limits are tighter than on the SFB mandrel benders. Capacities are at maximum with matching tooling; one tooling set is included. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by ISITAN — CE certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

PN 17/90 · PN 20/76

PN 17/90 · PN 20/76 — MOTORIZED PIPE NOTCHING MACHINES



MODEL PN · ISITAN PN 17/90 MOTORIZED BELT-SANDER TUBE NOTCHER, 11/16" TO 3-1/2" OD



ISITAN PN 20/76 compact tube notcher with movable clamp, 13/16" to 3" OD

Tube 11/16" to 3-1/2" OD · notching to 50° · 10 dovetail drums included

Belt-sander tube notchers that cope a saddle on the end of a tube in seconds for welded handrail, roll-cage, furniture and frame joints. Ten dovetail drums from Ø3/4" to 3" are standard — pick the drum for the tube you are joining, clamp the workpiece in the moving clamp and notch square or at any angle up to 50°. The PN 17/90 takes tube from 11/16" to 3-1/2" OD on a 4 × 47" belt; the PN 20/76 is the compact notcher with a movable clamp, 13/16" to 3" OD on a 4 × 79" belt.

STANDARD FEATURES

- ✓ 10 dovetail drums standard: Ø3/4", 13/16", 1", 1-1/4", 1-1/2", 1-5/8", 1-7/8", 2", 2-3/8", 3" — quickly opens the right dovetail for each tube diameter
- ✓ Fast clamping and release with the moving clamp; clamp moves left and right
- ✓ Notching at any angle up to 50° with the movable clamp
- ✓ PN 17/90: basic centering and easy belt adjustment, 4 × 47" belt
- ✓ PN 20/76: compact notcher with movable clamp, 4 × 79" belt
- ✓ 3 HP motor; CE certified

OPTIONAL EQUIPMENT

- + Special dovetail drums for other tube sizes
- + Sanding belts
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

PN — MOTORIZED PIPE NOTCHING MACHINES — TECHNICAL SPECIFICATIONS

Model	PN 17/90	PN 20/76
Notching capacity tube OD	**11/16" – 3-1/2" (Ø17 – 90 mm)**	**13/16" – 3" (Ø20 – 76 mm)**
Max. notching angle	50°	50°
Sanding belt	4 × 47" (100 × 1200 mm)	4 × 79" (100 × 2000 mm)
Dovetail drums included	10 · Ø3/4", 13/16", 1", 1-1/4", 1-1/2", 1-5/8", 1-7/8", 2", 2-3/8", 3"	10 · Ø3/4", 13/16", 1", 1-1/4", 1-1/2", 1-5/8", 1-7/8", 2", 2-3/8", 3"
Motor power	3 HP (2.2 kW)	3 HP (2.2 kW)
Dimensions L × W × H	43 × 33 × 47" (1100 × 850 × 1200 mm)	53 × 28 × 47" (1350 × 700 × 1200 mm)
Weight	375 lb (170 kg)	287 lb (130 kg)

Notching capacity is the tube outside diameter; dovetail drums for other sizes are optional. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

SFF 90-1 · SFF 60-1

SFF 90-1 · SFF 60-1 — SINGLE-STATION HYDRAULIC PIPE-END FORMING MACHINES



MODEL SFF · ISITAN SFF 90-1 SINGLE-STATION HYDRAULIC PIPE-END FORMER, EXPAND AND REDUCE TO Ø3-1/2"



ISITAN SFF 60-1 single-station hydraulic pipe-end former, expand and reduce to Ø2-3/8"



SFF end former — easy tool-changing system with the end-forming tooling set

Expand and reduce tube ends to Ø3-1/2" × 14 ga · one tooling set included

Hydraulic end formers that expand or reduce (collapse) a tube end with one tooling set, for exhaust slip joints, handrail sleeves, telescoping tube and furniture connectors. The SFF 90-1 expands Ø1-3/8" to 3-1/2" and reduces down from Ø5/16" in 14 ga mild steel with a 15 HP power unit; the SFF 60-1 covers tube to Ø2-3/8" with 10 HP. An easy tool-changing system swaps the forming set in minutes.

STANDARD FEATURES

- ✓ Expands or reduces (collapses) pipe ends in a single station
- ✓ 1 set of end-forming tooling in requested size; easy tool-changing system
- ✓ Hydraulic power unit — 15 HP on the SFF 90-1, 10 HP on the SFF 60-1
- ✓ Mobile foot pedal; CE certified

OPTIONAL EQUIPMENT

- + Additional end-forming tooling sets
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

SFF — SINGLE-STATION HYDRAULIC PIPE-END FORMING MACHINES — TECHNICAL SPECIFICATIONS

Model	SFF 90-1	SFF 60-1
Expanding capacity mild steel tube	**Ø1-3/8" – 3-1/2" × 14 ga (Ø35 – 90 × 2 mm)**	**Ø1-3/8" – 2-3/8" × 14 ga (Ø35 – 60 × 2 mm)**
Reducing capacity mild steel tube	**Ø5/16" – 3-1/2" × 14 ga (Ø8 – 90 × 2 mm)**	**Ø5/16" – 2-3/8" × 14 ga (Ø8 – 60 × 2 mm)**
Motor power	15 HP (11 kW)	10 HP (7.5 kW)
Dimensions L × W × H	51 × 28 × 45" (1300 × 700 × 1150 mm)	51 × 28 × 45" (1300 × 700 × 1150 mm)
Weight	1,301 lb (590 kg)	992 lb (450 kg)

Capacities are for mild steel tube at the wall thickness shown. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

SFC 350-VX · 13-3/4″ BLADE

SFC 350-VX — SEMI-AUTOMATIC CIRCULAR COLD SAW



MODEL SFC · ISITAN SFC 350-VX SEMI-AUTOMATIC CIRCULAR COLD SAW, 13-3/4″ BLADE, Ø4-1/2″ ROUND

13-3/4″ blade · Ø4-1/2″ round · semi-automatic, 45 / 80 rpm

A semi-automatic cold saw for short batch runs: foot-switch actuation, hydro-pneumatic head descent with a cutting-speed regulator and head stroke set to the material, so the operator loads and the saw cuts. Heavy-duty double gearbox, cast-iron base, two blade speeds and mitre cuts 45° each way — Ø4-1/2″ round and 3-7/8″ square mild steel on a 13-3/4″ HSS blade, burr-free and ready to weld.

STANDARD FEATURES

- ✓ Semi-automatic cycle: foot-switch actuation, hydro-pneumatic head descent with cutting-speed regulator; head stroke adjustable to material size
- ✓ Heavy-duty double gearbox; cast-iron base; two blade speeds 45 / 80 rpm
- ✓ Mitre cuts 45° right to 45° left; self-centering double split vise grips both sides of the material
- ✓ Wet-type cold sawing for clean, burr-free cuts; coolant pump and tank
- ✓ 24 V control voltage; CSA-approved panel; air supply 85 psi (8.5 cfm)

OPTIONAL EQUIPMENT

- + Saw blades for specific materials — TiN for medium-hard steel, TiCN for high-strength steel, TiAlN for stainless
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

TECHNICAL SPECIFICATIONS

SFC 350-VX — SEMI-AUTOMATIC CIRCULAR COLD SAW

SFC CIRCULAR COLD SAWS

Cutting capacities at 90° / 45°

Model	SFC 350-VX
Blade Ø	**13-3/4" (350 mm)**
Round — 90° / 45° mild steel	**Ø4-1/2" / Ø4-3/8"**
Square — 90°	**3-7/8" × 3-7/8"**
Square — 45°	**3-1/2" × 3-1/2"**
Rectangular — 90°	**4-3/4" × 3-1/8"**
Rectangular — 45°	**3-1/2" × 3-1/2"**
Mitre range	0 – 45° left and right
Blade speeds two-speed	**45 / 80 rpm**
Saw motor	2.4 – 3.0 HP (1.8 – 2.2 kW)
Installed power incl. 0.08 HP coolant pump	7.8 HP (5.8 kW)
Blade bore / pin holes	**32 mm / 2 × Ø11 mm**
Dimensions L × W × H	43 × 24 × 55" (1100 × 600 × 1400 mm)
Net weight	661 lb (300 kg)

Cutting capacities are for mild steel at 90° and 45°. Wet-type cold sawing with the standard coolant pump; TiN, TiCN and TiAlN-coated HSS blades are available for medium-hard, high-strength and stainless steel. Air supply for the SFC 350-VX: 85 psi, 8.5 cfm.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by ISITAN — CE certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee in-stock machines only
- ✓ Spare parts & technical support readily available in Canada
- ✓ Order today with just 10% down 0% down financing available
- ✓ Installation and training available

SFC 275-VP · 315-VP · 275-V · 315-V

SFC 275 / 315-VP · SFC 275 / 315-V — CIRCULAR COLD SAWS WITH PNEUMATIC OR MANUAL VISE



MODEL SFC · ISITAN SFC 315-VP CIRCULAR COLD SAW WITH PNEUMATIC VISE, 12-1/2" BLADE



ISITAN SFC 275-V manual circular cold saw, 10-3/4" blade, Ø3-3/8" round

10-3/4" and 12-1/2" blades · Ø3-3/8" and Ø4-1/8" round · pneumatic or manual vise

Pull-down circular cold saws with a 10-3/4" or 12-1/2" blade, two speeds and mitre cuts 45° left and right: the VP models clamp with an air-operated vise, the V models with a manual vise. Low-voltage start/stop trigger in the handle, a robust double-hinged pivot, a double split vise that grips both sides of the cut and a large base for stability — the metal cutting saw for tube, bar and profile in the fabrication shop, with a clean, burr-free cut the band saw cannot match.

STANDARD FEATURES

- ✓ SFC VP: air-operated material vise; SFC V: manually operated vise
- ✓ Low-voltage start/stop trigger in the pull-down handle; robust double-hinged pivot
- ✓ Mitre cuts 45° left and right; double split vise grips both sides of the material; self-centering vise optimizes the cutting position
- ✓ Two blade speeds 45 / 90 rpm; wet-type cold sawing for burr-free cuts; coolant pump and tank
- ✓ Large base for stability; 24 V control voltage; CSA-approved panel

OPTIONAL EQUIPMENT

- + Saw blades for specific materials — TiN for medium-hard steel, TiCN for high-strength steel, TiAlN for stainless
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

TECHNICAL SPECIFICATIONS

SFC 275 / 315-VP · SFC 275 / 315-V — CIRCULAR COLD SAWS WITH PNEUMATIC OR MANUAL VISE

SFC CIRCULAR COLD SAWS

Cutting capacities at 90° / 45°

Model	SFC 275-VP	SFC 315-VP	SFC 275-V	SFC 315-V
Blade Ø	**10-3/4" (275 mm)**	**12-1/2" (315 mm)**	**10-3/4" (275 mm)**	**12-1/2" (315 mm)**
Round — 90° / 45° mild steel	**Ø3-3/8" / Ø2-3/4"**	**Ø4-1/8" / Ø3-1/2"**	**Ø3-3/8" / Ø2-3/4"**	**Ø4-1/8" / Ø3-1/2"**
Square — 90°	**2-3/4" × 2-3/4"**	**3-3/8" × 3-3/8"**	**2-3/4" × 2-3/4"**	**3-3/8" × 3-3/8"**
Square — 45°	**2-3/8" × 2-3/8"**	**3-1/8" × 3-1/8"**	**2-3/8" × 2-3/8"**	**3-1/8" × 3-1/8"**
Rectangular — 90°	**3-3/4" × 2-3/8"**	**4-3/4" × 2-3/8"**	**3-3/4" × 2-3/8"**	**4-3/4" × 2-3/8"**
Rectangular — 45°	**2-3/4" × 2-1/8"**	**3-1/2" × 2-3/8"**	**2-3/4" × 2-1/8"**	**3-1/2" × 2-3/8"**
Mitre range	0 – 45° left and right	0 – 45° left and right	0 – 45° left and right	0 – 45° left and right
Blade speeds two-speed	**45 / 90 rpm**	**45 / 90 rpm**	**45 / 90 rpm**	**45 / 90 rpm**
Saw motor	1.7 – 2.4 HP (1.3 – 1.8 kW)	1.7 – 2.4 HP (1.3 – 1.8 kW)	1.7 – 2.4 HP (1.3 – 1.8 kW)	1.7 – 2.4 HP (1.3 – 1.8 kW)
Installed power incl. 0.08 HP coolant pump	5.0 HP (3.7 kW)	6.3 HP (4.7 kW)	5.0 HP (3.7 kW)	6.3 HP (4.7 kW)
Blade bore / pin holes	**32 mm / 2 × Ø11 mm**	**32 mm / 2 × Ø11 mm**	**32 mm / 2 × Ø11 mm**	**32 mm / 2 × Ø11 mm**
Dimensions L × W × H	39 × 24 × 55" (1000 × 600 × 1400 mm)	39 × 24 × 55" (1000 × 600 × 1400 mm)	39 × 24 × 55" (1000 × 600 × 1400 mm)	39 × 24 × 55" (1000 × 600 × 1400 mm)
Net weight	463 lb (210 kg)	441 lb (200 kg)	419 lb (190 kg)	441 lb (200 kg)

Cutting capacities are for mild steel at 90° and 45°. Wet-type cold sawing with the standard coolant pump; TiN, TiCN and TiAlN-coated HSS blades are available for medium-hard, high-strength and stainless steel.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Bursa, Turkey, by ISITAN — CE certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.