
PRESS BRAKE
TOOLING AND EQUIPMENT

UTENSILI E ATTREZZATURE
PER PRESSE PIEGATRICI

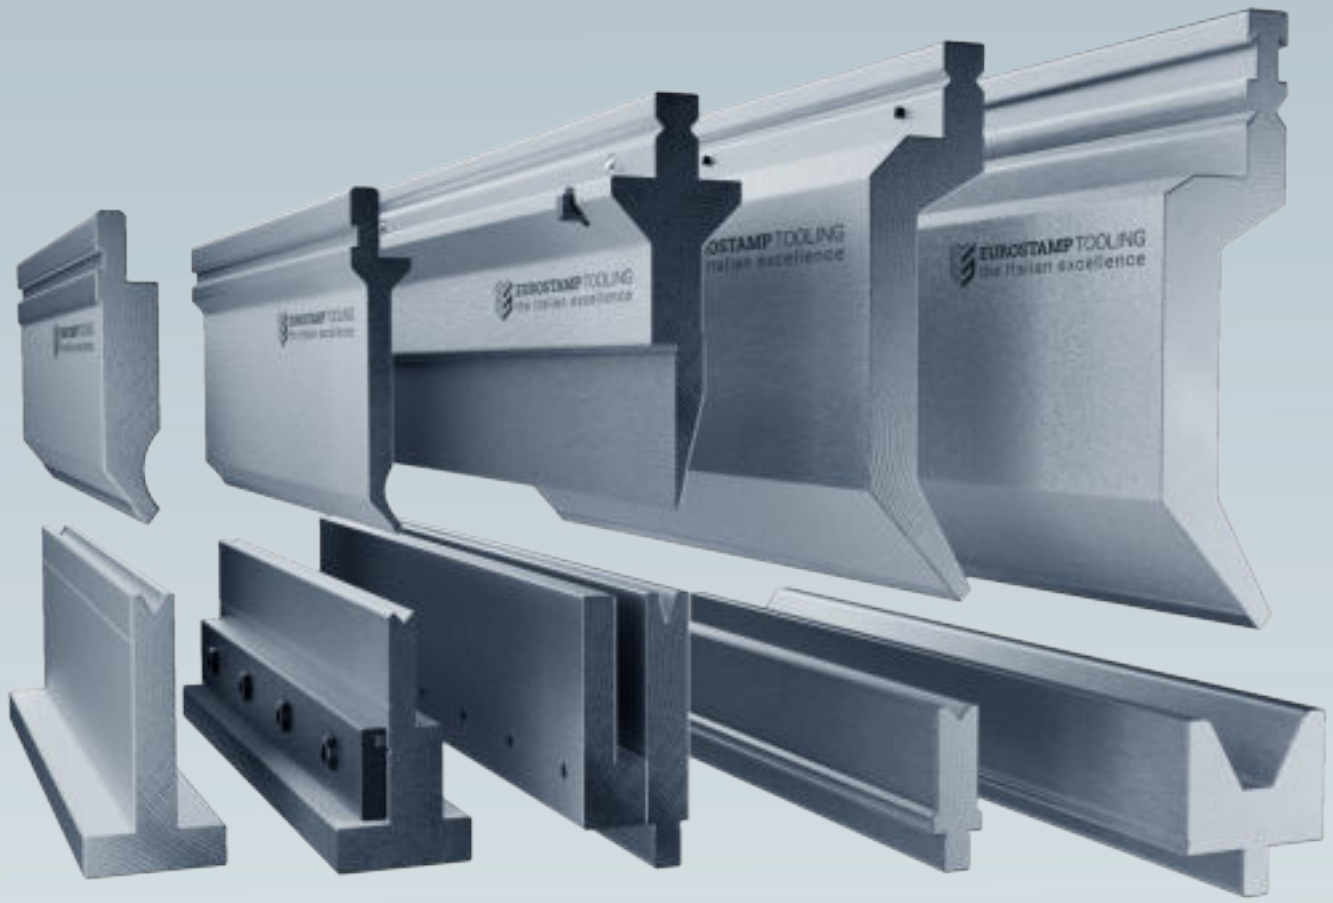

VERSIONE 05 - VERSION 05

EUROSTAMP TOOLING
the Italian excellence

EUROSTAMP TOOLING
the Italian excellence

Eurostamp Tooling significa qualità, competenza e precisione.

Dal 1970 produciamo utensili e attrezzature per la piegatura straordinariamente precisi, offrendo soluzioni di estrema qualità per tutti quei clienti che richiedono costantemente massimi livelli di performance e affidabilità.

Eurostamp Tooling means quality, competence, accuracy.

Since 1970 we have been manufacturing outstandingly accurate tooling and providing top quality solutions to all those customers who require the highest levels of performance and reliability.

Eurostamp Tooling,
the Italian Excellence

CHI SIAMO

L'azienda è stata creata nel 1970 e, sin da allora, siamo orgogliosi di produrre e commercializzare utensili e attrezzature per la piegatura altamente performanti, affidabili e caratterizzati dai più elevati standard di qualità. Il nostro parco macchine utensili a elevata tecnologia e il magazzino con ampia disponibilità ci permettono di soddisfare ogni esigenza e richiesta speciale.

I nostri utensili sono realizzati con acciai al carbonio e acciai speciali di provenienza italiana, con tempra a induzione sulle parti usurabili che ne garantisce una durezza di 55-60 HRC.

Offriamo un'ampia gamma di accessori per presse piegatrici: adattatori inferiori e superiori, sistemi di bloccaggio manuali e pneumatici.
Il nostro ufficio tecnico interno, inoltre, è in grado di studiare i progetti di piegatura personalizzati in modo tempestivo e accurato.

WHO WE ARE

Our company was born in 1970 and, since then, we have been proudly producing and marketing high performing and reliable press brake tooling distinguished by the highest quality standards. Our production department equipped with high-tech machine tools, complimented by our wide range inventory, allows us to meet our customer needs and expectations for standard and special tool requirements.

Our tooling is produced by using medium carbon steel C45, both raw and tempered, and Italian high-quality chrome molybdenum steel.
All our tooling is then hardened by induction (HRC 55-60) up to 3mm depth from the working surface.
In addition to providing high quality Press Brake Tooling, we also provide a large range of accessories for press brakes: lower and upper adaptors, manual or pneumatic clamping systems and more.

Our in-house technical department have the knowledge, experience, and expertise to develop fully tailored bending projects in a timely and accurate manner.

EUROSTAMP TOOLING
the Italian excellence

LA NOSTRA FILOSOFIA

Eurostamp Tooling è un'azienda con cuore italiano e anima internazionale; abbiamo deciso di concentrarci e specializzarci esclusivamente nella produzione e sviluppo degli utensili di piegatura, settore in cui abbiamo sviluppato la più alta tecnologia applicata a ciascuno dei processi interni.

Il nostro reparto produttivo pone la massima attenzione alla cura dei dettagli, alla precisione e all'accurato controllo della qualità con una ispirazione artigianale: selezioniamo i migliori fornitori italiani di materia prima, e investiamo costantemente in attrezzature di qualità e in spazi di stoccaggio di ampio respiro. Poniamo una fortissima attenzione alla formazione dello staff tecnico e produttivo ed investiamo costantemente in ricerca e sviluppo perché crediamo fortemente che il modo migliore per soddisfare i nostri clienti sia il superamento delle loro aspettative con soluzioni innovative e un supporto pre e post vendita di elevato livello. Il team commerciale lavora quotidianamente a fianco dello staff tecnico e produttivo per diffondere ovunque la nostra filosofia di marchio.

OUR PHILOSOPHY

Eurostamp tooling is an Italian company with an international "soul". Since the beginning we chose to focus all of our attention only on the engineering and manufacturing of press brake tooling, so we invested our resources on the state-of-art technologies applied to each of our internal processes.

Our production department takes great care to every detail, to the highest precision and to the accurate quality control. We are cooperating with the best raw material suppliers among the Italian market and we are constantly investing in new production technologies. Our finished product is then stocked in our wide and organized warehouse, ready for being handled by our skilled logistic resources. We put the highest care to the training of our production and engineering staff and to our policy of research and development because we are aware that this is the best way for overcoming our customer expectations with innovative solutions and with the highest level of pre- and post-sales support. Our sales staff is working daily beside our production and our engineering departments with the mission to spread worldwide our brand philosophy.




LE COMPETENZE

Gli specialisti che compongono il nostro staff controllano ogni fase produttiva, dalla scelta delle leghe e degli acciai grezzi, alle procedure di fresatura, tempra e rettifica di ogni pezzo. Usiamo acciaio al 100% italiano per garantire massima precisione e caratteristiche meccaniche ad alto standard qualitativo.

OUR COMPETENCES

Our specialized staff takes care of each production phase, from choosing the best kind of steel to the procedures for machining, hardening and grinding each product with the best results. We are utilizing only 100% Italian source steel for granting always the conformity to the most severe standards specifications.

CALCOLO DELLA FORZA DI PIEGA IN ARIA
AIR BENDING FORCE CALCULATION

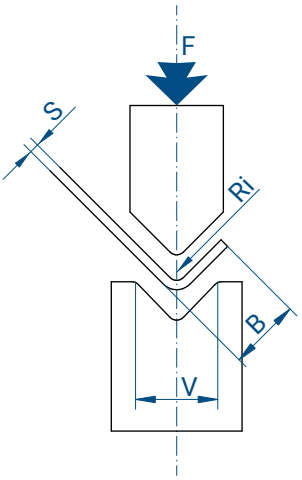

S	Spessore lamiera - mm *Sheet metal thickness - mm*	**Ri**	Raggio interno *Inside radius*
V	Larghezza del V *V-opening*	**R**	Alluminio 20-25 kg/mmq *Aluminium 20-25 kg/mmq*
F	Forza in T/m *Force in T/m*	**R**	Acciaio dolce 40-45 kg/mmq *Mild steel 40-45 kg/mmq*
B	Bordo minimo *Shortest edge*	**R**	Inox 65-70 kg/mmq *Stainless steel 65-70 kg/mmq*

$$F = \frac{S^2 \times 2 \times R}{1.4 \times V} = \text{.....} \ \text{ton/m}$$

RELAZIONE TRA SPESSORE LAMIERA E LARGHEZZA V
SHEET METAL THICKNESS / V-SHAPE WIDTH RATIO

S	*Spessore lamiera - mm* *Sheet metal thickness - mm*	*0,5-2,5*	*3-8*	*9-10*	*12 o più* *12 or more*
V	*Larghezza del V* *"V" width*	*6 S*	*8 S*	*10 S*	*12 S*

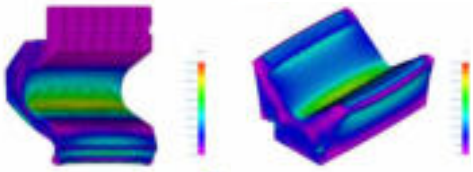


TABELLA DI PIEGATURA IN ARIA - ACCIAIO DOLCE
AIR BENDING TABLE - MILD STEEL


S	mm	0,5	0,6	0,8	1	1,2	1,5	2	2,5	3	4	4,5	5	6	8	10	12	15	20	25	30
6	4	1	3	4	7	11															
8	5,5	1,3		4	5	8	12	20													
10	7	1,6			4	7	10	17													
12	8,5	2				6	8	15	22												
14	10	2,3					7	13	19												
16	11	2,6					6	11	17	28											
18	13,5	3						10	15	25	34										
20	14	3,3						9	13	22	30										
25	17,5	4							11	18	24	43									
32	22	5								14	19	34	44	52							
40	28	6,5									15	27	34	42	60	107					
50	35	8										21	27	33	48	85					
63	45	10										17	21	26	38	68	105				
80	55	13												21	30	53	85	120			
100	71	16													24	43	67	96	150		
125	89	20															53	78	120	215	
160	113	26															42	60	95	170	
200	140	33																55	75	135	210
250	175	41																		108	170	240
V	B	Ri																			F

t/m

TABELLA DI PIEGATURA IN ARIA - ACCIAIO INOX
AIR BENDING TABLE - STAINLESS STEEL

S	mm	0,5	0,6	0,8	0,9	1	1,2	1,5	2	2,5	3	4	5	6	8	10	12	15	20	25	30
6	4	1	5	6	11	13	17														
8	5,5	1,3		6	8	10	12	18													
10	7	1,6			7	8	11	15													
12	8,5	2				7	8	12	20	33											
14	10	2,3						11	17	29											
16	11	2,6						9	15	26	39										
18	13,5	3							13	23	35	51									
20	14	3,3							12	20	30	45									
25	17,5	4								17	25	36	65								
32	22	5									19	29	51	78							
40	28	6,5										23	41	63	90						
50	35	8											32	50	72	208					
63	45	10											26	39	57	102	163				
80	55	13												32	45	81	129	187			
100	71	16													36	65	101	144			
125	89	20														51	80	117	180		
160	113	26															63	90	141	250	
200	140	33																83	114	208	315
250	175	41																		167	255	360
V	B	Ri																			F


t/m

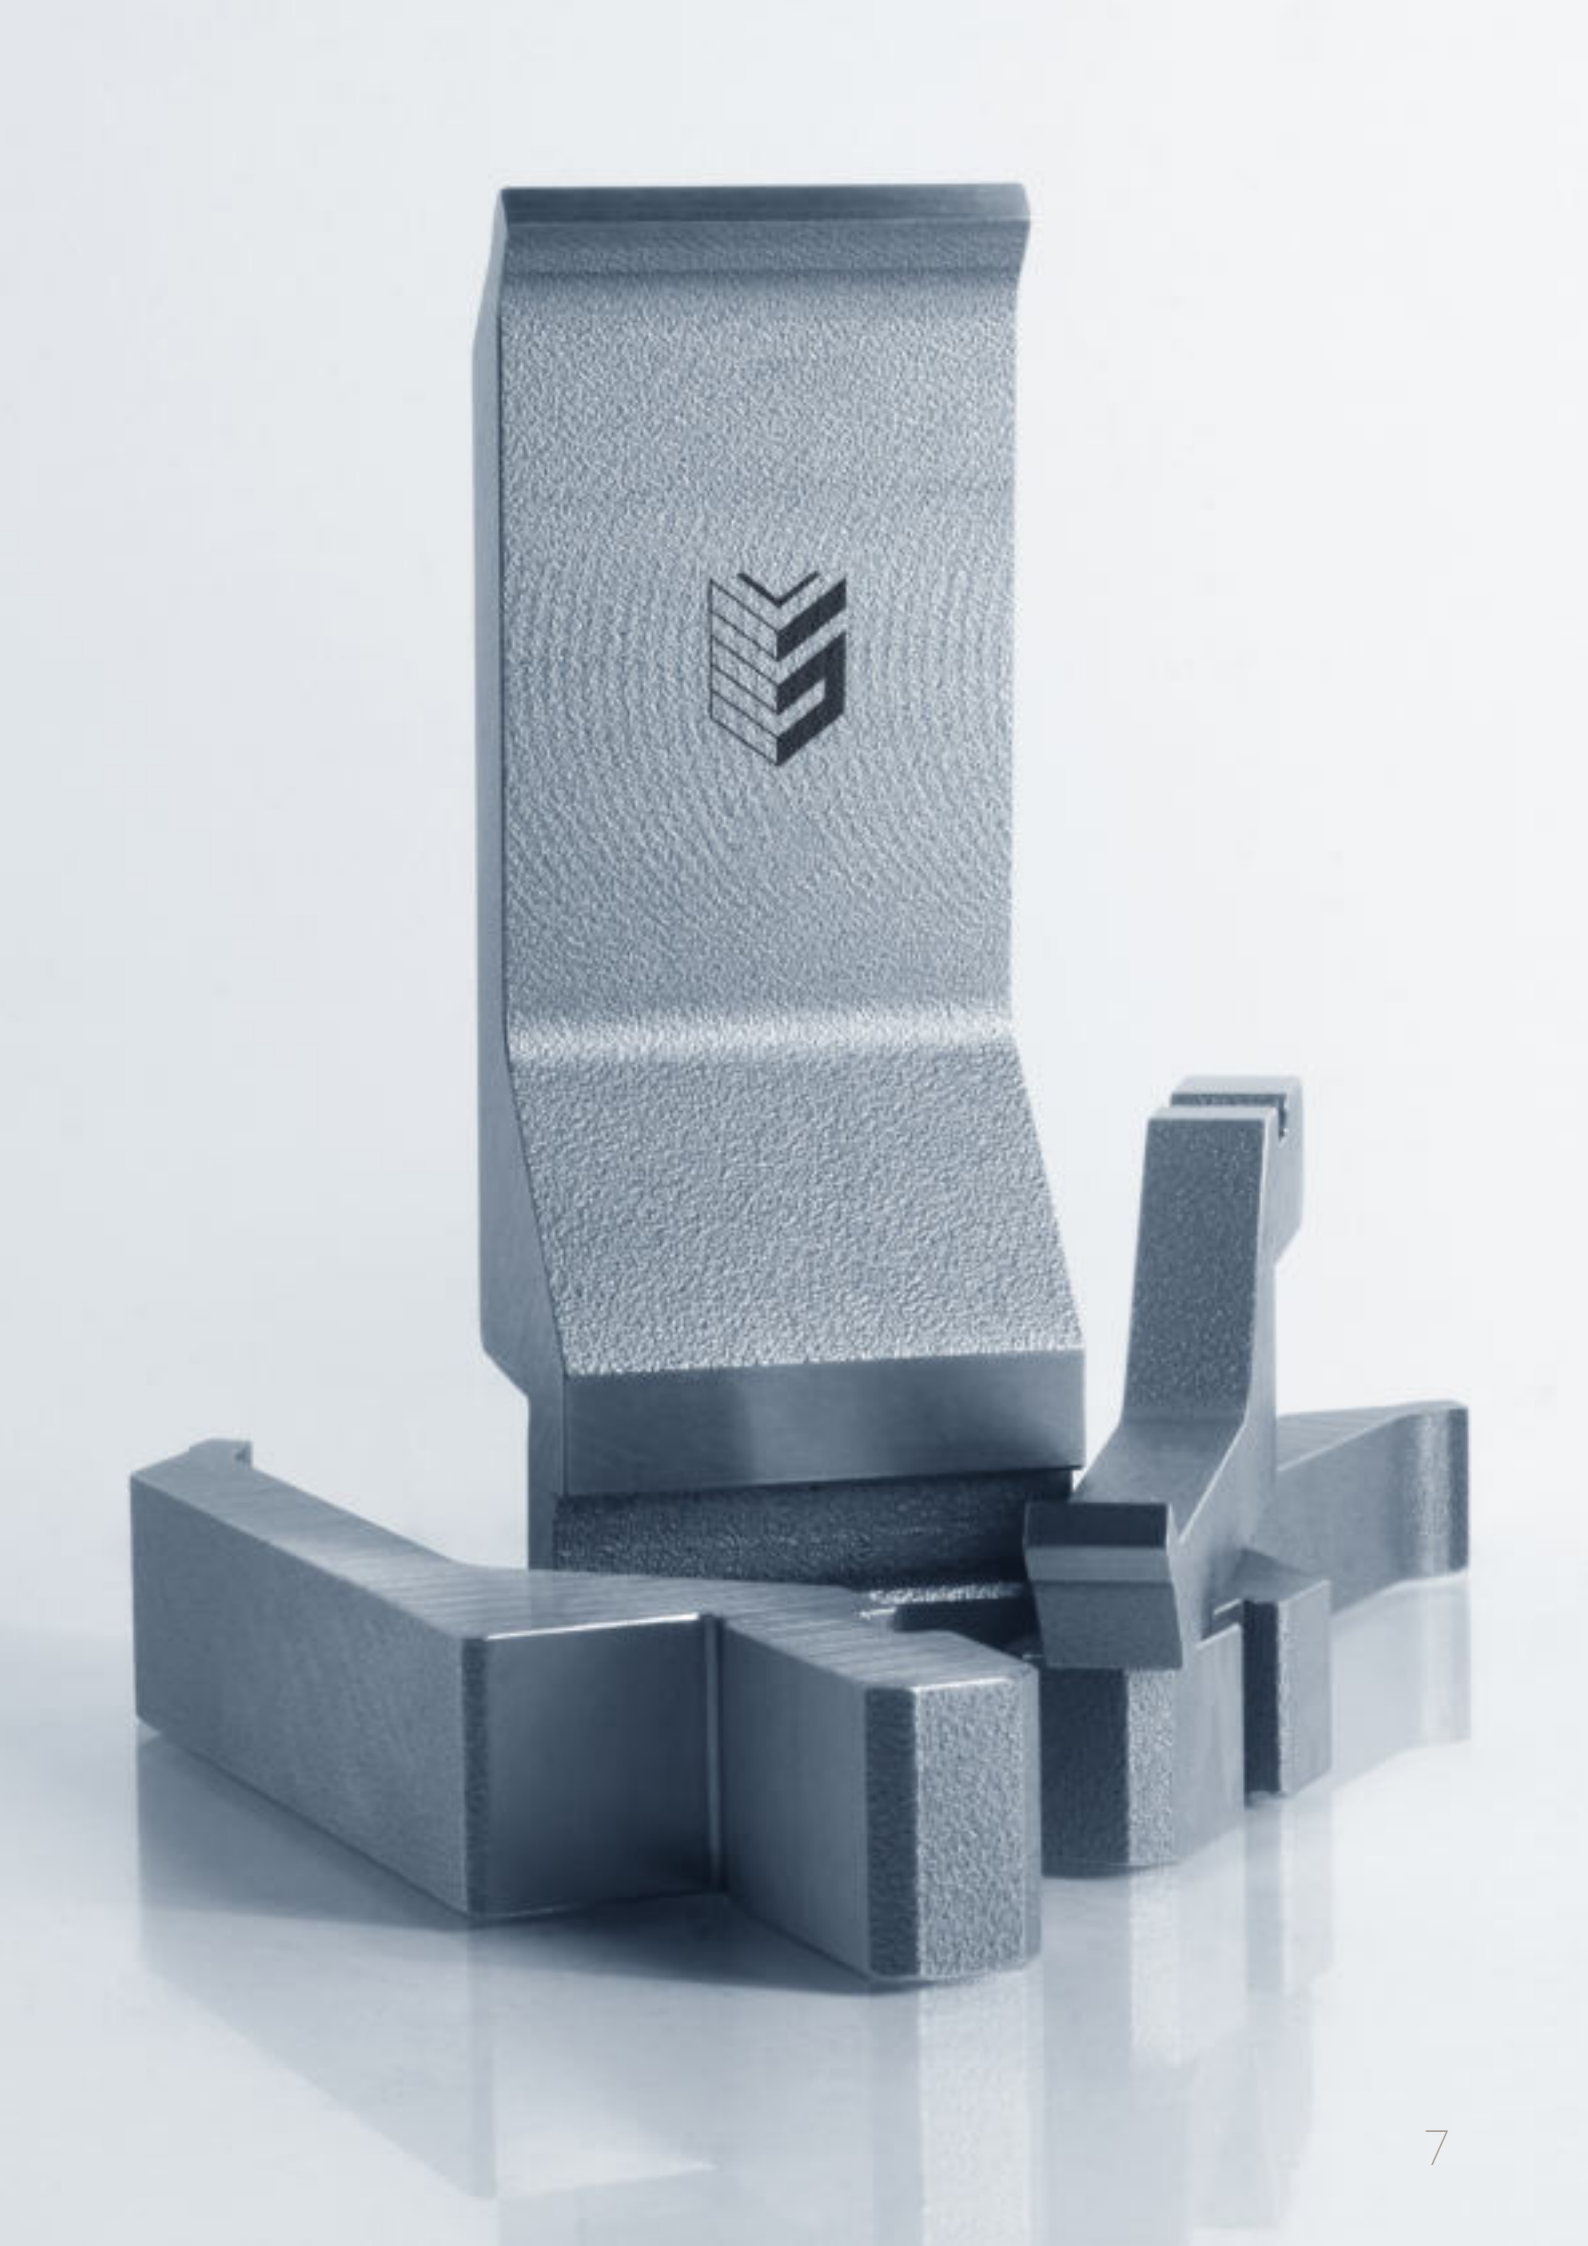

INDICE PRODOTTI
PRODUCT INDEX

CODICE/CODE	PAGINA/PAGE	CODICE/CODE	PAGINA/PAGE	CODICE/CODE	PAGINA/PAGE	CODICE/CODE	PAGINA/PAGE
1011	18	1084	23	1162	30	1249	143
1011S	17	1086	37	1163	30	1250	144
1012	18	1090	192	1171	27	1251	145
1014	20	1091	193	1172	27	1252	189
1015	21	1096	192	1173	22	1253	188
1017	22	1100	197	1175	20	1254	188
1018	22	1101	197	1177	26	1260	26
1020	20	1102	197	1178	38	1262	20
1022	24	1103	197	1180	196	1264	19
1023	24	1104	197	1181	196	1266	21
1024	33	1105	198	1182	196	1268	22
1025	33	1106	198	1183	196	1270	23
1026	29	1107	198	1184	196	1271	31
1027	29	1108	198	1185	196	1272	31
1029	19	1109	198	1186	196	1273	193
1030	24	1110	199	1187	196	1274	206
1031	23	1111	199	1190	30	1275	206
1032	31	1112	199	1191	30	1276	206
1033	38	1113	199	1192	38	1277	206
1034	34	1114	200	1193	35	1278	209
1035	34	1115	200	1194	35	1279	209
1036	192	1116	201	1195	75	1280	209
1037	197	1117	201	1196	75	1281	26
1038	198	1118	201	1197	76	1282	34
1039	199	1130	205	1198	203	1283	31
1040	199	1131	205	1216	177	1284	32
1041	200	1132	205	1218	177	1289	35
1042	200	1133	205	1220	179	1290	24
1043	202	1134	206	1221	180	1291	25
1047	34	1135	206	1225	179	1292	37
1047S	17	1136	206	1226	179	1293	32
1049	19	1137	206	1227	174	1294	98
1052	36	1138	207	1229	174	1295	104
1053	33	1139	207	1230	175	1296	195
1054	33	1140	207	1231	175	1297	195
1055	36	1141	207	1232	175	1298	176
1056	35	1142	208	1233	99	1299	178
1057	36	1143	208	1234	101	1300	178
1061	21	1144	208	1235	100	1301	25
1062	21	1145	208	1236	103	1302	104
1063	18	1146	208	1237	105	1303	102
1065	18	1147	208	1238	105	1305	194
1065S	17	1148	208	1239	193	1306	194
1081	19	1150	203	1240	194	1308	106
1082	23	1155	195	1242	203	1309	28

CODICE/CODE	PAGINA/PAGE	CODICE/CODE	PAGINA/PAGE	CODICE/CODE	PAGINA/PAGE	CODICE/CODE	PAGINA/PAGE
1310	28	1346	84	2054	46	3016	56
1311	38	1347	85	2055	46	3017	56
1312	28	1348	85	2056	47	3018	56
1313	106	1349	85	2057	47	3019	58
1314	100	2013	44	2058	43	3020	58
1315	98	2014	44	2059	43	3021	58
1316	107	2015	45	2060	43	3022	58
1317	101	2016	45	2067	48	3023	58
1318	103	2017	45	2081	53	3024	58
1319	102	2018	42	2082	52	3025	58
1320	99	2019	42	2083	52	3026	59
1321	177	2020	49	2084	54	3027	59
1322	28	2021	49	2086	54	3028	59
1323	150	2022	49	2087	54	3029	59
1324	150	2023	49	2088	53	3030	59
1325	156	2024	49	2089	52	3031	59
1326	155	2025	50	2101	212	3032	59
1327	155	2026	50	2102	212	3037/6	73
1328	150	2027	50	2103	212	3037/8	73
1329	152	2030	48	2104	212	3038	72
1330	152	2031	47	2105	212	3038PN	74
1331	153	2032	44	2106	212	3039	73
1332	151	2033	45	2107	212	3039PN	74
1333	151	2034	48	2108	212	3040	72
1334	154	2035	42	2109	210	3040PN	74
1335	154	2036	211	2110	210	3041	72
1336	154	2037	211	2111	210	3041PN	74
1337	156	2038	211	2112	210	3042	60
1338	29	2039	42	2113	210	3043	60
1339	29	2040	211	2114	210	3044	60
1340	83	2041	44	2115	210	3045	60
1341	83	2046	44	2116	210	3046	60
1342	83	2047	45	2117	53	3047	60
1343	83	2050	46	2118	53	3048	60
1344	84	2052	46	2119	211	3055	61
1345	84	2053	46	3015	56	3056	61

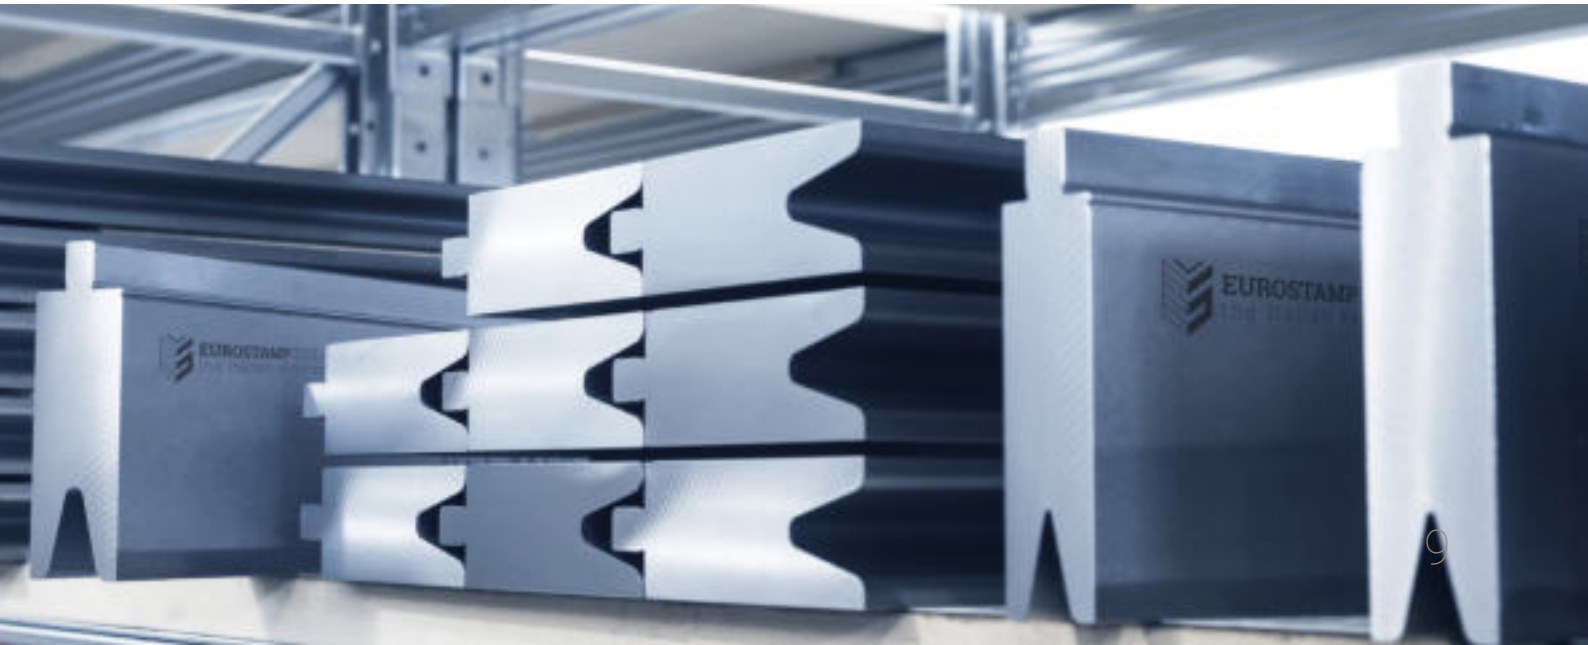

CODICE/CODE	PAGINA/PAGE	CODICE/CODE	PAGINA/PAGE	CODICE/CODE	PAGINA/PAGE	CODICE/CODE	PAGINA/PAGE
3057	61	3093	62	3135	133	3171	70
3058	61	3094	62	3136	134	3172	70
3059	63	3095	62	3137	134	3173	66
3060	63	3096	62	3138	134	3174	144
3061	63	3097	62	3139	134	3175	145
3062	63	3098	62	3140	135	3176	75
3063	63	3099	62	3141	135	3177	75
3064	63	3106	182	3142	135	3178	76
3065	63	3107	183	3143	136	3179	185
3066	64	3108	183	3144	136	3190	251
3067	64	3109	183	3145	137	3191	251
3068	64	3110	183	3146	137	3192	252
3069	64	3111	184	3147	137	3193	69
3070	64	3112	184	3148	137	3194	69
3071	64	3113	185	3149	138	3195	69
3072	64	3114	185	3150	138	3196	69
3073	65	3115	186	3151	138	3197	69
3074	65	3116	186	3152	139	3198	69
3075	65	3117	186	3153	139	3199	69
3076	65	3118	187	3154	139	3200	116
3077	65	3119	187	3155	139	3201	116
3078	65	3120	187	3156	140	3202	116
3079	65	3121	187	3157	143	3203	116
3080	56	3122	187	3158	68	3204	117
3081	56	3123	130	3159	68	3205	117
3082	56	3124	130	3160	68	3206	125
3083	61	3125	130	3161	68	3207	125
3084	61	3126	130	3162	68	3208	125
3085	61	3127	131	3163	68	3209	125
3086	57	3128	131	3164	68	3210	126
3087	57	3129	131	3165	68	3211	126
3088	57	3130	131	3166	70	3212	126
3089	57	3131	132	3167	70	3213	126
3090	57	3132	132	3168	70	3214	127
3091	57	3133	132	3169	70	3215	117
3092	57	3134	133	3170	70	3216	117



CODICE/CODE	PAGINA/PAGE	CODICE/CODE	PAGINA/PAGE	CODICE/CODE	PAGINA/PAGE	CODICE/CODE	PAGINA/PAGE
3217	118	3262	168	4008	240	4222	235
3218	118	3263	169	4009	238	4223	235
3219	122	3264	169	4010	256	4224	235
3220	122	3265	169	4011	256	4225	235
3221	123	3270	160	4012	256	4226	236
3222	123	3271	160	4013	256	4227	236
3223	124	3272	160	4014	256	4228	236
3224	124	3273	161	4015	256	4229	245
3225	118	3274	161	4016	237	4272	245
3226	118	3275	161	4020	237	4273	245
3227	119	3276	164	4021	238	4274	202
3228	119	3280	165	4031	241	4275	195
3229	119	3281	165	4032	241	4277	42
3230	120	3282	165	4033	247	4281	239
3231	120	3283	166	4034	247	4282	236
3232	120	3284	166	4040	247	4301	246
3233	121	3285	167	4041	247	4302	246
3234	121	3286	167	4050	247	4303	246
3235	127	3320	87	4073	235	4304	246
3236	128	3321	87	4090	240	4305	246
3237	128	3322	87	4143	243	4306	256
3238	128	3323	87	4144	243	4307	256
3239	128	3324	88	4145	243	4308	254
3240	129	3325	88	4146	243	4309	254
3241	182	3326	88	4191	243	4313	74
3242	182	3327	89	4192	243	4314	254
3243	252	3328	89	4193	244	4318	257
3244	119	3329	89	4199	239	4319	257
3250	162	3330	89	4214	244	4330	141
3251	162	3334	215	4215	244	4349	239
3252	162	3335	215	4216	244	4361	245
3253	163	3336	215	4217	244	4362	245
3254	163	4000	242	4218	244	4379	254
3255	163	4001	242	4219	239	4380	254
3260	168	4002	242	4220	239	4383	257
3261	168	4007	240	4221	235	4384	258



CODICE/CODE	PAGINA/PAGE	CODICE/CODE	PAGINA/PAGE	CODICE/CODE	PAGINA/PAGE	CODICE/CODE	PAGINA/PAGE
4381	234	4410	232	8021	250	8216	108
4389	219	4411	236	8022	250	8218	108
4390	221	4414	224	8100	249	8219	108
4392	228	4419	223	8101	249	9010	248
4393	225	5011	238	8102	249	9011	248
4394	233	5012	237	8106	250	9012	248
4395	234	5013	237	8107	249	9013	248
4396	234	7290	51	8201	269	9014	253
4397	234	8010	249	8202	269	9015	253
4398	231	8011	249	8205	269	9016	253
4399	230	8012	249	8210	108	9017	253
4400	222	8013	249	8211	108	9018	253
4404	226	8014	250	8212	108	9019	253
4405	229	8016	250	8213	108	9020	248
4408	226	8017	250	8214	108	ACARM1NE0005	260
4409	220	8020	250	8215	108	CARRELLO0005	260





EUROSTAMP TOOLING
the Italian excellence

AMADA PROMECAM STYLE

EUROPEAN STYLE

Gli utensili superiori ed inferiori elencati in questa sezione possono essere installati sulle piegatrici:

ACL, Accurpress, AM Machinery, Amada, Atlantic, Adira, Baykal, BL, Boschert, Boutillon, Bystronic-Beyeler Euro-B, Coastone, Colgar, Dener, Deratech, Durmazlar, Ermaksan, Farina, Gade, Gasparini, Gizelis, Haco, Hindustan, Iturrospe, Jfy, JMT, LFK, Metfab, MVD, Oriance, Prima Power, Promecam, Rico, RPC Piegatrici, Salvagnini, Schiavi, SMD, Sorg, Somo, Vicla, Vimercati, Warcom, Yangli, Yawei, Ysde su tutte le piegatrici equipaggiate con sistemi di bloccaggio stile Europeo (stile Amada/Promecam).

Questi utensili possono essere installati anche su altre piegatrici tramite adattatori superiori e inferiori.

Upper and lower tooling listed on this section could be installed on the following press brakes:

ACL, Accurpress, AM Machinery, Amada, Atlantic, Adira, Baykal, BL, Boschert, Boutillon, Bystronic-Beyeler Euro-B, Coastone, Colgar, Dener, Deratech, Durmazlar, Ermaksan, Farina, Gade, Gasparini, Gizelis, Haco, Hindustan, Iturrospe, Jfy, JMT, LFK, Metfab, MVD, Oriance, Prima Power, Promecam, Rico, RPC Piegatrici, Salvagnini, Schiavi, SMD, Sorg, Somo, Vicla, Vimercati, Warcom, Yangli, Yawei, Ysd, on all folders equipped with European-style clamping systems (Amada/Promecam style).

These tooling could also be installed on other press brakes by using the appropriate upper and lower adapters.







PUNZONI / PUNCHES

VEDI PAG. 40 PER SCHEMA FRAZIONATURA MATRICI
SEE PAGE 40 FOR DIE SEGMENTATION DIAGRAM


LUNGHEZZE STANDARD
STANDARD LENGTHS

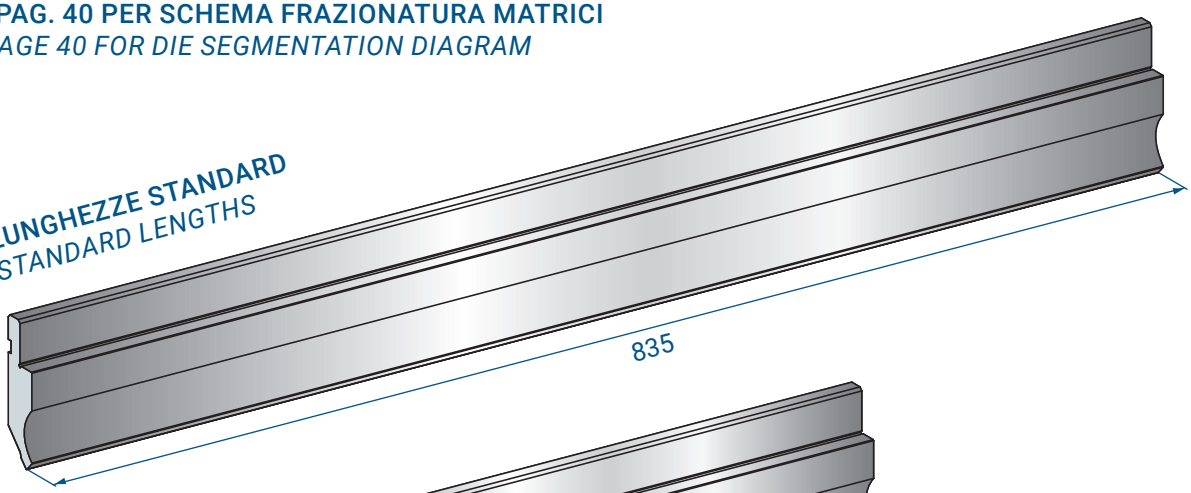


FRAZIONATURA STANDARD
STANDARD SEGMENTATION

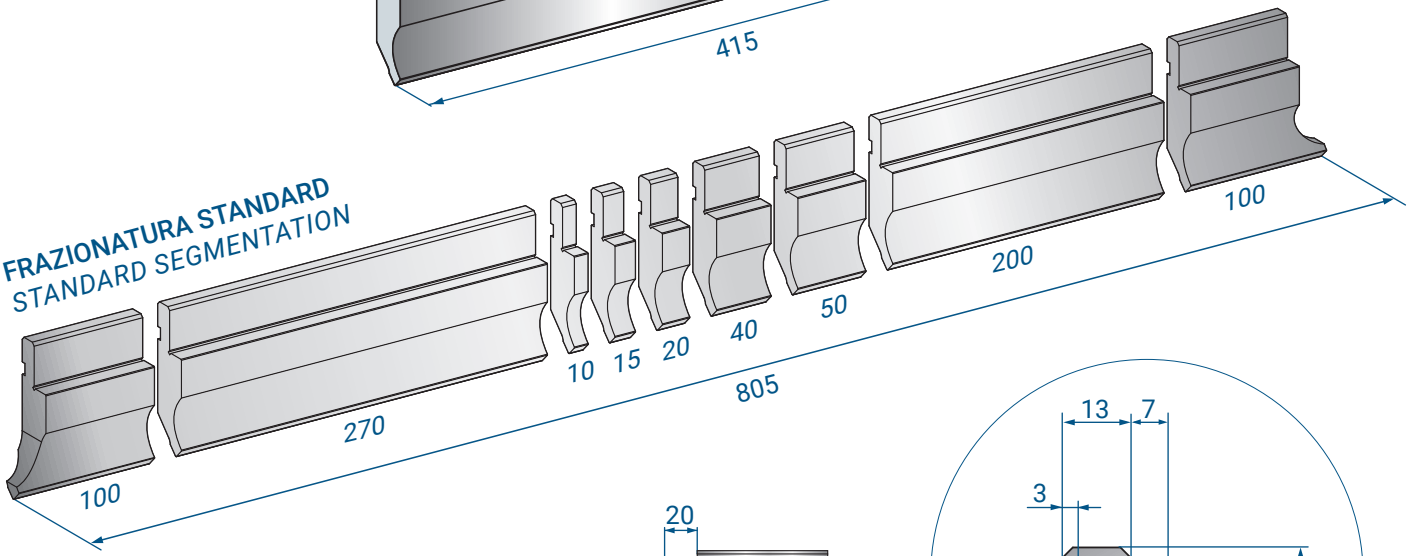


SCARPETTA STANDARD
STANDARD HORN




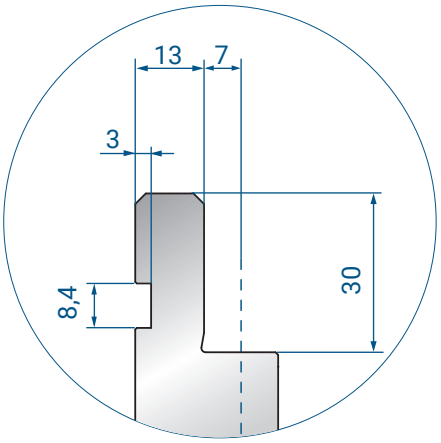


MODIFICHE A RICHIESTA / MODIFICATIONS ON REQUEST

SCARPETTE SPECIALI
SPECIAL HORNS

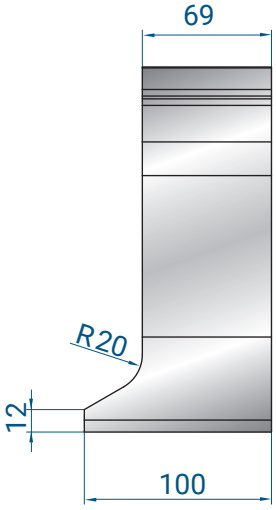

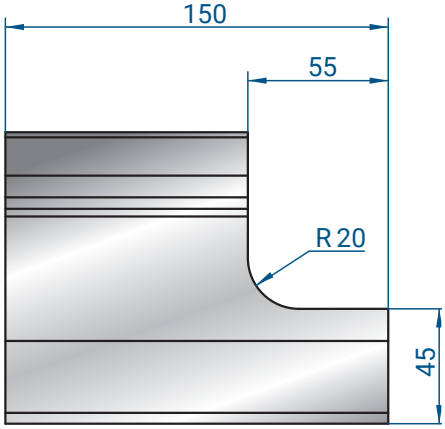

SCARPETTE MOBILI / MOVING HORNS

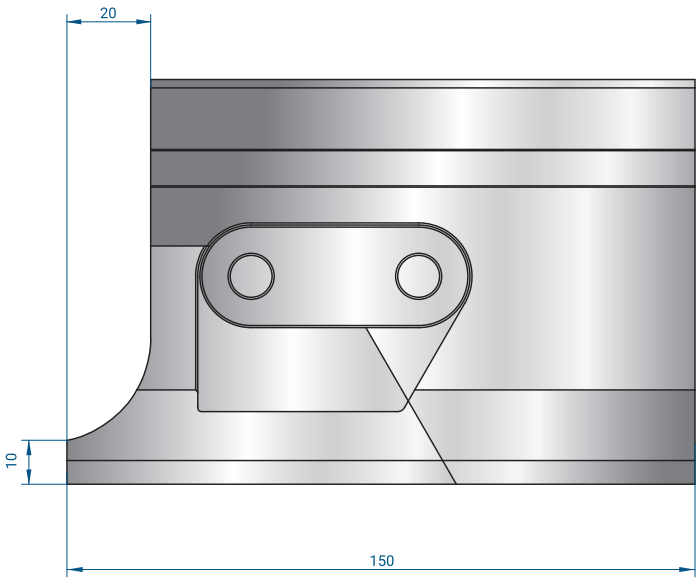

PUNZONE *PUNCH*

1011 **1011S**

2x150	3,5 kg


SCARPETTE MOBILI *MOVING HORNS*


1065 **1065S**

2x150	3,5 kg

1047 **1047S**

2x150	4,0 kg

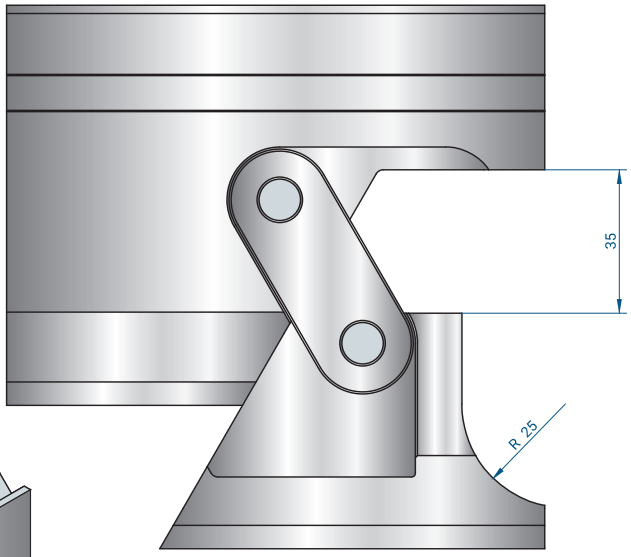

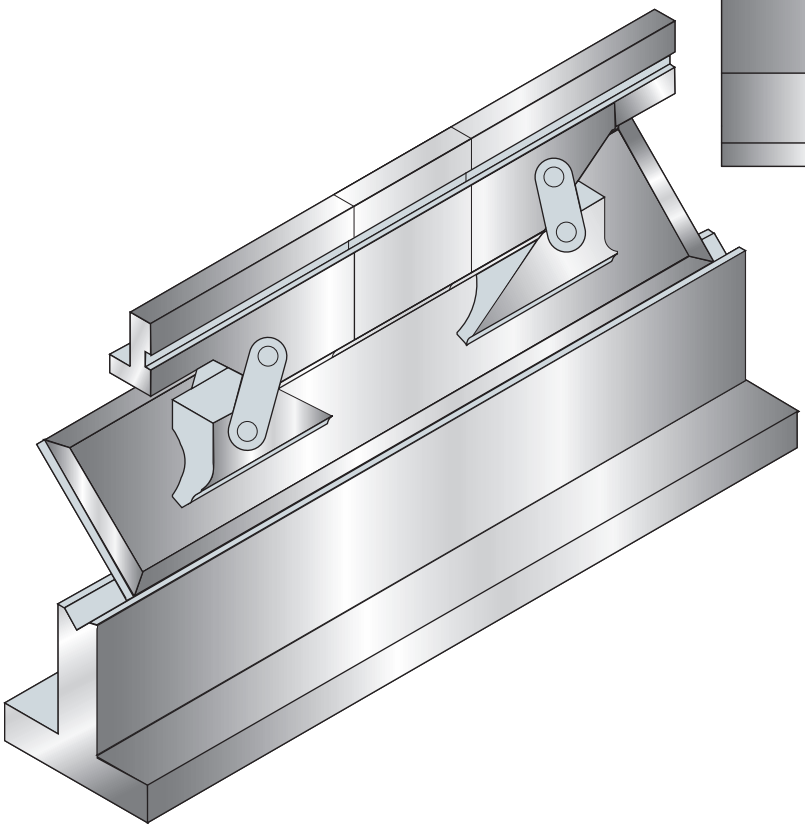








TAGLI A RICHIESTA
SPECIAL SEGMENTATION



MODIFICA RAGGIO
RADIUS MODIFICATION

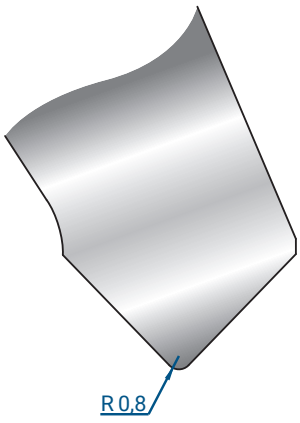

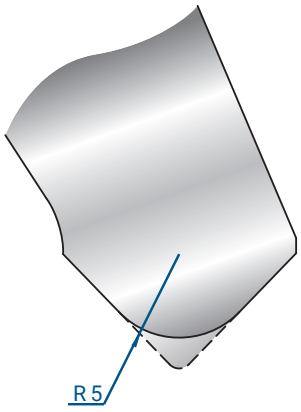


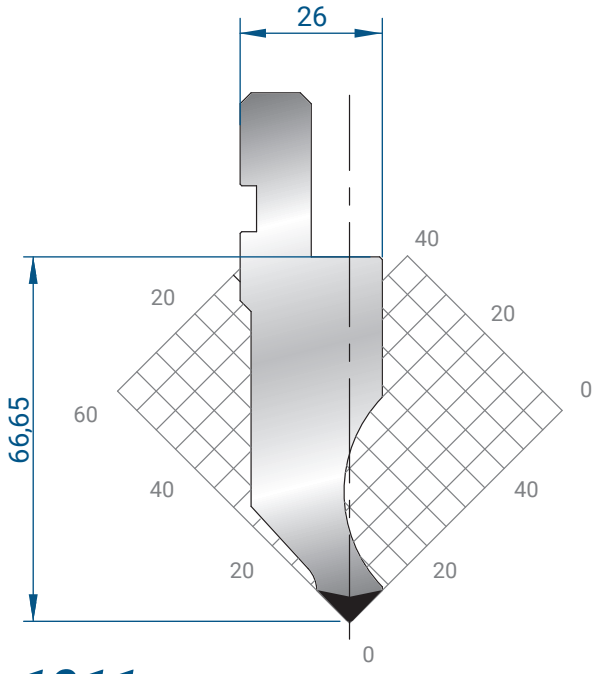

1011

Mat = C45
H = 66.65
Max T/m = 100
α = 88°
R = 0.8


835 mm	10,5 kg
415 mm	5,2 kg
805 mm FRAZ. / SECT.	9,7 kg

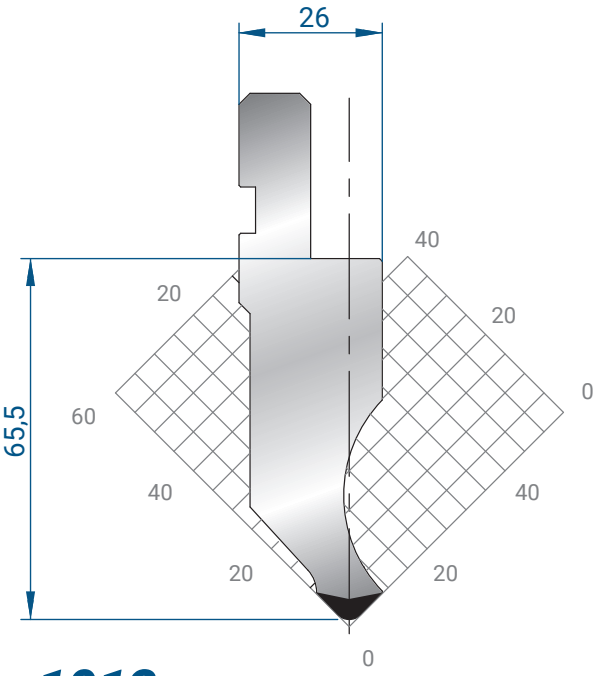

1012

Mat = C45
H = 65.50
Max T/m = 100
α = 88°
R = 3


835 mm	10,4 kg
415 mm	5,2 kg
805 mm FRAZ. / SECT.	9,6 kg

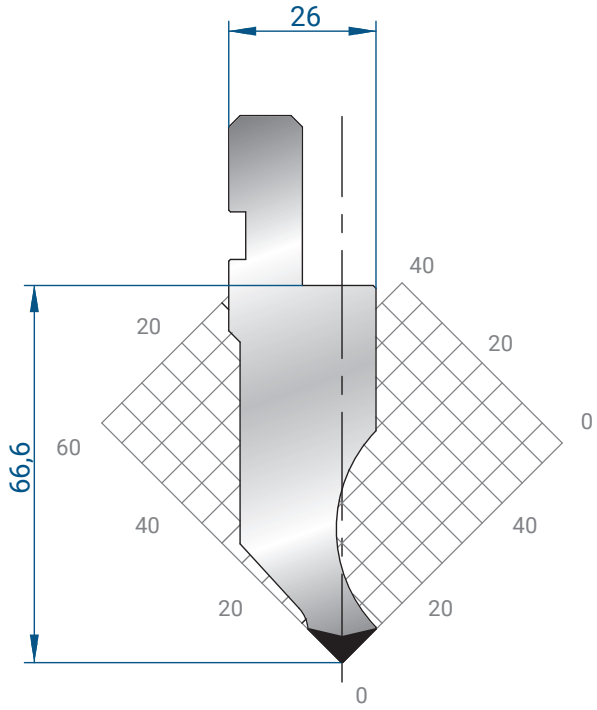

1065

Mat = C45
H = 66.60
Max T/m = 100
α = 88°
R = 0.25


835 mm	10,5 kg
415 mm	5,2 kg
805 mm FRAZ. / SECT.	9,7 kg

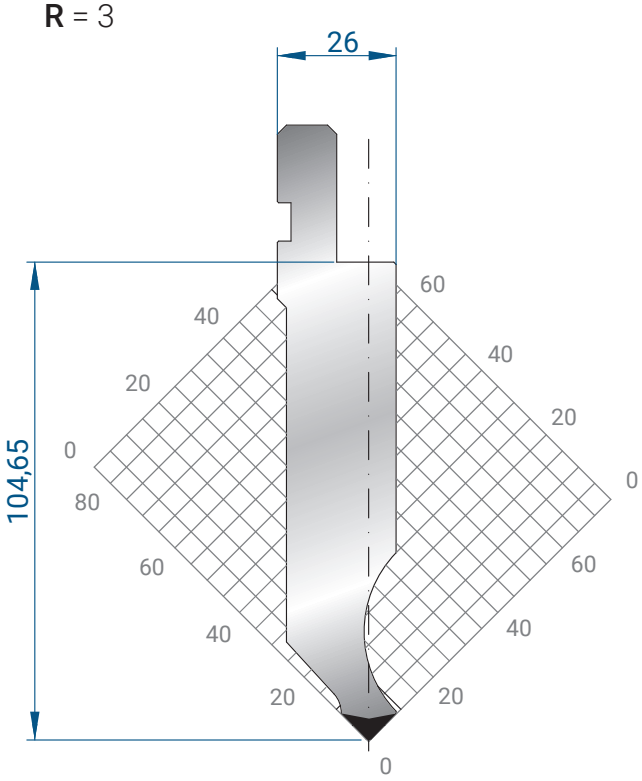

1063

Mat = C45
H = 104.65
Max T/m = 100
α = 88°
R = 0.8


835 mm	16,4 kg
415 mm	8,2 kg
805 mm FRAZ. / SECT.	15,1 kg

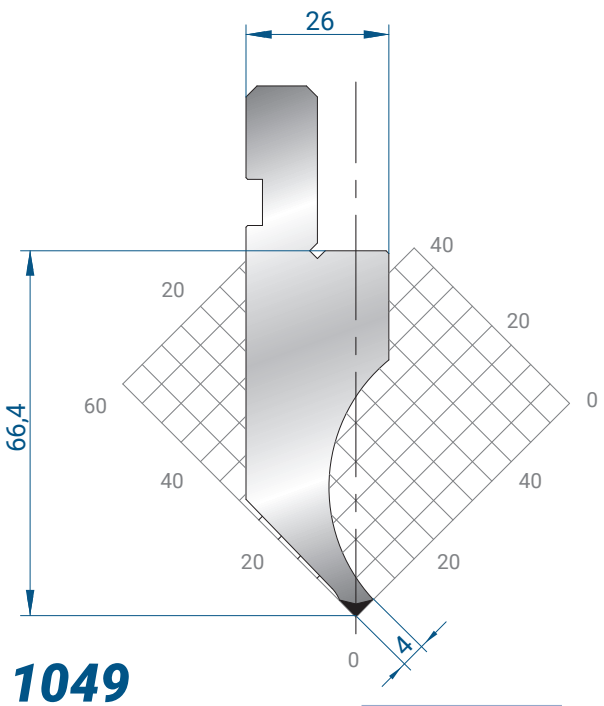

1049

835 mm	9,9 kg
415 mm	4,9 kg
805 mm FRAZ. / SECT.	9,1 kg


Mat = C45
bonificato / *tempered*
H = 66.40
Max T/m = 35
α = 88°
R = 0.6

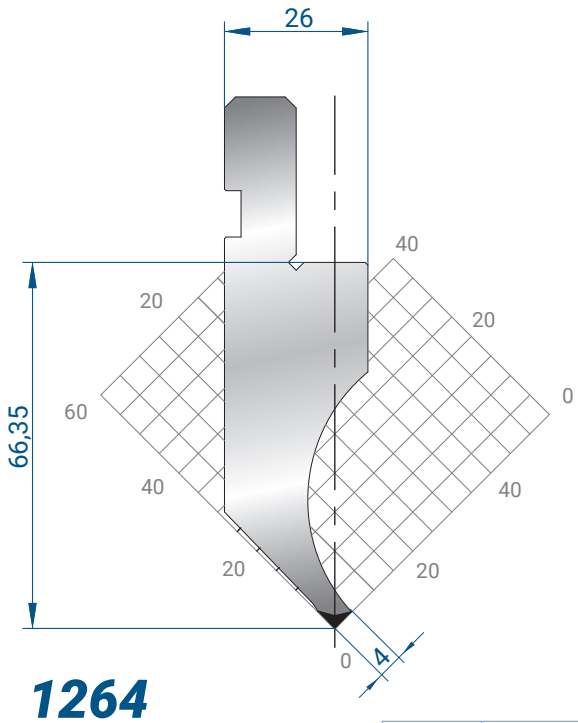

1264

835 mm	9,9 kg
415 mm	4,9 kg
805 mm FRAZ. / SECT.	9,1 kg


Mat = C45
bonificato / *tempered*
H = 66.35
Max T/m = 35
α = 88°
R = 0.25

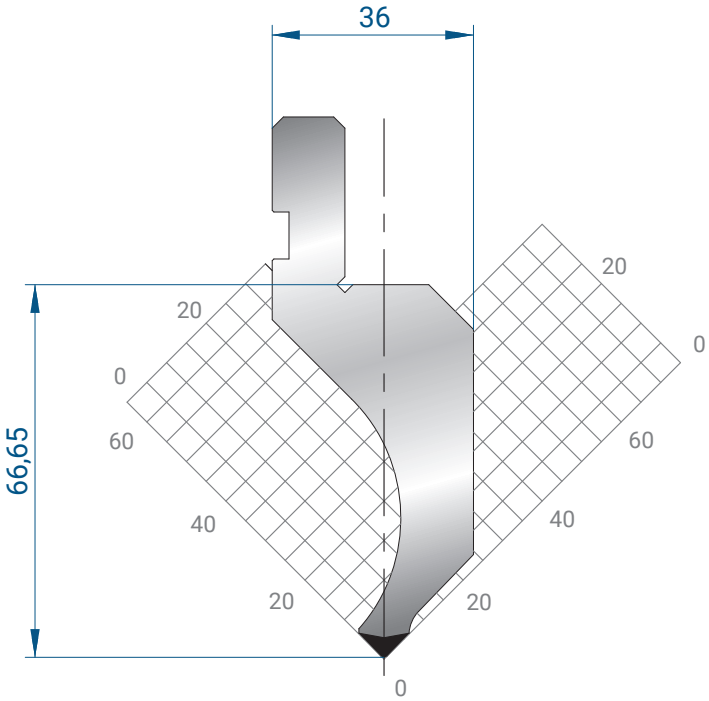

1081

835 mm	10,1 kg
415 mm	5,0 kg
805 mm FRAZ. / SECT.	9,3 kg


Mat = C45
H = 66.65
Max T/m = 60
α = 88°
R = 0.8

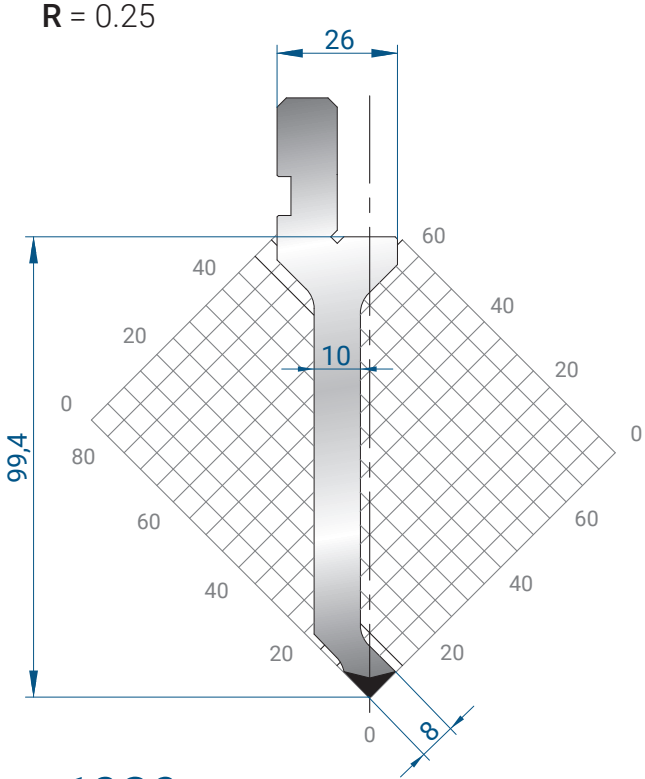

1029

835 mm	9,7 kg
415 mm	4,8 kg
805 mm FRAZ. / SECT.	8,9 kg


Mat = C45
H = 99.40
Max T/m = 50
α = 88°
R = 0.6

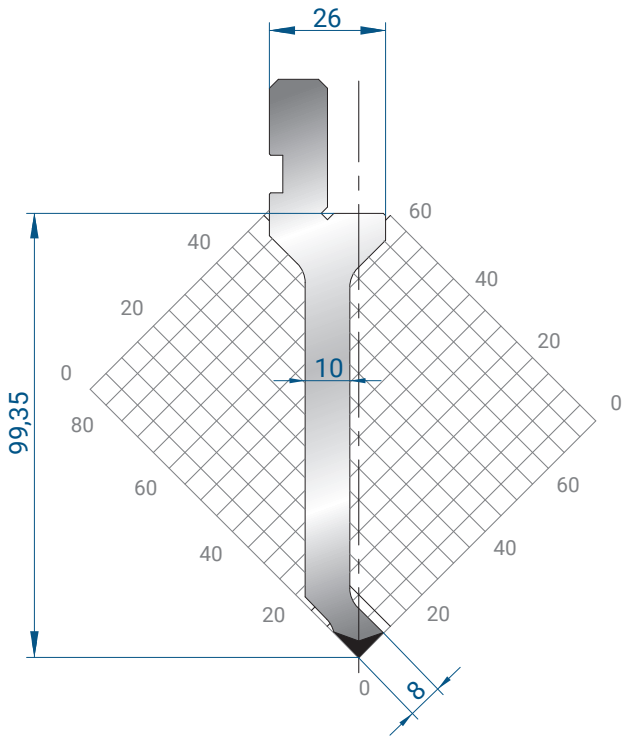

1262

835 mm	9,7 kg
415 mm	4,8 kg
805 mm FRAZ. / SECT.	8,9 kg


Mat = C45
H = 99.35
Max T/m = 50
α = 88°
R = 0.25

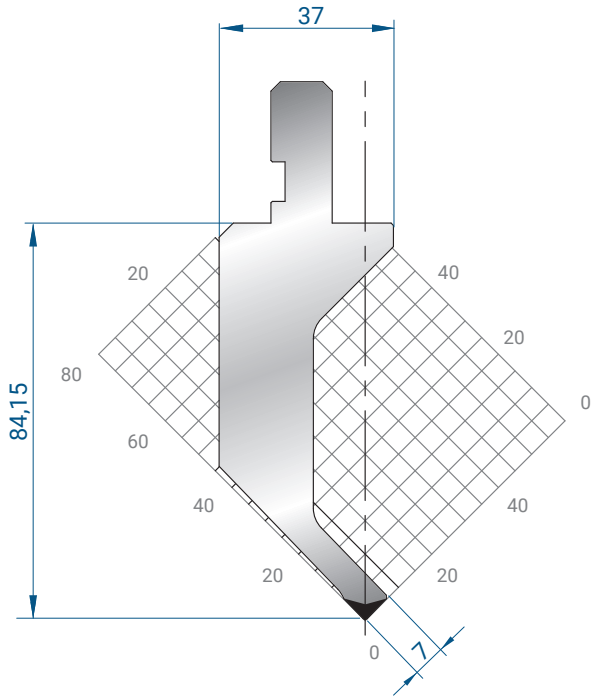

1020

835 mm	12,8 kg
415 mm	6,4 kg
805 mm FRAZ. / SECT.	11,8 kg


Mat = 42CrMo4
bonificato / *tempered*
H = 84.15
Max T/m = 20
α = 88°
R = 0.6

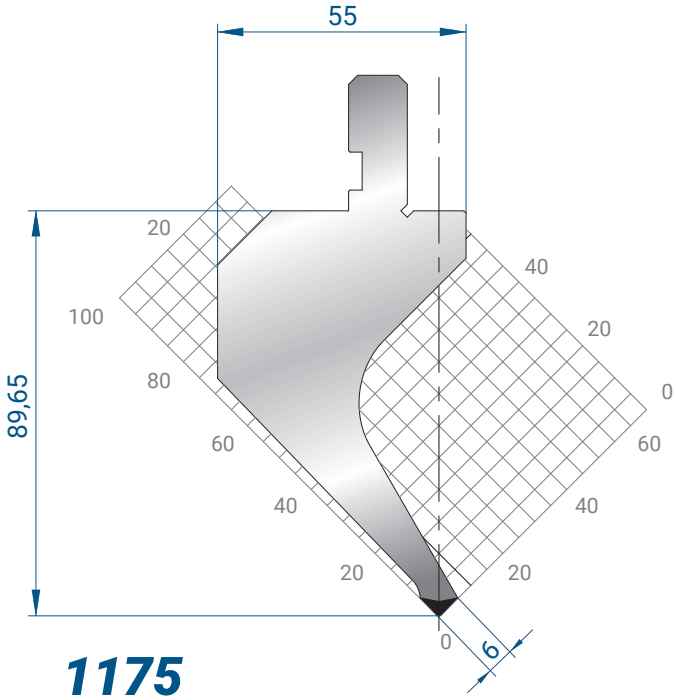

1175

835 mm	18,4 kg
415 mm	9,1 kg
805 mm FRAZ. / SECT.	16,9 kg


Mat = C45
bonificato / *tempered*
H = 89.65
Max T/m = 50
α = 88°
R = 0.8

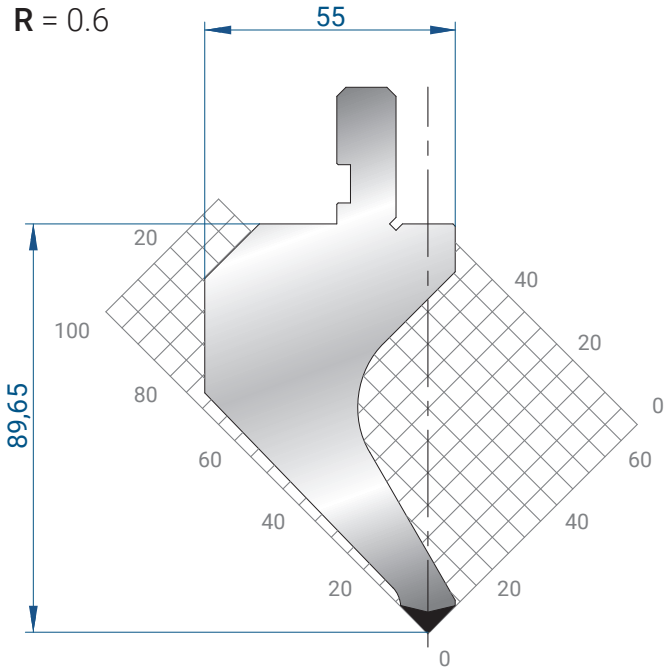

1014

835 mm	19,5 kg
415 mm	9,7 kg
805 mm FRAZ. / SECT.	17,9 kg


Mat = C45
H = 89.65
Max T/m = 60
α = 88°
R = 0.8

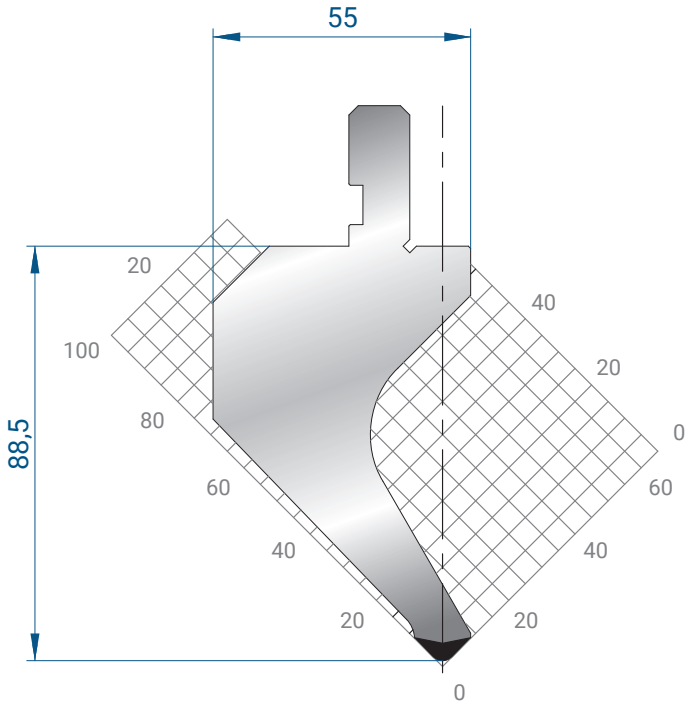

1015

Mat = C45
H = 88.50
Max T/m = 60
α = 88°
R = 3


835 mm	19,4 kg
415 mm	9,6 kg
805 mm FRAZ. / SECT.	17,8 kg

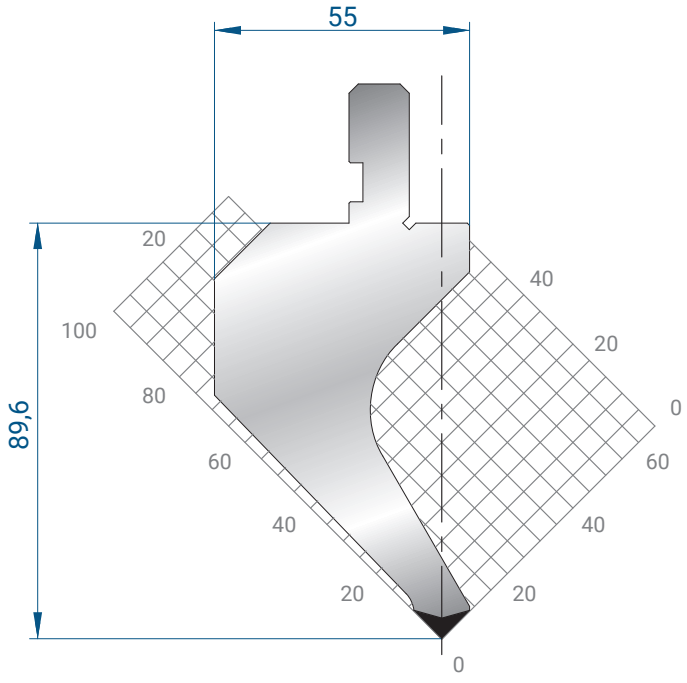

1266

Mat = C45
H = 89.60
Max T/m = 60
α = 88°
R = 0.25


835 mm	19,4 kg
415 mm	9,7 kg
805 mm FRAZ. / SECT.	17,9 kg

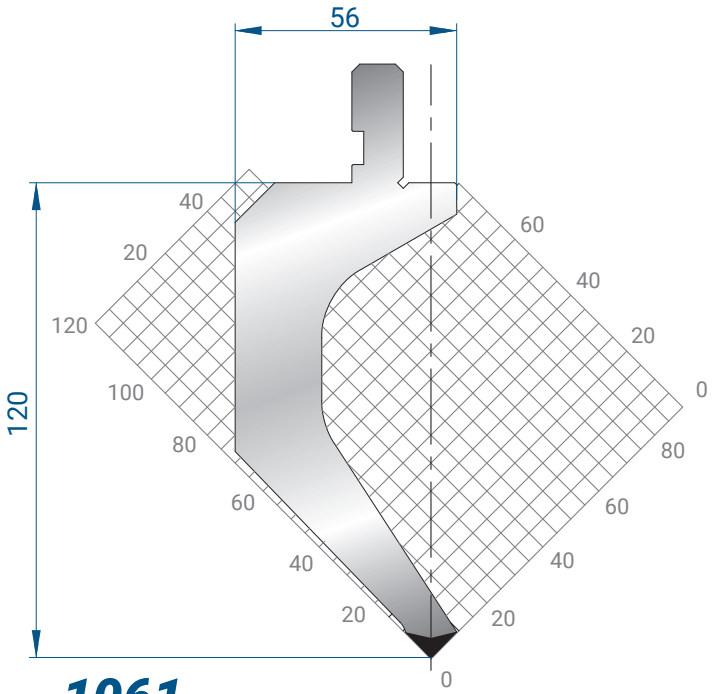

1061

Mat = C45
bonificato / *tempered*
H = 120
Max T/m = 50
α = 88°
R = 0.8


835 mm	22,0 kg
415 mm	10,9 kg
805 mm FRAZ. / SECT.	20,2 kg

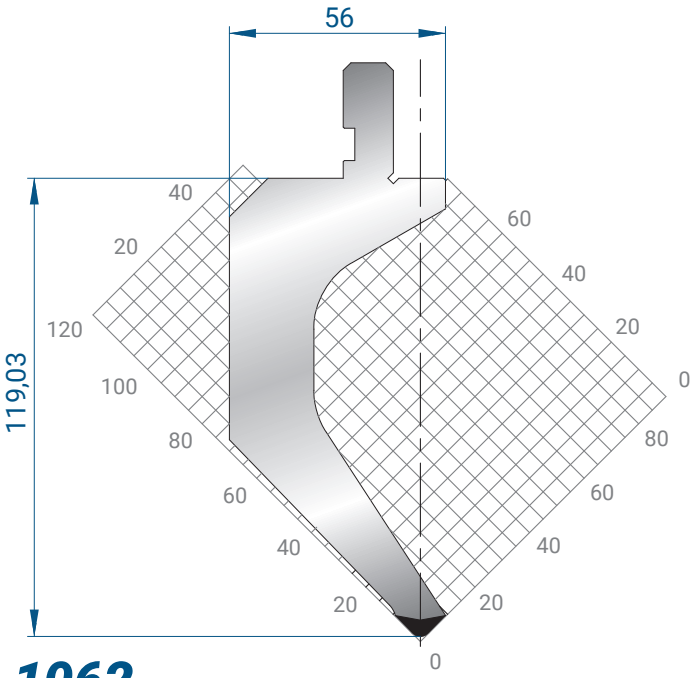

1062

Mat = C45
bonificato / *tempered*
H = 119.03
Max T/m = 50
α = 88°
R = 3


835 mm	22,0 kg
415 mm	10,9 kg
805 mm FRAZ. / SECT.	20,2 kg

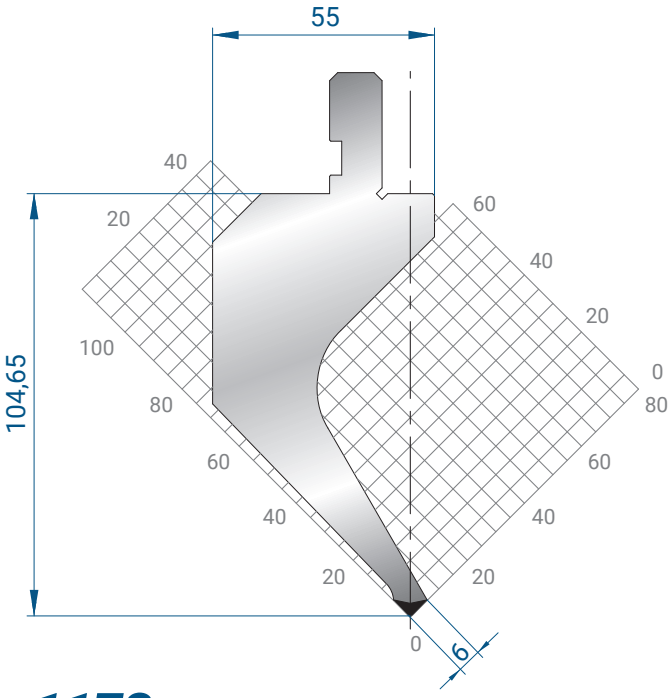

1173

835 mm	20,7 kg
415 mm	10,3 kg
805 mm FRAZ. / SECT.	19,0 kg


Mat = C45
bonificato / *tempered*
H = 104.65
Max T/m = 50
α = 88°
R = 0.8

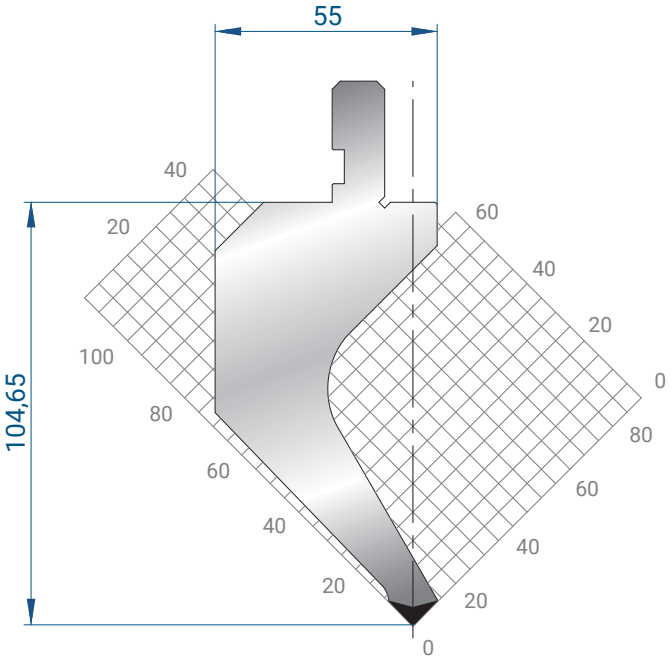

1017

835 mm	21,9 kg
415 mm	10,9 kg
805 mm FRAZ. / SECT.	21,1 kg


Mat = C45
H = 104.65
Max T/m = 50
α = 88°
R = 0.8

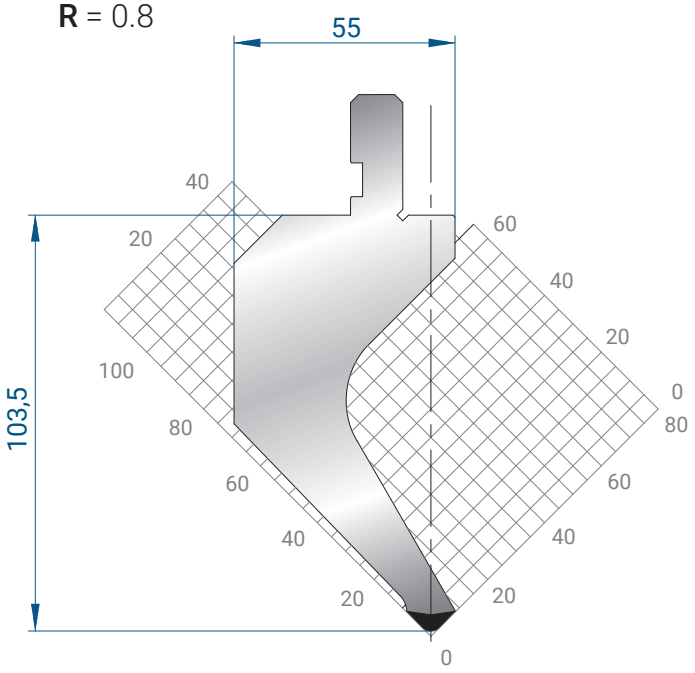

1018

835 mm	21,8 kg
415 mm	10,8 kg
805 mm FRAZ. / SECT.	20,0 kg


Mat = C45
H = 103.50
Max T/m = 50
α = 88°
R = 3

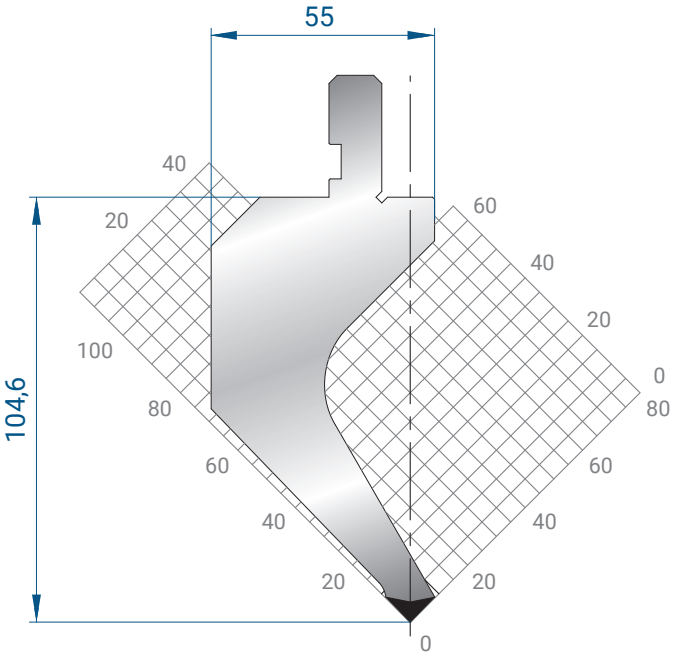

1268

835 mm	21,8 kg
415 mm	10,8 kg
805 mm FRAZ. / SECT.	20,0 kg


Mat = C45
H = 104.60
Max T/m = 50
α = 88°
R = 0.25

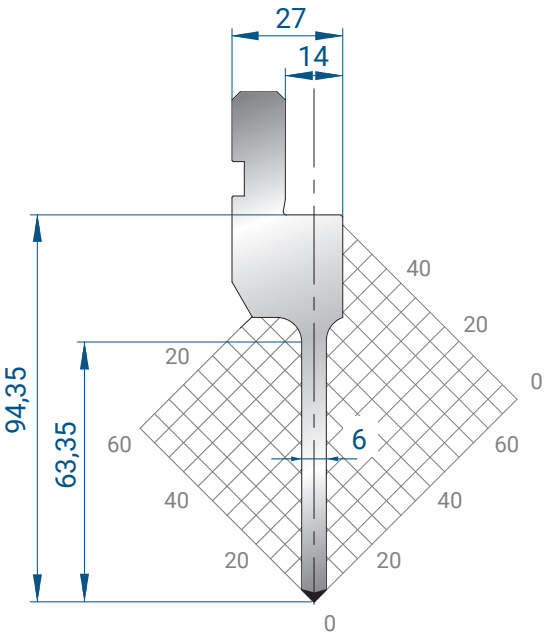

1270

835 mm	9,4 kg
415 mm	4,7 kg
805 mm FRAZ. / SECT.	8,6 kg


Mat = C45
bonificato/ *tempered*
H = 94.35
Max T/m = 50
α = 88°
R = 0.25

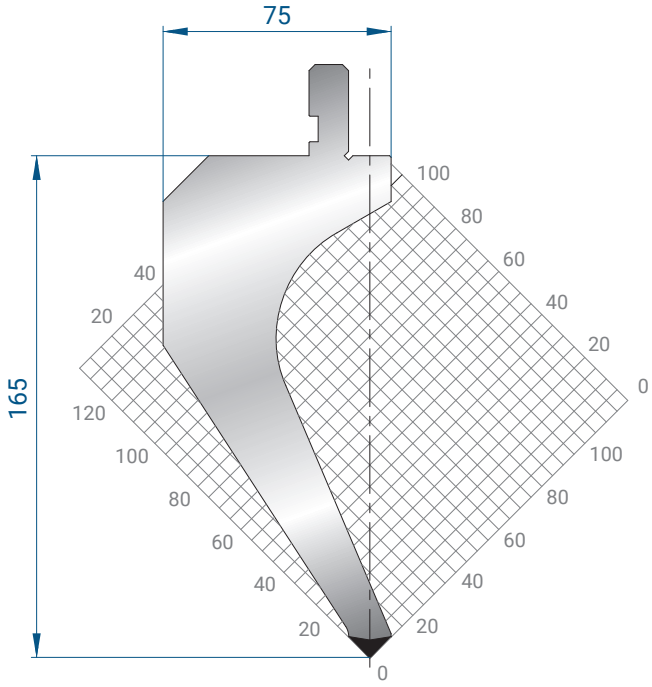

1031

835 mm	39,2 kg
415 mm	19,5 kg
805 mm FRAZ. / SECT.	36,0 kg


Mat = C45
H = 165
Max T/m = 60
α = 88°
R = 0.8

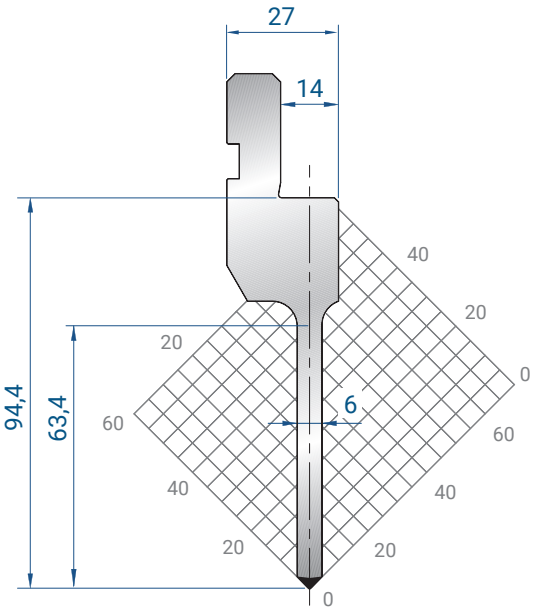

1084

835 mm	9,4 kg
415 mm	4,7 kg
805 mm FRAZ. / SECT.	8,6 kg


Mat = C45
bonificato / *tempered*
H = 94.40
Max T/m = 50
α = 88°
R = 0.6

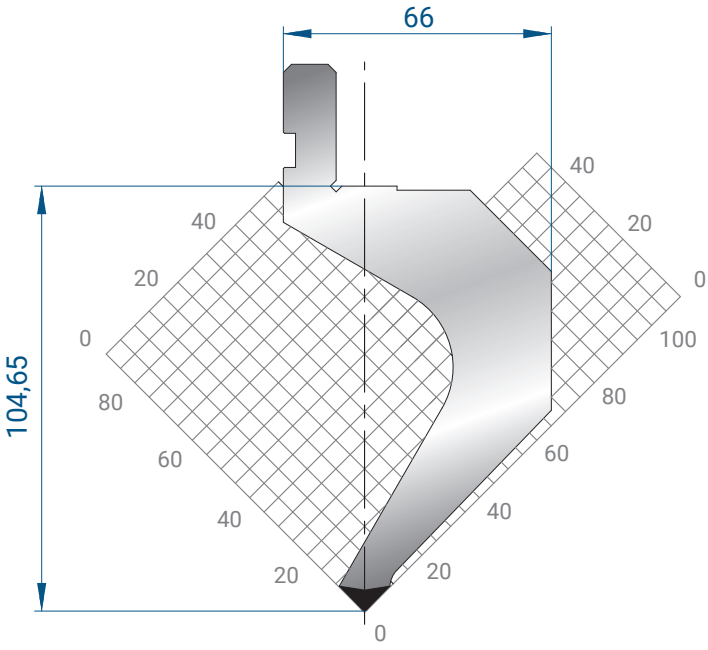

1082

835 mm	21,1 kg
415 mm	10,5 kg
805 mm FRAZ. / SECT.	19,4 kg


Mat = C45
H = 104.65
Max T/m = 45
α = 88°
R = 0.8

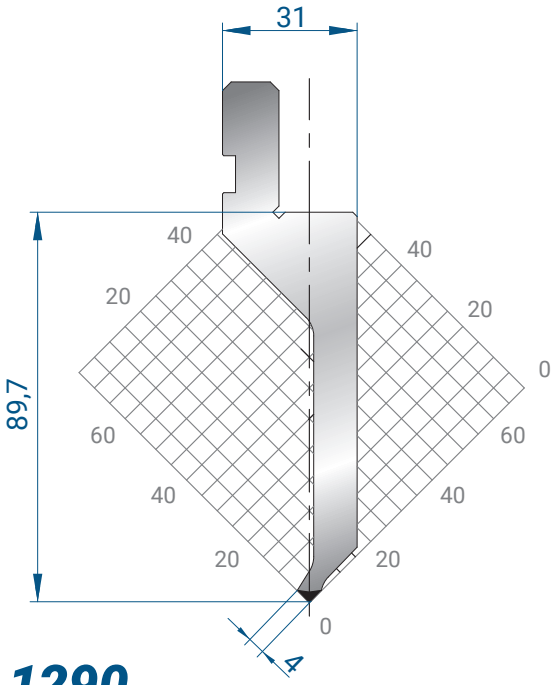

1290

835 mm	10,0 kg
415 mm	5,0 kg
805 mm FRAZ. / SECT.	9,3 kg


Mat = C45
bonificato / *tempered*
H = 89.70
Max T/m = 30
α = 88°
R = 0.6

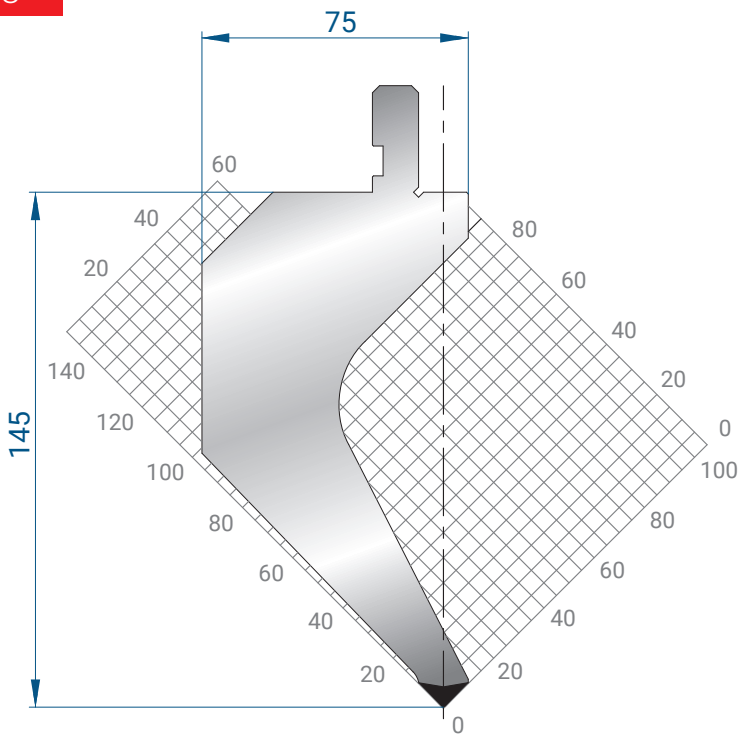

1030

835 mm	39,3 kg
415 mm	19,5 kg
805 mm FRAZ. / SECT.	36,1 kg


Mat = C45
H = 145
Max T/m = 80
α = 88°
R = 0.8

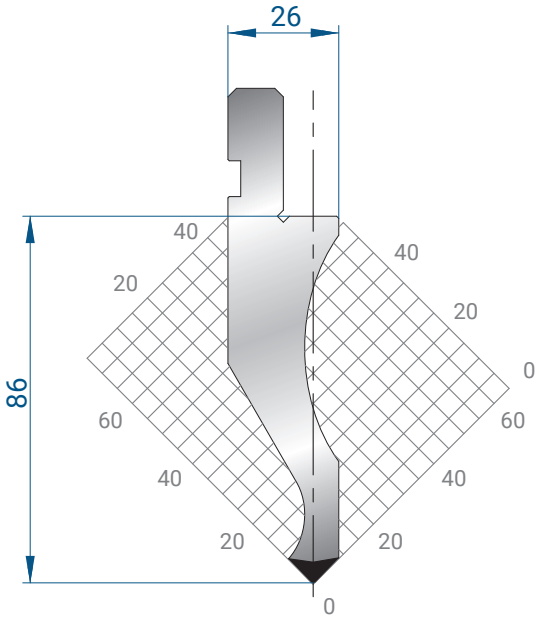

1022

835 mm	10,9 kg
415 mm	5,4 kg
805 mm FRAZ. / SECT.	10,0 kg


Mat = C45
H = 86
Max T/m = 100
α = 88°
R = 0.8

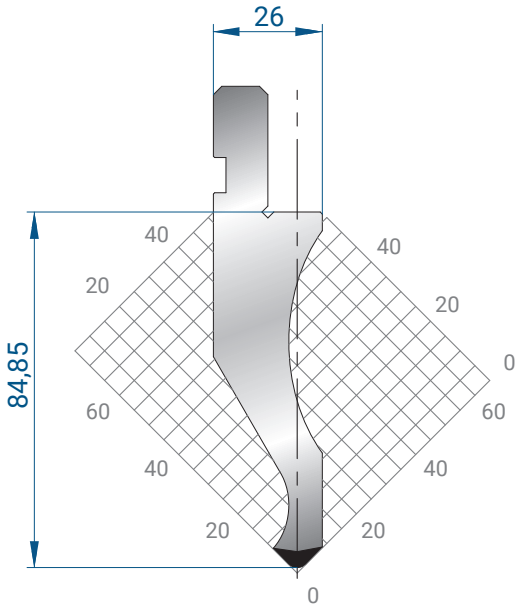

1023

835 mm	10,9 kg
415 mm	5,4 kg
805 mm FRAZ. / SECT.	10,0 kg


Mat = C45
H = 84.85
Max T/m = 100
α = 88°
R = 3

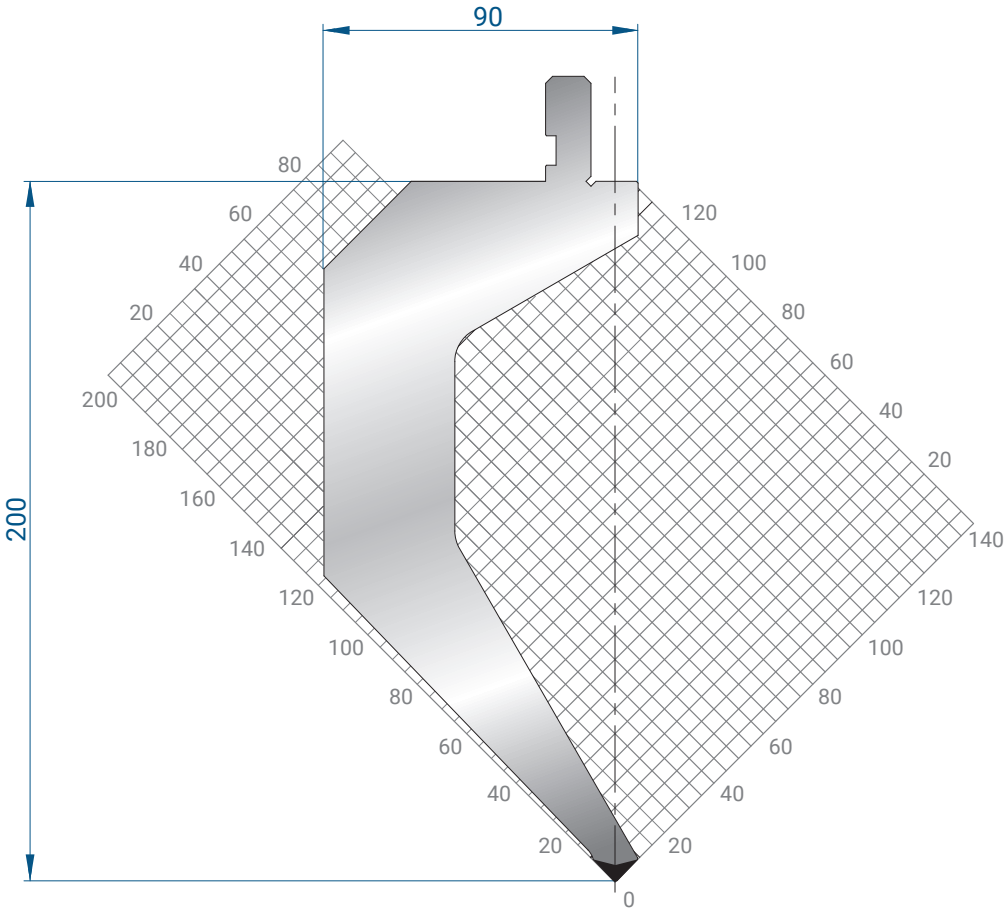

1291

Mat = C45
bonificato / *tempered*
H = 200
Max T/m = 85
α = 88°
R = 0.8


505 mm	32,4 kg
805 mm FRAZ. / SECT.	49,2 kg

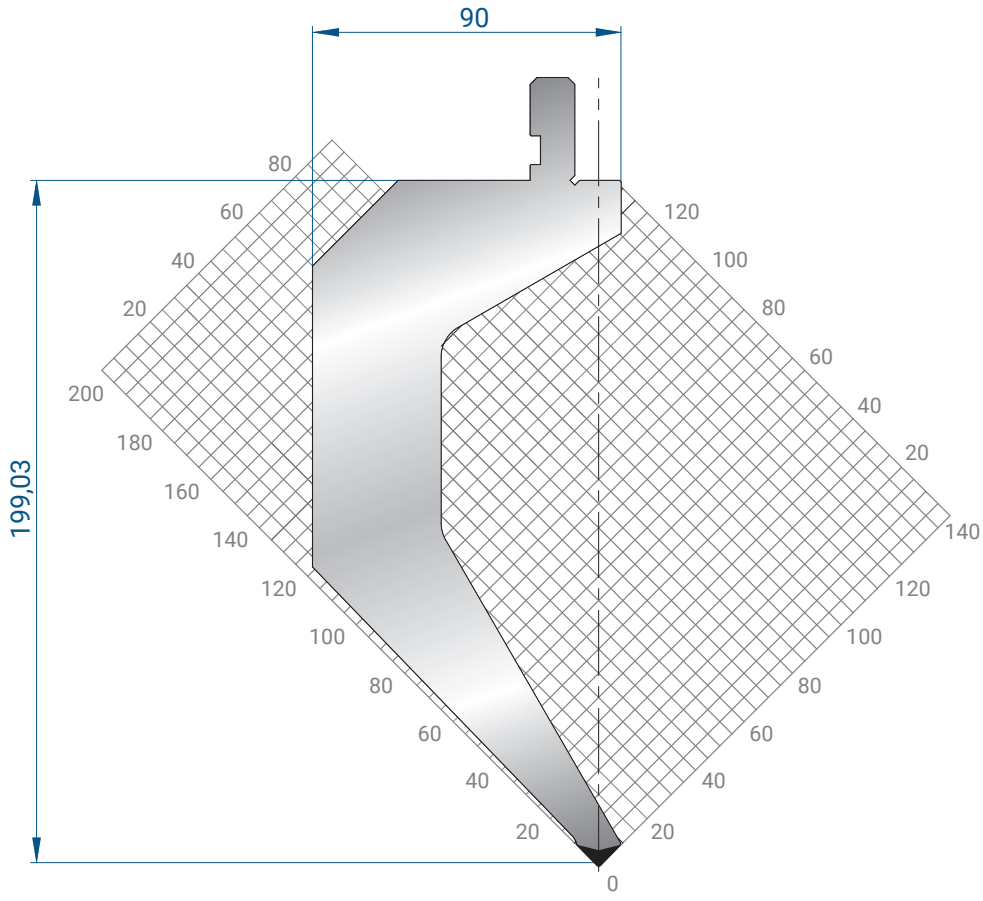

1301

Mat = C45
bonificato / *tempered*
H = 199.03
Max T/m = 85
α = 88°
R = 3


505 mm	32,4 kg
805 mm FRAZ. / SECT.	49,2 kg

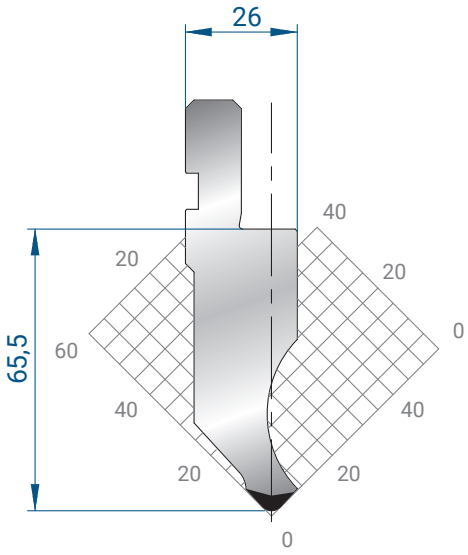

1177

835 mm	10,4 kg
415 mm	5,2 kg
805 mm FRAZ. / SECT.	9,6 kg


Mat = C45
H = 65.50
Max T/m = 100
α = 85°
R = 3

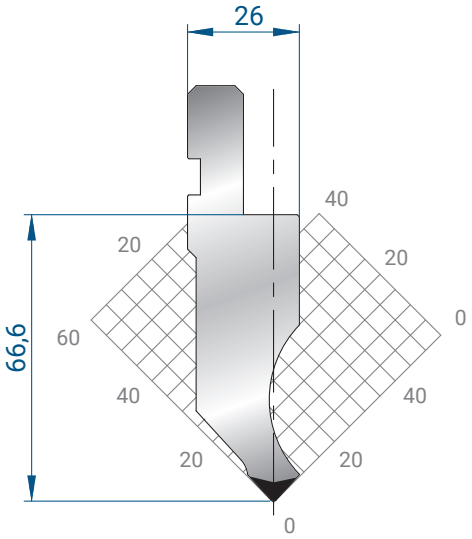

1260

835 mm	10,4 kg
415 mm	5,2 kg
805 mm FRAZ. / SECT.	9,6 kg


Mat = C45
H = 66.60
Max T/m = 100
α = 85°
R = 0.8

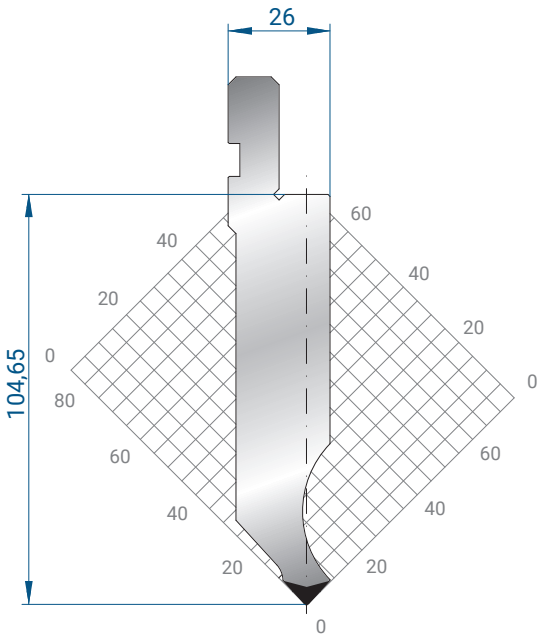

1281

835 mm	16,4 kg
415 mm	8,2 kg
805 mm FRAZ. / SECT.	15,1 kg

Mat = C45
H = 104.65
Max T/m = 100
α = 85°
R = 0.8

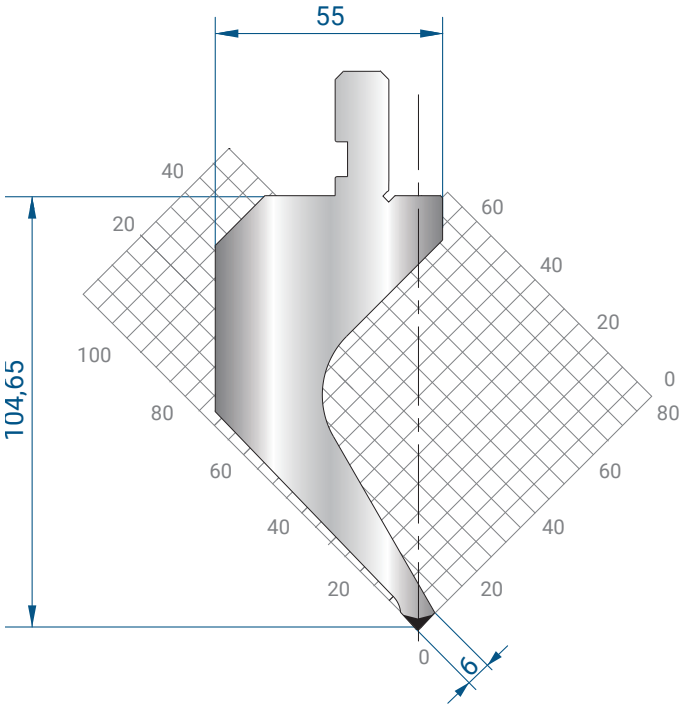

1171


835 mm	20,7 kg
415 mm	10,3 kg
805 mm FRAZ. / SECT.	19,0 kg


Mat = C45
H = 104.65
Max T/m = 50
α = 85°
R = 0.8

1172

835 mm	21,4 kg
415 mm	10,7 kg
805 mm FRAZ. / SECT.	19,7 kg

Mat = C45
H = 104.60
Max T/m = 50
α = 85°
R = 0.8

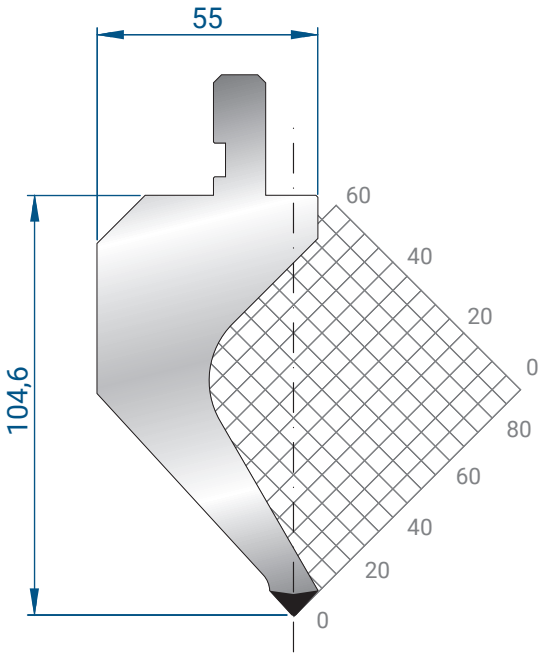


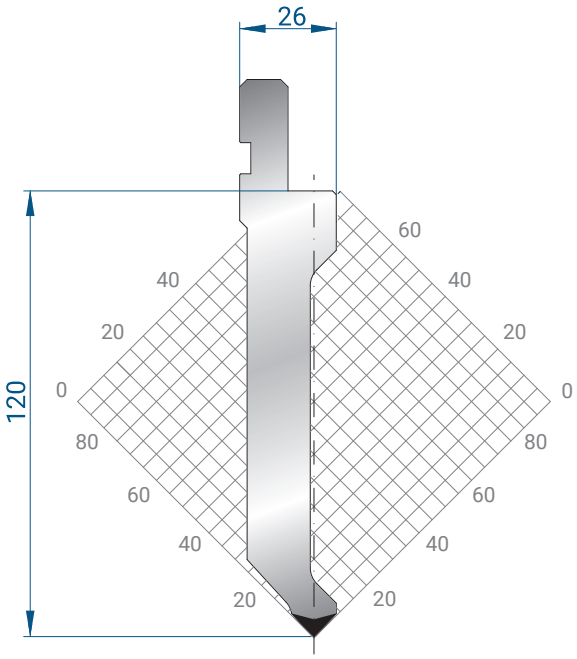

1309

835 mm	15,9 kg
415 mm	7,9 kg
805 mm FRAZ. / SECT.	14,7 kg


Mat = C45
H = 120.00
Max T/m = 70
α = 85°
R = 0.8

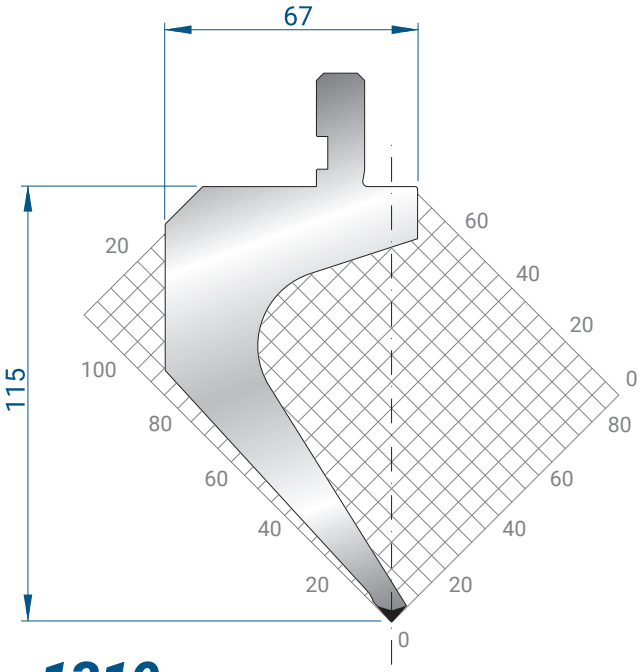

1310

835 mm	22,7 kg
415 mm	11,3 kg
805 mm FRAZ. / SECT.	20,8 kg


Mat = 42CrMo4
bonificato / *tempered*
H = 115.00
Max T/m = 35
α = 85°
R = 0.8

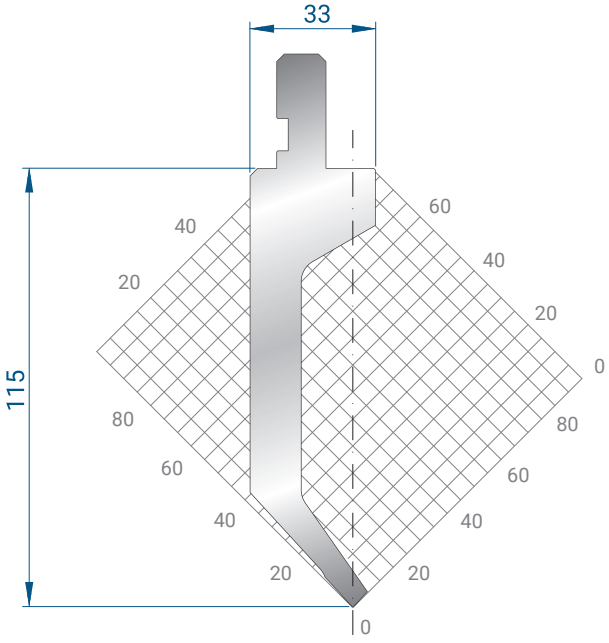

1312

835 mm	14,3 kg
415 mm	7,1 kg
805 mm FRAZ. / SECT.	13,1 kg

Mat = 42CrMo4
bonificato / *tempered*
H = 115.00
Max T/m = 20
α = 85°
R = 0.6

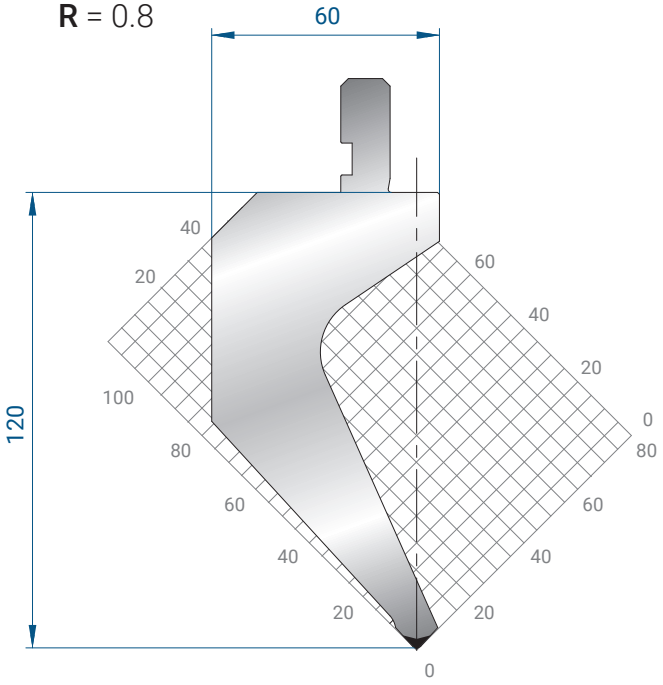


1322

835 mm	26,6 kg
415 mm	13,2 kg
805 mm FRAZ. / SECT.	24,5 kg

Mat = 42CrMo4
bonificato / *tempered*
H = 120.00
Max T/m = 100
α = 85°
R = 1.5


PUNZONI - 75° / PUNCHES - 75°

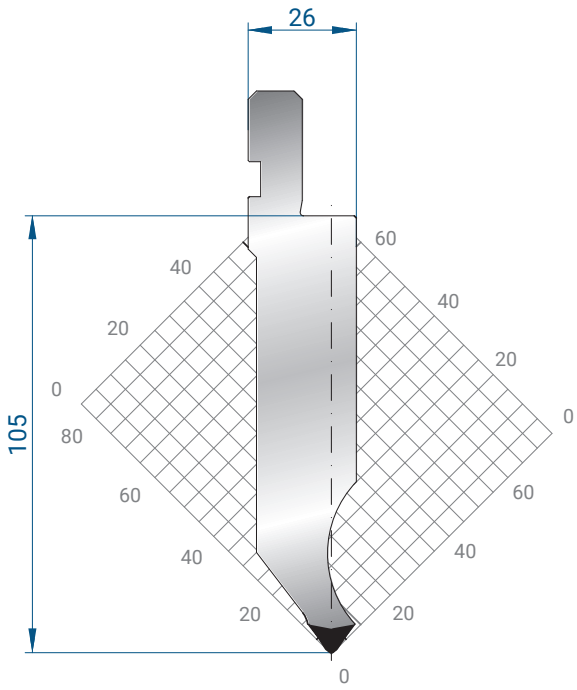

1338

835 mm	16,4 kg
415 mm	8,1 kg
805 mm FRAZ. / SECT.	15,0 kg

Mat = 42CrMo4
bonificato/ *tempered*
H = 105
Max T/m = 100
α = 75°
R = 0.8

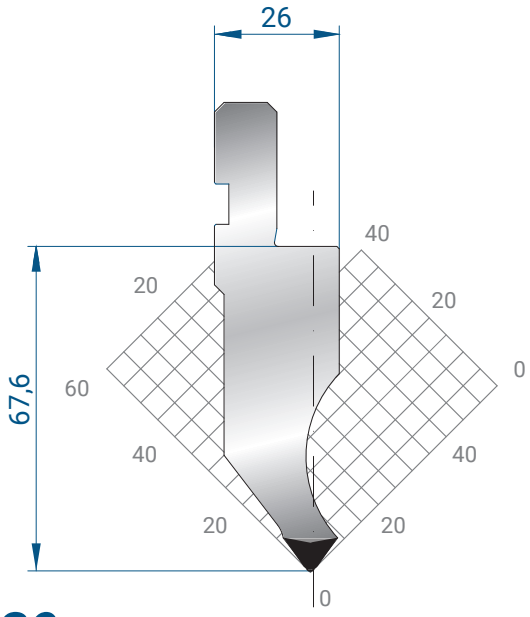


1339

835 mm	10,5 kg
415 mm	5,2 kg
805 mm FRAZ. / SECT.	9,7 kg

Mat = 42CrMo4
bonificato/ *tempered*
H = 67,6
Max T/m = 100
α = 75°
R = 0.8


PUNZONI - 60° / PUNCHES - 60°

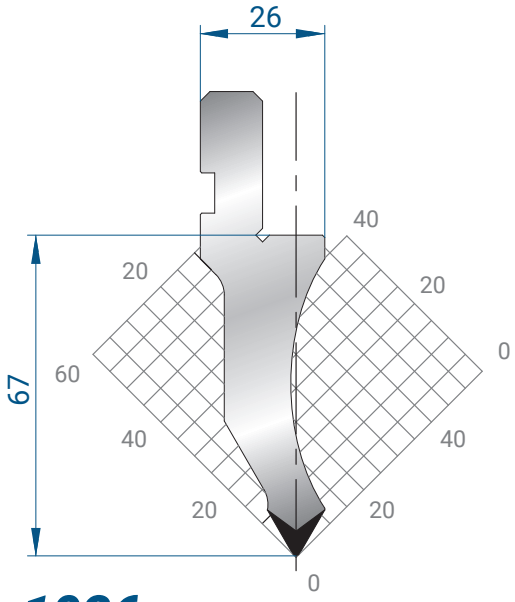

1026

835 mm	8,6 kg
415 mm	4,3 kg
805 mm FRAZ. / SECT.	7,9 kg


Mat = C45
H = 67.00
Max T/m = 80
α = 60°
R = 0.8

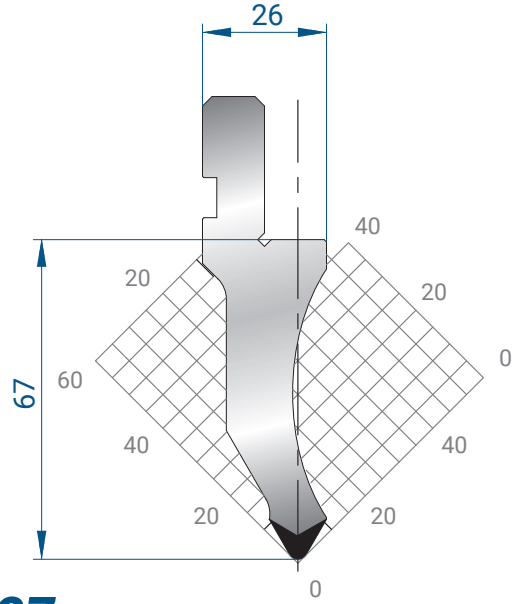

1027

835 mm	8,8 kg
415 mm	4,4 kg
805 mm FRAZ. / SECT.	8,1 kg


Mat = C45
H = 67.00
Max T/m = 80
α = 60°
R = 2

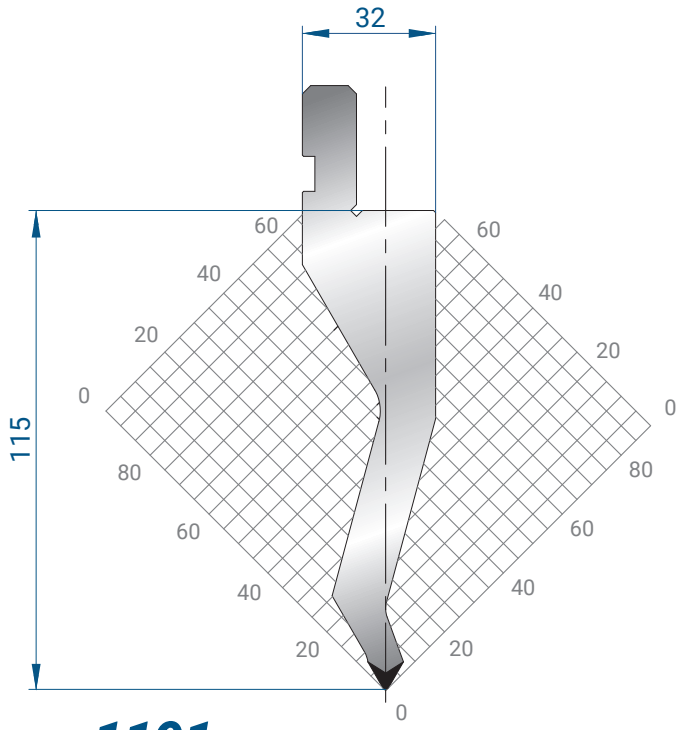

1191

835 mm	15,2 kg
415 mm	7,6 kg
805 mm FRAZ. / SECT.	14,0 kg


Mat = C45
H = 115.00
Max T/m = 60
α = 60°
R = 0.8

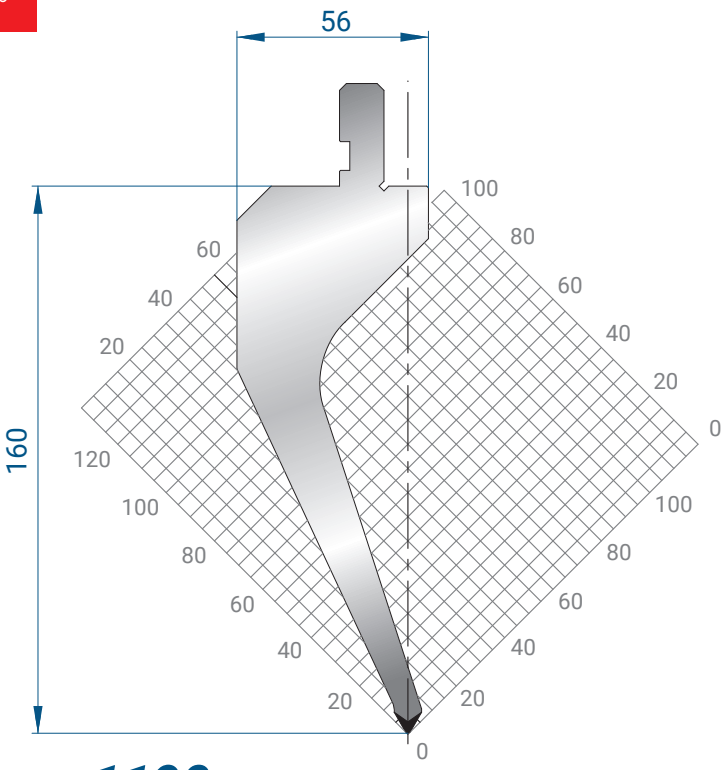

1190

835 mm	26,9 kg
415 mm	13,4 kg
805 mm FRAZ. / SECT.	24,7 kg


Mat = C45
bonificato / *tempered*
H = 160.00
Max T/m = 40
α= 60°
R = 0.8

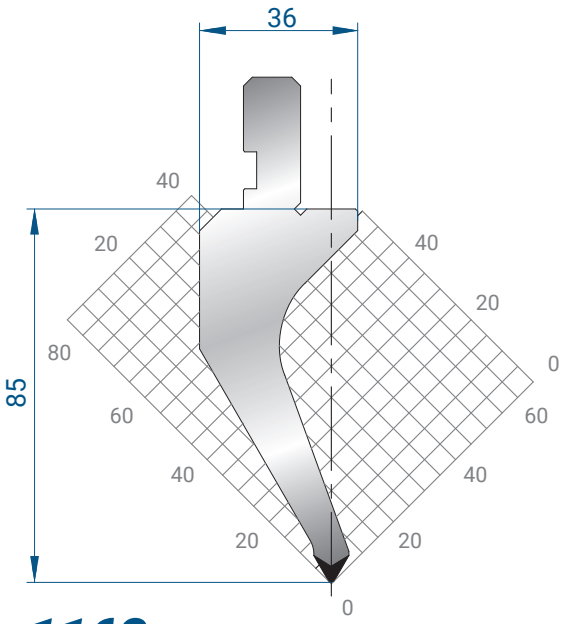

1162

835 mm	11,7 kg
415 mm	5,8 kg
805 mm FRAZ. / SECT.	10,7 kg


Mat = 42CrMo4
bonificato / *tempered*
H = 85.00
Max T/m = 40
α = 60°
R = 0.8

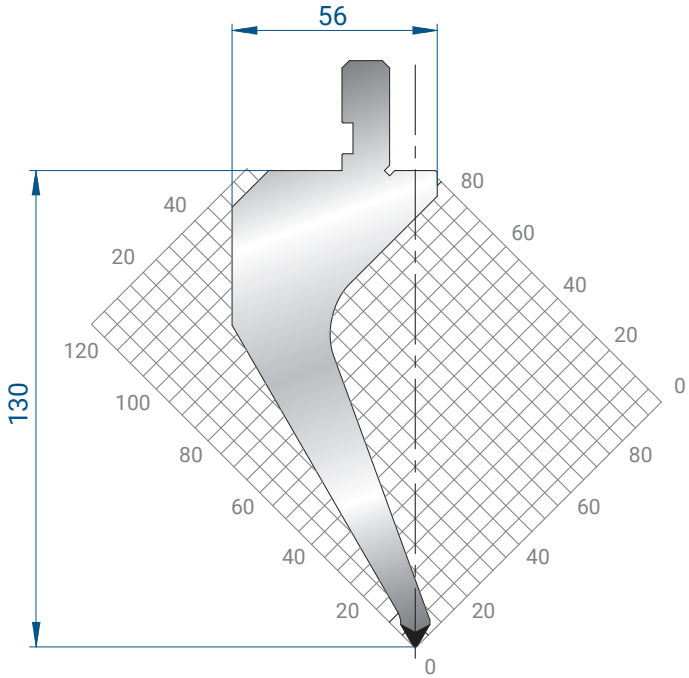

1163

835 mm	22,3 kg
415 mm	11,1 kg
805 mm FRAZ. / SECT.	20,5 kg


Mat = C45
bonificato / *tempered*
H = 130.00
Max T/m = 40
α = 60°
R = 0.8

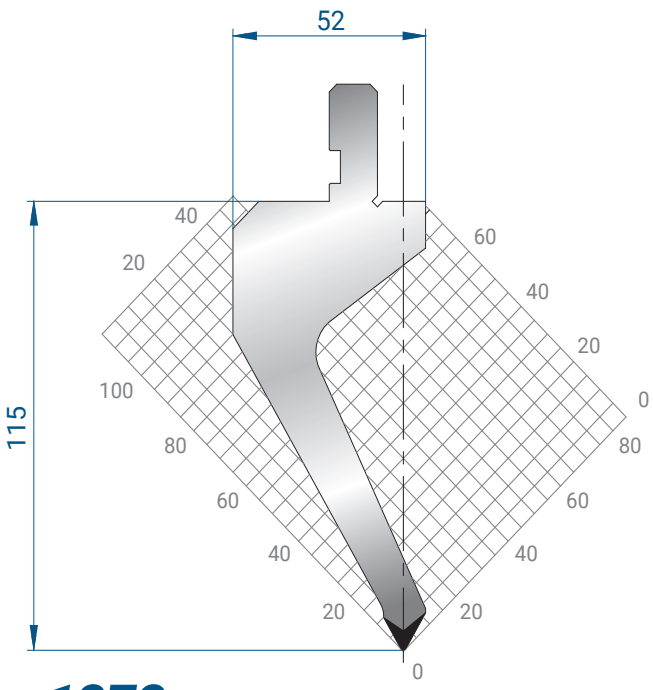

1272

835 mm	19,2 kg
415 mm	9,6 kg
805 mm FRAZ. / SECT.	17,7 kg


Mat = C45
bonificato / *tempered*
H = 115.00
Max T/m = 40
α = 60°
R = 0.8

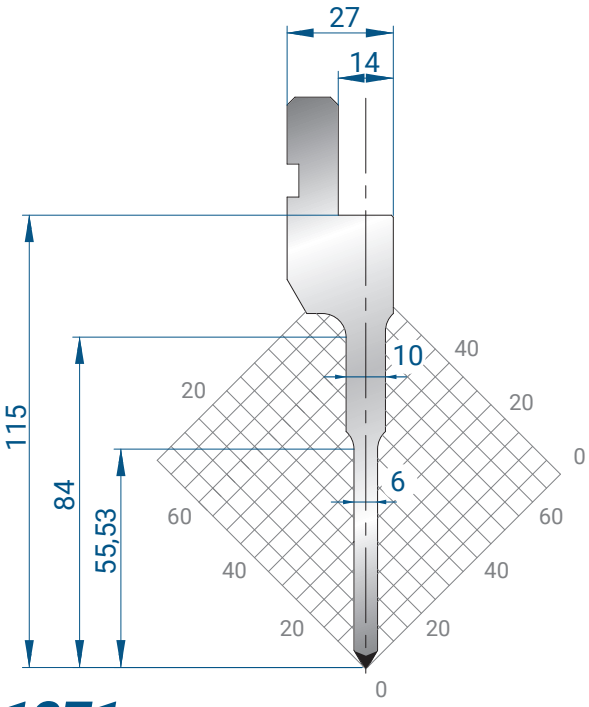

1271

835 mm	11,0 kg
415 mm	5,5 kg
805 mm FRAZ. / SECT.	10,1 kg


Mat = C45
bonificato / *tempered*
H = 115.00
Max T/m = 50
α = 60°
R = 0.8

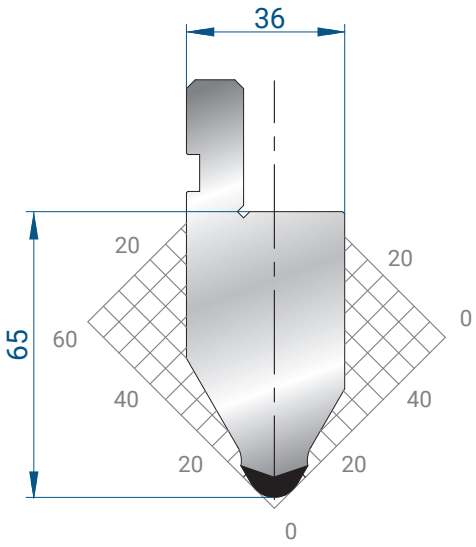

1032

835 mm	14,8 kg
415 mm	7,3 kg
805 mm FRAZ. / SECT.	13,6 kg


Mat = C45
H = 65.00
Max T/m = 120
α = 60°
R = 6

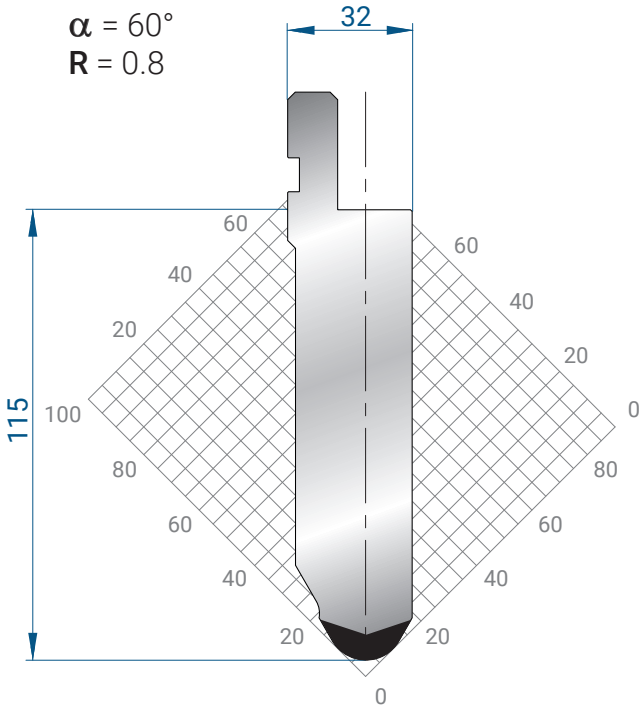

1283

835 mm	23,8 kg
415 mm	11,8 kg
805 mm FRAZ. / SECT.	21,9 kg

Mat = C45
H = 115.00
Max T/m = 150
α = 60°
R = 10

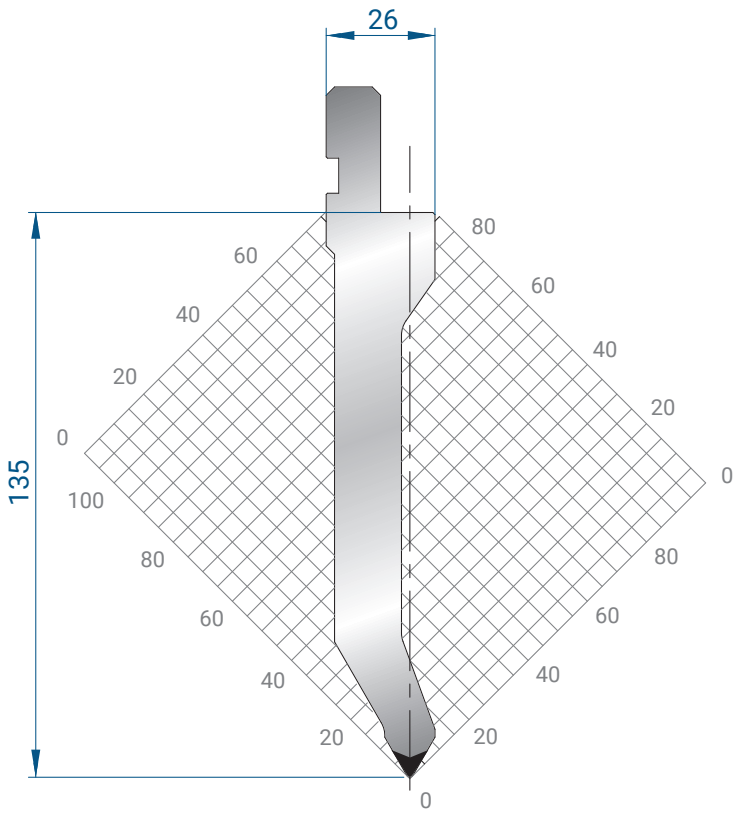

1284


835 mm	16,8 kg
415 mm	8,4 kg
805 mm FRAZ. / SECT.	15,5 kg


Mat = C45
H = 135.00
Max T/m = 70
α = 60°
R = 0.8

1293

835 mm	40,7 kg
415 mm	20,2 kg
805 mm FRAZ. / SECT.	37,4 kg

Mat = C45
H = 200.00
Max T/m = 150
α = 60°
R = 8

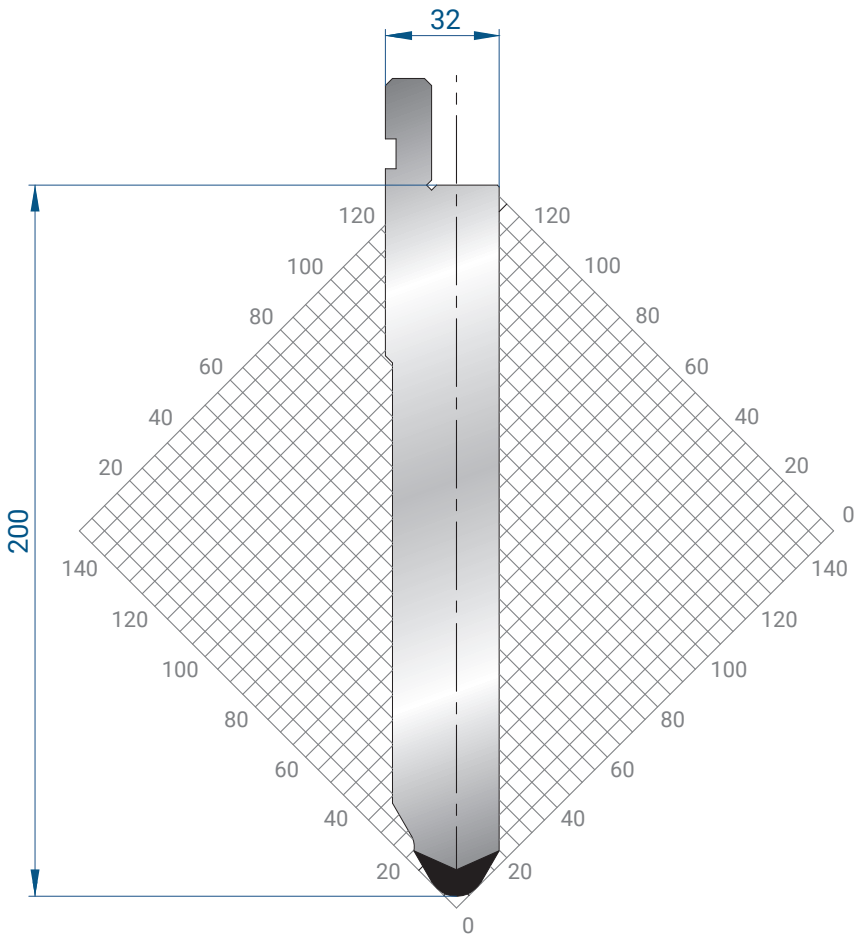


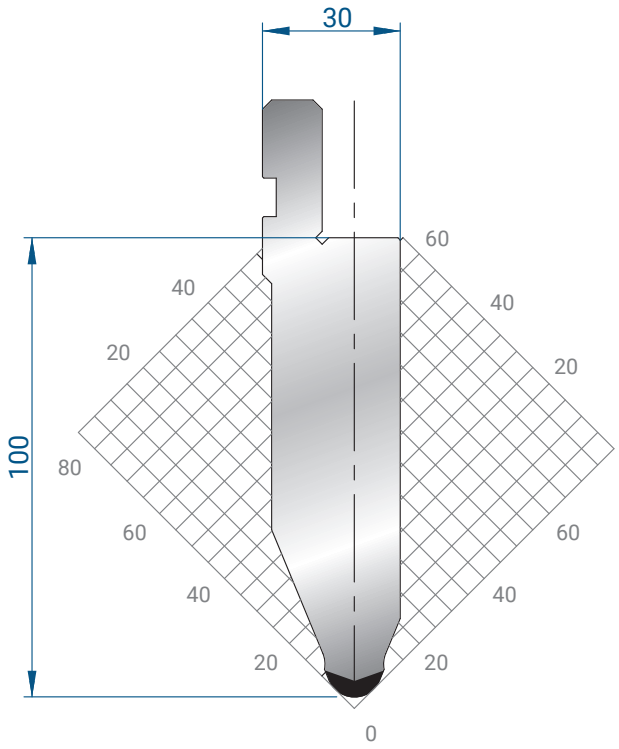

1053

835 mm	18,7 kg
415 mm	9,3 kg
805 mm FRAZ. / SECT.	17,2 kg


Mat = C45
H = 100.00
Max T/m = 100
α = 45°
R = 6

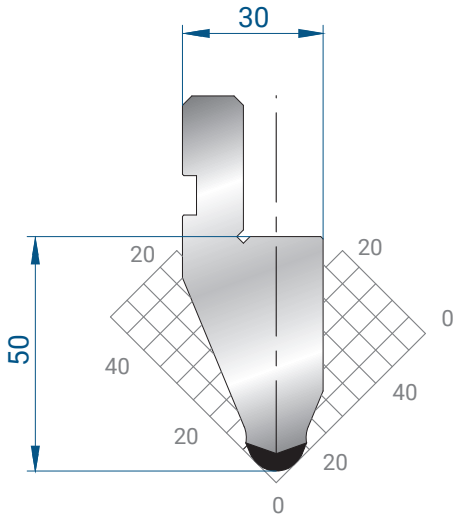

1054

835 mm	9,5 kg
415 mm	4,7 kg
805 mm FRAZ. / SECT.	8,8 kg


Mat = C45
H = 50.00
Max T/m = 100
α = 45°
R = 6

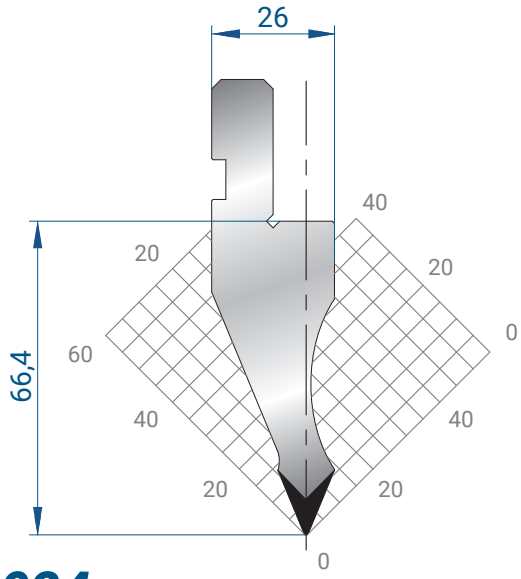

1024

835 mm	9,2 kg
415 mm	4,6 kg
805 mm FRAZ. / SECT.	8,4 kg


Mat = C45
H = 66.40
Max T/m = 80
α = 45°
R = 0.5

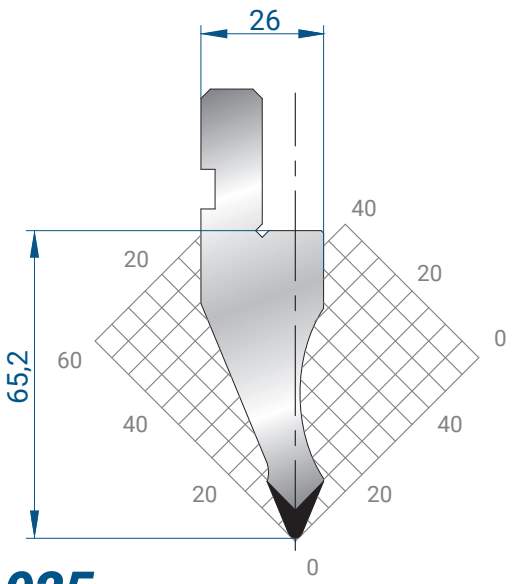

1025

835 mm	9,2 kg
415 mm	4,6 kg
805 mm FRAZ. / SECT.	8,5 kg


Mat = C45
H = 65.20
Max T/m = 80
α = 45°
R = 1.5

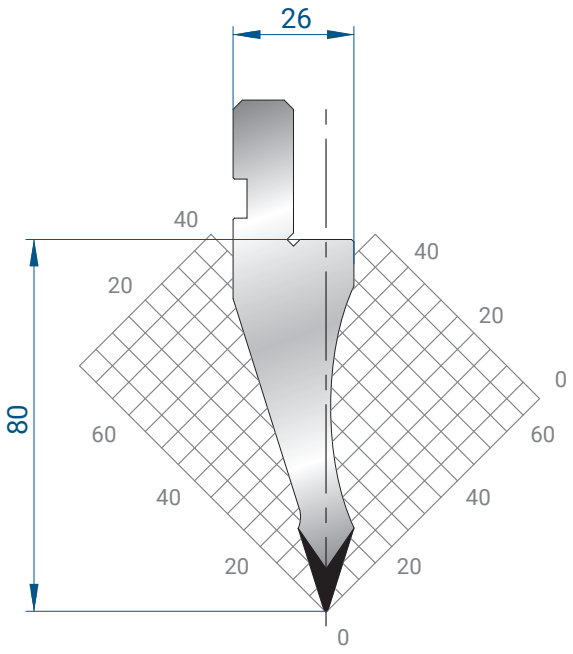

1035

835 mm	10,0 kg
415 mm	5,0 kg
805 mm FRAZ. / SECT.	9,2 kg


Mat = C45
H = 80.00
Max T/m = 70
α = 35°
R = 0.5

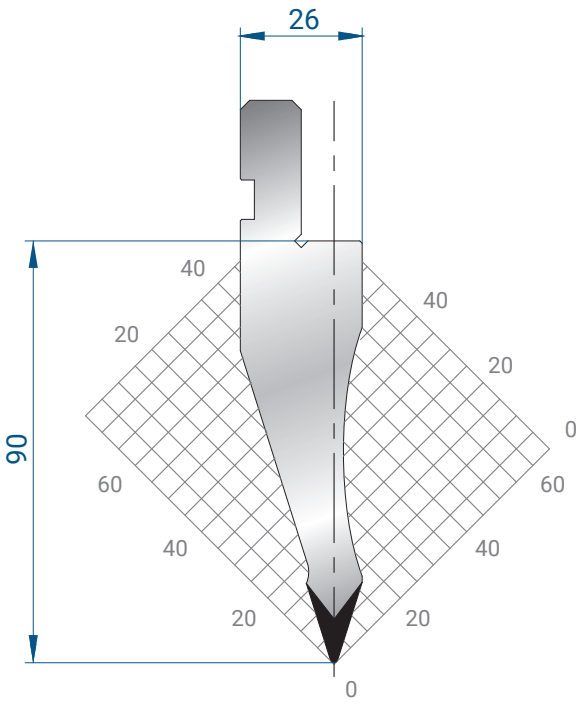

1047

835 mm	12,0 kg
415 mm	6,0 kg
805 mm FRAZ. / SECT.	11,1 kg


Mat = C45
H = 90.00
Max T/m = 70
α = 35°
R = 0.8

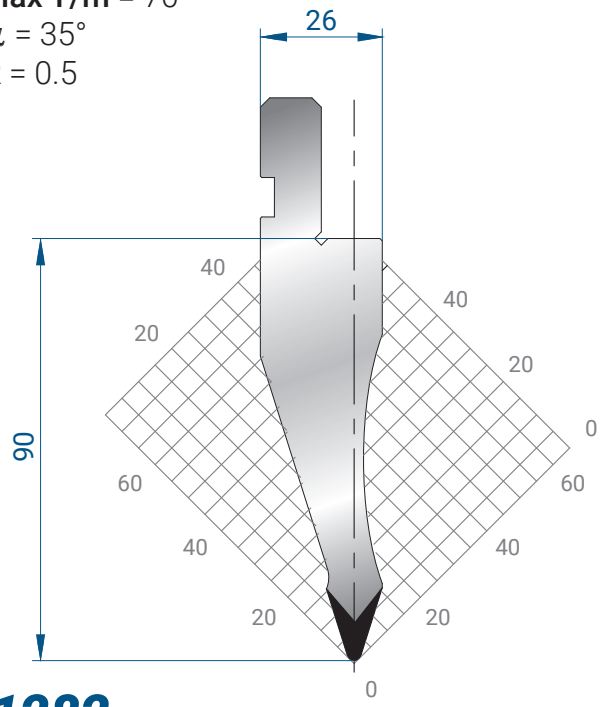

1282

835 mm	12,3 kg
415 mm	6,1 kg
805 mm FRAZ. / SECT.	11,3 kg


Mat = C45
H = 90.00
Max T/m = 70
α = 35°
R = 1.5

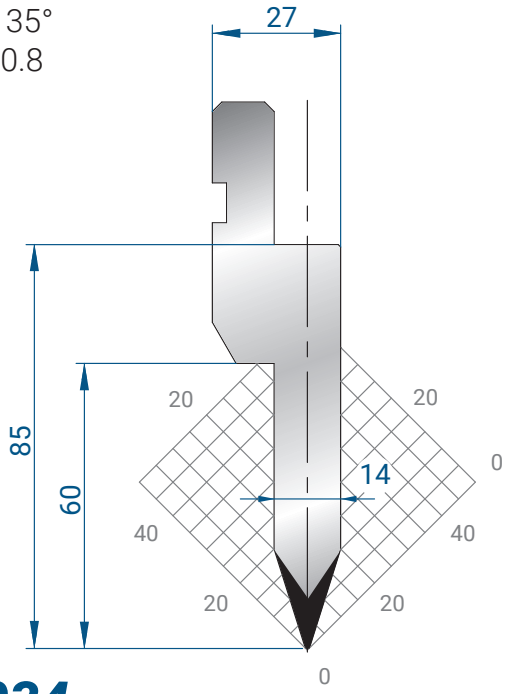

1034

835 mm	11,1 kg
415 mm	5,6 kg
805 mm FRAZ. / SECT.	10,3 kg


Mat = C45
H = 85.00
Max T/m = 100
α = 35°
P = 0.8

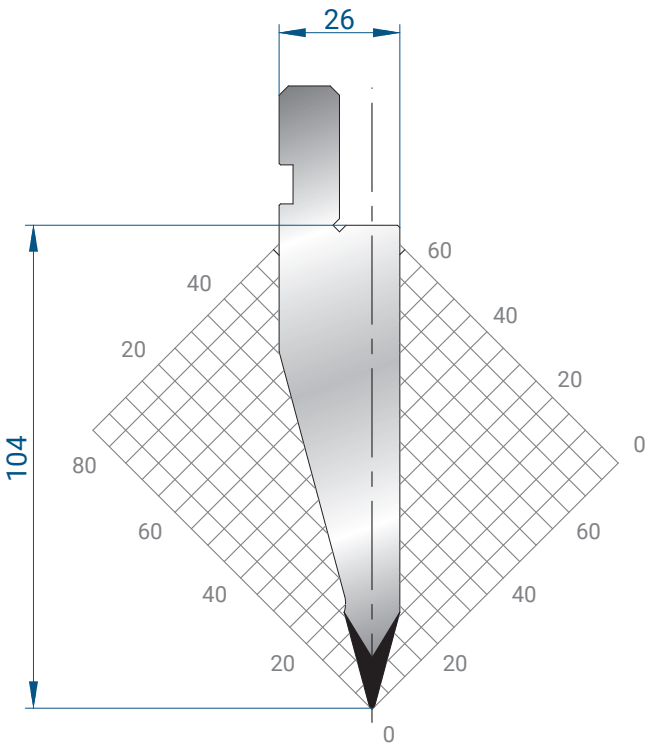

1193

835 mm	14,6 kg
415 mm	7,3 kg
805 mm FRAZ. / SECT.	13,4 kg


Mat = C45
H = 104.00
Max T/m = 100
α = 30°
R = 0.6

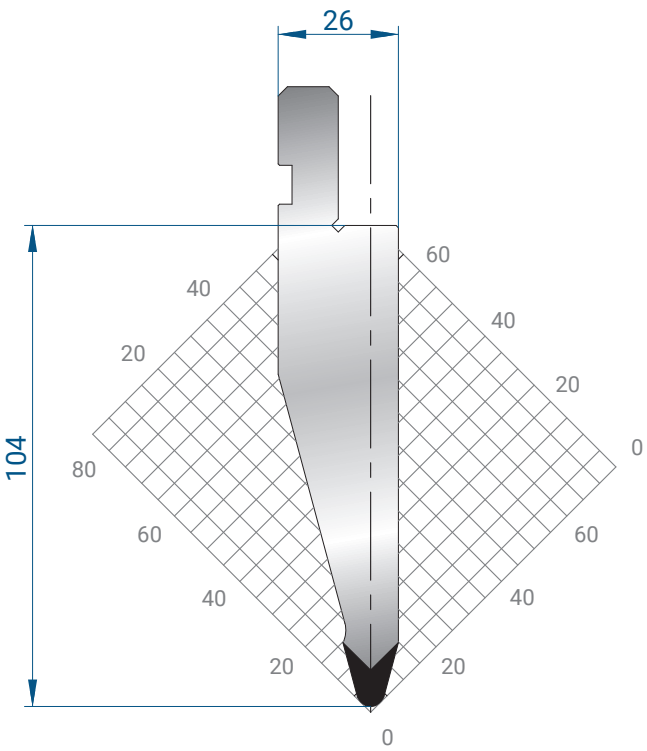

1289

835 mm	15,5 kg
415 mm	7,7 kg
805 mm FRAZ. / SECT.	14,2 kg


Mat = C45
H = 104.00
Max T/m = 100
α = 30°
R = 3

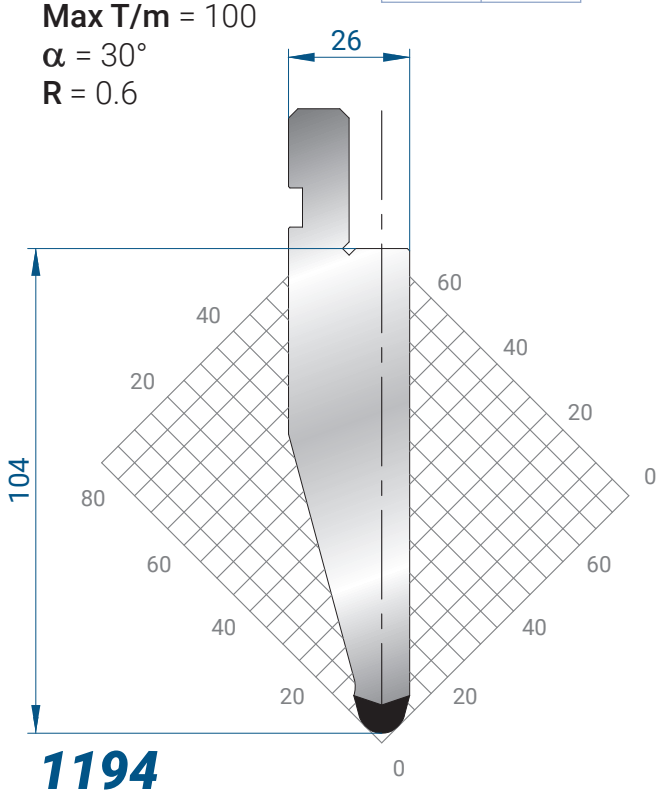

1194

835 mm	16,4 kg
415 mm	8,1 kg
805 mm FRAZ. / SECT.	15,1 kg


Mat = C45
H = 104.00
Max T/m = 100
α = 30°
R = 5

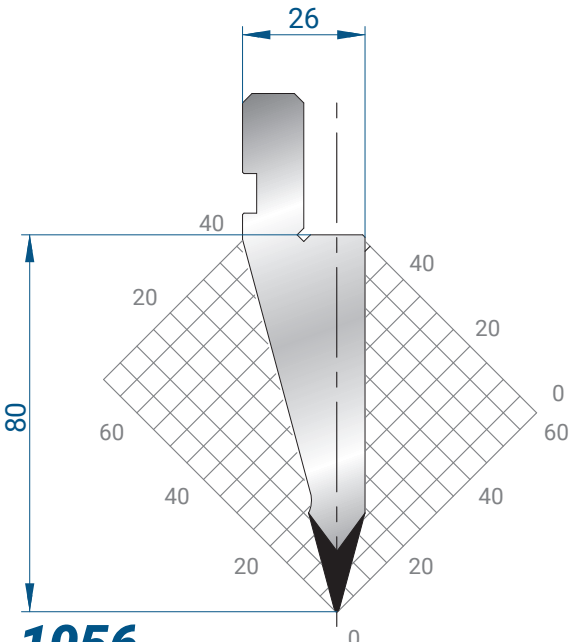

1056

835 mm	10,3 kg
415 mm	5,1 kg
805 mm FRAZ. / SECT.	9,5 kg


Mat = C45
H = 80.00
Max T/m = 100
α = 30°
R = 0.5

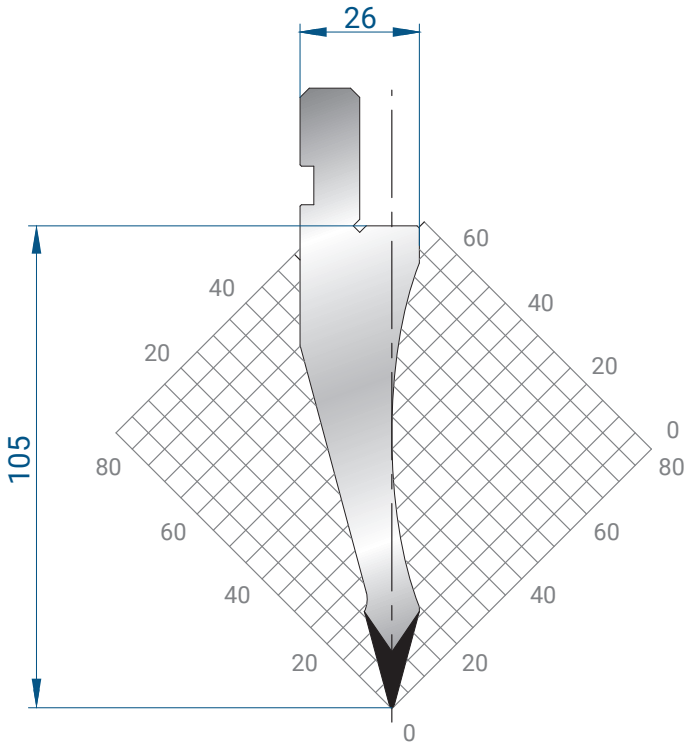

1055

835 mm	12,6 kg
415 mm	6,3 kg
805 mm FRAZ. / SECT.	11,6 kg


Mat = C45
H = 105.00
Max T/m = 50
α = 30°
R = 0.5

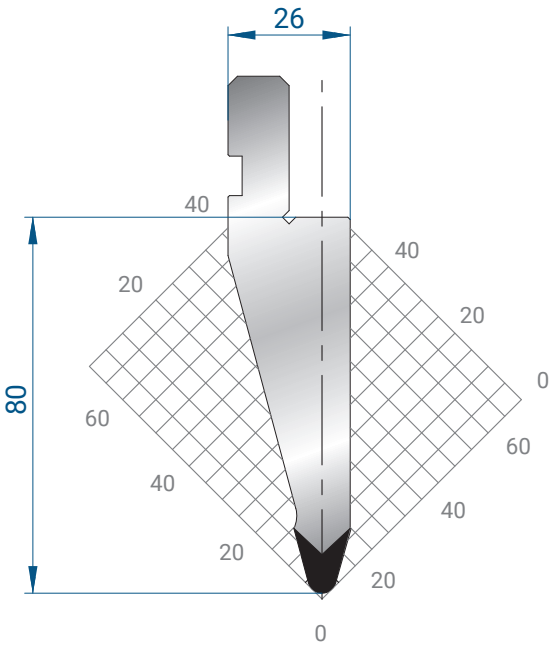

1057

835 mm	11,4 kg
415 mm	5,7 kg
805 mm FRAZ. / SECT.	10,5 kg


Mat = C45
H = 80.00
Max T/m = 100
α = 30°
R = 3

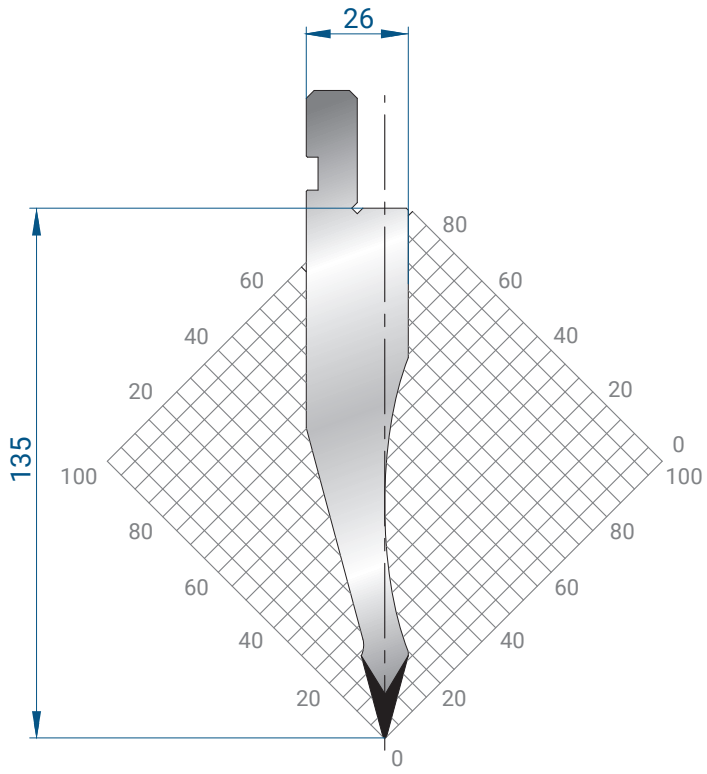

1052

Mat = C45
H = 135.00
Max T/m = 50
α = 30°
R = 0.5


835 mm	17,0 kg
415 mm	8,5 kg
805 mm FRAZ. / SECT.	15,6 kg

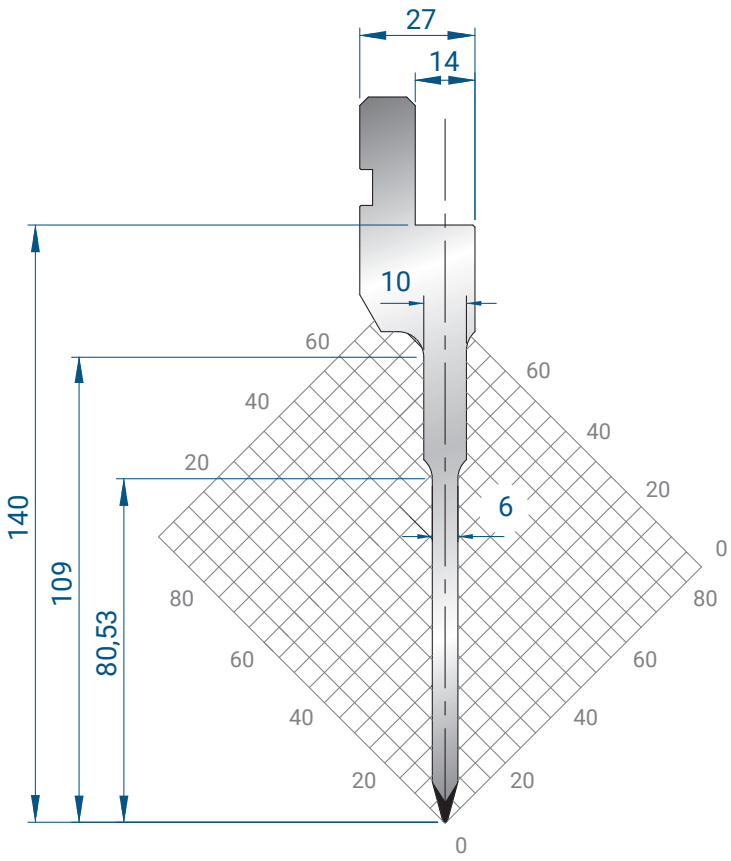

1086

835 mm	11,9 kg
415 mm	5,9 kg
805 mm FRAZ. / SECT.	10,9 kg


Mat = C45
bonificato / *tempered*
H = 140.00
Max T/m = 40
α = 30°
R = 0.6

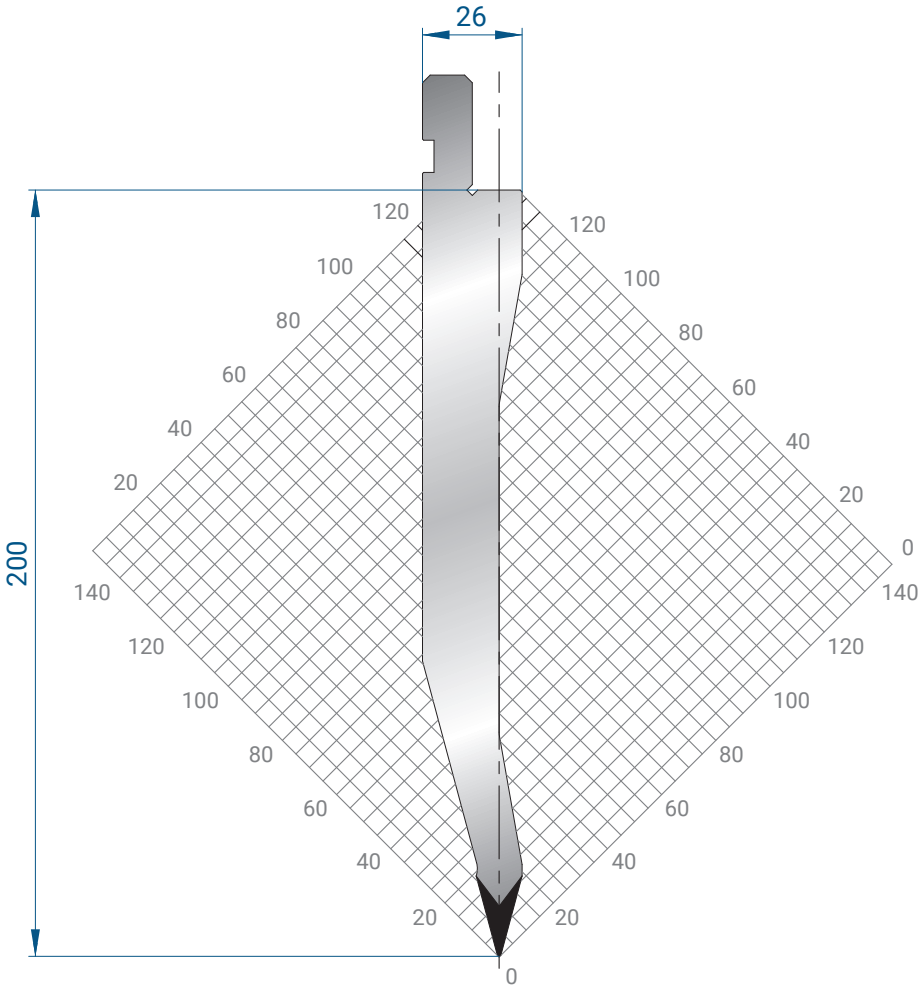

1292

835 mm	25,2 kg
415 mm	12,5 kg
805 mm FRAZ. / SECT.	23,1 kg


Mat = C45
H = 200.00
Max T/m = 50
α = 30°
R = 0.5

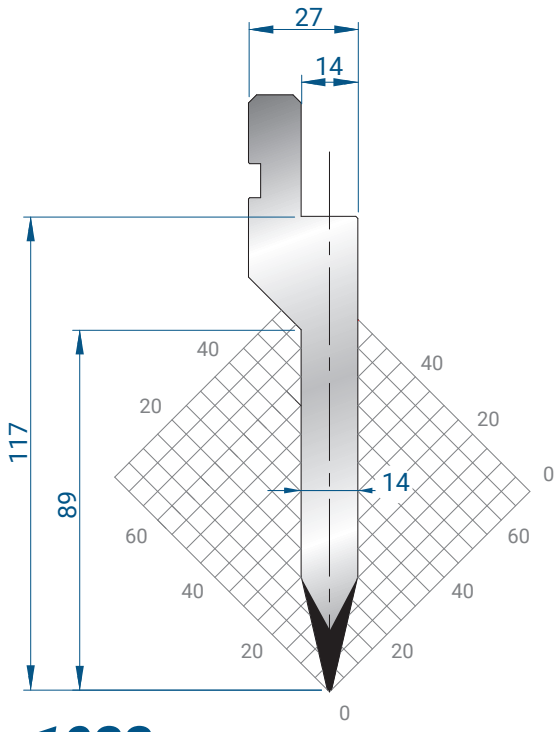

1033

835 mm	13,7 kg
415 mm	6,8 kg
805 mm FRAZ. / SECT.	12,6 kg


Mat = C45
H = 117.00
Max T/m = 100
α = 26°
P = 1

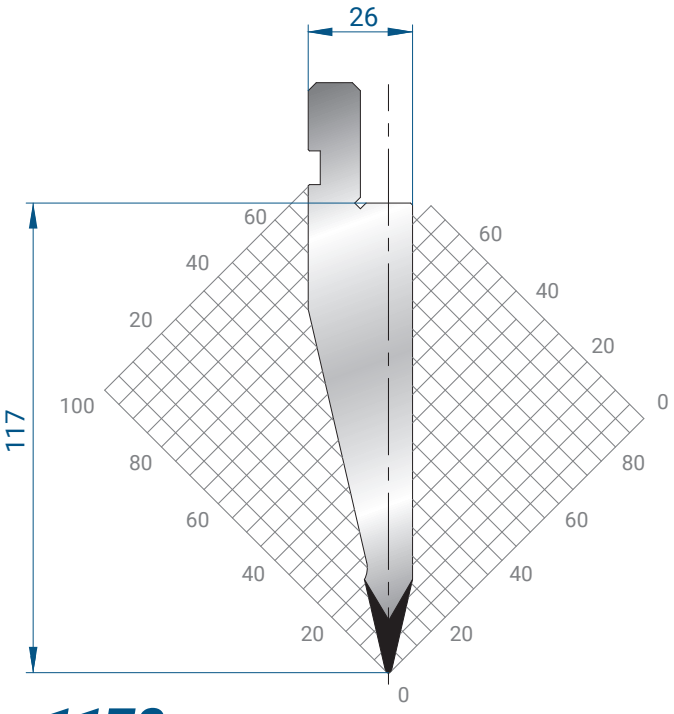

1178

835 mm	15,9 kg
415 mm	7,9 kg
805 mm FRAZ. / SECT.	14,6 kg


Mat = C45
H = 117.00
Max T/m = 100
α = 26°
R = 0.8

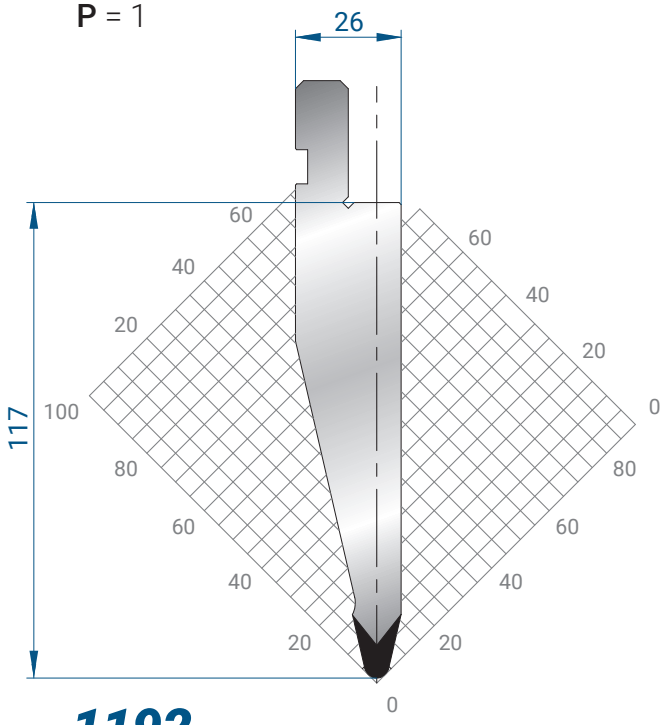

1192

835 mm	17,0 kg
415 mm	8,5 kg
805 mm FRAZ. / SECT.	15,6 kg

Mat = C45
H = 117.00
Max T/m = 100
α = 26°
R = 3

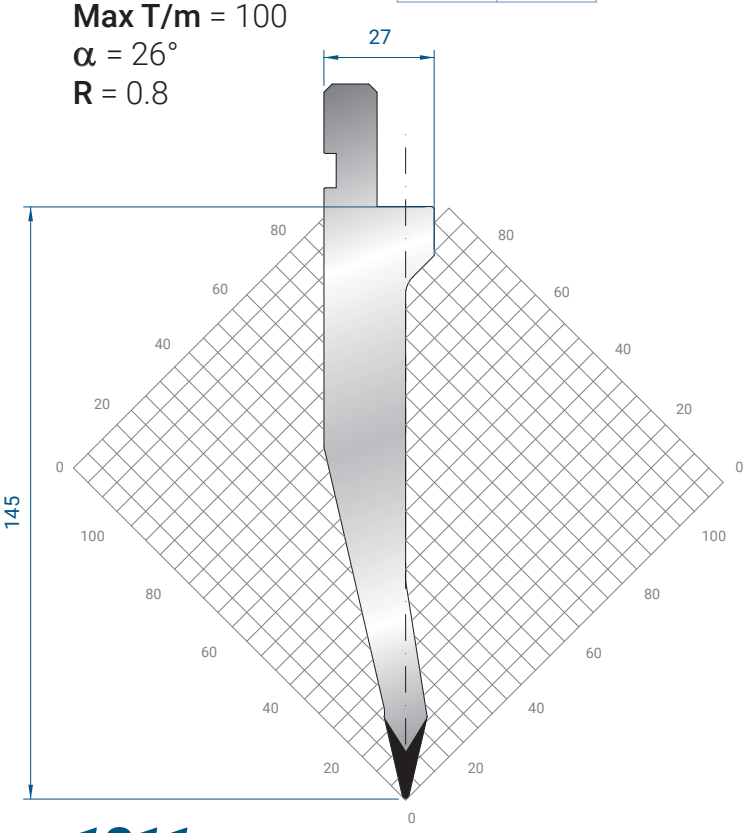

1311


Mat = 42CrMo4 bonificato / *tempered*
H = 145.00
Max T/m = 100
α = 26°
R = 0.8


835 mm	16,8 kg
415 mm	8,3 kg
805 mm FRAZ. / SECT.	15,3 kg




VEDI PAG. 16 PER SCHEMA FRAZIONATURA PUNZONI
SEE PAGE 16 FOR PUNCHES SEGMENTATION DIAGRAM

LUNGHEZZE STANDARD
STANDARD LENGTH

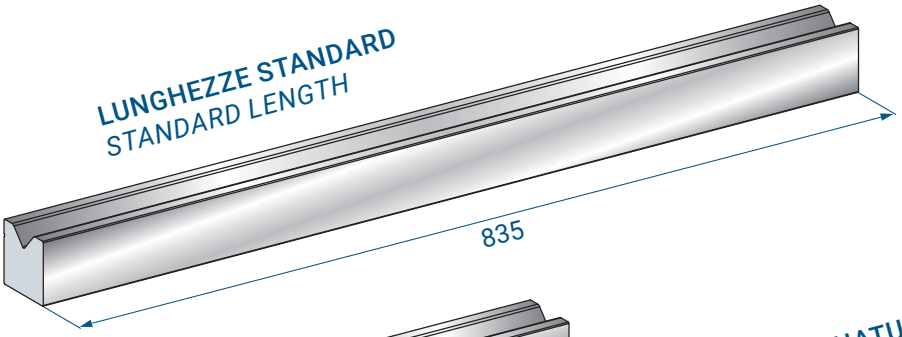

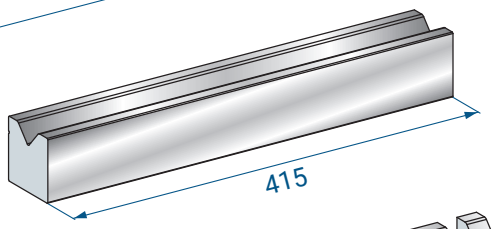

FRAZIONATURA STANDARD
STANDARD SEGMENTATION

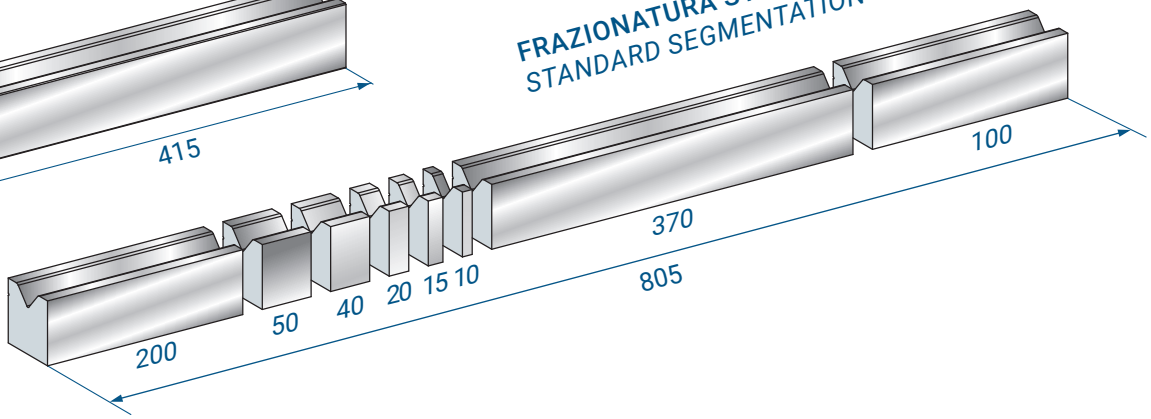


TEMPRATO AD INDUZIONE
INDUCTION HARDENED



TEMPRATO AD INDUZIONE
INDUCTION HARDENED




TEMPRATO AD INDUZIONE
INDUCTION HARDENED



TEMPRATO AD INDUZIONE
INDUCTION HARDENED




TEMPRATO AD INDUZIONE
INDUCTION HARDENED




TAGLI A RICHIESTA
SPECIAL SEGMENTATION



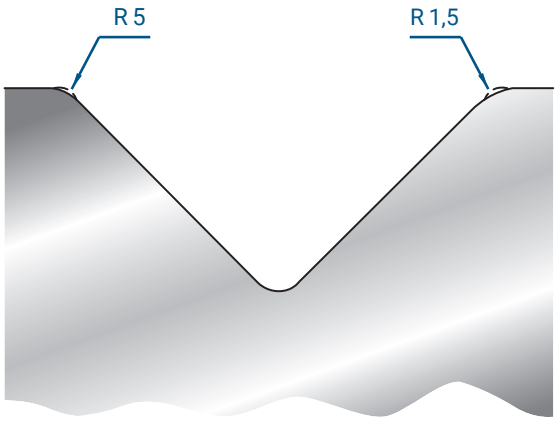


MODIFICA RAGGIO
RADIUS MODIFICATION

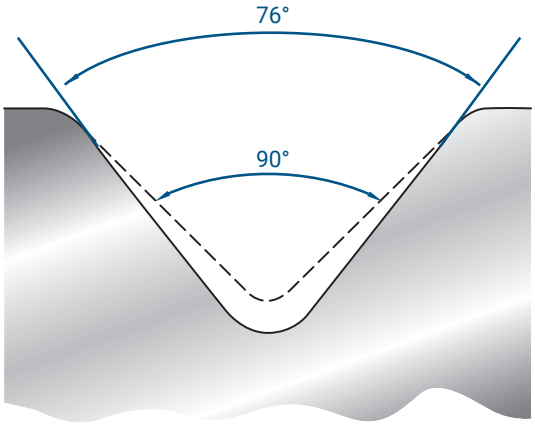

MODIFICA ANGOLO
ANGLE MODIFICATION




SUPPORTI PER MATRICI 2V
DIE HOLDERS FOR 2V DIES

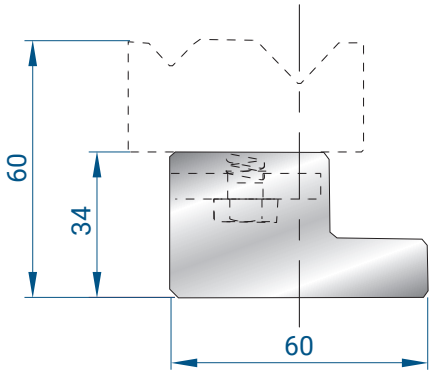

2018

Mat = C45


830 mm	9,3 kg
410 mm	4,6 kg

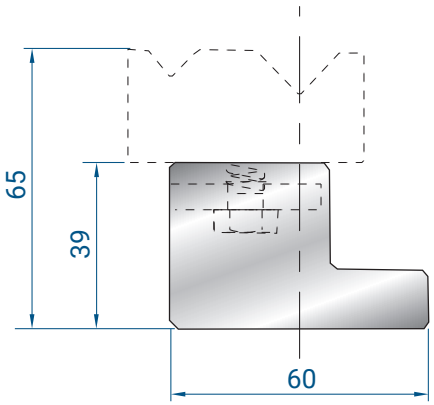

2039

Mat = C45


830 mm	10,4 kg
410 mm	5,1 kg

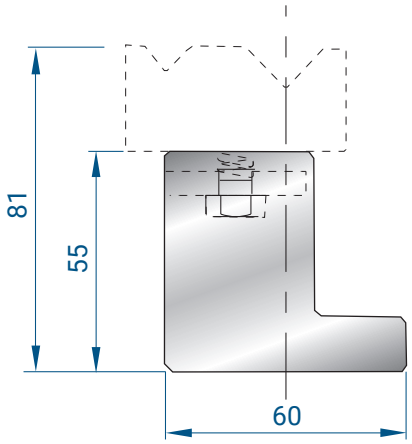

2019

Mat = C45


830 mm	13,2 kg
410 mm	6,5 kg

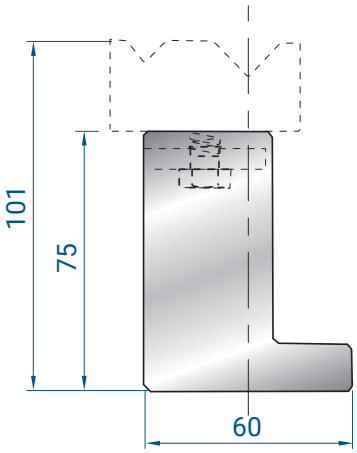

2035

Mat = C45

830 mm	18,0 kg
410 mm	8,9 kg



4277

MOLLA + RONDELLA + VITE
SPRING + WASHER + SCREW


SUPPORTI PER MATRICI AUTOCENTRANTI
DIE HOLDERS FOR SELF CENTERING DIES

SUPPORTI PER MATRICI AUTOCENTRANTI
DIE HOLDERS FOR SELF-CENTERING DIES

DEVE ESSERE INSTALLATO SUI SUPPORTI MODELLO:

MUST BE INSTALLED ON SUPPORT MODEL:


2018 - 2019 -2035 - 2039

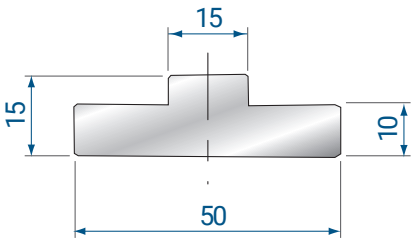

2058

Mat = C45

830 mm	3,7 kg
410 mm	1,8 kg

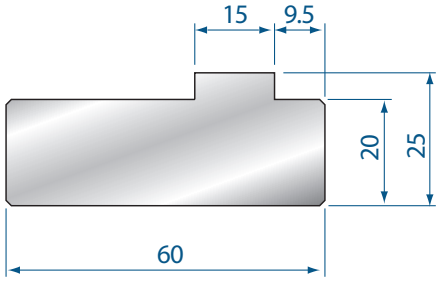


2059

Mat = C45

830 mm	8,3 kg
410 mm	4,1 kg

FERMO PER MATRICI AUTOCENTRANTI
FIXED BAR FOR SELF-CENTERING DIES

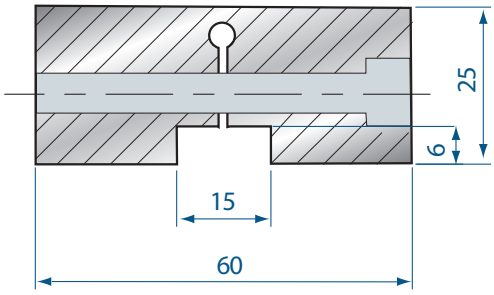


2060


Mat = C45

15 mm	0,2 kg

ESEMPIO DI MONTAGGIO
ASSEMBLY EXAMPLE



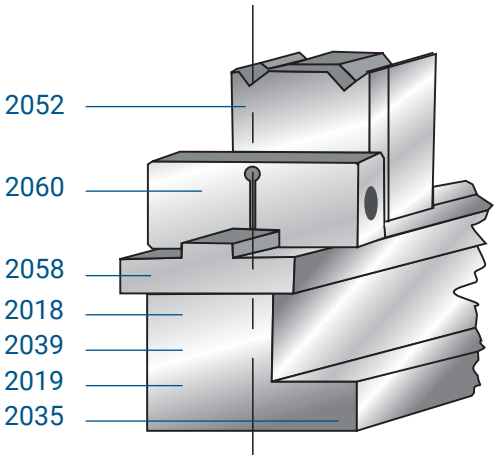


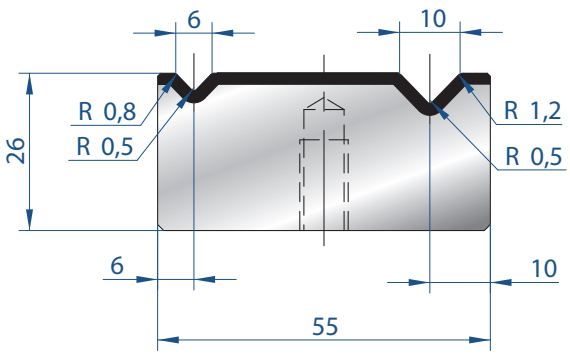

2046

835 mm	9,1 kg
415 mm	4,5 kg


Mat = C45
Max T/m = 100
α = 88°

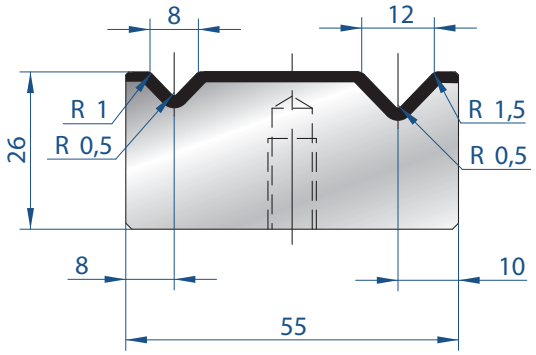

2041

835 mm	9,0 kg
415 mm	4,5 kg


Mat = C45
Max T/m = 100
α = 88°

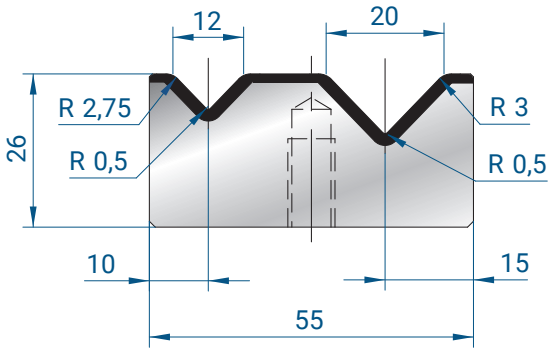

2013

835 mm	8,4 kg
415 mm	4,2 kg


Mat = C45
Max T/m = 100
α = 88°

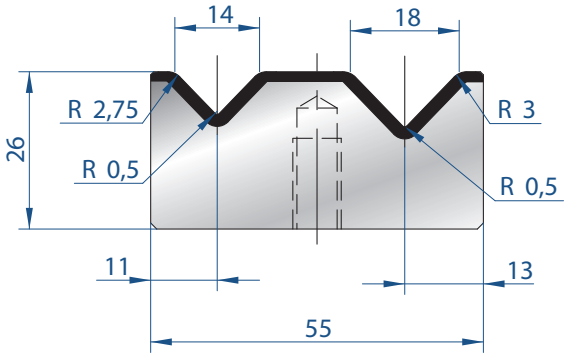

2032

835 mm	8,4 kg
415 mm	4,2 kg

Mat = C45
Max T/m = 100
α = 88°

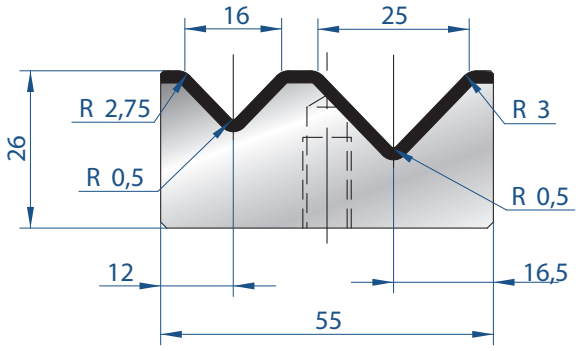


2014

835 mm	7,8 kg
415 mm	3,9 kg

Mat = C45
Max T/m = 100
α = 88°


MATRICI 2V - 60° / 2V DIES - 60°

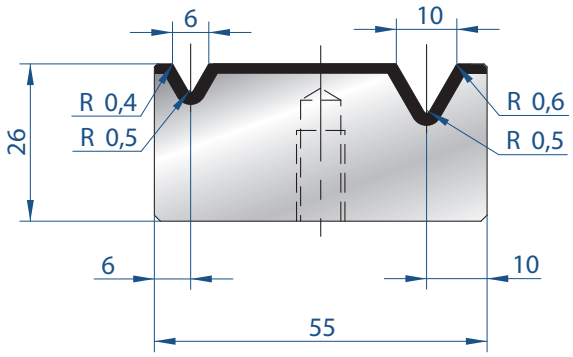

2015

835 mm	8,9 kg
415 mm	4,4 kg


Mat = C45
Max T/m = 60
α = 60°

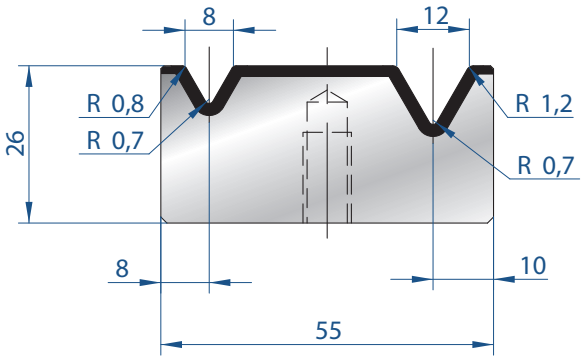

2016

835 mm	8,7 kg
415 mm	4,3 kg


Mat = C45
Max T/m = 60
α = 60°

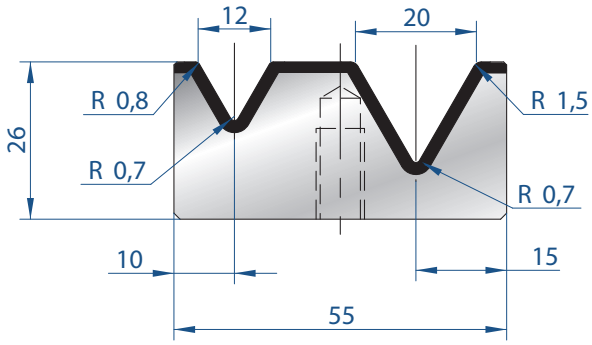

2033

835 mm	7,8 kg
415 mm	3,9 kg

Mat = C45
Max T/m = 60
α = 60°

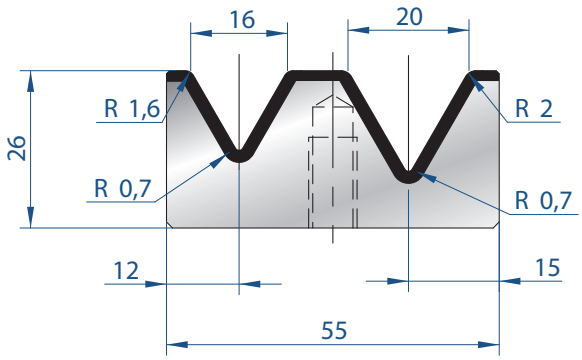


2017

835 mm	7,5 kg
415 mm	3,7 kg

Mat = C45
Max T/m = 60
α = 60°


MATRICI 2V - 30° / 2V DIES - 30°

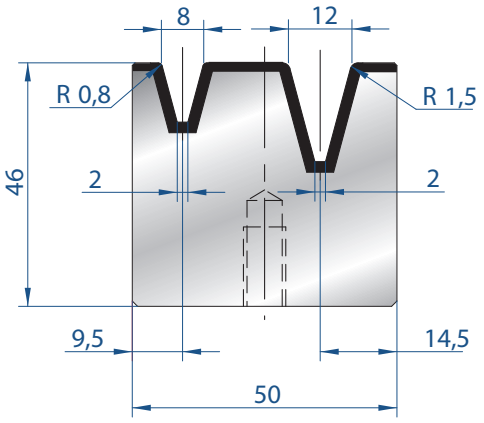

2047

835 mm	13,8 kg
415 mm	6,9 kg


Mat = C45
Max T/m = 40
α = 30°

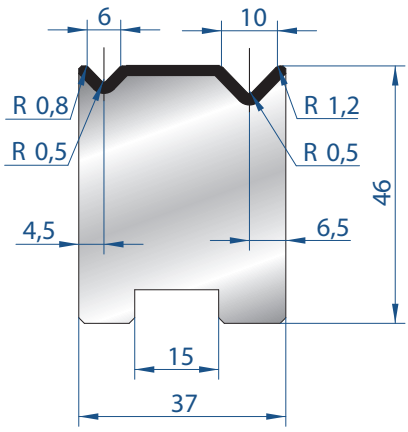

2050

Mat = C45
Max T/m = 80
α = 88°


835 mm	10,3 kg
415 mm	5,1 kg
805 mm FRAZ. / SECT.	9,9 kg

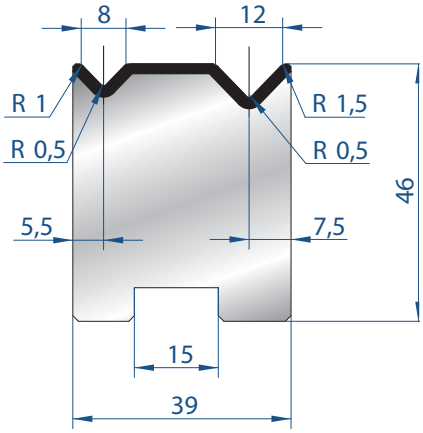

2052

Mat = C45
Max T/m = 80
α = 88°


835 mm	10,8 kg
415 mm	5,4 kg
805 mm FRAZ. / SECT.	10,4 kg

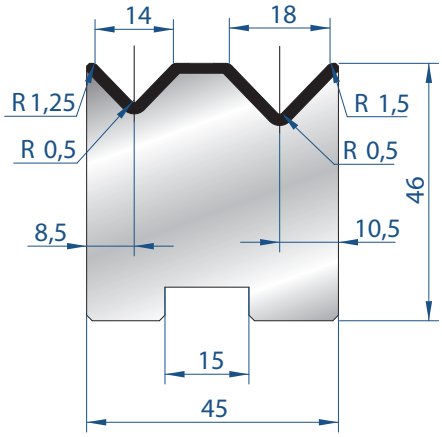

2053

Mat = C45
Max T/m = 80
α = 88°


835 mm	12,1 kg
415 mm	6,0 kg
805 mm FRAZ. / SECT.	11,6 kg

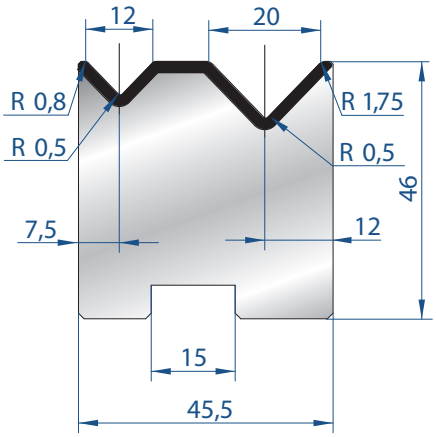

2054

Mat = C45
Max T/m = 80
α = 88°

835 mm	12,1 kg
415 mm	6,0 kg
805 mm FRAZ. / SECT.	11,7 kg

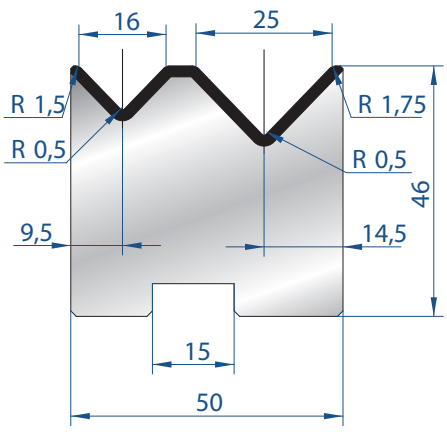


2055

Mat = C45
Max T/m = 80
α = 88°

835 mm	13,0 kg
415 mm	6,4 kg
805 mm FRAZ. / SECT.	12,5 kg


MATRICI 2V AUTOCENTRANTI - 30°
2V SELF-CENTERING DIES - 30°

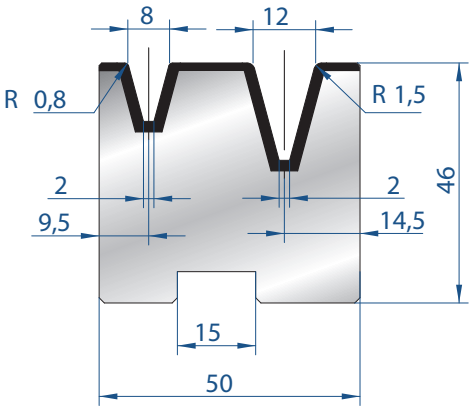

2056

Mat = C45
Max T/m = 40
α = 30°

835 mm	13,2 kg
415 mm	6,6 kg
805 mm FRAZ. / SECT.	12,7 kg

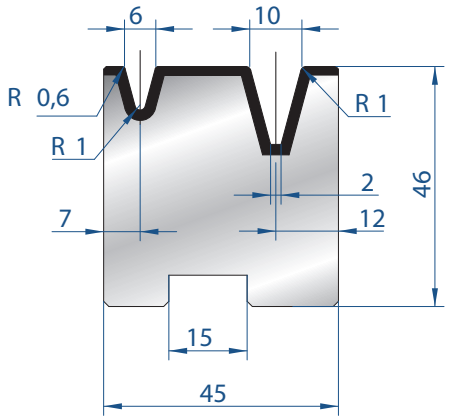


2057

Mat = C45
Max T/m = 40
α = 30°

835 mm	12,1 kg
415 mm	6,0 kg
805 mm FRAZ. / SECT.	11,7 kg


MATRICI 3U / 3U DIES

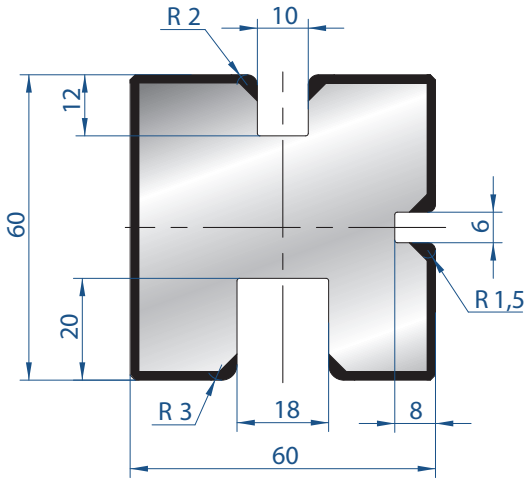


2031

Mat = C45
Max T/m = 100

835 mm	20,0 kg
415 mm	10,0 kg
805 mm FRAZ. / SECT.	19,3 kg

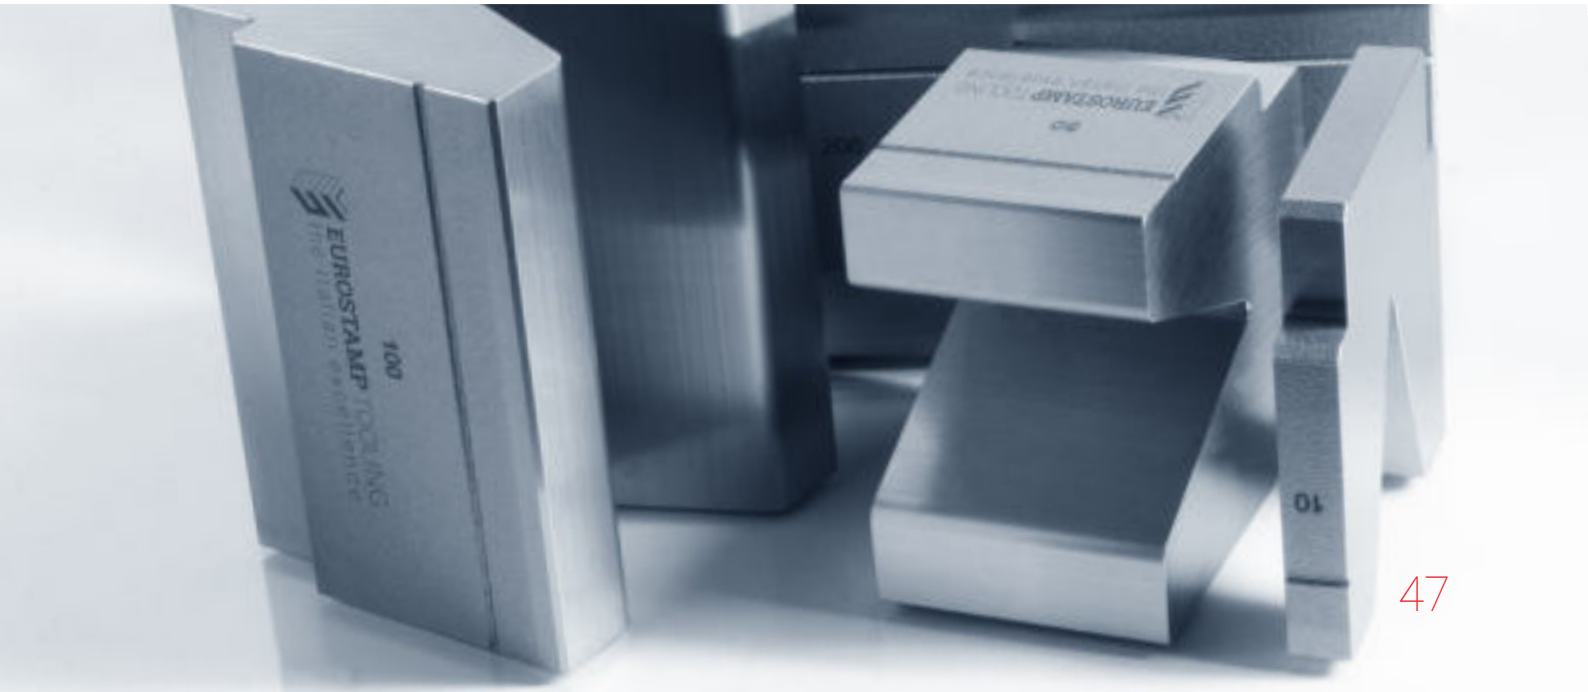


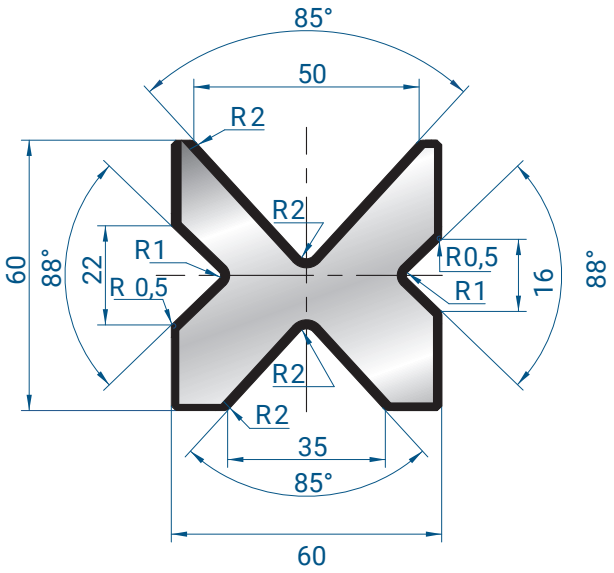

2030

Mat = C45
Max T/m = 80
α = 85° - 88°


835 mm	15,7 kg
415 mm	7,8 kg
805 mm FRAZ. / SECT.	15,1 kg

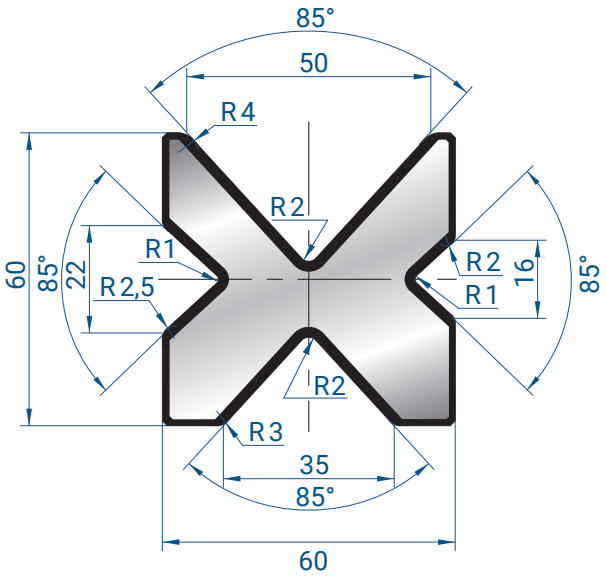

2067

Mat = C45
Max T/m = 80
α = 85°


835 mm	15,6 kg
415 mm	7,7 kg
805 mm FRAZ. / SECT.	15,0 kg

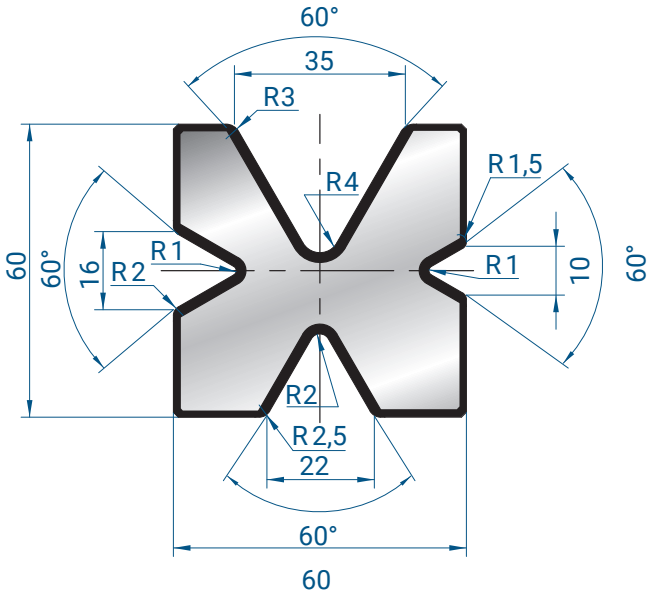

2034

Mat = C45
Max T/m = 60
α = 60°


835 mm	17,8 kg
415 mm	8,8 kg
805 mm FRAZ. / SECT.	17,1 kg

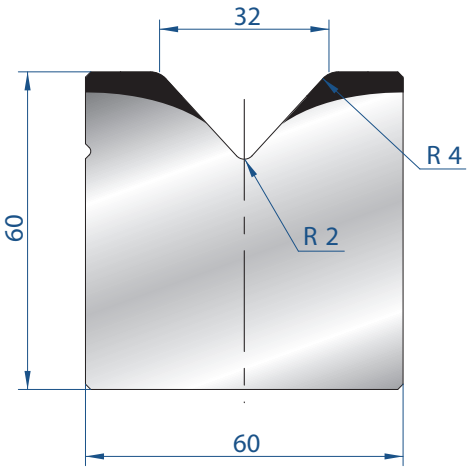

2020

Mat = C45
Max T/m = 100
α = 85°


835 mm	21,7 kg
415 mm	10,8 kg
805 mm FRAZ. / SECT.	20,9 kg

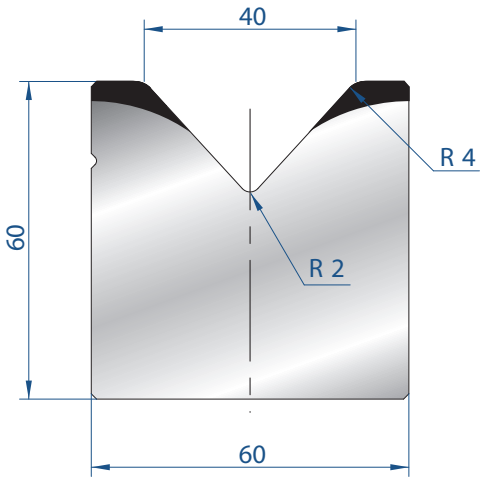

2021

Mat = C45
Max T/m = 100
α = 85°


835 mm	20,7 kg
415 mm	10,3 kg
805 mm FRAZ. / SECT.	19,9 kg

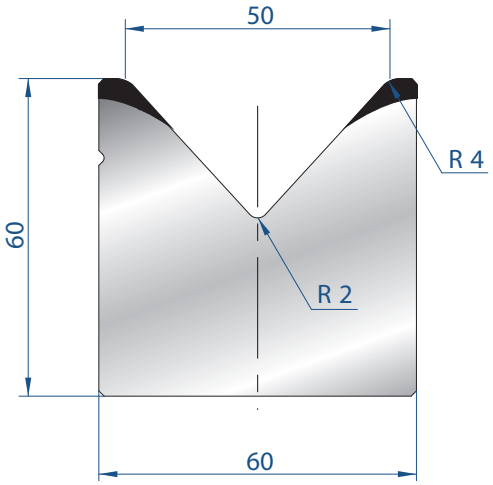

2022

Mat = C45
Max T/m = 100
α = 85°


835 mm	19,1 kg
415 mm	9,5 kg
805 mm FRAZ. / SECT.	18,4 kg

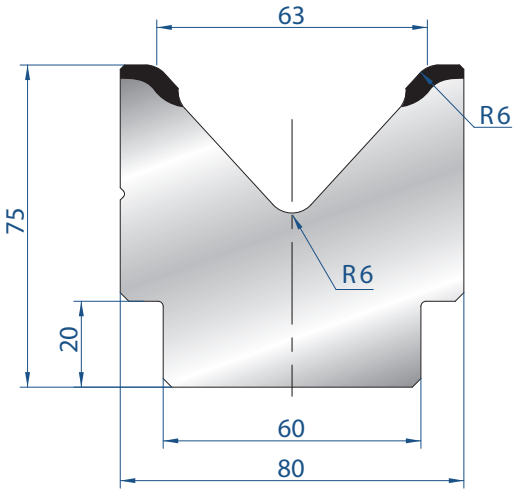

2023

Mat = C45
Max T/m = 100
α = 85°


835 mm	28,5 kg
415 mm	14,2 kg
805 mm FRAZ. / SECT.	27,5 kg

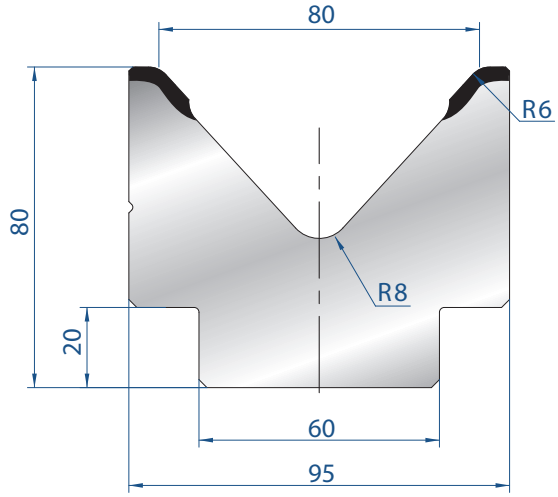

2024

Mat = C45
Max T/m = 100
α = 85°


835 mm	32,5 kg
415 mm	16,1 kg
805 mm FRAZ. / SECT.	31,3 kg

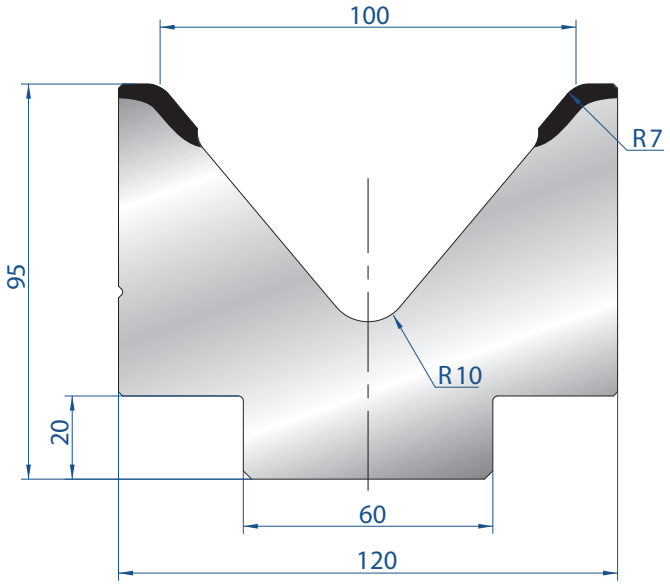

2025

Mat = C45
Max T/m = 120
α = 80°


835 mm	45,7 kg
415 mm	22,7 kg
805 mm FRAZ. / SECT.	44,1 kg

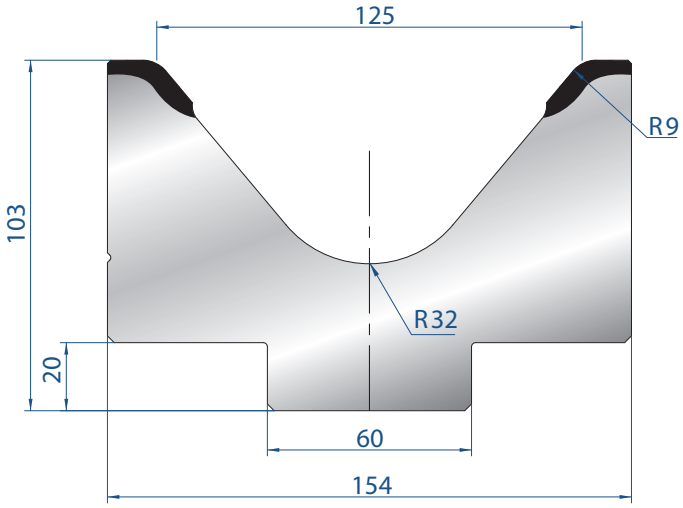

2026

Mat = C45
Max T/m = 120
α = 80°


835 mm	60,9 kg
415 mm	30,3 kg
805 mm FRAZ. / SECT.	58,7 kg

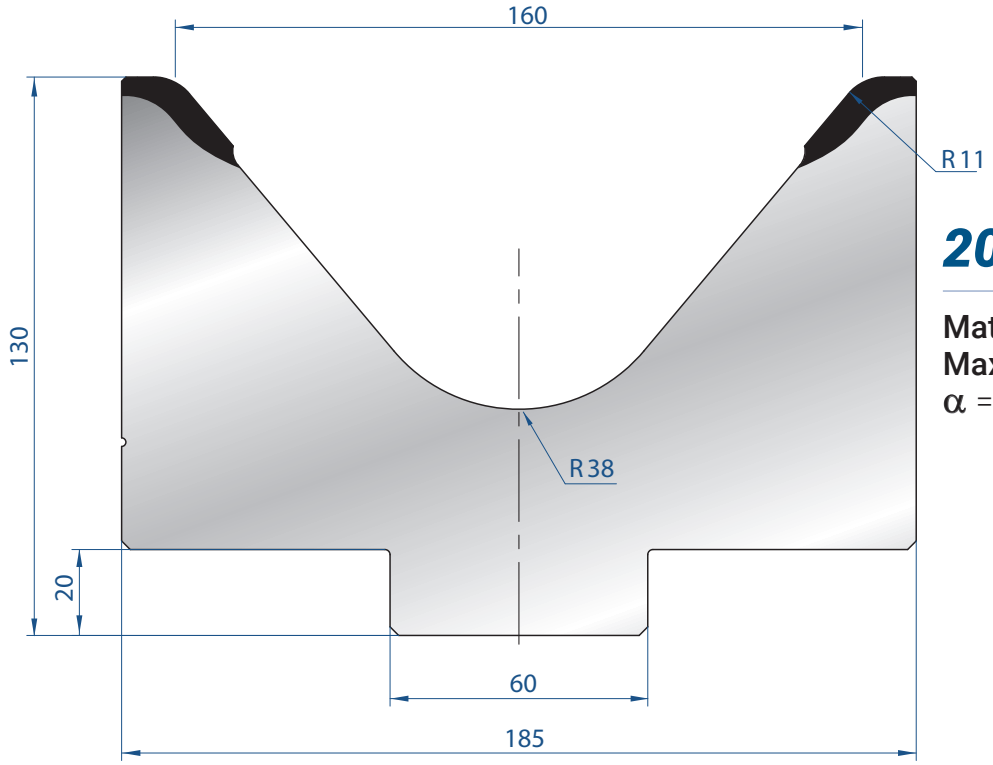

2027

Mat = C45
Max T/m = 120
α = 80°


835 mm	91,3 kg
415 mm	45,4 kg
805 mm FRAZ. / SECT.	88,0 kg



8106

835 mm	2,9 kg

TRAFILATI 15X15
SQUARE BAR 15X15

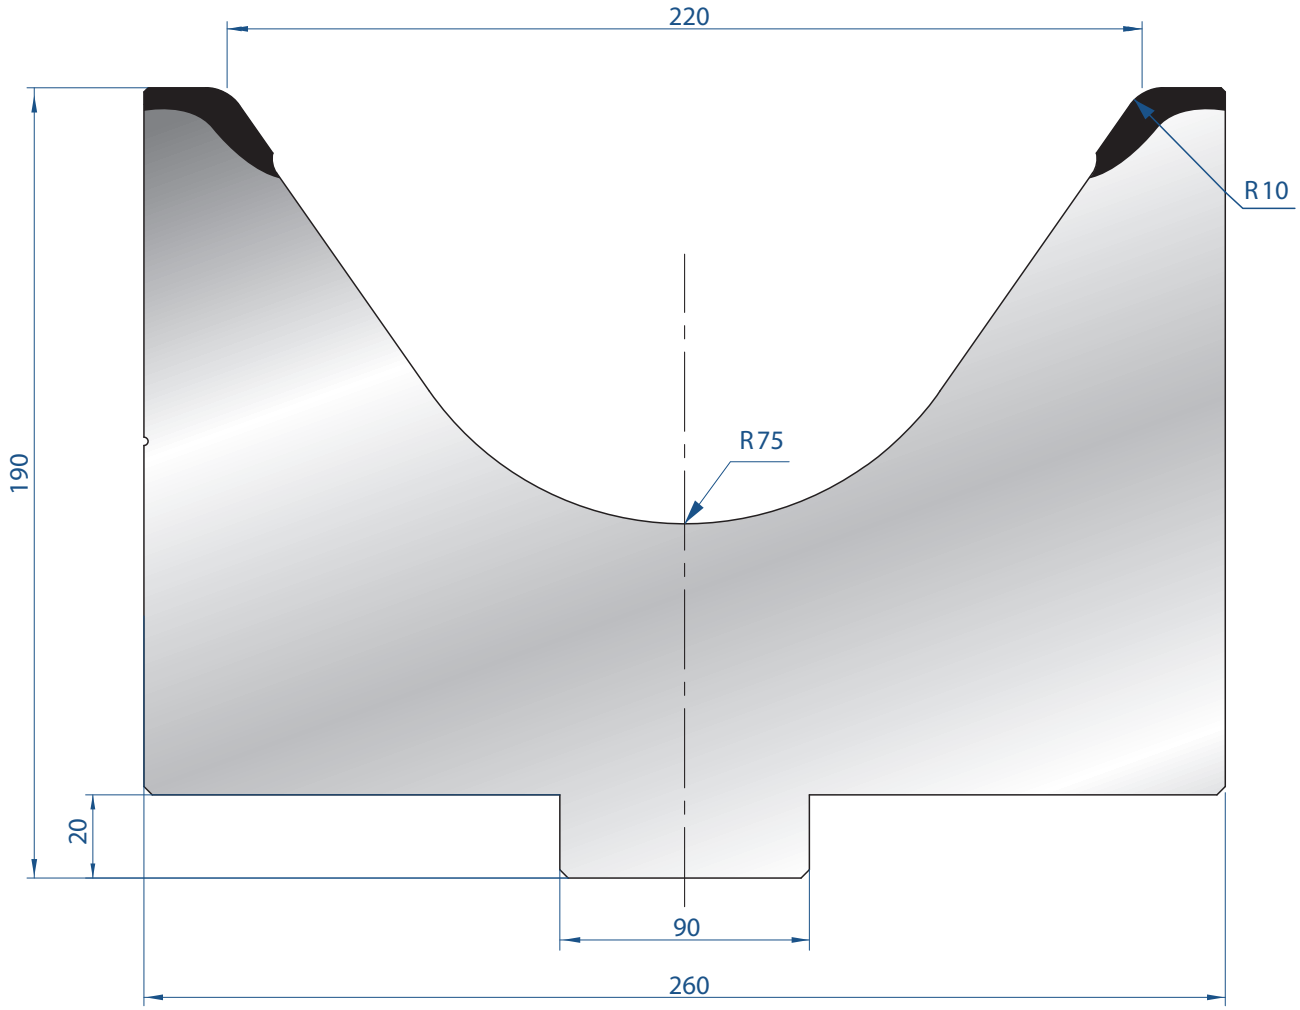


7290

505 mm	121,2 kg

Mat = C45
bonificato /
tempered
Max T/m = 200
α = 70°

SOLO LUNGHEZZA
505 MM


AVAILABLE ONLY
LENGHT 505 MM

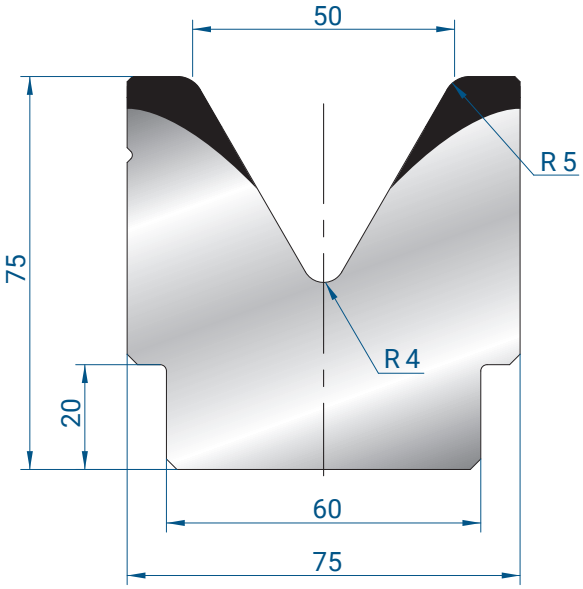

2082

Mat = C45
Max T/m = 100
α = 60°


835 mm	27,7 kg
415 mm	13,8 kg
805 mm FRAZ. / SECT.	26,7 kg

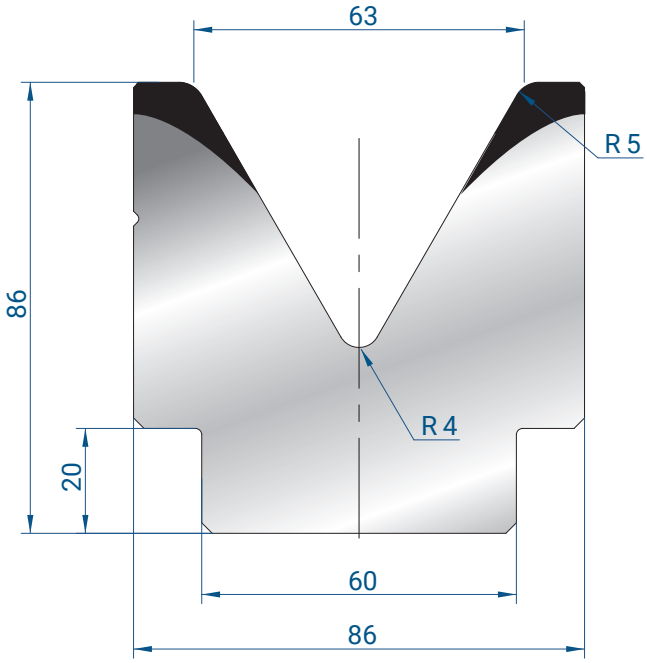

2083

Mat = C45
Max T/m = 100
α = 60°


835 mm	33,7 kg
415 mm	16,8 kg
805 mm FRAZ. / SECT.	32,5 kg

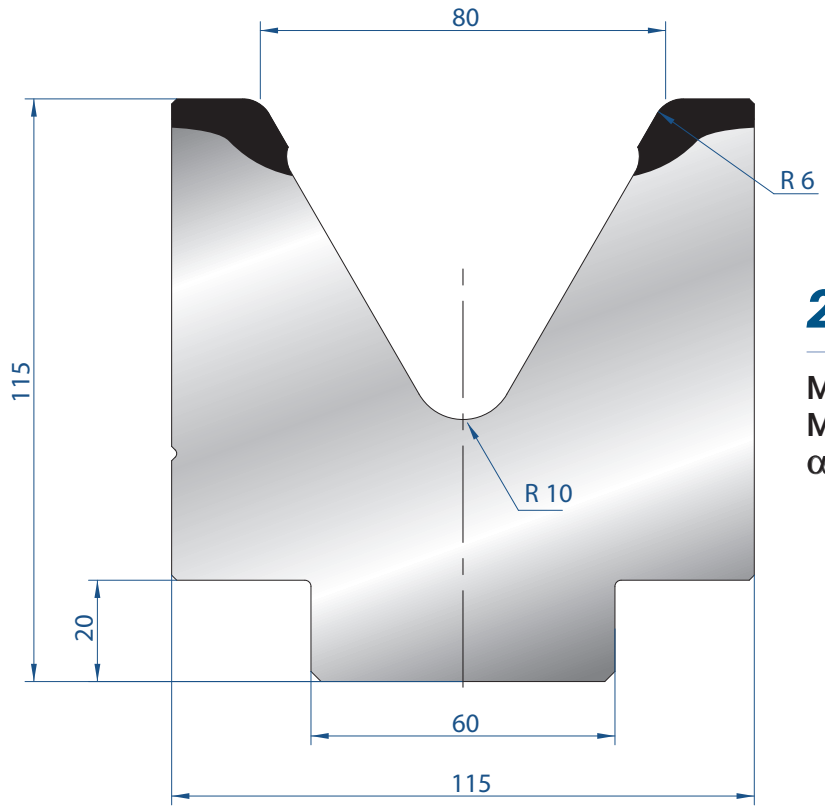

2089

Mat = C45
Max T/m = 100
α = 60°


835 mm	59,7 kg
415 mm	29,7 kg
805 mm FRAZ. / SECT.	57,6 kg

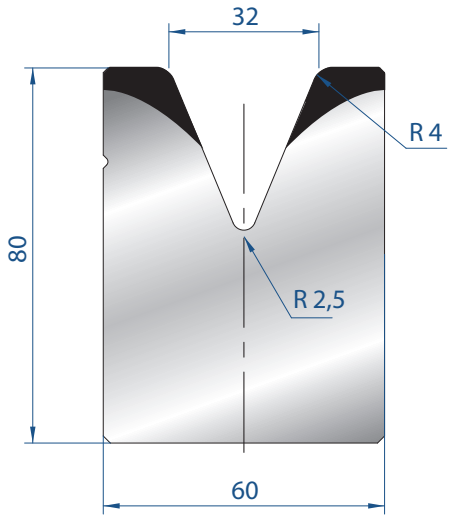

2088

Mat = C45
Max T/m = 100
α = 45°


835 mm	27,4 kg
415 mm	13,6 kg
805 mm FRAZ. / SECT.	26,4 kg

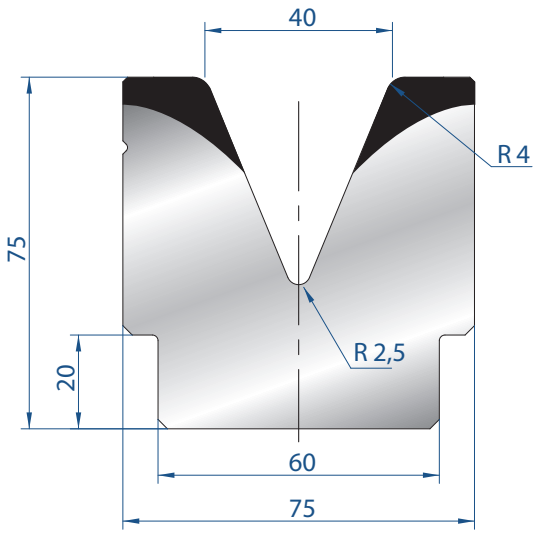

2081

Mat = C45
Max T/m = 100
α = 45°


835 mm	28,5 kg
415 mm	14,2 kg
805 mm FRAZ. / SECT.	27,5 kg

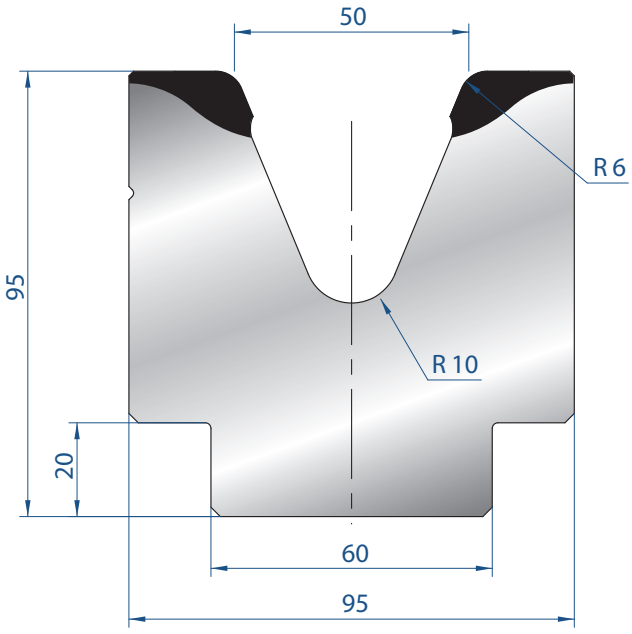

2118

Mat = C45
Max T/m = 100
α = 45°

835 mm	43,8 kg
415 mm	21,8 kg
805 mm FRAZ. / SECT.	42,2 kg

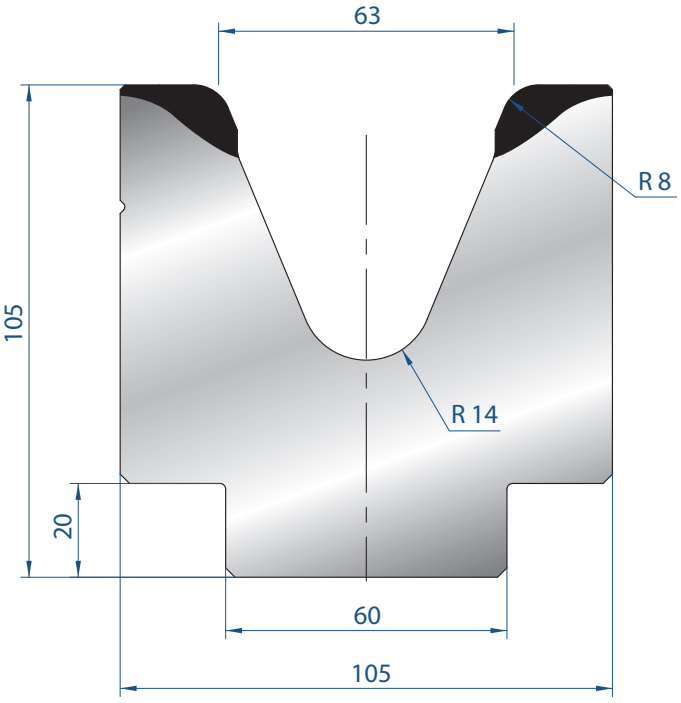


2117

Mat = C45
Max T/m = 100
α = 45°

835 mm	50,1 kg
415 mm	24,9 kg
805 mm FRAZ. / SECT.	48,3 kg

MATRICI 1V - 45° / 1V DIES - 45°

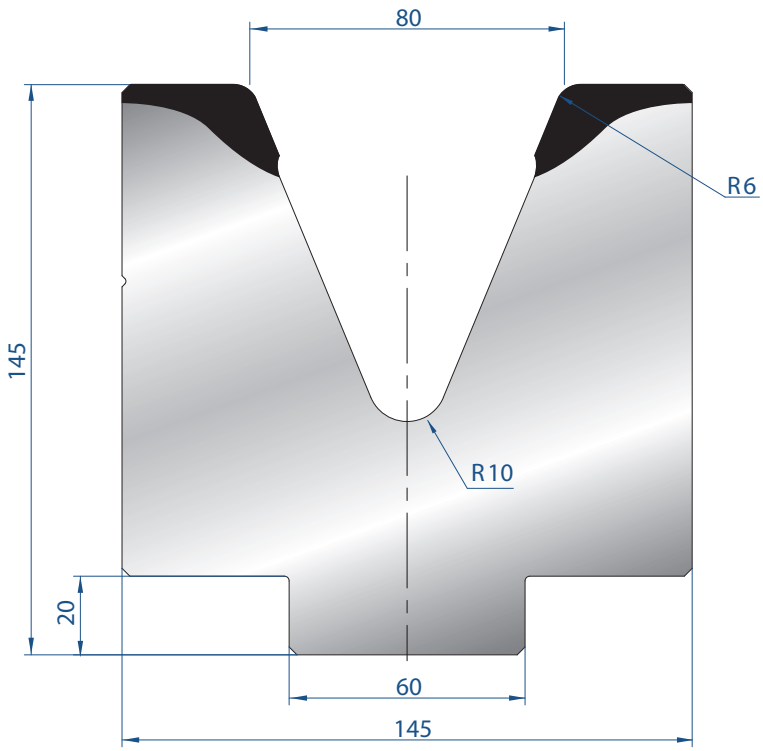


2084

Mat = C45
Max T/m = 100
α = 45°

835 mm	99,6 kg
415 mm	49,5 kg
805 mm FRAZ. / SECT.	96,0 kg


MATRICI 1V - 30° / 1V DIES - 30°

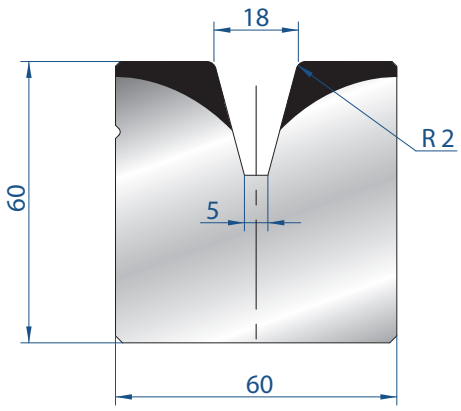

2086

Mat = C45
Max T/m = 100
α = 30°

835 mm	21,7 kg
415 mm	10,8 kg
805 mm FRAZ. / SECT.	20,9 kg

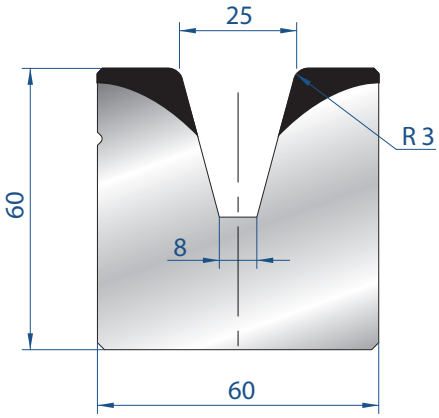


2087

Mat = C45
Max T/m = 100
α = 30°

835 mm	20,1 kg
415 mm	10,0 kg
805 mm FRAZ. / SECT.	19,4 kg



EUROSTAMP

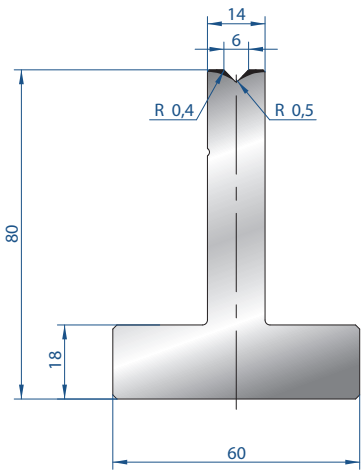

3080

835 mm	12,7 kg
415 mm	6,3 kg
805 mm FRAZ. / SECT.	12,2 kg


Mat = C45
Max T/m = 100
α = 88°

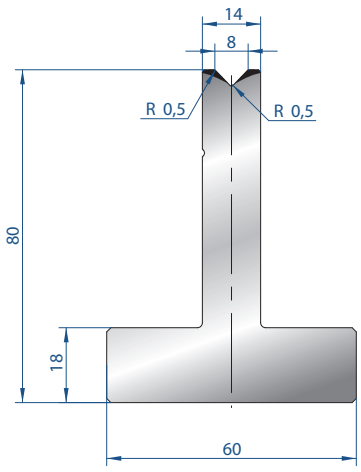

3081

835 mm	12,6 kg
415 mm	6,3 kg
805 mm FRAZ. / SECT.	12,2 kg


Mat = C45
Max T/m = 100
α = 88°

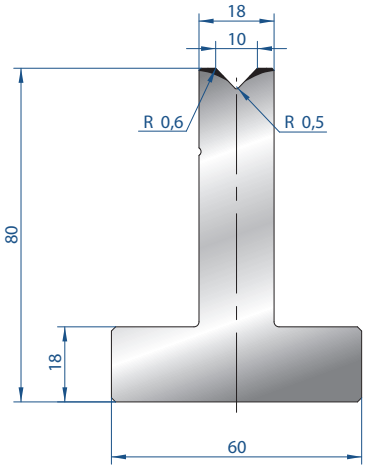

3082

835 mm	14,2 kg
415 mm	7,0 kg
805 mm FRAZ. / SECT.	13,7 kg


Mat = C45
Max T/m = 100
α = 88°

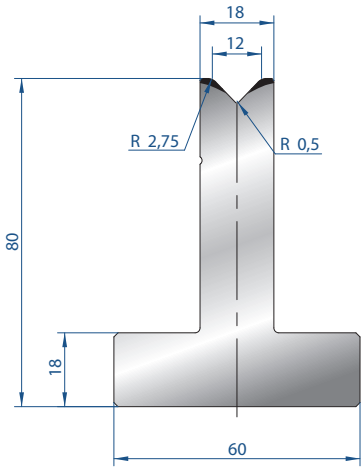

3015

835 mm	14,1 kg
415 mm	7,0 kg
805 mm FRAZ. / SECT.	13,6 kg


Mat = C45
Max T/m = 100
α = 88°

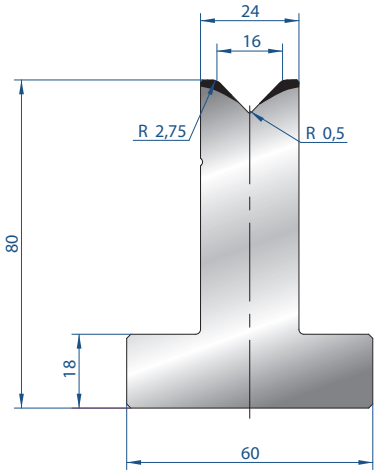

3016

835 mm	16,3 kg
415 mm	8,1 kg
805 mm FRAZ. / SECT.	15,8 kg

Mat = C45
Max T/m = 100
α = 88°

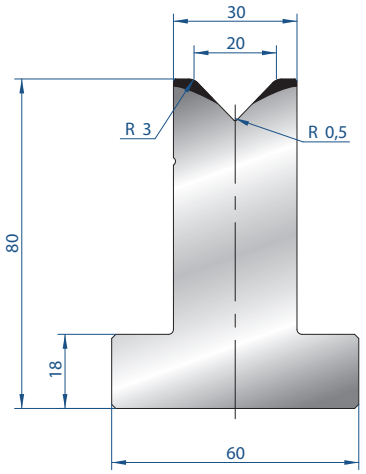

3017


835 mm	18,5 kg
415 mm	9,2 kg
805 mm FRAZ. / SECT.	17,9 kg

Mat = C45
Max T/m = 100
α = 88°


3018

835 mm	20,2 kg
415 mm	10,0 kg
805 mm FRAZ. / SECT.	19,5 kg

Mat = C45
Max T/m = 100
α = 88°

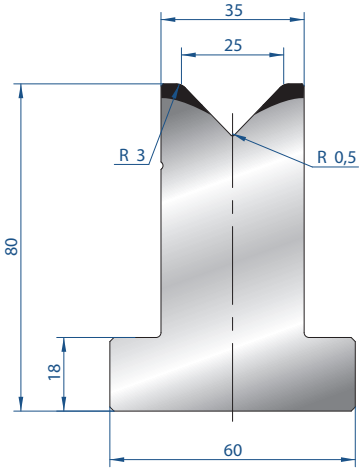


MATRICI T H80 - 85° / T DIES H80 - 85°

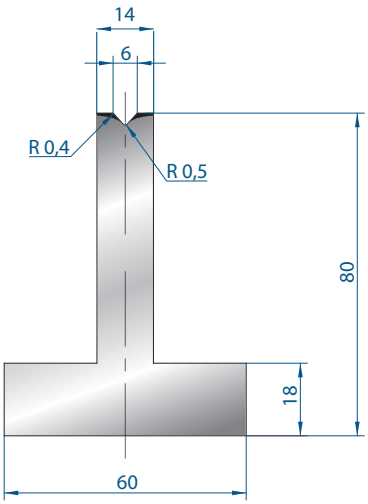

3086

835 mm	12,7 kg
415 mm	6,3 kg
805 mm FRAZ. / SECT.	12,2 kg


Mat = C45
Max T/m = 100
α = 85°

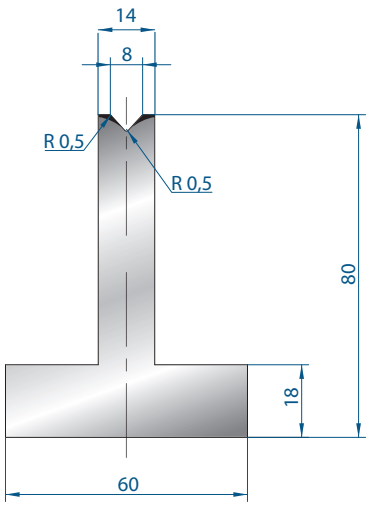

3087

835 mm	12,6 kg
415 mm	6,3 kg
805 mm FRAZ. / SECT.	12,2 kg


Mat = C45
Max T/m = 100
α = 85°

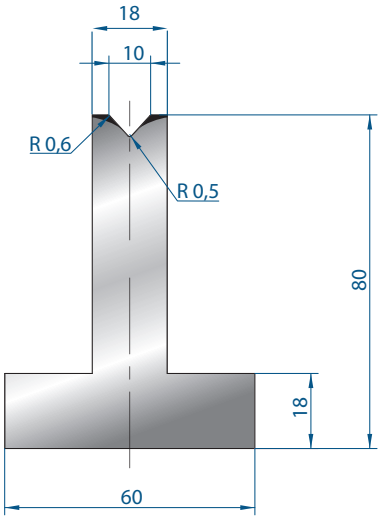

3088

835 mm	14,2 kg
415 mm	7,0 kg
805 mm FRAZ. / SECT.	13,7 kg


Mat = C45
Max T/m = 100
α = 85°

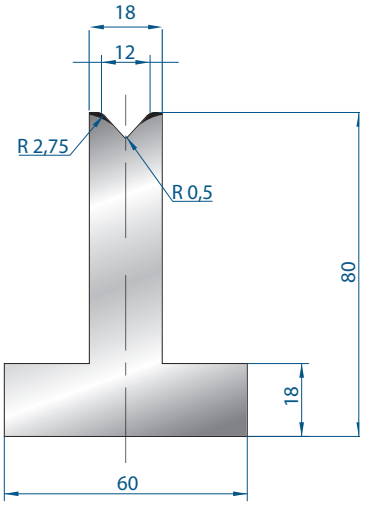

3089

835 mm	14,1 kg
415 mm	7,0 kg
805 mm FRAZ. / SECT.	13,6 kg


Mat = C45
Max T/m = 100
α = 85°

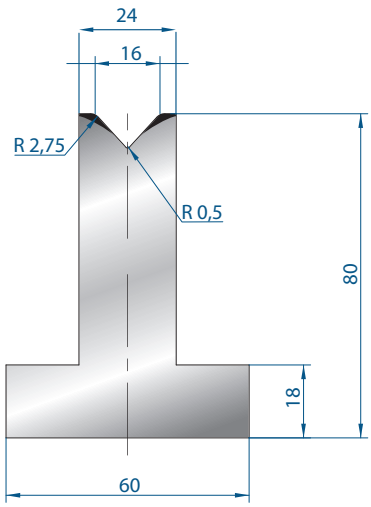

3090

835 mm	16,3 kg
415 mm	8,1 kg
805 mm FRAZ. / SECT.	15,7 kg


Mat = C45
Max T/m = 100
α = 85°

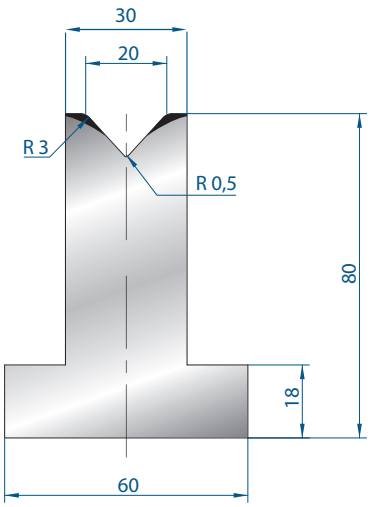

3091

835 mm	18,5 kg
415 mm	9,2 kg
805 mm FRAZ. / SECT.	17,8 kg

Mat = C45
Max T/m = 100
α = 85°

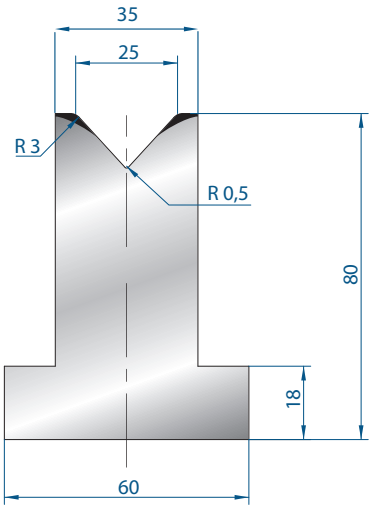


3092

835 mm	20,1 kg
415 mm	10,0 kg
805 mm FRAZ. / SECT.	19,4 kg

Mat = C45
Max T/m = 100
α = 85°


MATRICI T H80 - 60° / T DIES H80 - 60°

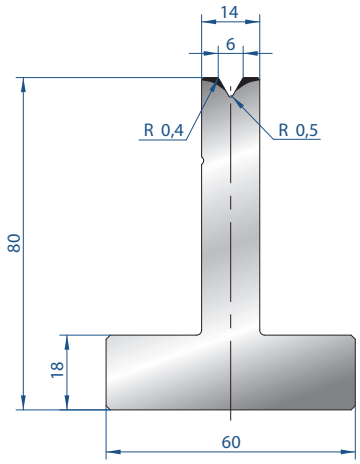

3019

835 mm	12,6 kg
415 mm	6,3 kg
805 mm FRAZ. / SECT.	12,2 kg


Mat = C45
Max T/m = 60
α = 60°

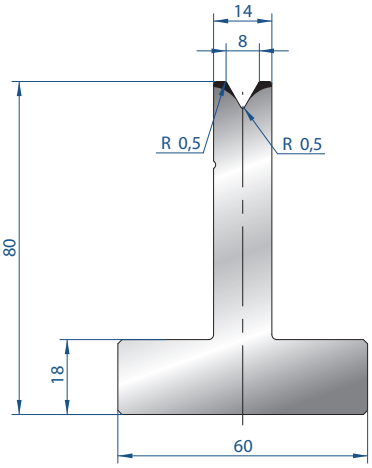

3020

835 mm	12,5 kg
415 mm	6,2 kg
805 mm FRAZ. / SECT.	12,1 kg


Mat = C45
Max T/m = 60
α = 60°

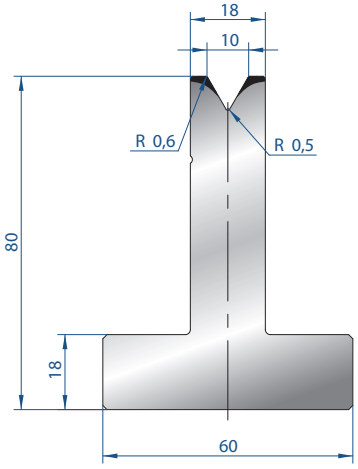

3021

835 mm	14,1 kg
415 mm	7,0 kg
805 mm FRAZ. / SECT.	13,6 kg


Mat = C45
Max T/m = 60
α = 60°

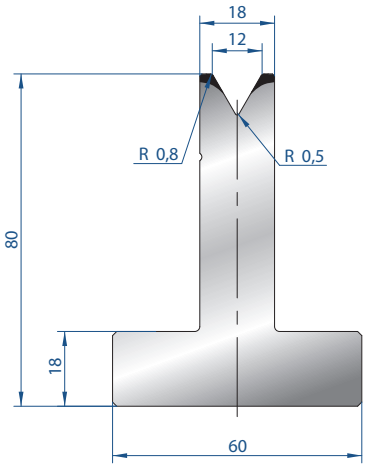

3022

835 mm	13,9 kg
415 mm	6,9 kg
805 mm FRAZ. / SECT.	13,4 kg


Mat = C45
Max T/m = 60
α = 60°

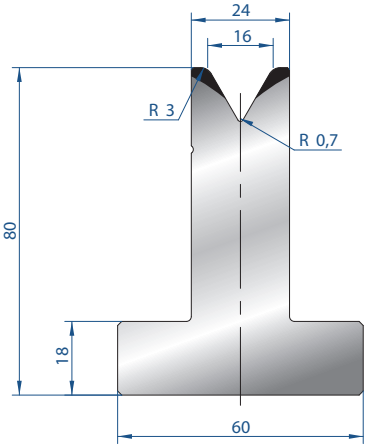

3023

835 mm	16,1 kg
415 mm	8,0 kg
805 mm FRAZ. / SECT.	15,5 kg

Mat = C45
Max T/m = 75
α = 60°

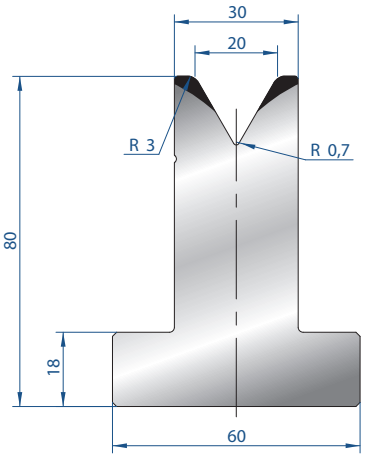

3024


835 mm	18,1 kg
415 mm	9,0 kg
805 mm FRAZ. / SECT.	17,4 kg

Mat = C45
Max T/m = 70
α = 60°


3025

835 mm	19,5 kg
415 mm	9,7 kg
805 mm FRAZ. / SECT.	18,8 kg

Mat = C45
Max T/m = 65
α = 60°

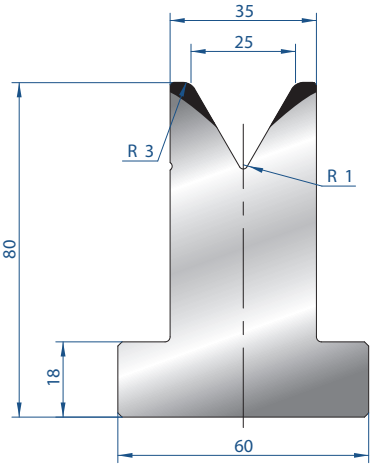


MATRICI T H80 - 45° / T DIES H80 - 45°

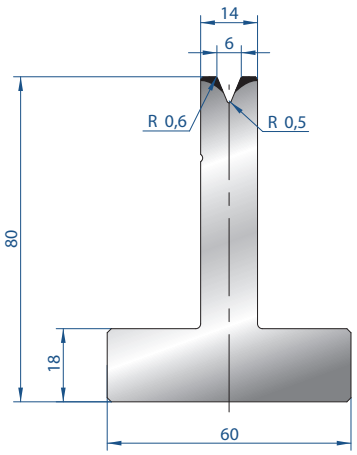

3026

835 mm	12,6 kg
415 mm	6,3 kg
805 mm FRAZ. / SECT.	12,1 kg


Mat = C45
Max T/m = 50
α = 45°

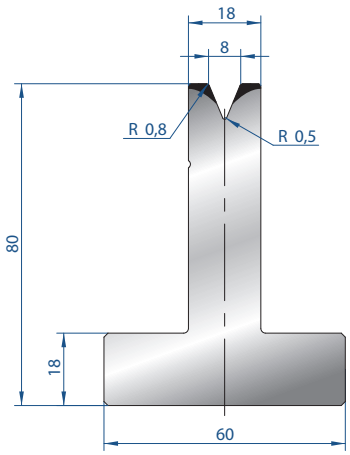

3027

835 mm	14,1 kg
415 mm	7,0 kg
805 mm FRAZ. / SECT.	13,6 kg


Mat = C45
Max T/m = 50
α = 45°

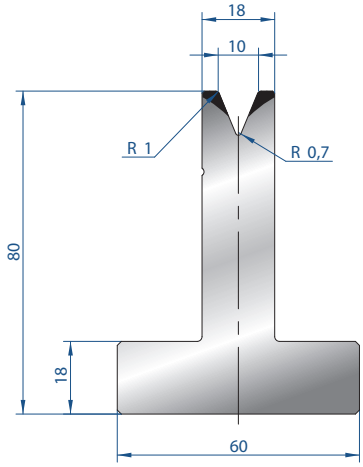

3028

835 mm	14,0 kg
415 mm	6,9 kg
805 mm FRAZ. / SECT.	13,5 kg


Mat = C45
Max T/m = 50
α = 45°

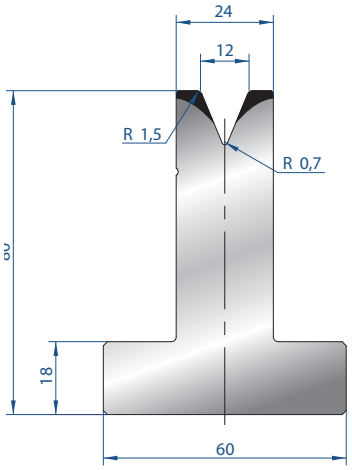

3029

835 mm	16,2 kg
415 mm	8,1 kg
805 mm FRAZ. / SECT.	15,6 kg


Mat = C45
Max T/m = 50
α = 45°

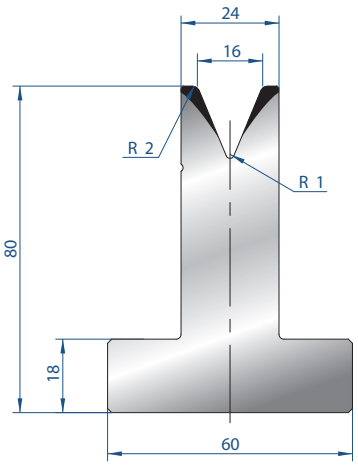

3030

835 mm	15,8 kg
415 mm	7,8 kg
805 mm FRAZ. / SECT.	15,2 kg


Mat = C45
Max T/m = 50
α = 45°

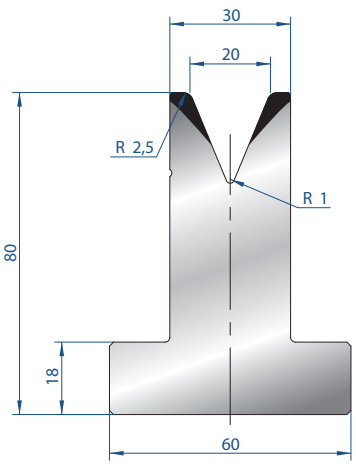

3031

835 mm	17,6 kg
415 mm	8,8 kg
805 mm FRAZ. / SECT.	17,0 kg


Mat = C45
Max T/m = 50
α = 45°

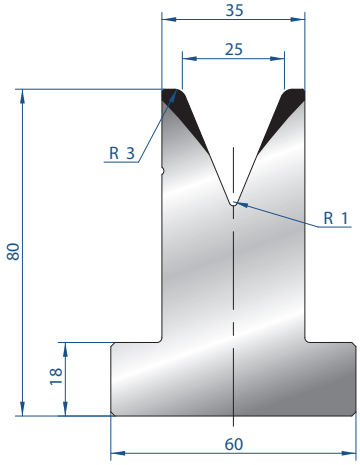

3032

835 mm	18,8 kg
415 mm	9,3 kg
805 mm FRAZ. / SECT.	18,1 kg


Mat = C45
Max T/m = 50
α = 45°

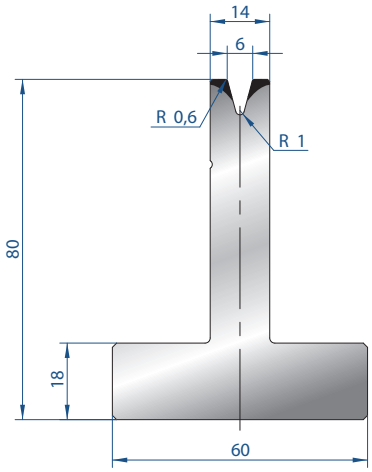

3042

835 mm	12,5 kg
415 mm	6,2 kg
805 mm FRAZ. / SECT.	12,1 kg


Mat = C45
Max T/m = 35
α = 30°

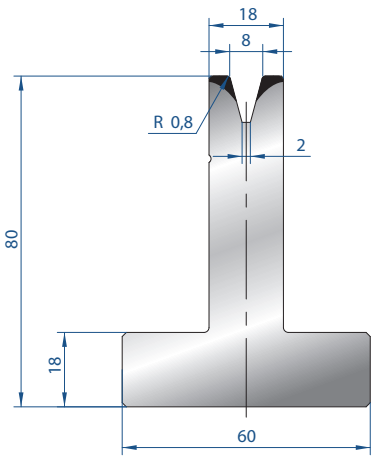

3043

835 mm	14,0 kg
415 mm	6,9 kg
805 mm FRAZ. / SECT.	13,5 kg


Mat = C45
Max T/m = 40
α = 30°

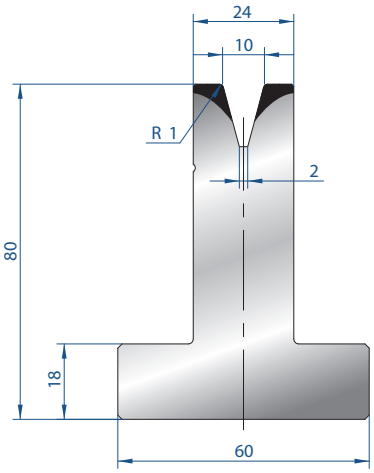

3044

835 mm	16,2 kg
415 mm	8,0 kg
805 mm FRAZ. / SECT.	15,6 kg


Mat = C45
Max T/m = 50
α = 30°

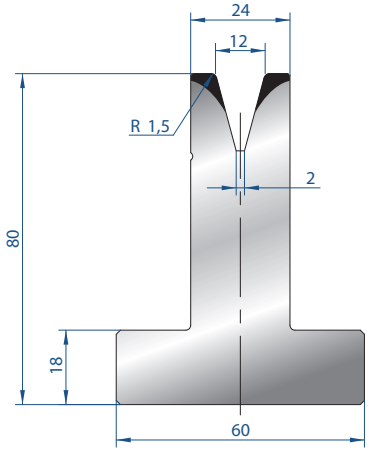

3045

835 mm	15,9 kg
415 mm	7,9 kg
805 mm FRAZ. / SECT.	13,4 kg


Mat = C45
Max T/m = 50
α = 30°

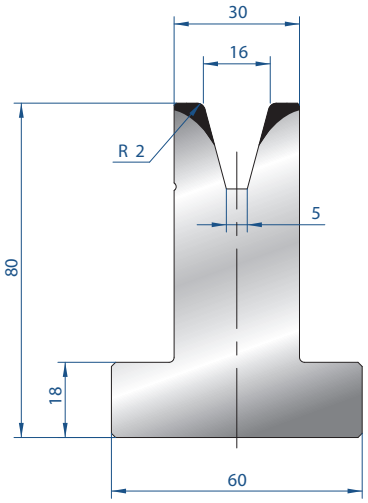

3046

835 mm	17,8 kg
415 mm	8,8 kg
805 mm FRAZ. / SECT.	17,2 kg

Mat = C45
Max T/m = 50
α = 30°

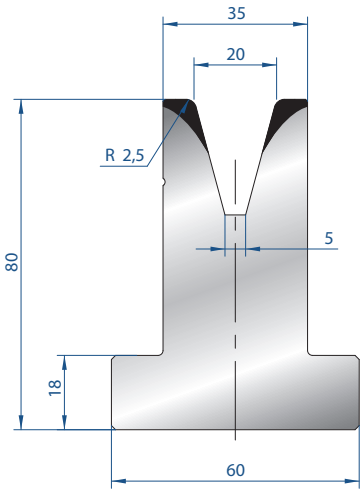

3047


835 mm	18,9 kg
415 mm	9,4 kg
805 mm FRAZ. / SECT.	18,3 kg

Mat = C45
Max T/m = 55
α = 30°


3048

835 mm	19,6 kg
415 mm	9,7 kg
805 mm FRAZ. / SECT.	18,9 kg

Mat = C45
Max T/m = 55
α = 30°

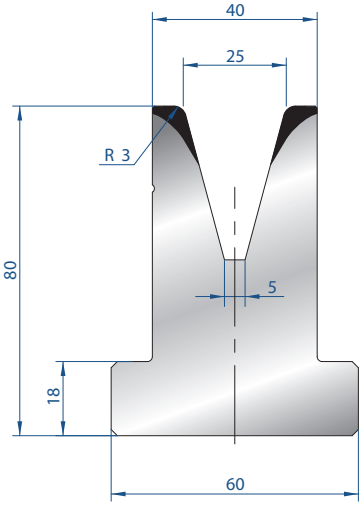


MATRICI T H120 - 88° / T DIES H120 - 88°

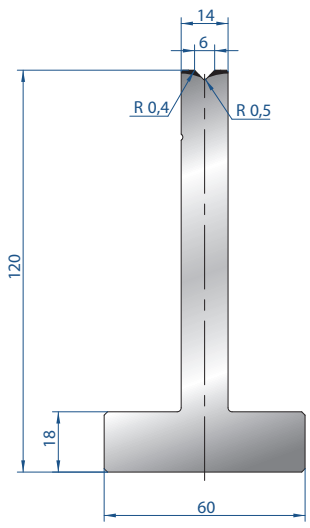

3083

835 mm	16,3 kg
415 mm	8,1 kg
805 mm FRAZ. / SECT.	15,7 kg


Mat = C45
Max T/m = 100
α = 88°

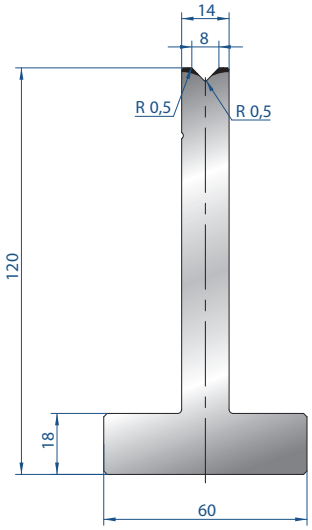

3084

835 mm	16,3 kg
415 mm	8,1 kg
805 mm FRAZ. / SECT.	15,7 kg


Mat = C45
Max T/m = 100
α = 88°

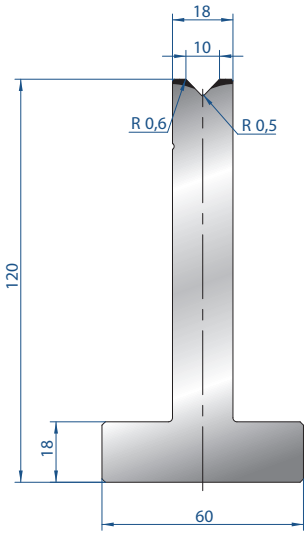

3085

835 mm	18,9 kg
415 mm	9,4 kg
805 mm FRAZ. / SECT.	18,2 kg


Mat = C45
Max T/m = 100
α = 88°

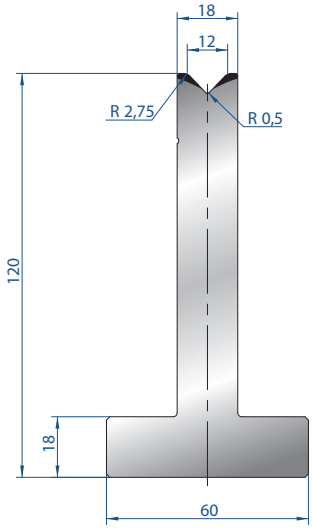

3055

835 mm	18,8 kg
415 mm	9,3 kg
805 mm FRAZ. / SECT.	18,1 kg


Mat = C45
Max T/m = 100
α = 88°

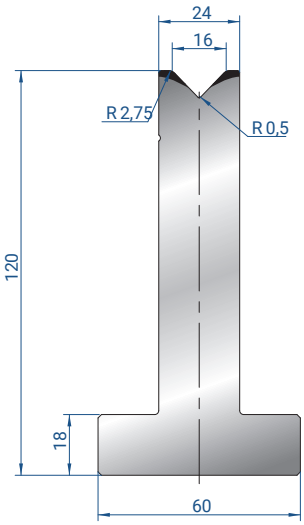

3056

835 mm	22,6 kg
415 mm	11,2 kg
805 mm FRAZ. / SECT.	21,8 kg


Mat = C45
Max T/m = 100
α = 88°

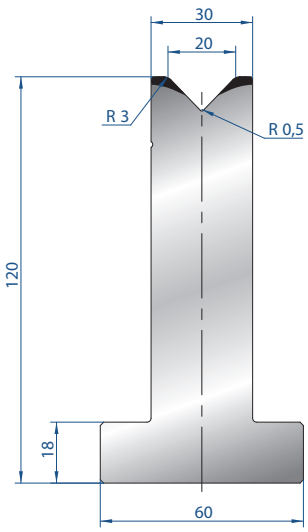

3057

835 mm	26,4 kg
415 mm	13,1 kg
805 mm FRAZ. / SECT.	25,4 kg

Mat = C45
Max T/m = 100
α = 88°

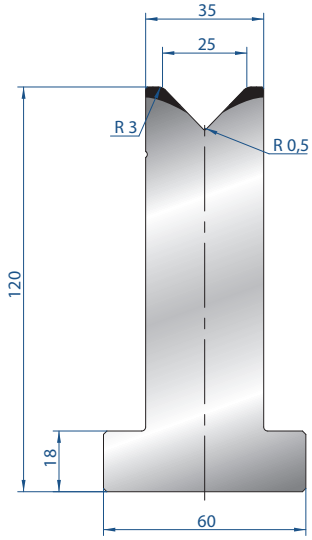


3058

835 mm	29,3 kg
415 mm	14,6 kg
805 mm FRAZ. / SECT.	28,3 kg

Mat = C45
Max T/m = 100
α = 88°


MATRICI T H120 - 85° / T DIES H120 - 85°

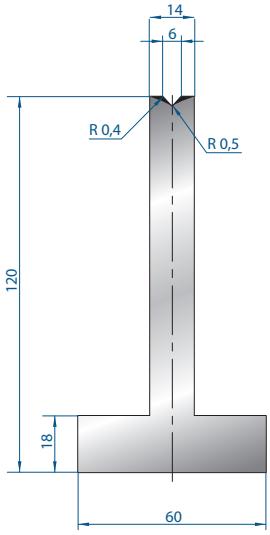

3093

835 mm	16,3 kg
415 mm	8,1 kg
805 mm FRAZ. / SECT.	15,7 kg


Mat = C45
Max T/m = 100
α = 85°

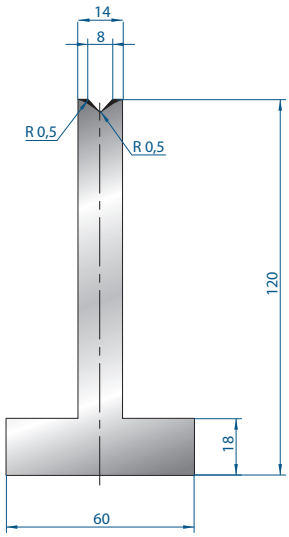

3094

835 mm	16,3 kg
415 mm	8,1 kg
805 mm FRAZ. / SECT.	15,7 kg


Mat = C45
Max T/m = 100
α = 85°

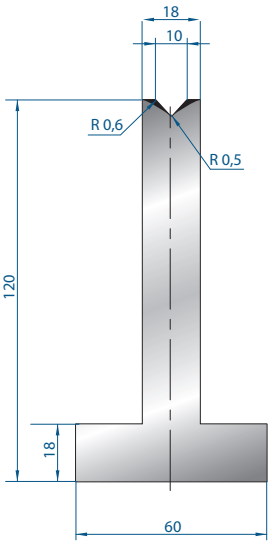

3095

835 mm	18,9 kg
415 mm	9,4 kg
805 mm FRAZ. / SECT.	18,2 kg


Mat = C45
Max T/m = 100
α = 85°

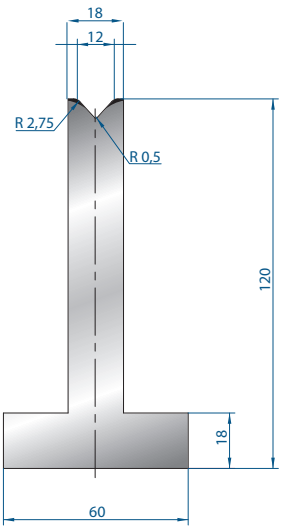

3096

835 mm	18,8 kg
415 mm	9,3 kg
805 mm FRAZ. / SECT.	18,1 kg


Mat = C45
Max T/m = 100
α = 85°

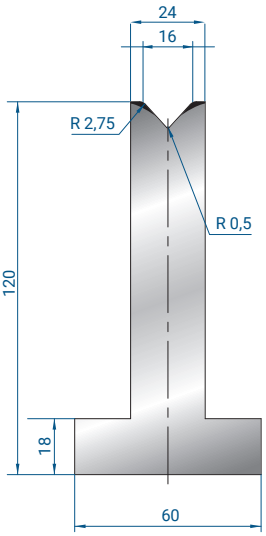

3097

835 mm	22,6 kg
415 mm	11,2 kg
805 mm FRAZ. / SECT.	21,8 kg

Mat = C45
Max T/m = 100
α = 85°

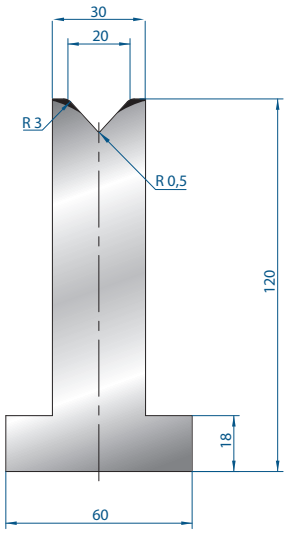

3098

835 mm	26,3 kg
415 mm	13,1 kg
805 mm FRAZ. / SECT.	25,4 kg


Mat = C45
Max T/m = 100
α = 85°




3099

835 mm	29,3 kg
415 mm	14,6 kg
805 mm FRAZ. / SECT.	28,3 kg

Mat = C45
Max T/m = 100
α = 85°

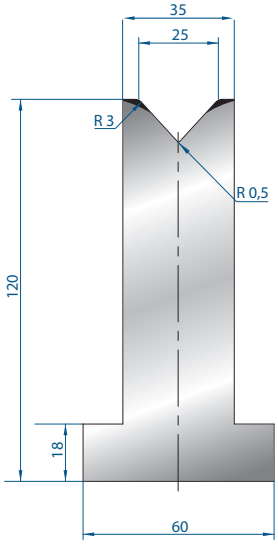


MATRICI T H120 - 60° / T DIES H120 - 60°

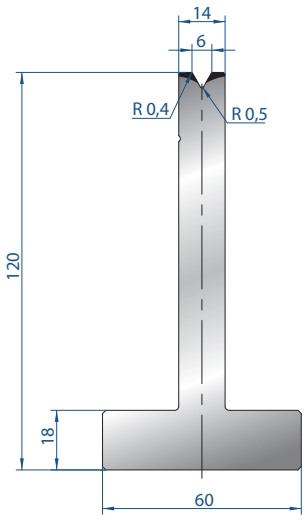

3059

835 mm	16,3 kg
415 mm	8,1 kg
805 mm FRAZ. / SECT.	15,7 kg


Mat = C45
Max T/m = 60
α = 60°

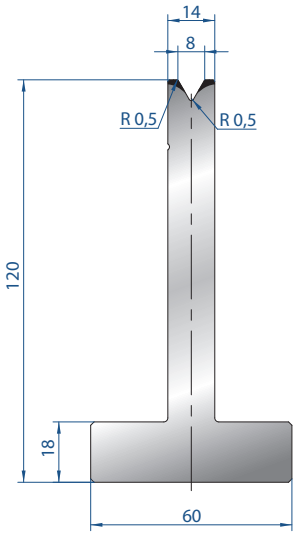

3060

835 mm	16,2 kg
415 mm	8,1 kg
805 mm FRAZ. / SECT.	15,6 kg


Mat = C45
Max T/m = 60
α = 60°

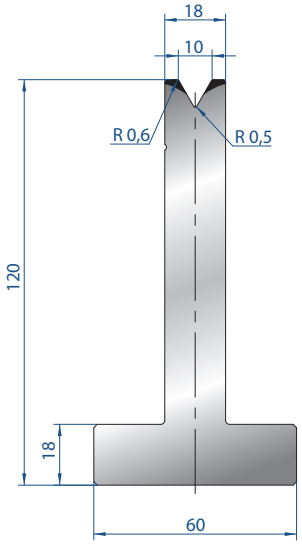

3061

835 mm	18,8 kg
415 mm	9,3 kg
805 mm FRAZ. / SECT.	18,1 kg


Mat = C45
Max T/m = 60
α = 60°

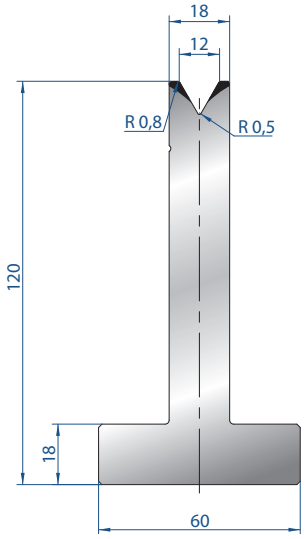

3062

835 mm	18,7 kg
415 mm	9,3 kg
805 mm FRAZ. / SECT.	18,0 kg


Mat = C45
Max T/m = 60
α = 60°

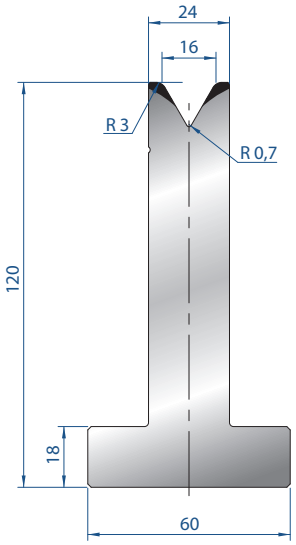

3063

835 mm	22,3 kg
415 mm	11,1 kg
805 mm FRAZ. / SECT.	21,5 kg


Mat = C45
Max T/m = 75
α = 60°

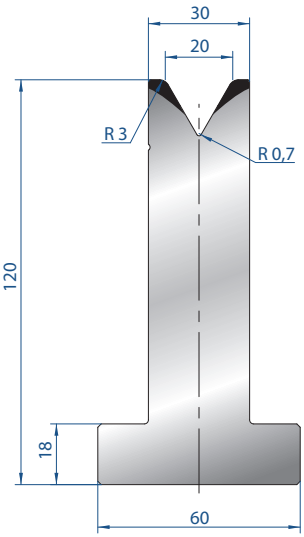

3064

835 mm	25,9 kg
415 mm	12,9 kg
805 mm FRAZ. / SECT.	25,0 kg

Mat = C45
Max T/m = 70
α = 60°

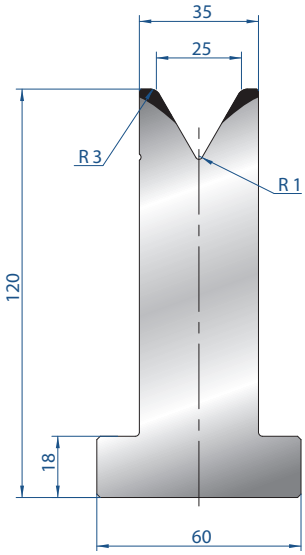


3065

835 mm	28,6 kg
415 mm	14,2 kg
805 mm FRAZ. / SECT.	27,6 kg

Mat = C45
Max T/m = 65
α = 60°


MATRICI T H120 - 45° / T DIES H120 - 45°

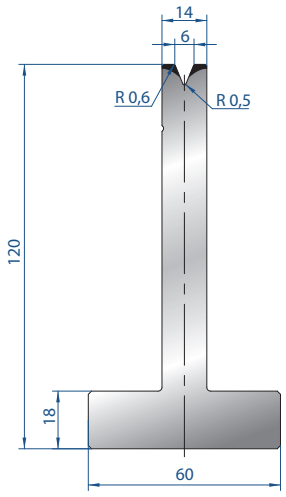

3066

835 mm	16,2 kg
415 mm	8,1 kg
805 mm FRAZ. / SECT.	15,7 kg


Mat = C45
Max T/m = 50
α = 45°

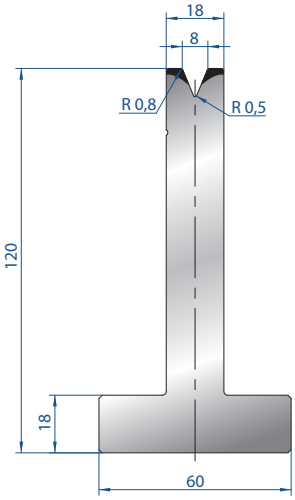

3067

835 mm	18,8 kg
415 mm	9,3 kg
805 mm FRAZ. / SECT.	18,1 kg


Mat = C45
Max T/m = 50
α = 45°

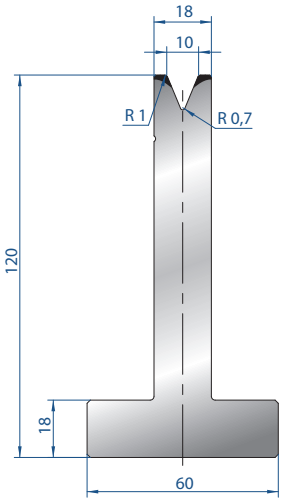

3068

835 mm	18,7 kg
415 mm	9,3 kg
805 mm FRAZ. / SECT.	18,0 kg


Mat = C45
Max T/m = 50
α = 45°

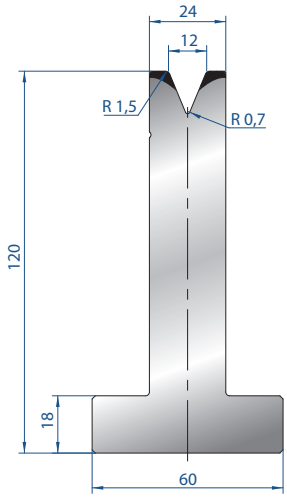

3069

835 mm	22,5 kg
415 mm	11,2 kg
805 mm FRAZ. / SECT.	21,7 kg


Mat = C45
Max T/m = 50
α = 45°

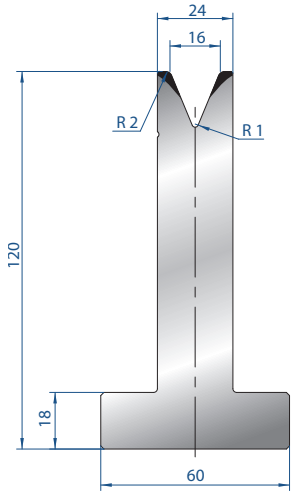

3070

835 mm	22,1 kg
415 mm	11,0 kg
805 mm FRAZ. / SECT.	21,3 kg

Mat = C45
Max T/m = 50
α = 45°

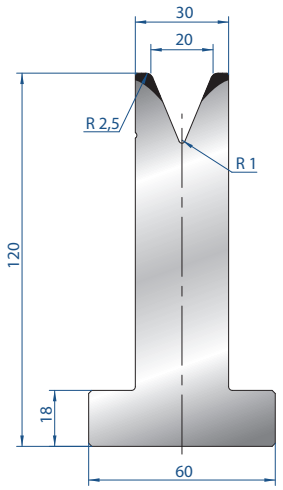

3071


835 mm	25,5 kg
415 mm	12,7 kg
805 mm FRAZ. / SECT.	24,6 kg

Mat = C45
Max T/m = 50
α = 45°


3072

835 mm	27,9 kg
415 mm	13,9 kg
805 mm FRAZ. / SECT.	26,9 kg

Mat = C45
Max T/m = 50
α = 45°

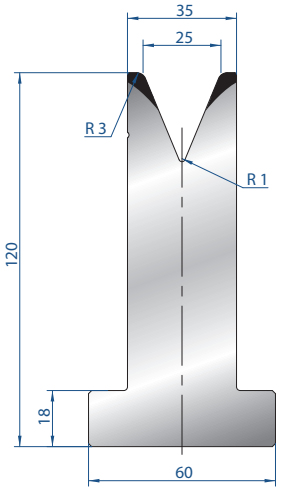


MATRICI T H120 - 30° / T DIES H120 - 30°

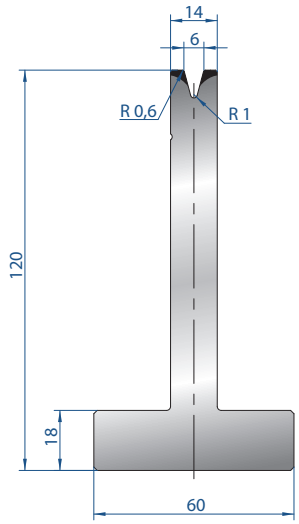

3073

835 mm	16,2 kg
415 mm	8,0 kg
805 mm FRAZ. / SECT.	15,6 kg


Mat = C45
Max T/m = 35
α = 30°

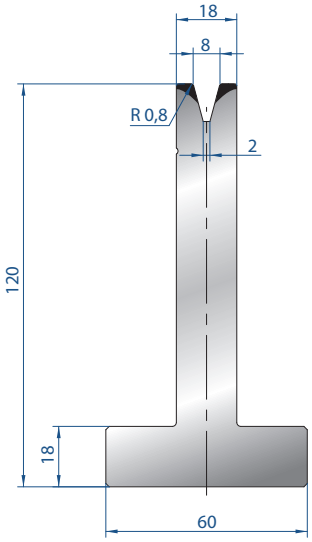

3074

835 mm	18,7 kg
415 mm	9,3 kg
805 mm FRAZ. / SECT.	18,0 kg


Mat = C45
Max T/m = 40
α = 30°

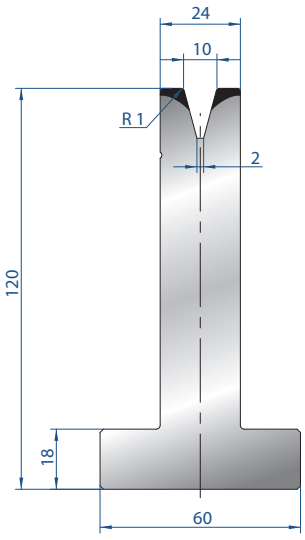

3075

835 mm	22,5 kg
415 mm	11,2 kg
805 mm FRAZ. / SECT.	21,7 kg


Mat = C45
Max T/m = 50
α = 30°

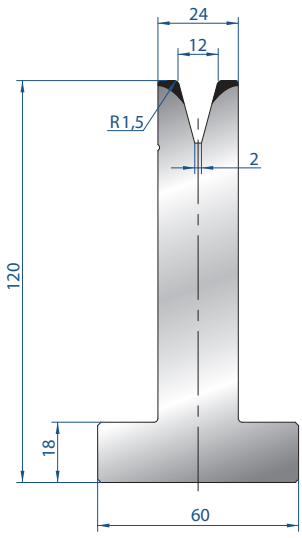

3076

835 mm	22,2 kg
415 mm	11,0 kg
805 mm FRAZ. / SECT.	21,4 kg


Mat = C45
Max T/m = 50
α = 30°

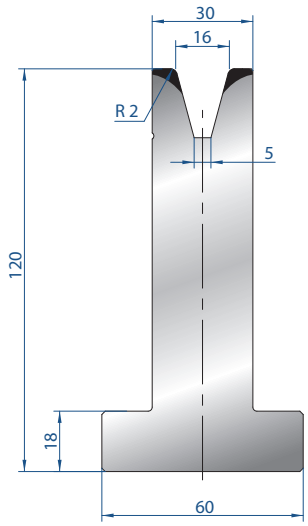

3077

835 mm	25,6 kg
415 mm	12,7 kg
805 mm FRAZ. / SECT.	24,7 kg


Mat = C45
Max T/m = 50
α = 30°

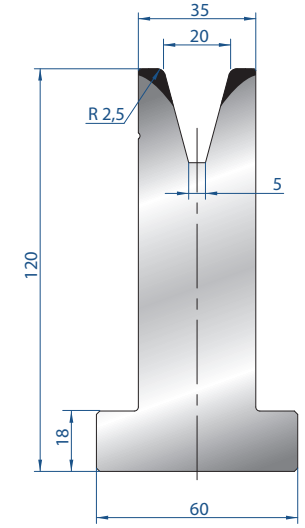

3078

835 mm	28,1 kg
415 mm	14,0 kg
805 mm FRAZ. / SECT.	27,1 kg

Mat = C45
Max T/m = 55
α = 30°

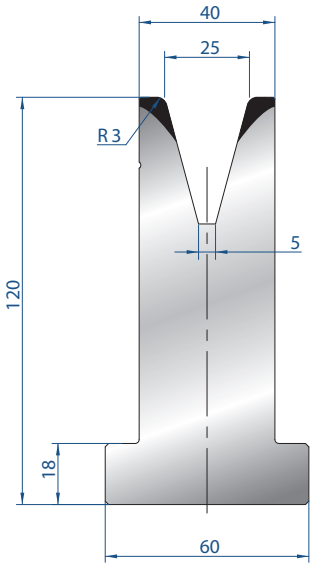


3079

835 mm	30,1 kg
415 mm	14,9 kg
805 mm FRAZ. / SECT.	29,0 kg

Mat = C45
Max T/m = 50
α = 30°

SUPPORTO PER INSERTI MATRICE
DIE INSERTS HOLDER


POLIURETANO
POLYURETHAN

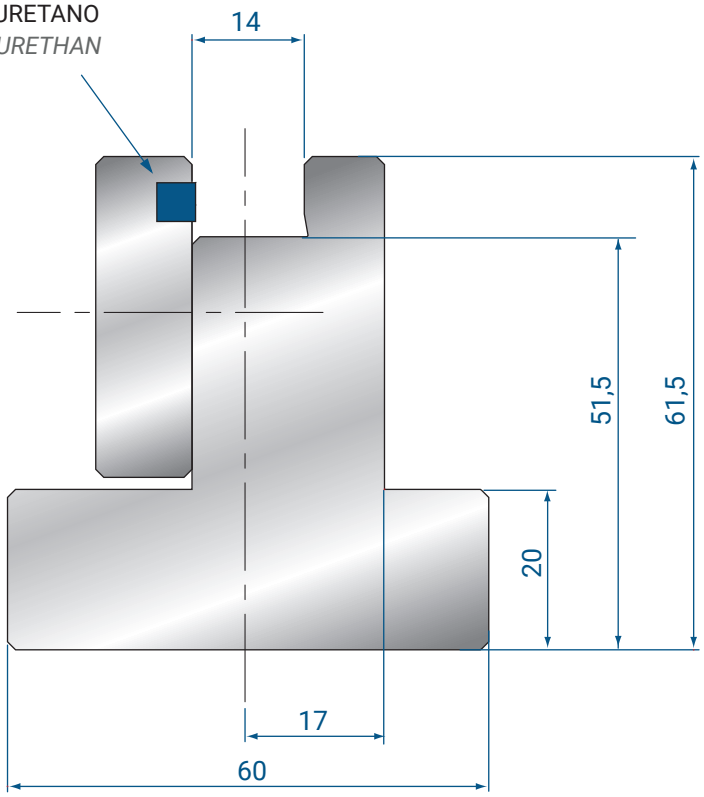


3173

835 mm	16,4 kg
415 mm	8,1 kg


ESEMPIO DI MONTAGGIO
ASSEMBLY EXAMPLE

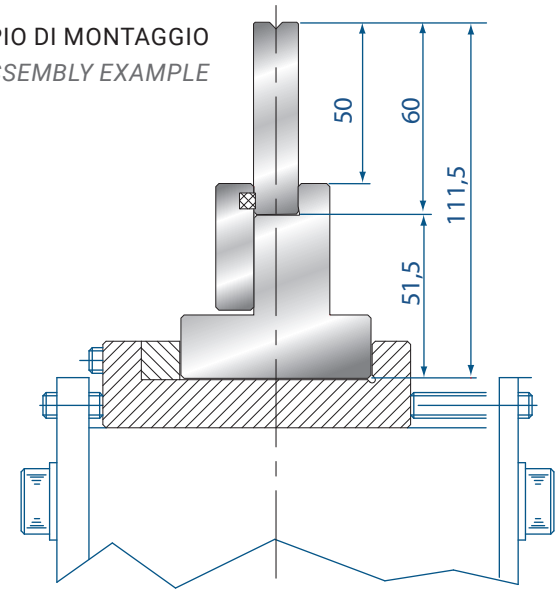



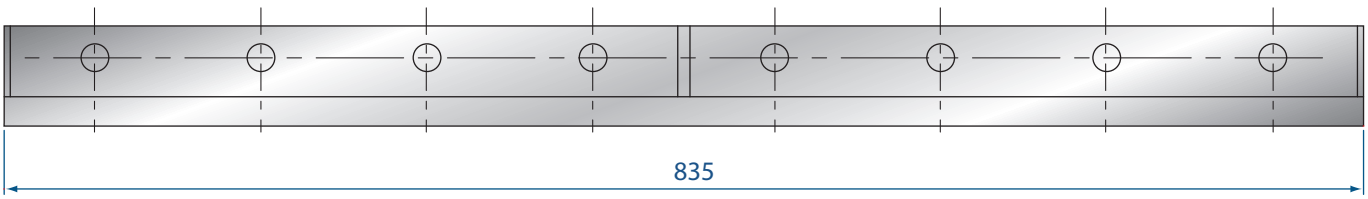



3173 H51,5 L415

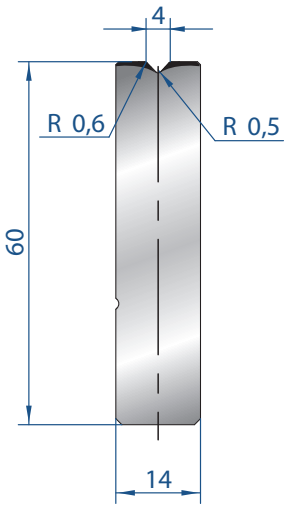

3158

Mat = C45
Max T/m = 100
α = 88°


835 mm	5,5 kg
415 mm	2,7 kg
805 mm FRAZ. / SECT.	5,3 kg

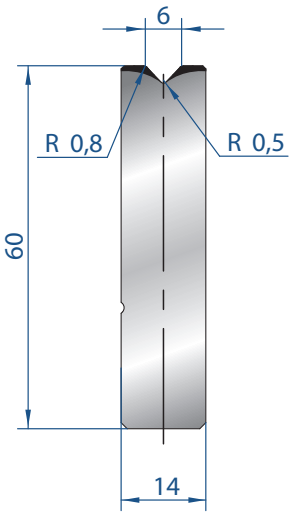

3159

Mat = C45
Max T/m = 100
α = 88°


835 mm	5,4 kg
415 mm	2,7 kg
805 mm FRAZ. / SECT.	5,2 kg

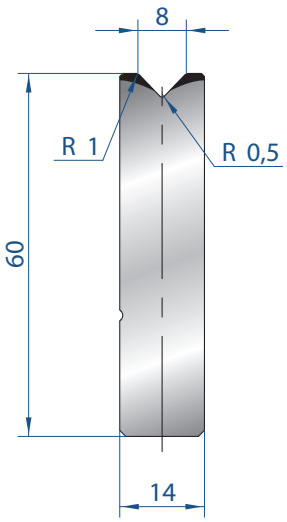

3160

Mat = C45
Max T/m = 100
α = 88°


835 mm	5,4 kg
415 mm	2,7 kg
805 mm FRAZ. / SECT.	5,2 kg

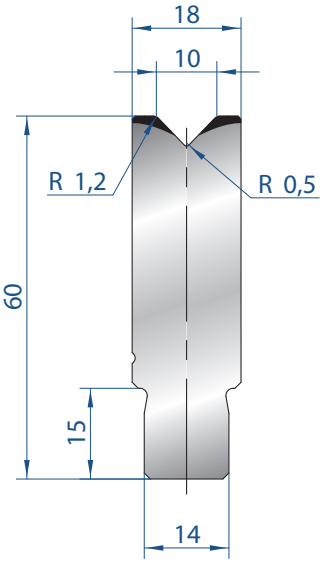

3161

Mat = C45
Max T/m = 100
α = 88°


835 mm	6,5 kg
415 mm	3,2 kg
805 mm FRAZ. / SECT.	6,3 kg

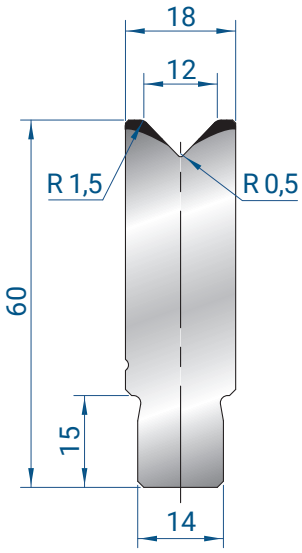

3162

Mat = C45
Max T/m = 100
α = 88°


835 mm	6,4 kg
415 mm	3,2 kg
805 mm FRAZ. / SECT.	6,2 kg

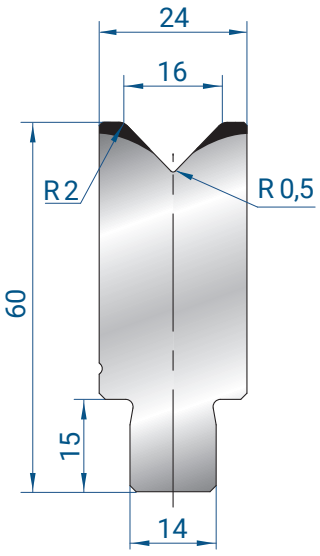

3163

Mat = C45
Max T/m = 100
α = 88°


835 mm	8,0 kg
415 mm	4,0 kg
805 mm FRAZ. / SECT.	7,7 kg

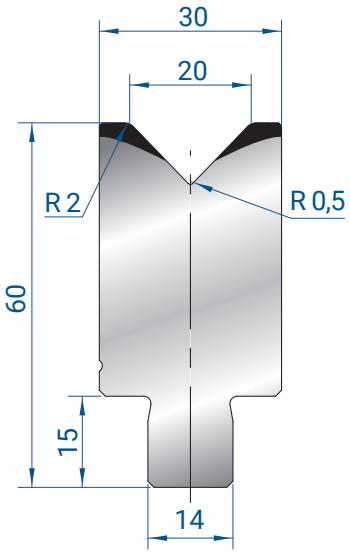

3164

Mat = C45
Max T/m = 100
α = 88°


835 mm	9,5 kg
415 mm	4,7 kg
805 mm FRAZ. / SECT.	9,2 kg

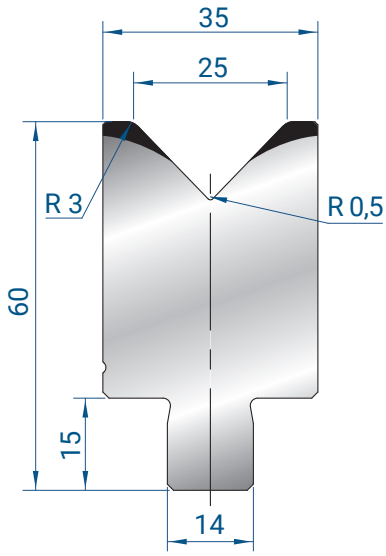

3165

Mat = C45
Max T/m = 100
α = 88°


835 mm	10,6 kg
415 mm	5,3 kg
805 mm FRAZ. / SECT.	10,2 kg

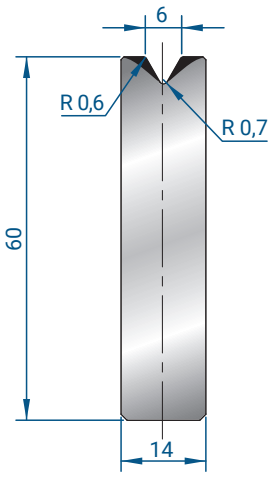

3193

Mat = C45
Max T/m = 60
α = 60°


835 mm	5,4 kg
415 mm	2,7 kg
805 mm FRAZ. / SECT.	5,2 kg

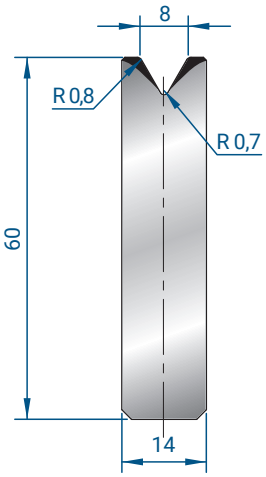

3194

Mat = C45
Max T/m = 60
α = 60°


835 mm	5,3 kg
415 mm	2,6 kg
805 mm FRAZ. / SECT.	5,1 kg

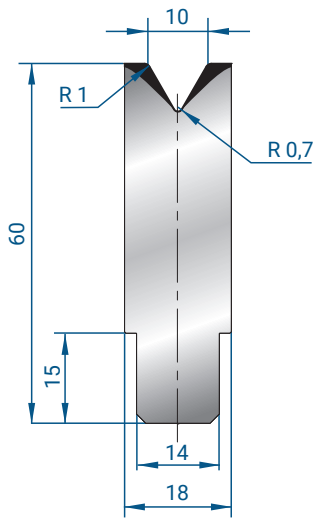

3195

Mat = C45
Max T/m = 60
α = 60°


835 mm	6,4 kg
415 mm	3,2 kg
805 mm FRAZ. / SECT.	6,1 kg

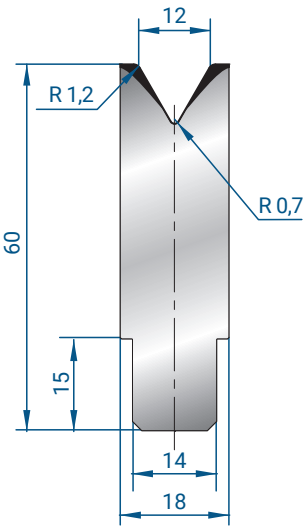

3196

Mat = C45
Max T/m = 60
α = 60°


835 mm	6,3 kg
415 mm	3,1 kg
805 mm FRAZ. / SECT.	6,0 kg

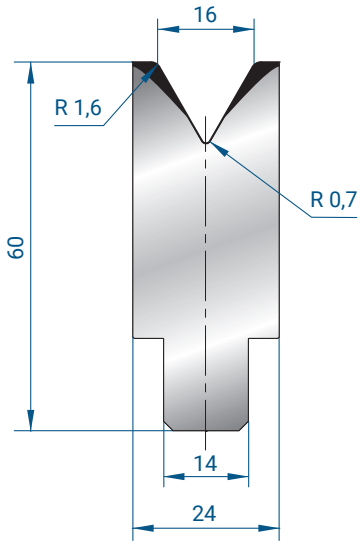

3197

Mat = C45
Max T/m = 60
α = 60°


835 mm	7,7 kg
415 mm	3,8 kg
805 mm FRAZ. / SECT.	7,4 kg

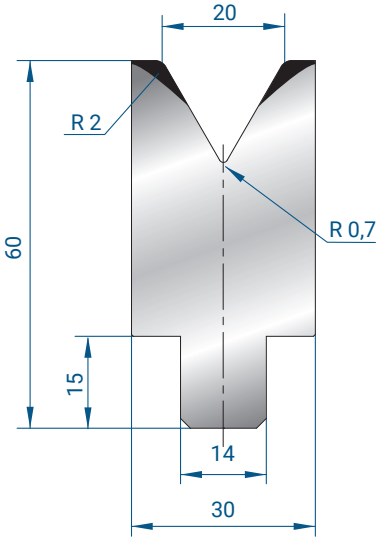

3198

Mat = C45
Max T/m = 60
α = 60°


835 mm	9,1 kg
415 mm	4,5 kg
805 mm FRAZ. / SECT.	8,7 kg

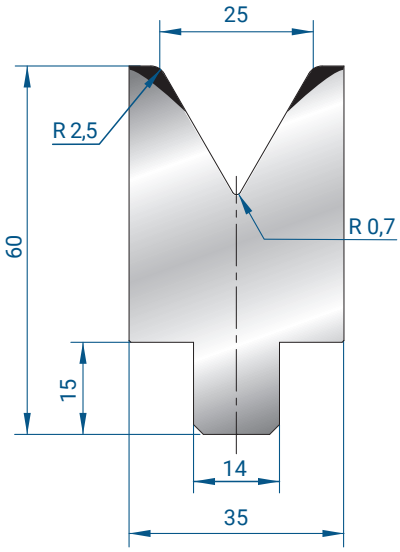

3199

Mat = C45
Max T/m = 60
α = 60°


835 mm	9,9 kg
415 mm	4,9 kg
805 mm FRAZ. / SECT.	9,5 kg

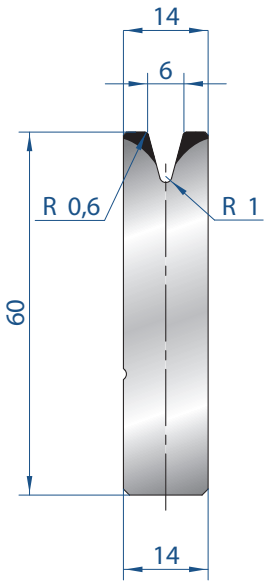

3166

Mat = C45
Max T/m = 35
α = 30°


835 mm	5,3 kg
415 mm	2,6 kg
805 mm FRAZ. / SECT.	5,1 kg

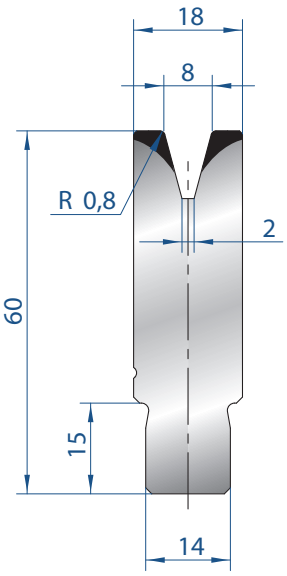

3167

Mat = C45
Max T/m = 40
α = 30°


835 mm	6,3 kg
415 mm	3,1 kg
805 mm FRAZ. / SECT.	6,1 kg

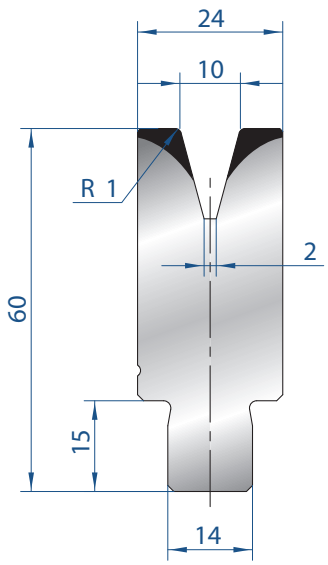

3168

Mat = C45
Max T/m = 50
α = 30°


835 mm	7,8 kg
415 mm	3,9 kg
805 mm FRAZ. / SECT.	7,5 kg

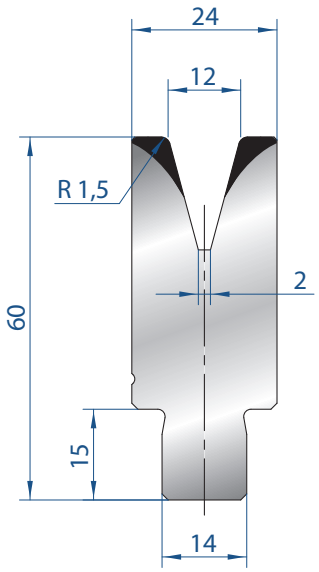

3169

Mat = C45
Max T/m = 50
α = 30°


835 mm	7,6 kg
415 mm	3,8 kg
805 mm FRAZ. / SECT.	7,3 kg

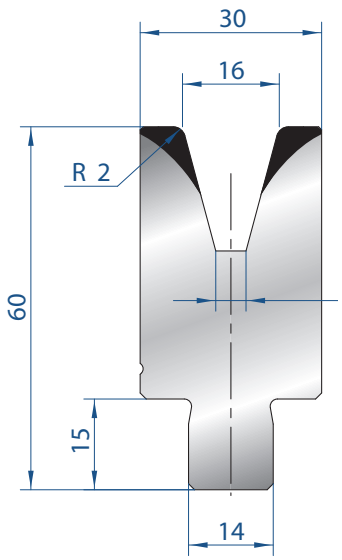

3170

Mat = C45
Max T/m = 50
α = 30°


835 mm	8,7 kg
415 mm	4,4 kg
805 mm FRAZ. / SECT.	8,5 kg

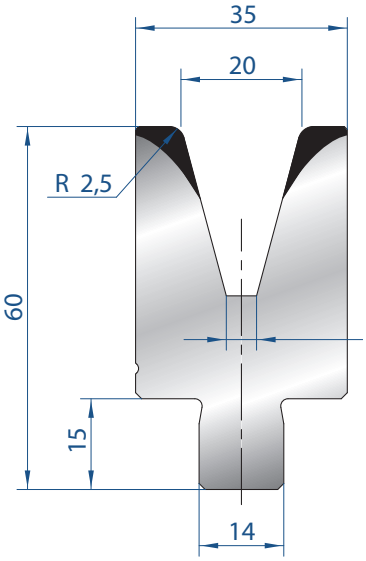

3171

Mat = C45
Max T/m = 55
α = 30°

835 mm	9,4 kg
415 mm	4,7 kg
805 mm FRAZ. / SECT.	9,0 kg

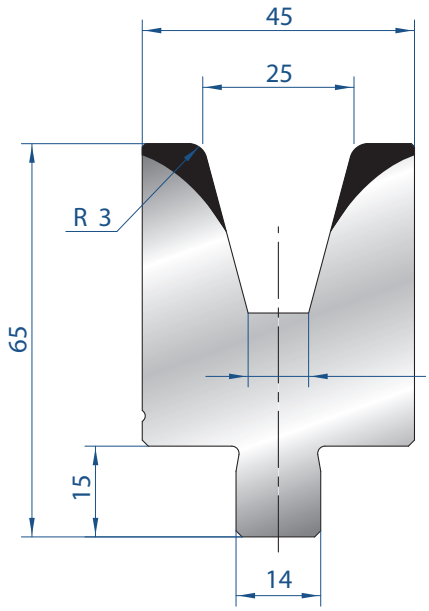


3172

Mat = C45
Max T/m = 55
α =30°

835 mm	12,9 kg
415 mm	6,4 kg
805 mm FRAZ. / SECT.	12,4 kg



EUROSTAMP TOOLING
the Italian excellence
3040
A 26°
R 3
H 135
V 12
L 415
100 T/m

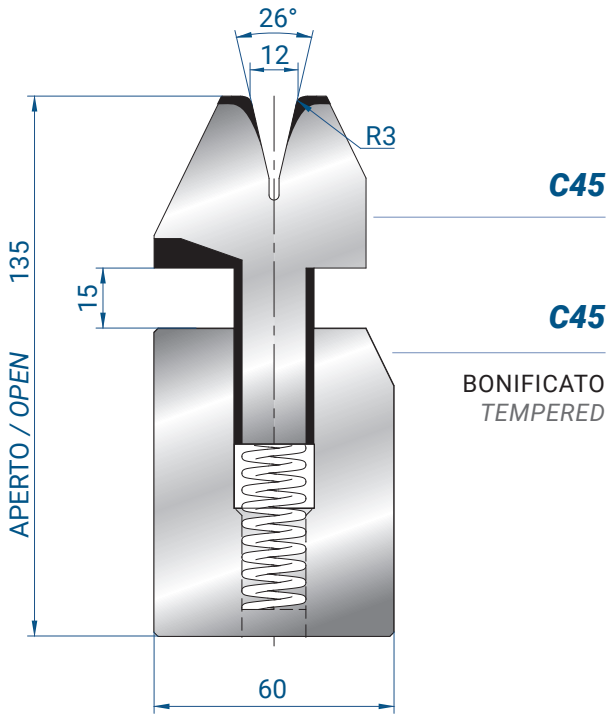

3040

835 mm	40,7 kg
415 mm	20,2 kg


Spessore /
Sheet metal thickness =
Min 1,5 mm - Max 3 mm
Max T/m = 100

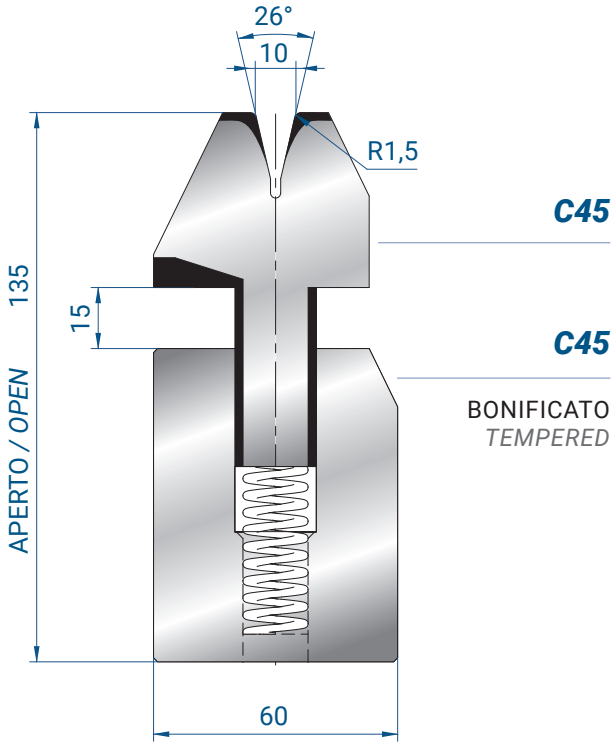

3038

835 mm	41,1 kg
415 mm	20,4 kg


Spessore /
Sheet metal thickness =
Min 1,5 mm - Max 2,5 mm
Max T/m = 100

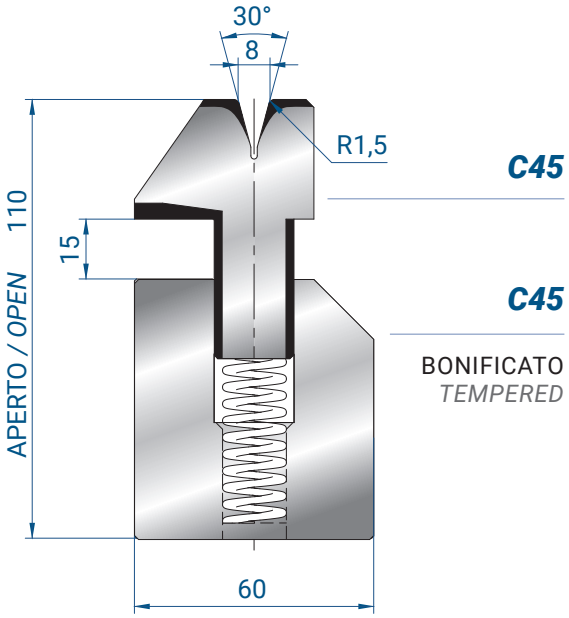

3041

835 mm	31,4 kg
415 mm	15,6 kg


Spessore /
Sheet metal thickness = Max 1,5 mm
Max T/m = 80

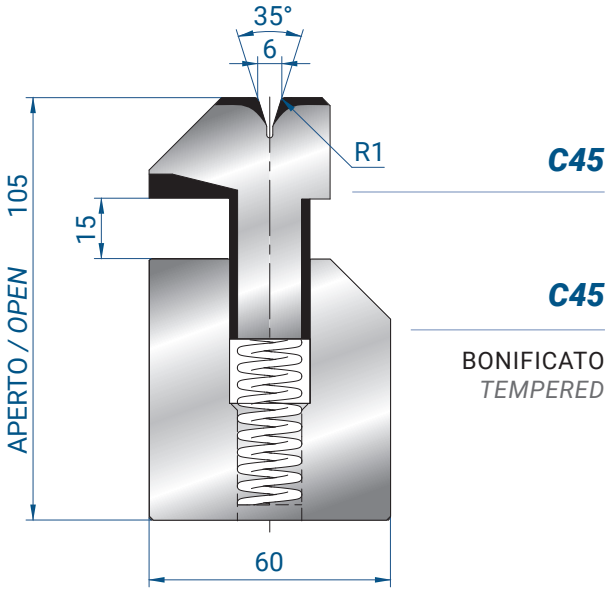

3039

835 mm	30,5 kg
415 mm	15,2 kg


Spessore /
Sheet metal thickness = Max 1,0 mm
Max T/m = 80

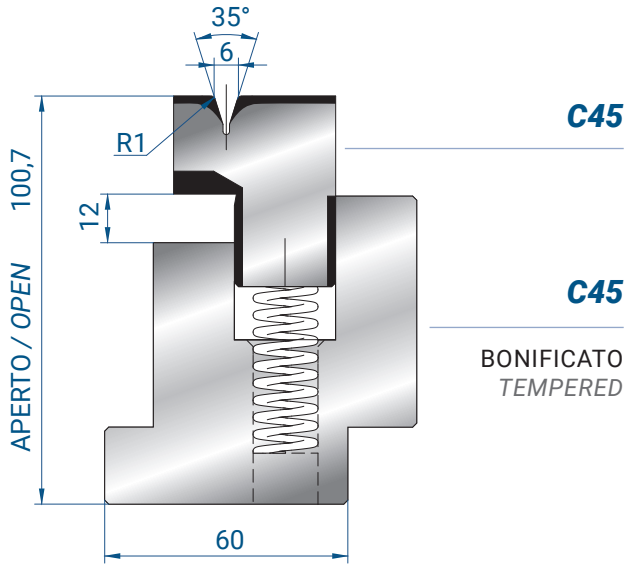

3037/6

835 mm	33,9 kg
415 mm	16,9 kg

Spessore /
Sheet metal thickness = Max 1,0 mm
Max T/m = 60

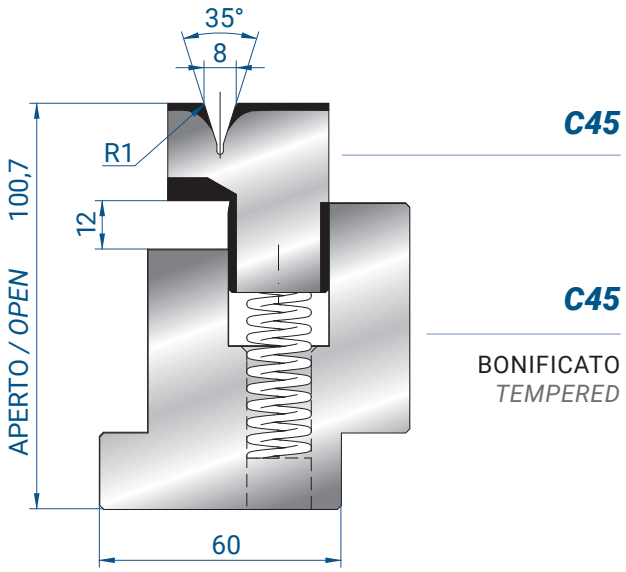


3037/8

835 mm	33,8 kg
415 mm	16,8 kg

Spessore /
Sheet metal thickness = Max 1,2 mm
Max T/m = 60

TONNELLAGGI PER SCHIACCIATURA
HEMMING POWER

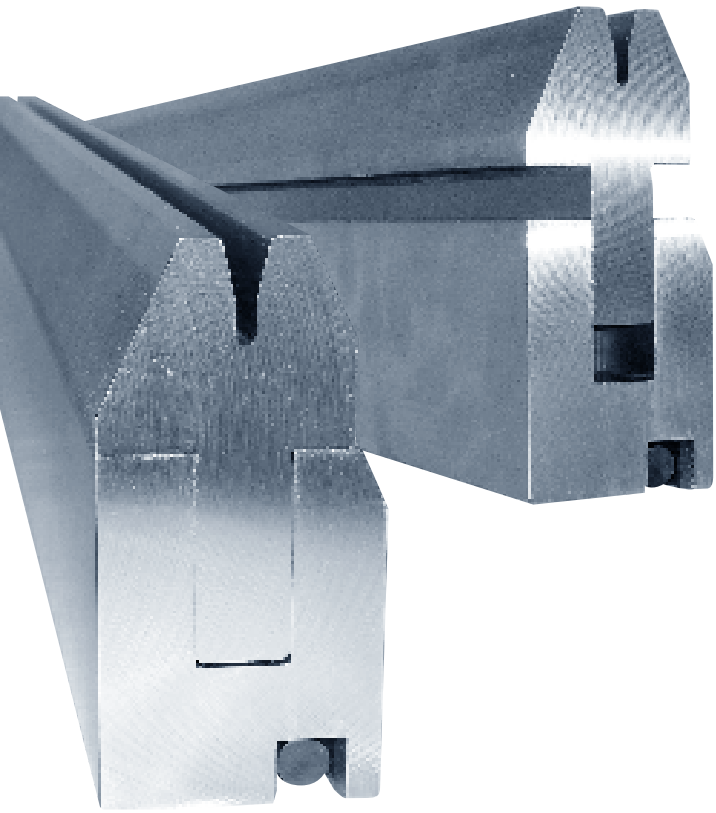

Ferro normale R.45 Kg/mmq / *Mild Steel R.45 Kg/mmq*




S mm	A mm	Ton /M	2xS	Ton /M
0,6	3	9	1,2	23
0,8	3	12	1,6	32
1	3,5	15	2	40
1,25	3,5	17	2,5	50
1,5	4,6	22	3	63
2	5,5	30	4	80
2,5	6,5	55	5	90
3	8	70	6	100

Inox R.70 Kg/mmq / *Stainless Steel R.70 Kg/mmq*



S mm	A mm	Ton /M	2xS	Ton /M
0,6	3	15	1,2	35
0,8	3	20	1,6	50
1	3,5	25	2	60
1,25	3,5	26	2,5	80
1,5	4,6	38	3	95
2	5,5	50	4	130

PIEGASCHIACCIA PNEUMATICI
PNEUMATIC FLATTENING HEMMING TOOLS

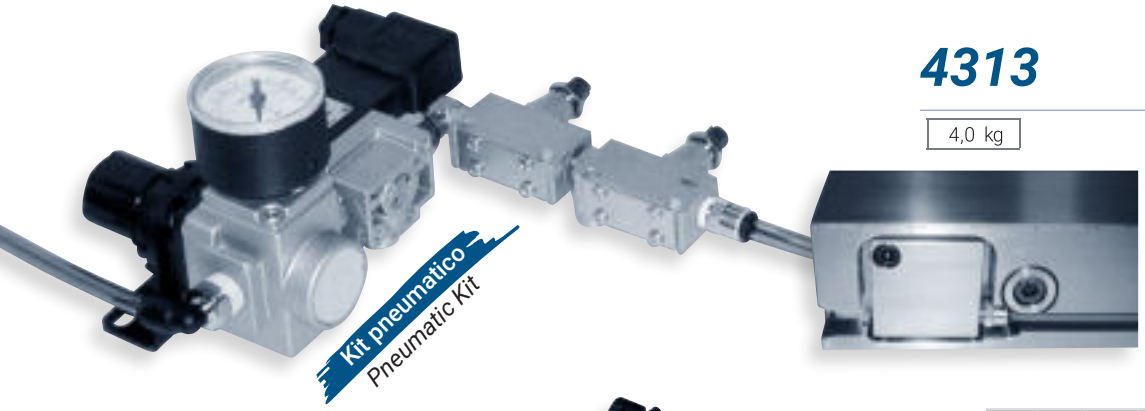

4313


4,0 kg

KIT PNEUMATICO
PNEUMATIC KIT

NECESSARIO PER INSTALLAZIONE SISTEMI PNEUMATICI
MANDATORY FOR INSTALLATION OF PNEUMATIC SYSTEMS



	V	A	R	H aperto/open	Max T/M
3038 PN	10	26°	1,5	135	100
				835 mm	41,1 kg
				415 mm	20,4 kg
3039 PN	6	35°	1	105	80
				835 mm	30,5 kg
				415 mm	15,2 kg
3040 PN	12	26°	3	135	100
				835 mm	40,7 kg
				415 mm	20,2 kg
3041 PN	8	30°	1,5	110	80
				835 mm	31,4 kg
				415 mm	15,6 kg

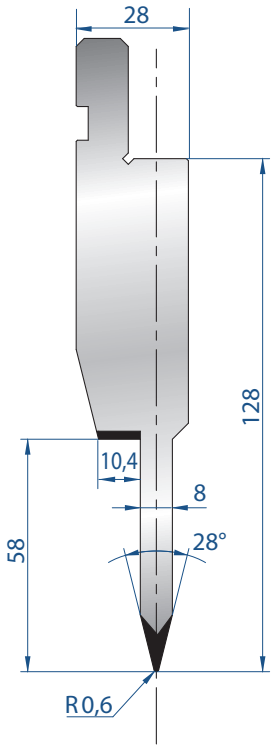


1195

Mat = C45 bonificato / *tempered*
Max T/m = 80

835 mm	17,4 kg
415 mm	8,7 kg
805 mm FRAZ. / SECT.	16,0 kg

Spessore / *Thickness*

Max 1,2 mm
Ferro / *Mild steel*

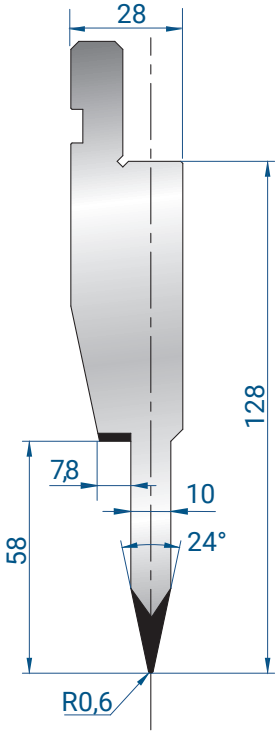


1196

Mat = C45 bonificato / *tempered*
Max T/m = 80

835 mm	17,5 kg
415 mm	8,7 kg
805 mm FRAZ. / SECT.	16,1 kg

Spessore / *Thickness*


Max 1,5 mm
Ferro / *Mild steel*

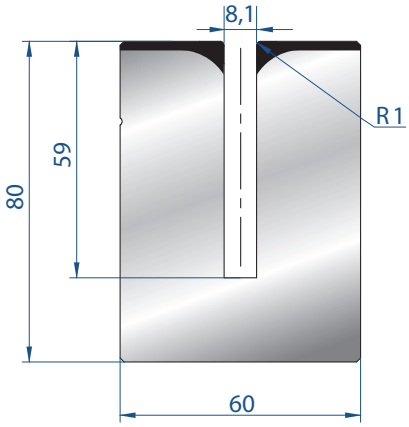

3176

Mat = C45 bonificato / *tempered*
Max T/m = 50

835 mm	28,2 kg
415 mm	14,0 kg
805 mm FRAZ. / SECT.	27,2 kg

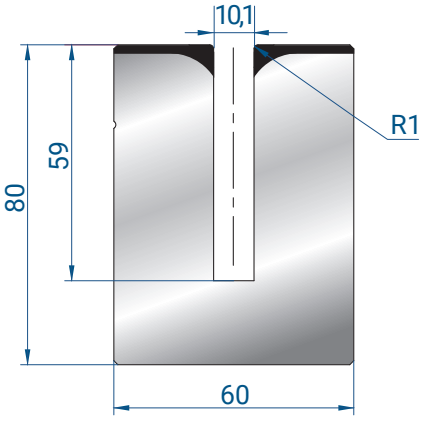


3177

Mat = C45 bonificato / *tempered*
Max T/m = 50

835 mm	27,5 kg
415 mm	13,7 kg
805 mm FRAZ. / SECT.	26,5 kg



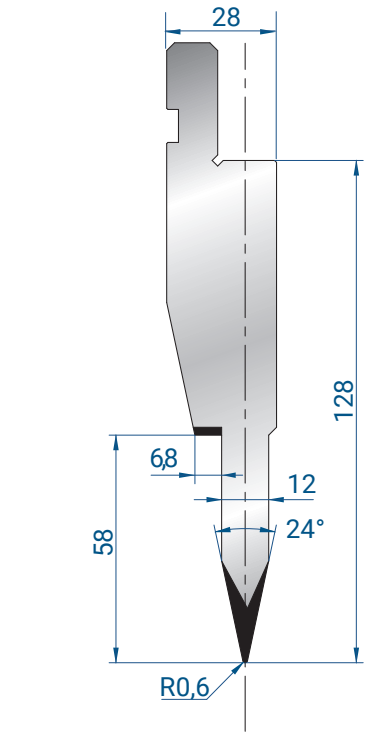


1197

Mat = C45 bonificato / *tempered*
Max T/m = 80

835 mm	18,0 kg
415 mm	8,9 kg
805 mm FRAZ. / SECT.	16,5 kg

Spessore / *Thickness*


Max 1,5 mm
Ferro / *Mild steel*

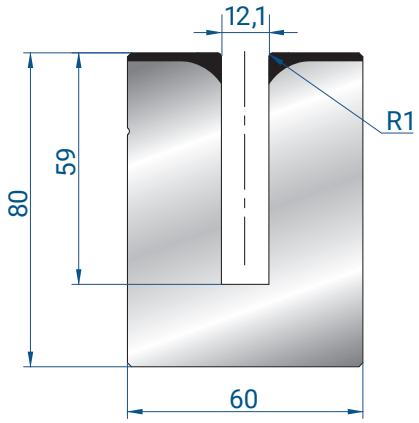


3178


Mat = C45 bonificato / *tempered*
Max T/m = 50

835 mm	26,7 kg
415 mm	13,3 kg
805 mm FRAZ. / SECT.	25,7 kg

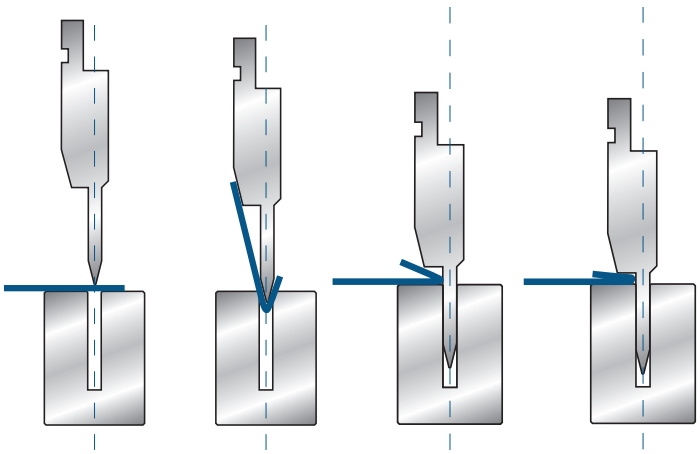



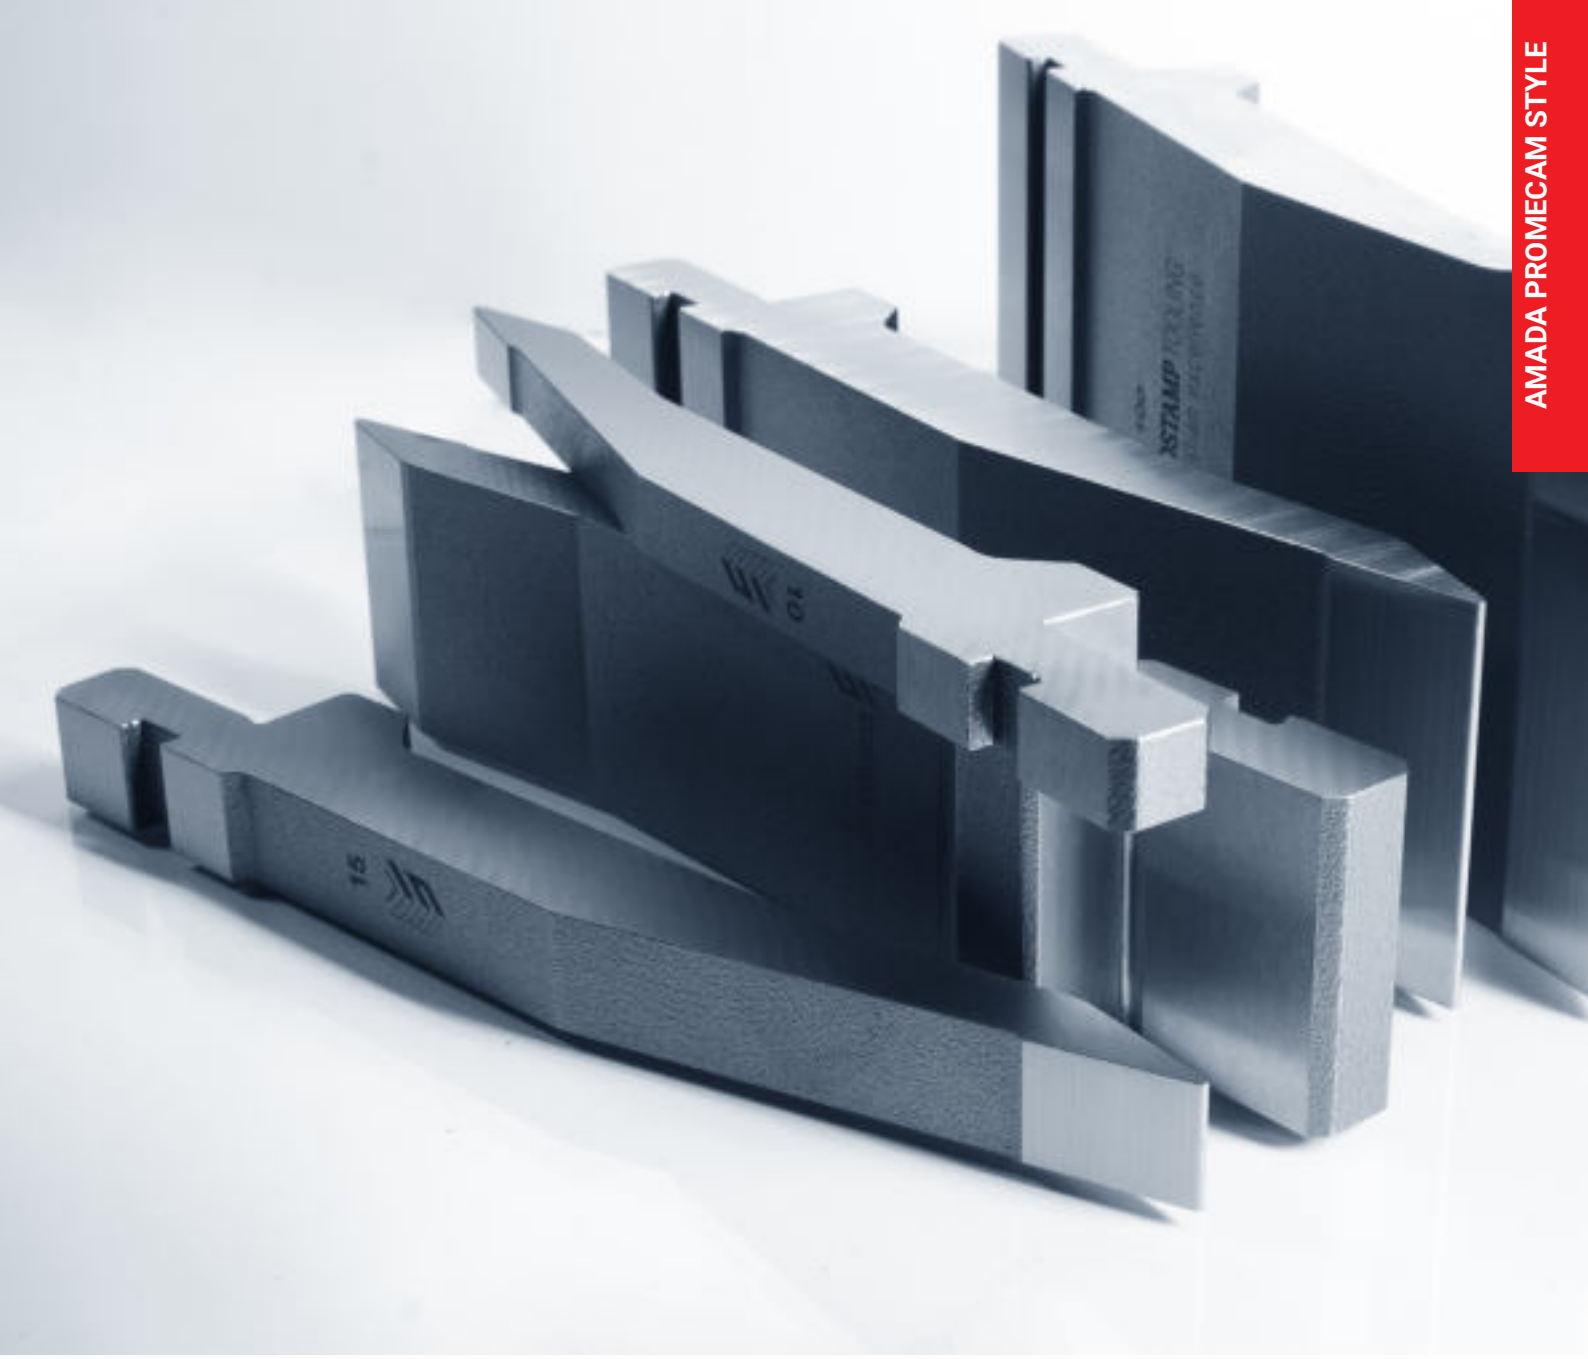

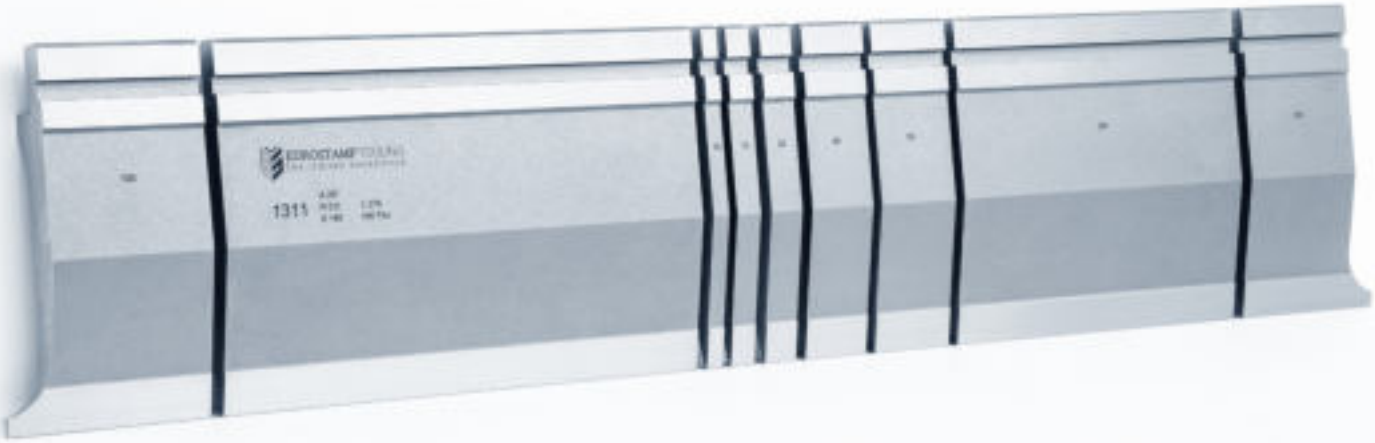

EUROSTAMP TOOLING
the Italian excellence

ESH

EUROSTAMP SAME HEIGHT



UTENSILI SERIE ESH
(Eurostamp Same Height)

EUROSTAMP ESPANDE LA PROPRIA GAMMA INTRODUCENDO UNA NUOVA SERIE COMPLETA DI UTENSILI (SUPERIORI ED INFERIORI) CONFORMI AI SISTEMI DI STAFFAGGIO STILE EUROPEO (AMADA/ PROMECAM).

EUROSTAMP IS EXPANDING ITS PRODUCT RANGE BY INTRODUCING A FULLY NEW SERIES (UPPER AND LOWER) THAT CONFORMS TO THE EUROPEAN STYLE CLAMPING SYSTEM (AMADA/PROMECAM STYLE).

CARATTERISTICHE COMUNI


Tutti gli utensili della serie sono prodotti utilizzando acciaio premium al CrMo che, grazie all'elevato carico di rottura (950-1050 N/mm²), consente di raggiungere tonnellaggi più elevati a parità di sezioni degli utensili.


Il trattamento di indurimento degli utensili è differenziato fra punzoni e matrici, per ottenere le migliori prestazioni in base alla loro differente modalità di utilizzo.

COMMON FEATURES

All tooling among this series is produced with high quality "premium" CrMo steel that, thanks to its superior tensile strength (950-1050 N/mm²), allows to withstand the highest tonnages even with small tool sections.

The tooling thermal treatment is differentiated between punches and dies, to obtain the best performance according to their different working condition.

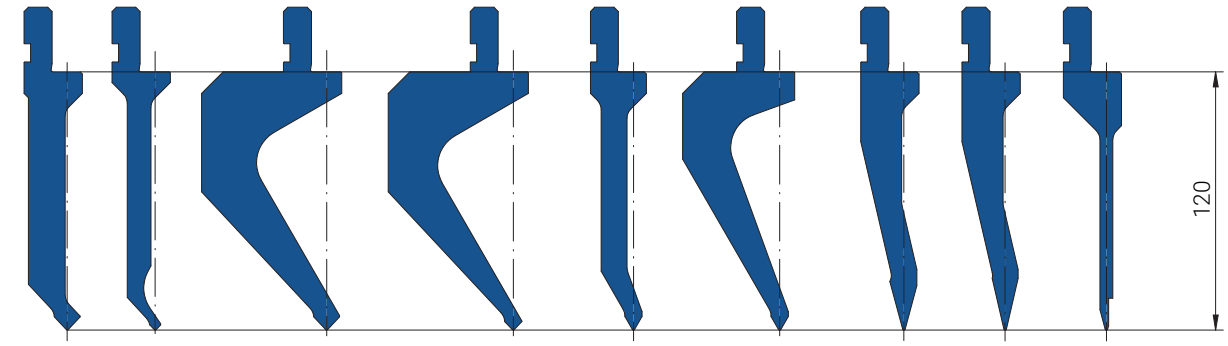

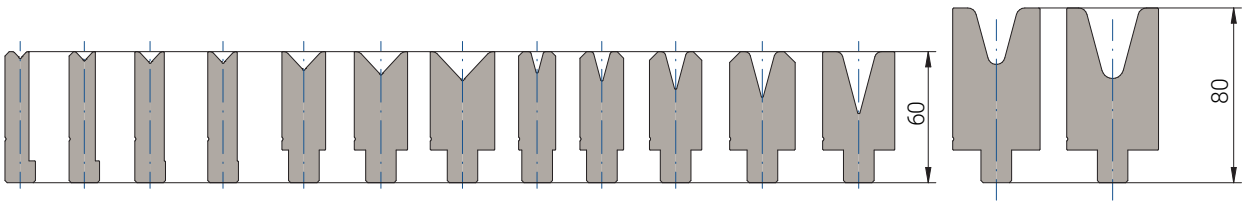

INNOVAZIONE NEGLI UTENSILI SUPERIORI

Punzoni temprati ad induzione sulla punta fino a 55-58 HRC e per una profondità media di oltre 3mm: elevata durezza del raggio di punta e di tutta la superficie a contatto con la lamiera.

La gamma comprende punzoni con angoli ad 86°; 60°; 30°; 26°.

Forme dei punzoni ridisegnate per ottenere la massima flessibilità (quantità di profili fabbricabili).

Altezza di lavoro 120mm: adattabile alle caratteristiche di luce e corsa della maggior parte di piegatrici presenti sul mercato.

Altezza di lavoro identica per tutti i punzoni della gamma: possibilità di fabbricare profili complessi con angoli a 90° installando qualunque punzone in modalità "a stazioni (staged)".

UPPER TOOLING INNOVATION


Punches are hardened by induction on their tip, up to 55-58 HRC, at a depth of more than 3mm: extreme hardness of the punch tip in order to grant a larger lifespan.

Wide range of angles: 86°; 60°; 30°; 26°.

The punch shapes have been redesigned, based on years of experience, in order to improve their effectiveness and flexibility (quantity of feasible product profiles).

Working height is 120mm: it can fit on almost any daylight and stroke dimension, making these punches installable on almost any press brakes available in the market.

All the punches working height is exactly the same to allow the fabrication of complex products whose angles are 90° by installing the punches in stages (bending stations).

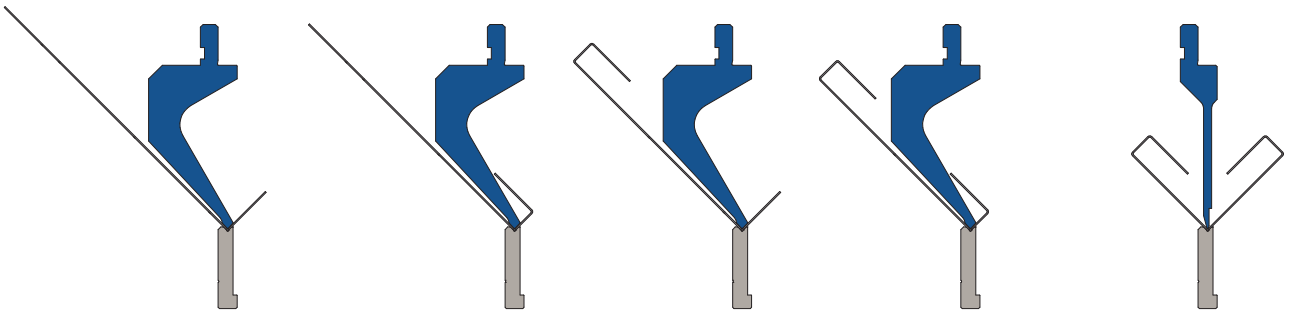

INNOVAZIONE NEGLI UTENSILI INFERIORI

Inserti matrice sottoposti a nitrurazione: tutta la superficie della matrice, e non solamente le spalle, è rivestita da un sottile strato di nitruro con durezza fino a 65 HRC: importante riduzione del rischio di danneggiamento delle pareti laterali della V e significativa riduzione dell'adesione superficiale di particelle estranee (zinco e altre polveri) alle spalle e alle pareti della V.

La superficie delle matrici, infine, viene sottoposta a fosfatazione per incrementarne la protezione dall'ossidazione.

La gamma comprende inserti matrice ad 86° e a 30° con ampiezze da 6 a 25mm.

LOWER TOOLING INNOVATIONS (INSERT DIE ARCHITECTURE)

The insert dies are gas-nitrided; the whole tool external surface (not only its shoulders) is coated by a thin nitride layer whose hardness is up to 65 HRC: the significant increase of the surface hardness do not only improves the die shoulder resistance to the friction against the sheet surface, but, because even the die groove tilted sides have the same hardness, their wearing is reduced, as well as it's reduced the adhesion of foreign particles (Zink and other dust) that could cause the "galling" phenomenon.

The die surface is, then, subjected to a phosphate conversion coating, that's the reason of their black color. This treatment increases the die surface protection against the oxidation.

The die inserts widths range goes from 6 to 25mm at 86° and 30°.

Forme degli inserti matrice ridisegnate per adeguarle alle esigenze odierne:

Ampi raggi di raccordo (per ridurre l'entità di eventuali impronte sulla lamiera).

Il corpo degli inserti matrice con larghezza di V di dimensioni ridotte, è stato modificato per offrire una maggiore versatilità nella fabbricazione di pieghe più complesse come quelle che prevedono contro pieghe.


Gli angoli esterni degli inserti matrice sono dotati di smussi che riducono la probabilità di collisioni con eventuali deformazioni posizionate in prossimità delle linee di piega.

The die inserts shape has been re-designed according to the actual fabrication requirements:

Wide shoulder radii (to decrease the risk of sheet marking).

The small V width insert dies body has been relieved: its thinner dimension will help to fabricate more complex product profiles, like short offset bends (frequently required when working with thin sheets).

Some of the insert dies corners has been replaced by chamfers, in order to decrease the probability of collisions against obstacles (burrings, deformations...) located even very near to the bending line.

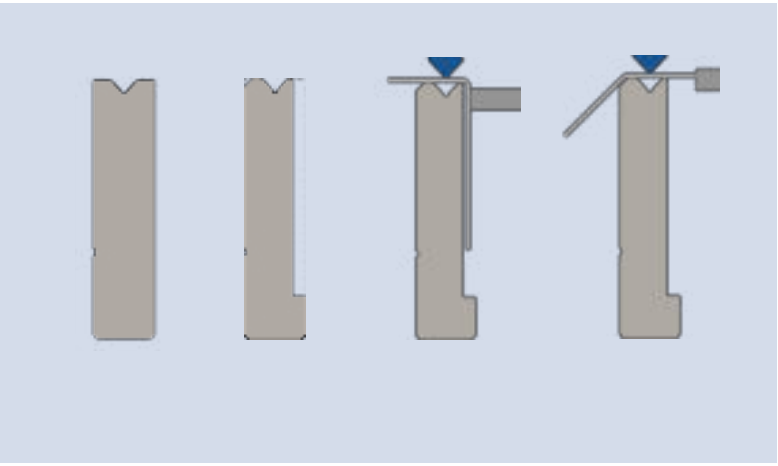

FORNITURE DISPONIBILI COME OPZIONE *(a pagamento)*

A richiesta, anche i punzoni possono essere sottoposti al trattamento di fosfatazione, costituito da un rivestimento superficiale a base di fosfato che ricopre la superficie con uno strato cristallino protettivo in grado di conferire una elevata resistenza alla corrosione.


Il costo del trattamento varia in funzione del peso.

OPTIONAL ADD-ON

The punches surfaces could be subjected to phosphate conversion coating: chemical treatment that creates a thin adhering layer of phosphates, to achieve corrosion resistance and lubrication.


The treatment additional cost will be charged according to the total weight.

INNOVAZIONE NELLA FRAZIONATURA STANDARD
INNOVATION OF THE STANDARD SECTIONING

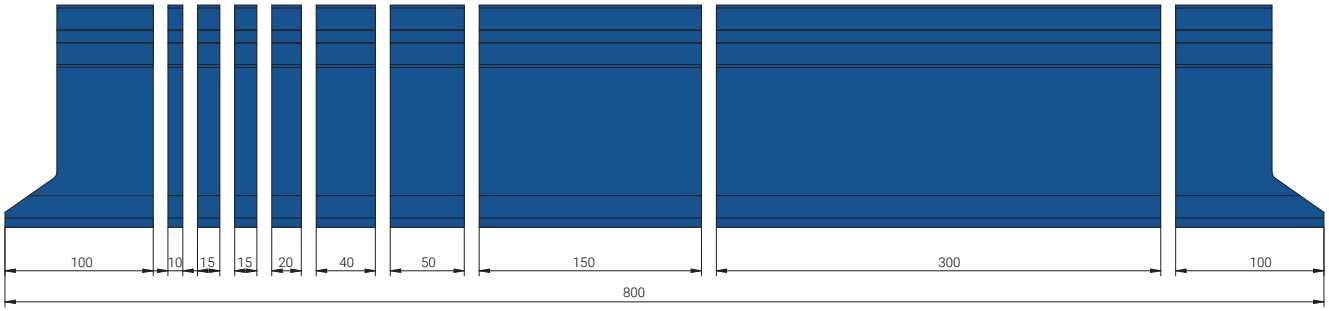

UTENSILI SUPERIORI (LUNGHEZZA TOTALE 800MM):
UPPER TOOLING (NEW TOTAL LENGTH 800MM):

100mm SX – 10mm – 15mm – 15mm – 20mm – 40mm – 50mm – 150mm – 300mm – 100mm DX

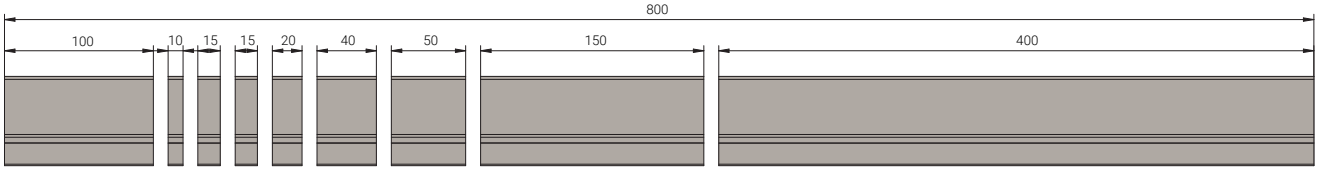


UTENSILI INFERIORI (LUNGHEZZA TOTALE 800MM):
LOWER TOOLS (NEW TOTAL LENGTH 800MM):

100mm – 10mm – 15mm – 15mm – 20mm – 40mm – 50mm – 150mm – 400mm


SCARPETTE ESH STANDARD
STANDARD ESH HORN

SCARPETTE ESH STANDARD
STANDARD ESH HORN


UTENSILI SUPERIORI
LUNGHEZZA STANDARD 100MM
UPPER TOOLS
STANDARD LENGHT 100MM

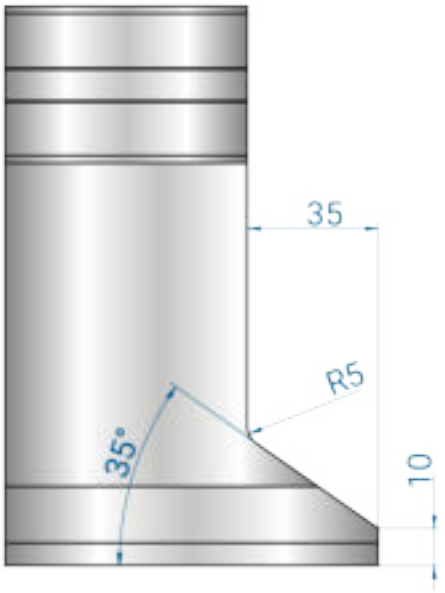


1340, 1343, 1344, 1345, 1346

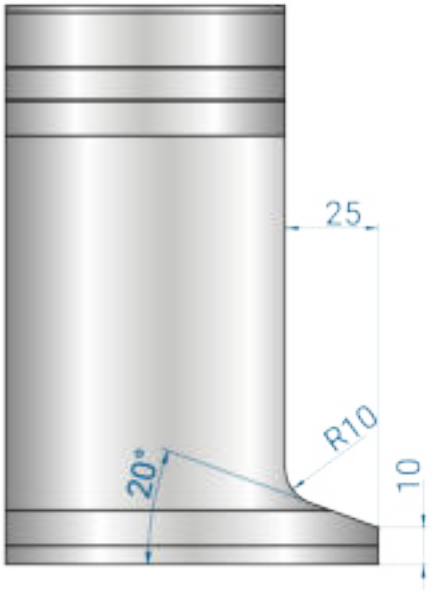

1341, 1342, 1349

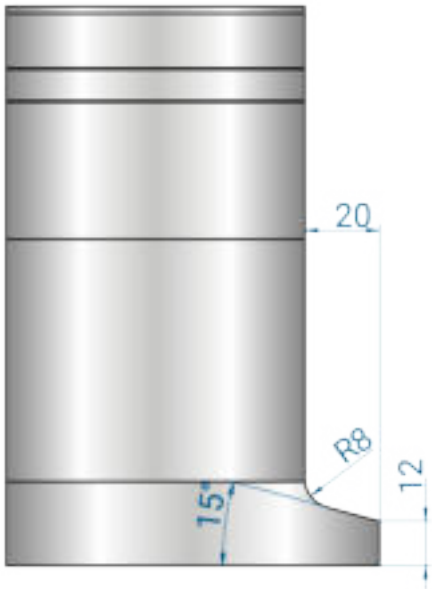


1347, 1348

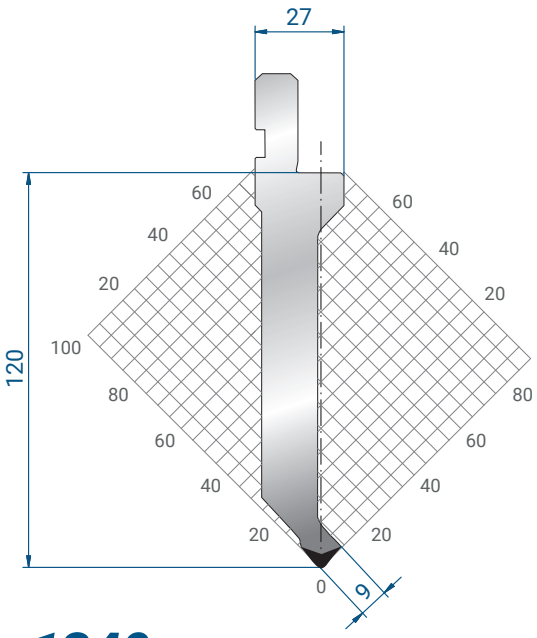

1340

835 mm	15,6 kg
415 mm	7,8 kg
800 mm FRAZ. / SECT.	13,8 kg


Mat = CrMo Steel
bonificato/ tempered
H = 120 mm
Max T/m = 100
α = 86°
R = 0.6

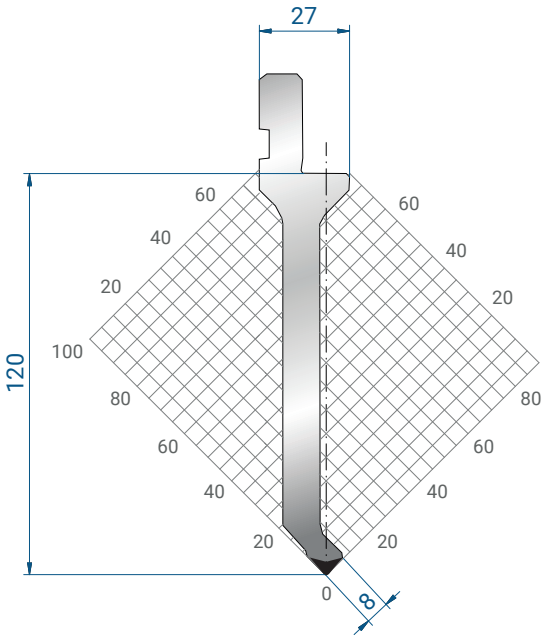

1341

835 mm	11,7 kg
415 mm	5,8 kg
800 mm FRAZ. / SECT.	10,6 kg


Mat = CrMo Steel
bonificato/ tempered
H = 120 mm
Max T/m = 50
α = 86°
R = 0.6

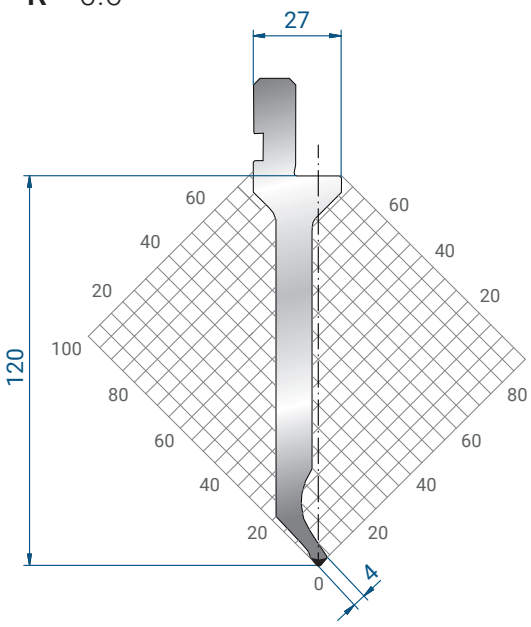

1342

835 mm	11,2 kg
415 mm	5,5 kg
800 mm FRAZ. / SECT.	10,0 kg

Mat = CrMo Steel
bonificato/ tempered
H = 120 mm
Max T/m = 30
α = 86°
R = 0.6

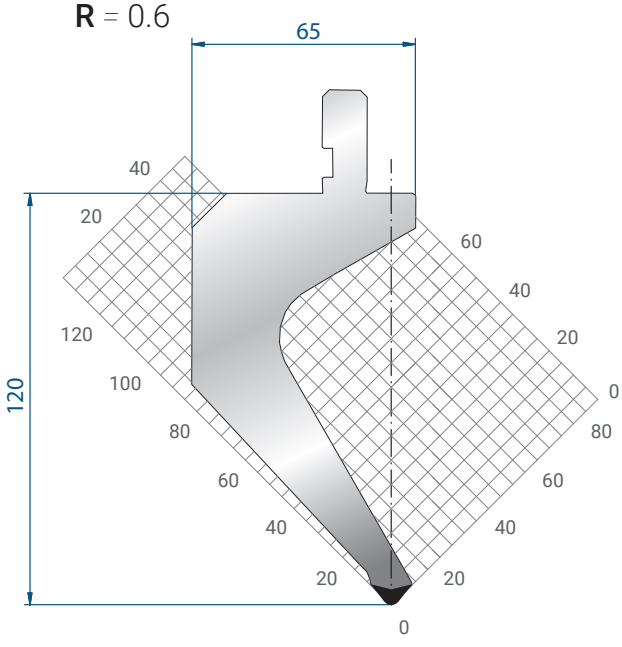


1343

835 mm	26,6 kg
415 mm	12,5 kg
800 mm FRAZ. / SECT.	22,2 kg

Mat = CrMo Steel
bonificato/ tempered
H = 120 mm
Max T/m = 50
α = 86°
R = 0.6

PUNZONI 86° / PUNCH 86°

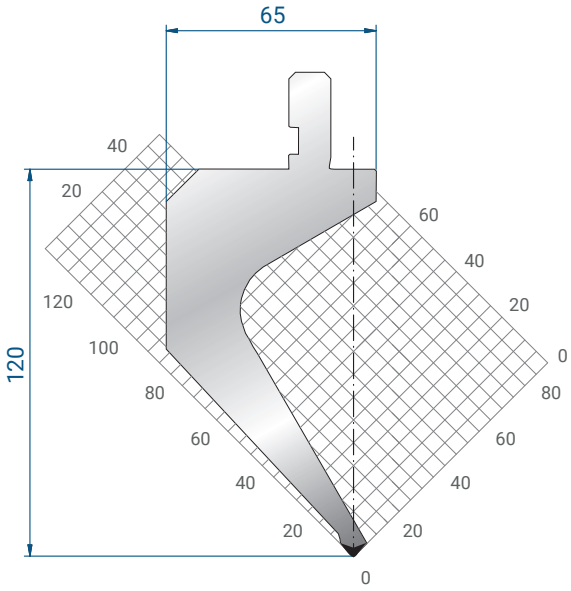


1344

Mat = CrMo Steel
bonificato/ tempered
H = 120 mm
Max T/m = 45
α = 86°
R = 0.6

835 mm	23,4 kg
415 mm	11,7 kg
800 mm FRAZ. / SECT.	20,6 kg


PUNZONI 60° / PUNCH 60°

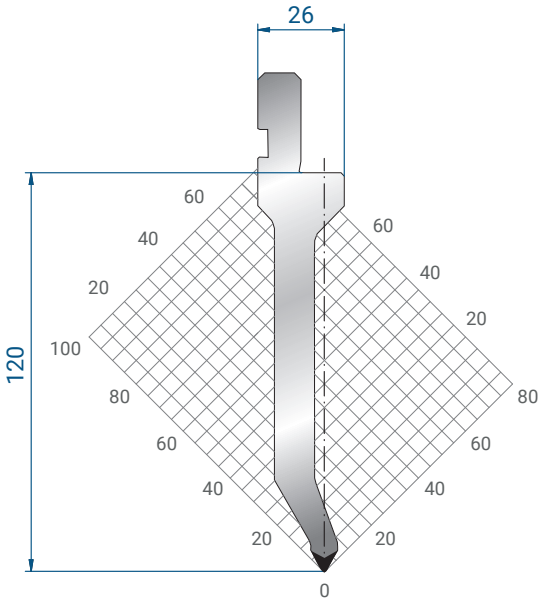

1345

Mat = CrMo Steel
bonificato/ tempered
H = 120 mm
Max T/m = 70
α = 60°
R = 0.6

835 mm	12,4 kg
415 mm	6,2 kg
800 mm FRAZ. / SECT.	11,0 kg

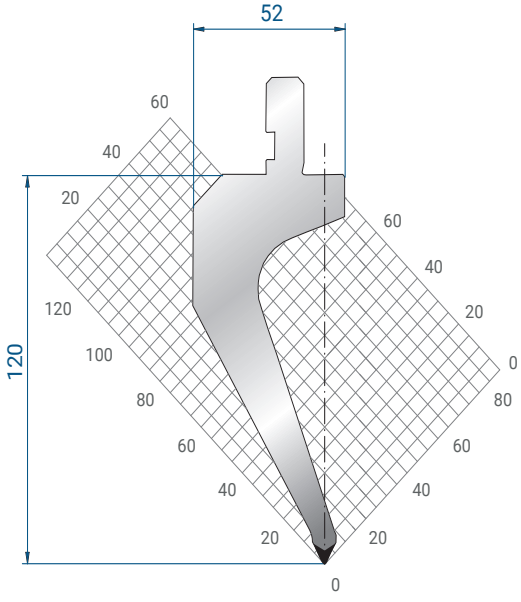


1346

Mat = CrMo Steel
bonificato/ tempered
H = 120 mm
Max T/m = 70
α = 60°
R = 0.6

835 mm	19,2 kg
415 mm	9,6 kg
800 mm FRAZ. / SECT.	16,9 kg


PUNZONI 30° / PUNCH 30°

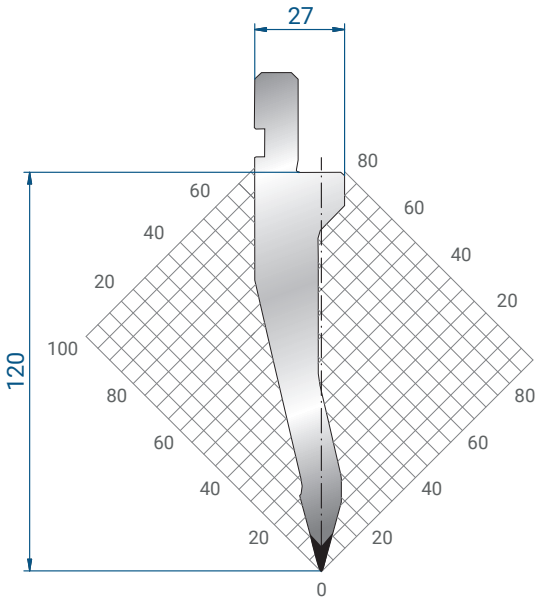

1347

Mat = CrMo Steel
bonificato/ tempered
H = 120 mm
Max T/m = 100
α = 30°
R = 0.6

835 mm	14,0 kg
415 mm	7,0 kg
800 mm FRAZ. / SECT.	12,8 kg

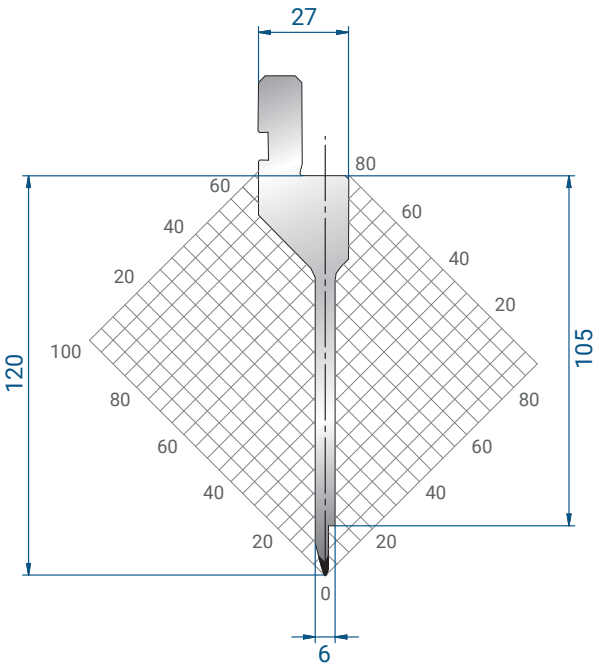


1349

Mat = CrMo Steel
bonificato/ tempered
H = 120 mm
Max T/m = 45
α = 30°
R = 0.6

835 mm	13,9 kg
415 mm	4,9 kg
800 mm FRAZ. / SECT.	8,8 kg

PUNZONI 26° / PUNCH 26°

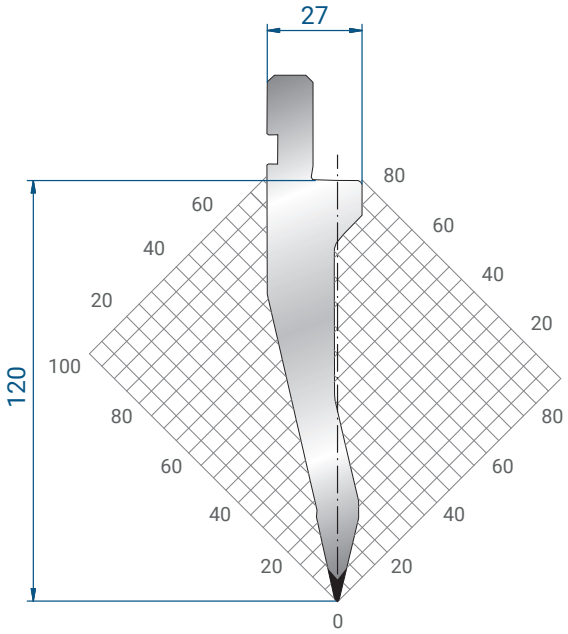


1348

Mat = CrMo Steel
bonificato/ tempered
H = 120 mm
Max T/m = 100
α = 26°
R = 0.6

835 mm	13,9 kg
415 mm	6,9 kg
800 mm FRAZ. / SECT.	12,7 kg


SUPPORTO PER INSERTI MATRICE ESH
ESH DIES INSERT HOLDER

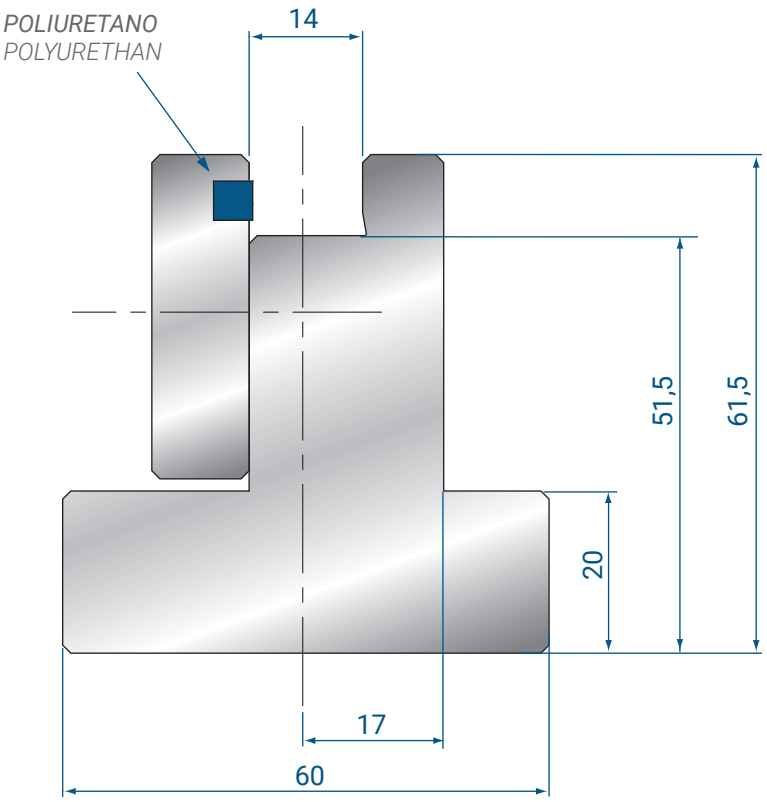


3173


835 mm	17,0 kg
415 mm	8,0 kg

ESEMPIO DI MONTAGGIO
ASSEMBLY EXAMPLE

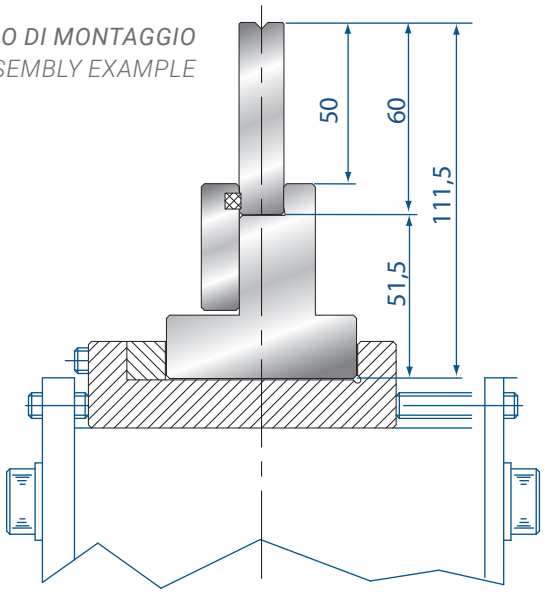



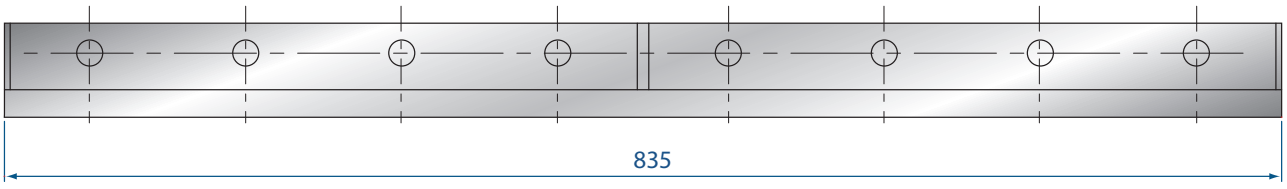


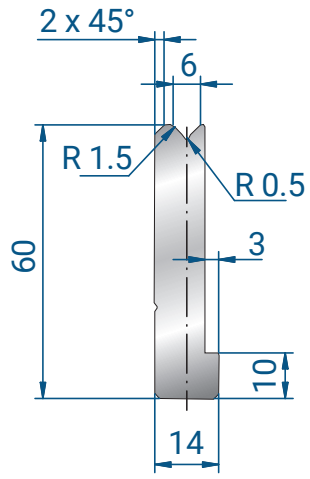

3320 - V6

835 mm	4,4 kg
415 mm	2,2 kg
800 mm FRAZ. / SECT.	4,2 kg


Mat = CrMo Steel
nitrurato e fosfatato/ nitrided and phosphatized
H = 60 mm
Max T/m = 80
α = 86°
R = 1.5

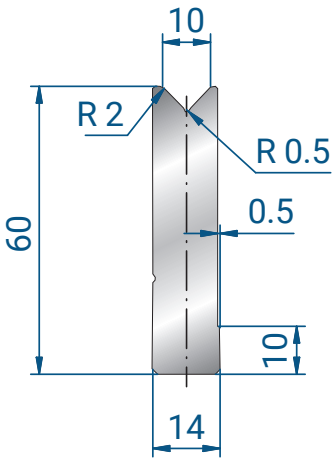

3322 - V10

835 mm	5,1 kg
415 mm	2,5 kg
800 mm FRAZ. / SECT.	4,9 kg


Mat = CrMo Steel
nitrurato e fosfatato/ nitrided and phosphatized
H = 60 mm
Max T/m = 100
α = 86°
R = 2

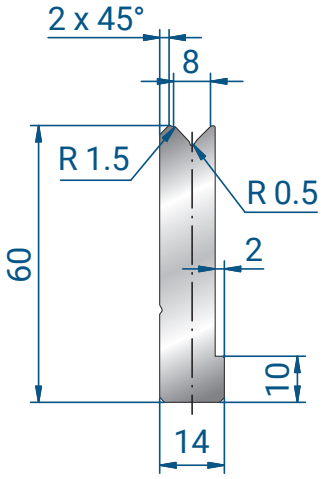

3321 - V8

835 mm	4,7 kg
415 mm	2,3 kg
800 mm FRAZ. / SECT.	4,5 kg


Mat = CrMo Steel
nitrurato e fosfatato/ nitrided and phosphatized
H = 60 mm
Max T/m = 90
α = 86°
R = 1.5

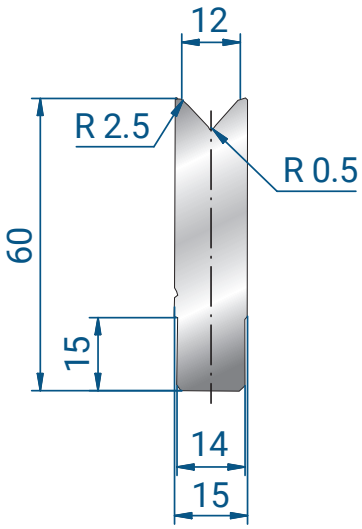

3323 - V12

835 mm	5,5 kg
415 mm	2,7 kg
800 mm FRAZ. / SECT.	5,3 kg


Mat = CrMo Steel
nitrurato e fosfatato/ nitrided and phosphatized
H = 60 mm
Max T/m = 100
α = 86°
R = 2.5

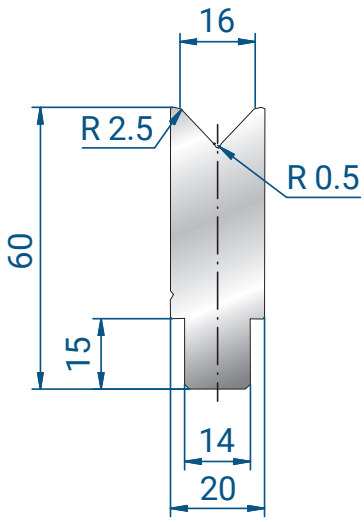

3324 - V16

835 mm	6,8 kg
415 mm	3,4 kg
800 mm FRAZ. / SECT.	6,5 kg


Mat = CrMo Steel
nitrurato e fosfatato/ nitrided and phosphatized
H = 60 mm
Max T/m = 100
α = 86°
R = 2.5

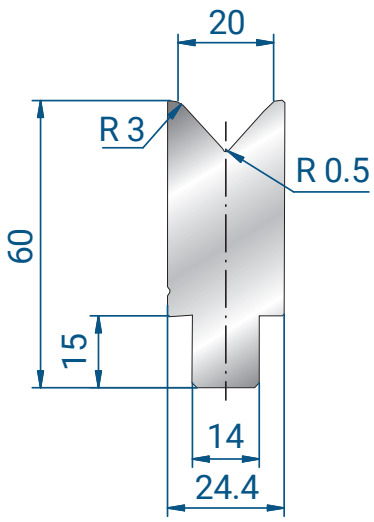

3325 - V20

835 mm	7,8 kg
415 mm	3,9 kg
800 mm FRAZ. / SECT.	7,5 kg


Mat = CrMo Steel
nitrurato e fosfatato/ nitrided and phosphatized
H = 60 mm
Max T/m = 100
α = 86°
R = 3

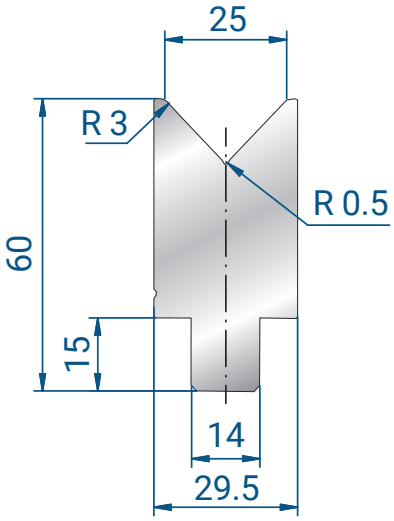

3326 - V25

Mat = CrMo Steel
nitrurato e fosfatato/ nitrided and phosphatized
H = 60 mm
Max T/m = 100
α = 86°
R = 3


835 mm	8,9 kg
415 mm	4,4 kg
800 mm FRAZ. / SECT.	8,6 kg

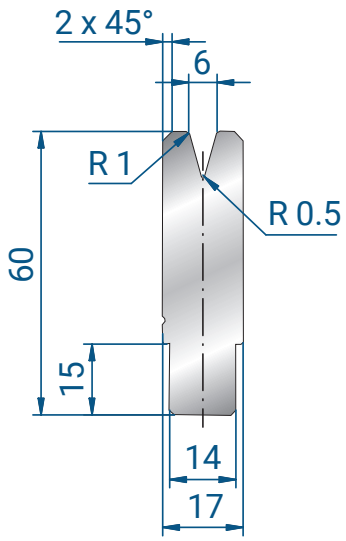

3327 - V6

835 mm	6,1 kg
415 mm	3,0 kg
800 mm FRAZ. / SECT.	5,9 kg


Mat = CrMo Steel
nitrurato e fosfatato/ nitrided and phosphatized
H = 60 mm
Max T/m = 50
α = 30°
R = 1

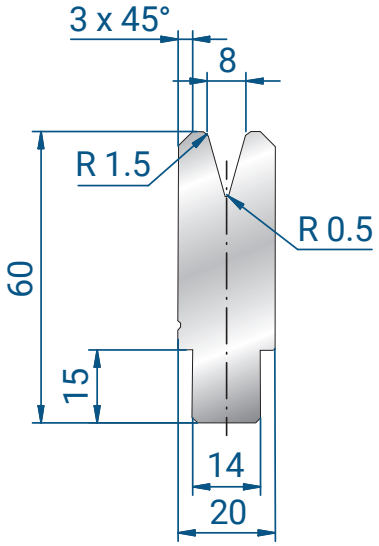

3328 - V8

835 mm	6,8 kg
415 mm	3,4 kg
800 mm FRAZ. / SECT.	6,5 kg


Mat = CrMo Steel
nitrurato e fosfatato/ nitrided and phosphatized
H = 60 mm
Max T/m = 60
α = 30°
R = 1.5

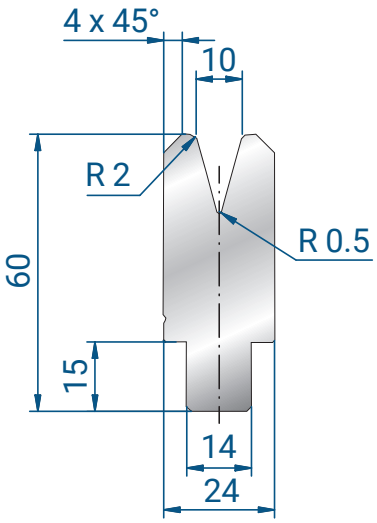

3329 - V10

835 mm	7,7 kg
415 mm	3,8 kg
800 mm FRAZ. / SECT.	7,4 kg

Mat = CrMo Steel
nitrurato e fosfatato/ nitrided and phosphatized
H = 60 mm
Max T/m = 70
α = 30°
R = 2

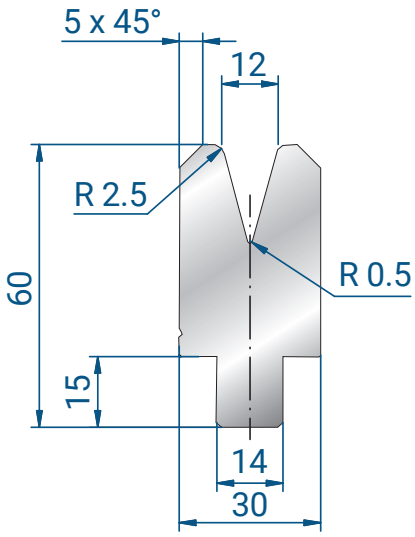

3330 - V12

835 mm	9,1 kg
415 mm	4,5 kg
800 mm FRAZ. / SECT.	8,8 kg

Mat = CrMo Steel
nitrurato e fosfatato/ nitrided and phosphatized
H = 60 mm
Max T/m = 80
α = 30°
R = 2.5

EUROSTAMP TOOLING
the Italian excellence

TRUMPF STYLE

Gli utensili superiori e inferiori elencati in questa sezione possono essere installati sulle piegatrici:

Trumpf, LVD , Darley, Safan e su altre piegatrici equipaggiate con Sistema NSCL.

Questi utensili possono essere installati anche su altre piegatrici tramite adattatori superiori e inferiori.

The upper and lower tooling listed in this section could be installed on the following press brakes:


Trumpf, Darley, Safan, and other press brakes equipped with Wila style clamping system.

These tooling could even be installed on press brakes equipped with different clamping system by choosing the appropriate upper and lower adapters.





VEDI PAG. 111 PER SCHEMA FRAZIONATURA MATRICI
SEE PAGE 111 FOR DIE SEGMENTATION DIAGRAM

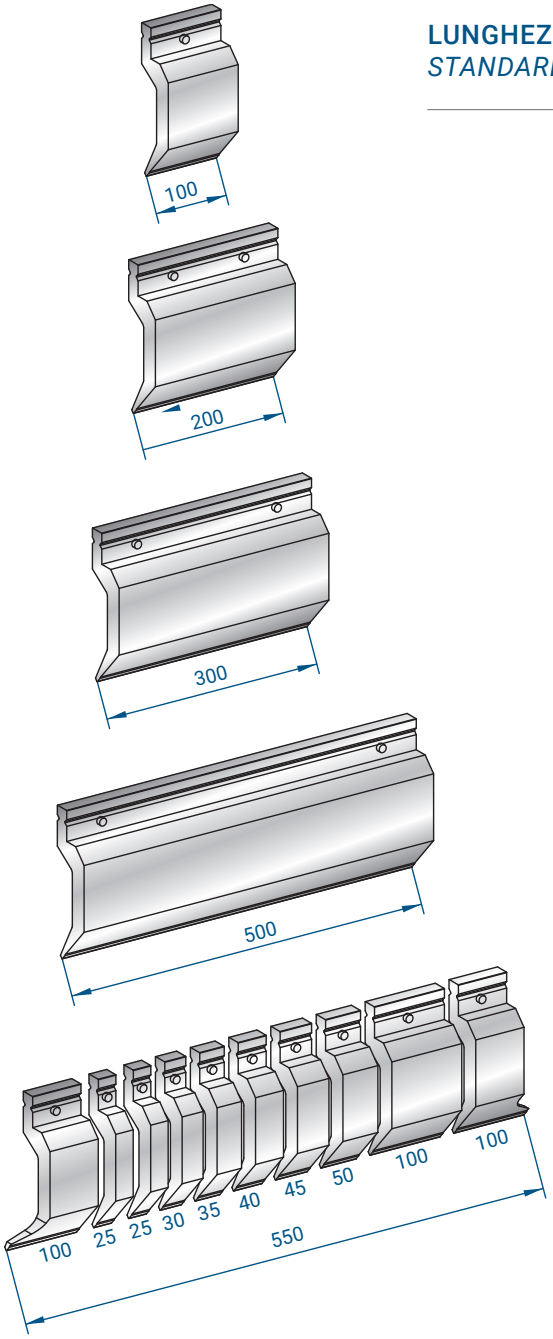



LUNGHEZZE STANDARD
STANDARD LENGTHS




IL PULSANTE DI SICUREZZA VIENE MONTATO STANDARD SU TUTTI GLI UTENSILI CON PESO FINO A 13,5 KG

THE SAFETY BUTTON IS A STANDARD SUPPLY ON ALL TOOLING UP TO 13.5 KG WEIGH

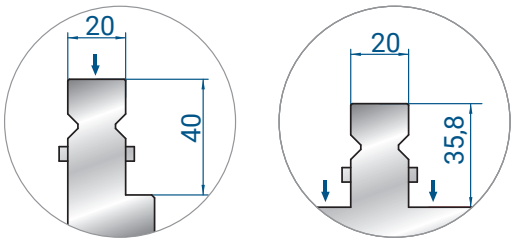

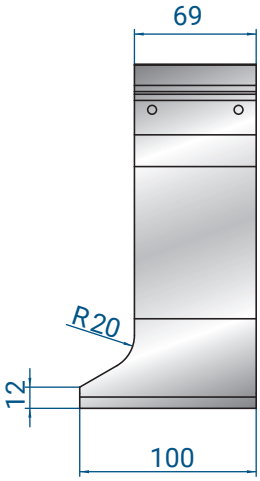


FRESATURA SCARPETTA
MILLED HORN

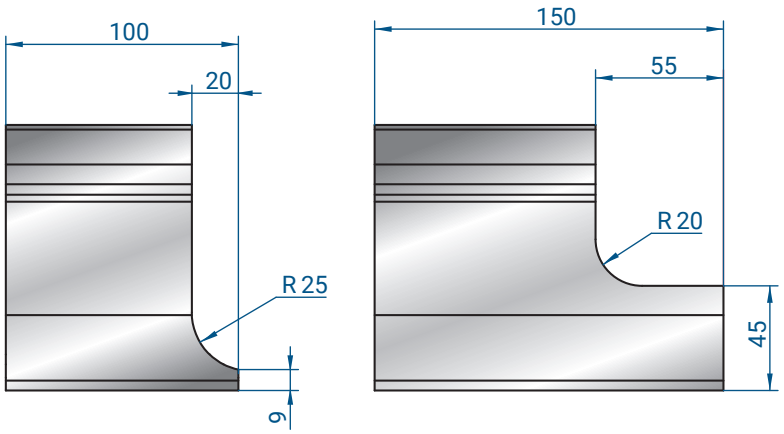

SCARPETTE SPECIALI
SPECIAL HORNS




TAGLI SU RICHIESTA
SPECIAL SEGMENTATION

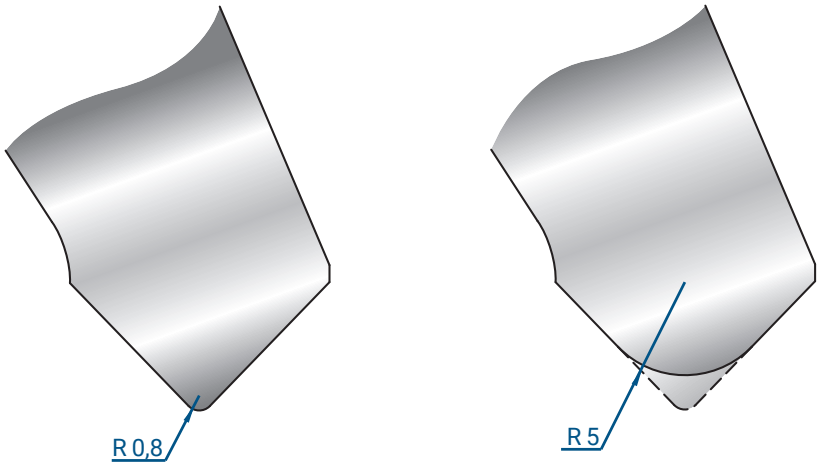

MODIFICA RAGGIO
RADIUS MODIFICATION

FRAZIONATURE PER PUNZONI
SEGMENTATION FOR PUNCHES




1233 - 1234 - 1235 - 1236
1237 - 1238 - 1295
1302 - 1308 - 1313 - 1314
1316 - 1317 - 1318

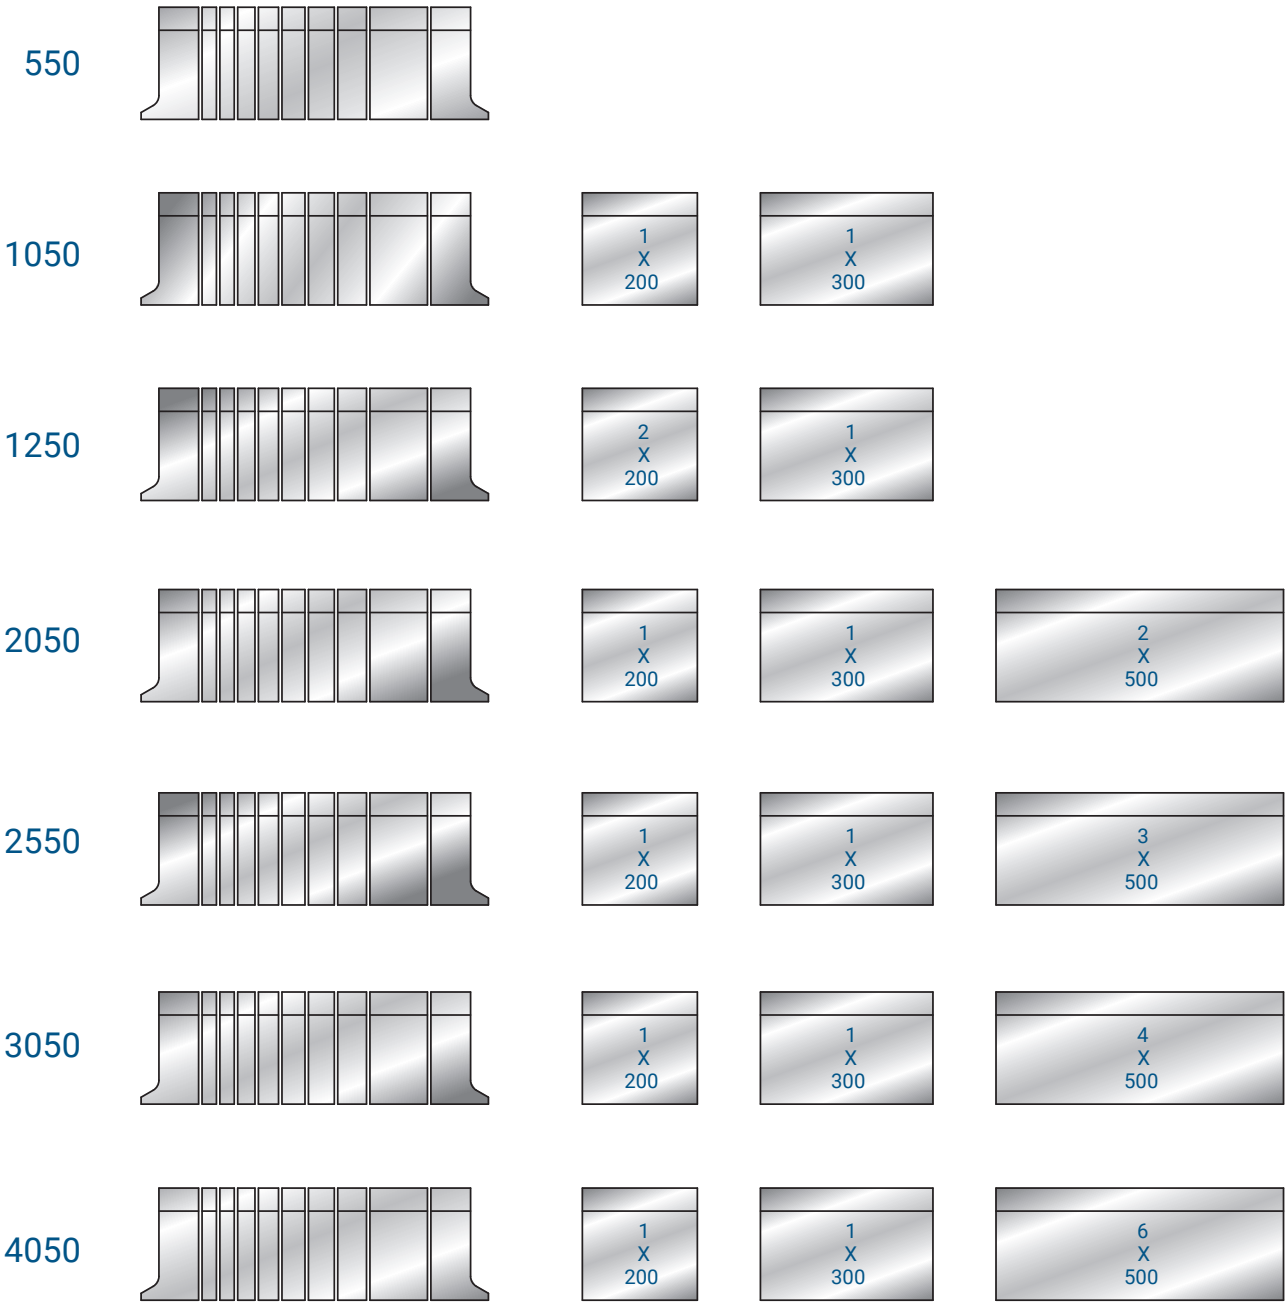

FRAZIONATURE PER MATRICI MODELLO - DA PAGINA 113 A PAGINA 115
SEGMENTATION FOR DIE MODELS - FROM PAGE 113 TO PAGE 115

FRAZIONATURE PER PUNZONI
SEGMENTATION FOR PUNCHES


1294 - 1303 - 1319 - 1320

550			
1050			
1250			
2050			
2550			
3050			
4050			


FRAZIONATURE PER MATRICI MODELLO - DA PAGINA 113 A PAGINA 115
SEGMENTATION FOR DIE MODELS - FROM PAGE 113 TO PAGE 115

FRAZIONATURE PER PUNZONI
SEGMENTATION FOR PUNCHES


1315

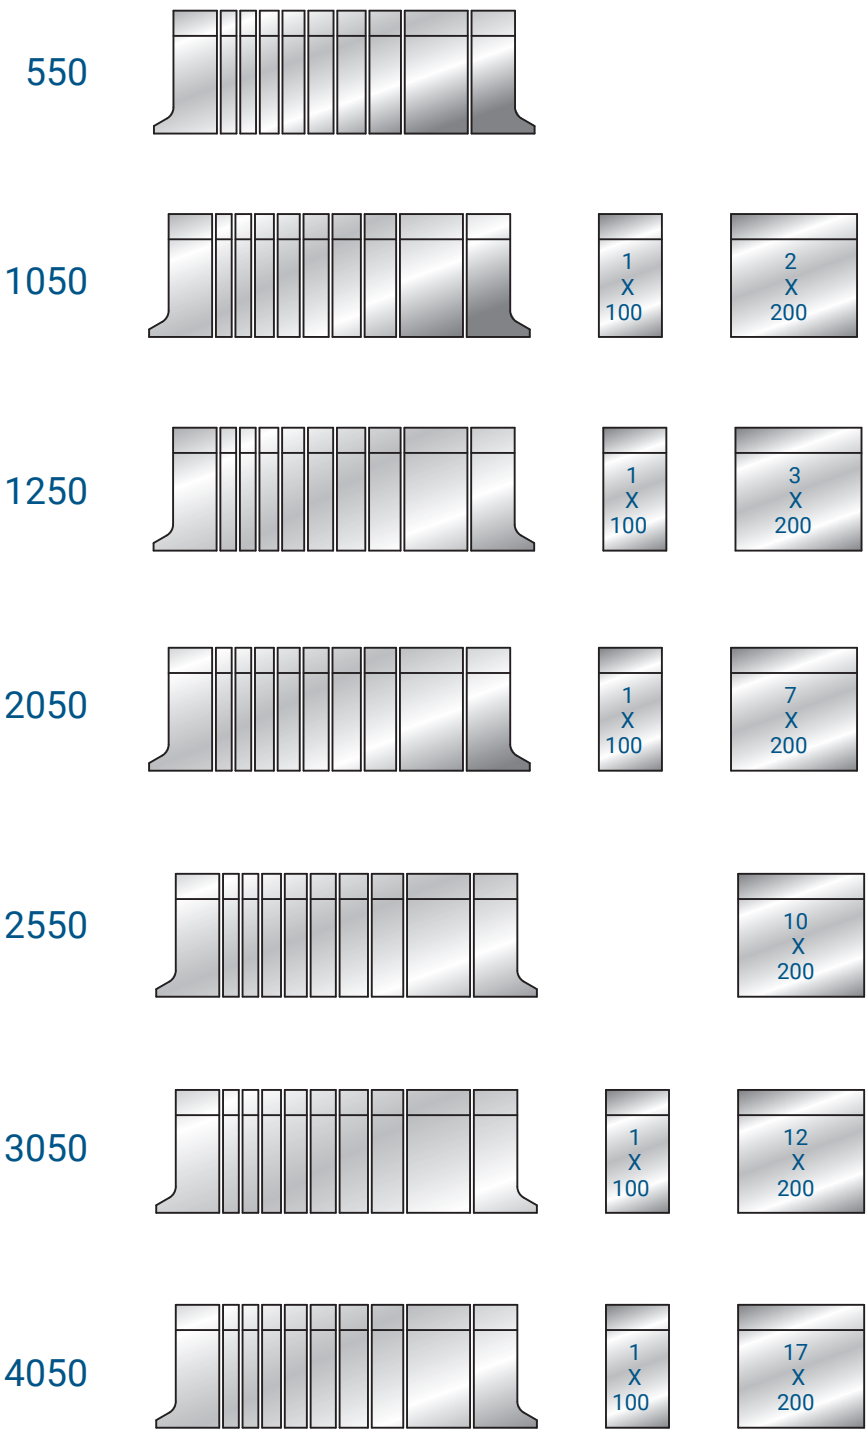

FRAZIONATURE PER MATRICI MODELLO - DA PAGINA 113 A PAGINA 115
SEGMENTATION FOR DIE MODELS - FROM PAGE 113 TO PAGE 115

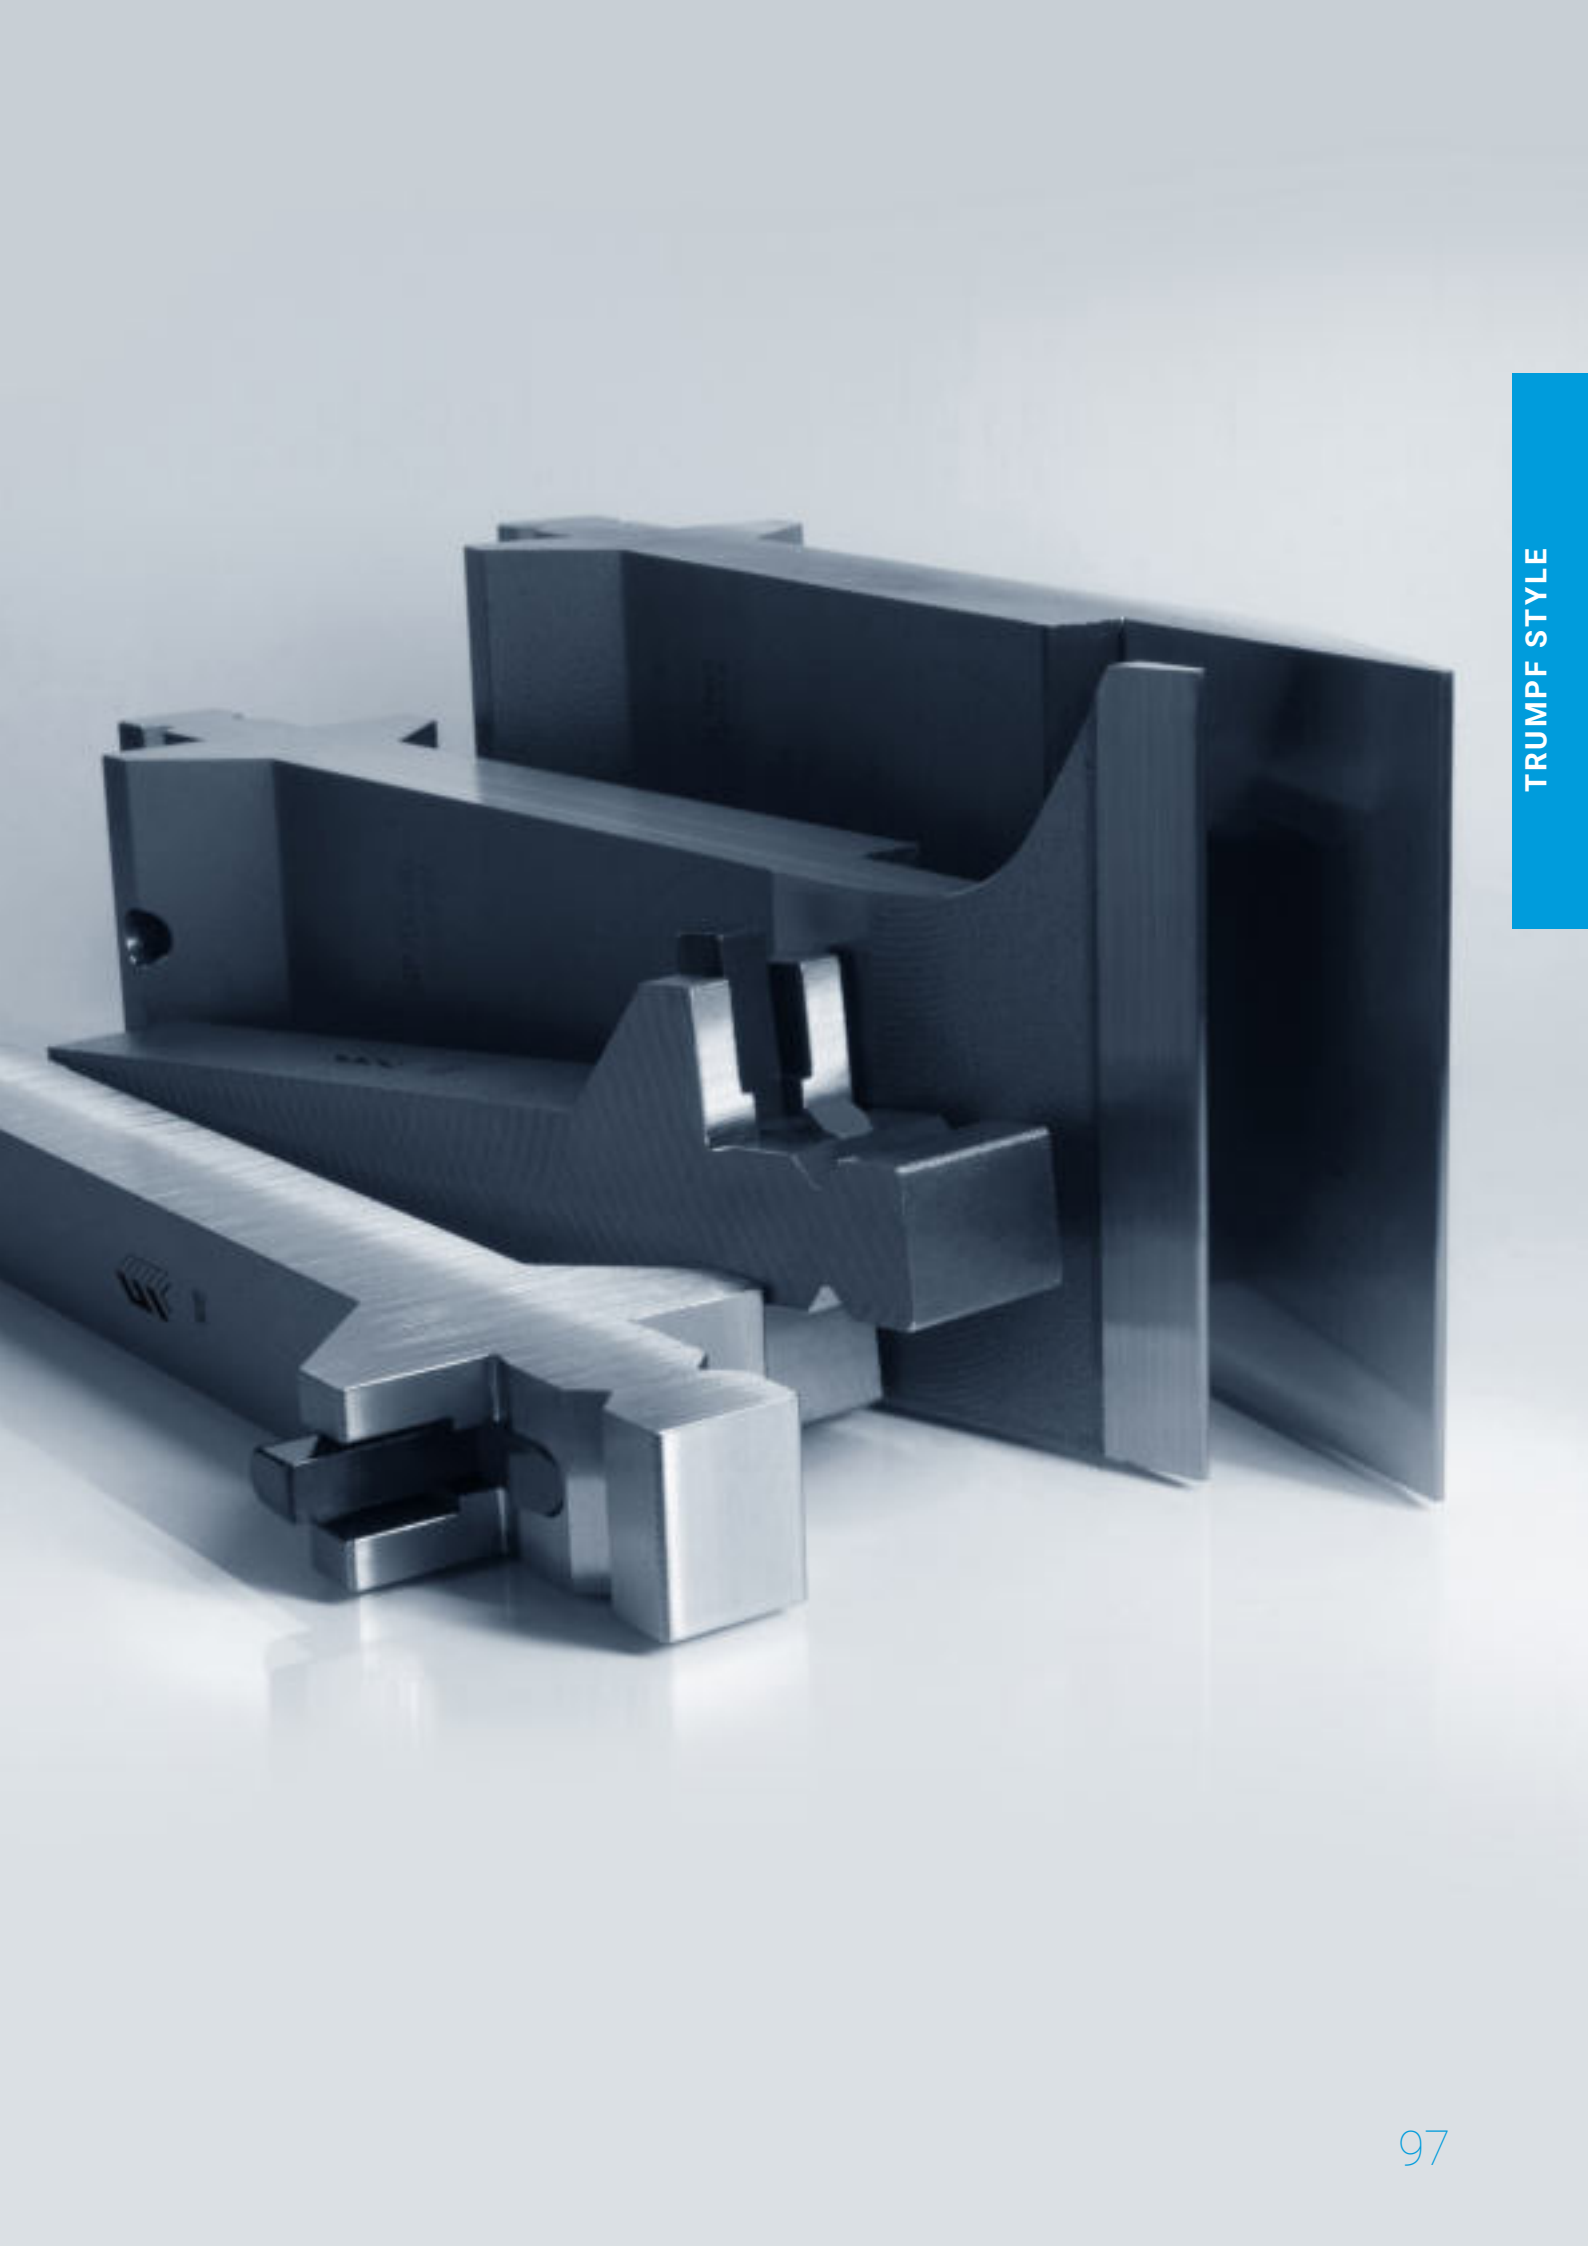

1315

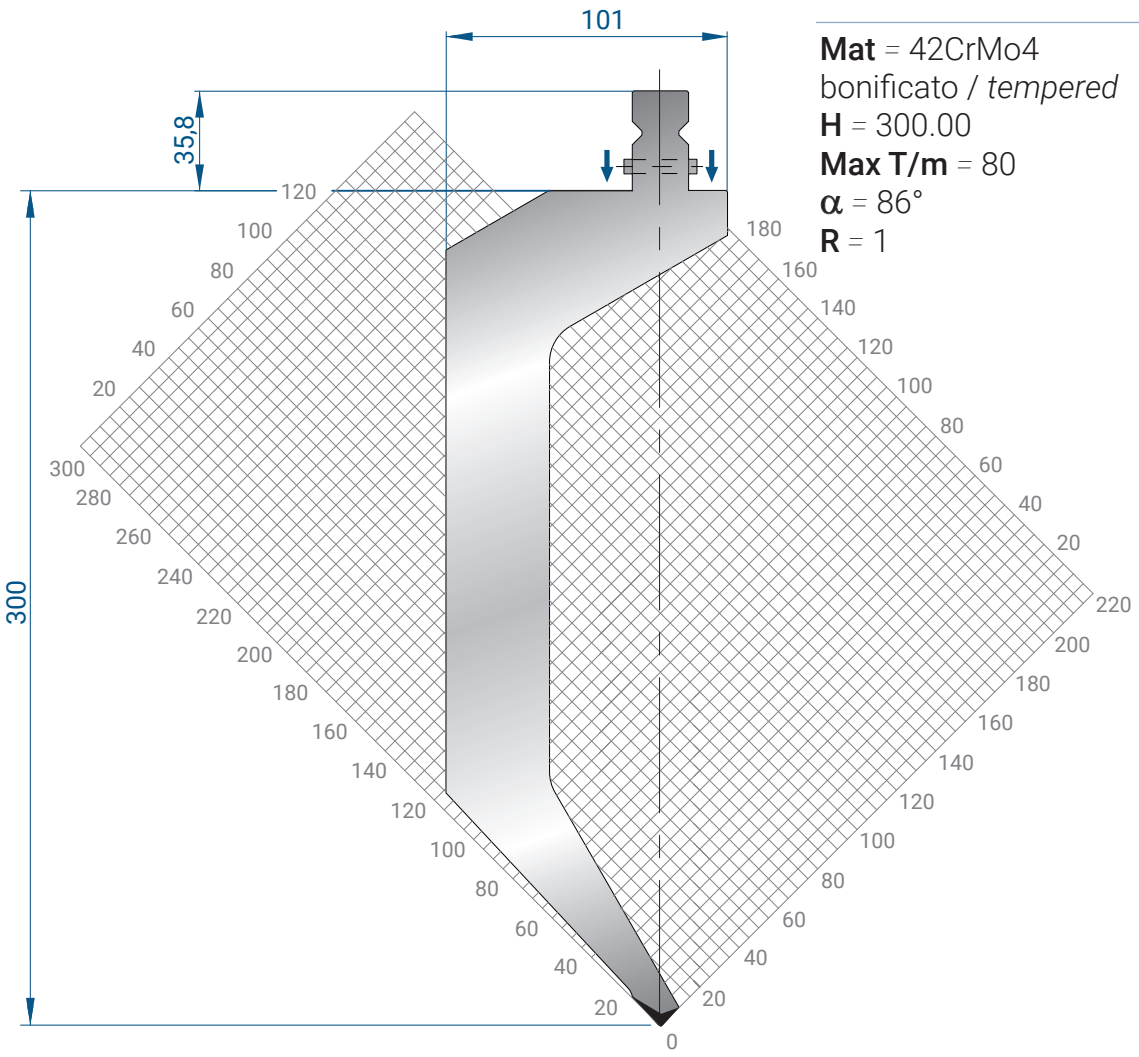


Mat = 42CrMo4 bonificato / *tempered*
H = 300.00
Max T/m = 80
α = 86°
R = 1

200 mm	19,6 kg
100 mm SCARP. /HORN	6,6 kg
550 mm FRAZ. /SECT	48,00kg
100 mm	9,8 kg
50 mm	4,9 kg
45 mm	4,4 kg
40 mm	3,9 kg
35 mm	3,4 kg
30 mm	2,9 kg
25 mm	2,5 kg

SPINTA LATERALE
SHOULDER LOAD


1294

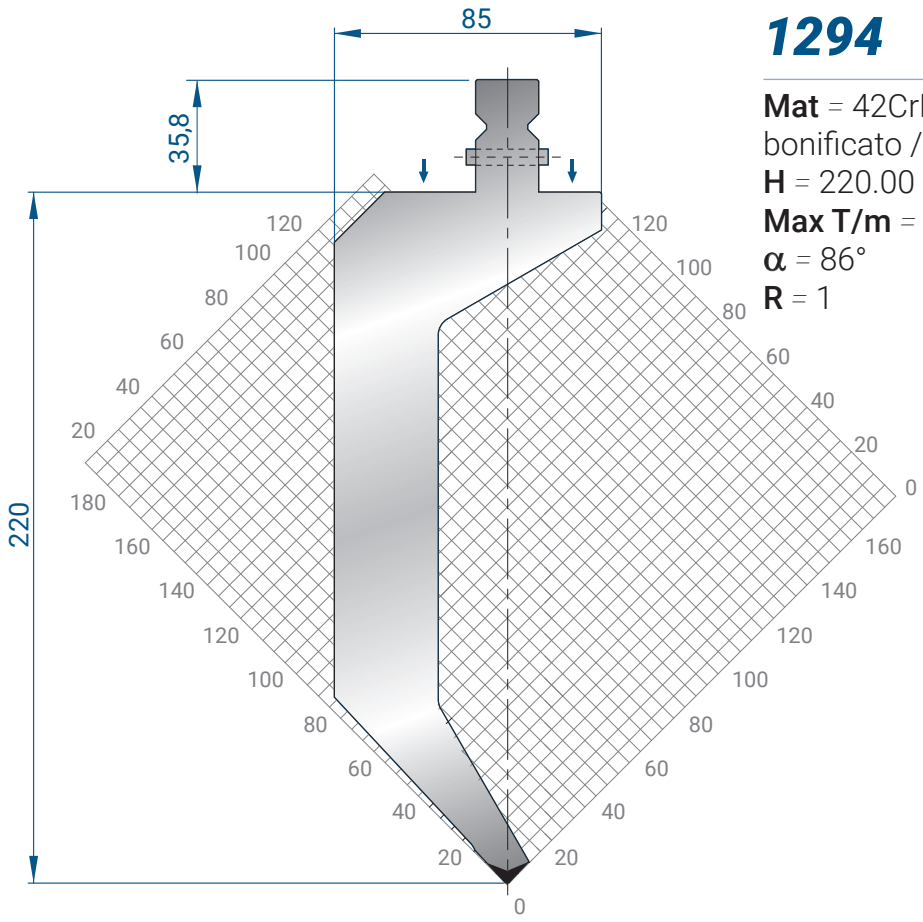

Mat = 42CrMo4 bonificato / *tempered*
H = 220.00
Max T/m = 85
α = 86°
R = 1

500 mm	33,6 kg
300 mm	20,1 kg
200 mm	13,4 kg
100 mm	6,7 kg
500 mm FRAZ. /SECT	29,6 kg
100 mm SCARP. /HORN	4,7 kg
50 mm	3,4 kg
45 mm	3,0 kg
40 mm	2,7 kg
35 mm	2,4 kg
30 mm	2,0 kg
25 mm	1,7 kg

SPINTA LATERALE
SHOULDER LOAD

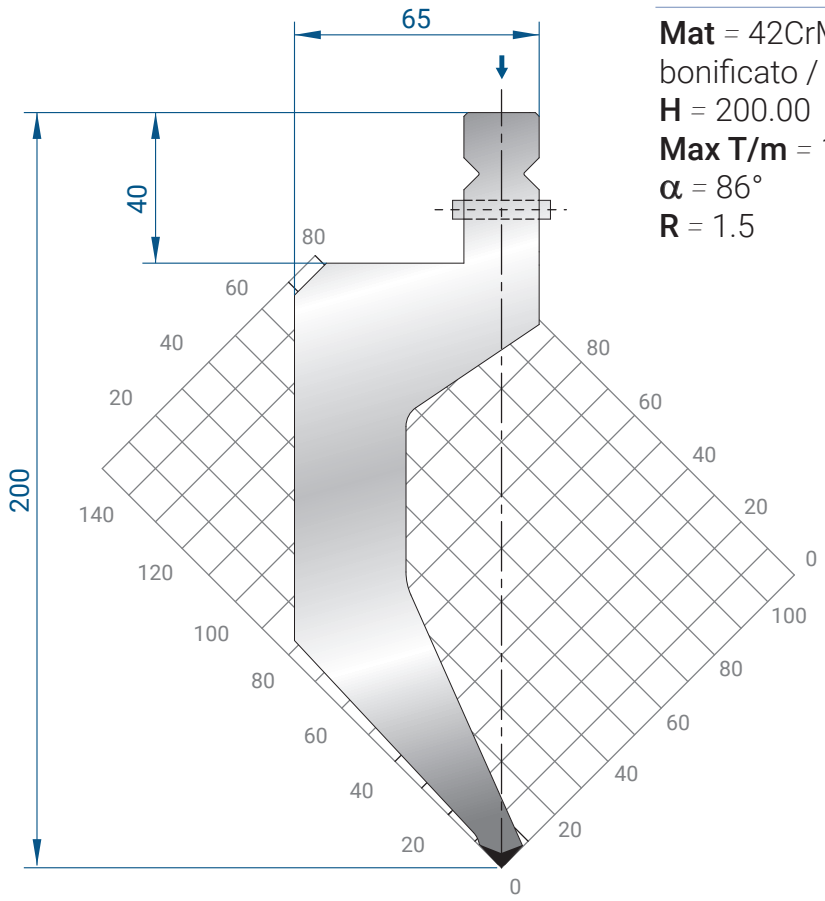


1320

Mat = 42CrMo4
bonificato / *tempered*
H = 200.00
Max T/m = 100
α = 86°
R = 1.5

500 mm	23,6 kg
300 mm	14,1 kg
200 mm	9,4 kg
100 mm	4,7 kg
550 mm FRAZ. /SECT.	23,2 kg
100 mm SCARP. /HORN	3,3 kg
50 mm	2,4 kg
45 mm	2,1 kg
40 mm	1,9 kg
35 mm	1,7 kg
30 mm	1,4 kg
25 mm	1,2 kg

SPINTA IN TESTA
HEAD LOAD

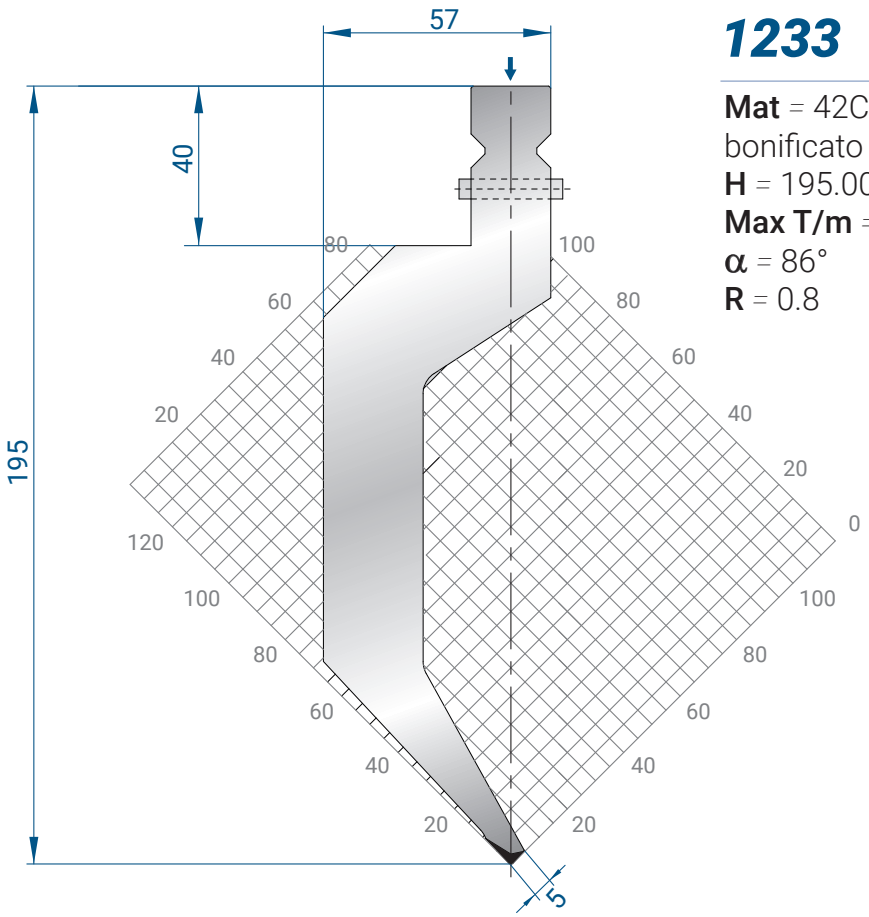


1233

Mat = 42CrMo4
bonificato / *tempered*
H = 195.00
Max T/m = 40
α = 86°
R = 0.8

500 mm	18,4 kg
300 mm	11,0 kg
200 mm	7,4 kg
100 mm	3,7 kg
550 mm FRAZ. /SECT	18,1 kg
100 mm SCARP. /HORN	2,6 kg
50 mm	1,8 kg
45 mm	1,7 kg
40 mm	1,5 kg
35 mm	1,3 kg
30 mm	1,1 kg
25 mm	0,9 kg

SPINTA IN TESTA
HEAD LOAD

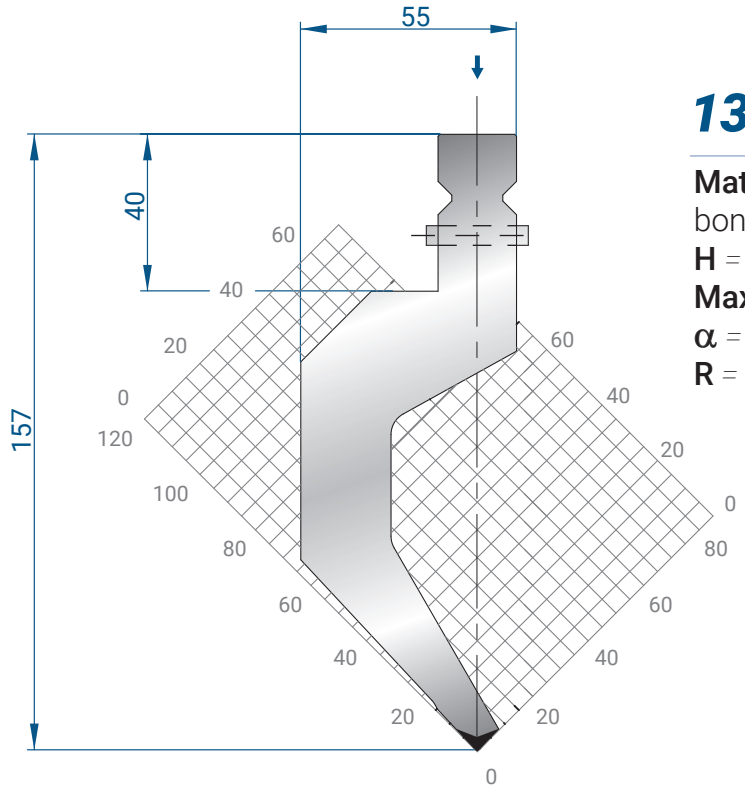


1314

Mat = 42CrMo4 bonificato / *tempered*
H = 157.00
Max T/m = 80
α = 86°
R = 1

500 mm	14,6 kg
300 mm	8,8 kg
200 mm	5,9 kg
100 mm	2,9 kg
550 mm FRAZ. / SECT.	13,0 kg
100 mm SCARP. /HORN	2,1 kg
50 mm	1,5 kg
45 mm	1,3 kg
40 mm	1,2 kg
35 mm	1,0 kg
30 mm	0,9 kg
25 mm	0,7 kg

SPINTA IN TESTA
HEAD LOAD

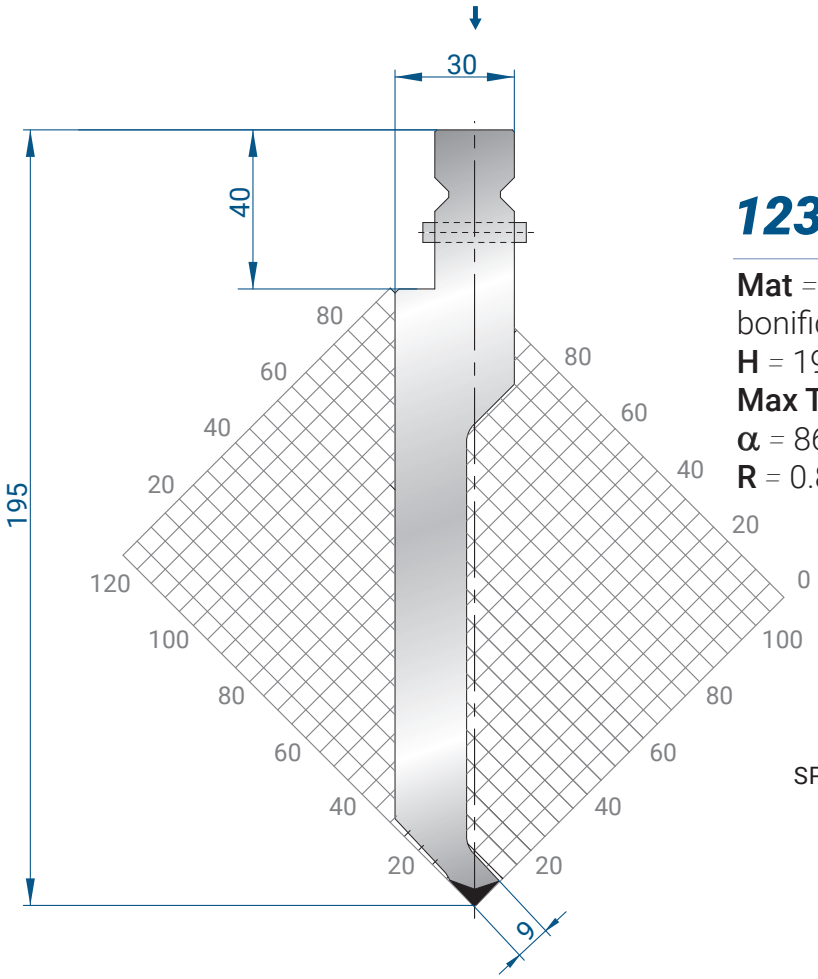


1235

Mat = 42CrMo4 bonificato / *tempered*
H = 195.00
Max T/m = 100
α = 86°
R = 0.8

500 mm	14,8 kg
300 mm	8,9 kg
200 mm	5,9 kg
100 mm	3,0 kg
550 mm FRAZ. /SECT.	14,5 kg
100 mm SCARP./ HORN	2,1 kg
50 mm	1,5 kg
45 mm	1,3 kg
40 mm	1,2 kg
35 mm	1,0 kg
30 mm	0,9 kg
25 mm	0,7 kg

SPINTA IN TESTA
HEAD LOAD

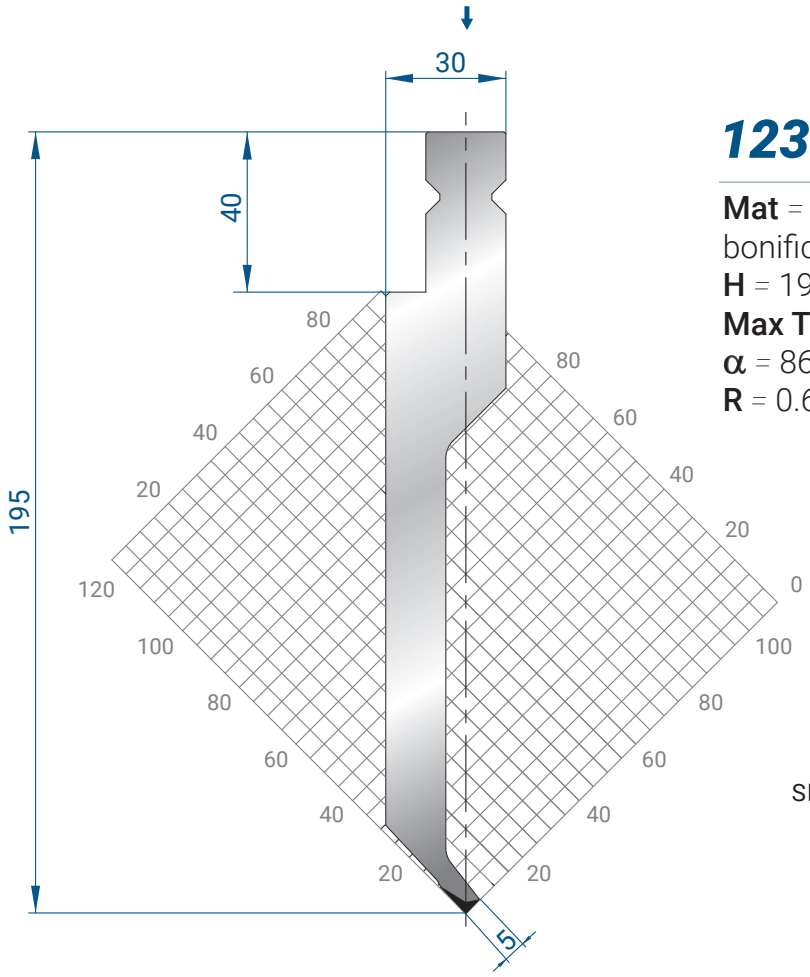


1234

Mat = 42CrMo4
bonificato / *tempered*
H = 195.00
Max T/m = 30
α = 86°
R = 0.6

500 mm	13,3 kg
300 mm	8,0 kg
200 mm	5,3 kg
100 mm	2,7 kg
550 mm FRAZ. /SECT	13,1 kg
100 mm SCARP./ HORN	1,9 kg
50 mm	1,3 kg
45 mm	1,2 kg
40 mm	1,1 kg
35 mm	0,9 kg
30 mm	0,8 kg
25 mm	0,7 kg

SPINTA IN TESTA
HEAD LOAD

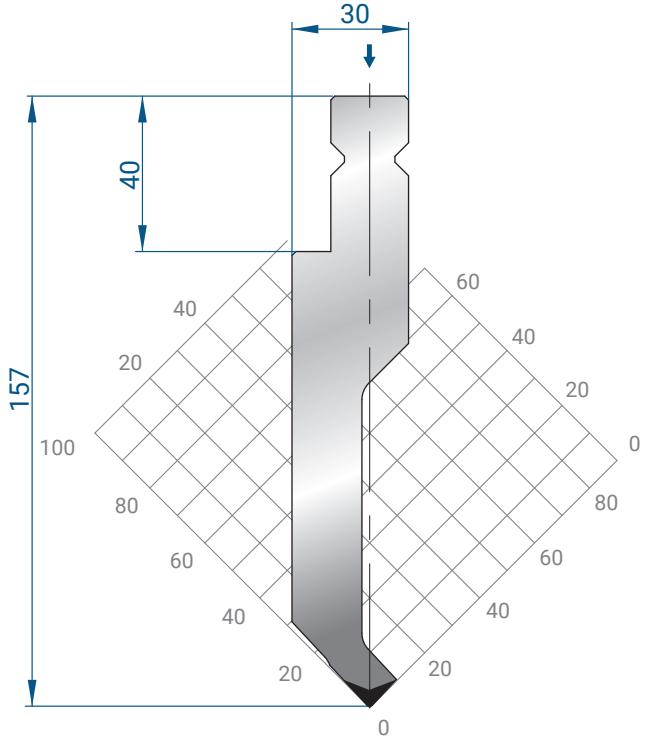


1317

Mat = 42CrMo4
bonificato / *tempered*
H = 157.00
Max T/m = 100
α = 86°
R = 1

500 mm	12,1 kg
300 mm	7,3 kg
200 mm	4,8 kg
100 mm	2,4 kg
550 mm FRAZ. /SECT.	11,9 kg
100 mm SCARP. /HORN	1,8 kg
50 mm	1,2 kg
45 mm	1,1 kg
40 mm	1,0 kg
35 mm	0,8 kg
30 mm	0,7 kg
25 mm	0,6 kg

SPINTA IN TESTA
HEAD LOAD

PUNZONI - 80° / PUNCHES - 80°

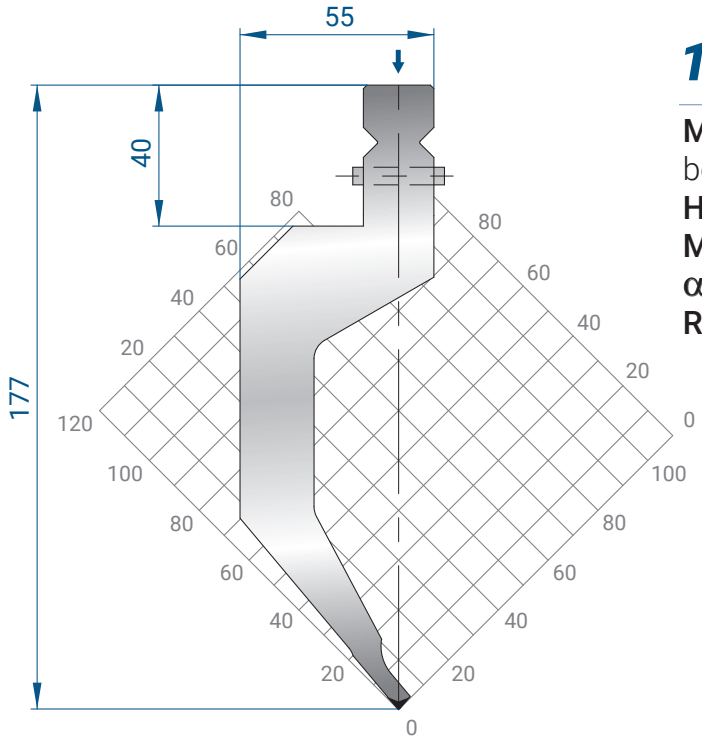


1319

Mat = 42CrMo4
bonificato / *tempered*
H = 177.00
Max T/m = 40
α = 80°
R = 0.5

500 mm	15,4 kg
300 mm	9,2 kg
200 mm	6,2 kg
100 mm	3,1 kg
550 mm FRAZ. /SECT.	15,1 kg
100 mm SCARP. /HORN	2,2 kg
50 mm	1,5 kg
45 mm	1,4 kg
40 mm	1,2 kg
35 mm	1,1 kg
30 mm	0,9 kg
25 mm	0,8 kg

SPINTA IN TESTA
HEAD LOAD

PUNZONI - 60° / PUNCHES - 60°

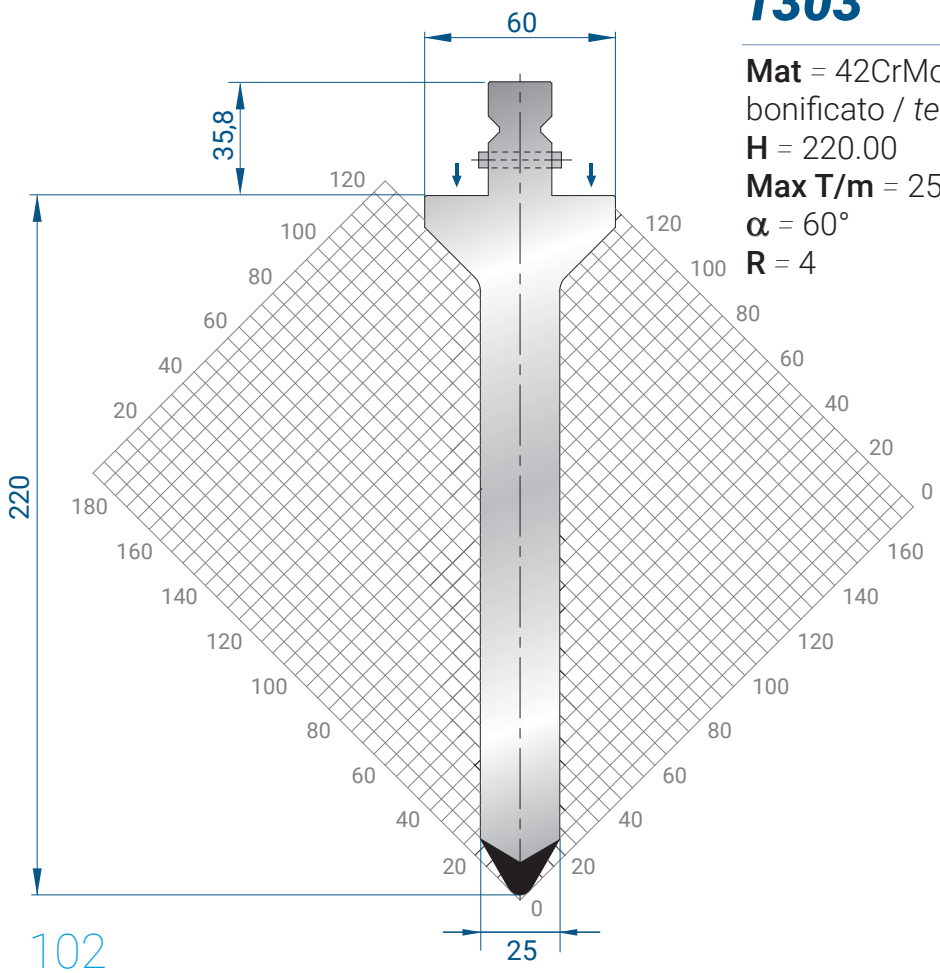


1303

Mat = 42CrMo4
bonificato / *tempered*
H = 220.00
Max T/m = 250
α = 60°
R = 4

500 mm	26,1 kg
300 mm	15,6 kg
200 mm	10,4 kg
100 mm	5,2 kg
550 mm FRAZ. /SECT	25,6 kg
100 mm SCARP. /HORN	3,7 kg
50 mm	2,6 kg
45 mm	2,3 kg
40 mm	2,1 kg
35 mm	1,8 kg
30 mm	1,6 kg
25 mm	1,3 kg

SPINTA LATERALE
SHOULDER LOAD

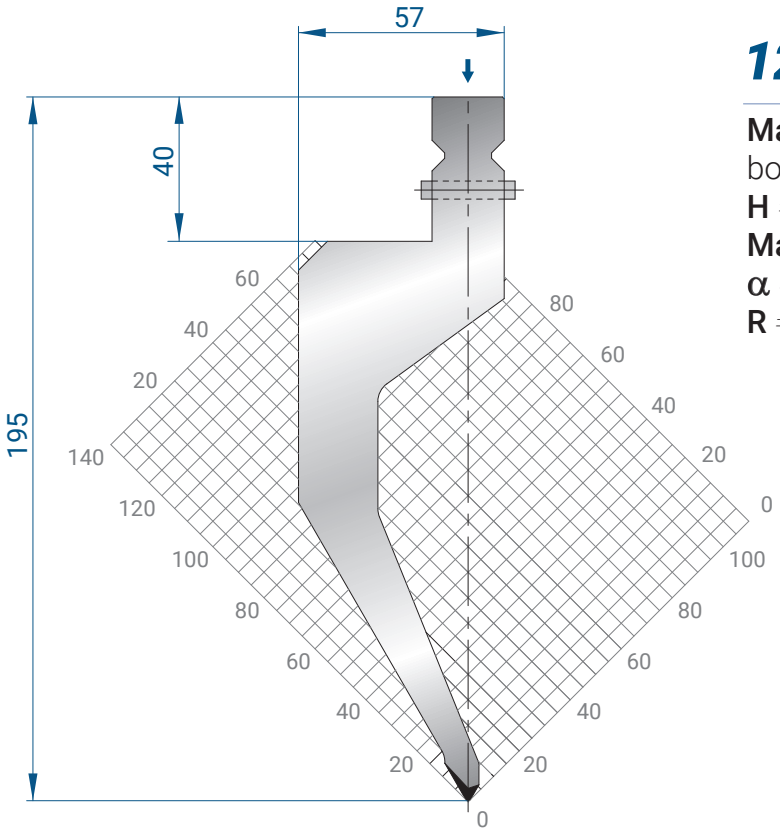


1236

Mat = 42CrMo4
bonificato / *tempered*
H = 195.00
Max T/m = 40
α = 60°
R = 0.8

500 mm	17,4 kg
300 mm	10,4 kg
200 mm	7,0 kg
100 mm	3,5 kg
550 mm FRAZ. /SECT	17,1 kg
100 mm SCARP. /HORN	2,4 kg
50 mm	1,7 kg
45 mm	1,6 kg
40 mm	1,4 kg
35 mm	1,2 kg
30 mm	1,0 kg
25 mm	0,9kg

SPINTA IN TESTA
HEAD LOAD

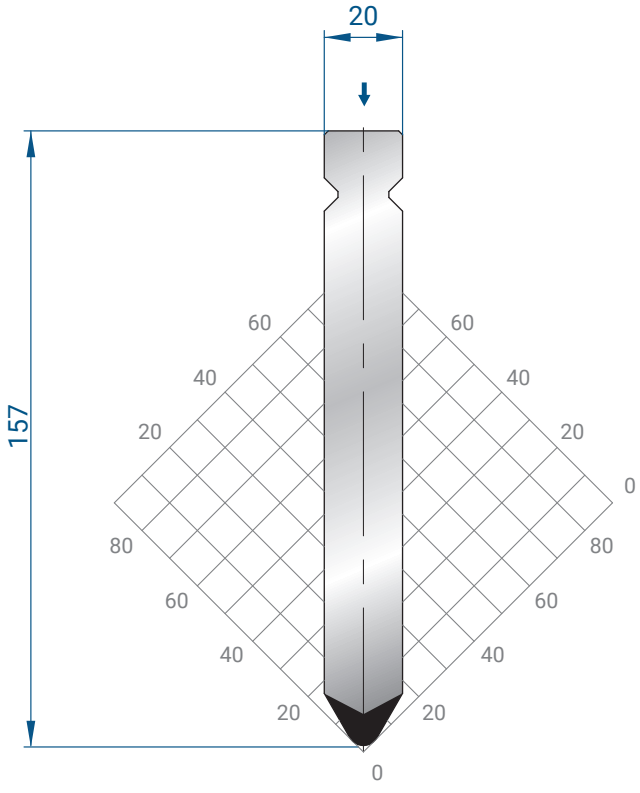


1318

Mat = 42CrMo4
bonificato / *tempered*
H = 157.00
Max T/m = 180
α = 60°
R = 4

500 mm	11,8 kg
300 mm	7,0 kg
200 mm	4,7 kg
100 mm	2,4 kg
550 mm FRAZ. /SECT	11,6 kg
100 mm SCARP. /HORN	1,7 kg
50 mm	1,2 kg
45 mm	1,1 kg
40 mm	0,9 kg
35 mm	0,8 kg
30 mm	0,7 kg
25 mm	0,6 kg

SPINTA IN TESTA
HEAD LOAD

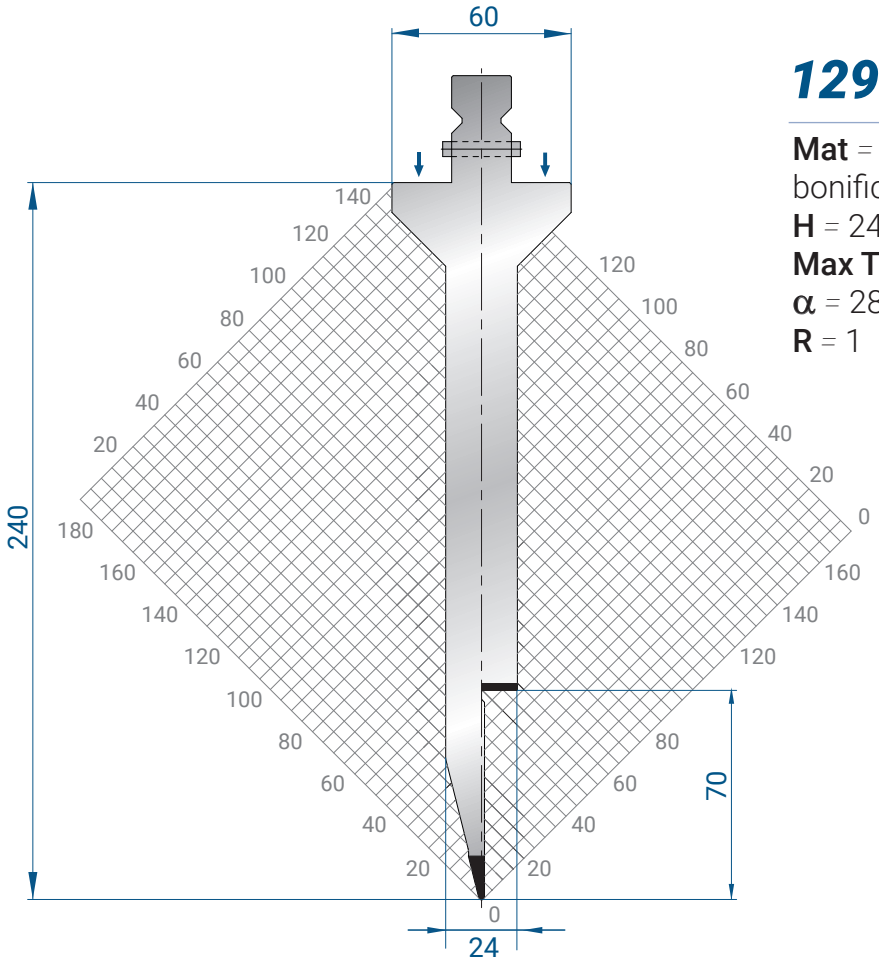


1295

Mat = 42CrMo4
bonificato / *tempered*
H = 240.00
Max T/m = 40
α = 28°
R = 1

500 mm	23,8 kg
300 mm	14,3 kg
200 mm	9,5 kg
100 mm	4,8 kg
550 mm FRAZ. /SECT	23,3 kg
100 mm SCARP. /HORN	3,3 kg
50 mm	2,4 kg
45 mm	2,1 kg
40 mm	1,9 kg
35 mm	1,7 kg
30 mm	1,4 kg
25 mm	1,2 kg

(↓)
SPINTA LATERALE
SHOULDER LOAD

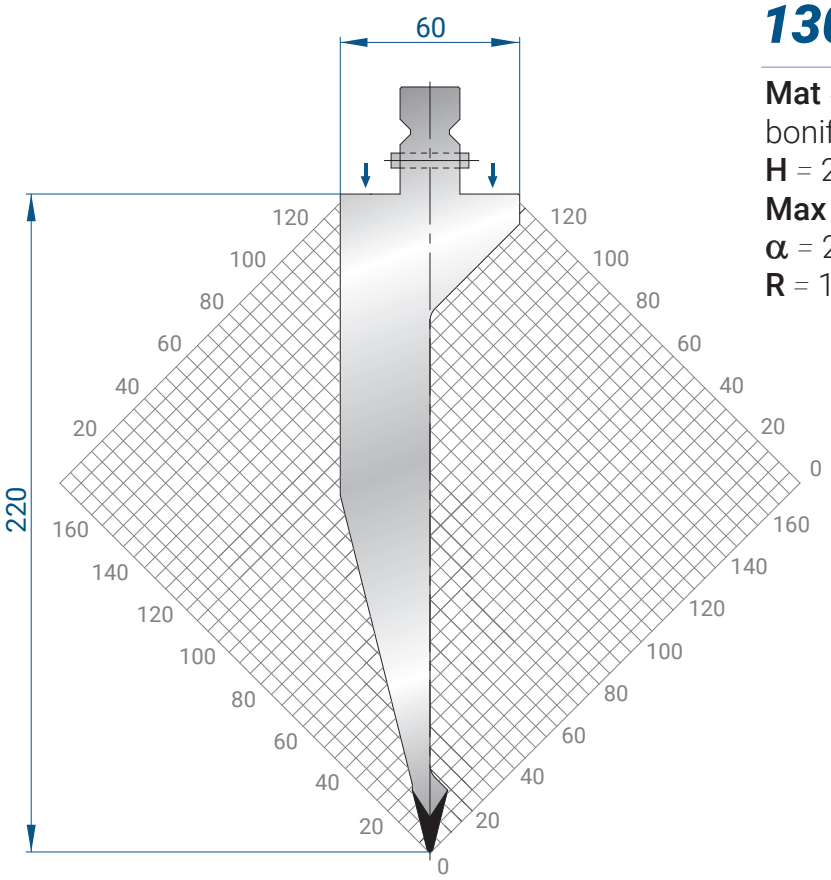


1302

Mat = 42CrMo4
bonificato / *tempered*
H = 220.00
Max T/m = 80
α = 28°
R = 1

500 mm	24,9 kg
300 mm	14,9 kg
200 mm	10,0 kg
100 mm	5,0 kg
550 mm FRAZ. /SECT.	24,4 kg
100 mm SCARP. /HORN	3,5 kg
50 mm	2,5 kg
45 mm	2,2 kg
40 mm	2,0 kg
35 mm	1,7 kg
30 mm	1,5 kg
25 mm	1,3 kg

(↓)
SPINTA LATERALE
SHOULDER LOAD

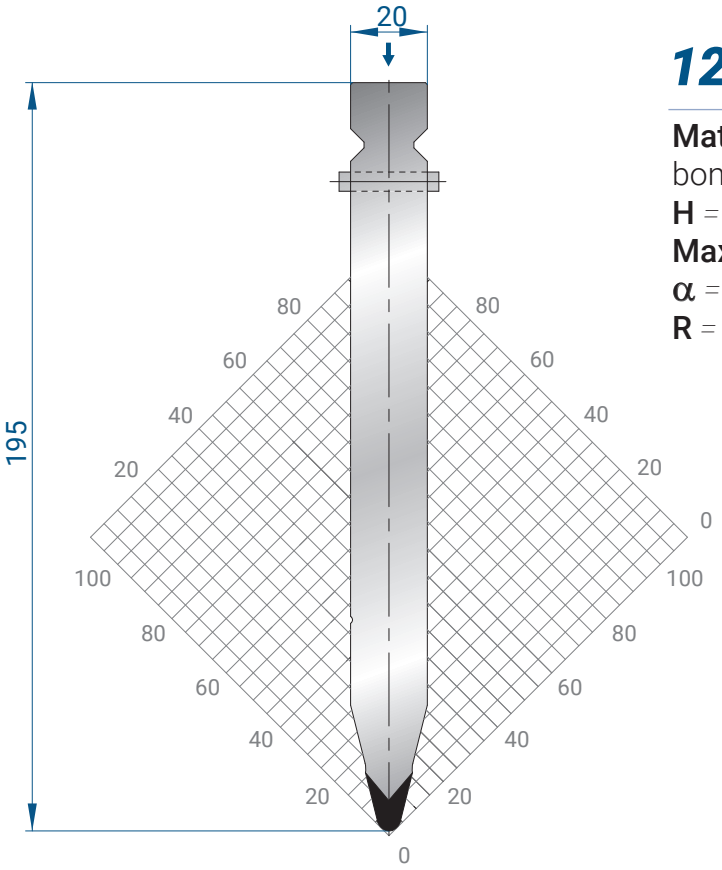


1237

Mat = 42CrMo4
bonificato / *tempered*
H = 195.00
Max T/m = 160
α = 28°
R = 3

500 mm	14,1 kg
300 mm	8,5 kg
200 mm	5,7 kg
100 mm	2,8 kg
500 mm FRAZ. /SECT.	13,9 kg
100 mm SCARP. /HORN	2,0 kg
50 mm	1,4 kg
45 mm	1,3 kg
40 mm	1,1 kg
35 mm	1,0 kg
30 mm	0,8 kg
25 mm	0,7 kg

SPINTA IN TESTA
HEAD LOAD

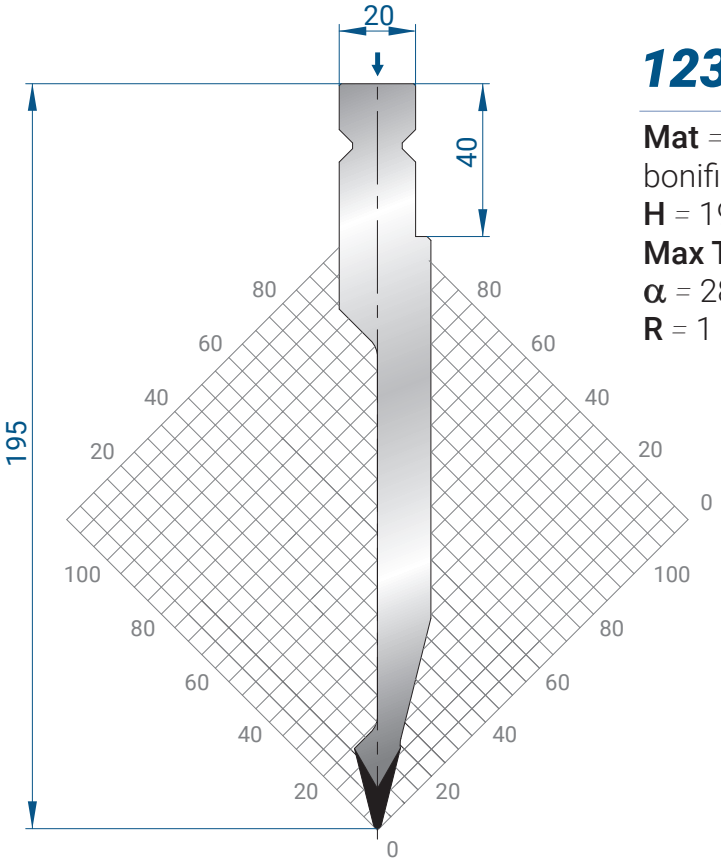


1238

Mat = 42CrMo4
bonificato / *tempered*
H = 195.00
Max T/m = 80
α = 28°
R = 1

500 mm	11,4 kg
300 mm	6,8 kg
200 mm	4,5 kg
100 mm	2,3 kg
550 mm FRAZ. /SECT.	11,1 kg
100 mm SCARP. /HORN	1,6 kg
50 mm	1,1 kg
45 mm	1,0 kg
40 mm	0,9 kg
35 mm	0,8 kg
30 mm	0,7 kg
25 mm	0,6 kg

SPINTA IN TESTA
HEAD LOAD

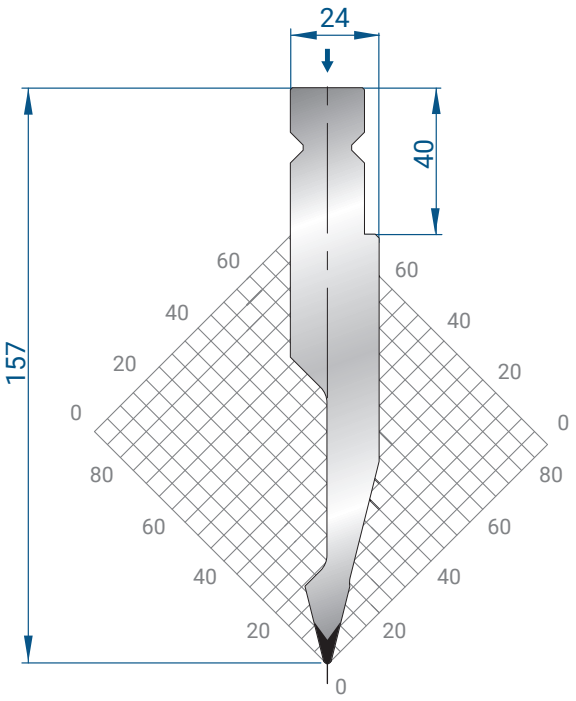


1313

Mat = 42CrMo4
bonificato / *tempered*
H = 157.00
Max T/m = 80
α = 28°
R = 1

500 mm	9,8 kg
300 mm	5,9 kg
200 mm	3,9 kg
100 mm	2,0 kg
550 mm FRAZ. /SECT.	9,7 kg
100 mm SCARP. /HORN	1,4 kg
50 mm	1,0 kg
45 mm	0,9 kg
40 mm	0,8 kg
35 mm	0,7 kg
30 mm	0,6 kg
25mm	0,5 kg

SPINTA IN TESTA
HEAD LOAD

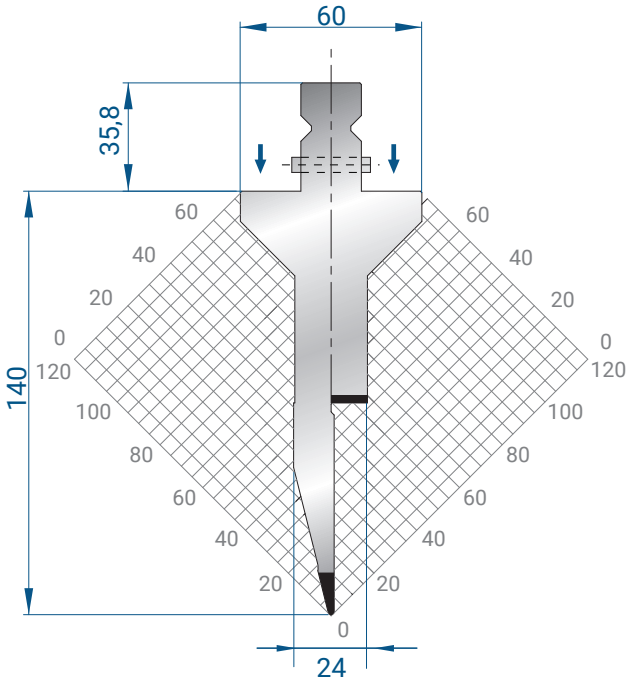


1308

Mat = 42CrMo4
bonificato / *tempered*
H = 140.00
Max T/m = 40
α = 28°
R = 1

500 mm	14,4 kg
300 mm	8,7 kg
200 mm	5,8 kg
100 mm	2,9 kg
550 mm FRAZ. /SECT.	14,1 kg
100 mm SCARP. /HORN	2,0 kg
50 mm	1,4 kg
45 mm	1,3 kg
40 mm	1,2 kg
35 mm	1,0 kg
30 mm	0,9 kg
25 mm	0,7 kg

SPINTA LATERALE
SHOULDER LOAD

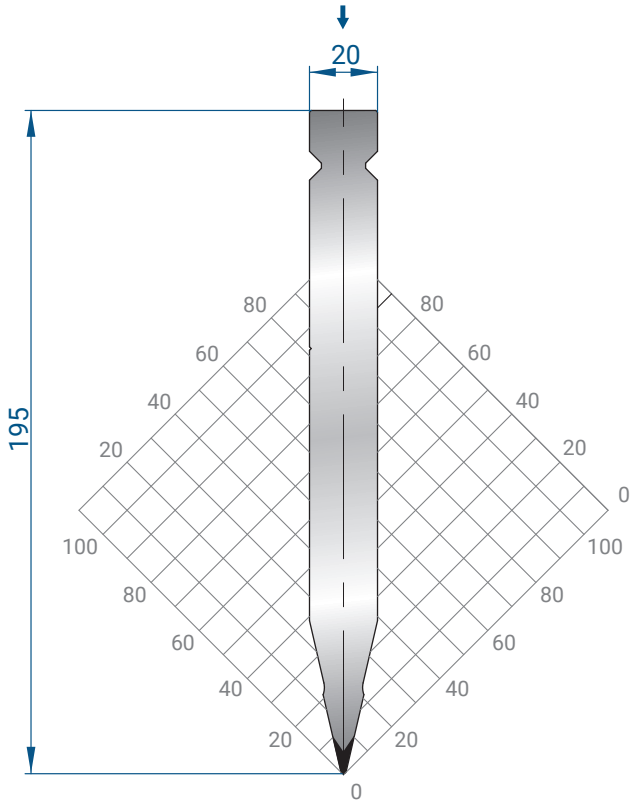


1316

Mat = 42CrMo4
bonificato / *tempered*
H = 195.00
Max T/m = 100
α = 26°
R = 0.8

500 mm	13,5 kg
300 mm	8,1 kg
200 mm	5,4 kg
100 mm	2,7 kg
550 mm FRAZ. /SECT.	13,2 kg
100 mm SCARP. /HORN	1,9 kg
50 mm	1,4 kg
45 mm	1,2 kg
40 mm	1,1 kg
35 mm	0,9 kg
30 mm	0,8 kg
25 mm	0,7 kg


SPINTA IN TESTA
HEAD LOAD

TRUMPF STYLE

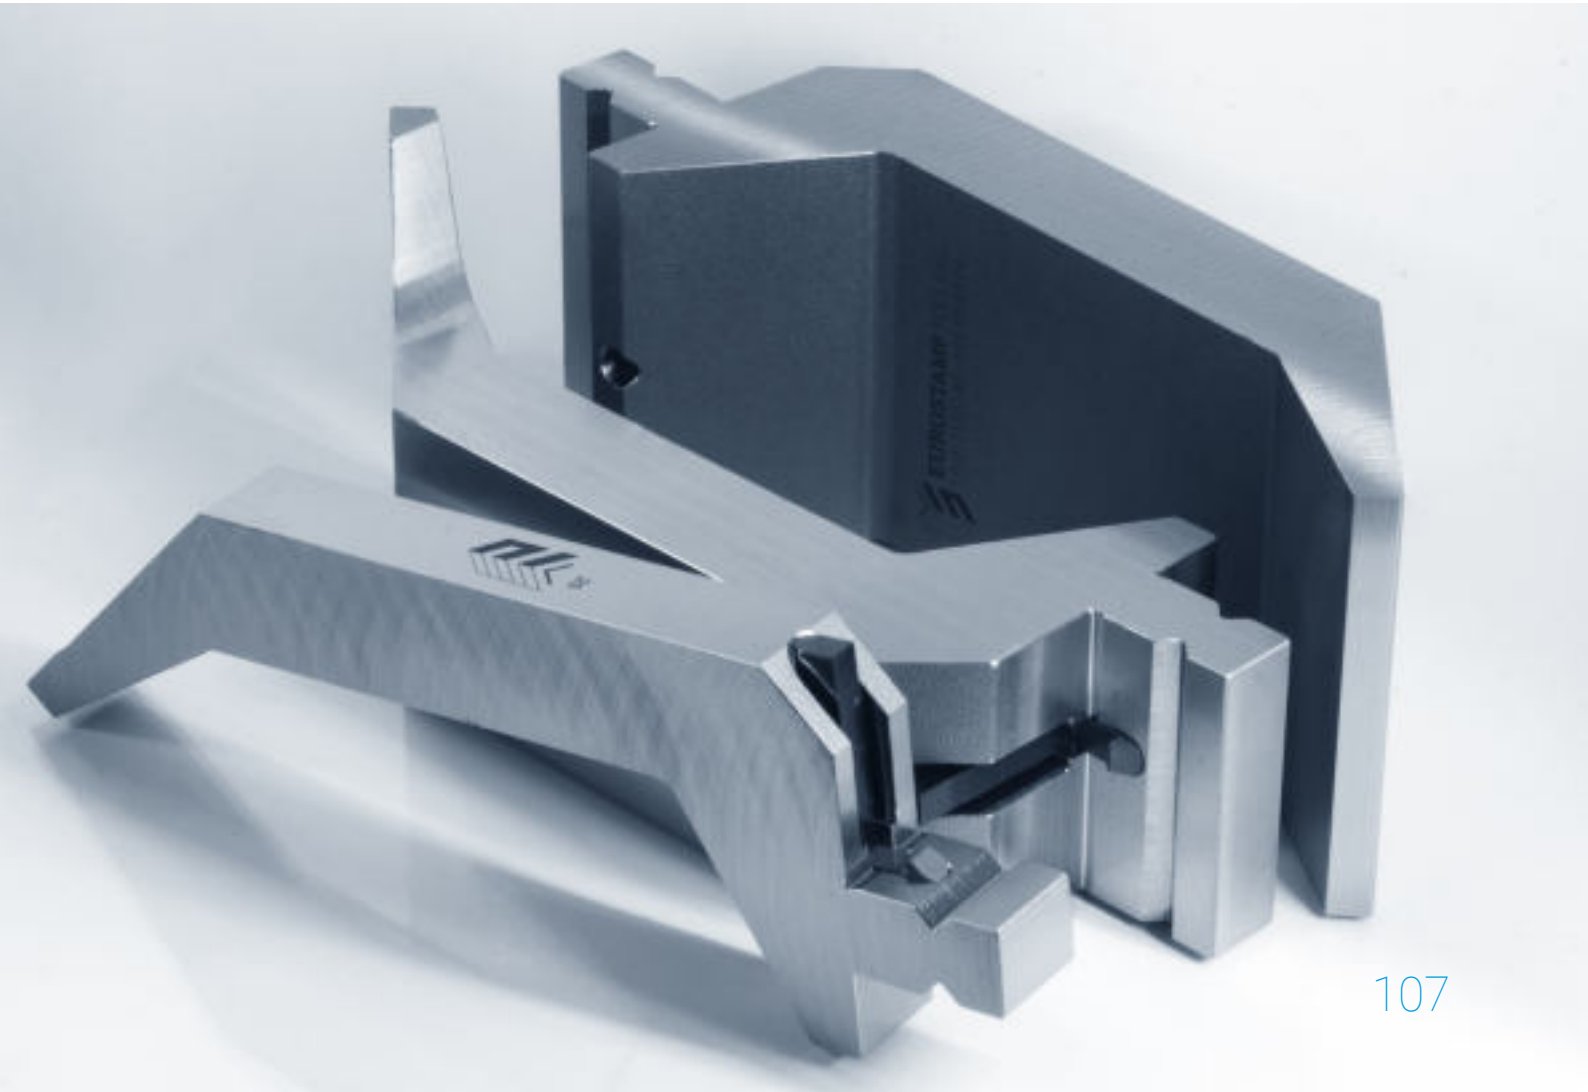


8210

FRESATURA PULSANTE
MILLING FOR SAFETY BUTTON




8211

CODICI / *CODES*
1237-1240-1316-1318




8218

CODICI / *CODES*
1238-1249-1250-1251-1313



8212


CODICI / *CODES*
1234-1235-1317-4191



8213


CODICI / *CODES*
1295-1302-1303-1308-4361






8214

CODICI / *CODES*
1233-1314-1319




8216

CODICI / *CODES*
1294-1320



8215


CODICI / *CODES*
1236

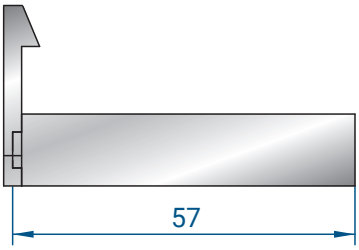

8219


CODICI / *CODES*
1315



EUROSTAMP TOOLING
1313

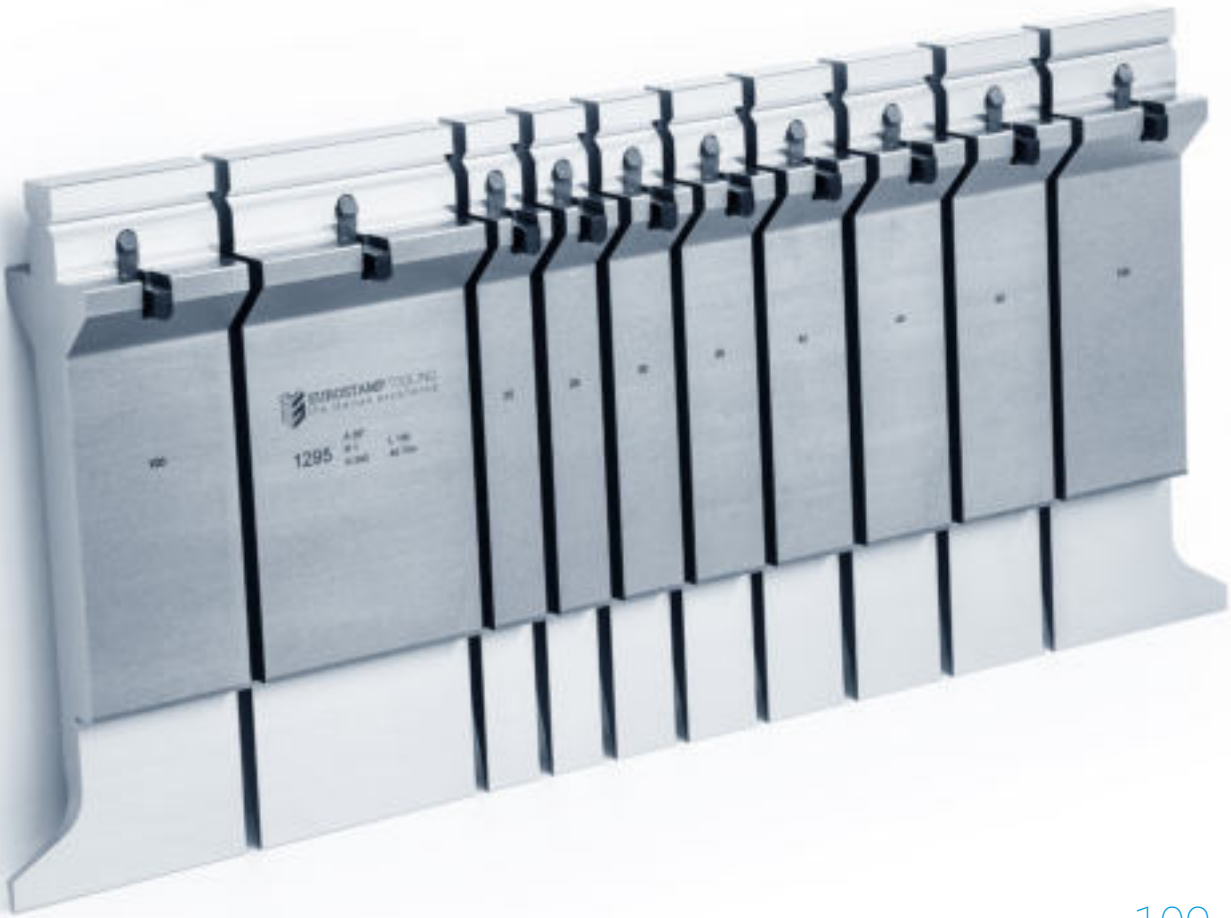
1295



EUROSTAMP TOOLING
the Italian excellence
3244
A 84°
R 1.6
H 100
V 14
L 200
90 T/m
25
40
25

VEDI PAG. 92 PER SCHEMA FRAZIONATURA PUNZONI
SEE PAGE 92 FOR PUNCHES SEGMENTATION DIAGRAM

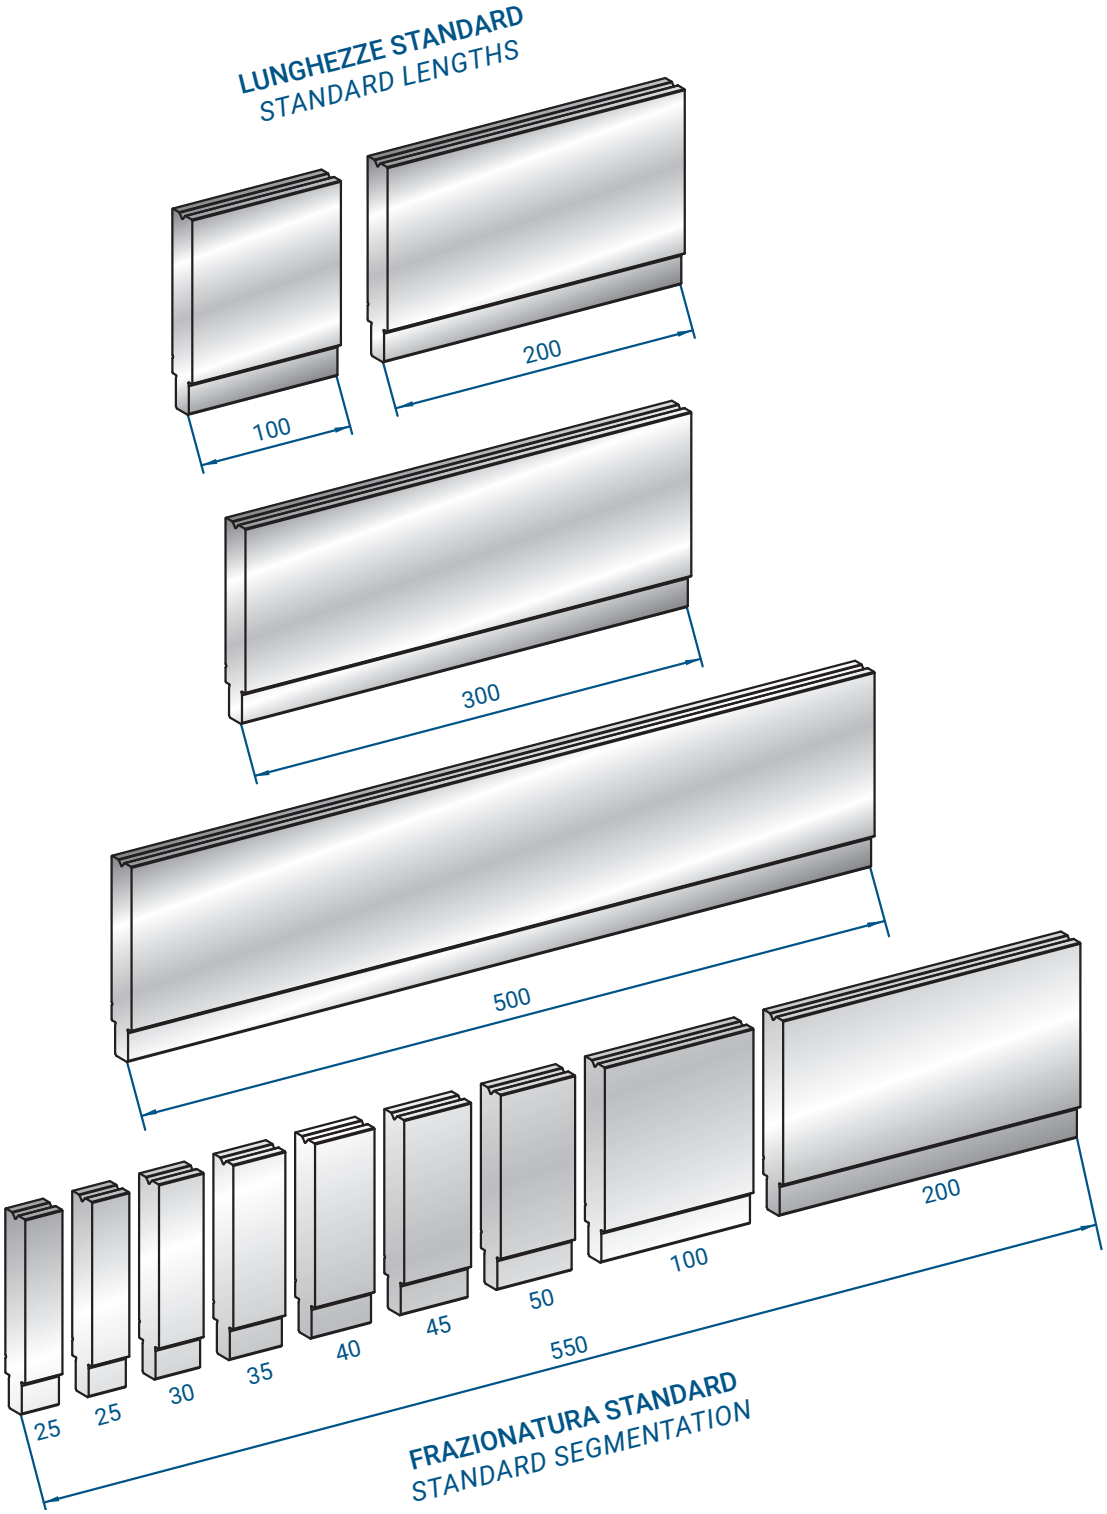


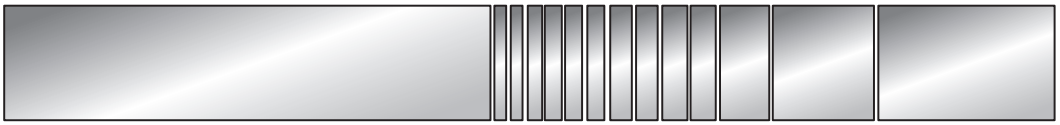

TAGLI SU RICHIESTA
SPECIAL SEGMENTATION

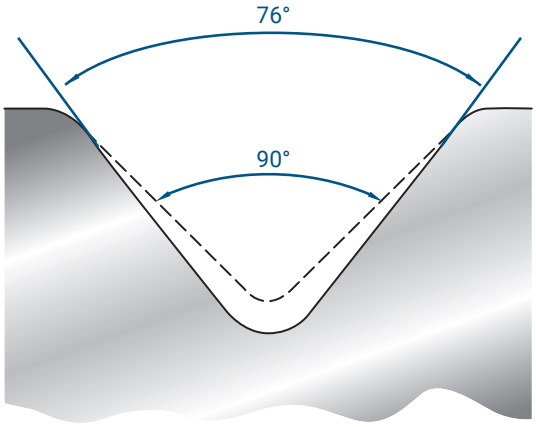


MODIFICA ANGOLO
ANGLE MODIFICATION

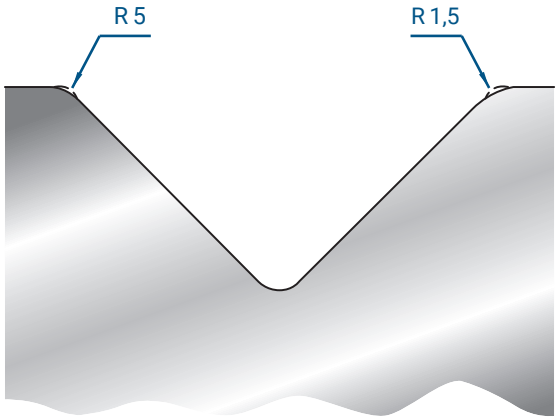

MODIFICA RAGGIO
RADIUS MODIFICATION

FRAZIONATURE PER MATRICI MODELLO
SEGMENTATION FOR DIE MODELS


3135 - 3222
3223 - 3224

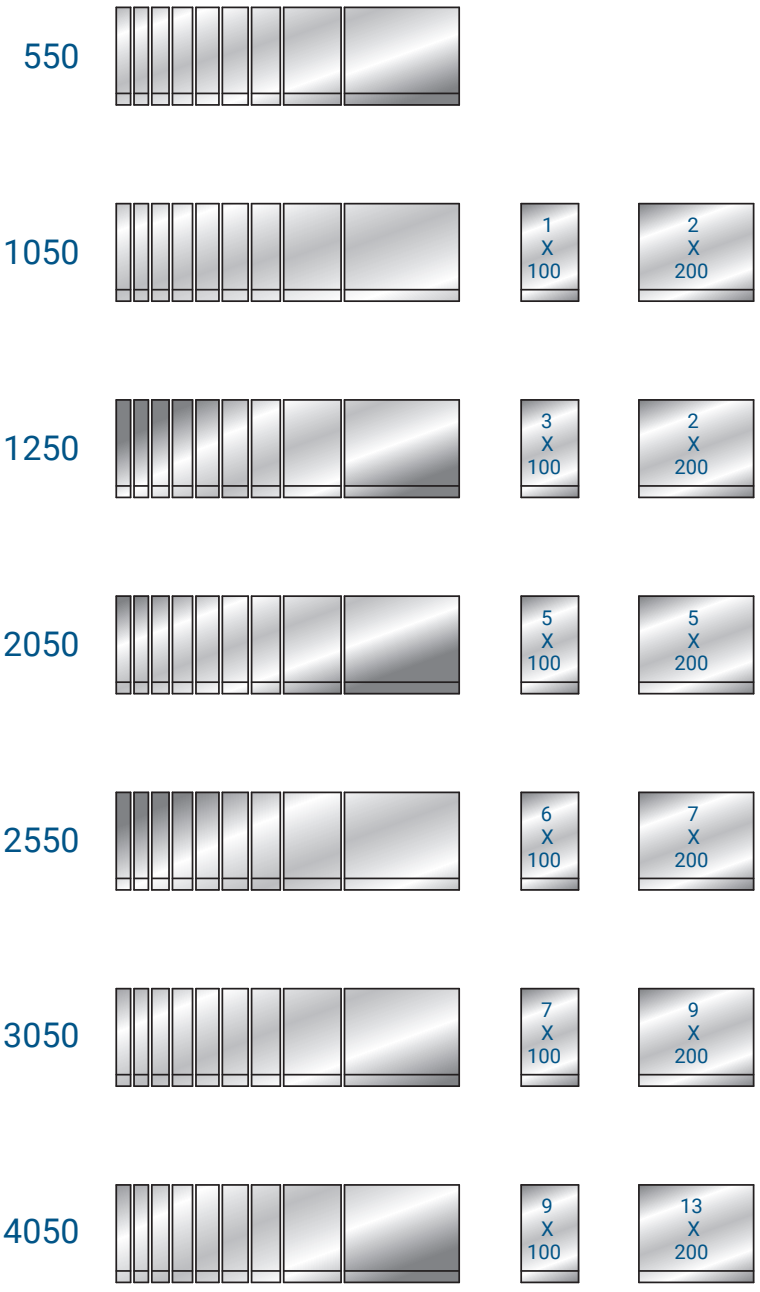

FRAZIONATURE PER PUNZONI - DA PAGINA 94 A PAGINA 96
SEGMENTATION FOR PUNCHES - FROM PAGE 94 TO PAGE 96


FRAZIONATURE PER MATRICI MODELLO
SEGMENTATION FOR DIE MODELS

3218 - 3219 - 3220 - 3221 - 3132 - 3133 - 3134

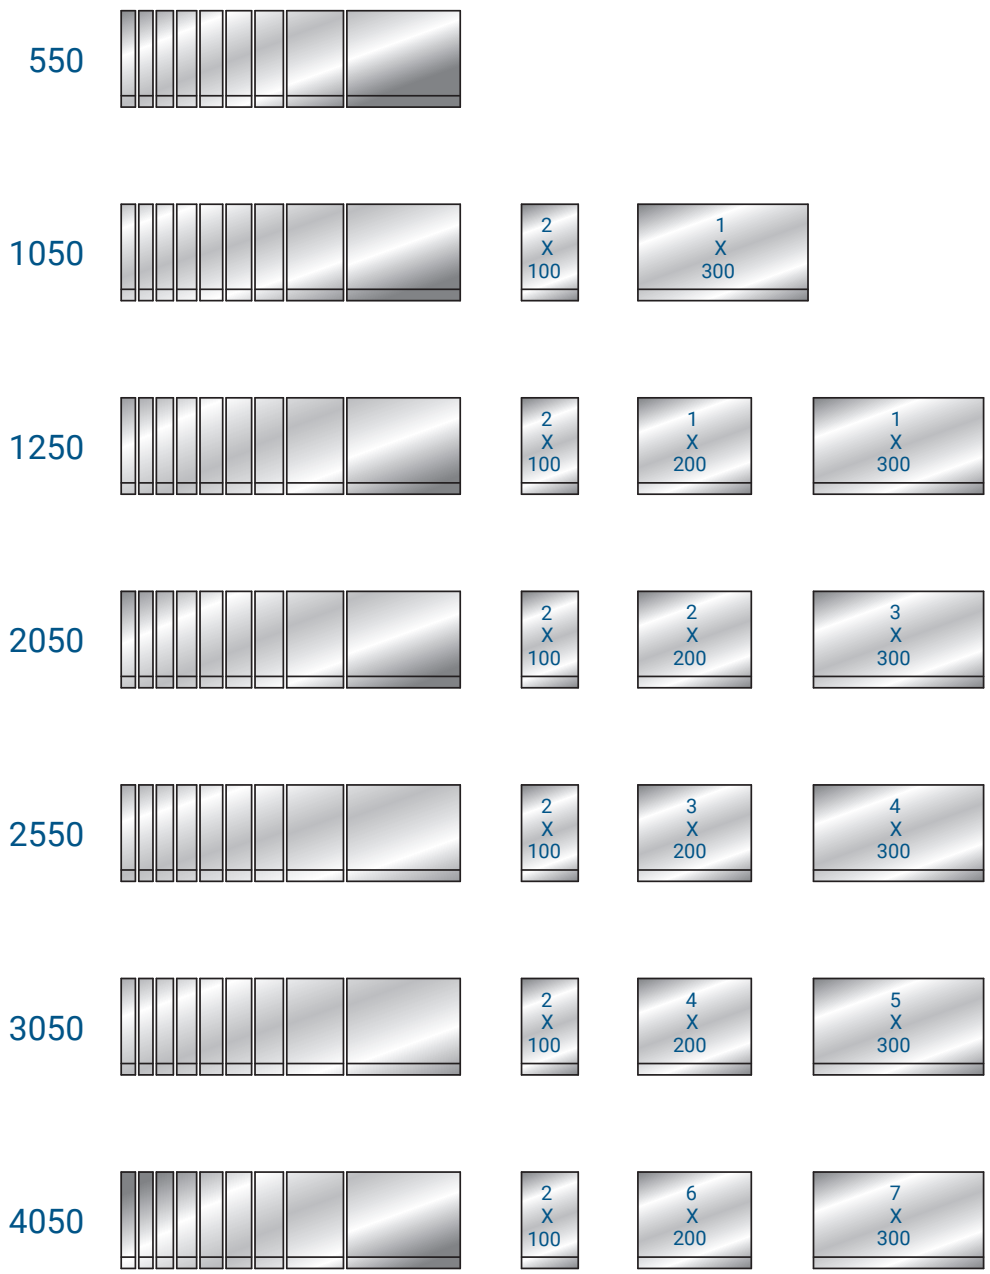


FRAZIONATURE PER PUNZONI - DA PAGINA 94 A PAGINA 96
SEGMENTATION FOR PUNCHES - FROM PAGE 94 TO PAGE 96

FRAZIONATURE PER TUTTI GLI ALTRI MODELLI
SEGMENTATION FOR OTHER DIE MODELS

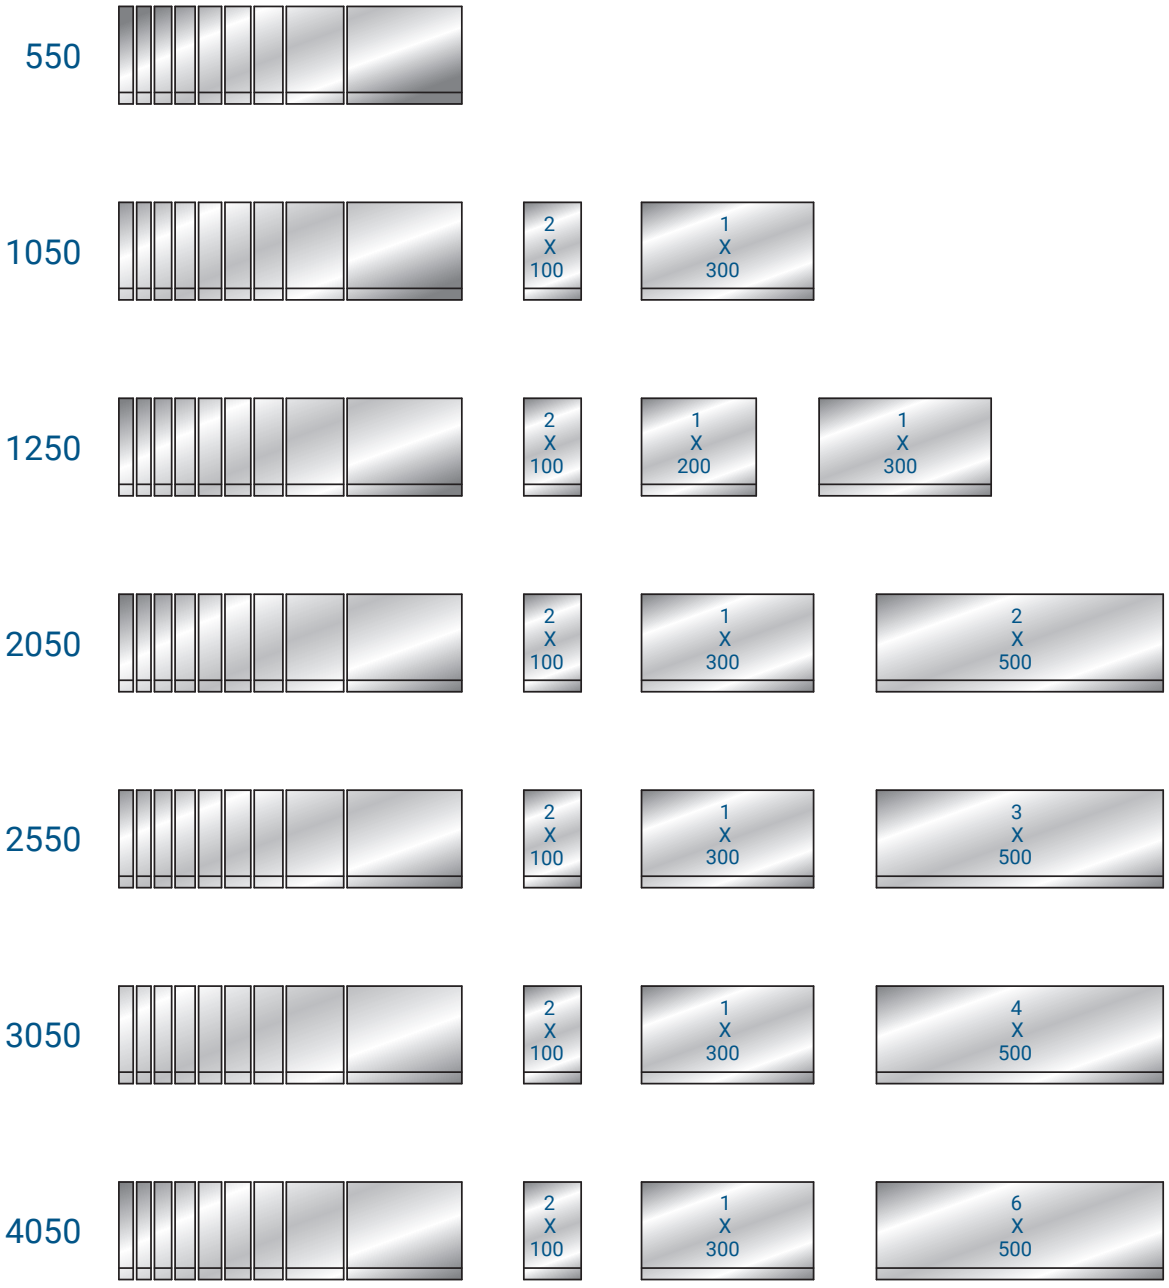


FRAZIONATURE PER PUNZONI - DA PAGINA 94 A PAGINA 96
SEGMENTATION FOR PUNCHES - FROM PAGE 94 TO PAGE 96

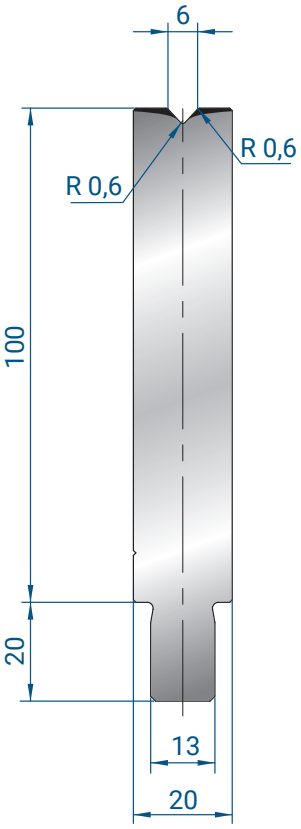

500 mm	8,8 kg
300 mm	5,3 kg
200 mm	3,6 kg
100 mm	1,8 kg
550 mm FRAZ. /SECT.	9,7 kg
50 mm	0,9 kg
45 mm	0,8 kg
40 mm	0,7 kg
35 mm	0,6 kg
30 mm	0,5 kg
25 mm	0,4 kg

3200


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 100
α = 86°

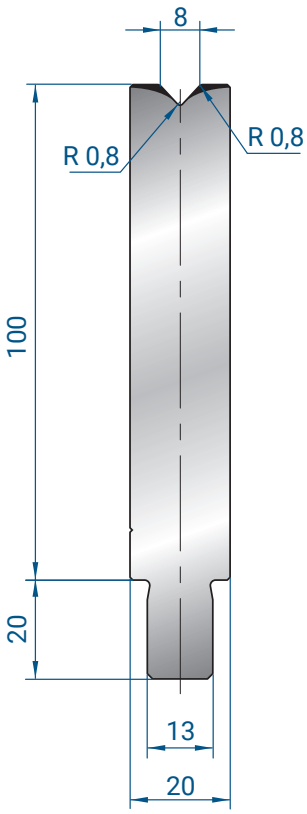

500 mm	8,8 kg
300 mm	5,3 kg
200 mm	3,5 kg
100 mm	1,8 kg
550 mm FRAZ. /SET.	9,6 kg
50 mm	0,9 kg
45 mm	0,8 kg
40 mm	0,7 kg
35 mm	0,6 kg
30 mm	0,5 kg
25 mm	0,4 kg

3201


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 100
α = 86°

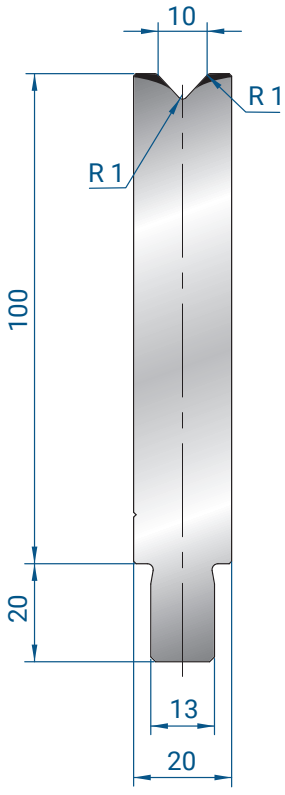

500 mm	8,7 kg
300 mm	5,2 kg
200 mm	3,5 kg
100 mm	1,7 kg
550 mm FRAZ. /SECT.	9,6 kg
50 mm	0,9 kg
45 mm	0,8 kg
40 mm	0,7 kg
35 mm	0,6 kg
30 mm	0,5 kg
25 mm	0,4 kg

3202


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 100
α = 86°

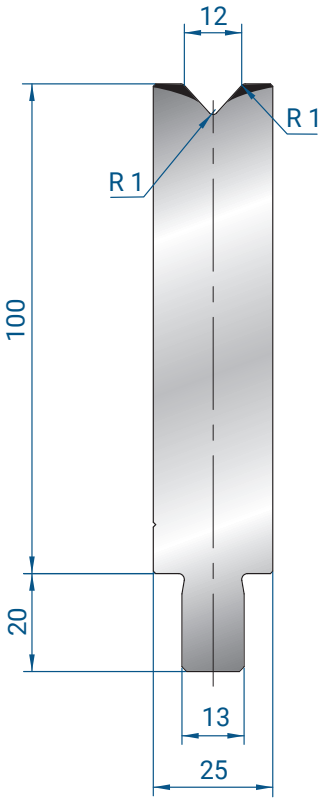

500 mm	10,6 kg
300 mm	6,4 kg
200 mm	4,3 kg
100 mm	2,1 kg
550 mm FRAZ. /SECT.	11,7 kg
50 mm	1,1 kg
45 mm	1,0 kg
40 mm	0,9 kg
35 mm	0,7 kg
30 mm	0,6 kg
25 mm	0,5 kg

3203


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 100
α = 86°

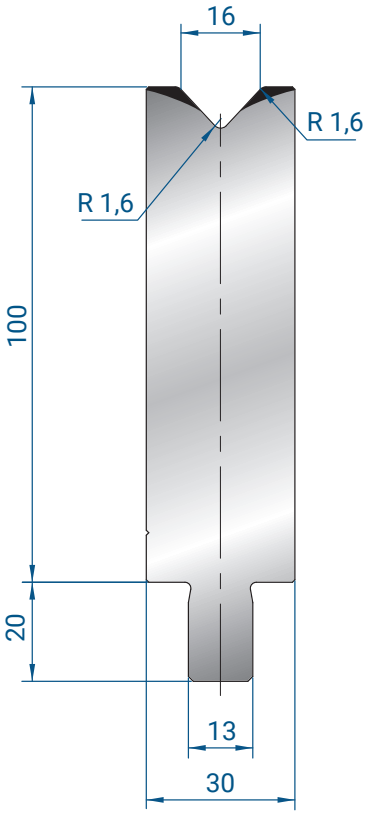

500 mm	12,5 kg
300 mm	7,5 kg
200 mm	5,0 kg
100 mm	2,5 kg
550 mm FRAZ. /SECT.	13,7 kg
50 mm	1,3 kg
45 mm	1,1 kg
40 mm	1,0 kg
35 mm	0,9 kg
30 mm	0,8 kg
25 mm	0,6 kg

3204


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 100
α = 86°

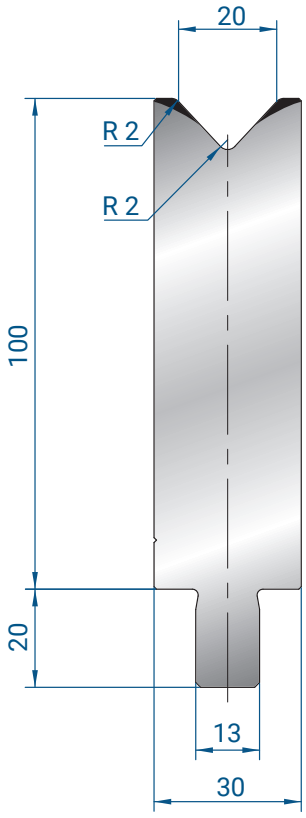

500 mm	12,3 kg
300 mm	7,4 kg
200 mm	4,9 kg
100 mm	2,5 kg
550 mm FRAZ. /SECT.	13,5 kg
50 mm	1,2 kg
45 mm	1,1 kg
40 mm	1,0 kg
35 mm	0,9 kg
30 mm	0,7 kg
25 mm	0,6 kg

3205


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 100
α = 86°

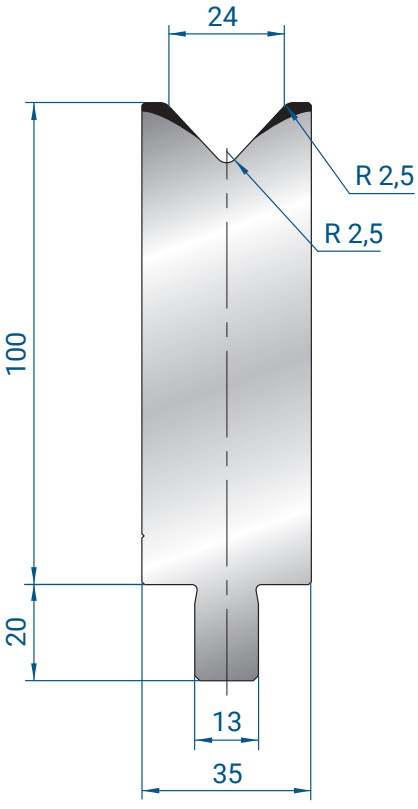

500 mm	14,0 kg
300 mm	8,4 kg
200 mm	5,6 kg
100 mm	2,8 kg
550 mm FRAZ. /SECT.	15,4 kg
50 mm	1,4 kg
45 mm	1,3 kg
40 mm	1,1 kg
35 mm	1,0 kg
30 mm	0,8 kg
25 mm	0,7 kg

3215

Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 100
α = 86°

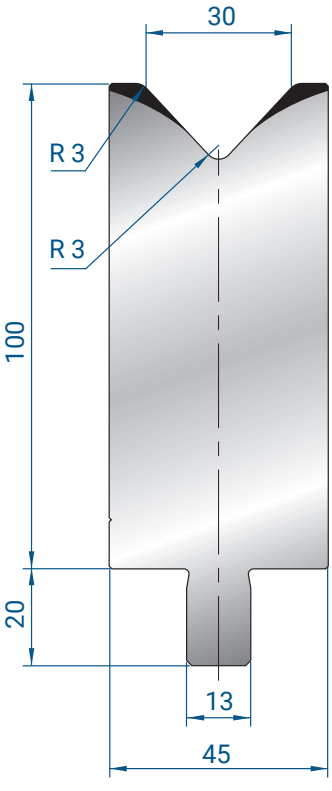


500 mm	17,6 kg
300 mm	10,5 kg
200 mm	7,0 kg
100 mm	3,5 kg
550 mm FRAZ. /SECT.	19,3 kg
50 mm	1,8 kg
45 mm	1,6 kg
40 mm	1,4 kg
35 mm	1,2 kg
30 mm	1,0 kg
25 mm	0,9 kg

3216

Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 100
α = 86°


MATRICI 1V H100 - 86° / 1V DIES H100 - 86° CrMo

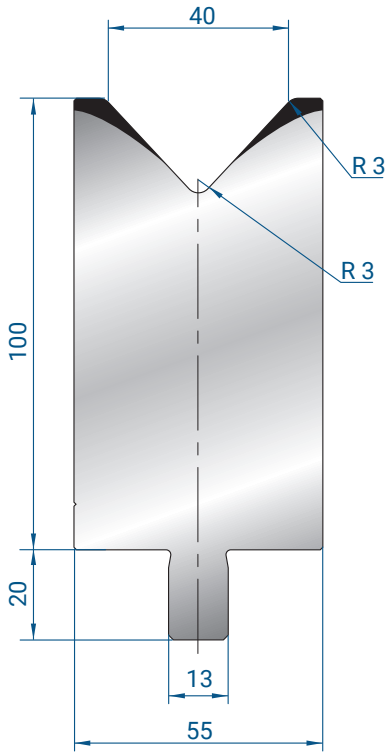

500 mm	20,7 kg
300 mm	12,4 kg
200 mm	8,3 kg
100 mm	4,1 kg
550 mm FRAZ. /SECT.	22,8 kg
50 mm	2,1 kg
45 mm	1,9 kg
40 mm	1,7 kg
35 mm	1,5 kg
30 mm	1,2 kg
25 mm	1,0 kg

3217

Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 120
α = 86°

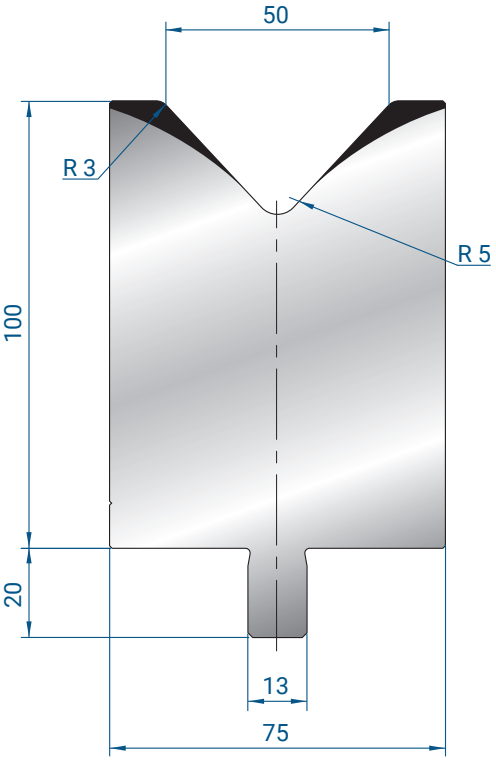


500 mm	27,6 kg
300 mm	16,6 kg
200 mm	11,0 kg
100 mm	5,5 kg
550 mm FRAZ. /SECT.	30,3 kg
50 mm	2,8 kg
45 mm	2,5 kg
40 mm	2,2 kg
35 mm	1,9 kg
30 mm	1,7 kg
25 mm	1,4 kg

3218

Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 150
α = 86°


MATRICI 1V H100 - 84° / 1V DIES H100 - 84° CrMo

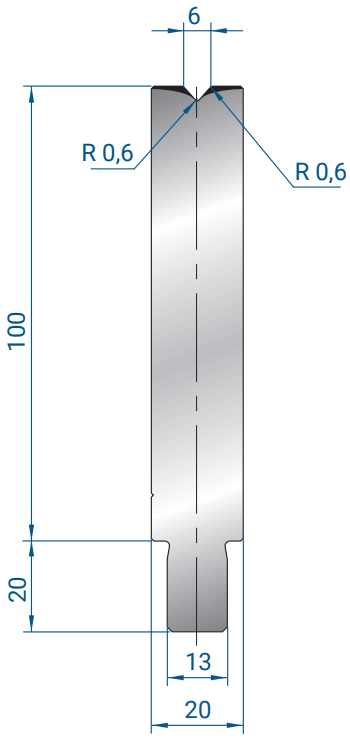

500 mm	8,8 kg
300 mm	5,3 kg
200 mm	3,5 kg
100 mm	1,8 kg
550 mm FRAZ. /SECT.	9,7 kg
50 mm	0,9 kg
45 mm	0,8 kg
40 mm	0,7 kg
35 mm	0,6 kg
30 mm	0,5 kg
25 mm	0,4 kg

3225


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 100
α = 84°

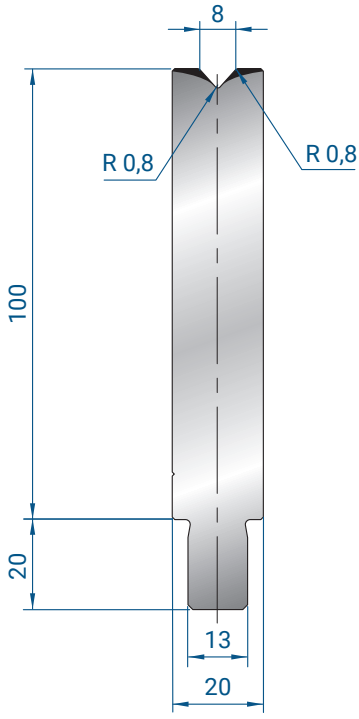

500 mm	8,8 kg
300 mm	5,3 kg
200 mm	3,5 kg
100 mm	1,8 kg
550 mm FRAZ. /SECT.	9,7 kg
50 mm	0,9 kg
45 mm	0,8 kg
40 mm	0,7 kg
35 mm	0,6 kg
30 mm	0,5 kg
25 mm	0,4 kg

3226


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 100
α = 84°

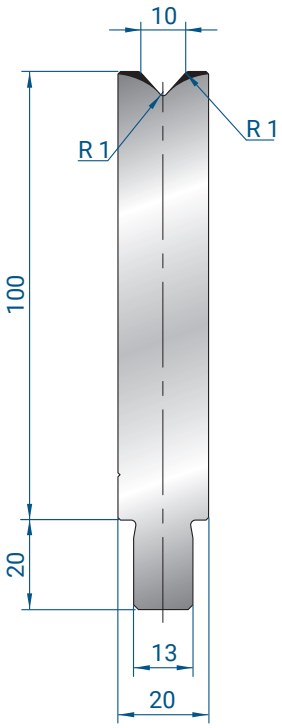

500 mm	8,7 kg
300 mm	5,2 kg
200 mm	3,5 kg
100 mm	1,7 kg
550 mm FRAZ. /SECT.	9,6 kg
50 mm	0,9 kg
45 mm	0,8 kg
40 mm	0,7 kg
35 mm	0,6 kg
30 mm	0,5 kg
25 mm	0,4 kg

3227


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 100
α = 84°

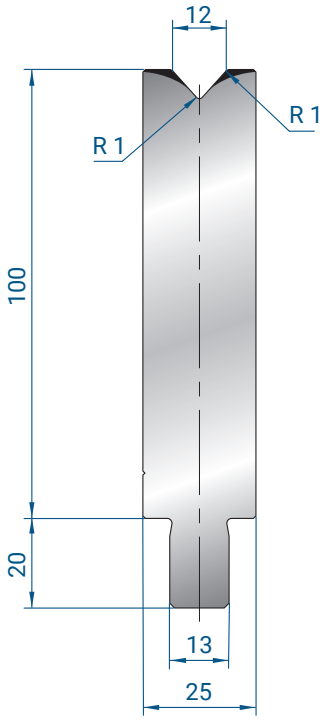

500 mm	10,6 kg
300 mm	6,4 kg
200 mm	4,2 kg
100 mm	2,1 kg
550 mm FRAZ. /SECT.	11,7 kg
50 mm	1,1 kg
45 mm	1,0 kg
40 mm	0,8 kg
35 mm	0,7 kg
30 mm	0,6 kg
25 mm	0,5 kg

3228


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 100
α = 84°

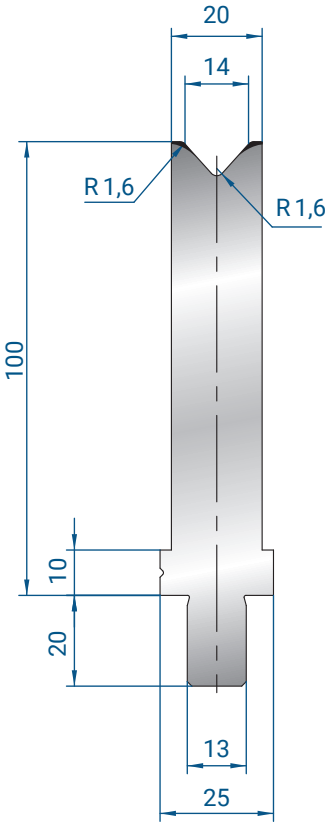

500 mm	8,8 kg
300 mm	5,3 kg
200 mm	3,5 kg
100 mm	1,8 kg
550 mm FRAZ. /SECT.	9,7 kg
50 mm	0,9 kg
45 mm	0,8 kg
40 mm	0,7 kg
35 mm	0,6 kg
30 mm	0,5 kg
25 mm	0,4 kg

3244

Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 90
α = 84°

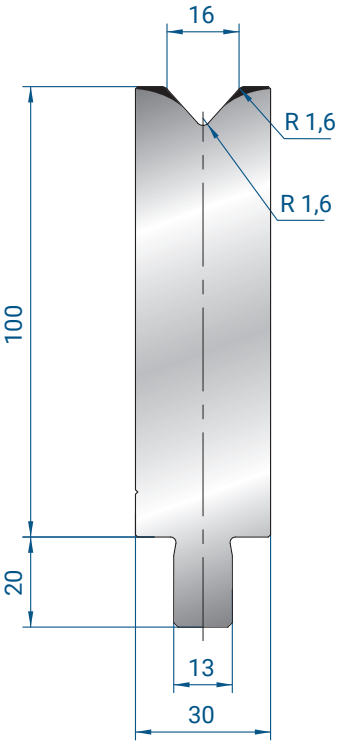


500 mm	12,4 kg
300 mm	7,5 kg
200 mm	5,0 kg
100 mm	2,5 kg
550 mm FRAZ. /SECT.	13,7 kg
50 mm	1,2 kg
45 mm	1,1 kg
40 mm	1,0 kg
35 mm	0,9 kg
30 mm	0,7 kg
25 mm	0,6 kg

3229

Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 100
α = 84°

MATRICI 1V H100 - 84° / 1V DIES H100 - 84° CrMo



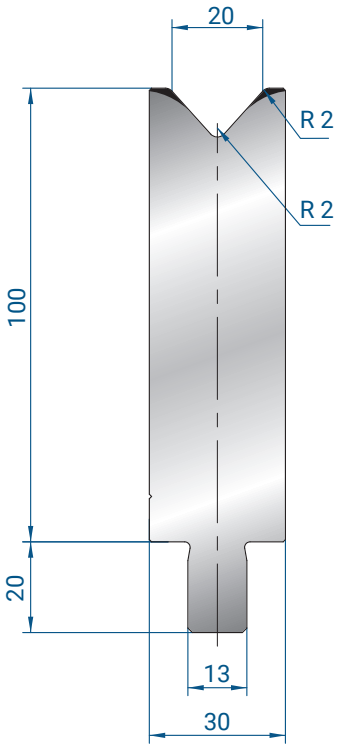


500 mm	12,3 kg
300 mm	7,4 kg
200 mm	4,9 kg
100 mm	2,5 kg
550 mm FRAZ. /SECT.	13,5 kg
50 mm	1,2 kg
45 mm	1,1 kg
40 mm	1,0 kg
35 mm	0,9 kg
30 mm	0,7 kg
25 mm	0,6 kg

3230

Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 100
α = 84°


MATRICI 1V H100 - 80° / 1V DIES H100 - 80° CrMo

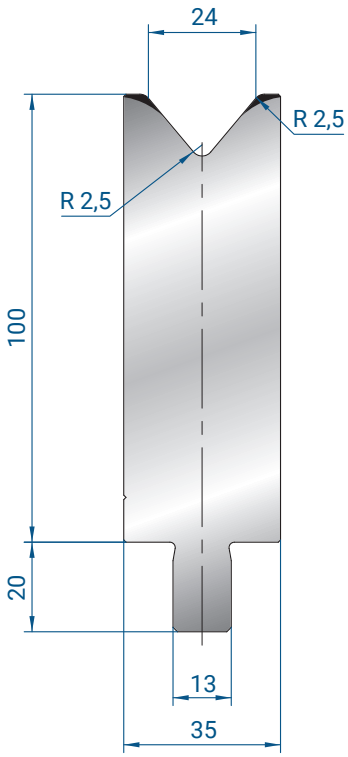

500 mm	14,0 kg
300 mm	8,4 kg
200 mm	5,6 kg
100 mm	2,8 kg
550 mm FRAZ. /SECT.	15,4 kg
50 mm	1,4 kg
45 mm	1,3 kg
40 mm	1,1 kg
35 mm	1,0 kg
30 mm	0,8 kg
25 mm	0,7 kg

3231

Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 100
α = 80°

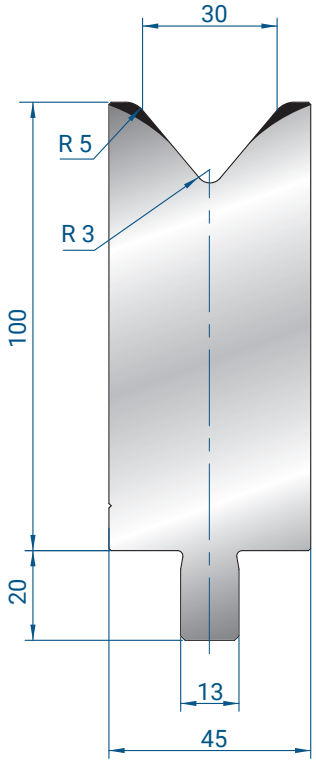


500 mm	17,4 kg
300 mm	10,9 kg
200 mm	6,9 kg
100 mm	3,5 kg
550 mm FRAZ. /SECT.	19,1 kg
50 mm	1,7 kg
45 mm	1,6 kg
40 mm	1,4 kg
35 mm	1,2 kg
30 mm	1,0 kg
25 mm	0,9 kg

3232

Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 120
α = 80°

3233


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 150
α = 80°

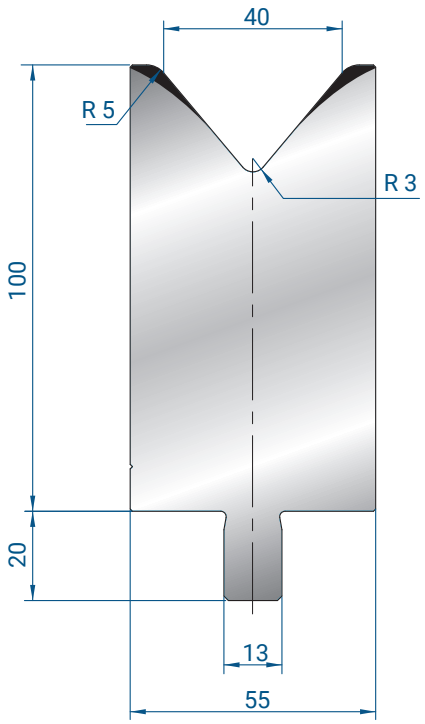

500 mm	20,4 kg
300 mm	12,2 kg
200 mm	8,2 kg
100 mm	14,1 kg
550 mm FRAZ. /SECT.	22,4 kg
50 mm	2,0 kg
45 mm	1,8 kg
40 mm	1,6 kg
35 mm	1,4 kg
30 mm	1,2 kg
25 mm	1,0 kg

3234


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 150
α = 80°

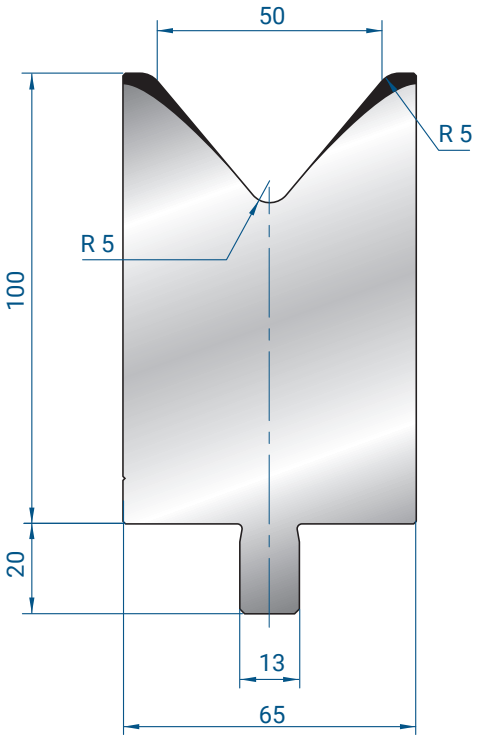

500 mm	23,2 kg
300 mm	13,9 kg
200 mm	9,3 kg
100 mm	4,6 kg
550 mm FRAZ. /SECT.	25,5 kg
50 mm	2,3 kg
45 mm	2,1 kg
40 mm	1,9 kg
35 mm	1,6 kg
30 mm	1,4 kg
25 mm	1,2 kg

3219


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 150
α = 80°

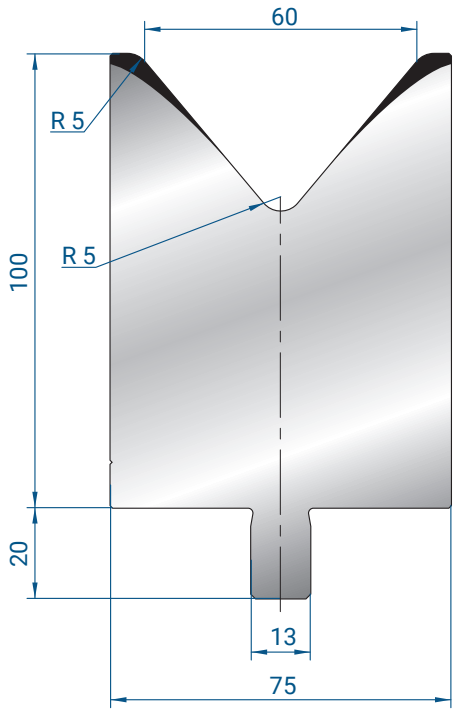

500 mm	25,8 kg
300 mm	14,5 kg
200 mm	10,3 kg
100 mm	5,2 kg
550 mm FRAZ. /SECT.	28,3 kg
50 mm	2,6 kg
45 mm	2,3kg
40 mm	2,1 kg
35 mm	1,8 kg
30 mm	1,5 kg
25 mm	1,3 kg

3220


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 150
α = 80°

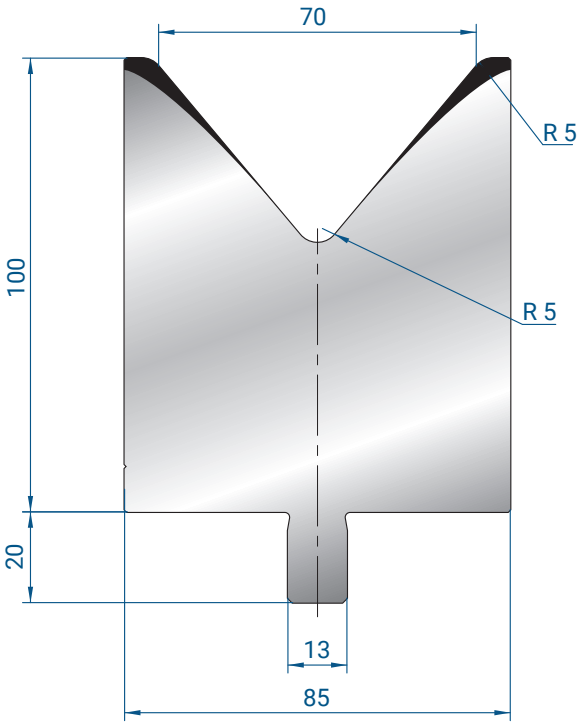

300 mm	16,9 kg
200 mm	11,2 kg
100 mm	5,6 kg
550 mm FRAZ. /SECT.	30,9 kg
50 mm	2,8 kg
45 mm	2,5 kg
40 mm	2,2 kg
35 mm	2,0 kg
30 mm	1,7 kg
25 mm	1,4 kg

3221


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 150
α = 80°

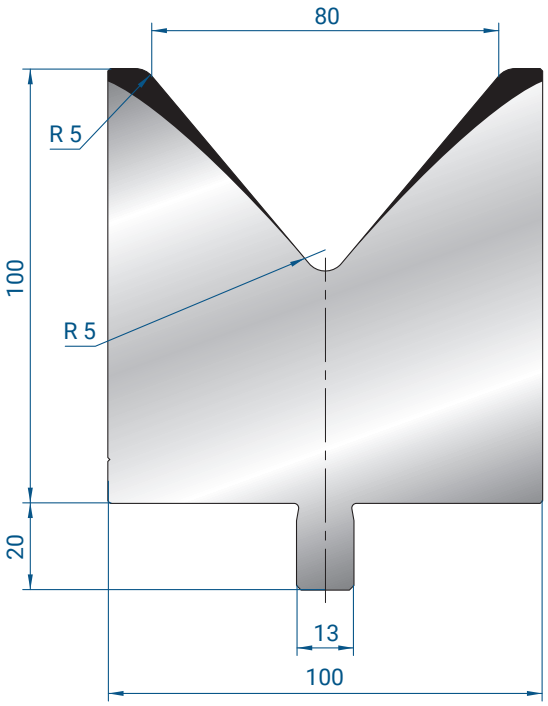

300 mm	19,3 kg
200 mm	12,9 kg
100 mm	6,4 kg
550 mm FRAZ. /SECT.	35,4 kg
50 mm	3,2 kg
45 mm	2,9 kg
40 mm	2,6 kg
30 mm	2,3 kg
25 mm	1,9 kg
25 mm	1,6 kg


3222

Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 150
α = 80°

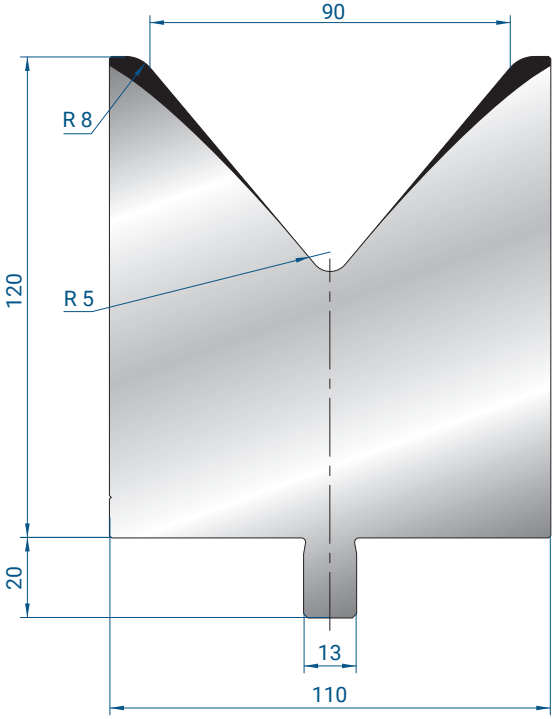

200 mm	16,9 kg
100 mm	8,4 kg
550 mm FRAZ. /SECT	46,5 kg
50 mm	4,2 kg
45 mm	3,8 kg
40 mm	3,4 kg
35 mm	3,0 kg
30 mm	2,5 kg
25 mm	2,1 kg

MATRICI 1V H120 – 80° / 1V DIES H120 – 80° CrMo

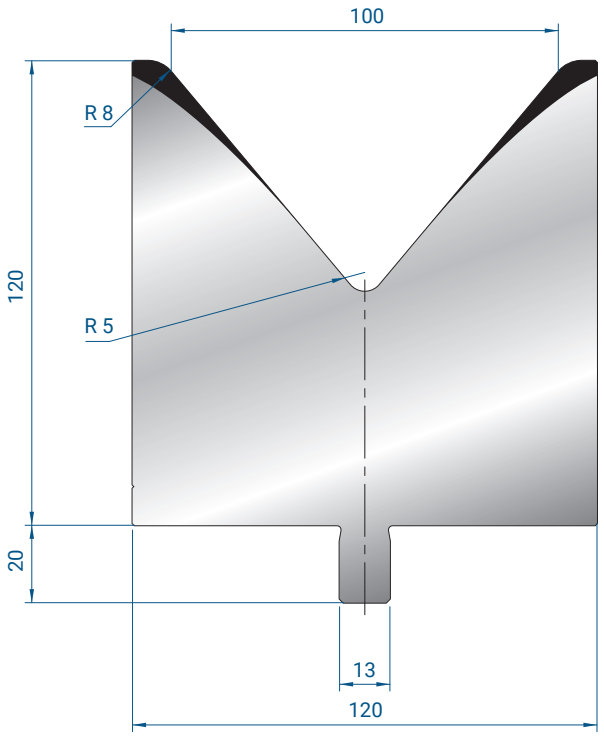


3223

Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 150
α = 80°

200 mm	17,8 kg
100 mm	8,9 kg
550 mm FRAZ. /SECT	49,1 kg
50 mm	4,5 kg
45 mm	4,0 kg
40 mm	3,6 kg
35 mm	3,1 kg
30 mm	2,7 kg
25 mm	2,2 kg


MATRICI 1V H100 - 60° / 1V DIES H100 - 60° CrMo

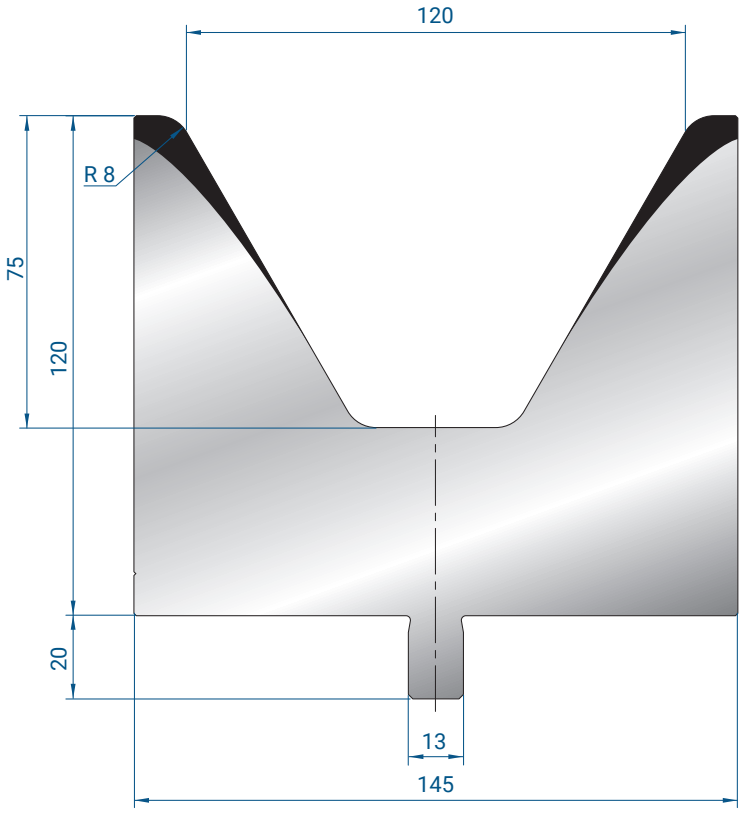

3224

Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 160
α = 60°


200 mm	18,1 kg
100 mm	9,1 kg
550 mm FRAZ. /SECT	49,8 kg
50 mm	4,5 kg
45 mm	4,1 kg
40 mm	3,6 kg
35 mm	3,2 kg
30 mm	2,7 kg
25 mm	2,3 kg

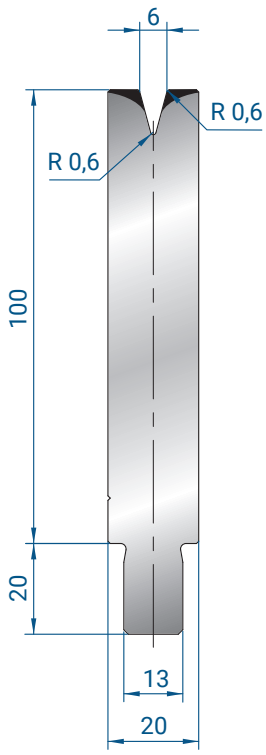

500 mm	8,7 kg
300 mm	5,2 kg
200 mm	3,5 kg
100 mm	1,7 kg
550 mm FRAZ. /SECT.	9,6 kg
50 mm	0,9 kg
45 mm	0,8 kg
40 mm	0,7 kg
35 mm	0,6 kg
30 mm	0,5 kg
25 mm	0,4 kg

3206


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 60
α = 30°

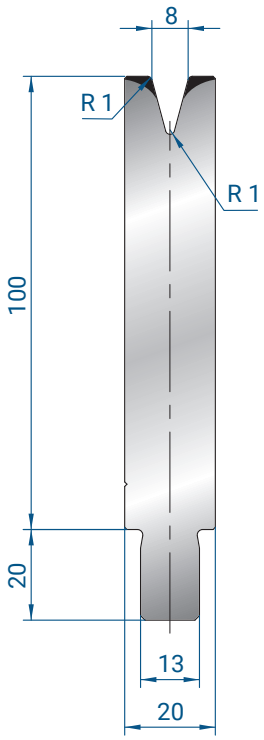

500 mm	8,6 kg
300 mm	5,2 kg
200 mm	3,4 kg
100 mm	1,7 kg
550 mm FRAZ. /SECT.	9,4 kg
50 mm	0,9 kg
45 mm	0,8 kg
40 mm	0,7 kg
35 mm	0,6 kg
30 mm	0,5 kg
25 mm	0,4 kg

3207


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 50
α = 30°

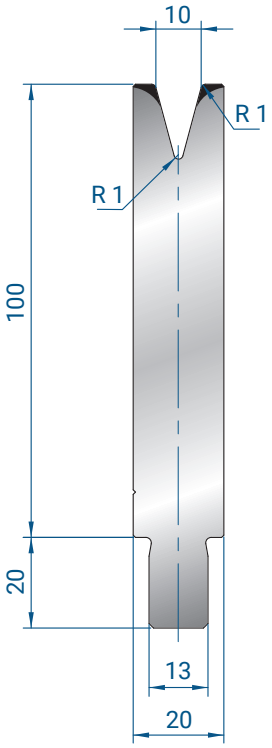

500 mm	8,4 kg
300 mm	5,1 kg
200 mm	3,4 kg
100 mm	1,7 kg
550 mm FRAZ. /SECT.	9,3 kg
50 mm	0,8 kg
45 mm	0,8 kg
40 mm	0,7 kg
35 mm	0,6 kg
30 mm	0,5 kg
25 mm	0,4 kg

3208


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 50
α = 30°

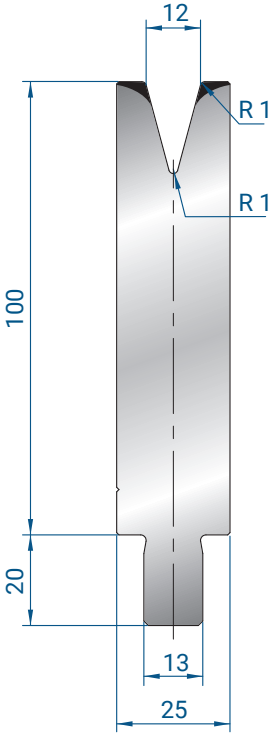

500 mm	10,2 kg
300 mm	6,1 kg
200 mm	4,1 kg
100 mm	2,0 kg
550 mm FRAZ. /SECT	11,3 kg
50 mm	1,0 kg
45 mm	0,9 kg
40 mm	0,8 kg
35 mm	0,7 kg
30 mm	0,6 kg
25 mm	0,5 kg

3209


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 56
α = 30°

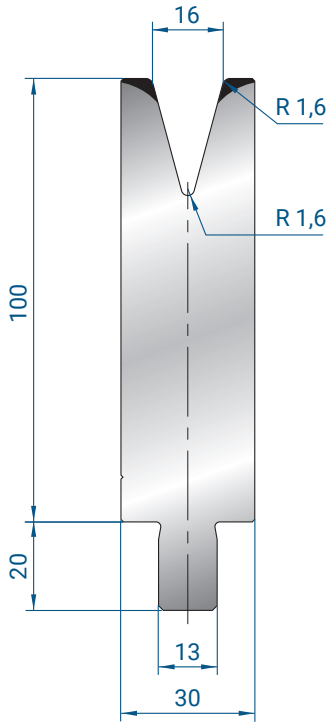

500 mm	11,8 kg
300 mm	7,1 kg
200 mm	4,7 kg
100 mm	2,4 kg
550 mm FRAZ. /SECT.	12,9 kg
50 mm	1,2 kg
45 mm	1,1 kg
40 mm	0,9 kg
35 mm	0,8 kg
30 mm	0,7 kg
25 mm	0,6 kg

3210


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 68
α = 30°

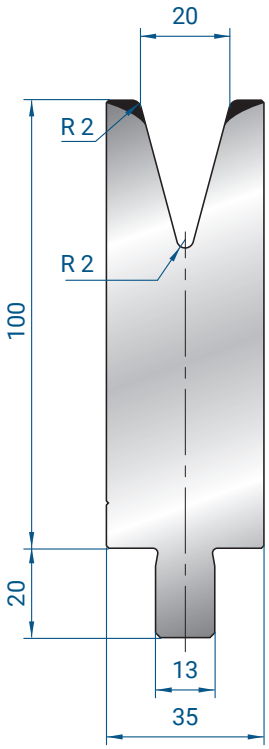

500 mm	13,2 kg
300 mm	7,9 kg
200 mm	5,3 kg
100 mm	2,6 kg
550 mm FRAZ. /SECT	14,4 kg
50 mm	1,3 kg
45 mm	1,2 kg
40 mm	1,1 kg
35 mm	0,9 kg
30 mm	0,8 kg
25 mm	0,7 kg

3211


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 50
α = 30°

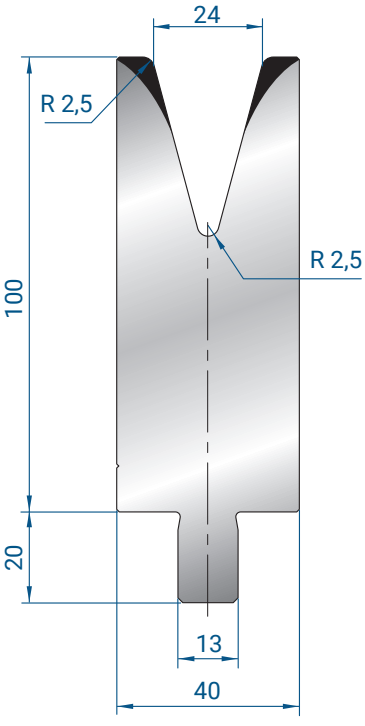

500 mm	14,4 kg
300 mm	8,7 kg
200 mm	5,8 kg
100 mm	2,9 kg
550 mm FRAZ. /SECT.	15,9 kg
50 mm	1,4 kg
45 mm	1,3 kg
40 mm	1,2 kg
35 mm	1,0 kg
30 mm	0,9 kg
25 mm	0,7 kg

3212

Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 55
α = 30°

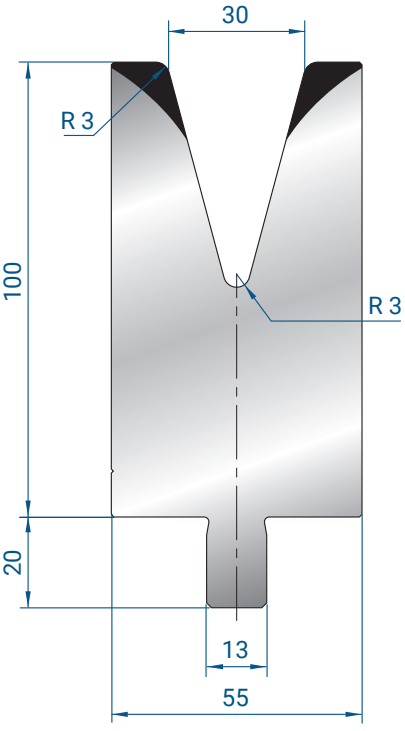


500 mm	19,1 kg
300 mm	11,4 kg
200 mm	7,6 kg
100 mm	3,8 kg
550 mm FRAZ. /SECT	21,0 kg
50 mm	1,9 kg
45 mm	1,7 kg
40 mm	1,5 kg
35 mm	1,3 kg
30 mm	1,1 kg
25 mm	1,0 kg

3213

Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 85
α = 30°

3214


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 73
α = 30°

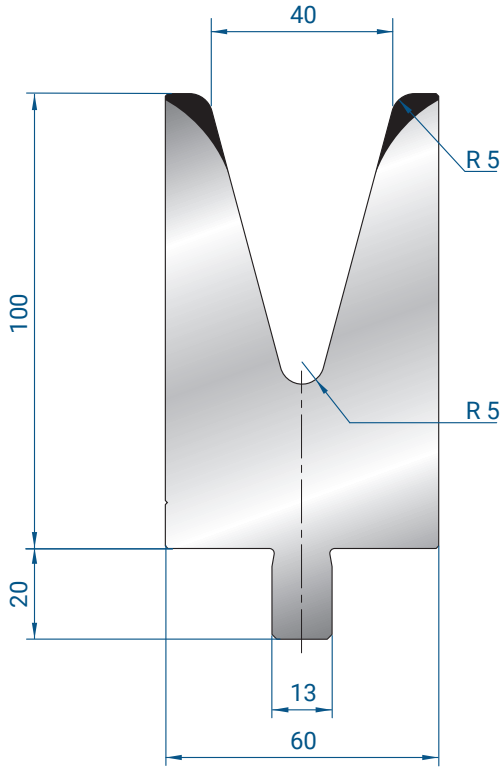


500 mm	18,3 kg
300 mm	11,0 kg
200 mm	7,3 kg
100 mm	3,7 kg
550 mm FRAZ. /SECT	20,1 kg
50 mm	1,8 kg
45 mm	1,6 kg
40 mm	1,5 kg
35 mm	1,3 kg
30 mm	1,1 kg
25 mm	0,9 kg

3235

Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 100
α = 30°

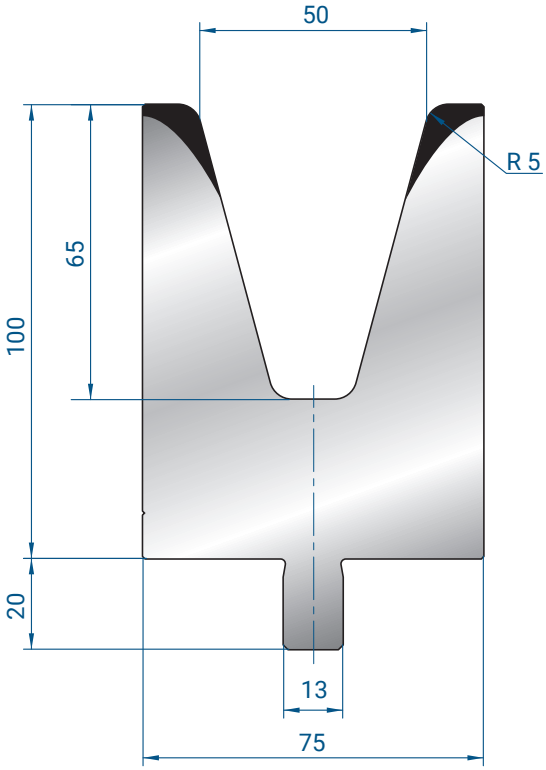


500 mm	21,6 kg
300 mm	12,9 kg
200 mm	8,6 kg
100 mm	4,3 kg
550 mm FRAZ. /SECT	23,7 kg
50 mm	2,2 kg
45 mm	1,9 kg
40 mm	1,7 kg
35 mm	1,5 kg
30 mm	1,3 kg
25 mm	1,1 kg

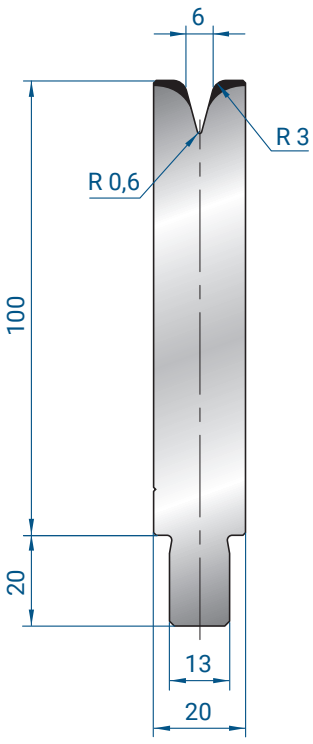

500 mm	8,6 kg
300 mm	5,2 kg
200 mm	3,5 kg
100 mm	1,7 kg
550 mm FRAZ. /SECT.	9,5 kg
50 mm	0,9 kg
45 mm	0,8 kg
40 mm	0,7 kg
35 mm	0,6 kg
30 mm	0,5 kg
25 mm	0,4 kg

3236


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 45
α = 30°

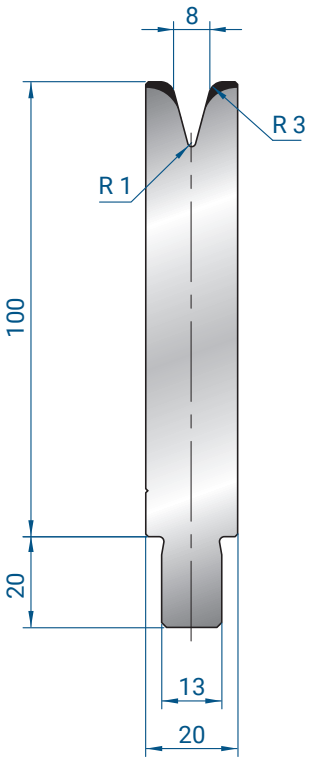

500 mm	8,5 kg
300 mm	5,1 kg
200 mm	3,4 kg
100 mm	1,7 kg
550 mm FRAZ. /SECT.	9,4 kg
50 mm	0,9 kg
45 mm	0,8 kg
40 mm	0,7 kg
35 mm	0,6 kg
30 mm	0,5 kg
25 mm	0,4 kg

3237


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 40
α = 30°

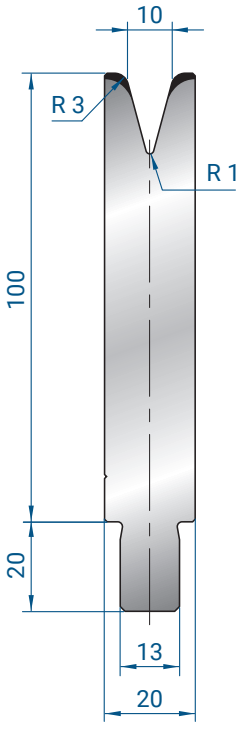

500 mm	8,4 kg
300 mm	5,0 kg
200 mm	3,4 kg
100 mm	1,7 kg
550 mm FRAZ. /SECT.	9,2 kg
50 mm	0,8 kg
45 mm	0,8 kg
40 mm	0,7 kg
35 mm	0,6 kg
30 mm	0,5 kg
25 mm	0,4 kg

3238

Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 30
α = 30°

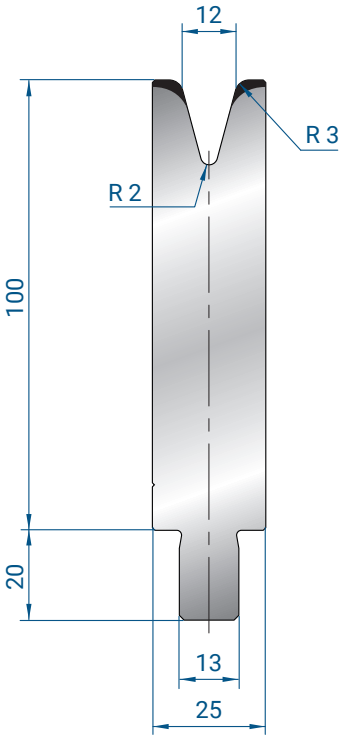


500 mm	10,2 kg
300 mm	6,1 kg
200 mm	4,1 kg
100 mm	2,0 kg
550 mm FRAZ. /SECT.	11,2 kg
50 mm	1,0 kg
45 mm	0,9 kg
40 mm	0,8 kg
35 mm	0,7 kg
30 mm	0,6 kg
25 mm	0,5 kg

3239

Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 40
α = 30°




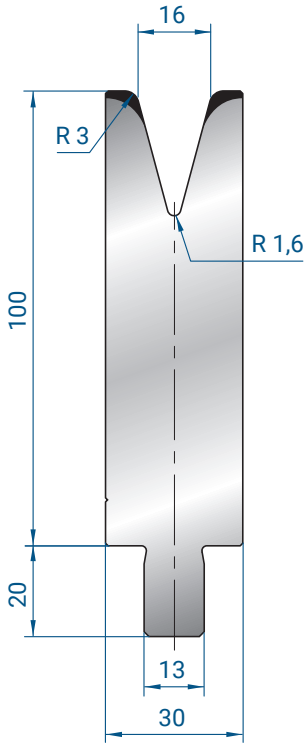

500 mm	11,7 kg
300 mm	7,0 kg
200 mm	4,7 kg
100 mm	2,3 kg
550 mm FRAZ. /SECT.	12,9 kg
50 mm	1,2 kg
45 mm	1,1 kg
40 mm	0,9 kg
35 mm	0,8 kg
30 mm	0,7 kg
25 mm	0,6 kg

3240


Mat = 42CrMo4 bonificato / *tempered*
Max T/m = 40
α = 30°

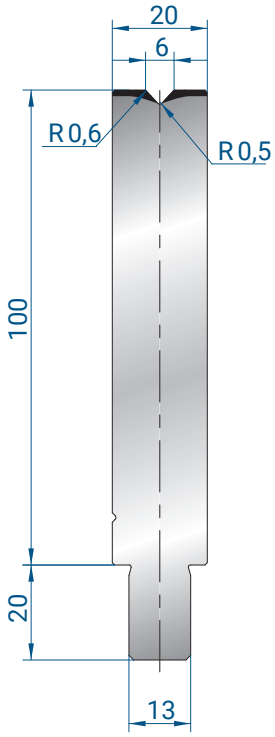

500 mm	8,8 kg
300 mm	5,3 kg
200 mm	3,5 kg
100 mm	1,8 kg
550 mm FRAZ. /SECT.	9,7 kg
50 mm	0,9 kg
45 mm	0,8 kg
40 mm	0,7 kg
35 mm	0,6 kg
30 mm	0,5 kg
25 mm	0,4 kg

3123


Mat = C45
Max T/m = 100
α = 86°

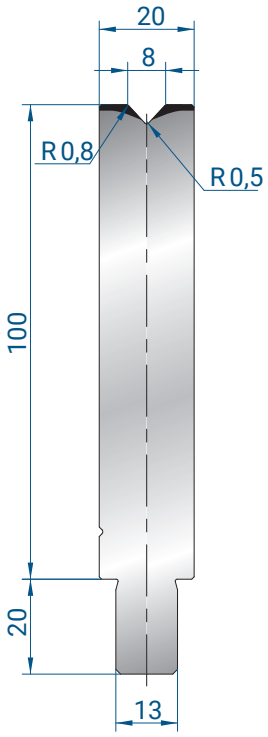

500 mm	8,8 kg
300 mm	5,3 kg
200 mm	3,5 kg
100 mm	1,8 kg
550 mm FRAZ. /SECT.	9,7 kg
50 mm	0,9 kg
45 mm	0,8 kg
40 mm	0,7 kg
35 mm	0,6 kg
30 mm	0,5 kg
25 mm	0,4 kg

3124


Mat = C45
Max T/m = 100
α = 86°

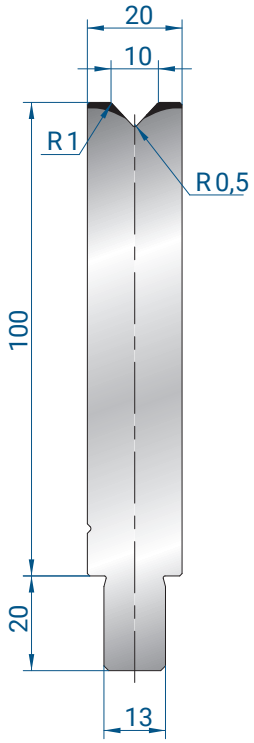

500 mm	8,7 kg
300 mm	5,2 kg
200 mm	3,5 kg
100 mm	1,7 kg
550 mm FRAZ. /SECT.	9,6 kg
50 mm	0,9 kg
45 mm	0,8 kg
40 mm	0,7 kg
35 mm	0,6 kg
30 mm	0,5 kg
25 mm	0,4 kg

3125


Mat = C45
Max T/m = 100
α = 86°

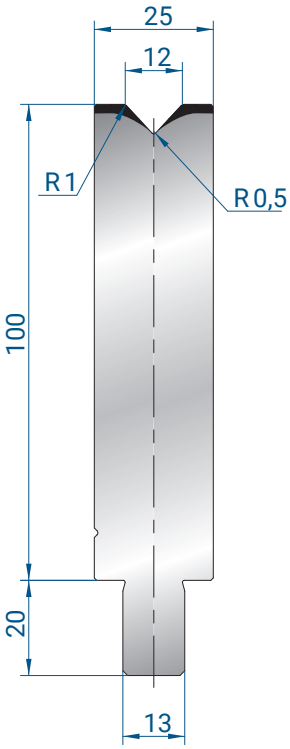

500 mm	10,6 kg
300 mm	6,4 kg
200 mm	4,3 kg
100 mm	2,1 kg
550 mm FRAZ. /SECT.	11,7 kg
50 mm	1,1 kg
45 mm	1,0 kg
40 mm	0,9 kg
35 mm	0,7 kg
30 mm	0,6 kg
25 mm	0,5 kg

3126


Mat = C45
Max T/m = 100
α = 86°

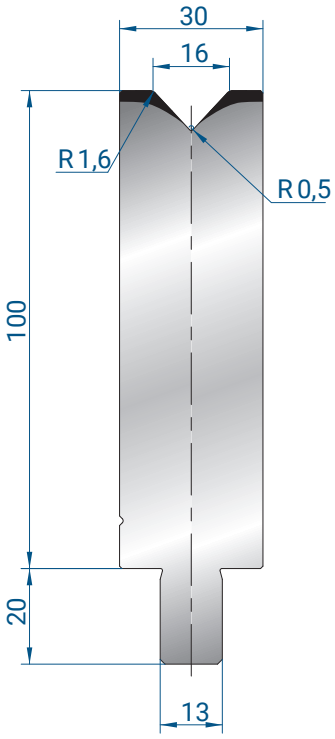

500 mm	12,5 kg
300 mm	7,5 kg
200 mm	5,0 kg
100 mm	2,5 kg
550 mm FRAZ. /SECT.	13,7 kg
50 mm	1,2 kg
45 mm	1,1 kg
40 mm	1,0 kg
35 mm	0,9 kg
30 mm	0,7 kg
25 mm	0,6 kg

3127


Mat = C45
Max T/m = 100
α = 86°

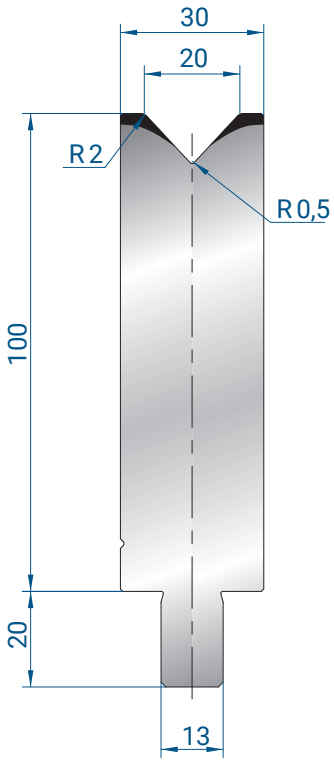

500 mm	12,3 kg
300 mm	7,4 kg
200 mm	4,9 kg
100 mm	2,5 kg
550 mm FRAZ. /SECT.	13,6 kg
50 mm	1,2 kg
45 mm	1,1 kg
40 mm	1,0 kg
35 mm	0,9 kg
30 mm	0,7 kg
25 mm	0,6 kg

3128


Mat = C45
Max T/m = 100
α = 86°

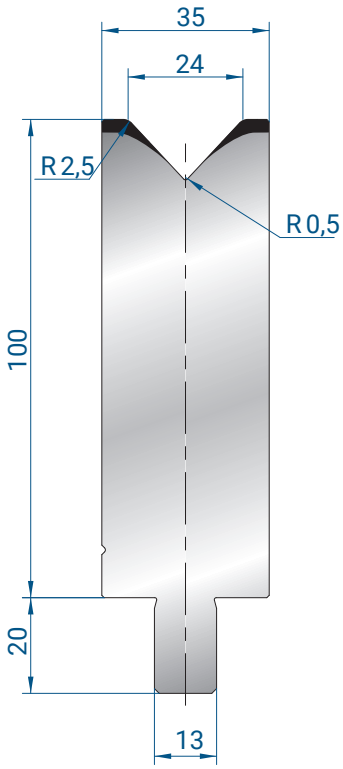

500 mm	14,1 kg
300 mm	8,5 kg
200 mm	5,6 kg
100 mm	2,8 kg
550 mm FRAZ. /SECT.	15,5 kg
50 mm	1,4 kg
45 mm	1,3 kg
40 mm	1,1 kg
35 mm	1,0 kg
30 mm	0,8 kg
25 mm	0,7 kg

3129


Mat = C45
Max T/m = 100
α = 86°

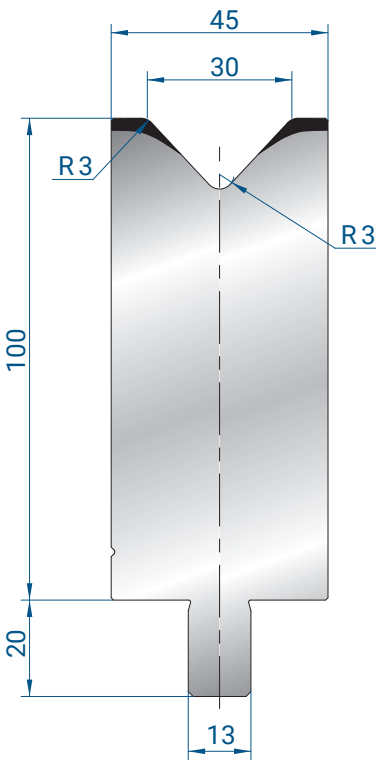

500 mm	17,7 kg
300 mm	10,6 kg
200 mm	7,1 kg
100 mm	3,5 kg
550 mm FRAZ. /SECT.	19,5 kg
50 mm	1,8 kg
45 mm	1,6 kg
40 mm	1,4 kg
35 mm	1,2 kg
30 mm	1,1 kg
25 mm	0,9 kg

3130


Mat = C45
Max T/m = 100
α = 86°

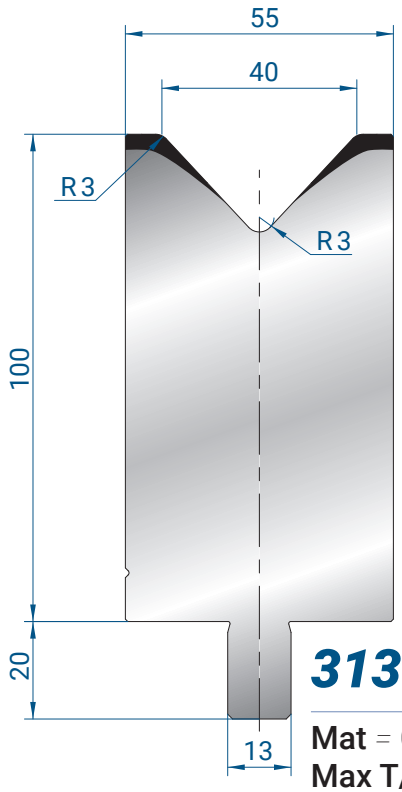

500 mm	20,9 kg
300 mm	12,5 kg
200 mm	8,3 kg
100 mm	4,2 kg
550 mm FRAZ./SECT.	23,0 kg
50 mm	2,1 kg
45 mm	1,9 kg
40 mm	1,7 kg
35 mm	1,5 kg
30 mm	1,3 kg
25 mm	1,0 kg

3131

Mat = C45
Max T/m = 100
α = 86°

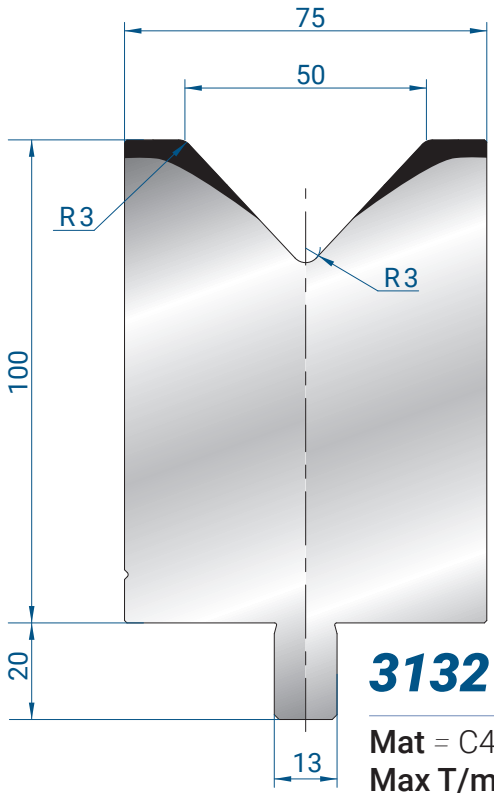


500 mm	27,8 kg
300 mm	16,7 kg
200 mm	11,1 kg
100 mm	5,6 kg
550 mm FRAZ./SECT.	30,5 kg
50 mm	2,8 kg
45 mm	2,5 kg
40 mm	2,2 kg
35 mm	1,9 kg
30 mm	1,7 kg
25 mm	1,4 kg

3132

Mat = C45
Max T/m = 100
α = 86°

3133


Mat = C45
Max T/m = 100
α = 80°

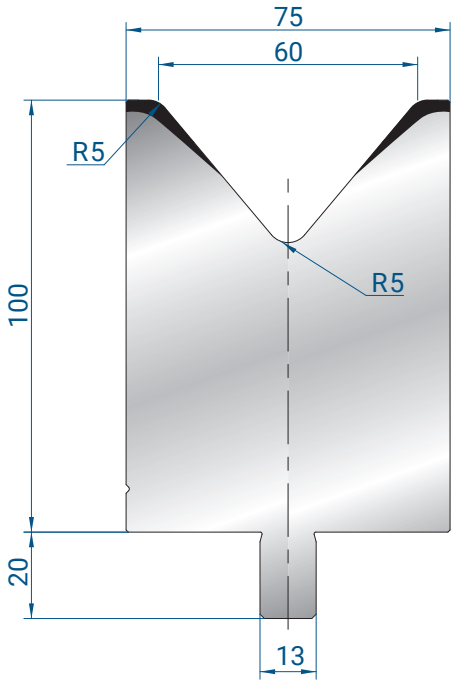

500 mm	26,2 kg
300 mm	15,7 kg
200 mm	10,5 kg
100 mm	5,2 kg
550 mm FRAZ. /SECT.	28,8 kg
50 mm	2,6 kg
45 mm	2,4 kg
40 mm	2,1 kg
35 mm	1,8 kg
30 mm	1,6 kg
25 mm	1,3 kg

3134


Mat = C45
Max T/m = 100
α = 80°

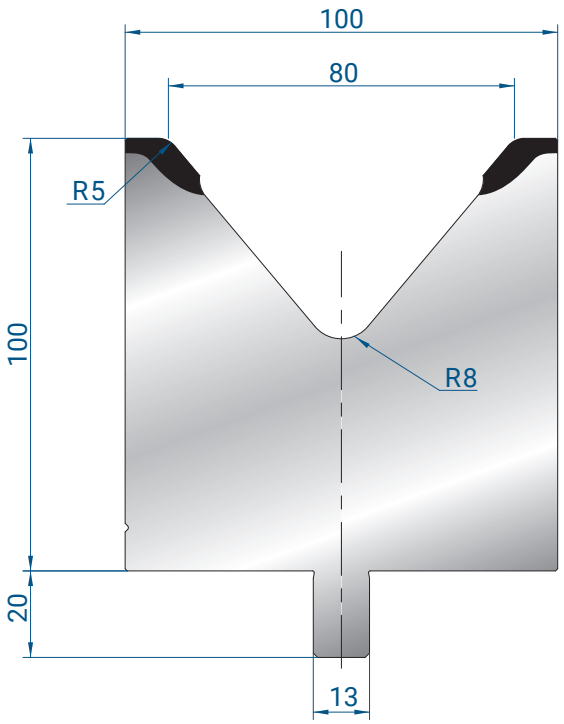


500 mm	32,9 kg
300 mm	19,8 kg
200 mm	13,2 kg
100 mm	6,6 kg
550 mm FRAZ. /SECT.	36,2 kg
50 mm	3,3 kg
45 mm	3,0 kg
40 mm	2,6 kg
35 mm	2,3 kg
30 mm	2,0 kg
25 mm	1,6 kg

3135

Mat = C45
Max T/m = 100
α = 80°

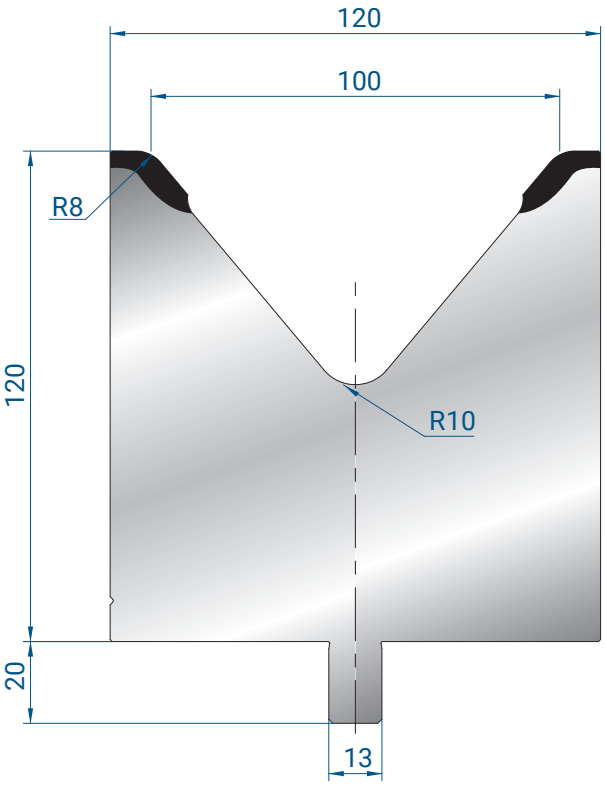


500 mm	44,9 kg
300 mm	26,9 kg
200 mm	17,9 kg
100 mm	9,0 kg
550 mm FRAZ. /SECT.	49,3 kg
50 mm	4,5 kg
45 mm	4,0 kg
40 mm	3,6 kg
35 mm	3,1 kg
30 mm	2,7 kg
25 mm	2,2 kg

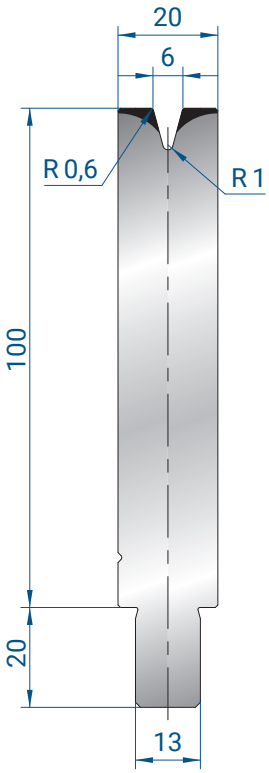

500 mm	8,7 kg
300 mm	5,2 kg
200 mm	3,5 kg
100 mm	1,7 kg
550 mm FRAZ. /SECT.	9,6 kg
50 mm	0,9 kg
45 mm	0,8 kg
40 mm	0,7 kg
35 mm	0,6 kg
30 mm	0,5 kg
25 mm	0,4 kg

3136


Mat = C45
Max T/m = 50
α = 30°

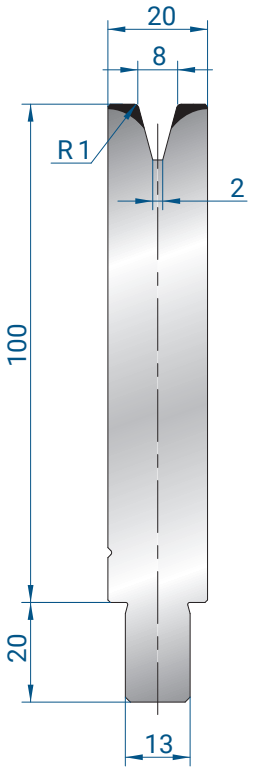

500 mm	8,6 kg
300 mm	5,2 kg
200 mm	3,4 kg
100 mm	1,7 kg
550 mm FRAZ. /SECT.	9,5 kg
50 mm	0,9 kg
45 mm	0,8 kg
40 mm	0,7 kg
35 mm	0,6 kg
30 mm	0,5 kg
25 mm	0,4 kg

3137


Mat = C45
Max T/m = 40
α = 30°

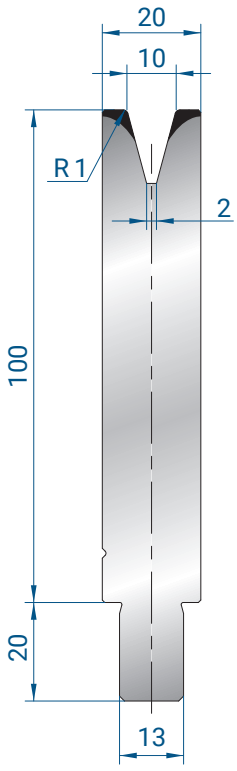

500 mm	8,5 kg
300 mm	5,1 kg
200 mm	3,4 kg
100 mm	1,7 kg
550 mm FRAZ. /SECT.	9,3 kg
50 mm	0,8 kg
45 mm	0,8 kg
40 mm	0,7 kg
35 mm	0,6 kg
30 mm	0,5 kg
25 mm	0,4 kg

3138


Mat = C45
Max T/m = 40
α = 30°

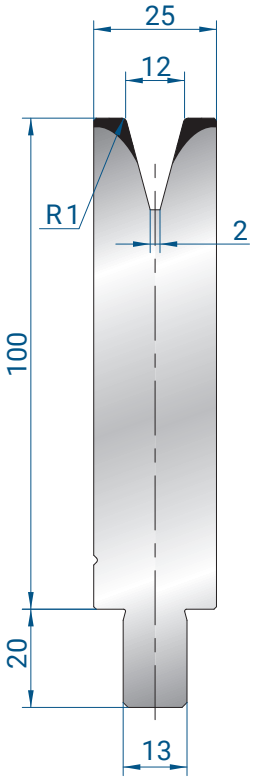

500 mm	10,3 kg
300 mm	6,2 kg
200 mm	4,1 kg
100 mm	2,1 kg
550 mm FRAZ. /SECT.	11,3 kg
50 mm	1,0 kg
45 mm	0,9 kg
40 mm	0,8 kg
35 mm	0,7 kg
30 mm	0,6 kg
25 mm	0,5 kg

3139


Mat = C45
Max T/m = 50
α = 30°

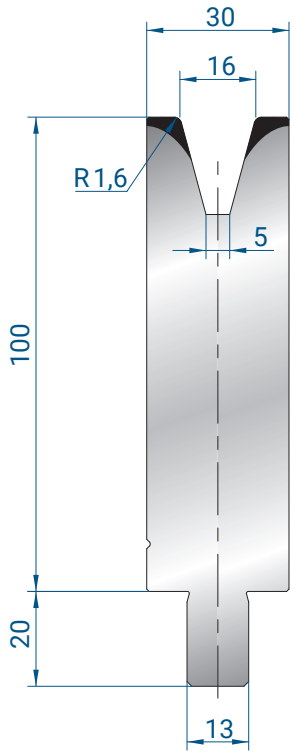

500 mm	11,9 kg
300 mm	7,1 kg
200 mm	4,8 kg
100 mm	2,4 kg
550 mm FRAZ. /SECT.	13,1 kg
50 mm	1,2 kg
45 mm	1,1 kg
40 mm	1,0 kg
35 mm	0,8 kg
30 mm	0,7 kg
25 mm	0,6 kg

3140


Mat = C45
Max T/m = 45
α = 30°

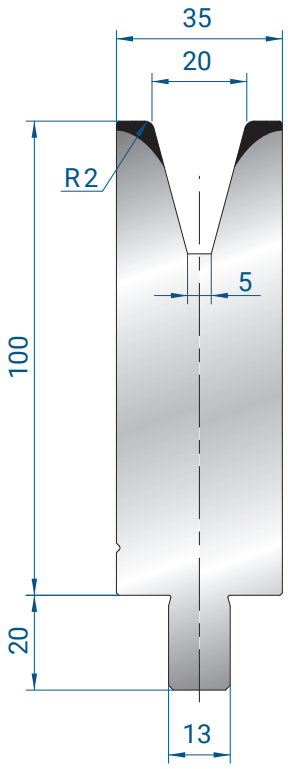


500 mm	13,3 kg
300 mm	8,0 kg
200 mm	5,3 kg
100 mm	2,7 kg
550 mm FRAZ. /SECT.	14,7 kg
50 mm	1,3 kg
45 mm	1,2 kg
40 mm	1,1 kg
35 mm	0,9 kg
30 mm	0,8 kg
25 mm	0,7 kg

3141

Mat = C45
Max T/m = 50
α = 30°

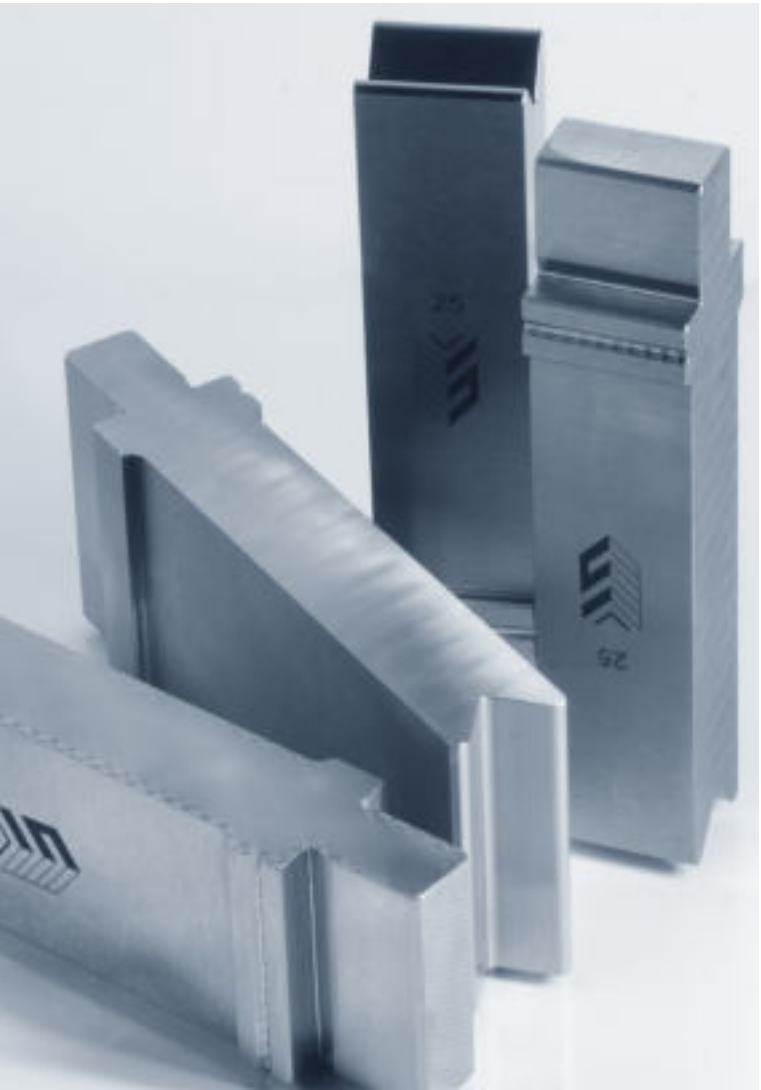


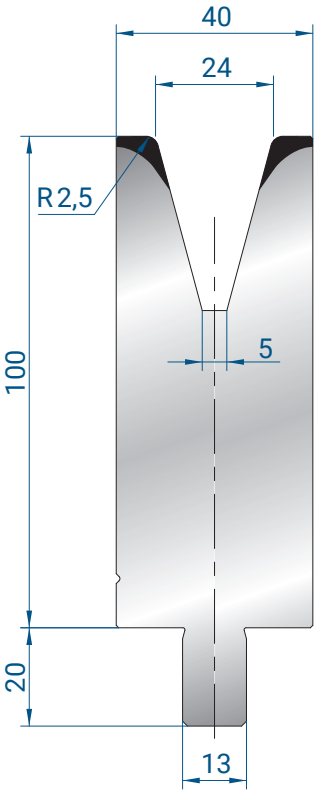

500 mm	14,7 kg
300 mm	8,8 kg
200 mm	5,9 kg
100 mm	2,9 kg
550 mm FRAZ. /SECT.	16,1 kg
50 mm	1,5 kg
45 mm	1,3 kg
40 mm	1,2 kg
35 mm	1,0 kg
30 mm	0,9 kg
25 mm	0,7 kg

3142


Mat = C45
Max T/m = 50
α = 30°

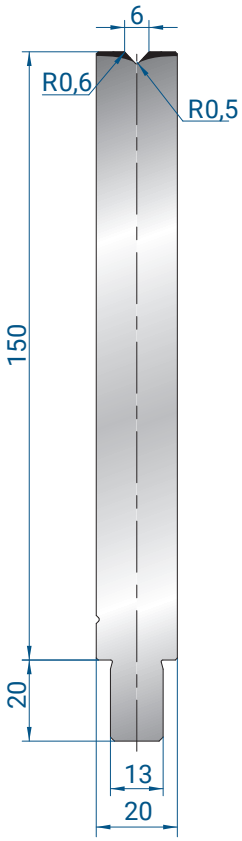

500 mm	12,7 kg
300 mm	7,6 kg
200 mm	5,1 kg
100 mm	2,5 kg
550 mm FRAZ. /SECT.	14,0 kg
50 mm	1,3 kg
45 mm	1,1 kg
40 mm	1,0 kg
35 mm	0,9 kg
30 mm	0,8 kg
25 mm	0,6 kg

3143


Mat = C45
Max T/m = 100
α = 86°

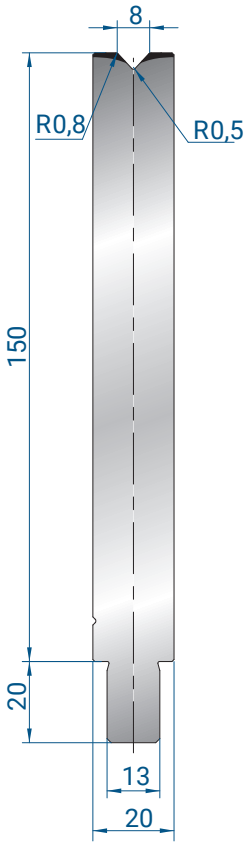


500 mm	12,7 kg
300 mm	7,6 kg
200 mm	5,1 kg
100 mm	2,5 kg
550 mm FRAZ. /SECT.	14,0 kg
50 mm	1,3 kg
45 mm	1,1 kg
40 mm	1,0 kg
35 mm	0,9 kg
30 mm	0,8 kg
25 mm	0,6 kg

3144

Mat = C45
Max T/m = 100
α = 86°

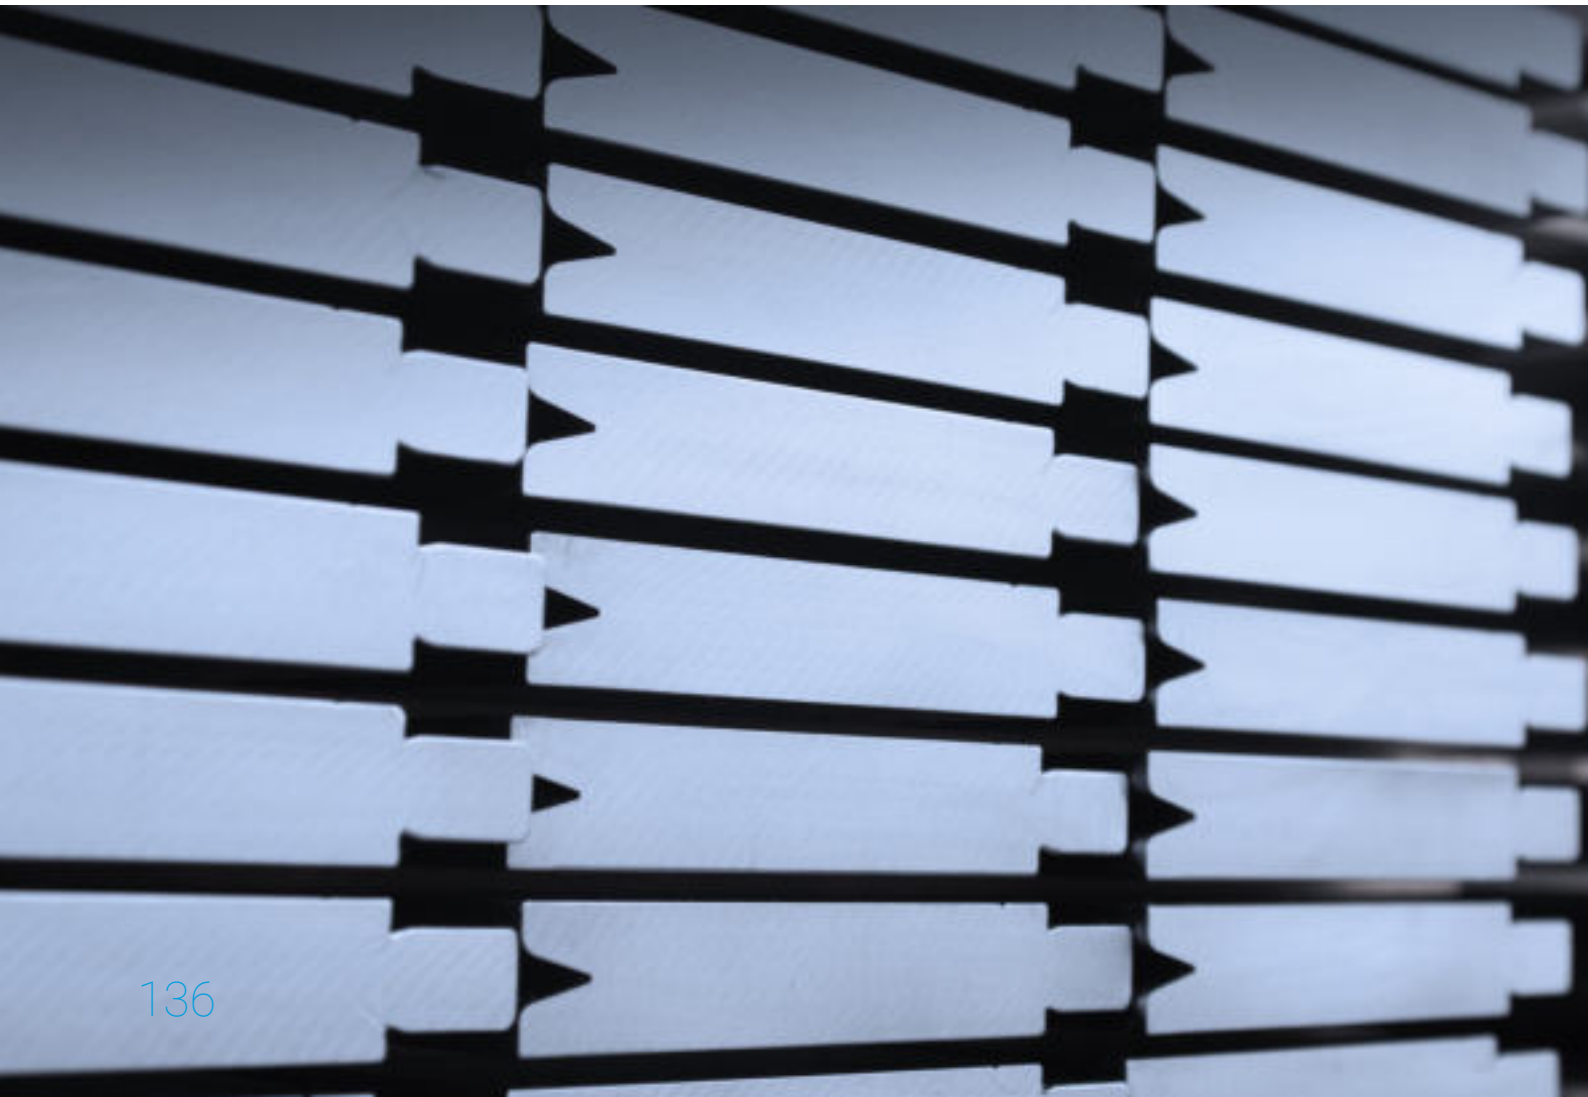


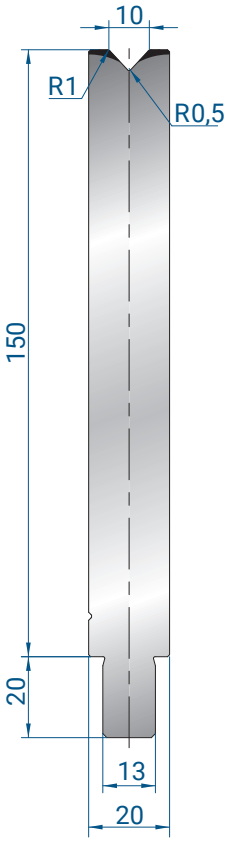

500 mm	12,6 kg
300 mm	7,6 kg
200 mm	5,1 kg
100 mm	2,5 kg
550 mm FRAZ. /SECT.	13,9 kg
50 mm	1,3 kg
45 mm	1,1 kg
40 mm	1,0 kg
35 mm	0,9 kg
30 mm	0,8 kg
25 mm	0,6 kg

3145


Mat = C45
Max T/m = 100
α = 86°

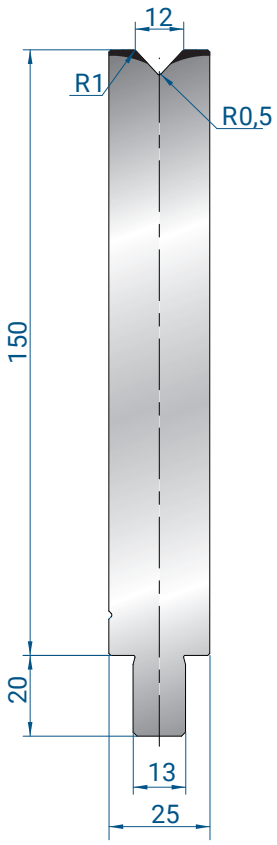

500 mm	15,5 kg
300 mm	9,3 kg
200 mm	6,2 kg
100 mm	3,1 kg
550 mm FRAZ. /SECT.	17,1 kg
50 mm	1,6 kg
45 mm	1,4 kg
40 mm	1,2 kg
35 mm	0,9 kg
30 mm	0,8 kg
25 mm	0,8 kg

3146


Mat = C45
Max T/m = 100
α = 86°

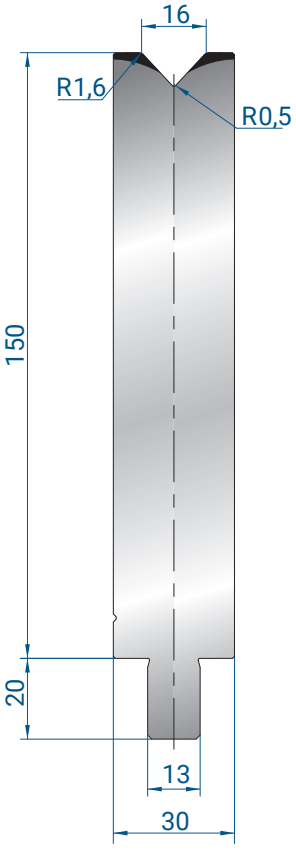

500 mm	18,4 kg
300 mm	11,0 kg
200 mm	7,3 kg
100 mm	3,7 kg
550 mm FRAZ. /SECT.	20,2 kg
50 mm	1,8 kg
45 mm	1,7 kg
40 mm	1,5 kg
35 mm	1,3 kg
30 mm	1,1 kg
25 mm	0,9 kg

3147

Mat = C45
Max T/m = 100
α = 86°

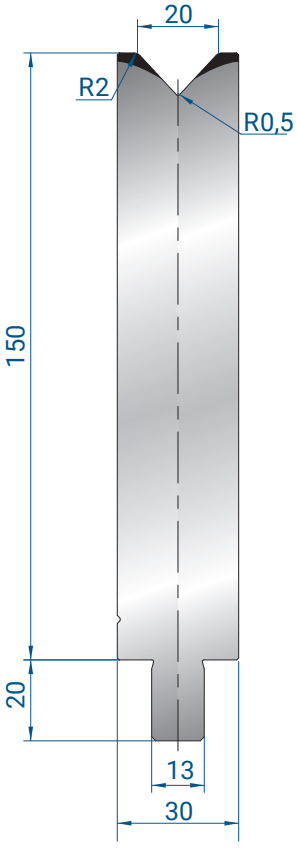


500 mm	18,2 kg
300 mm	10,9 kg
200 mm	7,3 kg
100 mm	3,6 kg
550 mm FRAZ. /SECT.	20,0 kg
50 mm	1,8 kg
45 mm	1,6 kg
40 mm	1,5 kg
35 mm	1,3 kg
30 mm	1,1 kg
25 mm	0,9 kg

3148

Mat = C45
Max T/m = 100
α = 86°

MATRICI 1V H150 - 86° / 1V DIES H150 - 86° C45



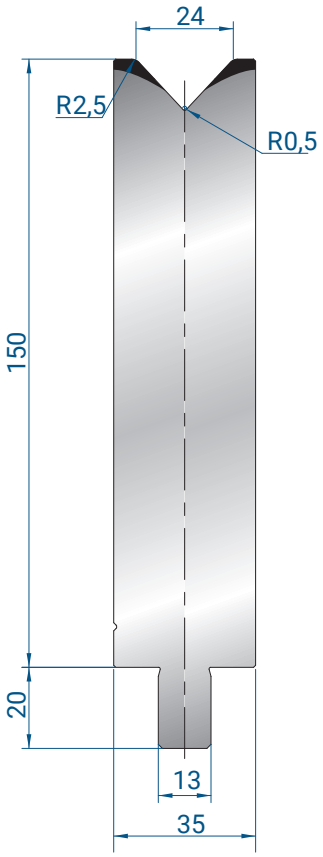


500 mm	21,0 kg
300 mm	12,6 kg
200 mm	8,4 kg
100 mm	4,2 kg
550 mm FRAZ. /SECT.	23,1 kg
50 mm	2,1 kg
45 mm	1,9 kg
40 mm	1,7 kg
35 mm	1,5 kg
30 mm	1,3 kg
25 mm	1,0 kg

3149

Mat = C45
Max T/m = 100
α = 86°


MATRICI 1V H150 - 30° / 1V DIES H150 - 30° C45

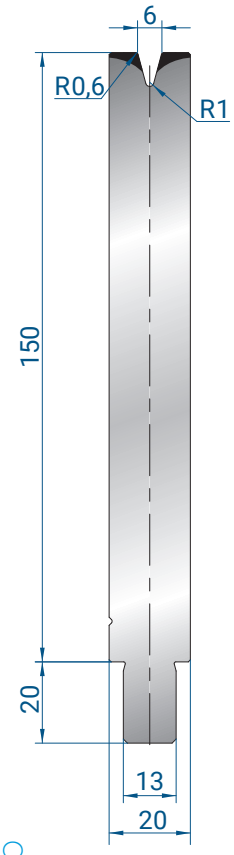

500 mm	12,6 kg
300 mm	7,6 kg
200 mm	5,1 kg
100 mm	2,5 kg
550 mm FRAZ. /SECT.	13,9 kg
50 mm	1,3 kg
45 mm	1,1 kg
40 mm	1,0 kg
35 mm	0,9 kg
30 mm	0,8 kg
25 mm	0,6 kg

3150


Mat = C45
Max T/m = 50
α = 30°

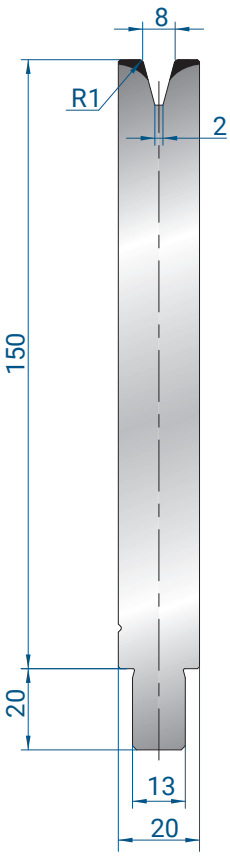

500 mm	12,5 kg
300 mm	7,5 kg
200 mm	5,0 kg
100 mm	2,5 kg
550 mm FRAZ. /SECT.	13,8 kg
50 mm	1,3 kg
45 mm	1,2 kg
40 mm	1,0 kg
35 mm	0,9 kg
30 mm	0,8 kg
25 mm	0,7 kg

3151


Mat = C45
Max T/m = 40
α = 30°

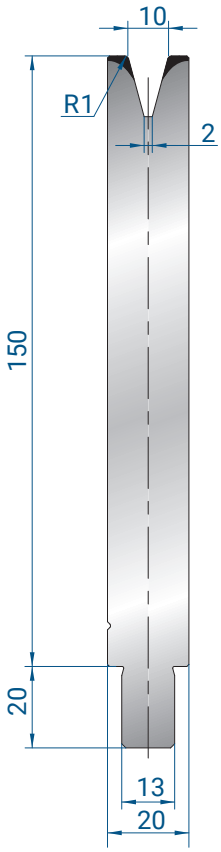

500 mm	12,4 kg
300 mm	7,4 kg
200 mm	5,0 kg
100 mm	2,5 kg
550 mm FRAZ. /SECT.	13,6 kg
50 mm	1,2 kg
45 mm	1,1 kg
40 mm	1,0 kg
35 mm	0,9 kg
30 mm	0,7 kg
25 mm	0,6 kg

3152


Mat = C45
Max T/m = 40
α = 30°

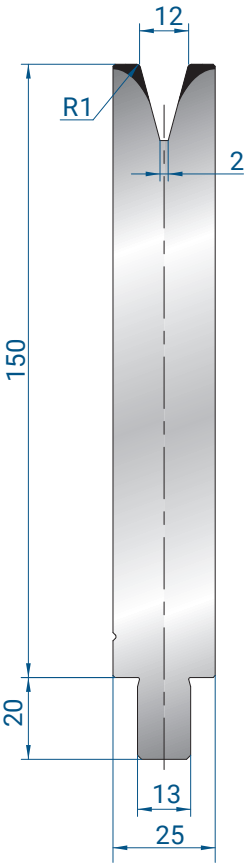

500 mm	15,2 kg
300 mm	9,1 kg
200 mm	6,1 kg
100 mm	3,0 kg
550 mm FRAZ. /SECT.	16,7 kg
50 mm	1,5 kg
45 mm	1,4 kg
40 mm	1,2 kg
35 mm	1,1 kg
30 mm	0,9 kg
25 mm	0,8 kg

3153


Mat = C45
Max T/m = 50
α = 30°

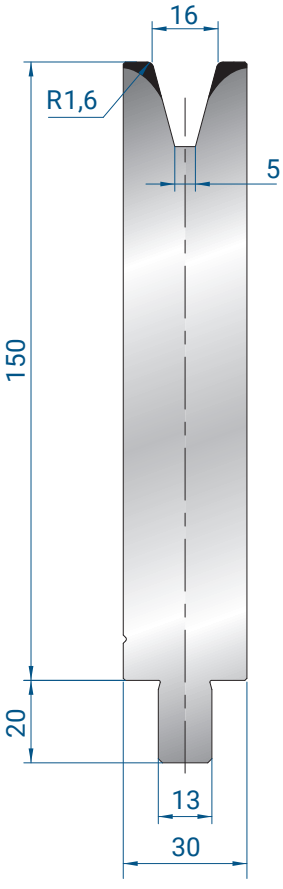

500 mm	17,8 kg
300 mm	10,7 kg
200 mm	7,1 kg
100 mm	3,6 kg
550 mm FRAZ. /SECT.	19,6 kg
50 mm	1,8 kg
45 mm	1,6 kg
40 mm	1,4 kg
35 mm	1,2 kg
30 mm	1,1 kg
25 mm	0,9 kg

3154


Mat = C45
Max T/m = 45
α = 30°

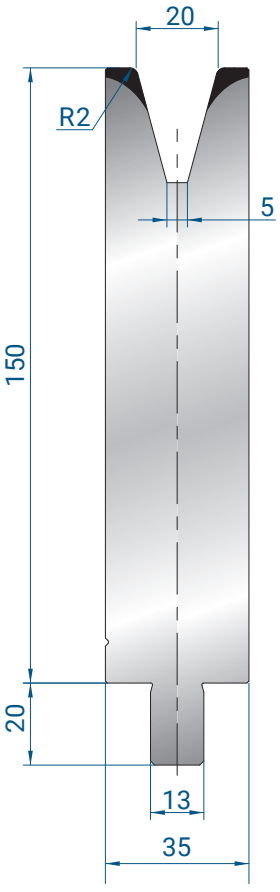

500 mm	20,2 kg
300 mm	12,1 kg
200 mm	8,1 kg
100 mm	4,0 kg
550 mm FRAZ. /SECT.	22,2 kg
50 mm	2,0 kg
45 mm	1,8 kg
40 mm	1,6 kg
35 mm	1,4 kg
30 mm	1,2 kg
25 mm	1,0 kg

3155

Mat = C45
Max T/m = 50
α = 30°

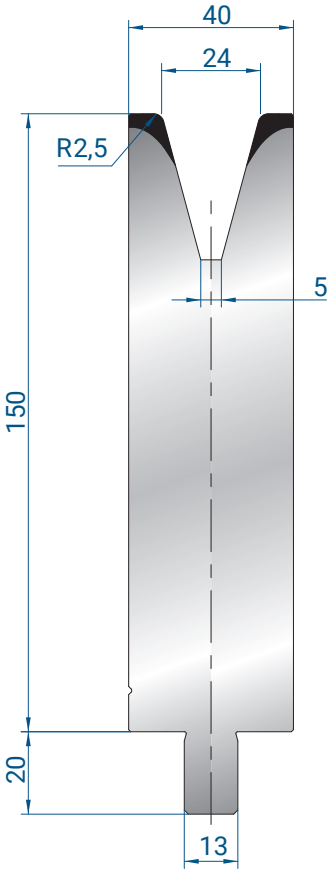

500 mm	22,5 kg
300 mm	13,5 kg
200 mm	9,0 kg
100 mm	4,5 kg
550 mm FRAZ. /SECT.	24,7 kg
50 mm	2,2 kg
45 mm	2,0 kg
40 mm	1,8 kg
35 mm	1,6 kg
30 mm	1,3 kg
25 mm	1,1 kg

3156

Mat = C45
Max T/m = 50
α = 30°



ACCESSORIO PIEGASCHIACCIA
FLATTENING HEMMING TOOLS ACCESSORY





FORATURA MATRICI NON COMPRESA, PER UN PREVENTIVO FARE RIFERIMENTO AL CODICE 8108.
PERFORATION OF DIES NOT INCLUDED, FOR A SUMMARY PLEASE REFER TO CODE 8108.


500 mm	13,0 kg
300 mm	7,8 kg
200 mm	5,2 kg
100 mm	2,6 kg
550 mm FRAZ. /SECT.	13,0 kg
50 mm	1,0 kg
45 mm	1,0 kg
40 mm	1,0 kg
35 mm	1,0 kg
30 mm	1,0 kg
25 mm	1,0 kg


4330


Mat = C45
Max T/m = 40
α = 30°

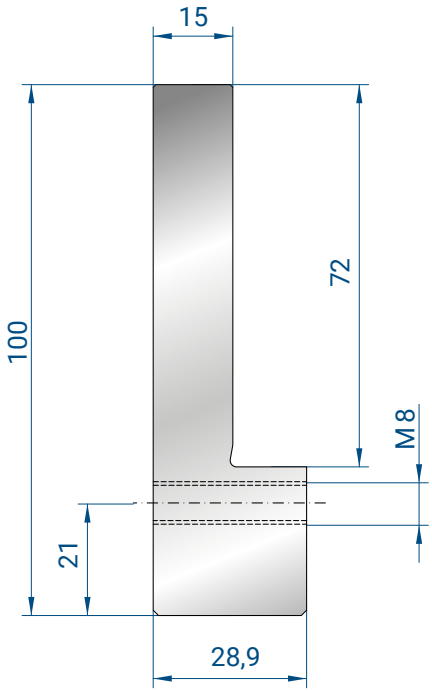

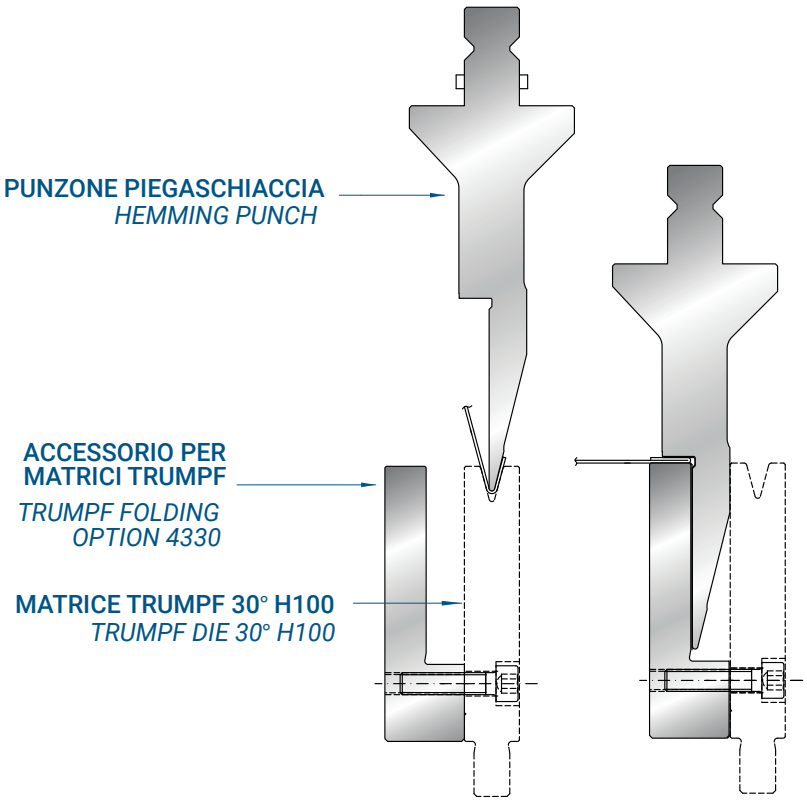

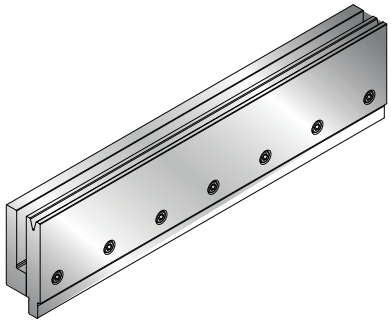

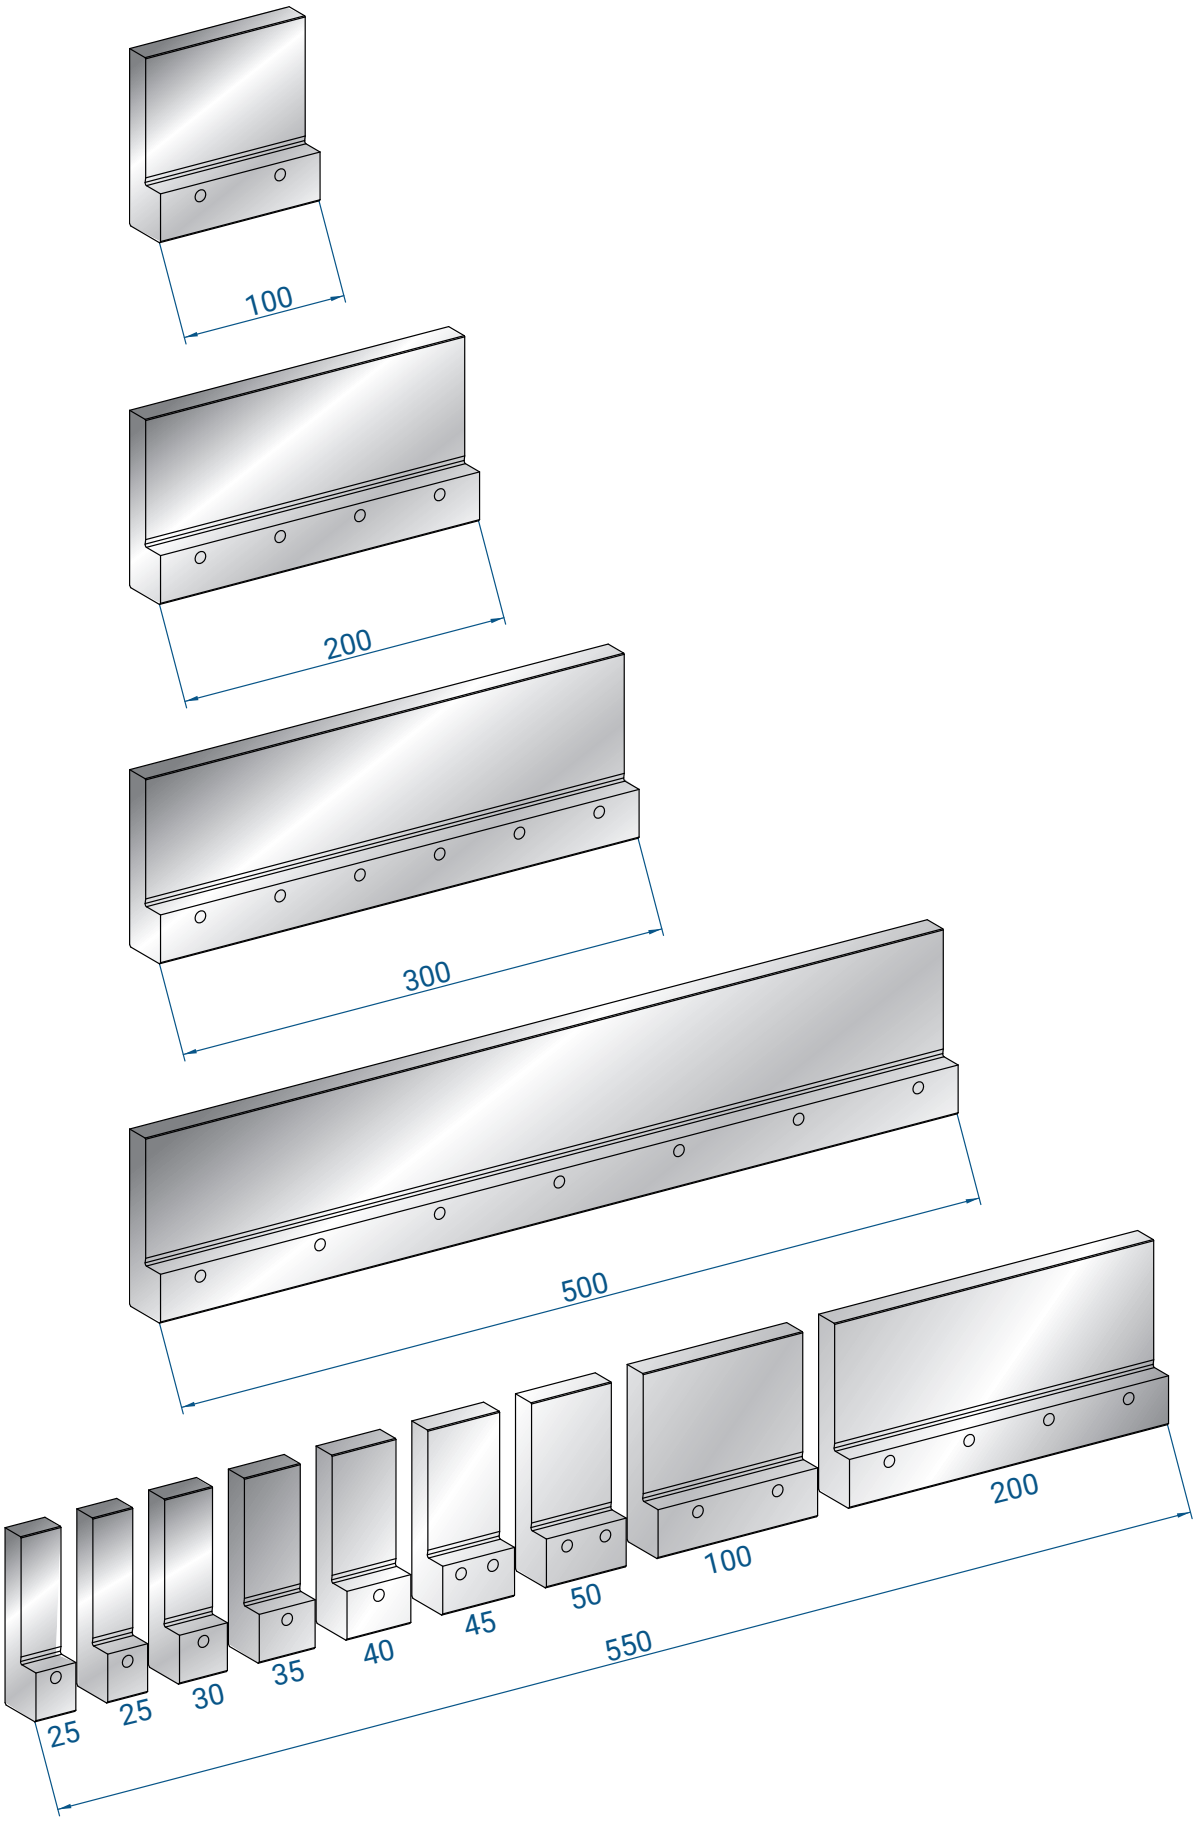
100
200
300
500
200
100
50
45
40
35
30
25
25
550

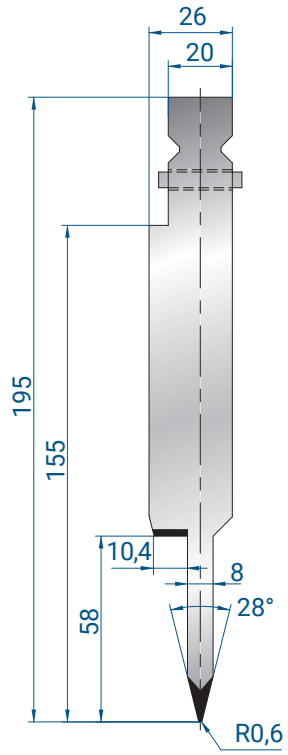


1249

Mat = C45
bonificato / *tempered*
Max T/m = 80

500 mm	14,3 kg
550 mm FRAZ. /SECT.	14,0 kg

Spessore / *Thickness*


Max 1,2 mm
Ferro / *Mild steel*

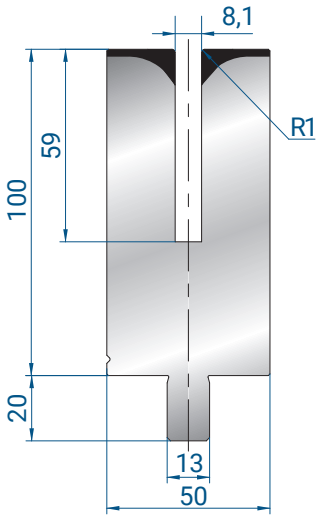

3157

Mat = C45
bonificato / *tempered*
Max T/m = 50

500 mm	18,7 kg
550 mm FRAZ. /SECT.	20,6 kg
100 mm	3,7 kg

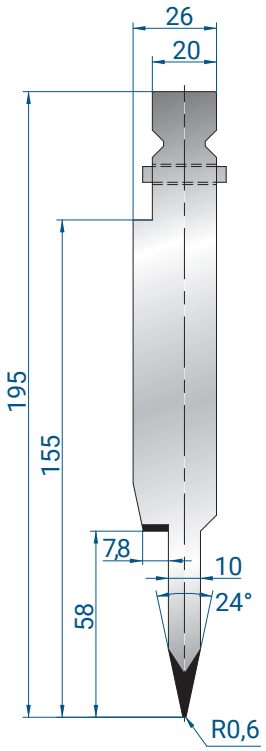


1250

500 mm	14,6 kg
550 mm FRAZ. /SECT.	14,3 kg

Mat = C45
bonificato / *tempered*
Max T/m = 50

Spessore / *Thickness*


Max 1,5 mm
Ferro / *Mild steel*

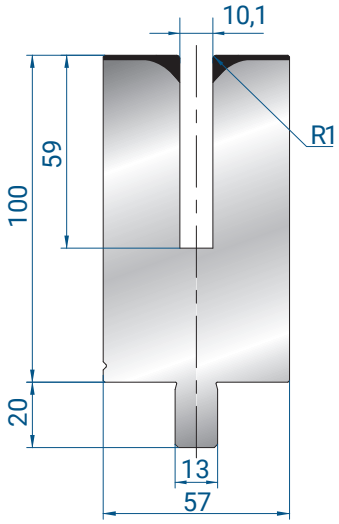

3174

500 mm	21,0 kg
550 mm FRAZ. /SECT.	23,1 kg
100 mm	4,2 kg

Mat = C45
bonificato / *tempered*
Max T/m = 50

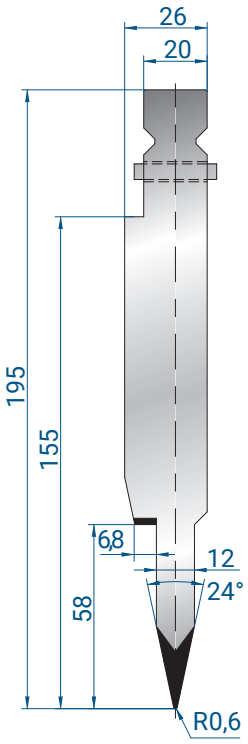


1251

Mat = C45
bonificato / *tempered*
Max T/m = 50

500 mm	14,9 kg
550 mm FRAZ. /SECT.	14,6 kg

Spessore / *Thickness*

Max 1,5 mm
Ferro / *Mild steel*

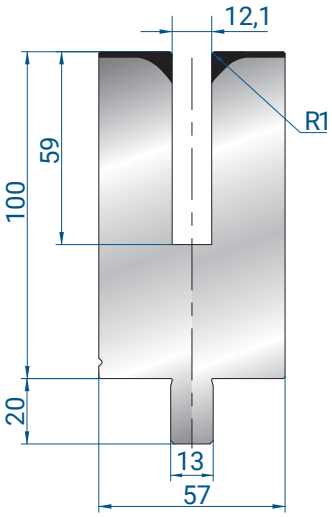

3175

Mat = C45
bonificato / *tempered*
Max T/m = 50

500 mm	20,5 kg
550 mm FRAZ. /SECT.	22,6 kg
100 mm	4,1 kg

EUROSTAMP TOOLING
the Italian excellence

WILA STYLE

Gli utensili superiori e inferiori elencati in questa sezione possono essere installati sulle piegatrici:

Trumpf, LVD , Darley, RPC Piegatrici,
Safan e su altre piegatrici
equipaggiate con Sistema NSCL.

Questi utensili possono essere installati anche su altre piegatrici tramite adattatori superiori e inferiori.


The upper and lower tooling listed in this section could be installed on the following press brakes:


Trumpf, Darley, RPC Piegatrici,
Safan, and other press brakes
equipped with Wila style clamping system.

They could even be installed on press brakes equipped with different clamping system by choosing the appropriate upper and lower adapters.



VEDI PAG. 158 PER SCHEMA FRAZIONATURA MATRICI
SEE PAGE 158 FOR DIE SEGMENTATION DIAGRAM

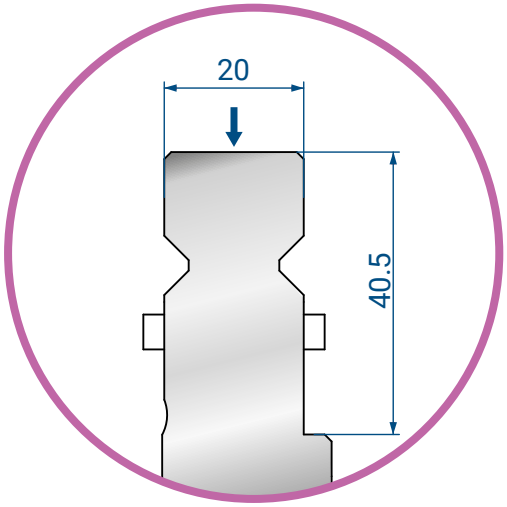


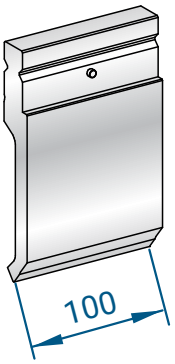





IL PULSANTE DI SICUREZZA VIENE MONTATO STANDARD SU TUTTI GLI UTENSILI CON PESO FINO A 12,5 KG

THE SAFETY BUTTON IS A STANDARD SUPPLY ON ALL TOOLING UP TO 12.5 KG WEIGH

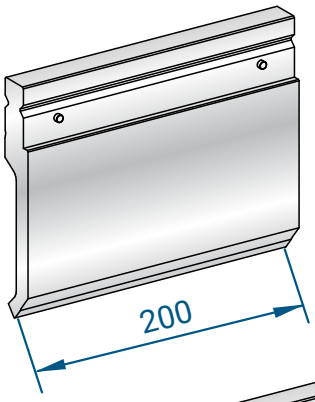


LUNGHEZZE STANDARD
STANDARD LENGTHS

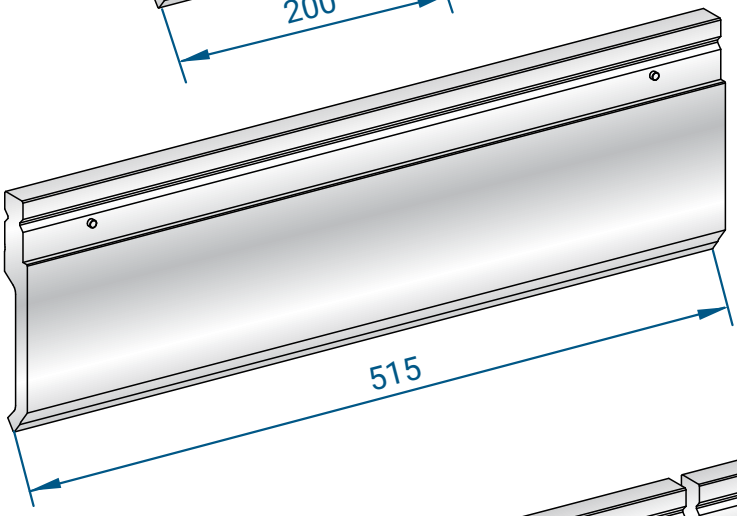

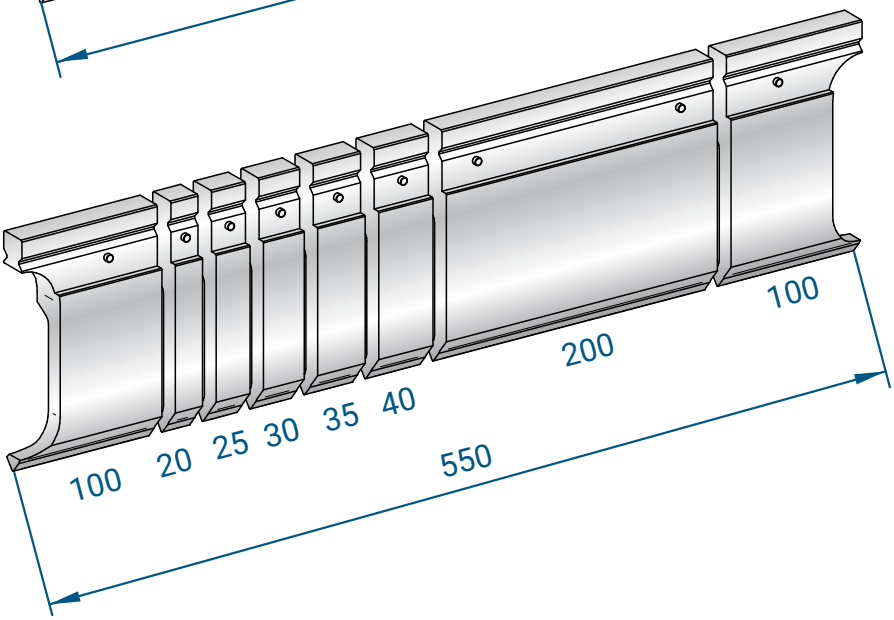


FRESATURA SCARPETTA
MILLED HORN

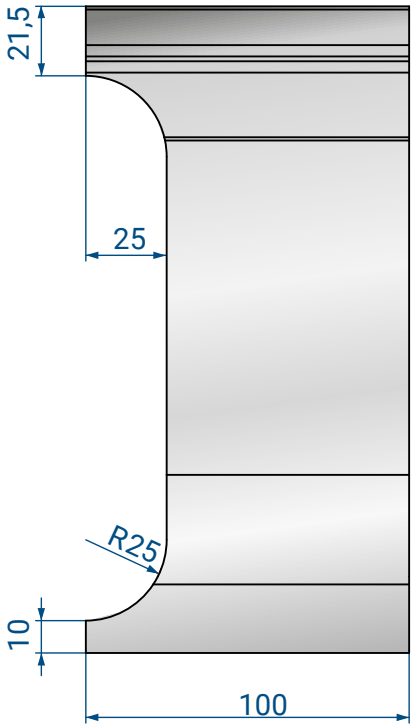

MODIFICHE A RICHIESTA / MODIFICATIONS ON REQUEST


SCARPETTE SPECIALI
SPECIAL HORNS

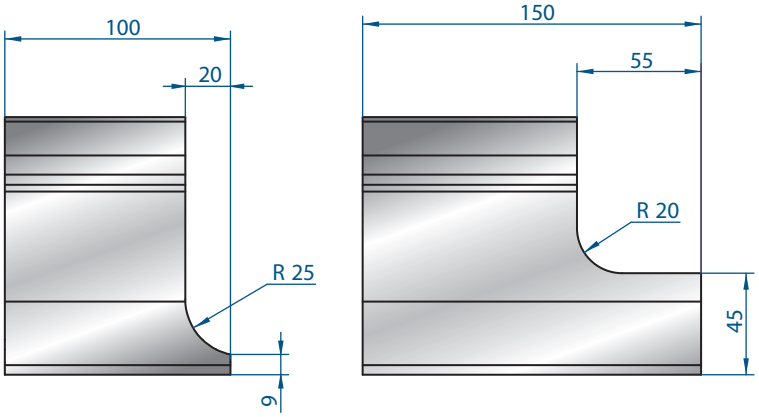


TAGLI A RICHIESTA
SPECIAL SEGMENTATION



MODIFICA RAGGIO
RADIUS MODIFICATION

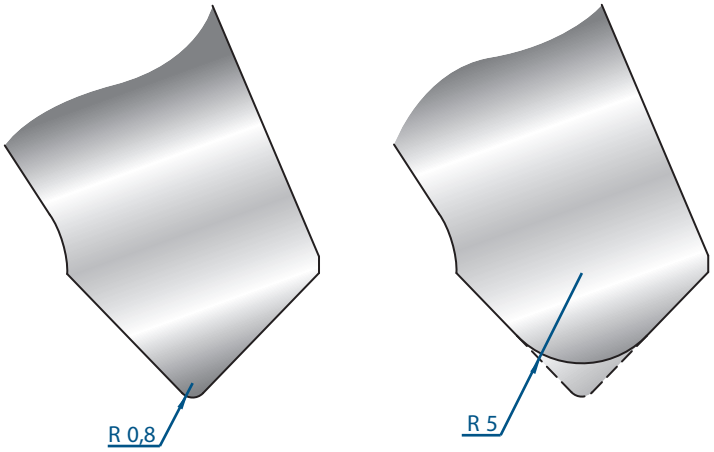


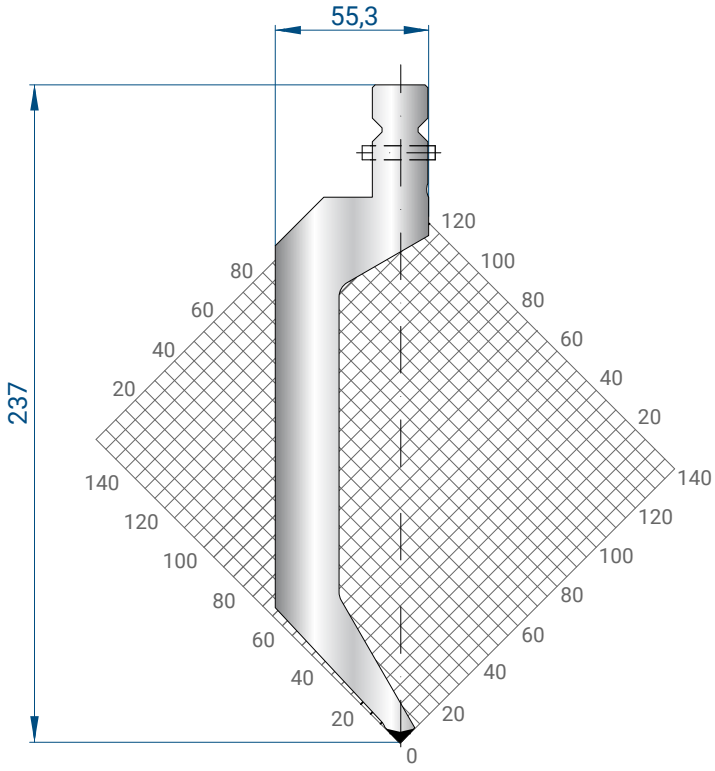

1324

Mat = 42 CrMo4
bonificato / *tempered*
H = 237.00
Max T/m = 65
α = 86°
R = 1


515 mm	22,5 kg
200 mm	8,7 kg
100 mm	4,4 kg
550 mm FRAZ. / SECT.	22,3 kg

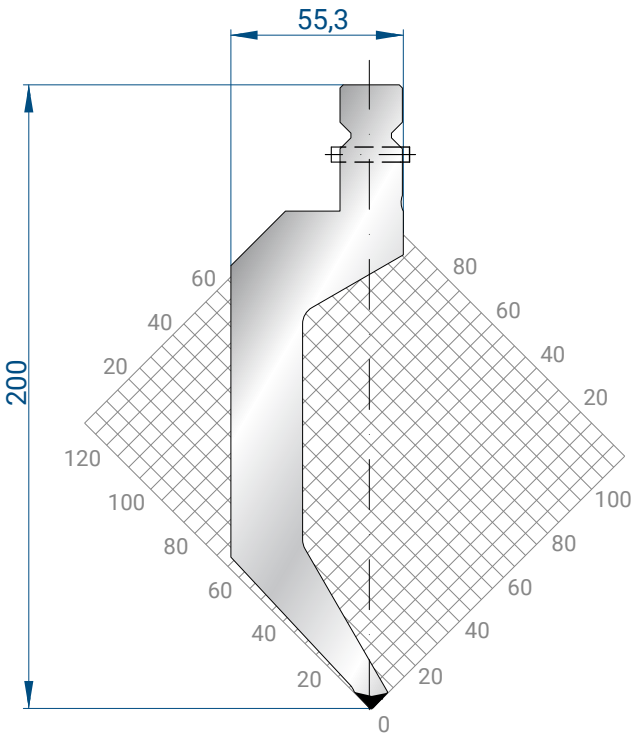

1323

Mat = 42 CrMo4
bonificato / *tempered*
H = 200.00
Max T/m = 65
α = 86°
R = 1


515 mm	19,1 kg
200 mm	7,4 kg
100 mm	3,7 kg
550 mm FRAZ. / SECT.	19,0 kg

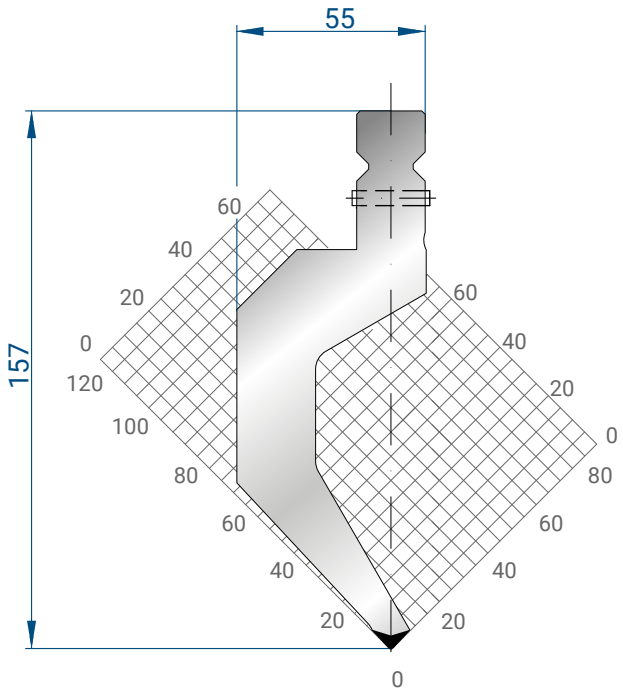

1328

Mat = 42 CrMo4
bonificato / *tempered*
H = 157.00
Max T/m = 70
α = 86°
R = 1


515 mm	15,0 kg
200 mm	5,8 kg
100 mm	2,9 kg
550 mm FRAZ. / SECT.	14,9 kg

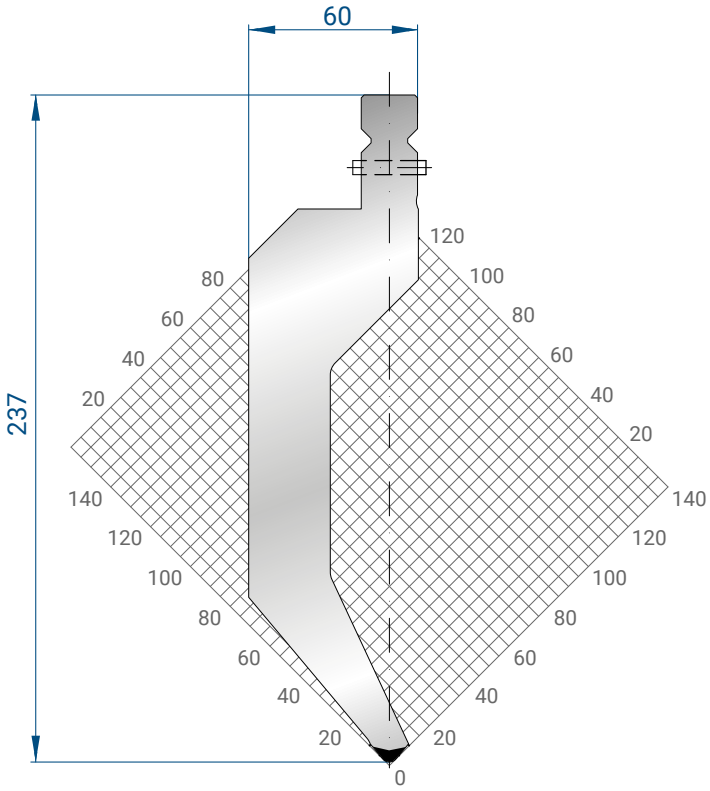

1333

Mat = 42 CrMo4
bonificato / *tempered*
H = 237.00
Max T/m = 100
α = 80°
R = 3

515 mm	28,9 kg
200 mm	11,2 kg
100 mm	5,6 kg
550 mm FRAZ. / SECT.	28,4 kg

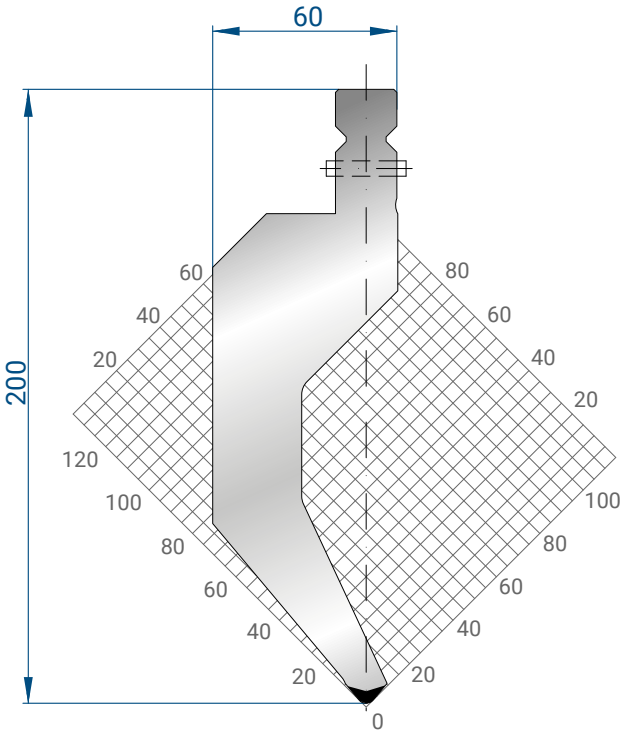


1332

Mat = 42 CrMo4
bonificato / *tempered*
H = 200.00
Max T/m = 100
α = 80°
R = 3

515 mm	24,6 kg
200 mm	9,6 kg
100 mm	4,8 kg
550 mm FRAZ. / SECT.	24,1 kg




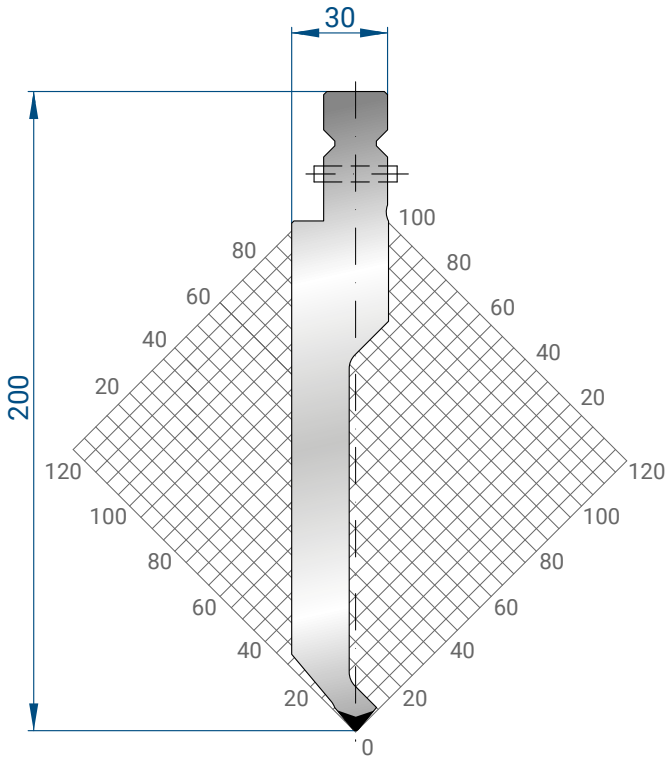

1330

Mat = 42 CrMo4
bonificato / *tempered*
H = 200.00
Max T/m = 80
α = 80°
R = 1

515 mm	16,0 kg
200 mm	6,2 kg
100 mm	3,1 kg
550 mm FRAZ. / SECT.	15,8 kg

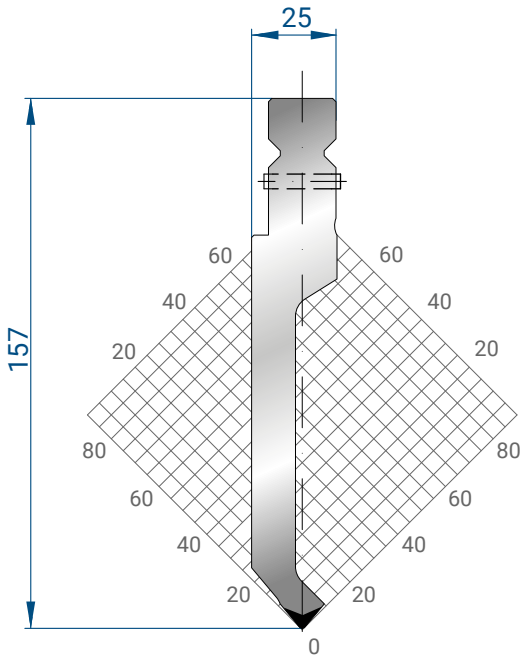


1329

Mat = 42 CrMo4
bonificato / *tempered*
H = 157.00
Max T/m = 100
α = 80°
R = 1

515 mm	9,9 kg
200 mm	3,8 kg
100 mm	1,9 kg
550 mm FRAZ. / SECT.	9,8 kg



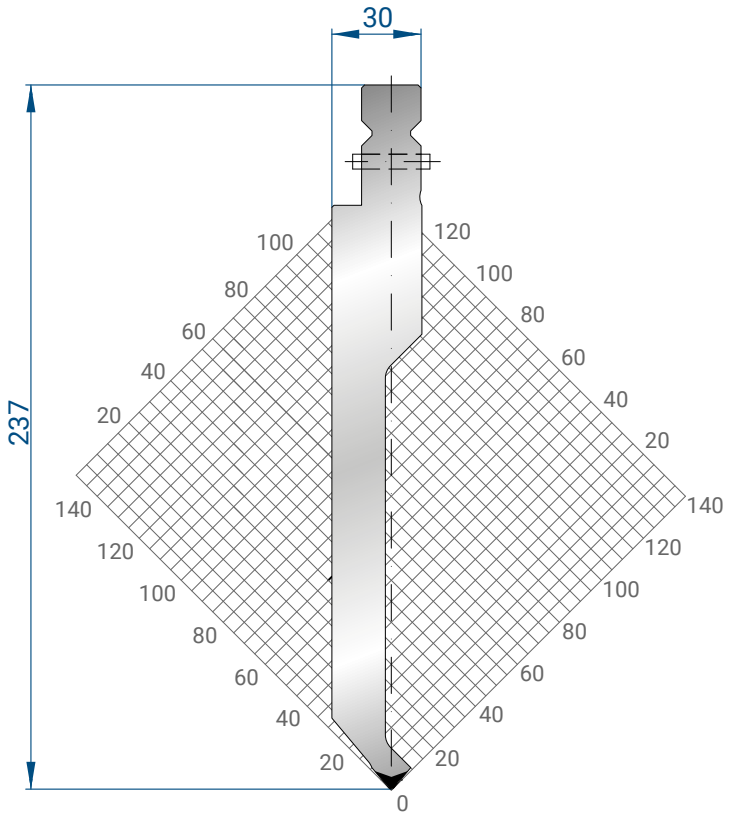


1331

Mat = 42 CrMo4
bonificato / *tempered*
H = 237.00
Max T/m = 80
α = 80°
R = 1

515 mm	19,3 kg
200 mm	7,5 kg
100 mm	3,7 kg
550 mm FRAZ. / SECT.	17,6 kg




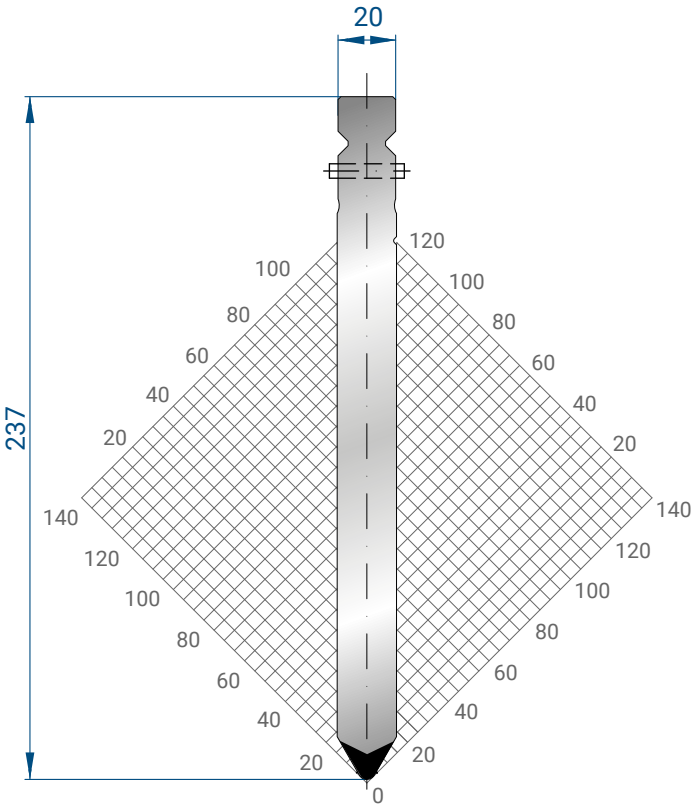

1336

Mat = 42 CrMo4
bonificato / *tempered*
H = 237.00
Max T/m = 160
α = 60°
R = 3


515 mm	19,0 kg
200 mm	7,4 kg
100 mm	3,7 kg
550 mm FRAZ. / SECT.	18,7 kg

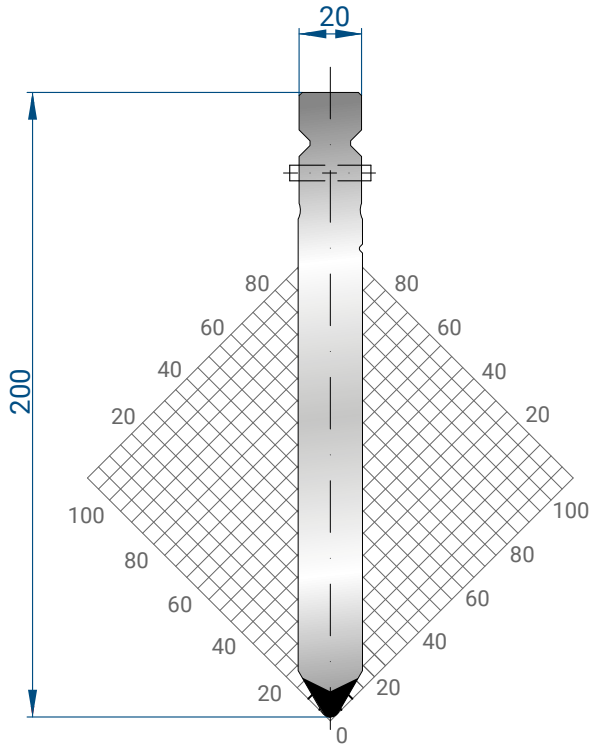

1335

Mat = 42 CrMo4
bonificato / *tempered*
H = 200.00
Max T/m = 160
α = 60°
R = 3


515 mm	15,9 kg
200 mm	6,2 kg
100 mm	3,1 kg
550 mm FRAZ. / SECT.	15,7 kg

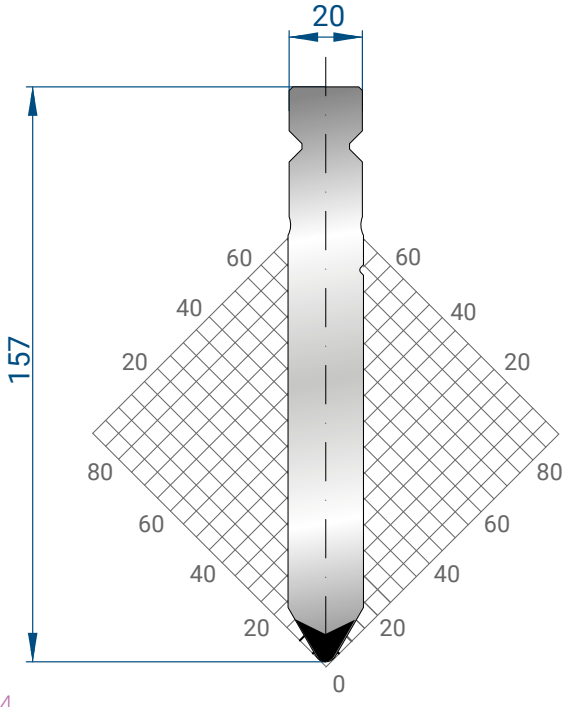

1334

Mat = 42 CrMo4
bonificato / *tempered*
H = 157.00
Max T/m = 160
α = 60°
R = 3


515 mm	12,3 kg
200 mm	4,8 kg
100 mm	2,4 kg
550 mm FRAZ. / SECT.	12,2 kg

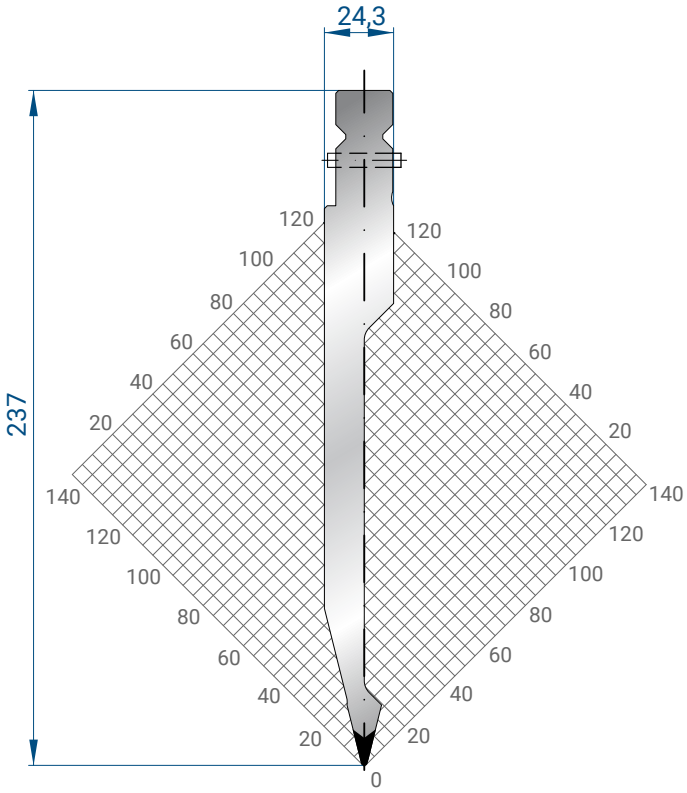

1327

Mat = 42 CrMo4
bonificato / *tempered*
H = 237.00
Max T/m = 80
α = 28°
R = 1

515 mm	14,7 kg
200 mm	5,7 kg
100 mm	2,85 kg
550 mm FRAZ. / SECT.	14,7 kg

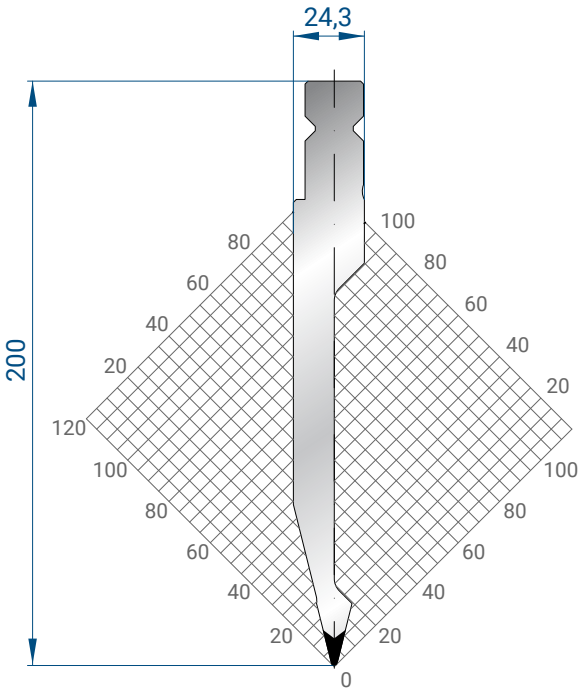


1326

Mat = 42 CrMo4
bonificato / *tempered*
H = 200.00
Max T/m = 80
α = 28°
R = 1

515 mm	12,1 kg
200 mm	4,8 kg
100 mm	2,4 kg
550 mm FRAZ. / SECT.	12,1 kg




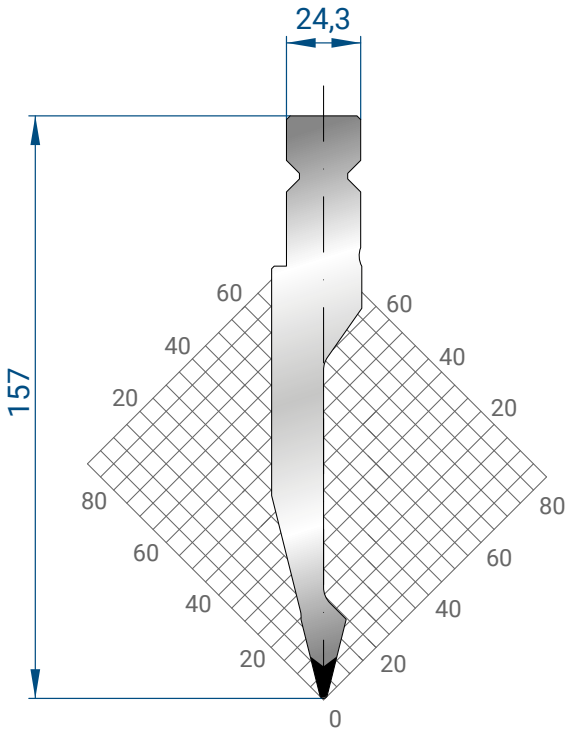

1337

Mat = 42 CrMo4
bonificato / *tempered*
H = 157.00
Max T/m = 100
α = 28°
R = 1

515 mm	9,4 kg
200 mm	3,7 kg
100 mm	1,8 kg
550 mm FRAZ. / SECT.	9,4 kg

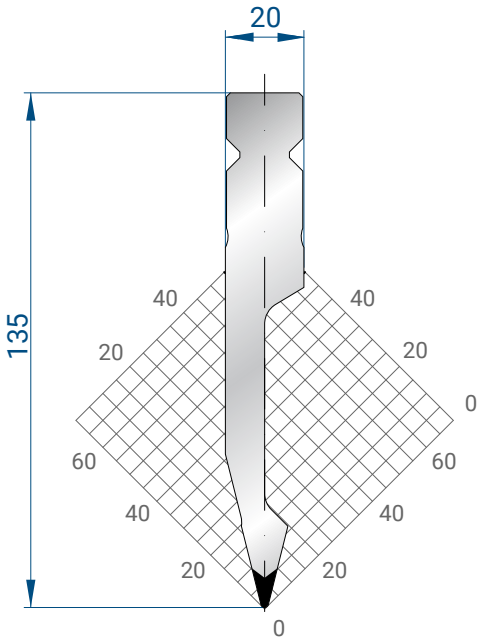

1325

Mat = 42 CrMo4
bonificato / *tempered*
H = 135.00
Max T/m = 100
α = 28°
R = 1


515 mm	7,2 kg
200 mm	2,8 kg
100 mm	1,4 kg
550 mm FRAZ. / SECT.	7,3 kg








VEDI PAG. 148 PER SCHEMA FRAZIONATURA PUNZONI
SEE PAGE 148 FOR PUNCHES SEGMENTATION DIAGRAM

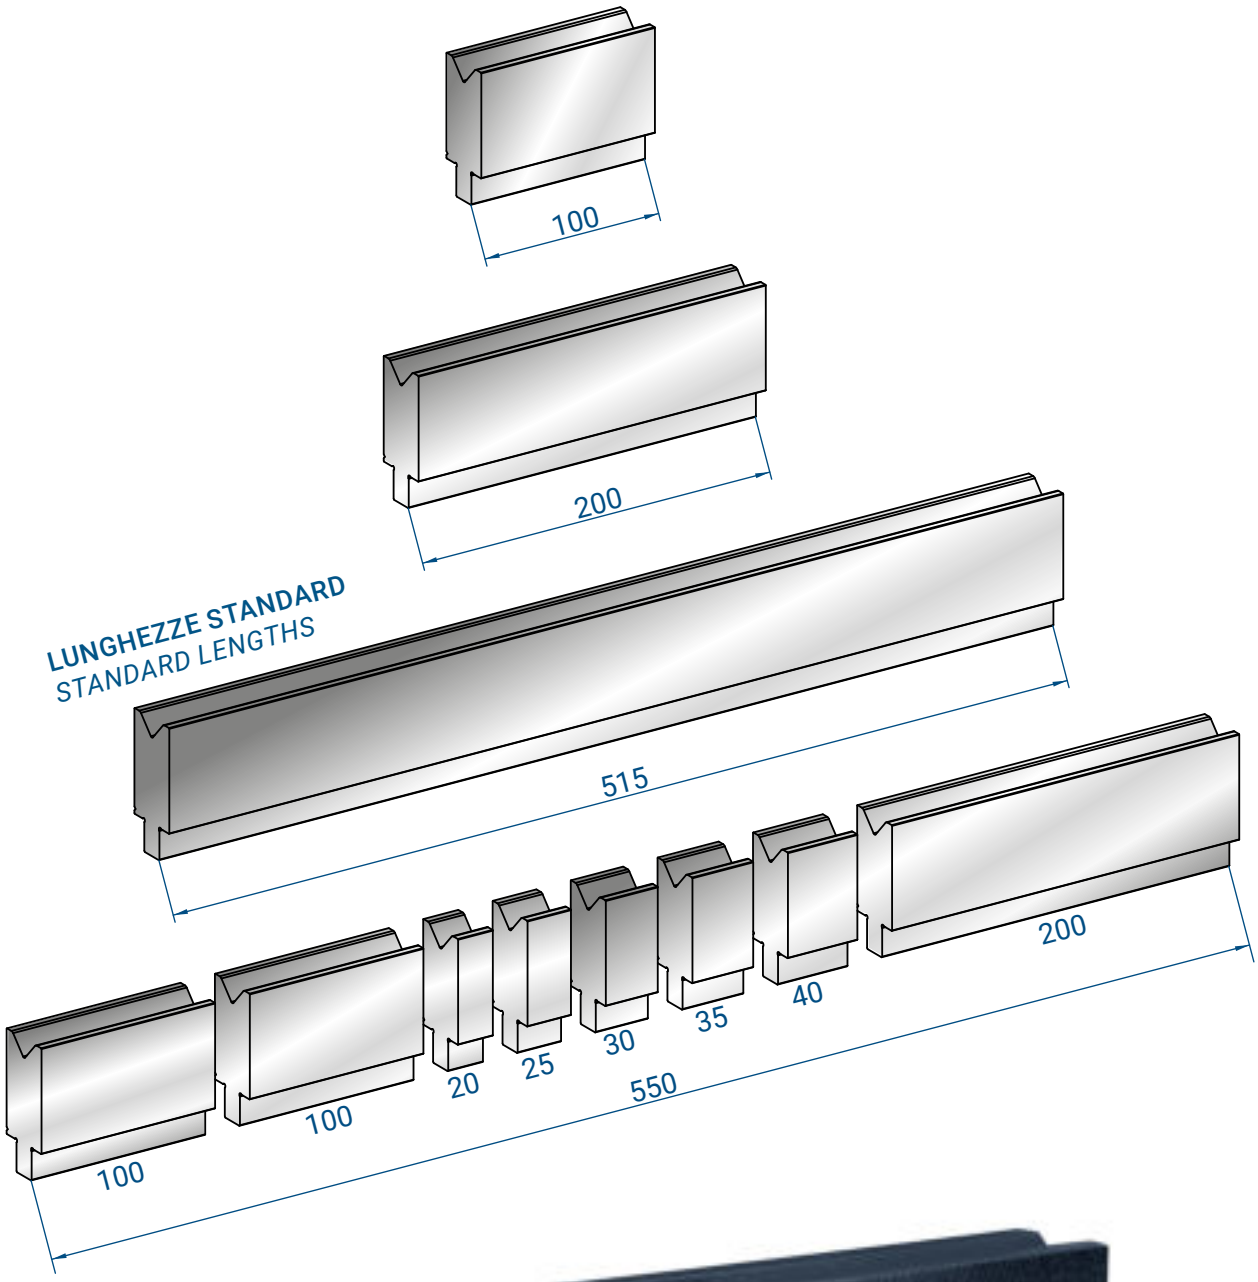


LUNGHEZZE STANDARD
STANDARD LENGTHS




MODIFICHE A RICHIESTA
MODIFICATIONS ON REQUEST

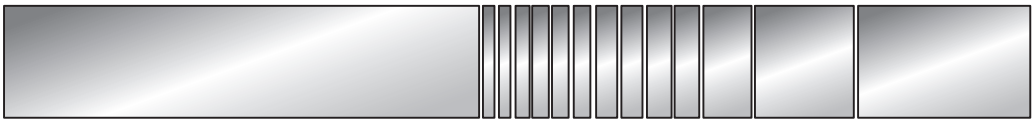


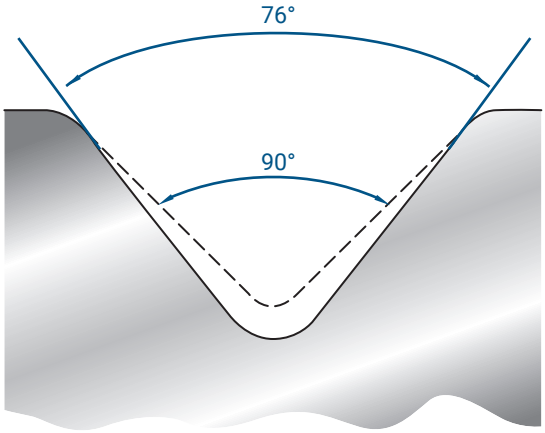


MODIFICA ANGOLO
ANGLE MODIFICATION

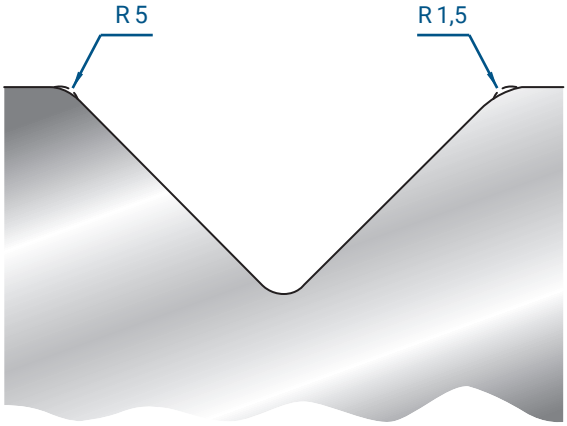

MODIFICA RAGGIO
RADIUS MODIFICATION

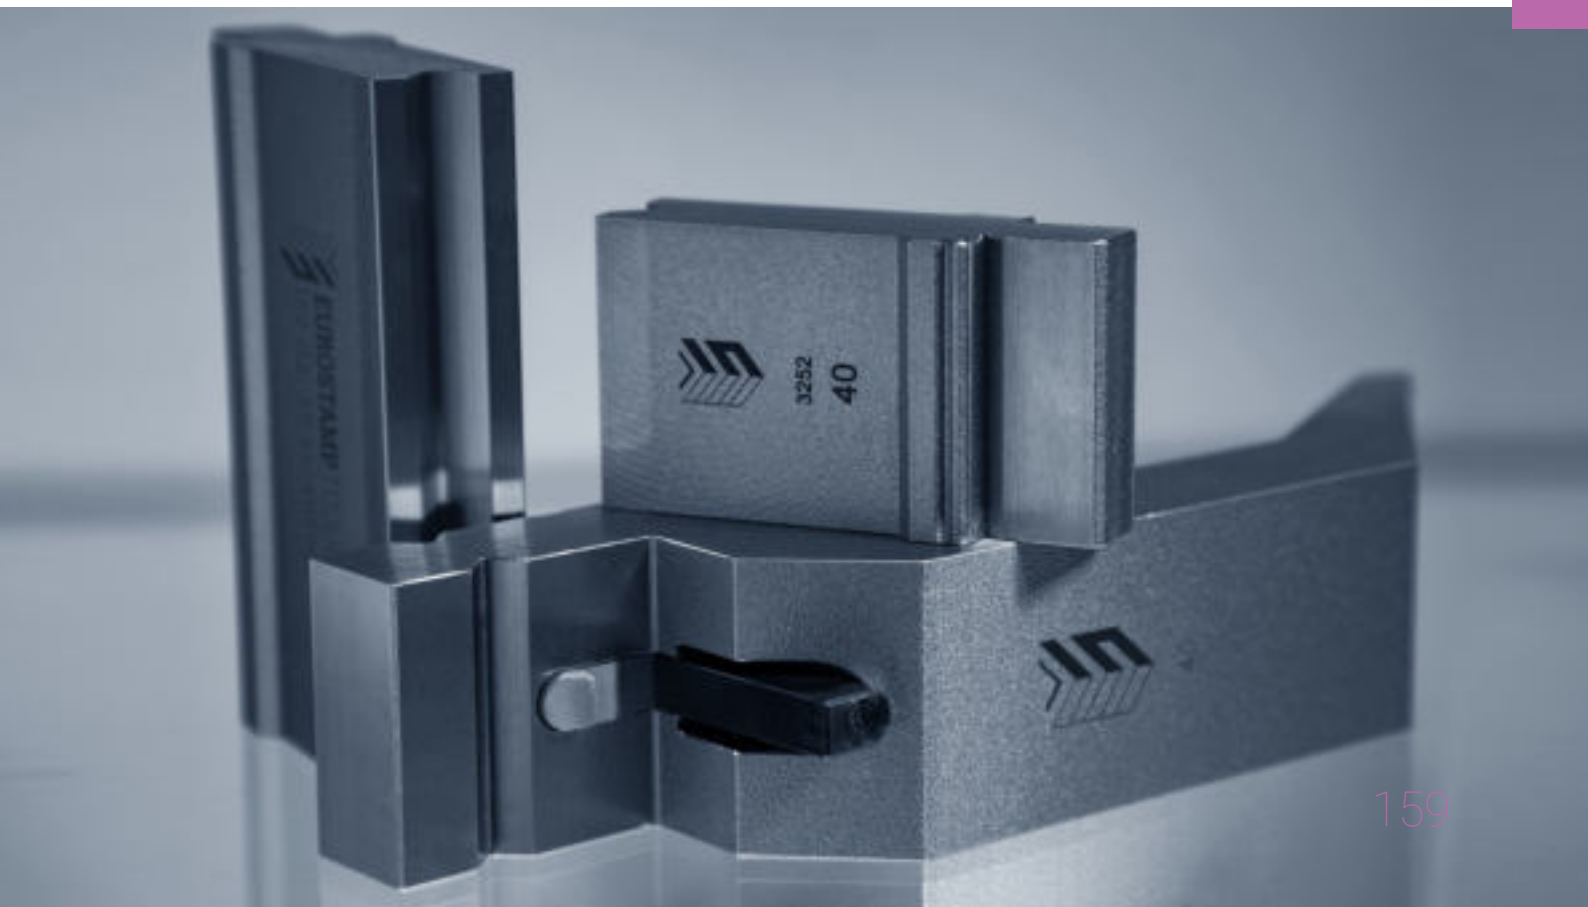


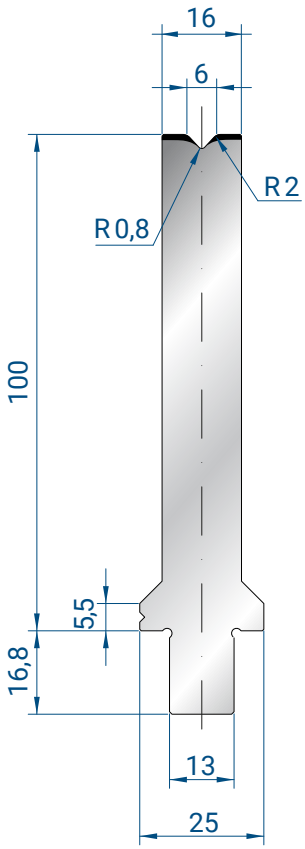

3270

Mat = 42 CrMo4
bonificato / *tempered*
H = 100.00
Max T/m = 120
α = 86°


515 mm	7,6 kg
200 mm	3,0 kg
100 mm	1,5 kg
550 mm FRAZ. / SECT	8,1 kg

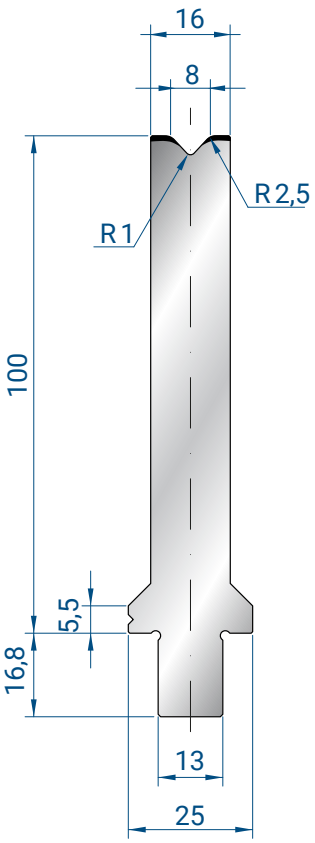

3271

Mat = 42 CrMo4
bonificato / *tempered*
H = 100.00
Max T/m = 120
α = 86°

515 mm	7,6 kg
200 mm	3,0 kg
100 mm	1,5 kg
550 mm FRAZ. / SECT	8,1 kg

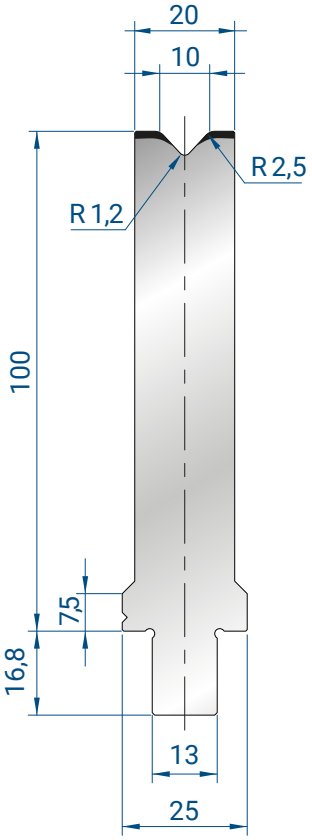


3272

Mat = 42 CrMo4
bonificato / *tempered*
H = 100.00
Max T/m = 120
α = 86°

515 mm	7,6 kg
200 mm	3,0 kg
100 mm	1,5 kg
550 mm FRAZ. / SECT	8,1 kg




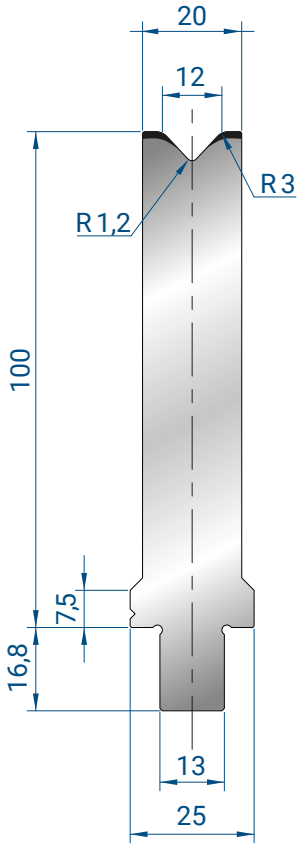

3273

Mat = 42 CrMo4
bonificato / *tempered*
H = 100.00
Max T/m = 120
α = 86°


515 mm	9,0 kg
200 mm	3,6 kg
100 mm	1,8 kg
550 mm FRAZ. / SECT	9,6 kg

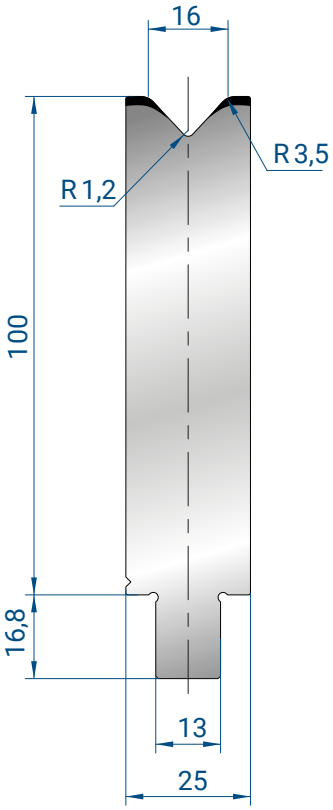

3274

Mat = 42 CrMo4
bonificato / *tempered*
H = 100.00
Max T/m = 120
α = 86°

515 mm	10,7 kg
200 mm	4,2 kg
100 mm	2,1 kg
550 mm FRAZ. / SECT	11,4 kg

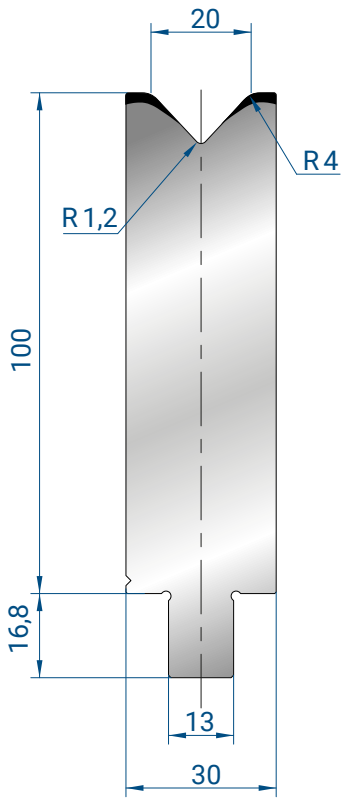


3275

Mat = 42 CrMo4
bonificato / *tempered*
H = 100.00
Max T/m = 120
α = 86°

515 mm	12,6 kg
200 mm	4,8 kg
100 mm	2,4 kg
550 mm FRAZ. / SECT	13,4 kg




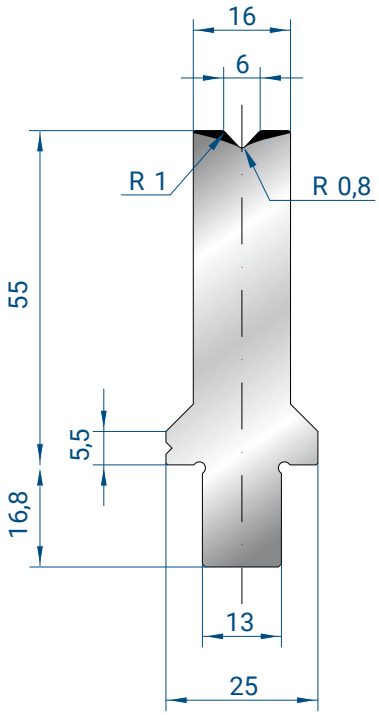

3250

Mat = 42 CrMo4
bonificato / *tempered*
H = 55.00
Max T/m = 120
α = 86°


515 mm	4,7 kg
200 mm	1,8 kg
100 mm	0,9 kg
550 mm FRAZ. / SECT	5,0 kg

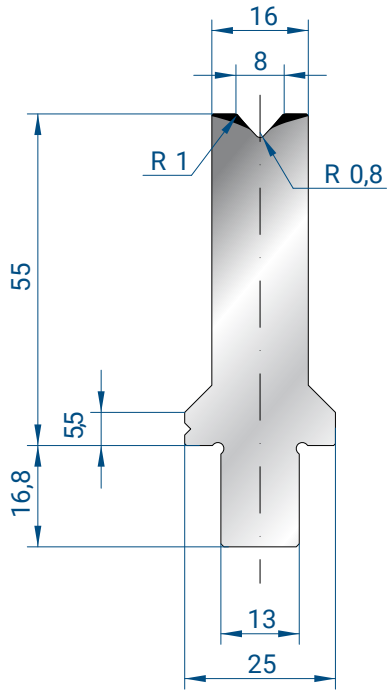

3251

Mat = 42 CrMo4
bonificato / *tempered*
H = 55.00
Max T/m = 120
α = 86°

515 mm	4,6 kg
200 mm	1,8 kg
100 mm	0,9 kg
550 mm FRAZ. / SECT	4,9 kg

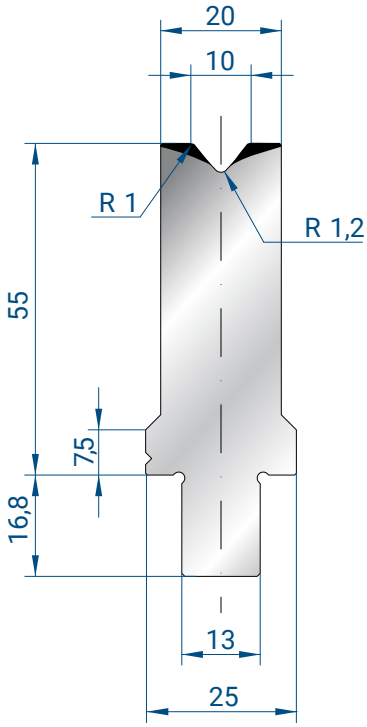


3252

Mat = 42 CrMo4
bonificato / *tempered*
H = 55.00
Max T/m = 120
α = 86°

515 mm	5,4 kg
200 mm	2,0 kg
100 mm	1,0 kg
550 mm FRAZ. / SECT	5,7 kg




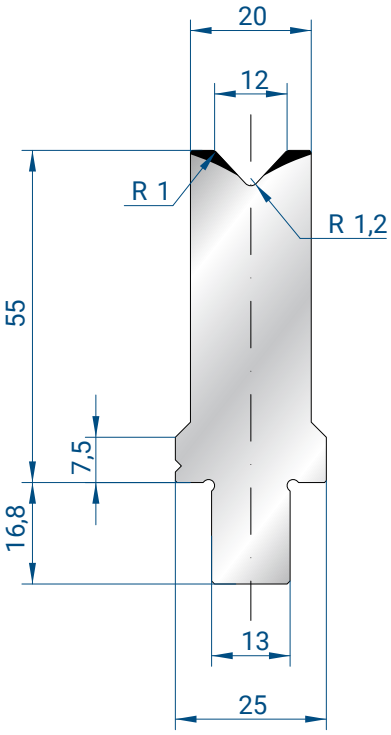

3253

Mat = 42 CrMo4
bonificato / *tempered*
H = 55.00
Max T/m = 120
α = 86°


515 mm	5,3 kg
200 mm	2,0 kg
100 mm	1,0 kg
550 mm FRAZ. / SECT	5,7 kg

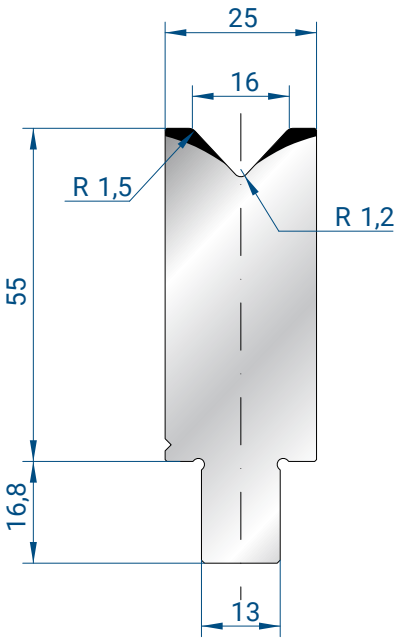

3254

Mat = 42 CrMo4
bonificato / *tempered*
H = 55.00
Max T/m = 120
α = 86°

515 mm	6,1 kg
200 mm	2,4 kg
100 mm	1,2 kg
550 mm FRAZ. / SECT	6,6 kg

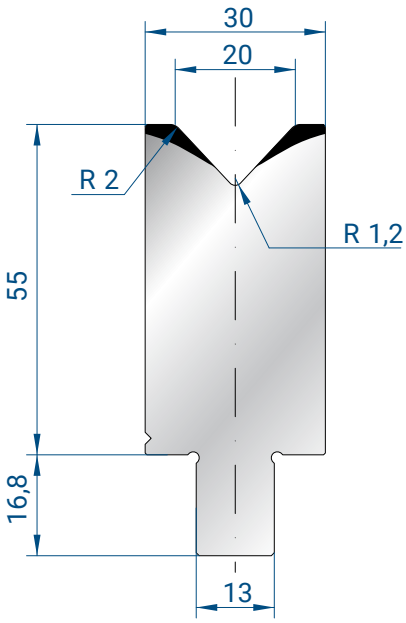


3255

Mat = 42 CrMo4
bonificato / *tempered*
H = 55.00
Max T/m = 120
α = 86°

515 mm	7,1 kg
200 mm	2,75 kg
100 mm	1,37 kg
550 mm FRAZ. / SECT	7,7 kg



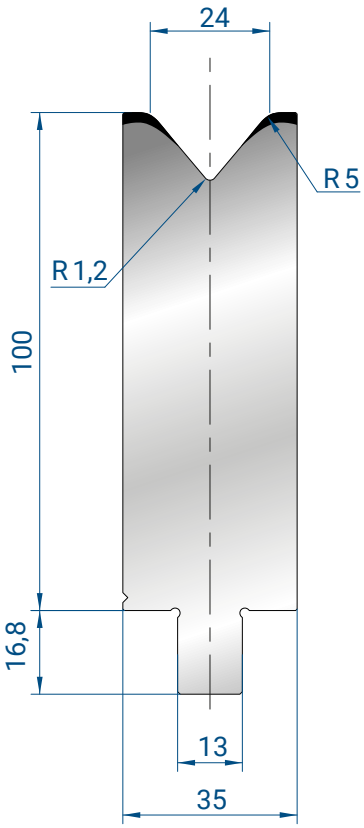


3276

Mat = 42 CrMo4
bonificato / *tempered*
H = 100.00
Max T/m = 125
α = 80°

515 mm	14,3 kg
200 mm	5,6 kg
100 mm	2,8 kg
550 mm FRAZ. / SECT	15,3 kg




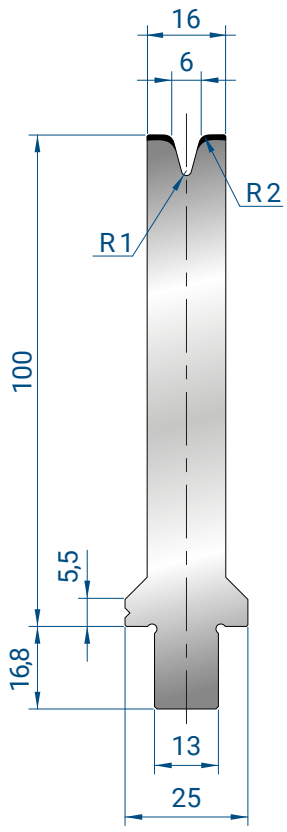

3280

Mat = 42 CrMo4
bonificato / *tempered*
H = 100.00
Max T/m = 40
α = 30°


515 mm	7,5 kg
200 mm	2,9 kg
100 mm	1,5 kg
550 mm FRAZ. / SECT	8,0 kg

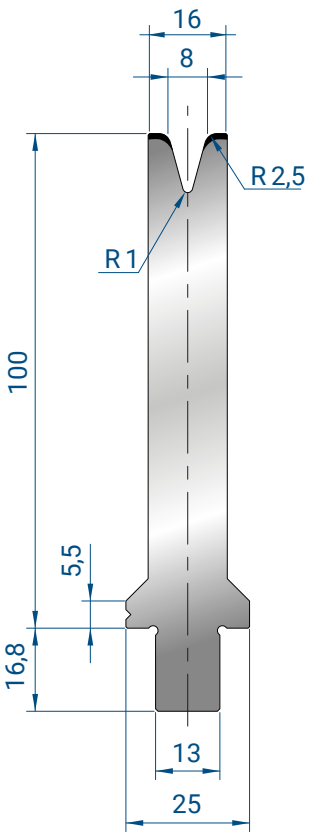

3281

Mat = 42 CrMo4
bonificato / *tempered*
H = 100.00
Max T/m = 35
α = 30°


515 mm	7,4 kg
200 mm	2,8 kg
100 mm	1,4 kg
550 mm FRAZ. / SECT	7,9 kg

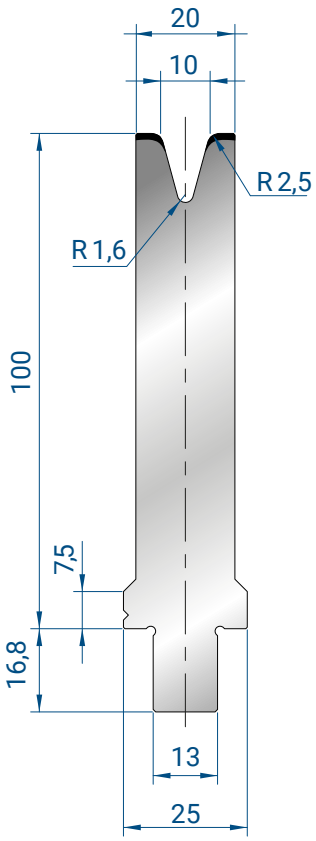

3282

Mat = 42 CrMo4
bonificato / *tempered*
H = 100.00
Max T/m = 55
α = 30°


515 mm	8,8 kg
200 mm	3,4 kg
100 mm	1,7 kg
550 mm FRAZ. / SECT	9,4 kg

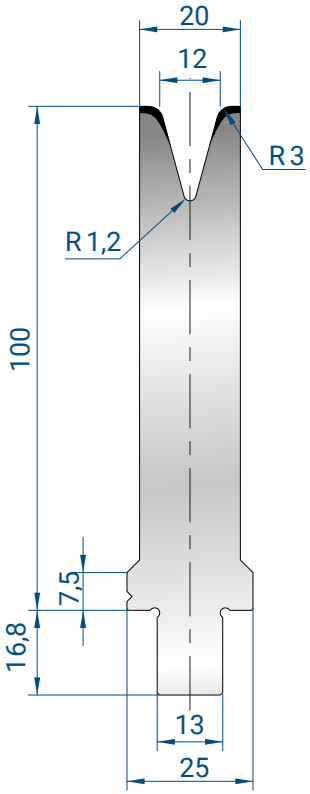

3283

Mat = 42 CrMo4
bonificato / *tempered*
H = 100.00
Max T/m = 40
α = 30°


515 mm	8,6 kg
200 mm	3,3 kg
100 mm	1,7 kg
550 mm FRAZ. / SECT	9,2 kg

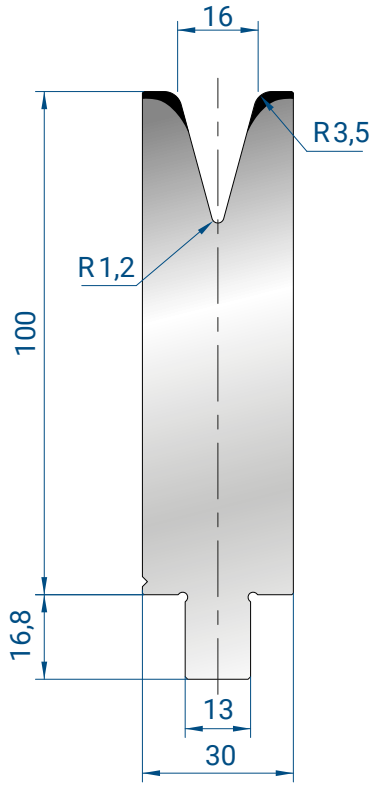


3284

Mat = 42 CrMo4
bonificato / *tempered*
H = 100.00
Max T/m = 60
α = 30°

515 mm	12,0 kg
200 mm	4,7 kg
100 mm	2,3 kg
550 mm FRAZ. / SECT	12,9 kg

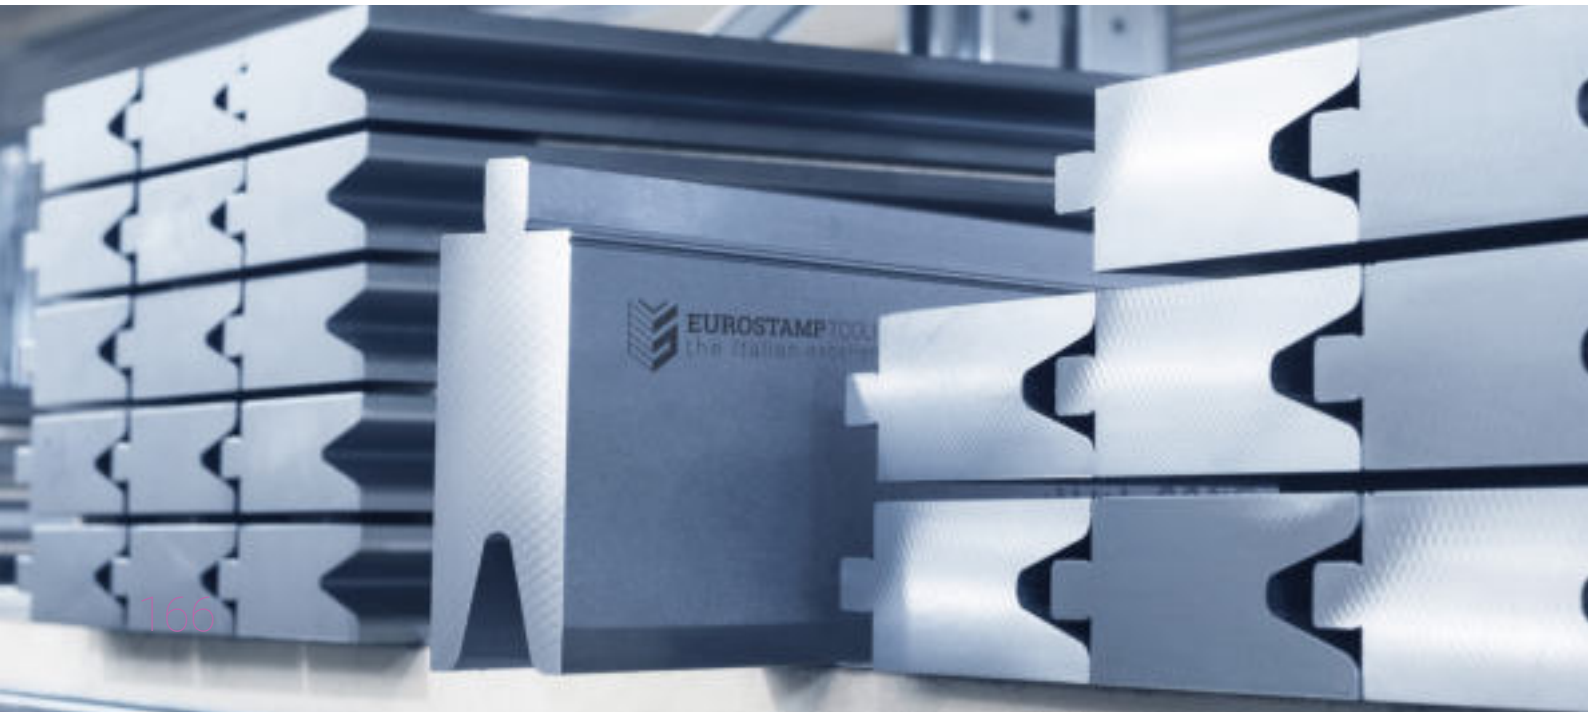


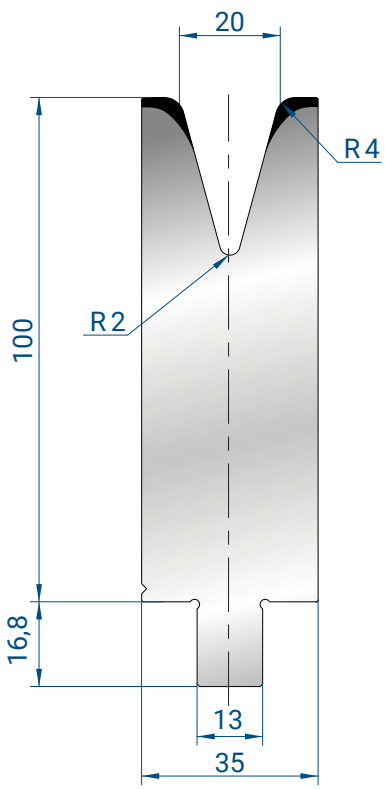

3285

Mat = 42 CrMo4
bonificato / *tempered*
H = 100.00
Max T/m = 55
α = 30°

515 mm	13,6 kg
200 mm	5,3 kg
100 mm	2,6 kg
550 mm FRAZ. / SECT	14,5 kg

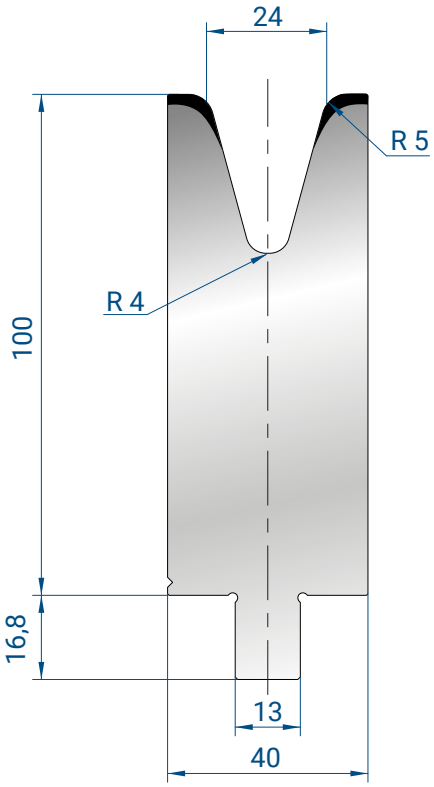


3286

Mat = 42 CrMo4
bonificato / *tempered*
H = 100.00
Max T/m = 45
α = 30°

515 mm	15,1 kg
200 mm	5,8 kg
100 mm	2,9 kg
550 mm FRAZ. / SECT	16,1 kg




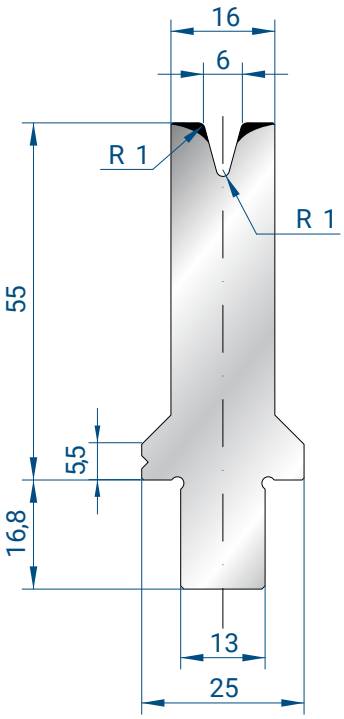

3260

Mat = 42 CrMo4
bonificato / *tempered*
H = 55.00
Max T/m = 40
α = 30°


515 mm	4,6 kg
200 mm	1,8 kg
100 mm	0,9 kg
550 mm FRAZ. / SECT	4,9 kg

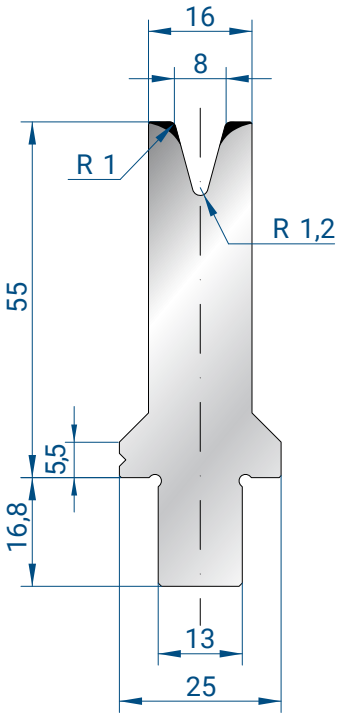

3261

Mat = 42 CrMo4
bonificato / *tempered*
H = 55.00
Max T/m = 35
α = 30°

515 mm	4,5 kg
200 mm	1,8 kg
100 mm	0,9 kg
550 mm FRAZ. / SECT	4,8 kg

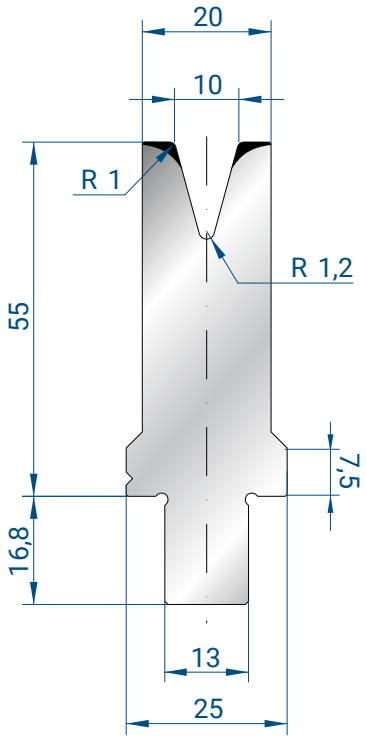



3262


Mat = 42 CrMo4
bonificato / *tempered*
H = 55.00
Max T/m = 55
α = 30°

515 mm	5,1 kg
200 mm	2,0 kg
100 mm	1,0 kg
550 mm FRAZ. / SECT	5,5 kg



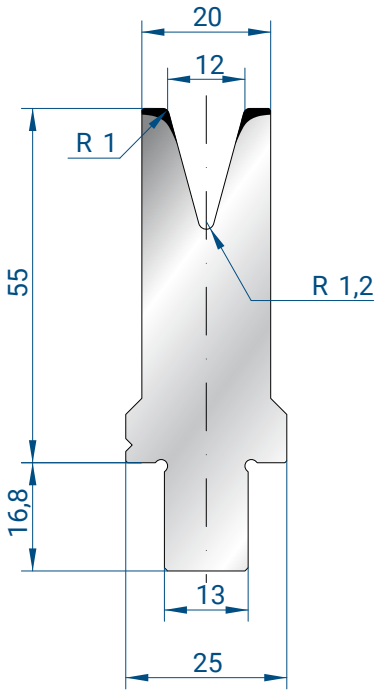

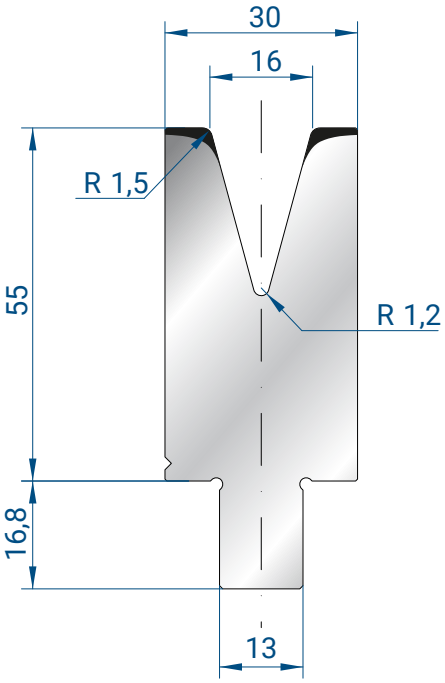

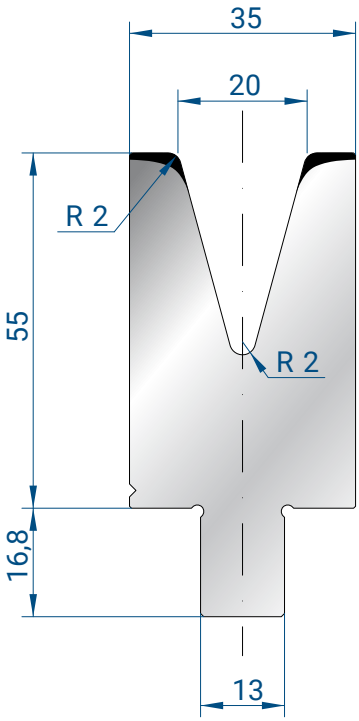

3263

Mat = 42 CrMo4
bonificato / *tempered*
H = 55.00
Max T/m = 40
α = 30°

515 mm	5,0 kg
200 mm	2,0 kg
100 mm	1,0 kg
550 mm FRAZ. / SECT	5,3 kg

3264

Mat = 42 CrMo4
bonificato / *tempered*
H = 55.00
Max T/m = 60
α = 30°

515 mm	6,6 kg
200 mm	2,6 kg
100 mm	1,3 kg
550 mm FRAZ. / SECT	7,0 kg

3265

Mat = 42 CrMo4
bonificato / *tempered*
H = 55.00
Max T/m = 55
α = 30°

515 mm	7,2 kg
200 mm	2,8 kg
100 mm	1,4 kg
550 mm FRAZ. / SECT	7,7 kg



EUROSTAMP TOOLING
the Italian excellence

BYSTRONIC STYLE

Gli utensili superiori e inferiori elencati in questa sezione possono essere installati sulle piegatrici Bystronic/Beyeler dotate dei seguenti tipi di bloccaggio:

Bystronic/Beyeler Type RFA
Bystronic/Beyeler Type RF
Bystronic/Beyeler Type R

Questi utensili possono essere installati anche su altre piegatrici tramite adattatori superiori e inferiori.

Upper and lower tooling listed on this section could be installed on the Bystronic/Beyeler press brakes equipped with the following clamping types:

Bystronic/Beyeler Type RFA
Bystronic/Beyeler Type RF
Bystronic/Beyeler Type R


These tooling could also be installed on other press brakes by using the appropriate upper and lower adapters.





EUROSTAMP
the Italian excellence


VEDI PAG. 181 PER SCHEMA FRAZIONATURA MATRICI
SEE PAGE 181 FOR DIE SEGMENTATION DIAGRAM

FRAZIONATURA STANDARD
STANDARD SEGMENTATION

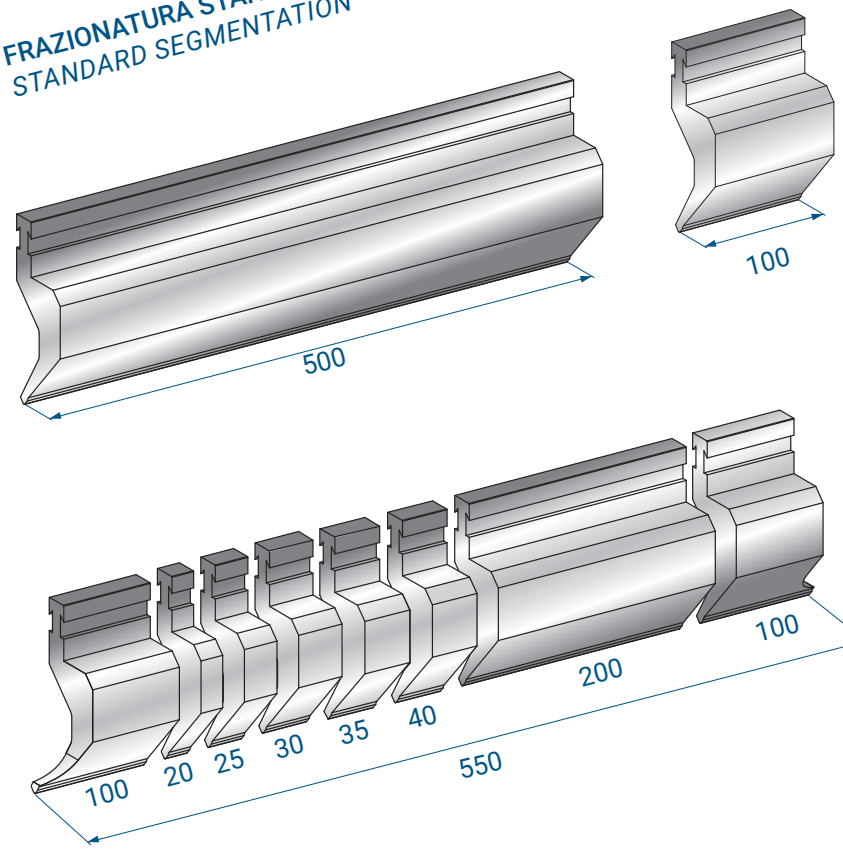


FRESATURA SCARPETTA
MILLED HORN

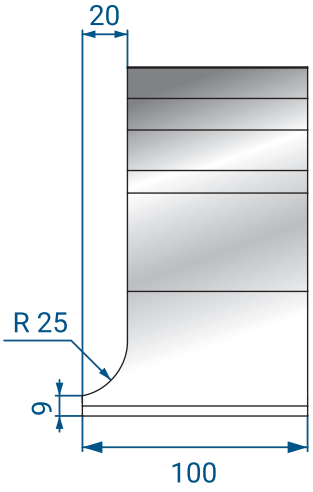

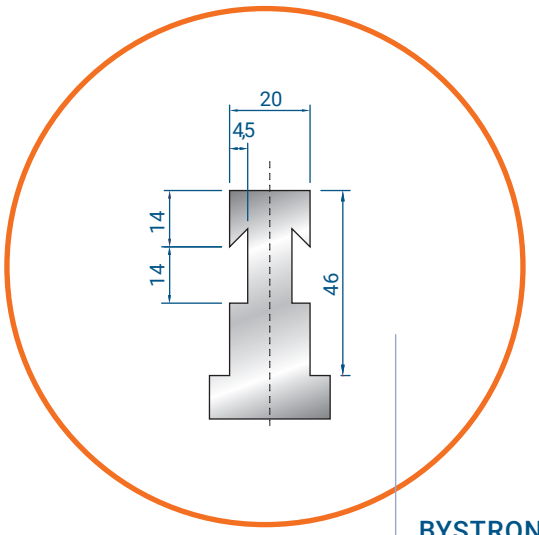

BYSTRONIC STYLE
TYPE R

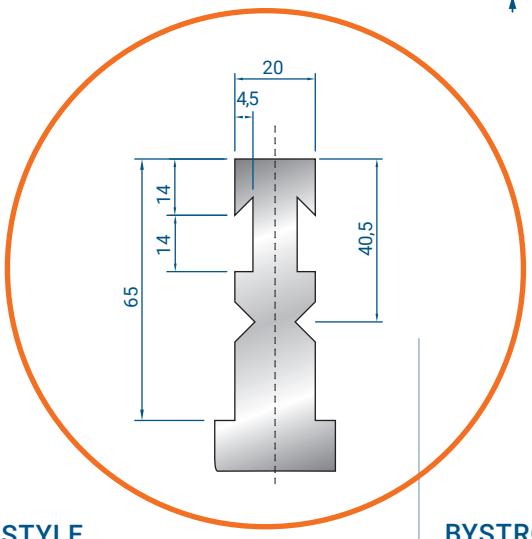


BYSTRONIC STYLE
TYPE RF-A


INCLUSO SU RICHIESTA
AVAILABLE ON DEMAND
AT NO COST

CODICE / *CODE* ***8022***


SCARPETTE SPECIALI
SPECIAL HORNS

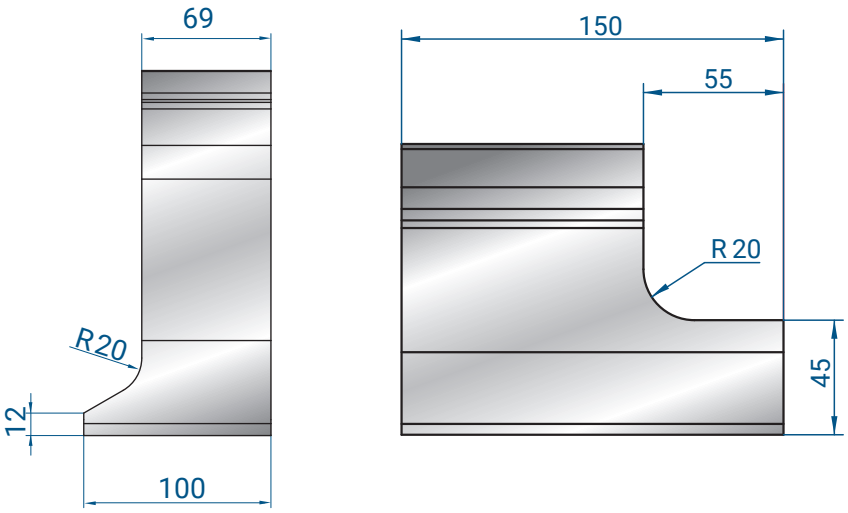


TAGLI A RICHIESTA
SPECIAL SEGMENTATION

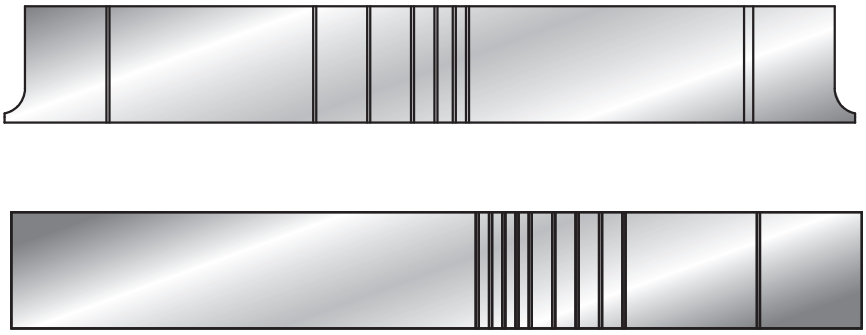

MODIFICA RAGGIO
RADIUS MODIFICATION

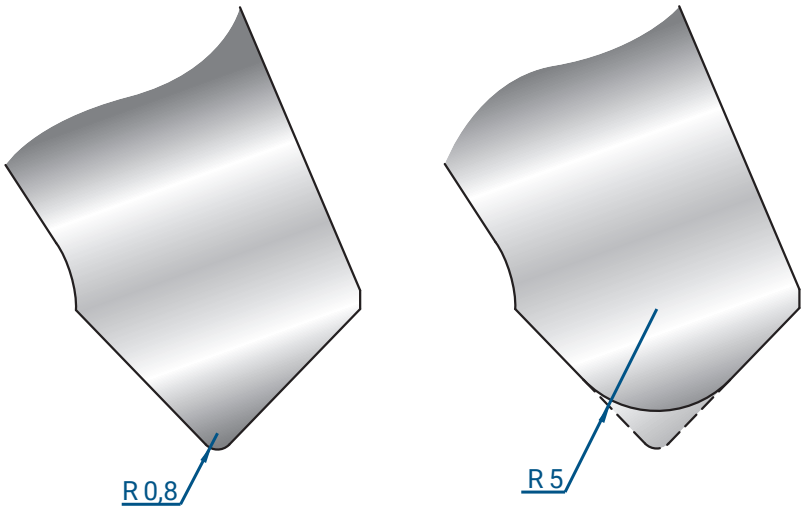


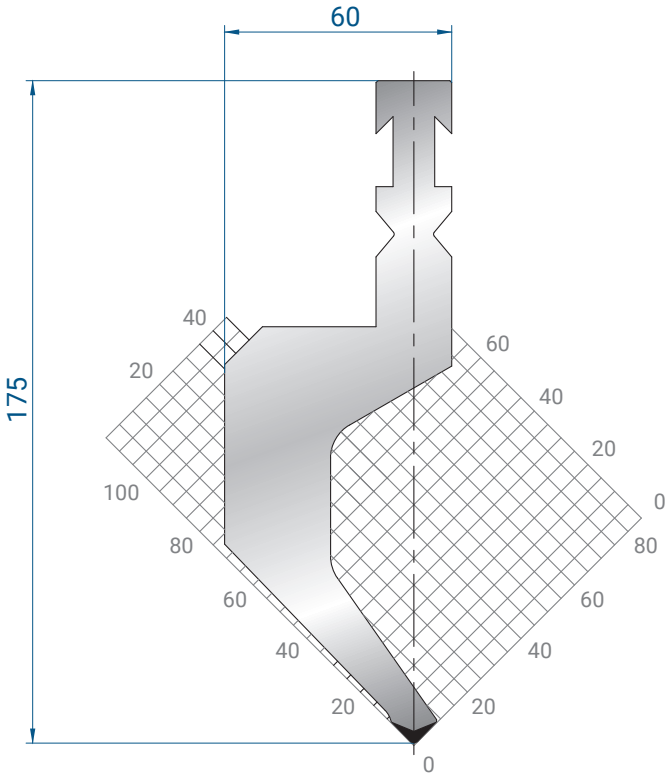

1227

500 mm	16,3 kg
550 mm SECT. SHORT	16,6 kg
100 mm	3,3 kg


Mat = C45
bonificato / *tempered*
H = 175.00
Max T/m = 50
α = 88°
R = 1.5

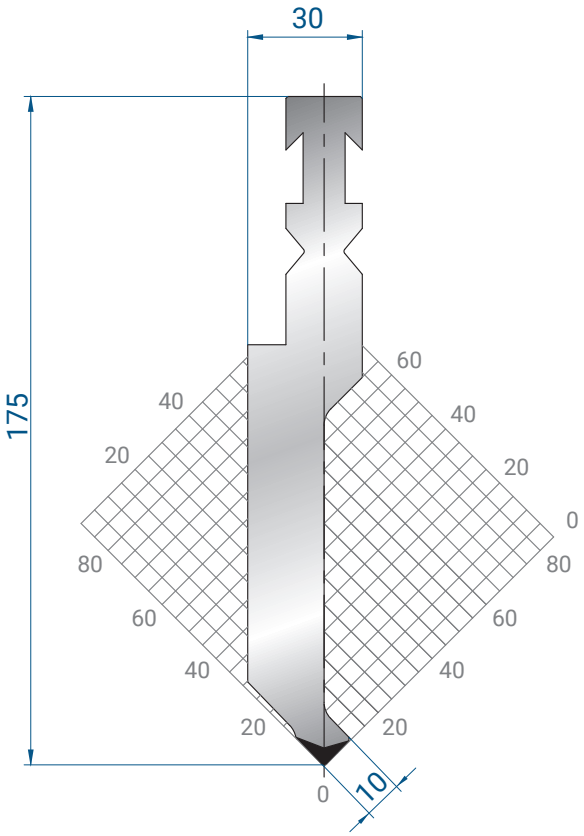


1229

500 mm	12,8 kg
550 mm SECT. SHORT	13,0 kg
100 mm	2,6 kg

Mat = C45
bonificato / *tempered*
H = 175.00
Max T/m = 100
α = 88°
R = 1

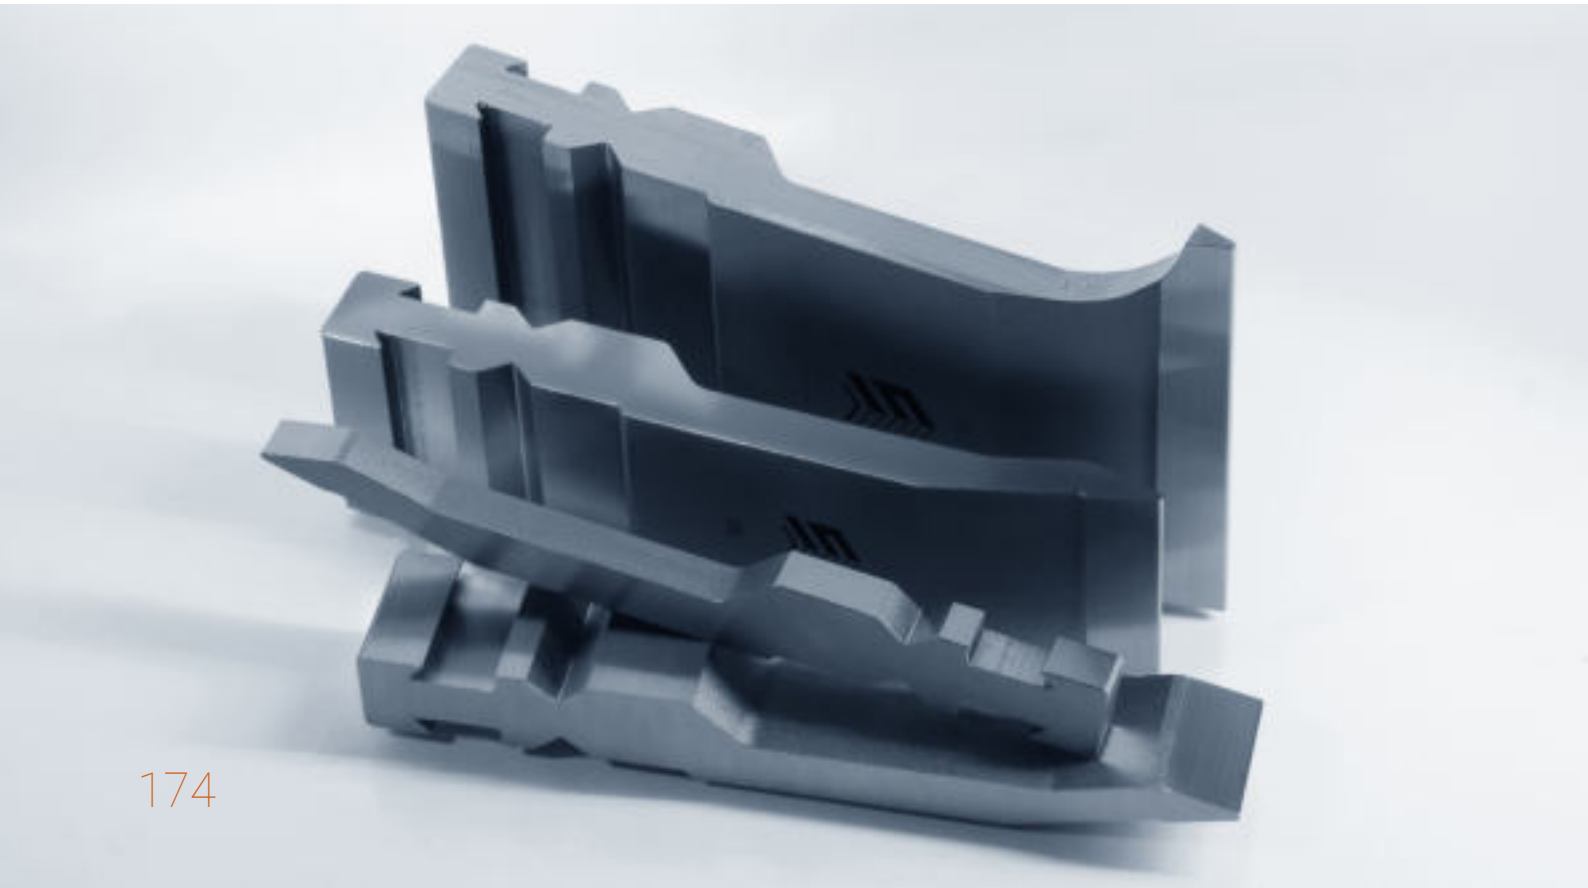


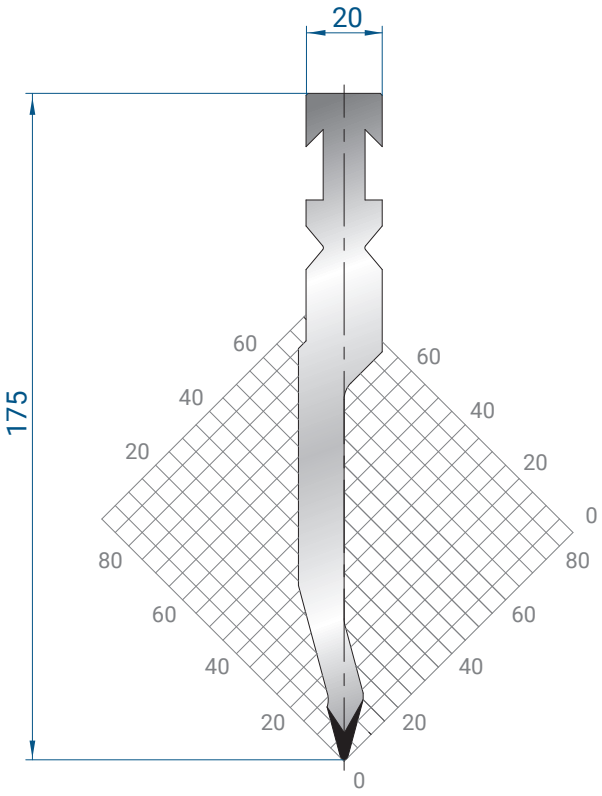

1230

Mat = C45
bonificato / *tempered*
H = 175.00
Max T/m = 80
α = 30°
R = 1


500 mm	9,1 kg
550 mm SECT. SHORT	9,3 kg
100 mm	1,8 kg

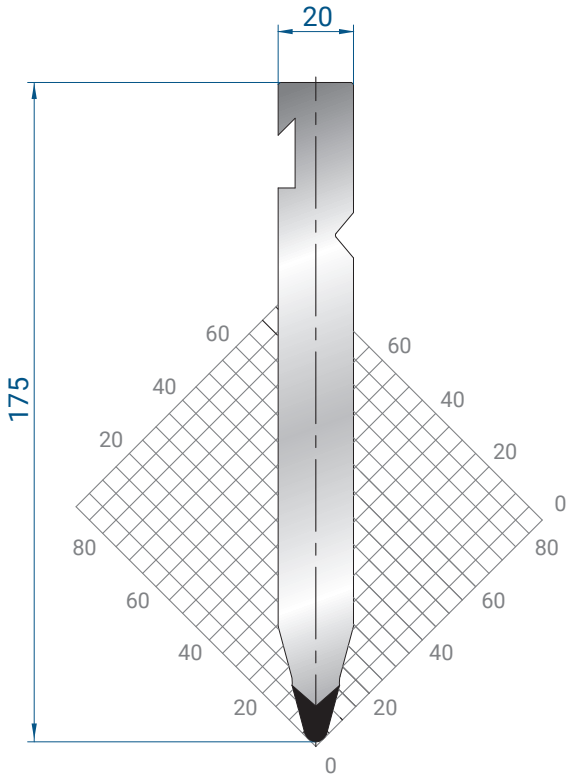

1231

Mat = C45
bonificato / *tempered*
H = 175.00
Max T/m = 100
α = 30°
R = 3

500 mm	12,4 kg
550 mm SECT. SHORT	12,7 kg
100 mm	2,5 kg

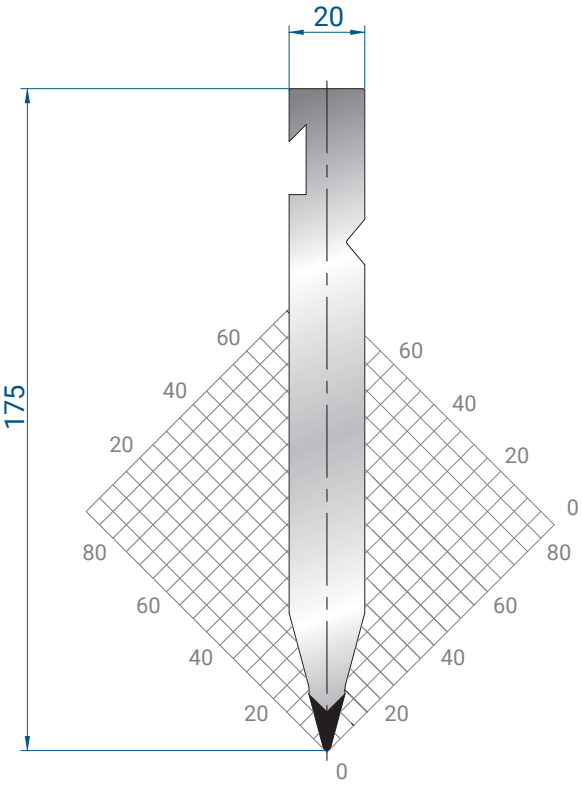

1232


Mat = C45
bonificato / *tempered*
H = 175.00
Max T/m = 100
α = 30°
R = 1


500 mm	12,0 kg
550 mm SECT. SHORT	12,2 kg
100 mm	2,4 kg

1298

500 mm	25,1 kg
550 mm SECT. SHORT	24,6 kg
100 mm	5,0 kg

Mat = 42 CrMo4
bonificato / *tempered*
H = 250.00
Max T/m = 60
α = 86°
R = 1.5

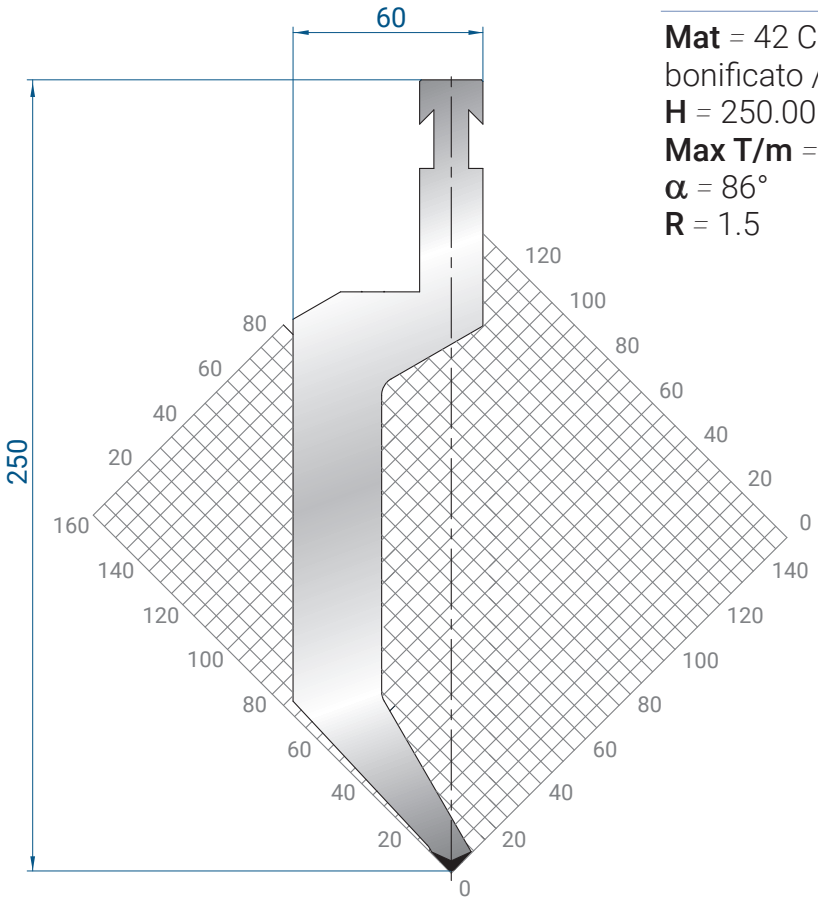

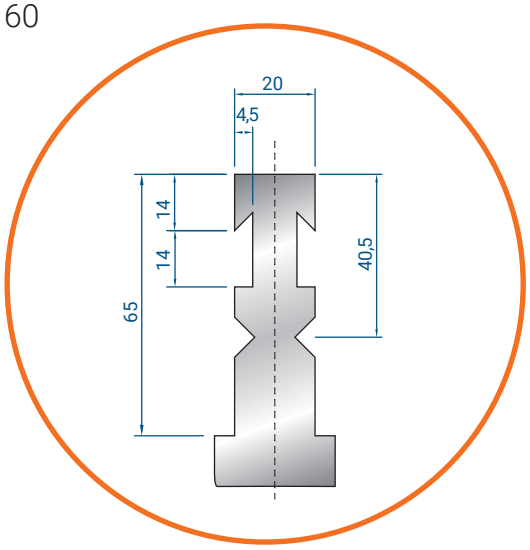


ATTACCO / *UPPER TANG* **RF-A**

INCLUSO SU RICHIESTA
AVAILABLE ON DEMAND
AT NO COST

CODICE / *CODE* ***8022***




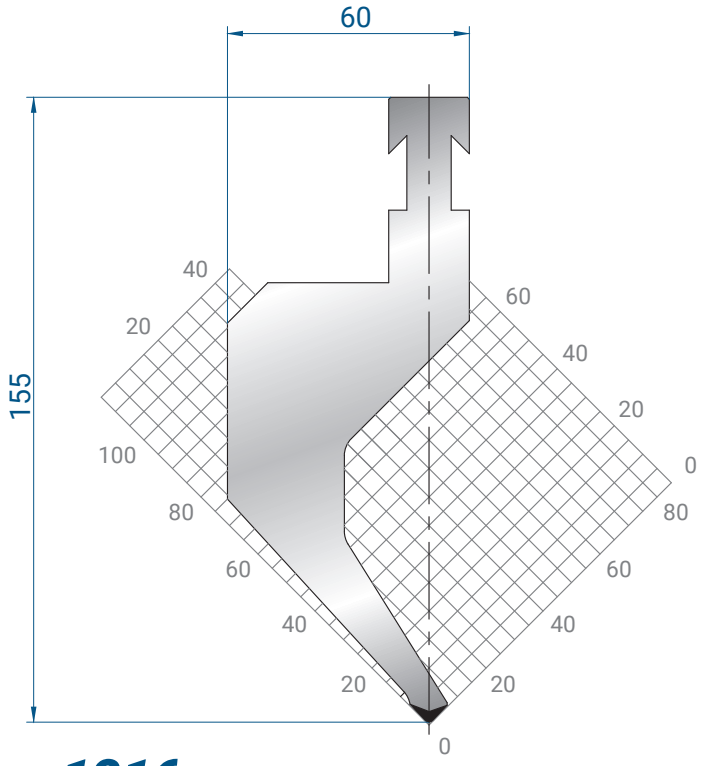

1216

500 mm	15,3 kg
550 mm SECT. SHORT	15,6 kg
100 mm	3,0 kg


Mat = C45
bonificato / *tempered*
H = 155.00
Max T/m = 50
α = 85°
R = 1.5

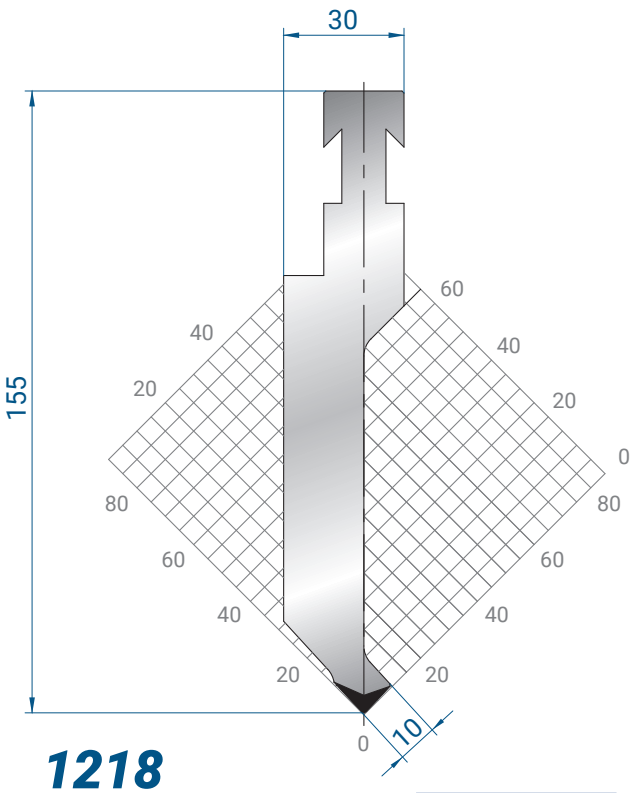

1218

500 mm	11,4 kg
550 mm SECT. SHORT	11,7 kg
100 mm	2,3 kg


Mat = C45
bonificato / *tempered*
H = 155.00
Max T/m = 100
α = 85°
R = 1

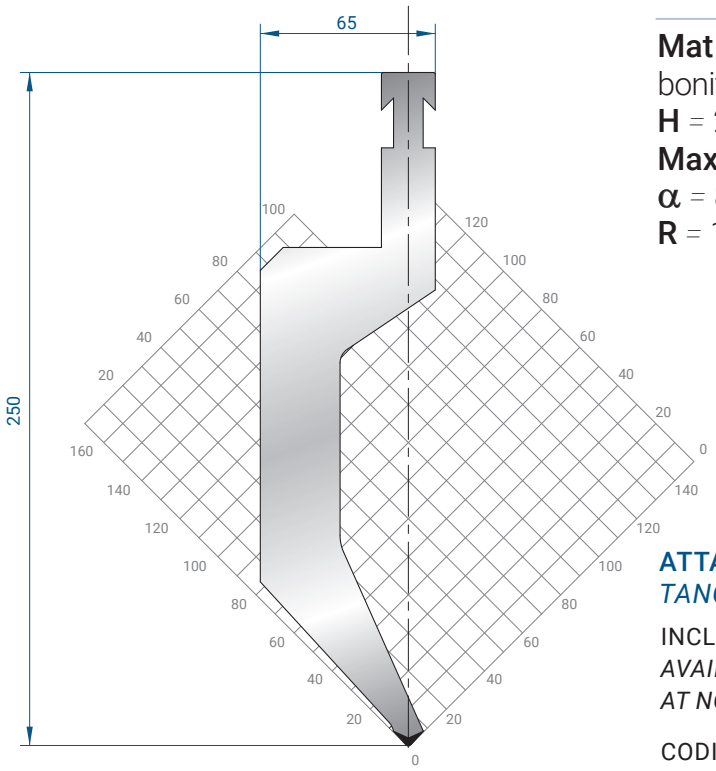

1321

500 mm	27,9 kg
550 mm SECT. SHORT	28,5 kg
100 mm	5,6 kg

Mat = 42 CrMo4
bonificato / *tempered*
H = 250.00
Max T/m = 100
α = 85°
R = 1.5

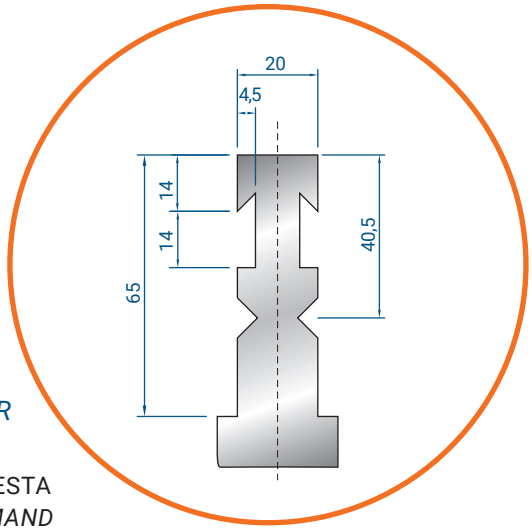

ATTACCO / *UPPER TANG* **RF-A**

INCLUSO SU RICHIESTA
AVAILABLE ON DEMAND AT NO COST


CODICE / *CODE* ***8022***


BYSTRONIC STYLE

1299

550 mm	13,3 kg
500 mm SECT. SHORT	13,6 kg
100 mm	2,7 kg

Mat = 42 CrMo4
bonificato / *tempered*
H = 250.00
Max T/m = 80
α = 30°
R = 1

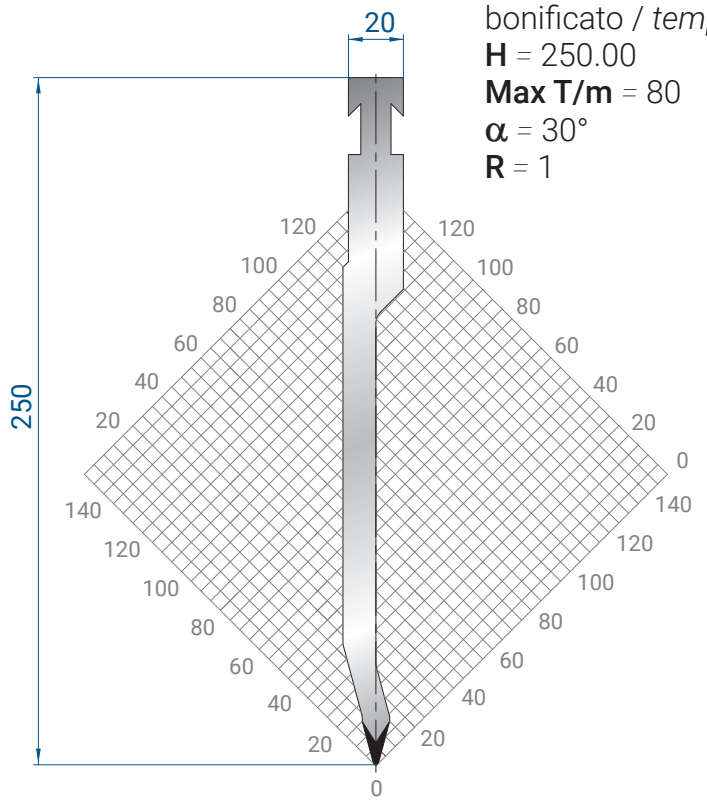

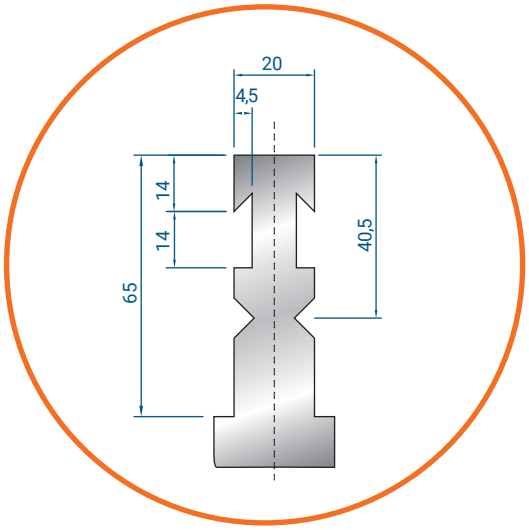

ATTACCO / *UPPER TANG* **RF-A**


INCLUSO SU RICHIESTA
AVAILABLE ON DEMAND
AT NO COST


CODICE / *CODE* ***8022***

1300

500 mm	18,4 kg
550 mm SECT. SHORT	18,8 kg
100 mm	3,7 kg

Mat = 42CrMo4
bonificato / *tempered*
H = 250.00
Max T/m = 120
α = 30°
R = 3

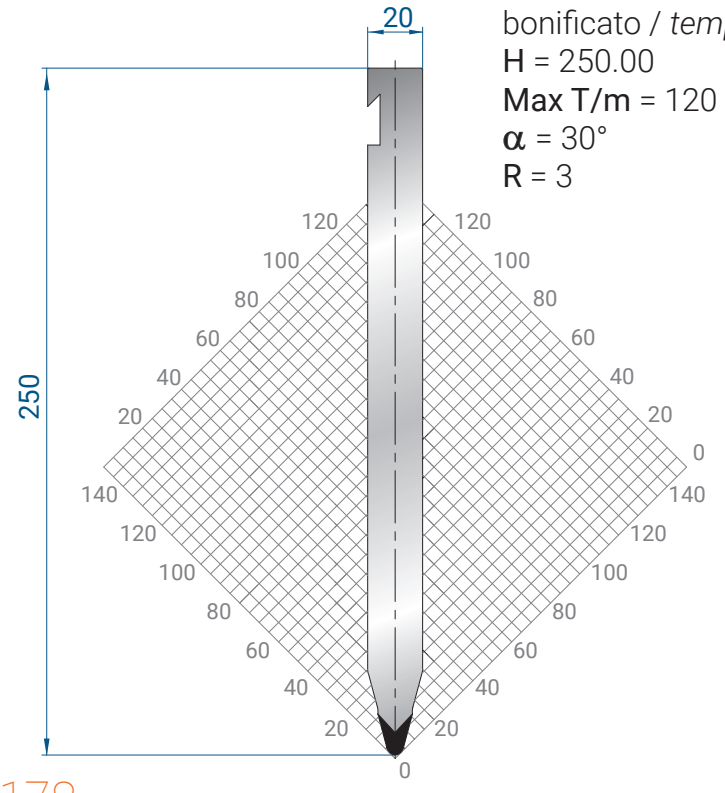


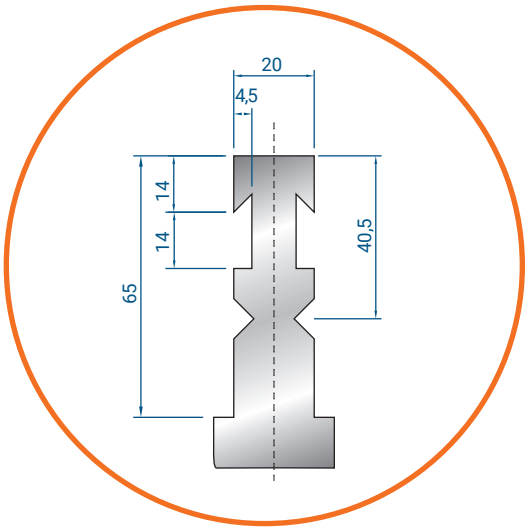

ATTACCO / *UPPER TANG* **RF-A**

INCLUSO SU RICHIESTA
AVAILABLE ON DEMAND
AT NO COST


CODICE / *CODE* ***8022***

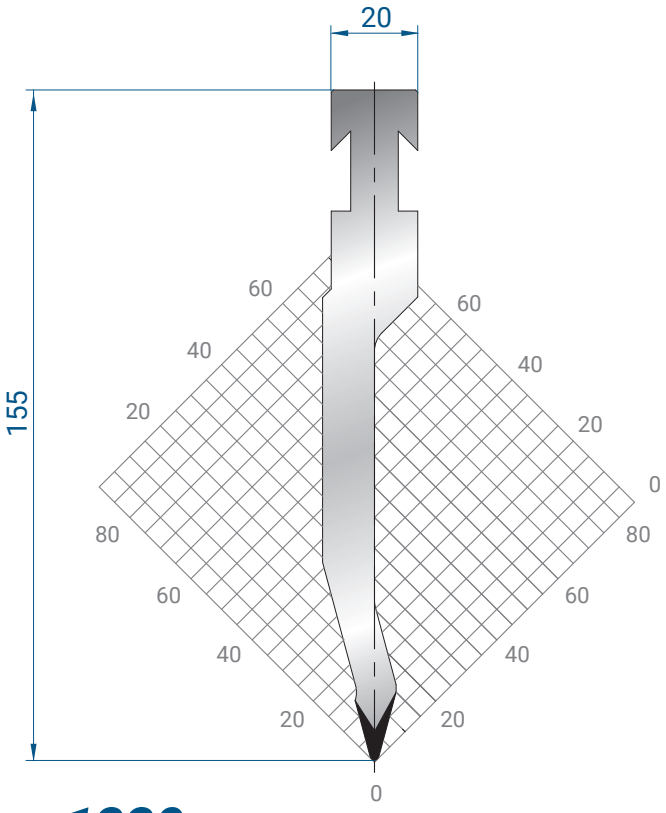

1220

Mat = C45
bonificato / *tempered*
H = 155.00
Max T/m = 80
α = 30°
R = 1


500 mm	7,8 kg
550 mm SECT. SHORT	7,9 kg
100 mm	1,6 kg

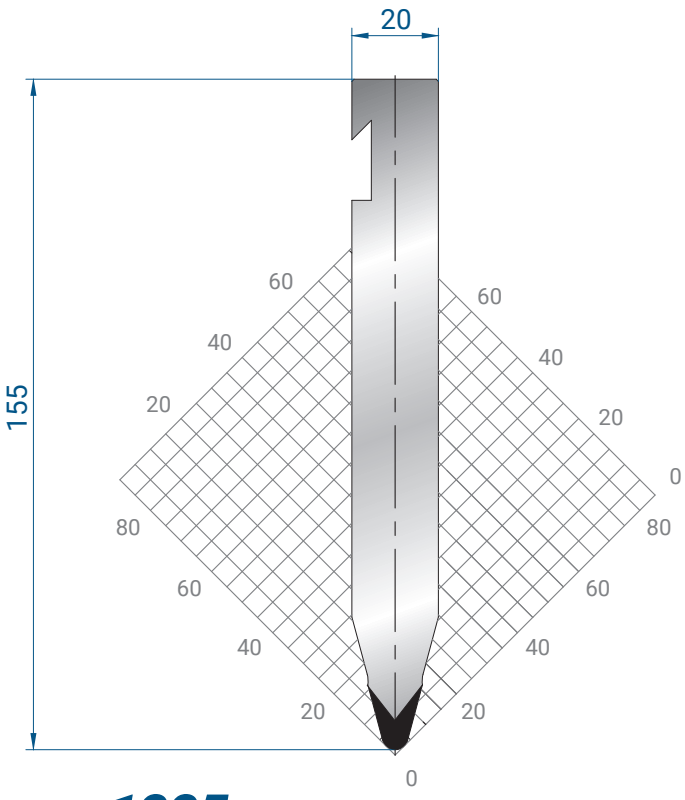

1225

Mat = C45
bonificato / *tempered*
H = 155.00
Max T/m = 100
α = 30°
R = 3


500 mm	10,9 kg
550 mm SECT. SHORT	11,2 kg
100 mm	2,2 kg

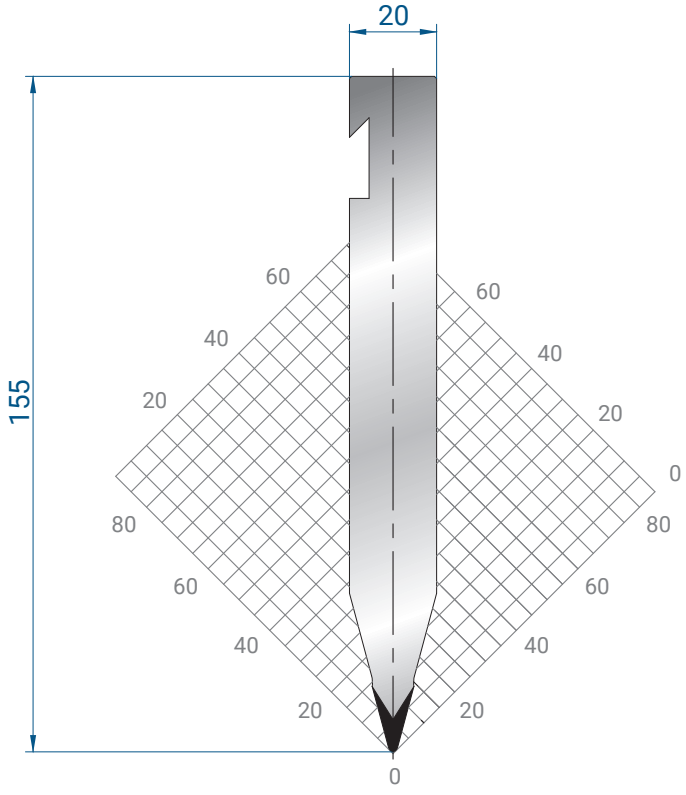

1226

Mat = C45
bonificato / *tempered*
H = 155.00
Max T/m = 100
α = 30°
R = 1


500 mm	10,5 kg
550 mm SECT. SHORT	10,8 kg
100 mm	2,1 kg

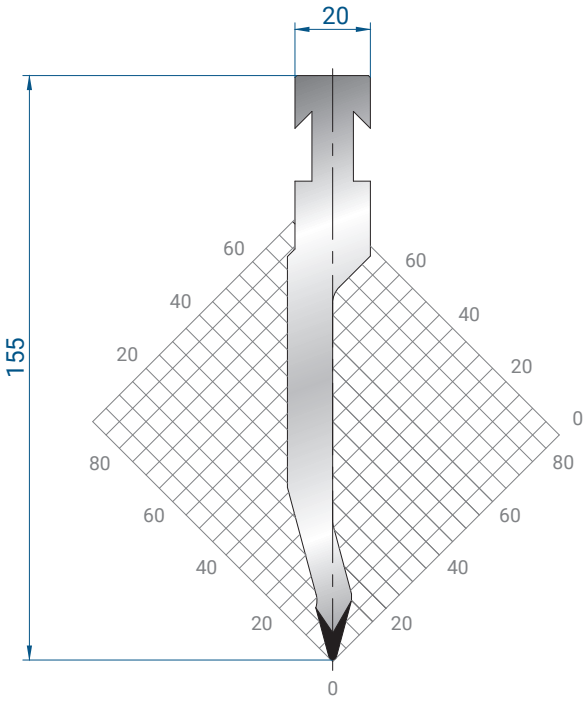

1221


Mat = C45
bonificato / *tempered*
H = 155.00
Max T/m = 80
α = 28°
R = 1

500 mm	7,8 kg
550 mm SECT. SHORT	7,9 kg
100 mm	1,6 kg

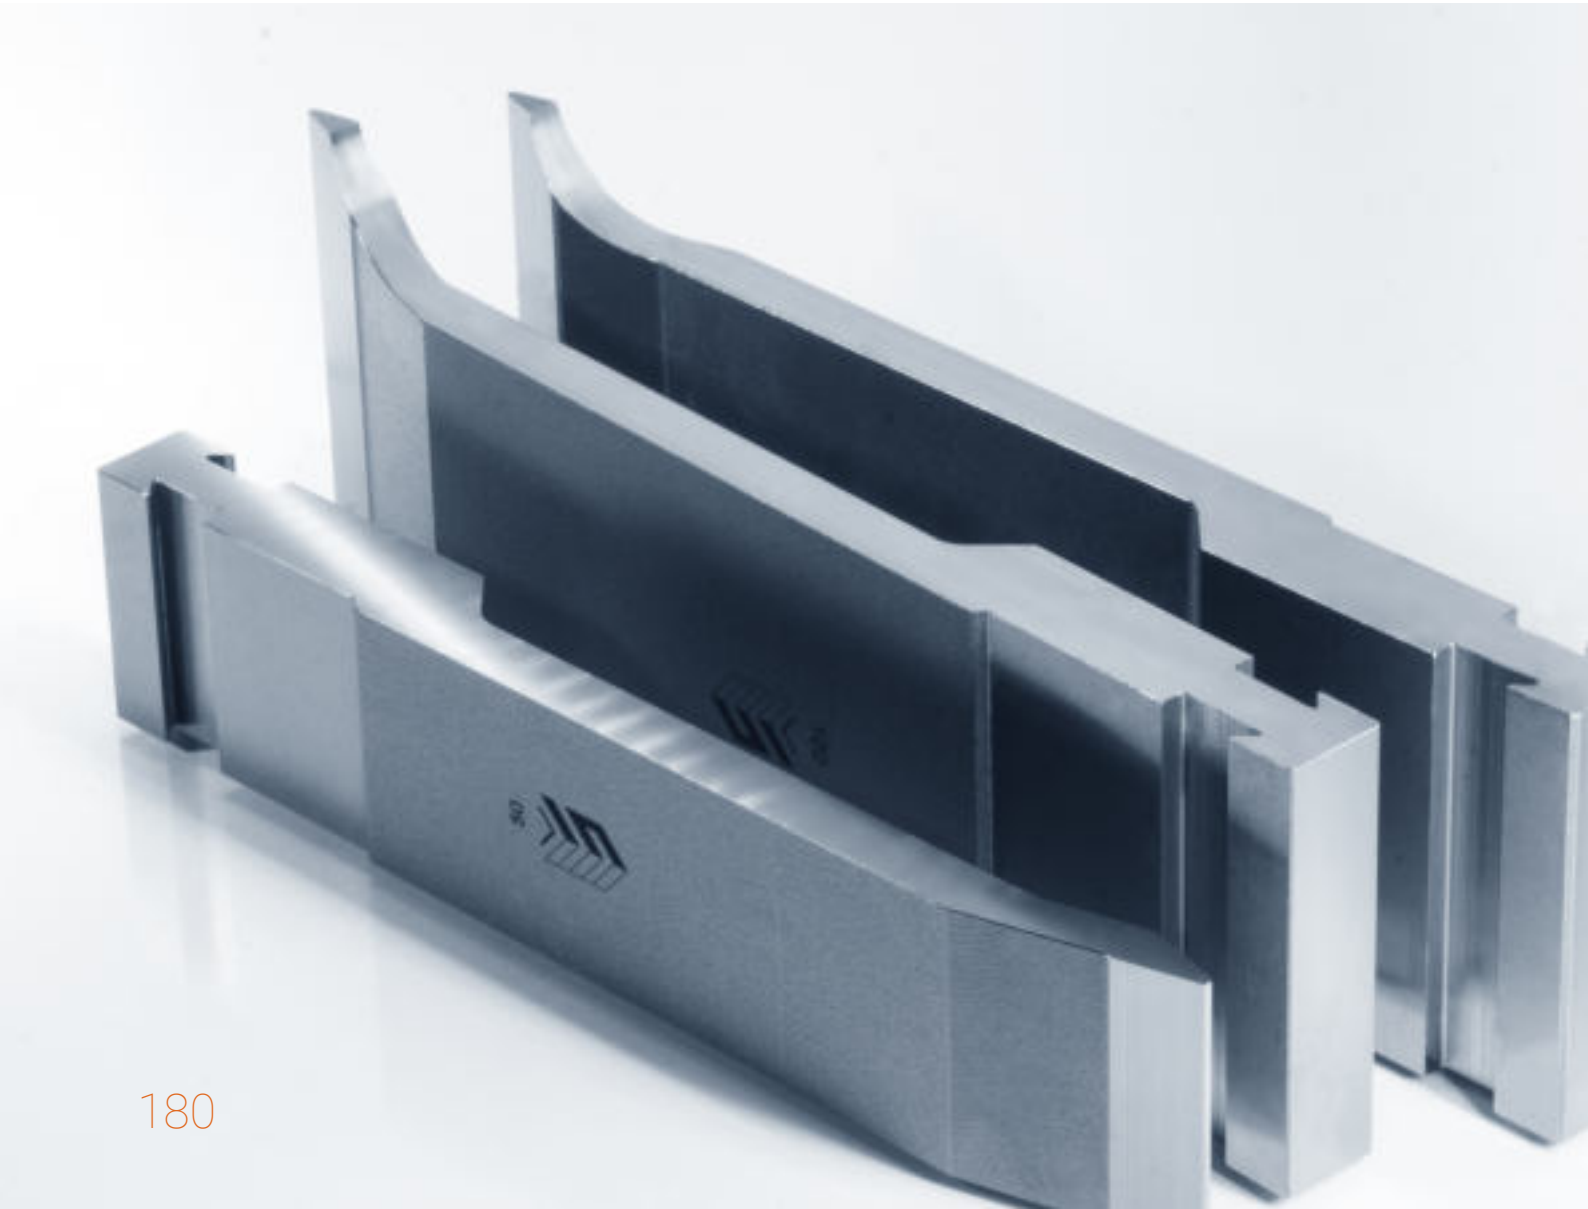


VEDI PAG. 172 PER SCHEMA FRAZIONATURA PUNZONI
SEE PAGE 172 FOR PUNCHES SEGMENTATION DIAGRAM


LUNGHEZZE STANDARD
STANDARD LENGHT

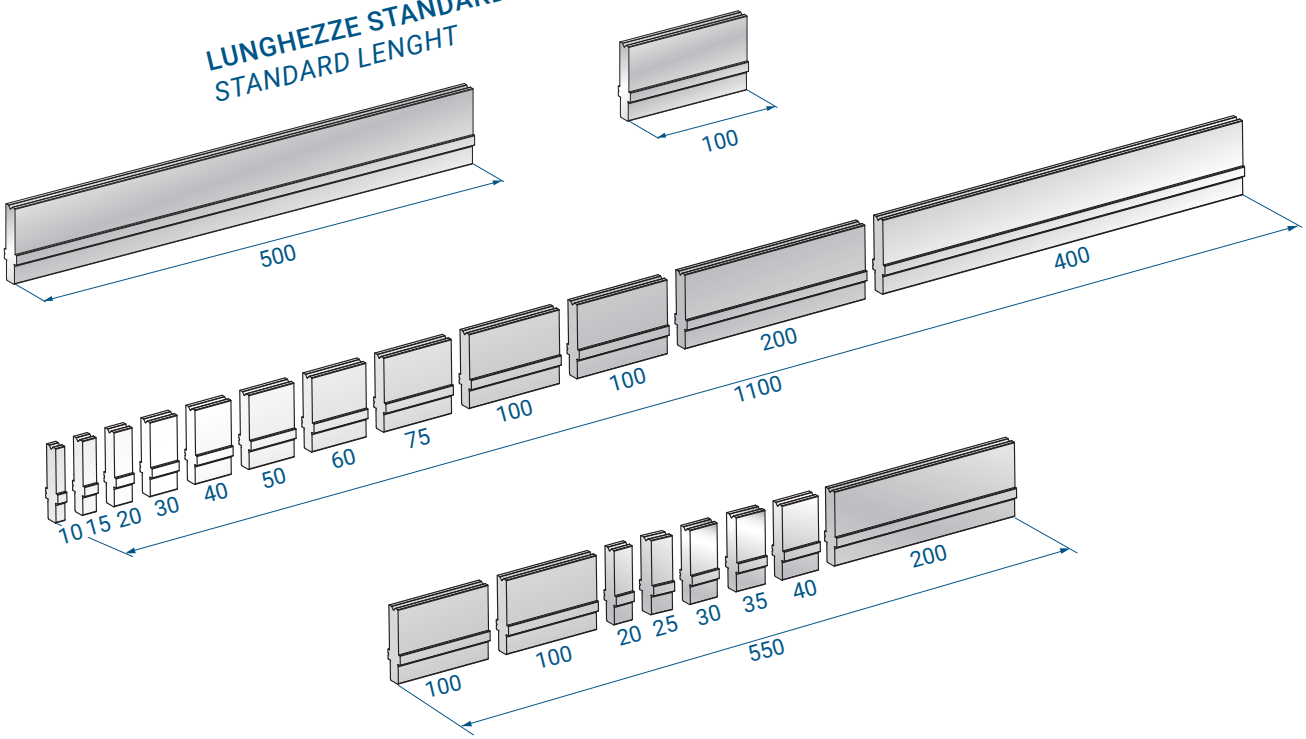


MODIFICHE A RICHIESTA
MODIFICATIONS ON REQUEST

TAGLI A RICHIESTA
SPECIAL SEGMENTATION

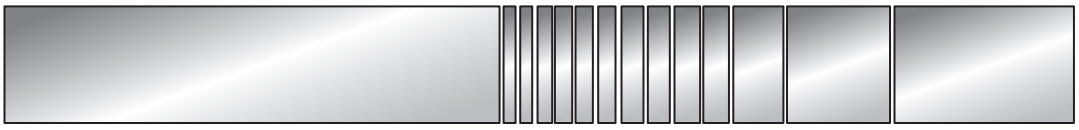


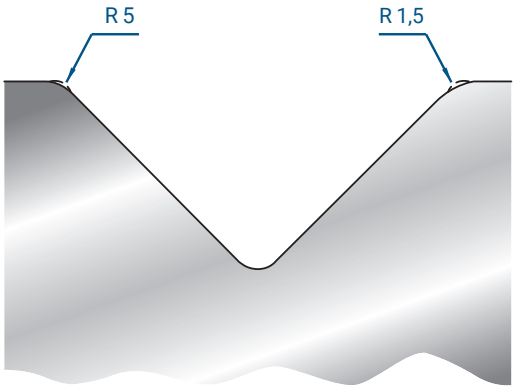

MODIFICA RAGGIO
RADIUS MODIFICATION

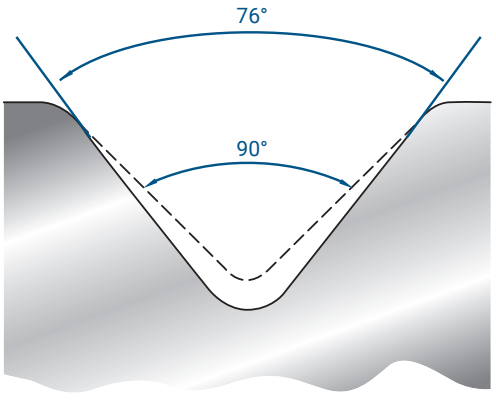


MODIFICA ANGOLO
ANGLE MODIFICATION

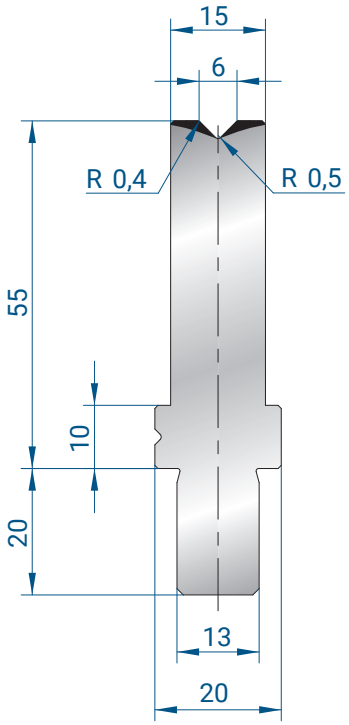

3241

Mat = C45
Max T/m = 100
α = 88°


1000 mm	8,7 kg
500 mm	4,4 kg
1100 mm FRAZ. / SECT.	9,7 kg
550 mm SECT. SHORT	4,8 kg
100 mm	0,9 kg

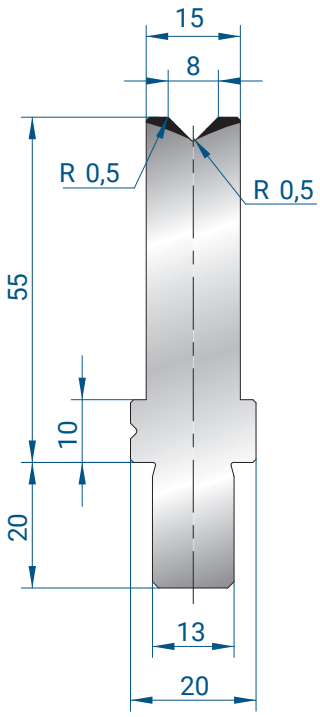

3242

Mat = C45
Max T/m = 100
α = 88°

1000 mm	8,7 kg
500 mm	4,4 kg
1100 mm FRAZ. / SECT.	9,6 kg
550 mm SECT. SHORT	4,8 kg
100 mm	0,9 kg

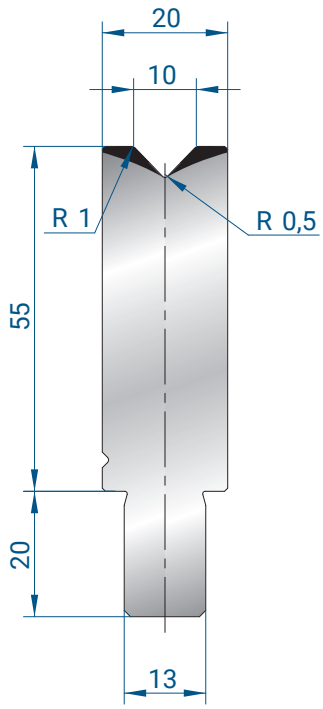



3106


Mat = C45
Max T/m = 100
α = 88°

1000 mm	10,4 kg
500 mm	5,2 kg
1100 mm FRAZ. / SECT.	11,5 kg
550 mm SECT. SHORT	5,7 kg
100 mm	1,0 kg



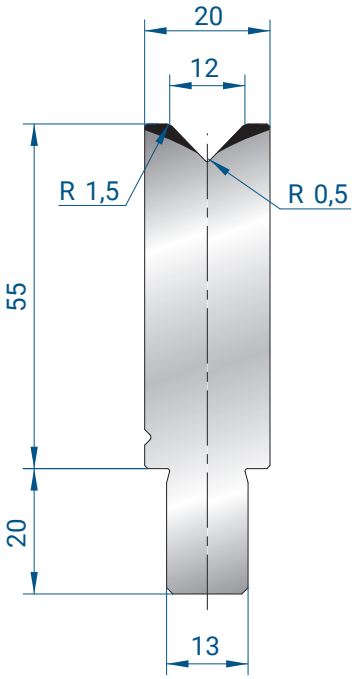

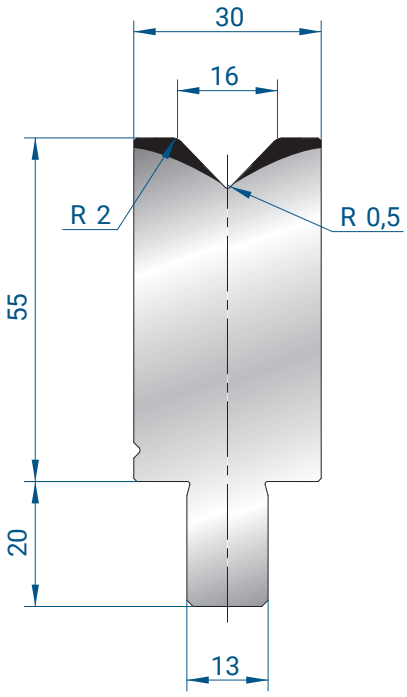

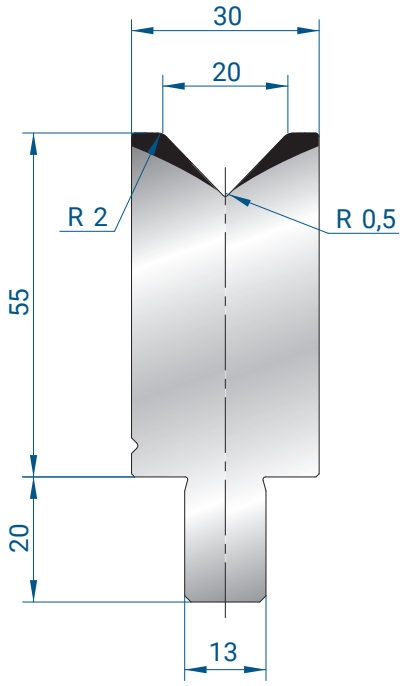

3107

Mat = C45
Max T/m = 100
α = 88°

1000 mm	10,3 kg
500 mm	5,2 kg
1100 mm FRAZ. / SECT.	11,4 kg
550 mm SECT. SHORT	5,7 kg
100 mm	1,0 kg

3108


Mat = C45
Max T/m = 100
α = 88°

1000 mm	14,4 kg
500 mm	7,2 kg
1100 mm FRAZ. / SECT.	15,8 kg
550 mm SECT. SHORT	7,9 kg
100 mm	1,4 kg

3109

Mat = C45
Max T/m = 100
α = 88°


1000 mm	14,1 kg
500 mm	7,1 kg
1100 mm FRAZ. / SECT.	15,5 kg
550 mm SECT. SHORT	7,7 kg
100 mm	2,8 kg

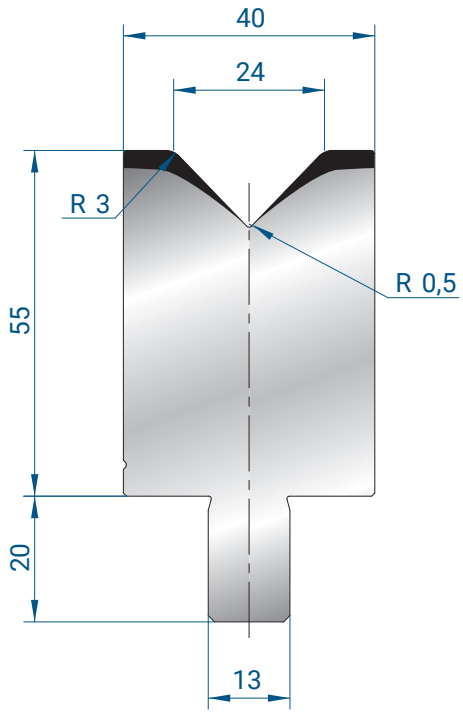

3110

Mat = C45
Max T/m = 100
α = 88°


1000 mm	18,1 kg
500 mm	9,0 kg
1100 mm FRAZ. / SECT.	19,9 kg
550 mm SECT. SHORT	10,0 kg
100 mm	1,8 kg

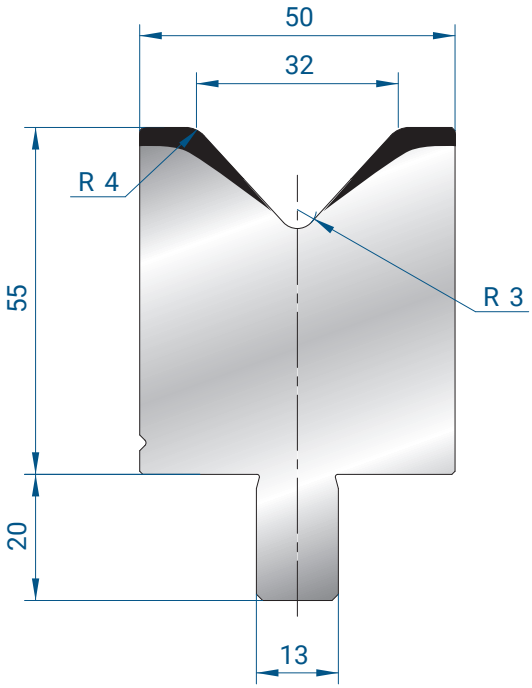

3111

Mat = C45
Max T/m = 100
α = 85°


1000 mm	21,4 kg
500 mm	10,7 kg
1100 mm FRAZ. / SECT.	23,5 kg
550 mm SECT. SHORT	11,8 kg
100 mm	2,1 kg

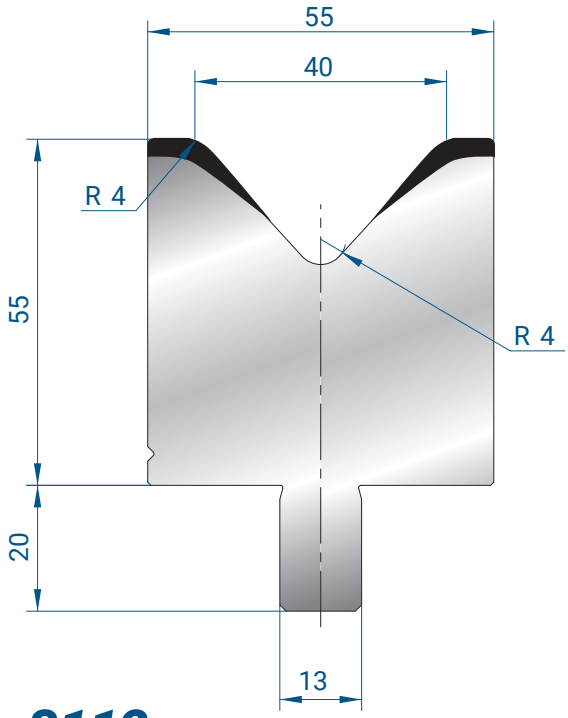


3112

Mat = C45
Max T/m = 100
α = 85°

1000 mm	22,3 kg
500 mm	11,2 kg
1100 mm FRAZ. / SECT.	24,5 kg
550 mm SECT. SHORT	12,3 kg
100 mm	2,2 kg

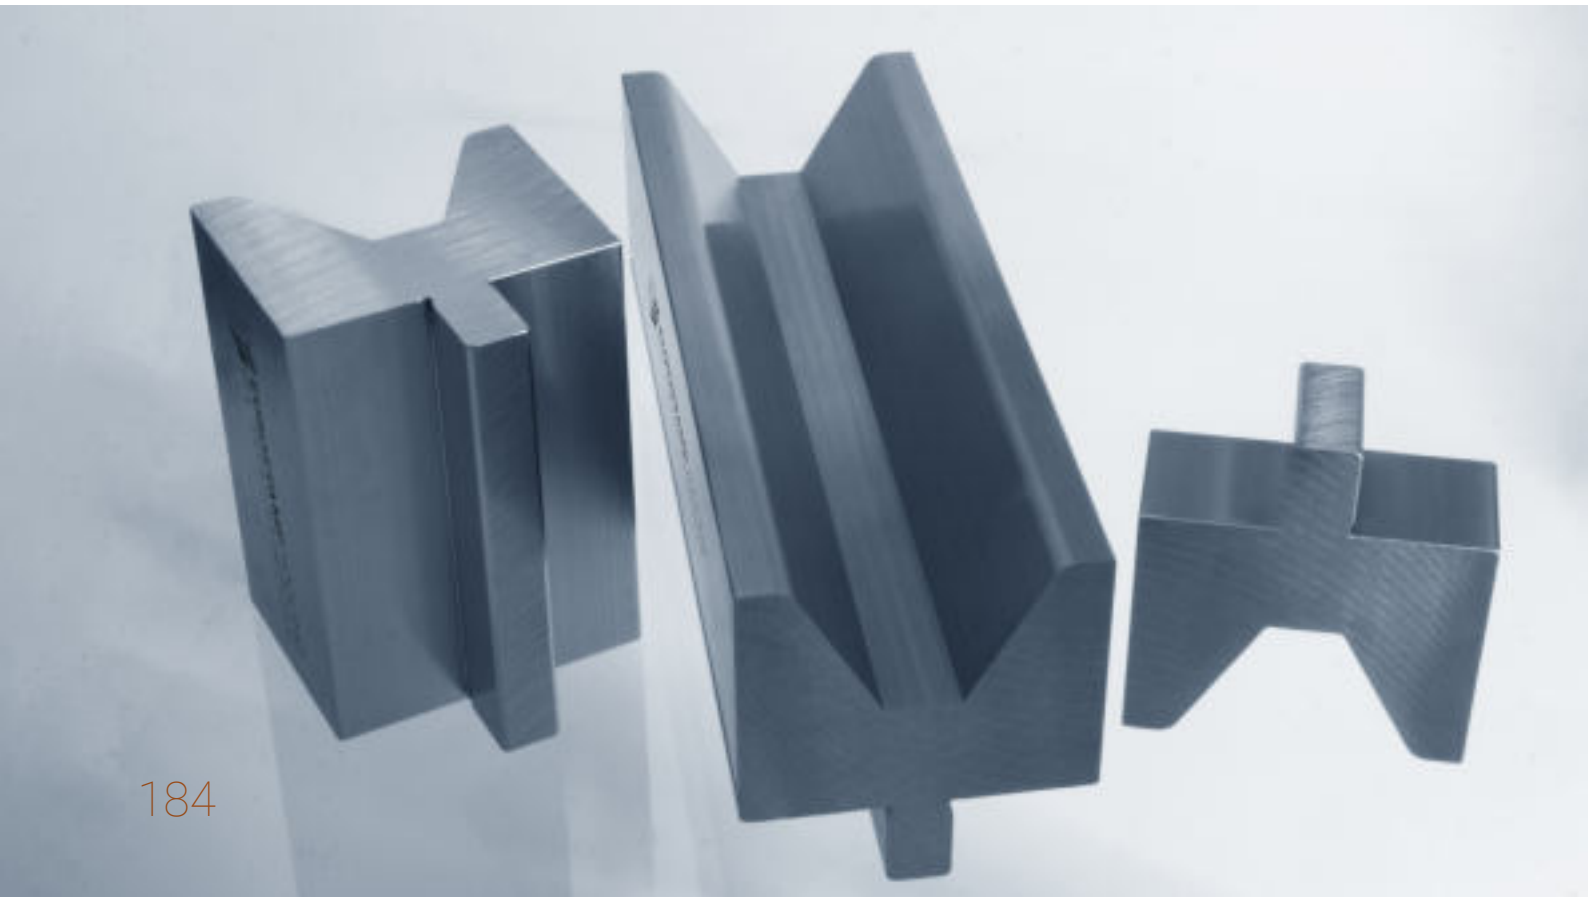


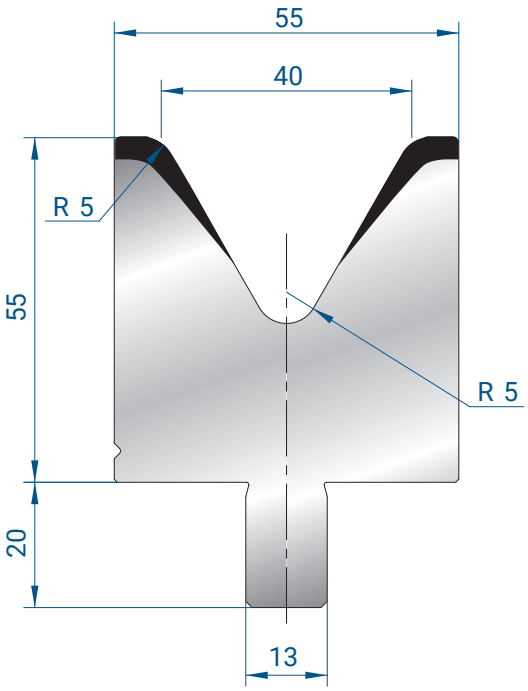

3113

Mat = C45
Max T/m = 100
α = 60°


1000 mm	20,4 kg
500 mm	10,2 kg
1100 mm FRAZ. / SECT.	22,4 kg
550 mm SECT. SHORT	11,2 kg
100 mm	2,0 kg

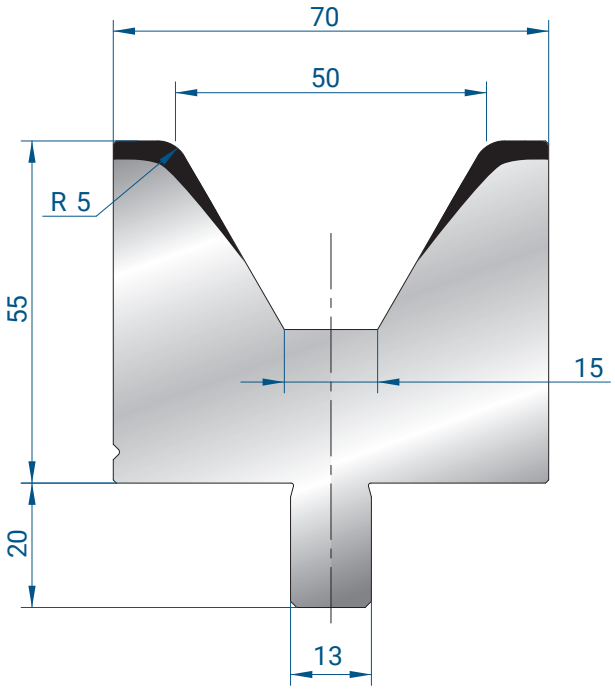

3179

Mat = C45
Max T/m = 100
α = 60°


1000 mm	24,4 kg
500 mm	12,2 kg
1100 mm FRAZ. / SECT.	26,9 kg
550 mm SECT. SHORT	13,5 kg
100 mm	2,4 kg

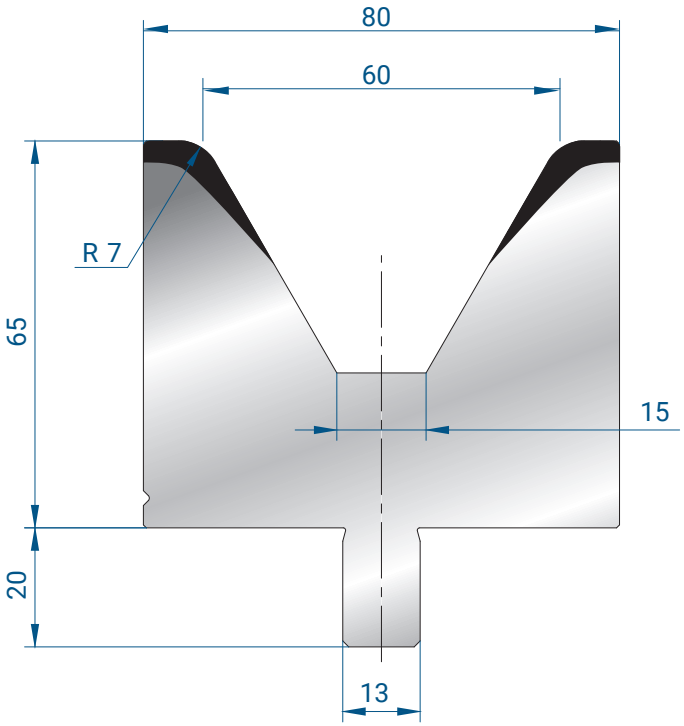

3114

Mat = C45
Max T/m = 100
α = 60°


1000 mm	31,2 kg
500 mm	15,6 kg
1100 mm FRAZ. / SECT.	34,4 kg
550 mm SECT. SHORT	17,2 kg
100 mm	3,1 kg

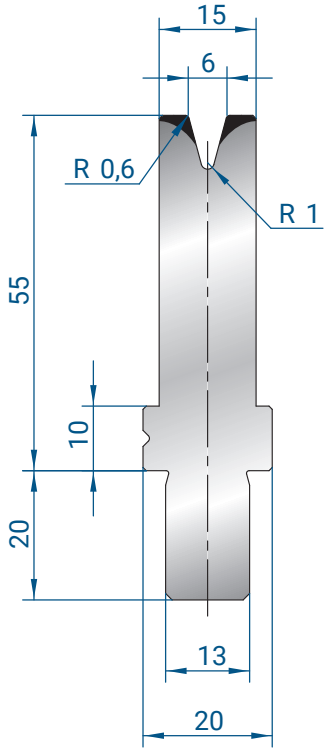

3115

Mat = C45
Max T/m = 35
α = 30°


1000 mm	8,6 kg
500 mm	4,3 kg
1100 mm FRAZ. / SECT.	9,5 kg
550 mm SECT. SHORT	4,7 kg
100 mm	0,9 kg

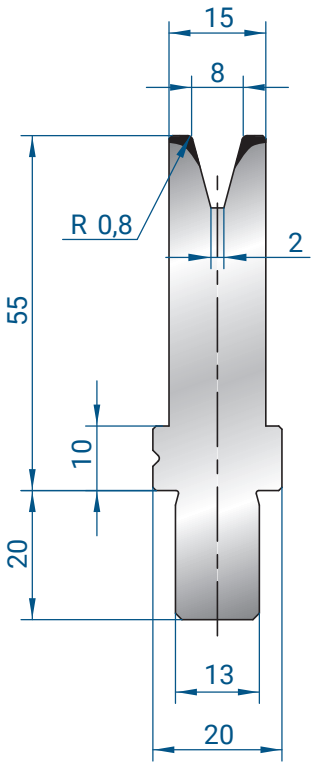

3116

Mat = C45
Max T/m = 40
α = 30°


1000 mm	8,4 kg
500 mm	4,2 kg
1100 mm FRAZ. / SECT.	9,3 kg
550 mm SECT. SHORT	4,6 kg
100 mm	0,8 kg

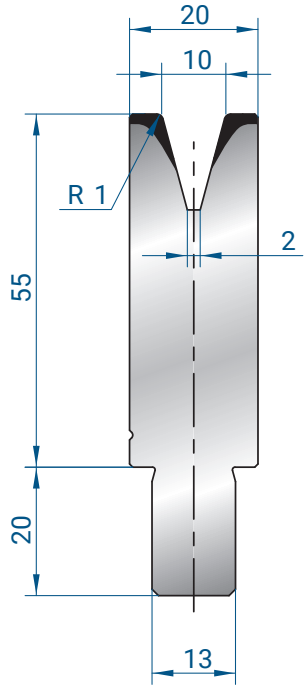


3117

Mat = C45
Max T/m = 50
α = 30°

1000 mm	9,9 kg
500 mm	5,0 kg
1100 mm FRAZ. / SECT.	10,9 kg
550 mm SECT. SHORT	5,5 kg
100 mm	1,0 kg

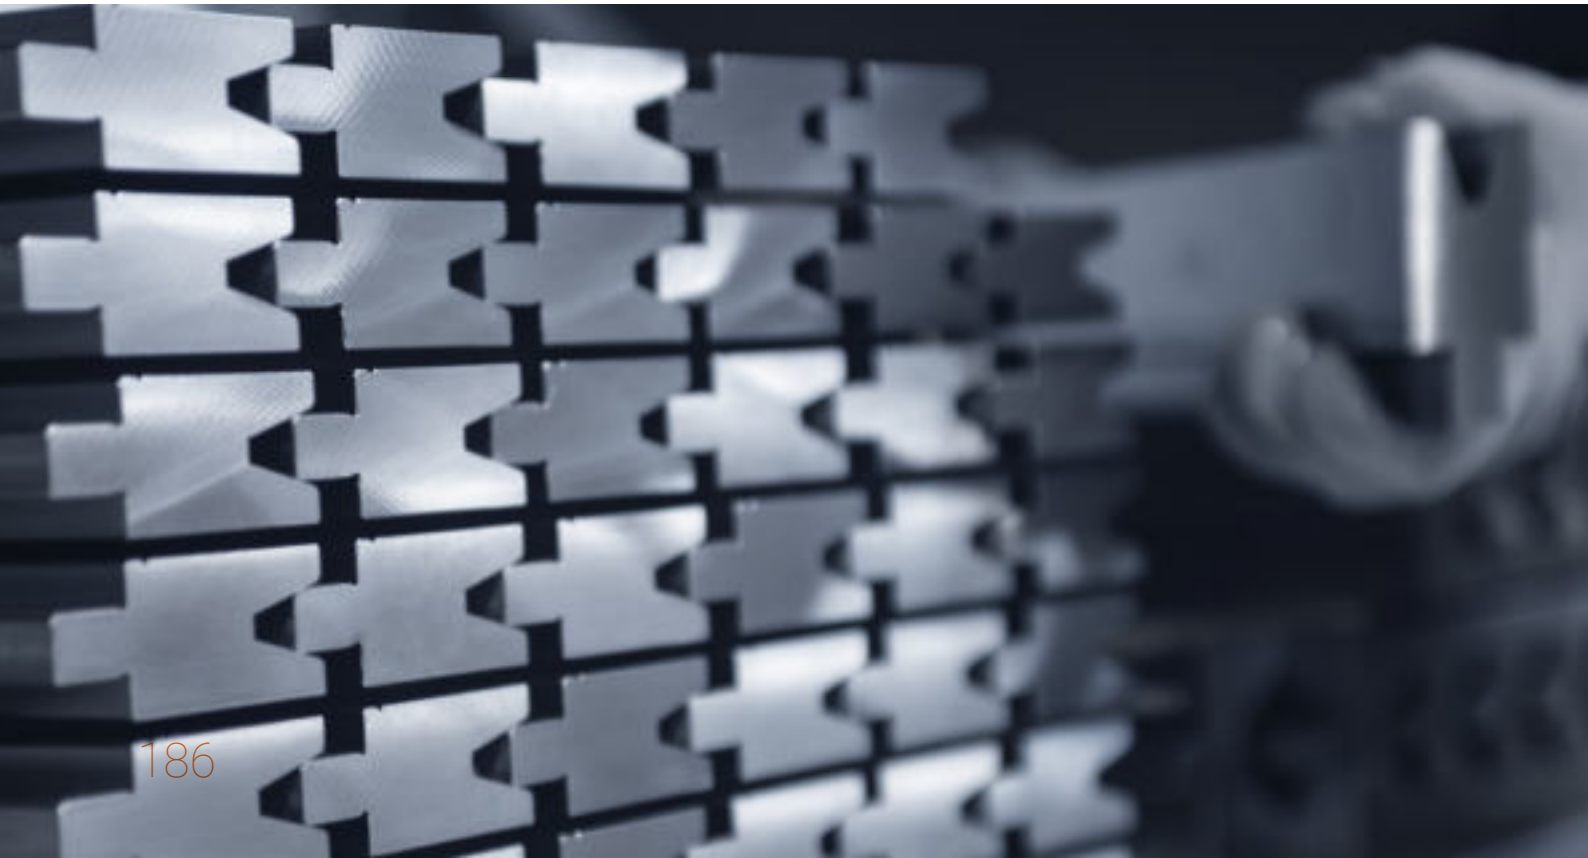


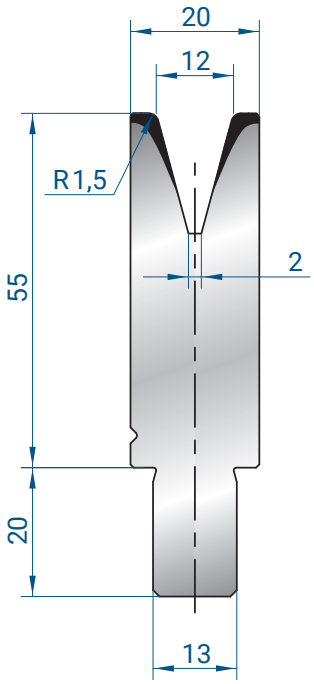

3118

Mat = C45
Max T/m = 40
α = 30°


1000 mm	9,6 kg
500 mm	4,8 kg
1100 mm FRAZ. / SECT.	10,6 kg
550 mm SECT. SHORT	5,3 kg
100 mm	1,0 kg

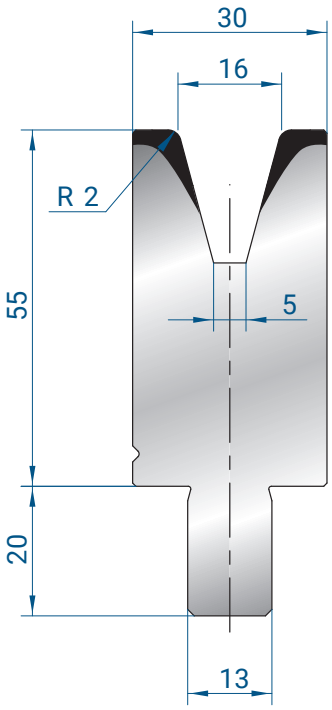

3119

Mat = C45
Max T/m = 50
α = 30°


1000 mm	13,2 kg
500 mm	6,6 kg
1100 mm FRAZ. / SECT.	14,6 kg
550 mm SECT. SHORT	7,3 kg
100 mm	1,3 kg

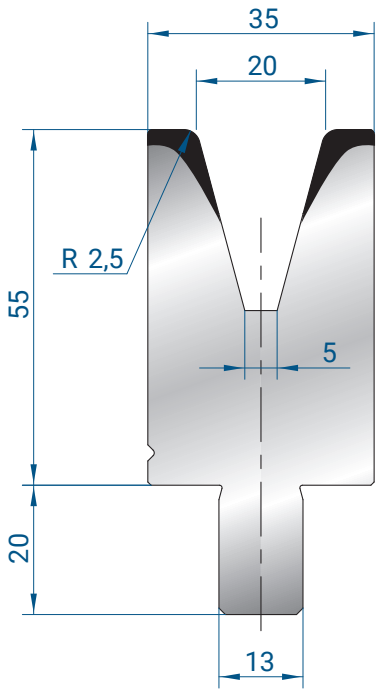

3120

Mat = C45
Max T/m = 55
α = 30°

1000 mm	14,3 kg
500 mm	7,2 kg
1100 mm FRAZ. / SECT.	15,8 kg
550 mm SECT. SHORT	7,9 kg
100 mm	1,4 kg

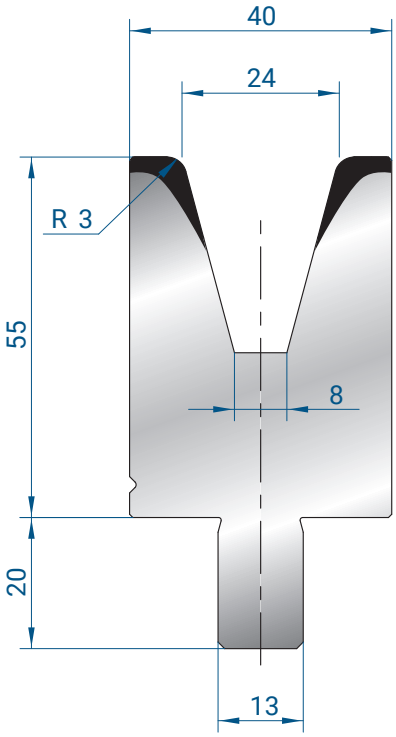

3121


Mat = C45
Max T/m = 65
α = 30°


1000 mm	15,5 kg
500 mm	7,7 kg
1100 mm FRAZ. / SECT.	17,0 kg
550 mm SECT. SHORT	8,5 kg
100 mm	1,5 kg

3122

Mat = C45
Max T/m = 65
α = 30°

1000 mm	23,4 kg
500 mm	11,7 kg
1100 mm FRAZ. / SECT.	25,8 kg
550 mm SECT. SHORT	12,9 kg
100 mm	2,3 kg

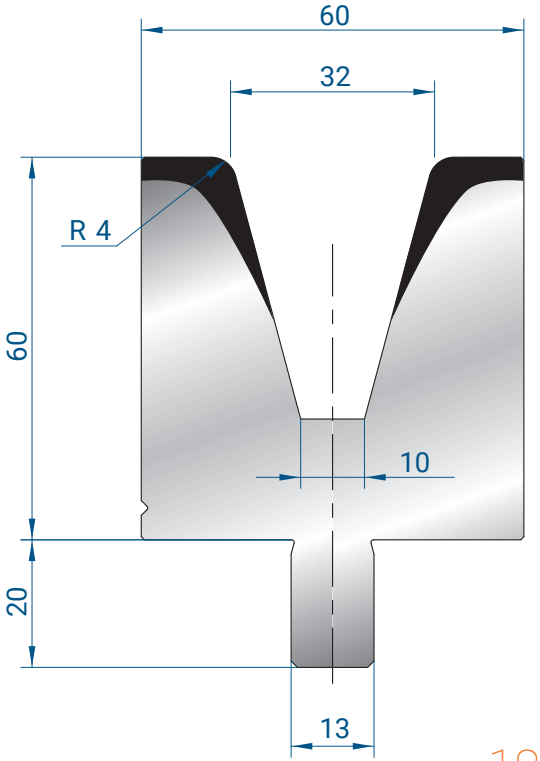

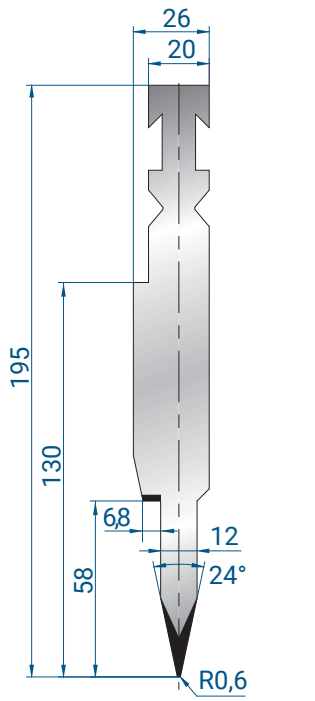


1254

Mat = C45
bonificato / *tempered*
Max T/m = 80

500 mm	13,7 kg
550 mm FRAZ. / SECT.	13,9 kg
100 mm	2,7 kg

Spessore / *Thickness*


Max 1,5 mm
Ferro / *Mild steel*

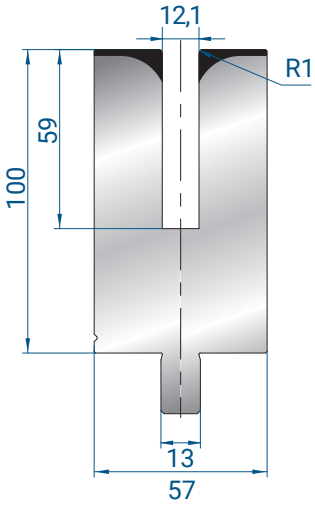

3175

Mat = C45
bonificato / *tempered*
Max T/m = 50

500 mm	20,5 kg
550 mm FRAZ. / SECT.	22,6 kg
100 mm	4,1 kg

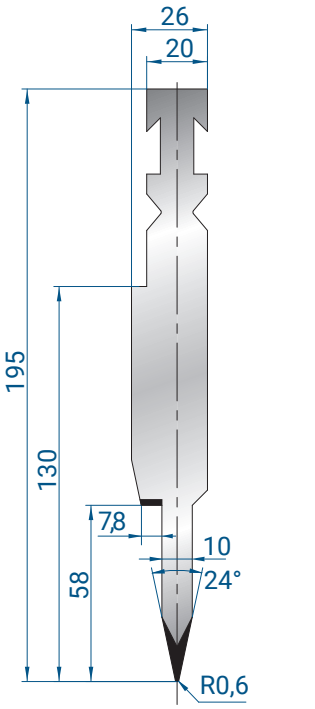


1253

Mat = C45
bonificato / *tempered*
Max T/m = 80

500 mm	13,4 kg
550 mm FRAZ. / SECT.	13,7 kg
100 mm	2,7 kg

Spessore / *Thickness*

Max 1,5 mm
Ferro / *Mild steel*

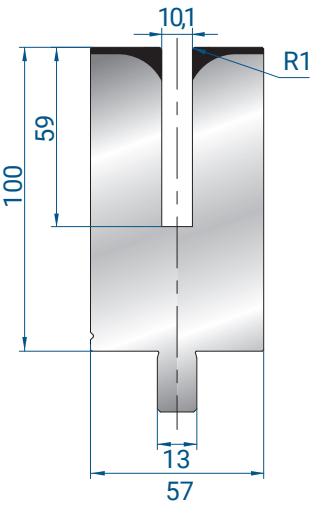


3174

Mat = C45
bonificato / *tempered*
Max T/m = 50

500 mm	21,0 kg
550 mm FRAZ. / SECT.	23,1 kg
100 mm	4,2 kg



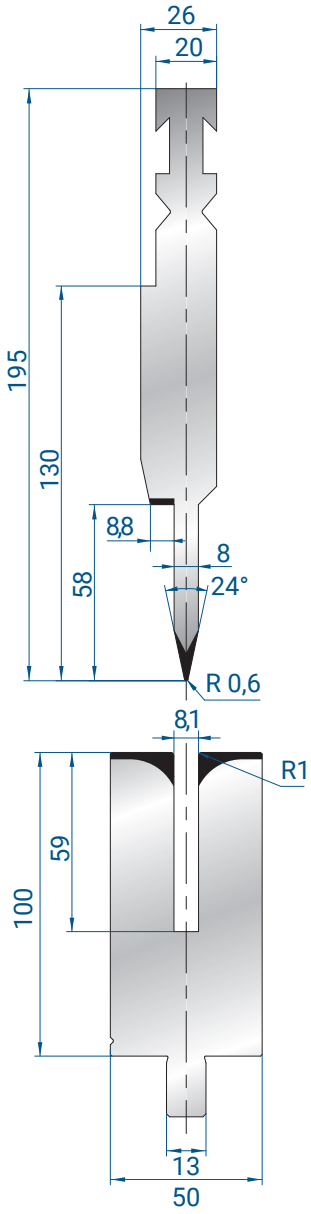


1252

Mat = C45
bonificato / *tempered*
Max T/m = 80

500 mm	13,0 kg
550 mm FRAZ. / SECT.	13,3 kg
100 mm	2,6 kg

Spessore / *Thickness*


Max 1,2 mm
Ferro / *Mild steel*

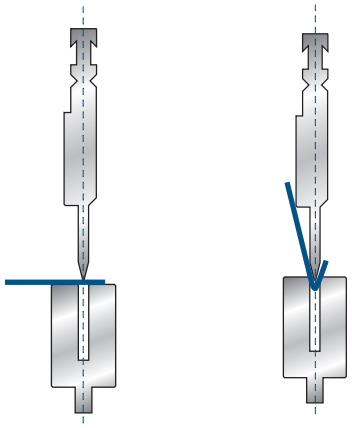


3157

Mat = C45
bonificato / *tempered*
Max T/m = 50

500 mm	18,7 kg
550 mm FRAZ. / SECT.	20,6 kg
100 mm	3,7 kg

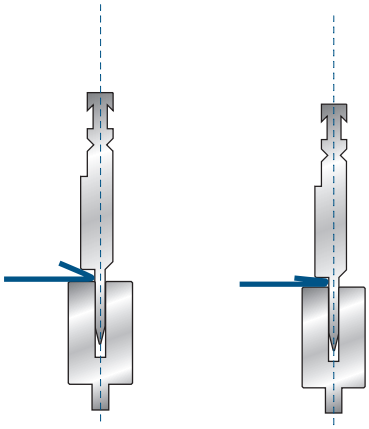


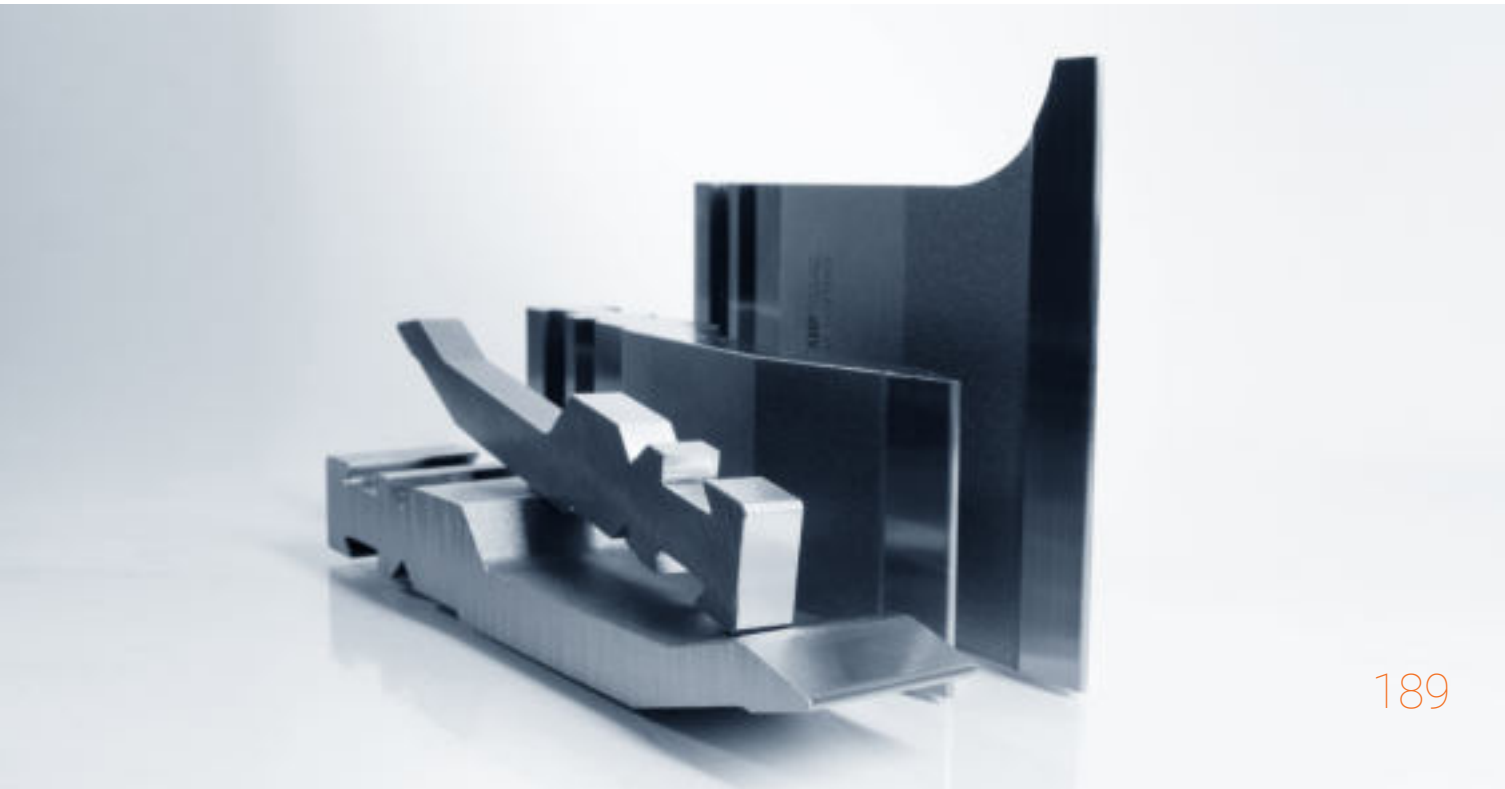



ACCESSORI
ACCESSORIES



P TOOLING
excellence

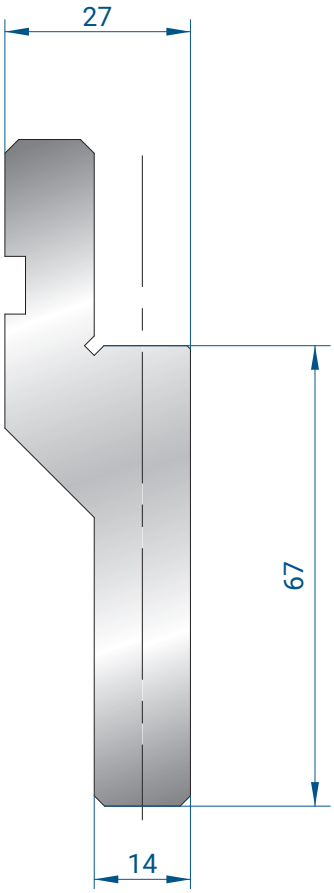

1036

AMADA PROMECAM STYLE
Mat = C45
Max T/m = 80


830 mm	9,2 kg
410 mm	4,5 kg

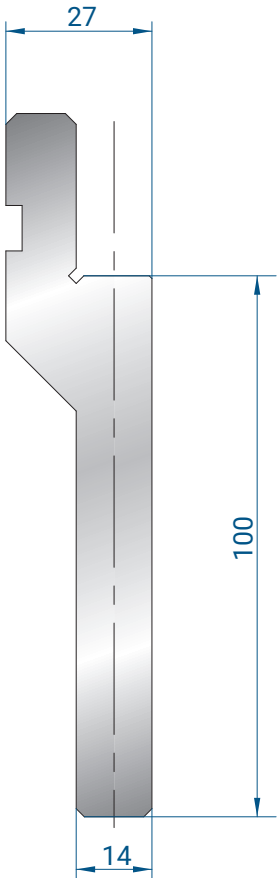

1096

AMADA PROMECAM STYLE
Mat = C45
Max T/m = 80

830 mm	12,2 kg
410 mm	6,0 kg

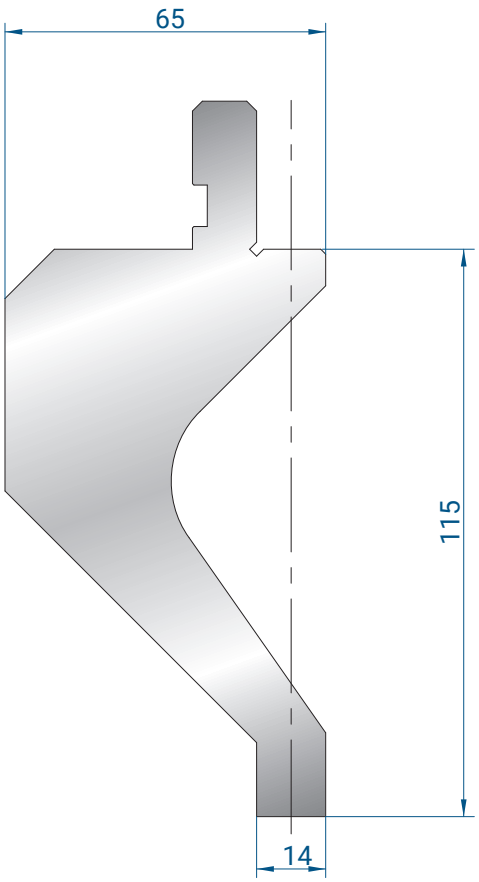


1090

AMADA PROMECAM STYLE
Mat = C45
Max T/m = 50

830 mm	25,6 kg
410 mm	12,6 kg




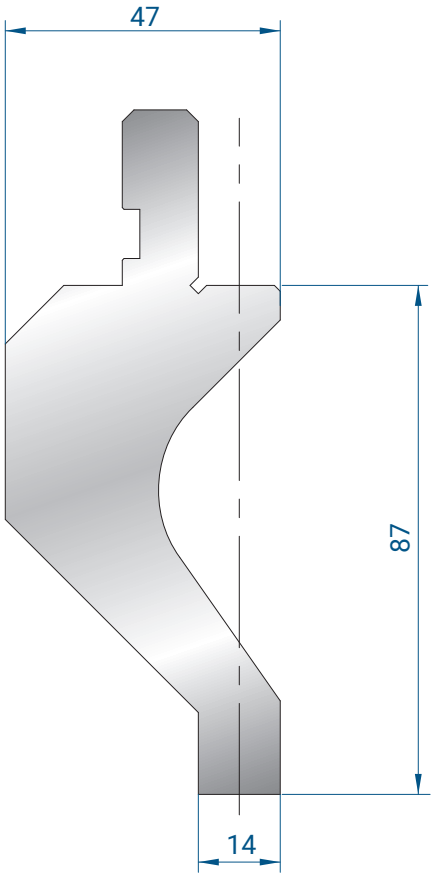

1091

AMADA PROMECAM STYLE
Mat = C45
Max T/m = 50


830 mm	15,8 kg
410 mm	7,8 kg

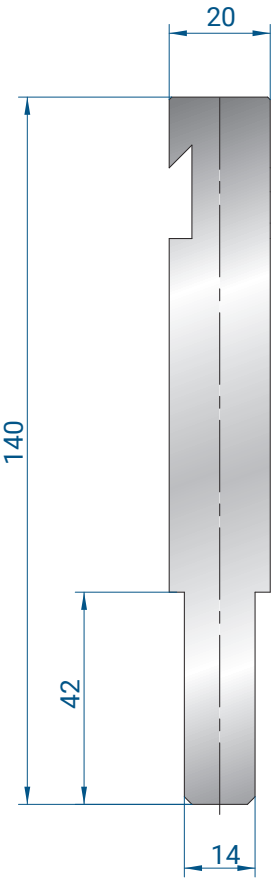

1239

BYSTRONIC R STYLE
Mat = C45
Max T/m = 80

830 mm	15,3 kg
410 mm	7,6 kg

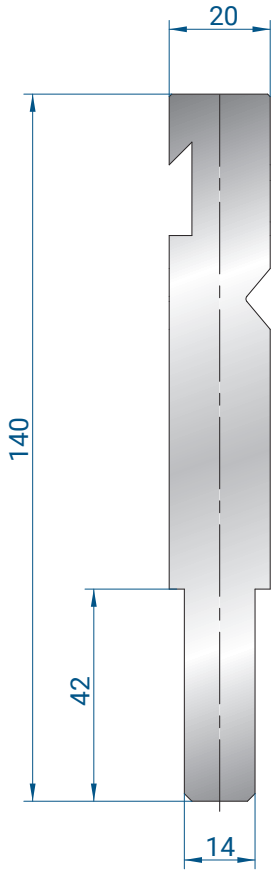


1273

BYSTRONIC RF - A STYLE
Mat = C45
Max T/m = 80

830 mm	15,1 kg
412 mm	7,5 kg




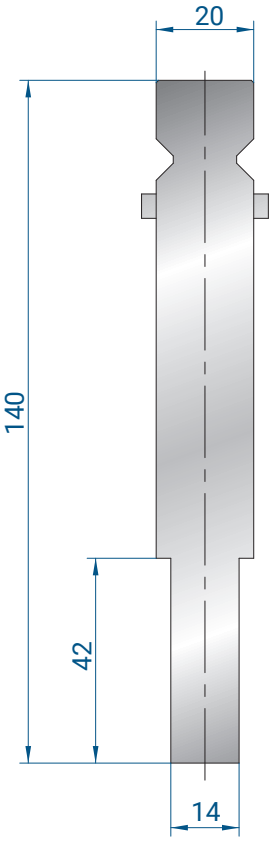

1240

TRUMPF / WILA STYLE
Mat = C45
Max T/m = 80


830 mm	15,6 kg
410 mm	7,7 kg

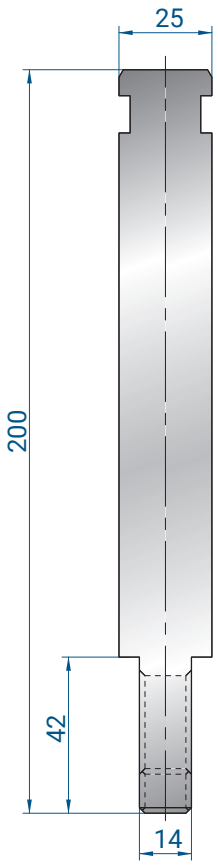

1305

WEINBRENNER STYLE
Mat = C45
Max T/m = 80

830 mm	28,3 kg
410 mm	14,0 kg

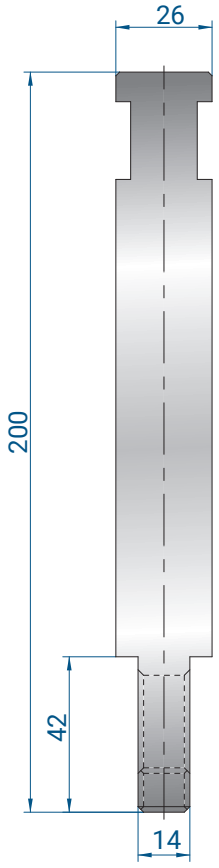

1306


EHT STYLE
Mat = C45
Max T/m = 80

830 mm	28,6 kg
410 mm	14,1 kg


1155


AMADA/PROMECAM STYLE
Mat = C45

830 mm	9,4 kg
410 mm	4,6 kg

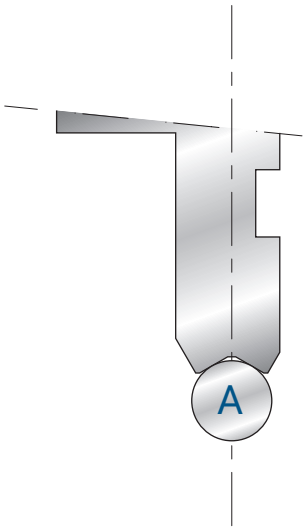


da/*from* **R 5 mm**
a/*to* **R 6,5 mm**

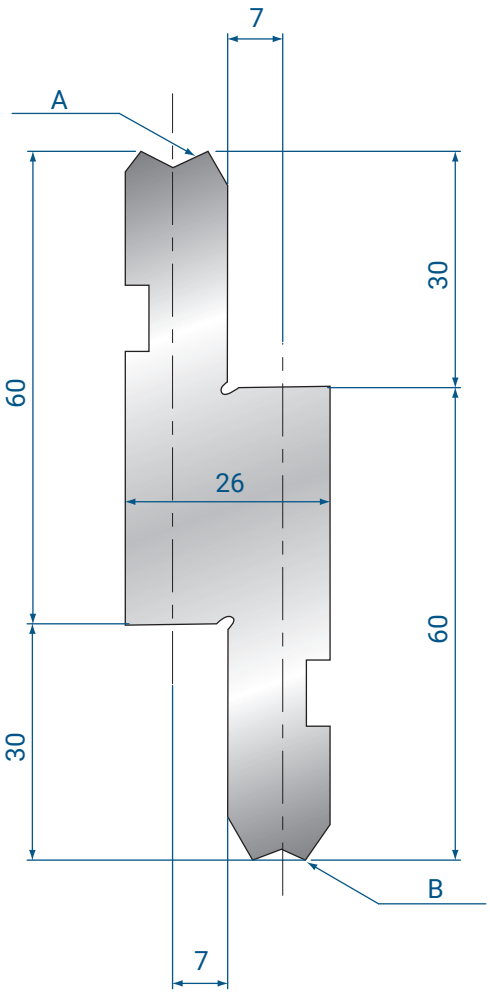

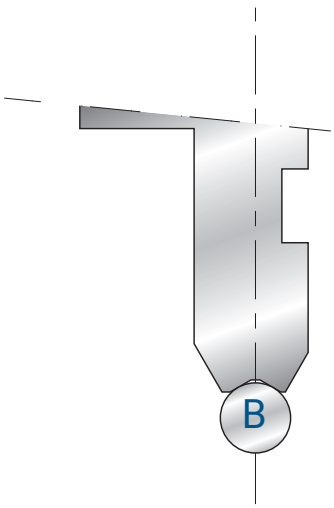

da/*from* **R 3 mm**
a/*to* **R 4,5 mm**

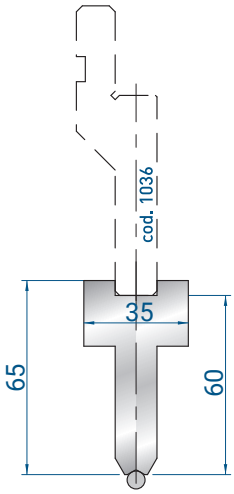


1296


da/*from* **R 3 mm**
a/*to* **R 4,5 mm**

830 mm	8,2 kg
410 mm	4,1 kg

4275

PEZZO DI RICAMBIO
SPARE PART



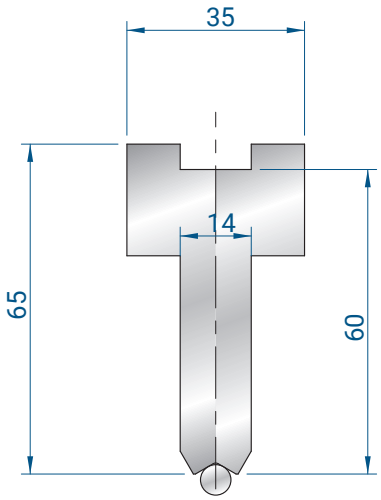


1297

da/*from* **R 5 mm**
a/*to* **R 6,5 mm**


830 mm	8,2 kg
410 mm	4,1 kg

SOLO PER SUPPORTI
ONLY FOR HOLDERS

1155 - 1296 - 1297

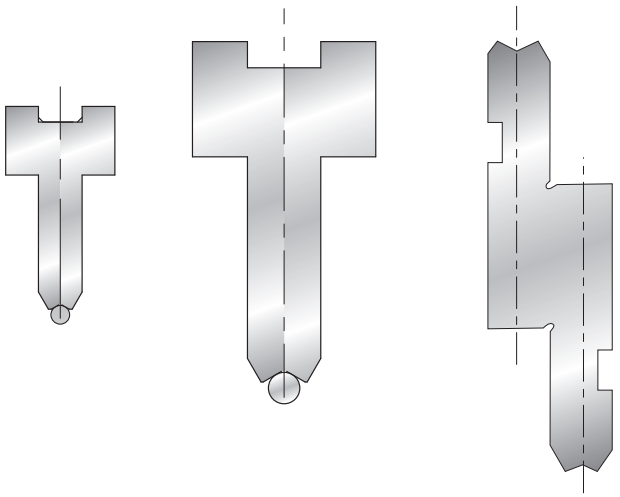


1180



Mat = C45

835 mm	0,2 kg
415 mm	0,1 kg


1181



Mat = C45

835 mm	0,3 kg
415 mm	0,1 kg


1182



Mat = C45

835 mm	0,3 kg
415 mm	0,2 kg


1183



Mat = C45

835 mm	0,4 kg
415 mm	0,2 kg


1184



Mat = C45

835 mm	0,5 kg
415 mm	0,3 kg


1185



Mat = C45

835 mm	0,6 kg
415 mm	0,3 kg


1186

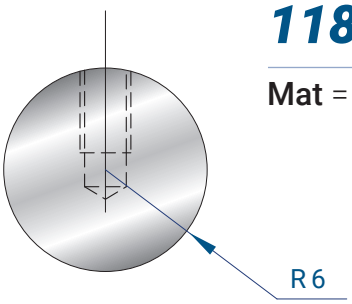

Mat = C45

835 mm	0,7 kg
415 mm	0,4 kg

1187

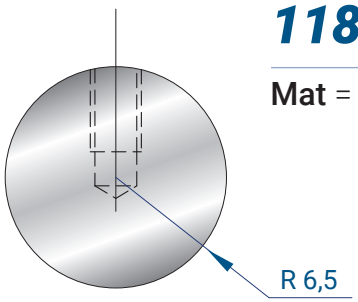


Mat = C45


835 mm	0,9 kg
415 mm	0,4 kg

GAMMA SUPPORTI DISPONIBILI A PAG.
AVAILABLE RANGE OF HOLDERS ON PAG.

192; 193; 194

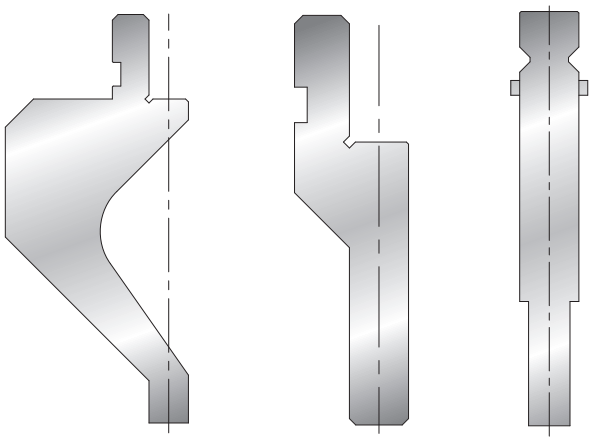


1100



Mat = C45

835 mm	0,8 kg
415 mm	0,4 kg


1101



Mat = C45

835 mm	1,0 kg
415 mm	0,5 kg


1102



Mat = C45

835 mm	1,0 kg
415 mm	0,5 kg


1103

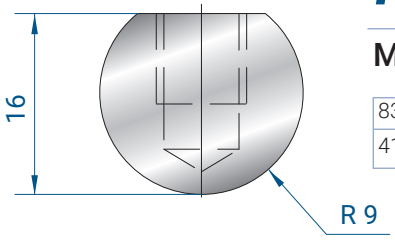

Mat = C45

835 mm	1,0 kg
415 mm	0,5 kg


1037

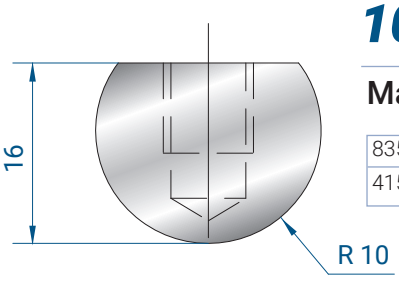

Mat = C45

835 mm	2,0 kg
415 mm	1,0 kg


1104

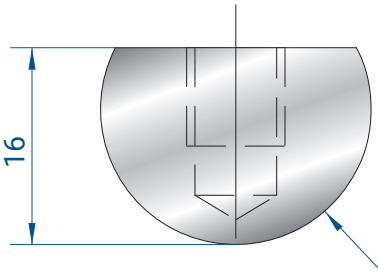

Mat = C45

835 mm	2,0 kg
415 mm	1,0 kg




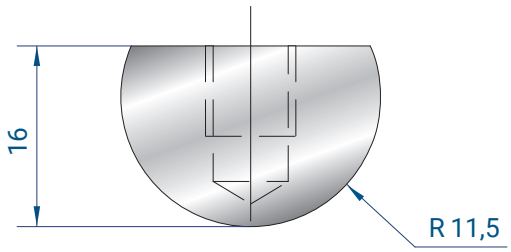

1105

Mat = C45


835 mm	2,0 kg
415 mm	1,0 kg

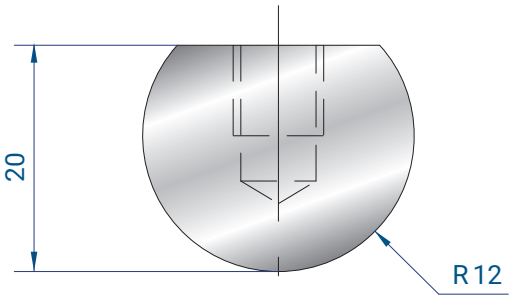

1106

Mat = C45


835 mm	2,0 kg
415 mm	1,0 kg

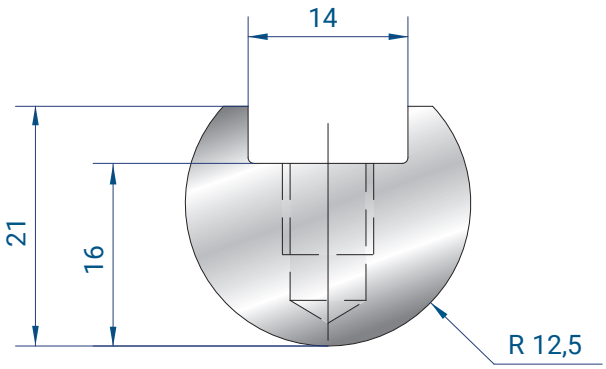

1107

Mat = C45


835 mm	3,0 kg
415 mm	1,5 kg

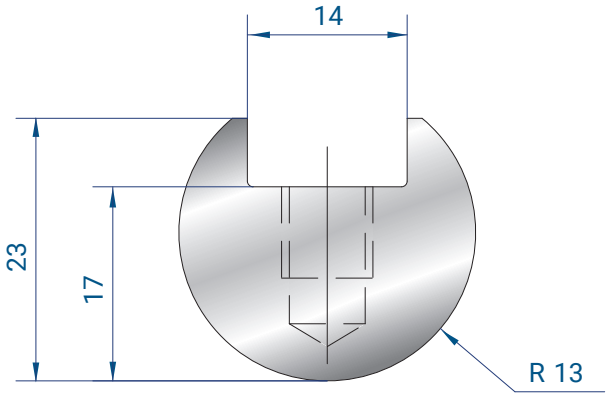

1108

Mat = C45


835 mm	3,0 kg
415 mm	1,0 kg

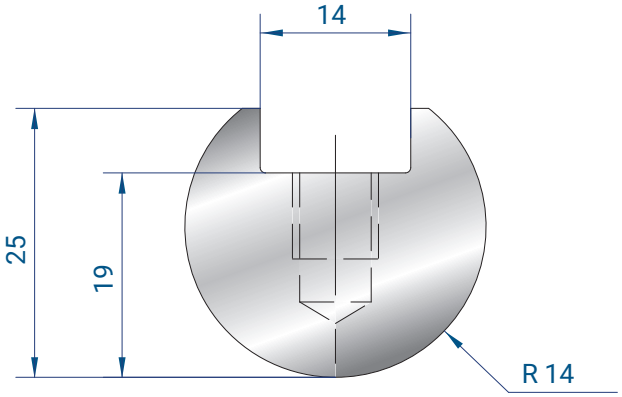

1109

Mat = C45


835 mm	4,0 kg
415 mm	2,0 kg

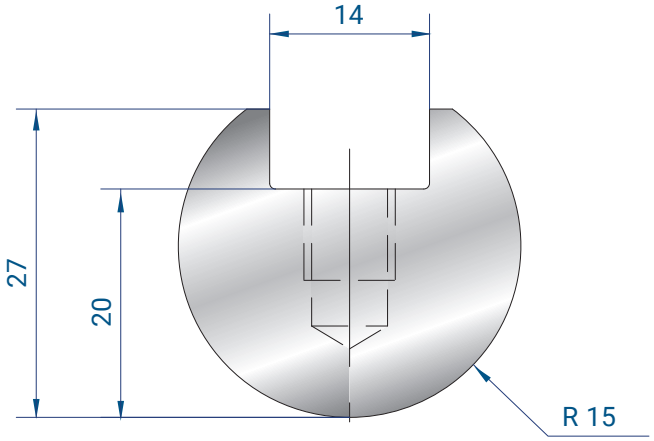

1038

Mat = C45


835 mm	4,0 kg
415 mm	2,0 kg

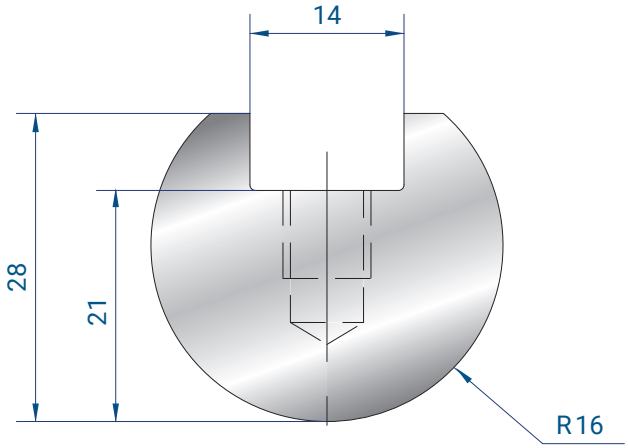

1110

Mat = C45


835 mm	5,0 kg
415 mm	2,0 kg

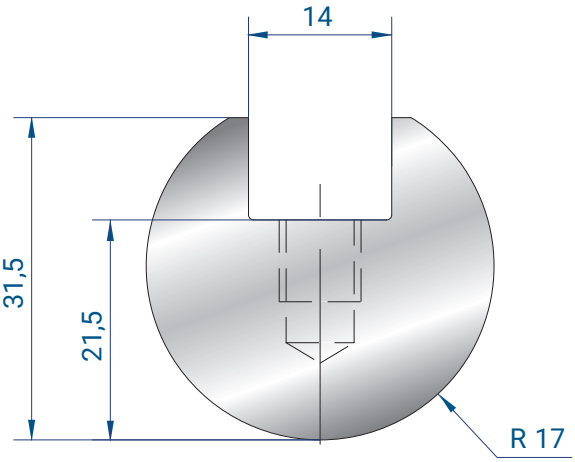

1111

Mat = C45


835 mm	5,0 kg
415 mm	2,5 kg

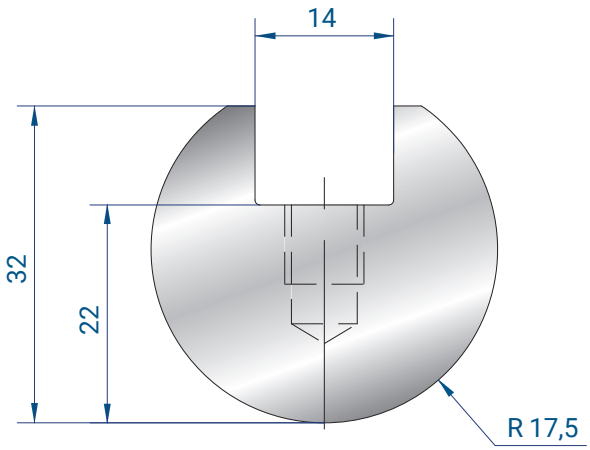

1039

Mat = C45


835 mm	5,0 kg
415 mm	2,5 kg

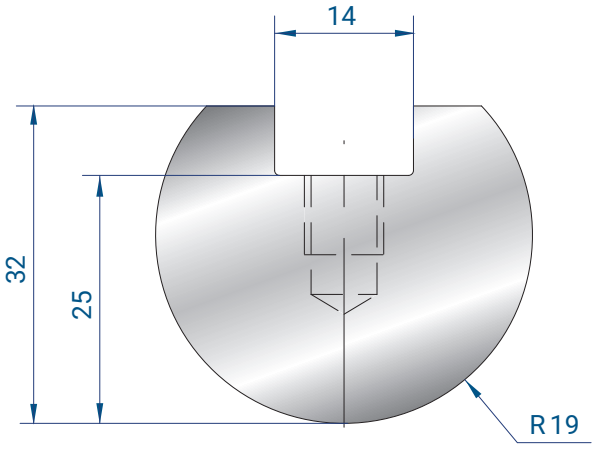

1112

Mat = C45


835 mm	6,0 kg
415 mm	3,0 kg

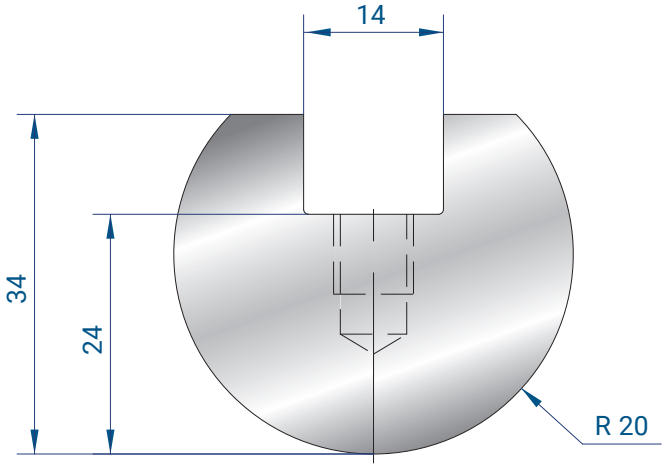

1040

Mat = C45


835 mm	6,0 kg
415 mm	3,0 kg

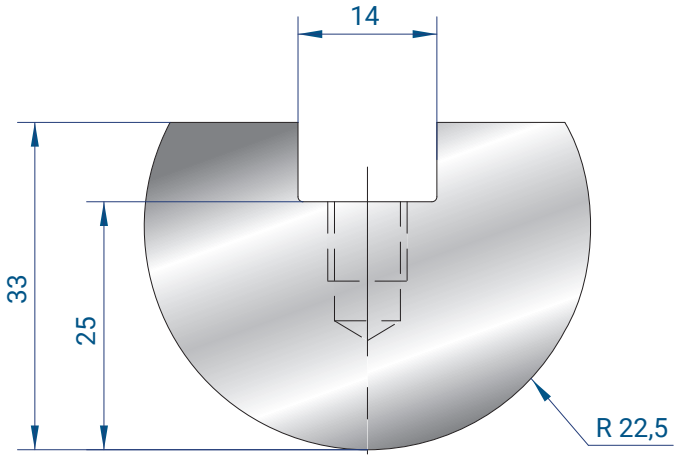

1113

Mat = C45


835 mm	8,0 kg
415 mm	4,0 kg

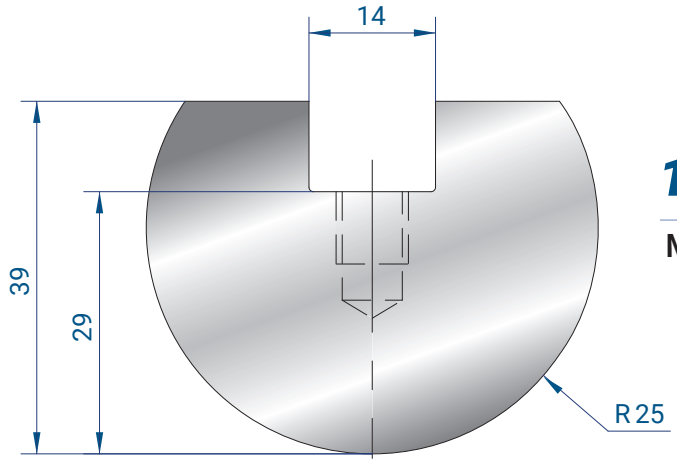

1041

Mat = C45


835 mm	9,0 kg
415 mm	4,0 kg

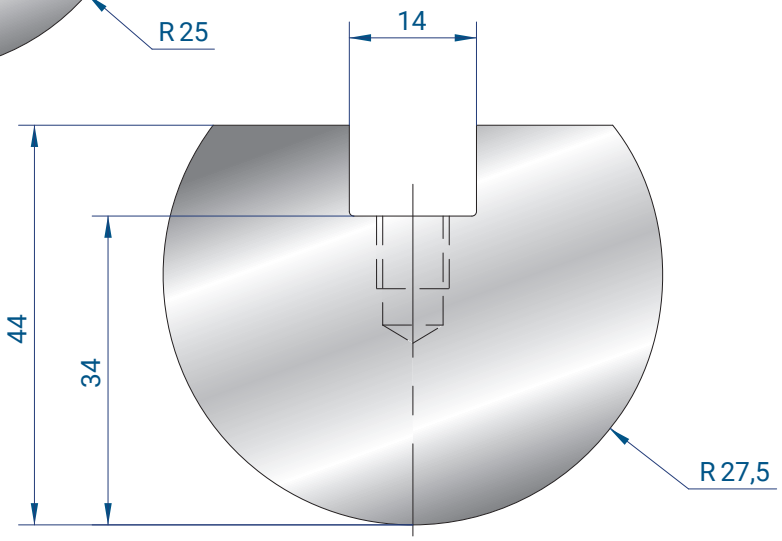

1114

Mat = C45


835 mm	12,0 kg
415 mm	6,0 kg

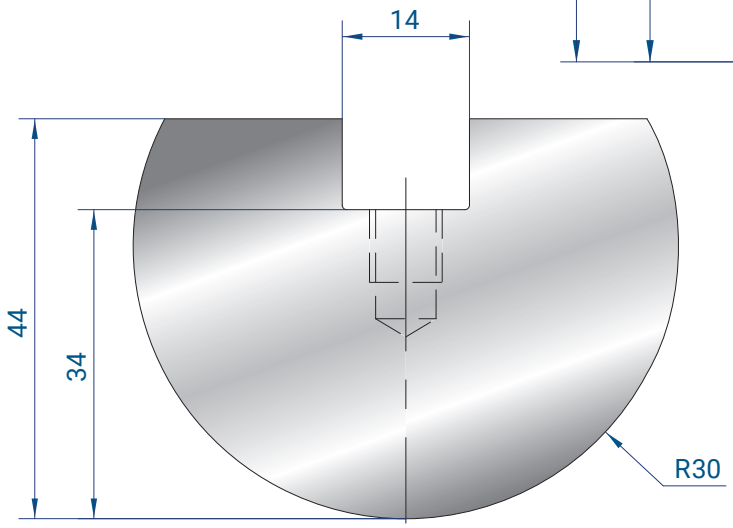

1042

Mat = C45


835 mm	13,0 kg
415 mm	6,0 kg

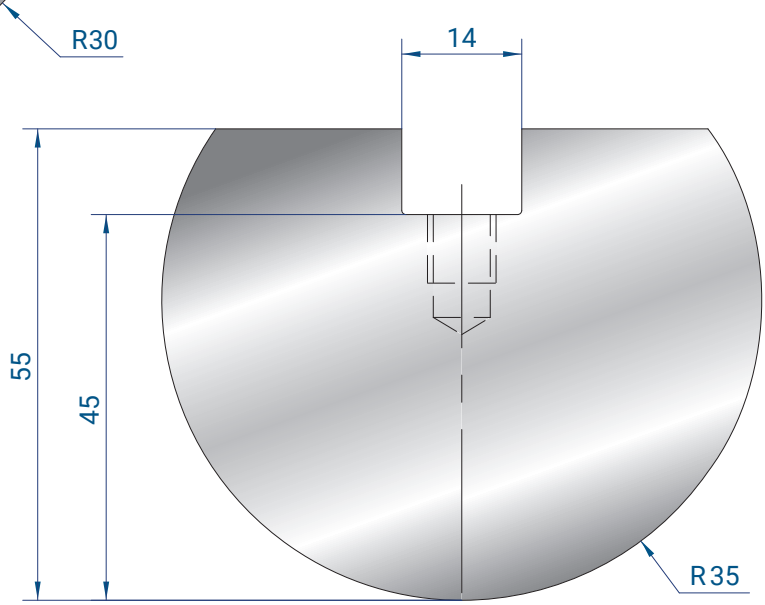

1115

Mat = C45


835 mm	21,0 kg
415 mm	10,0 kg

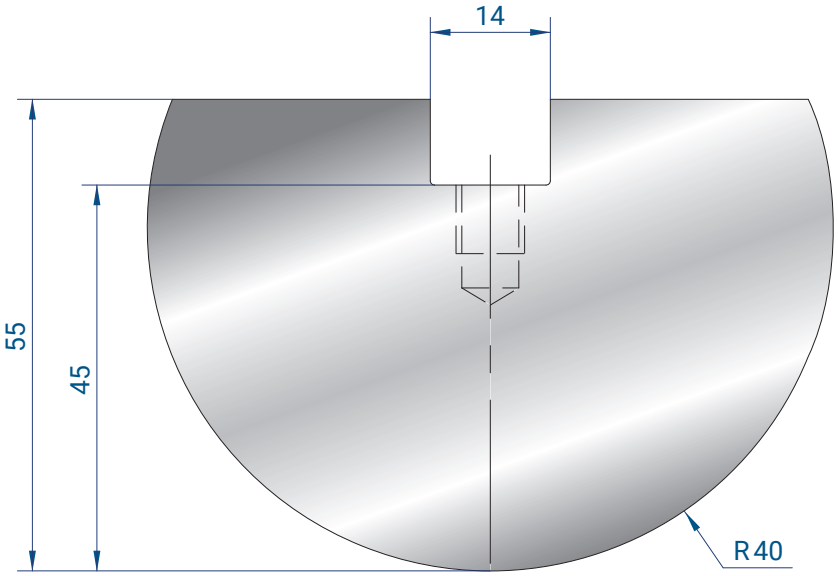

1116

Mat = C45


835 mm	24,0 kg
415 mm	12,0 kg

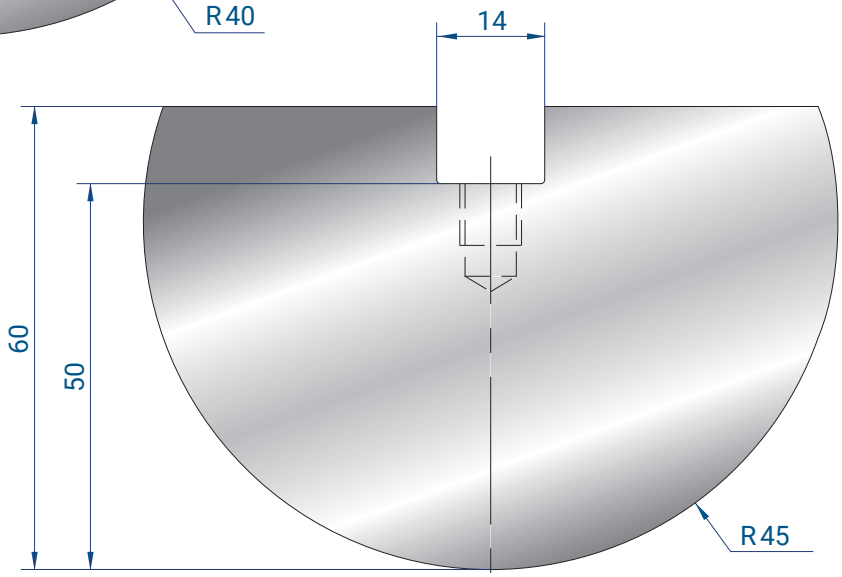

1117

Mat = C45

835 mm	29,0 kg
415 mm	14,0 kg

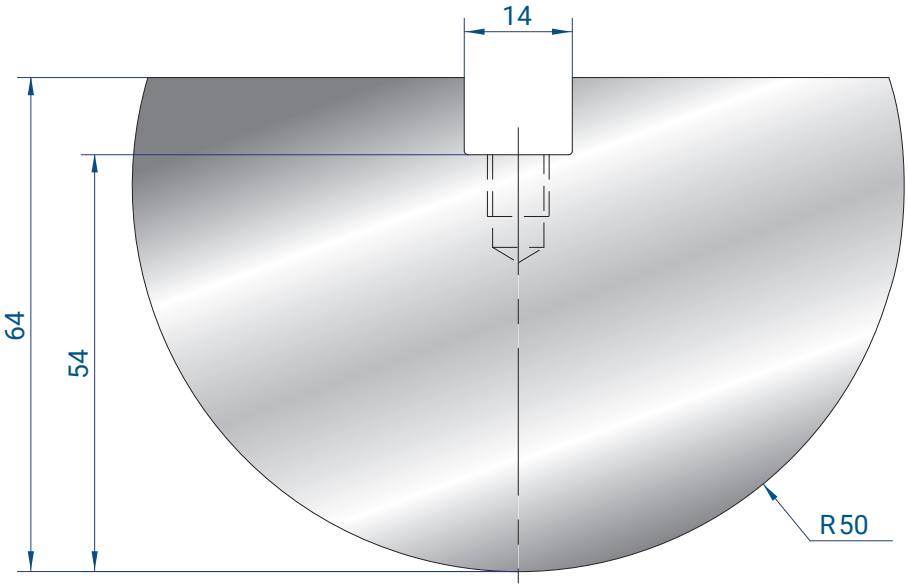


1118

Mat = C45

835 mm	34,0 kg
415 mm	17,0 kg




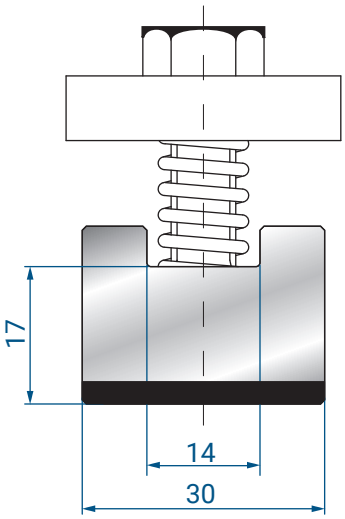


1043

Mat = C45

835 mm	3,8 kg
415 mm	1,9 kg

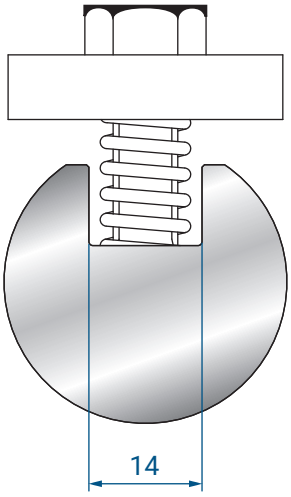




4274

Mat = C45

MOLLA + VITE + PIASTRINA
SPRING + SCREW + PLATE

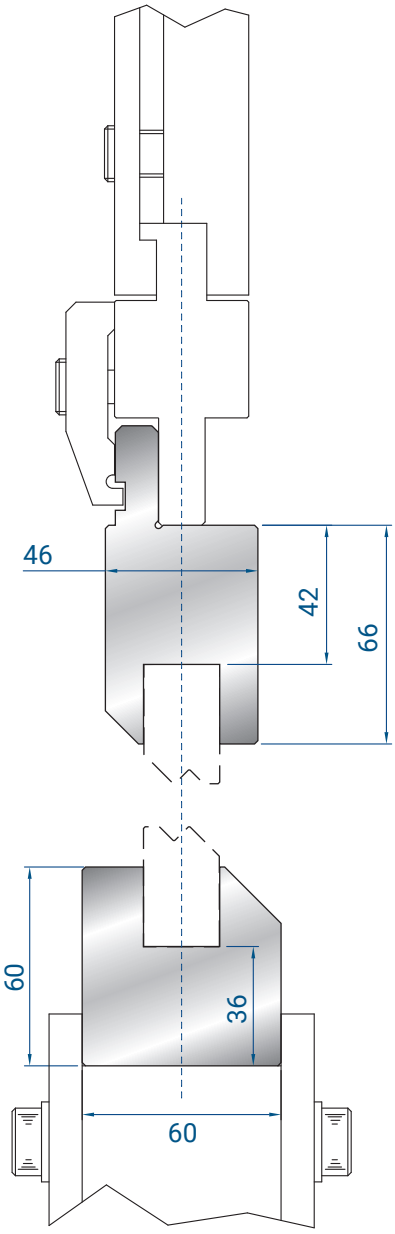


1150

AMADA / PROMECAM STYLE

Mat = C45

835 mm	37,1 kg
415 mm	18,4 kg

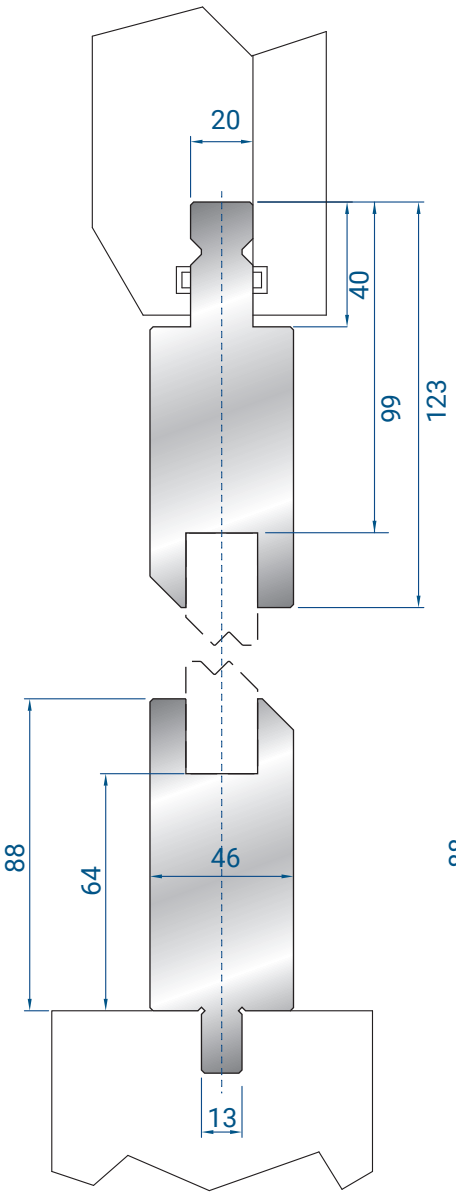


1242

TRUMPF /WILA STYLE

Mat = C45

835 mm	50,0 kg
415 mm	24,9 kg

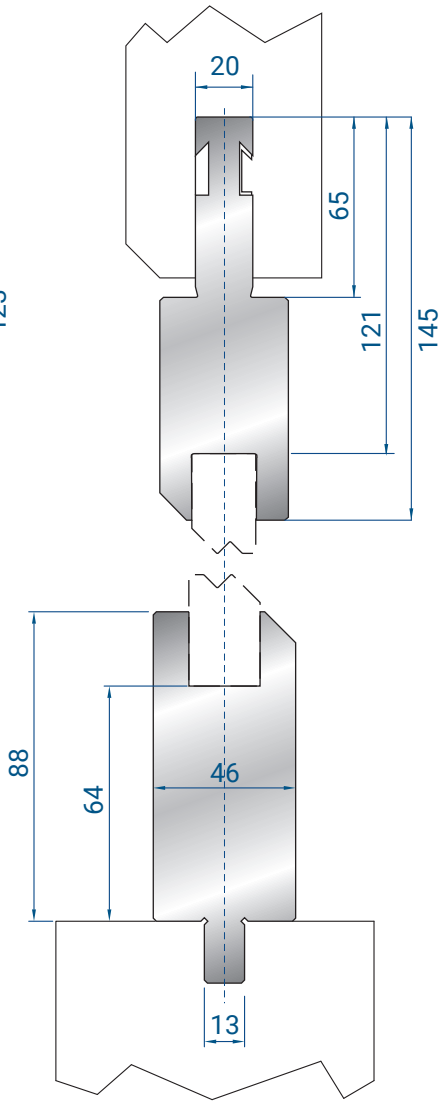

1198


BYSTRONIC STYLE

Mat = C45

835 mm	51,7 kg
415 mm	25,7 kg

ATTACCO / *UPPER TANG* **RF-A**


INCLUSO SU RICHIESTA
AVAILABLE ON DEMAND
AT NO COST

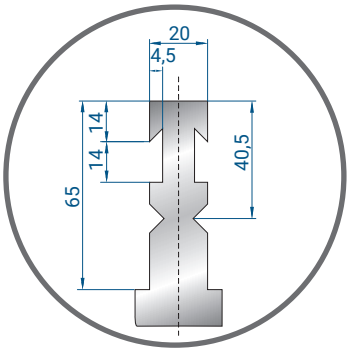

CODE	Z	GRADI *DEGREES*	SPESSORE MAX. LAMIERA *MAX SHEET THICKNESS*
1130	1	160°	0,5 mm
1276	1	90°	0,5 mm
1131	1,5	160°	0,6 mm
1277	1,5	90°	0,6 mm
1132	2	150°	0,8 mm
1274	2	90°	0,8 mm
1133	2,5	140°	1,0 mm
1275	2,5	90°	1,0 mm
1134	3	90°	1,0 mm
1135	3,5	90°	1,2 mm
1136	4	90°	1,2 mm
1137	4,5	90°	1,5 mm
1138	5	90°	1,5 mm
1139	5,5	90°	1,5 mm
1140	6	90°	1,5 mm
1141	6,5	90°	1,5 mm
1142	7	90°	2,0 mm
1143	7,5	90°	2,0 mm
1144	8	90°	2,5 mm
1145	9	90°	2,5 mm
1146	10	90°	3,0 mm
1147	11	90°	3,0 mm
1148	12	90°	3,0 mm
1278	13	90°	3,0 mm
1279	14	90°	3,0 mm
1280	15	90°	3,0 mm



INSERTI A Z - 140° - 150° - 160°
OFFSET TOOL - 140° - 150° - 160°

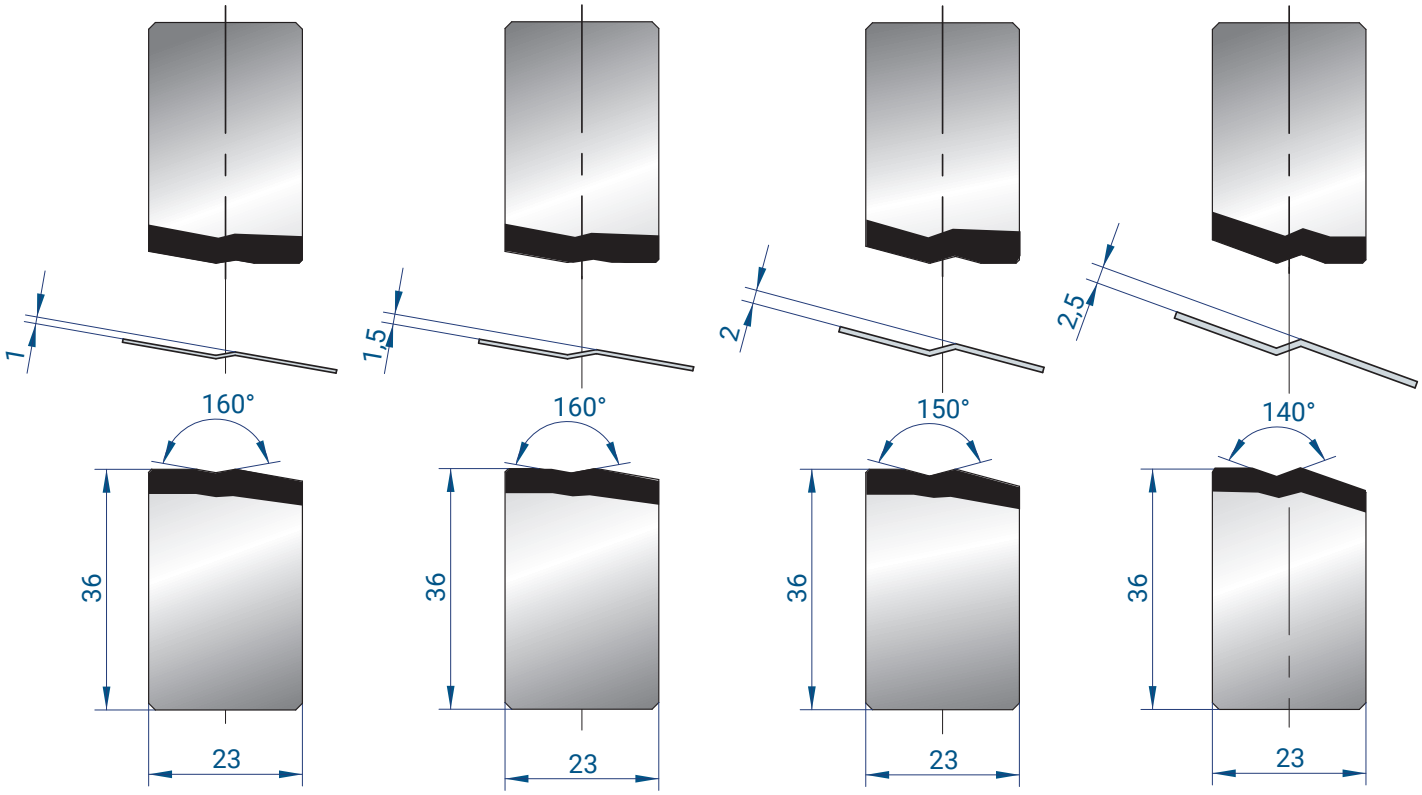

1130

160°
Mat = C45

835 mm	10,7 kg
415 mm	5,3 kg

1131

160°
Mat = C45

835 mm	10,7 kg
415 mm	5,3 kg

1132

150°
Mat = C45

835 mm	10,6 kg
415 mm	5,3 kg


1133

140°
Mat = C45

835 mm	10,5 kg
415 mm	5,2 kg

PER VERIFICARE LA FATTIBILITÀ DELLA PIEGA IN BASE ALLO SPESSORE LAMIERA, VEDI TABELLA PAGINA 204
TO CHOOSE THE RIGHT JOOGLE TOOL BASED ON THE SHEET THICKNESS, PLEASE SEE THE CHART ON PAGE 204




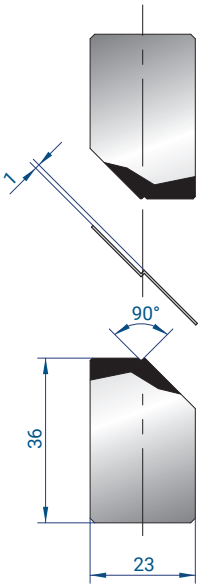

1276

90°
Mat = C45


835 mm	10,0 kg
415 mm	5,0 kg

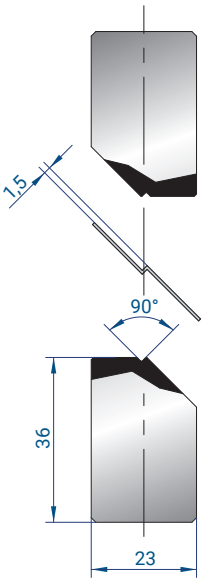

1277

90°
Mat = C45


835 mm	10,0 kg
415 mm	5,0 kg

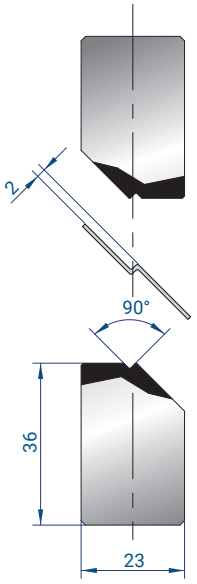

1274

90°
Mat = C45


835 mm	10,0 kg
415 mm	5,0 kg

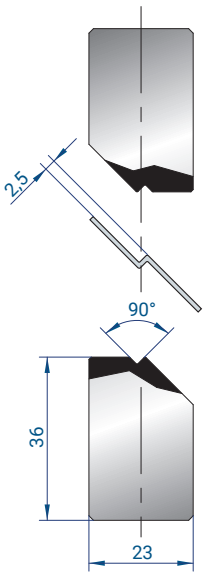

1275

90°
Mat = C45


835 mm	10,1 kg
415 mm	5,0 kg

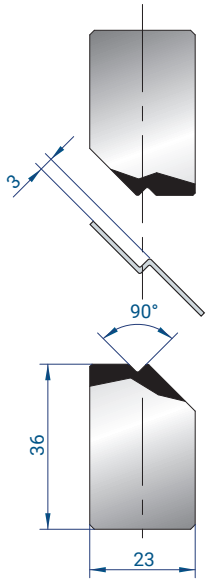

1134

90°
Mat = C45


835 mm	10,1 kg
415 mm	5,0 kg

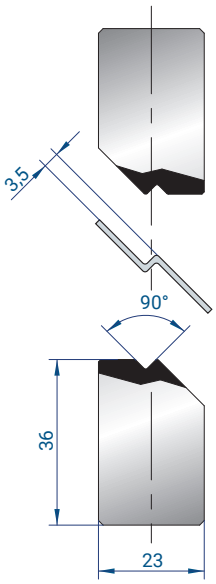

1135

90°
Mat = C45


835 mm	10,1 kg
415 mm	5,0 kg

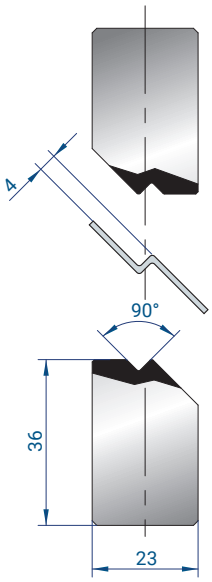

1136

90°
Mat = C45

835 mm	10,1 kg
415 mm	5,0 kg

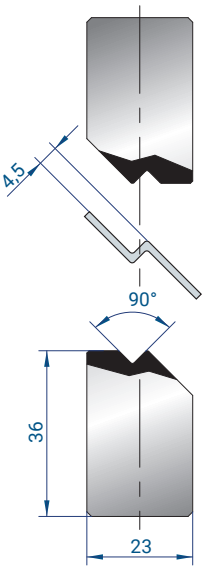


1137

90°
Mat = C45

835 mm	10,1 kg
415 mm	5,0 kg


PER VERIFICARE LA FATTIBILITÀ DELLA PIEGA IN BASE ALLO SPESSORE LAMIERA, VEDI TABELLA PAGINA 204
TO CHOOSE THE RIGHT JOOGLE TOOL BASED ON THE SHEET THICKNESS, PLEASE SEE THE CHART ON PAGE 204

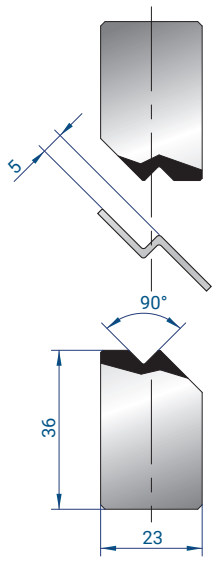

1138

90°
Mat = C45


835 mm	10,1 kg
415 mm	5,0 kg

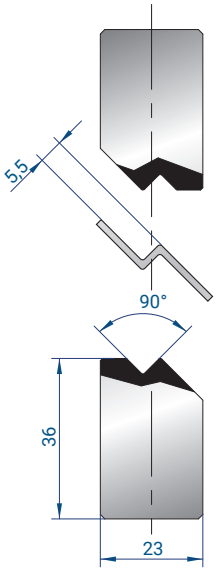

1139

90°
Mat = C45


835 mm	10,1 kg
415 mm	5,0 kg

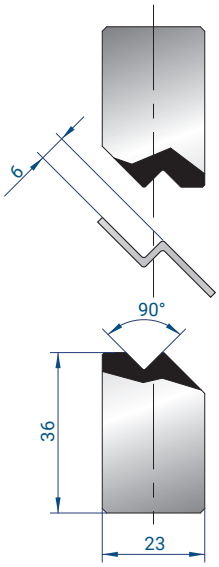

1140

90°
Mat = C45

835 mm	10,1 kg
415 mm	5,0 kg

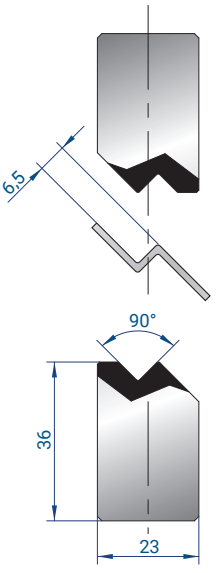



1141

90°
Mat = C45

835 mm	10,0 kg
415 mm	5,0 kg

PER VERIFICARE LA FATTIBILITÀ DELLA PIEGA IN BASE ALLO SPESSORE LAMIERA, VEDI TABELLA PAGINA 204
TO CHOOSE THE RIGHT JOOGLE TOOL BASED ON THE SHEET THICKNESS, PLEASE SEE THE CHART ON PAGE 204

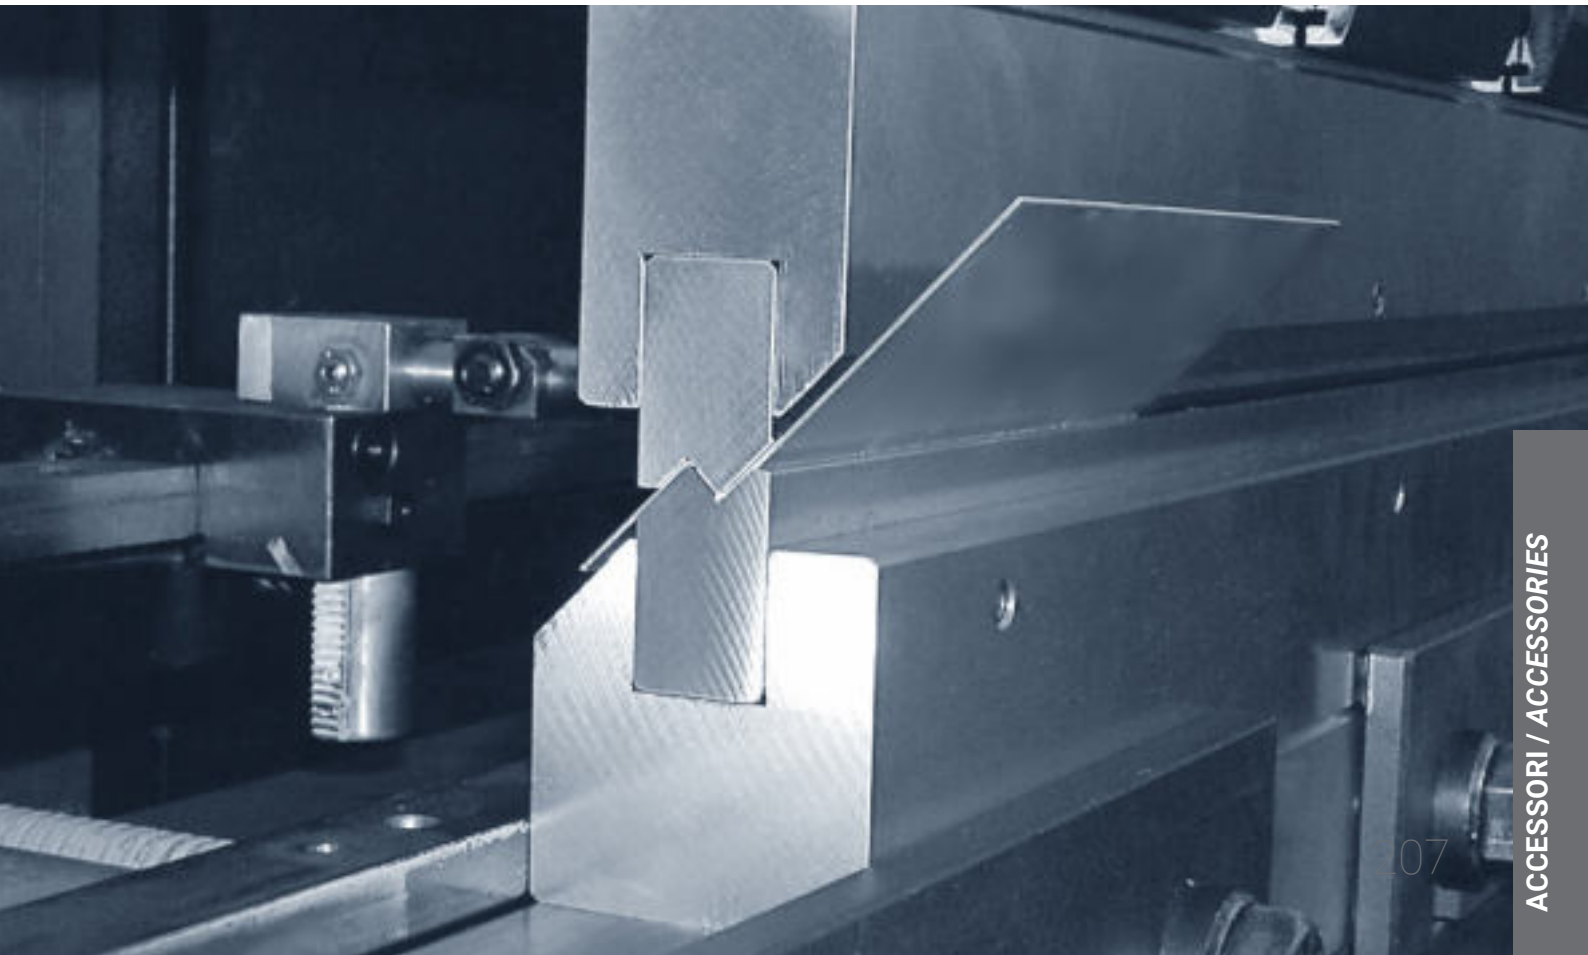


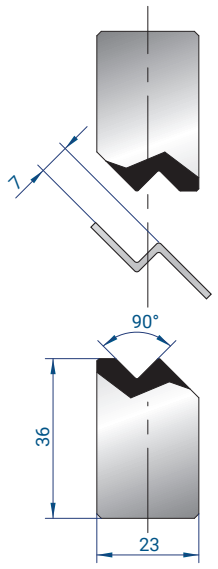

1142

90°
Mat = C45


835 mm	10,0 kg
415 mm	5,0 kg

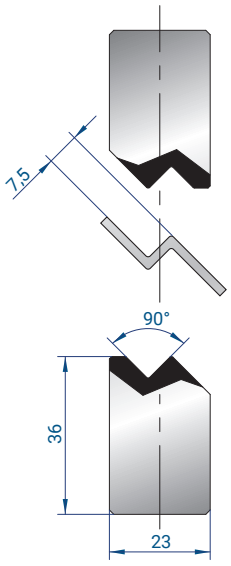

1143

90°
Mat = C45


835 mm	10,0 kg
415 mm	5,0 kg

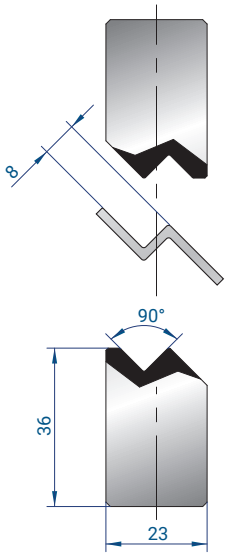

1144

90°
Mat = C45


835 mm	10,0 kg
415 mm	5,0 kg

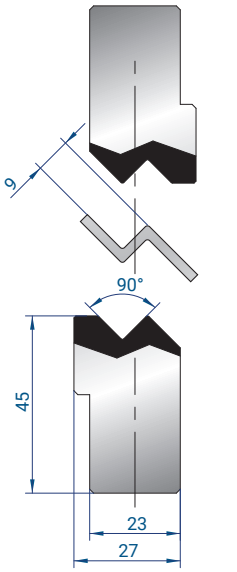

1145

90°
Mat = C45


835 mm	13,6 kg
415 mm	6,8 kg

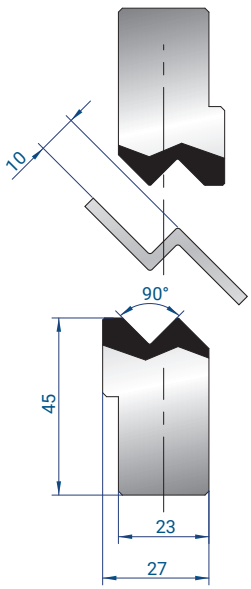

1146

90°
Mat = C45


835 mm	13,6 kg
415 mm	6,7 kg

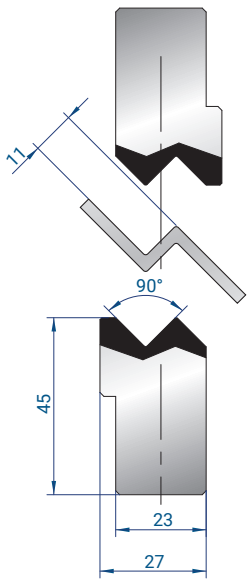

1147

90°
Mat = C45

835 mm	13,5 kg
415 mm	6,7 kg

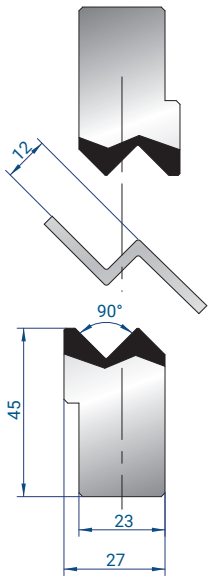


1148

90°
Mat = C45

835 mm	13,3 kg
415 mm	6,6 kg

PER VERIFICARE LA FATTIBILITÀ DELLA PIEGA IN BASE ALLO SPESSORE LAMIERA, VEDI TABELLA PAGINA 204
TO CHOOSE THE RIGHT JOOGLE TOOL BASED ON THE SHEET THICKNESS, PLEASE SEE THE CHART ON PAGE 204

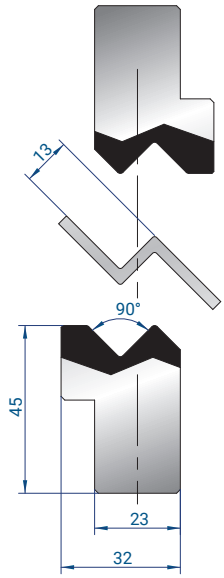


1278

90°

Mat = C45

835 mm	14,6 kg
415 mm	7,3 kg

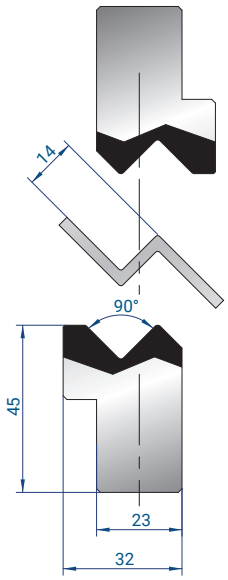


1279

90°

Mat = C45

835 mm	14,5 kg
415 mm	7,3 kg

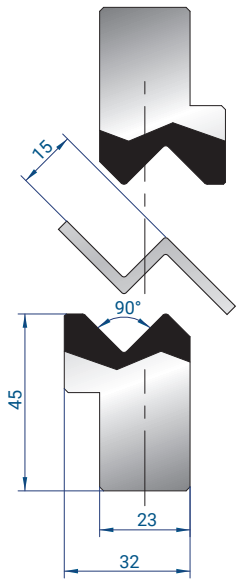


1280


90°

Mat = C45

835 mm	14,3 kg
415 mm	7,1 kg

PER VERIFICARE LA FATTIBILITÀ DELLA PIEGA IN BASE ALLO SPESSORE LAMIERA, VEDI TABELLA PAGINA 204
TO CHOOSE THE RIGHT JOOGLE TOOL BASED ON THE SHEET THICKNESS, PLEASE SEE THE CHART ON PAGE 204

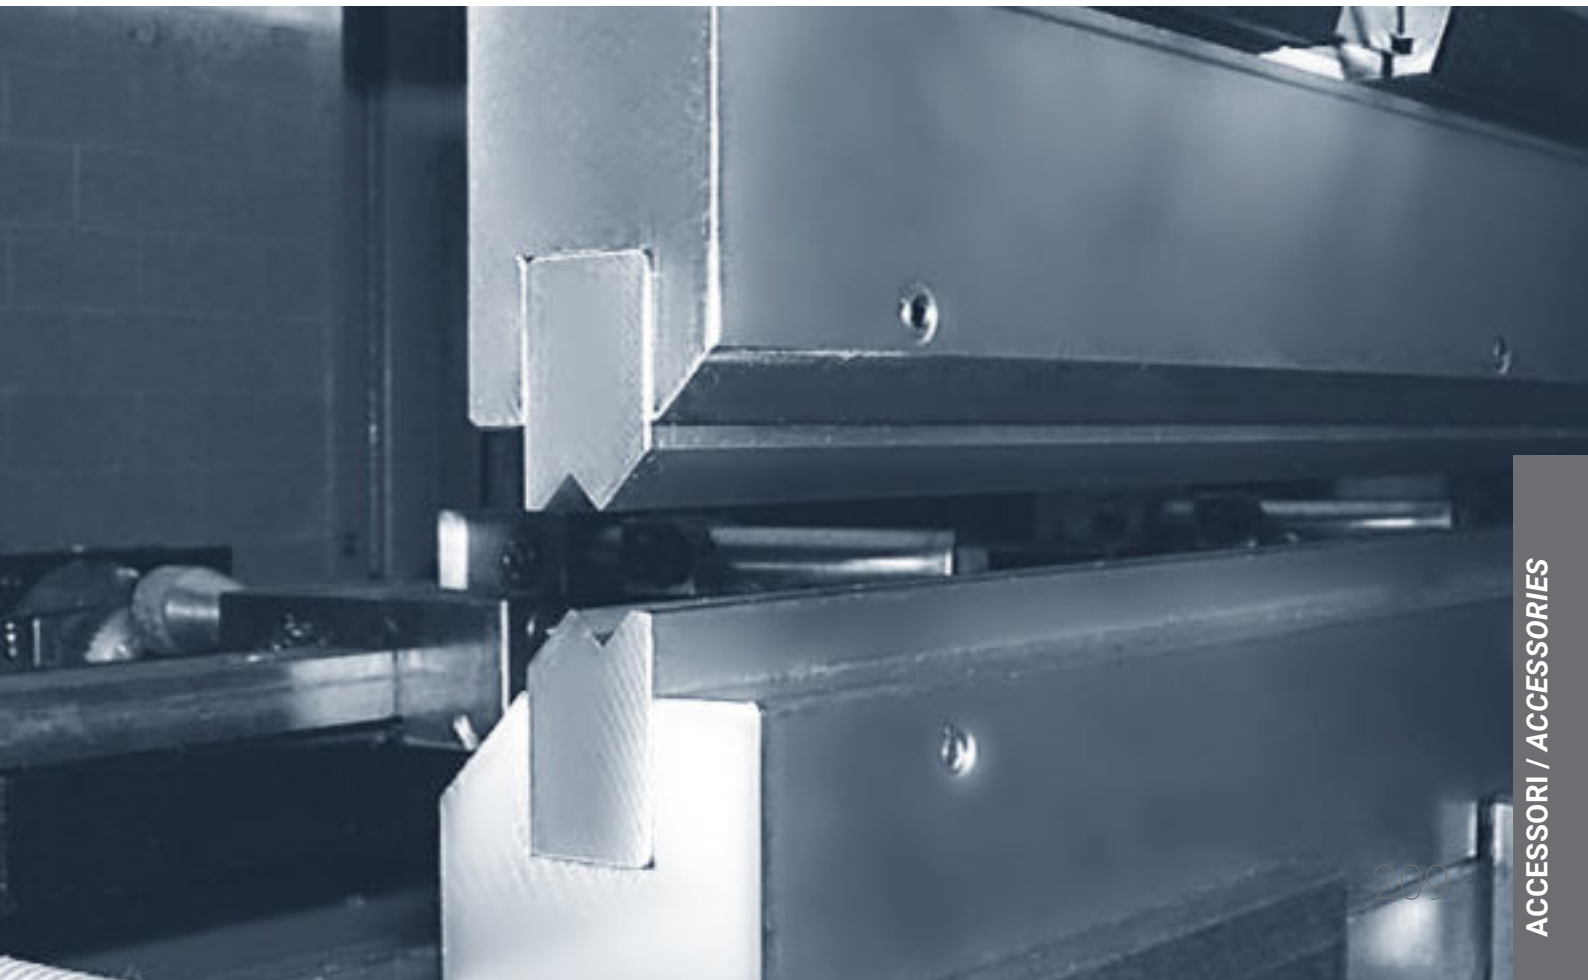


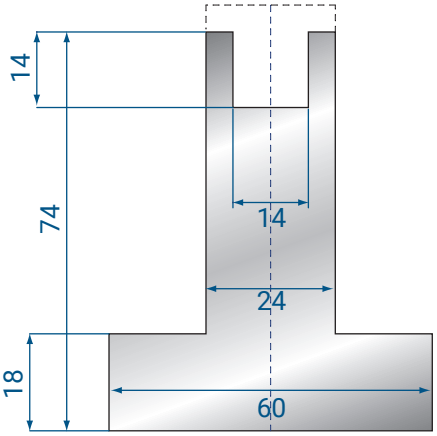


2109

AMADA STYLE

835 mm	14,5 kg
415 mm	7,2 kg






2112

835 mm	0,3 kg
415 mm	0,2 kg


A	V		
88°	6	8	10
60°	6	8	10
45°	6	8	10
30°	6	8	

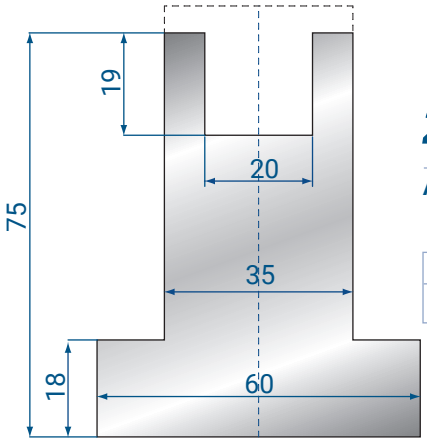

2110

AMADA STYLE


835 mm	17,6 kg
415 mm	8,7 kg



2113

835 mm	0,6 kg
415 mm	0,3 kg


A	V				
88°	6	8	10	12	16
60°	6	8	10	12	16
45°	6	8	10	12	
30°	6	8	10		

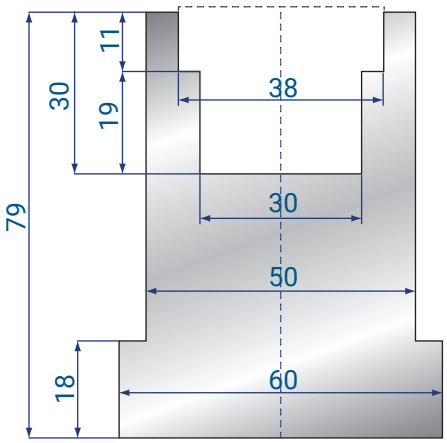

2111

AMADA STYLE


835 mm	20,5 kg
415 mm	10,2 kg



2114

835 mm	1,0 kg
415 mm	0,5 kg

A	V						
88°	6	8	10	12	16	20	25
60°	6	8	10	12	16	20	
45°	6	8	10	12	16	20	
30°	6	8	10	12	16		

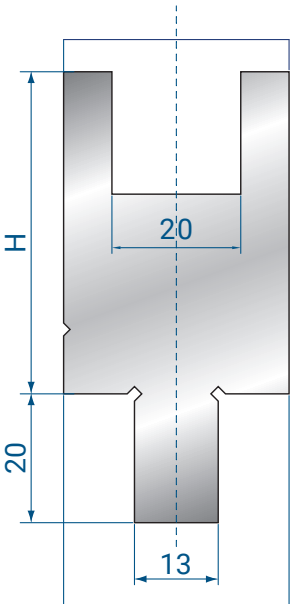

2115

BYSTRONIC TRUMPF WILA STYLE

H = 50


835 mm	10,6 kg
415 mm	5,3 kg

2116

BYSTRONIC TRUMPF WILA STYLE

H = 95


835 mm	20,9 kg
415 mm	10,4 kg



2036

AMADA STYLE


835 mm	19,3 kg
415 mm	9,8 kg

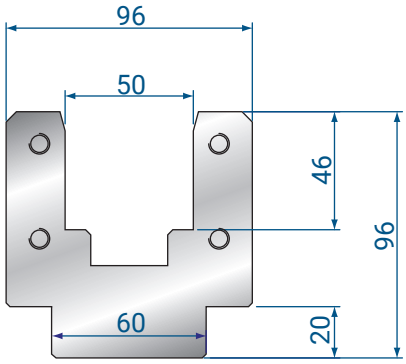

2037

AMADA STYLE


835 mm	37,0 kg
415 mm	18,0 kg

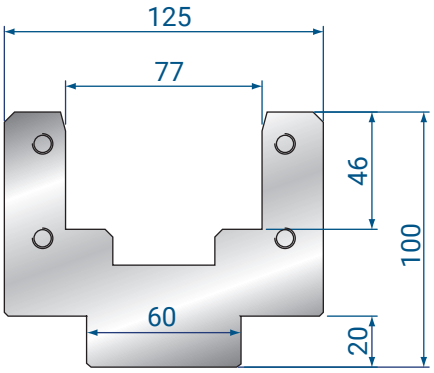

2038

AMADA STYLE


835 mm	45,0 kg
415 mm	22,0 kg

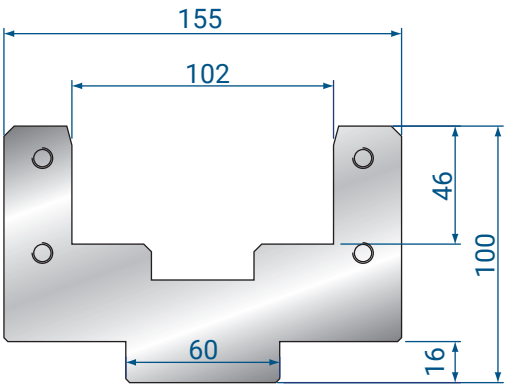

2040

AMADA STYLE


835 mm	55,0 kg
415 mm	27,0 kg

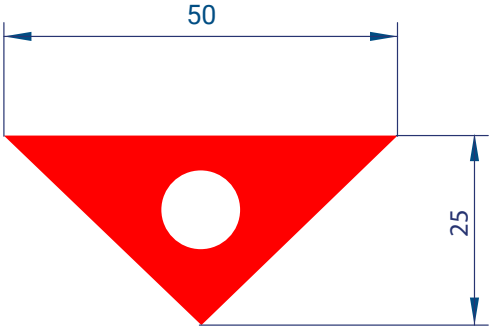

2119

835 mm	0,6 kg
415 mm	0,3 kg


Mat = Inserto in poliuretano triangolare forato/ *Perforated triangular polyurethane insert*
H = 25.00
v = 50.00



2101

92 SHORE


835 mm	0,5 kg
415 mm	0,3 kg



2102

92 SHORE


835 mm	2,2 kg
415 mm	1,1 kg



2103

92 SHORE


835 mm	3,3 kg
415 mm	1,6 kg



2104

92 SHORE


835 mm	4,4 kg
415 mm	2,2 kg



2105

92 SHORE


835 mm	0,5 kg
415 mm	0,2 kg



2106

92 SHORE


835 mm	1,8 kg
415 mm	0,9 kg



2107

92 SHORE

835 mm	2,6 kg
415 mm	1,3 kg

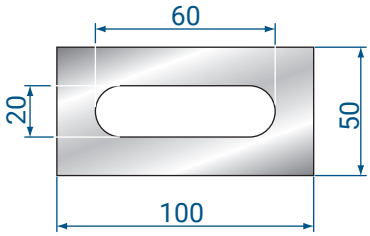

2108

92 SHORE

835 mm	3,4 kg
415 mm	1,7 kg



COMPLETO SISTEMA DI CONNESSIONE PER UTENSILI SUPERIORI STILE EUROPEO (STILE AMADA/PROMECAM)

COMPLETE CLAMPING SYSTEM FOR EUROPEAN STYLE TOOLING (AMADA/PROMECAM STYLE)


PROCESSO DI SOSTITUZIONE UTENSILI CON SISTEMI TRADIZIONALI

Il sistema tradizionale prevede di installare gli utensili superiori tramite staffe di sicurezza avvitate agli intermediari connessi alla tavola superiore.

Il dente presente sulla staffa dell'intermediario lavora nella cava di sicurezza fresata sul punzone per impedirne la caduta accidentale, ma costringe ad inserire/estrarre ogni utensile dal lato macchina e a trascinarlo in posizione operativa.

Quando i punzoni sono posizionati correttamente è necessario pre-serrare le staffe, poi "chiudendo" la macchina, si sollevano e spingono gli utensili a contatto con gli intermediari per allinearli ottimamente.

Il tempo per eseguire questa operazione viene sottratto al tempo di piegatura e può assumere una importanza rilevante nel calcolo della produttività.

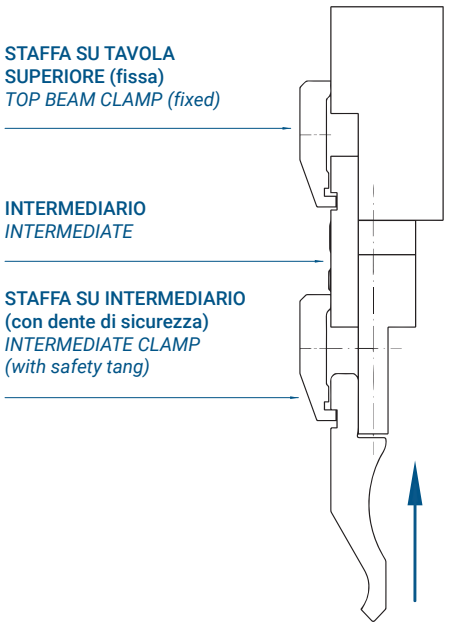

ACTUAL TOOLING REPLACEMENT PROCEDURE


The standard system requires to install the upper tooling through safety clamps screwed on the intermediates connected to the upper machine table.


The clamps safety tang engages into the safety groove machined on the punch front: this combination ensures the tools will not drop out of the clamp when opened to replace them. In order to remove or insert punch tooling, one has to slide the tools horizontally, along the machine length, to the left or right from/to its working position. Note the tools cannot be removed or inserted vertically with this safety feature.

Once the new punches are correctly inserted it is necessary to follow the procedure below:

- *slightly tighten all the clamp screws,*
- *lower the upper beam and push the tooling against their reference surface (bottom side of intermediate), this ensures alignment of the punch tooling,*
- *finally, firmly tighten all the clamp screws*

The average time required to perform the above operation is deducted from the fabrication time, the time taken can be of high importance and relevance when productivity output is a consideration.

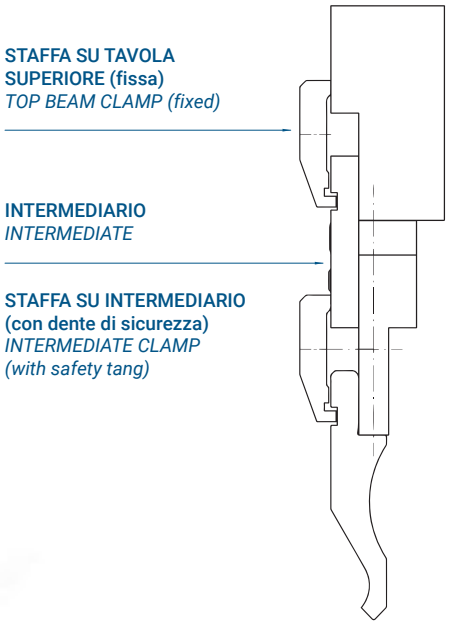

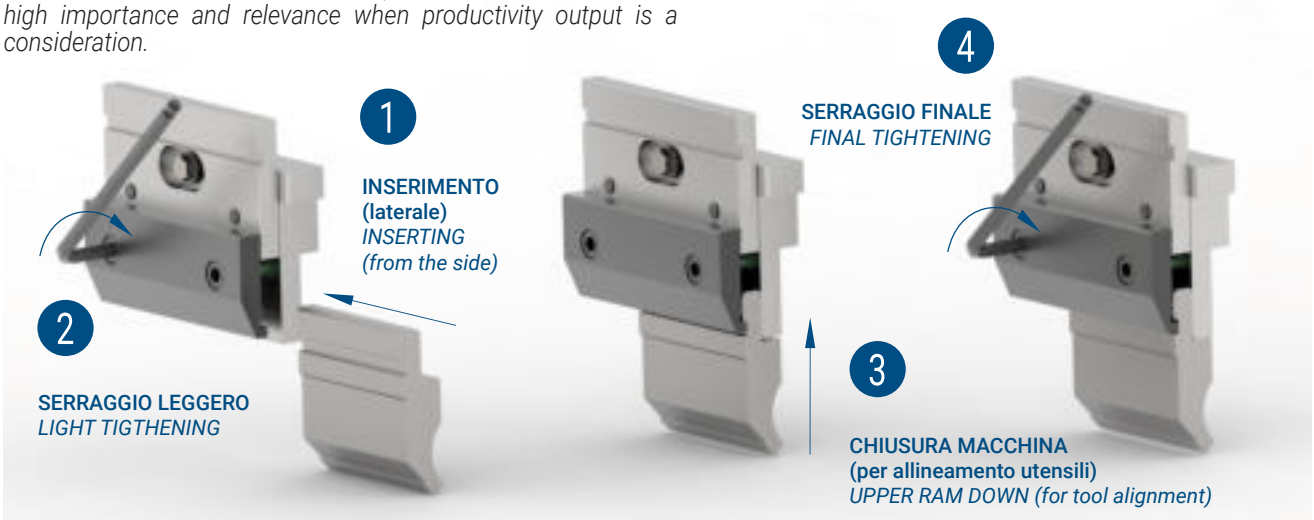


L'INNOVAZIONE EUROGRIP / *THE EUROGRIP INNOVATION*

La struttura meccanica della staffa Eurogrip è stata ingegnerizzata per consentire:

- l'inserimento/rimozione del punzone in senso verticale (anziché dal lato macchina) e, contemporaneamente, la garanzia del medesimo elevato livello di sicurezza.
- Il sollevamento del punzone durante la fase di chiusura per arrivare ad allinearlo nel momento del bloccaggio finale.

The main innovation is the Eurogrip clamp mechanical structure, engineered for allowing:

- *the removal and insertion of punches in vertical direction (instead of sliding them left and right) and, at the same time, for granting the same high safety level.*
- *The punch lifting during the clamping phase, in order to achieve its right alignment when the clamp is locked.*

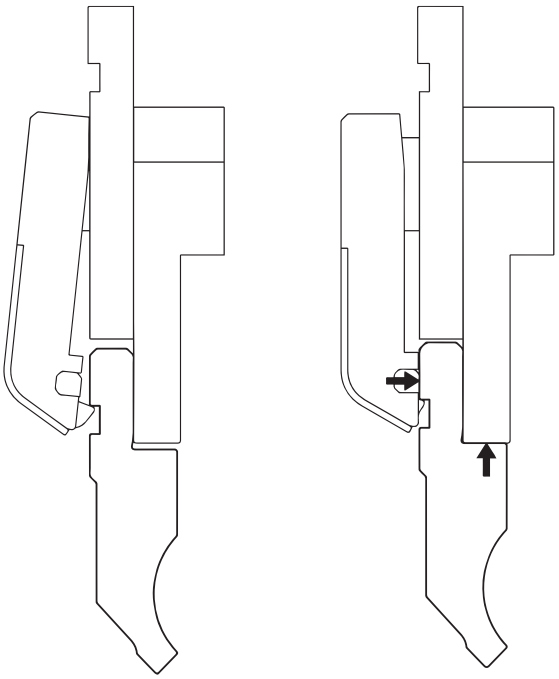

IL RISPARMIO DI TEMPO / *THE TIME SAVING*

La tabella mostra i tempi medi necessari per ogni fase dell'operazione di rimozione e sostituzione utensili superiori su una piegatrice de 3 metri (15 intermediari); il suo scopo è la valutazione dei vantaggi offerti dal nuovo sistema.

Comparazione tempi stimati per ogni fase della sostituzione utensili superiori (piegatrice da 3 metri con 15 intermedi).

The table shows the average time required for each phase of any upper tooling removal and replacement operation on a 3-meter-long press brake (15 intermediates); its purpose is the evaluation of the advantages offered by the new system.

Comparison of estimated time required for each phase of an upper tooling replacement operation (press brake 3 meter long - 15 intermediates).

TEMPO RICHIESTO CON SISTEMA TRADIZIONALE

AVERAGE TIME WITH STANDARD SYSTEM

circa 9,5 minuti
about 9,5 minutes

TEMPO RICHIESTO CON SISTEMA EUROGRIP MANUALE

AVERAGE TIME REQUIRE WITH EUROGRIP MANUAL SYSTEM

circa 3,0 minuti (-70%)
about 3,0 minutes (-70%)

TEMPO RICHIESTO CON SISTEMA EUROGRIP PNEUMATICO

AVERAGE TIME REQUIRE WITH EUROGRIP PNEUMATIC SYSTEM

circa 1,5 minuti (-85%)
about 1,5 minutes (-85%)

LA PERCENTUALE DI TEMPO NECESSARIO PER UNA SOLA OPERAZIONE DI CAMBIO UTENSILI RISPETTO A UN'ORA DI LAVORO EFFETTIVO COSTITUISCE, RISPETTIVAMENTE:

16% con il Sistema Tradizionale
5% con Eurogrip Manuale
2,5% con Eurogrip Pneumatico


THE SHARE OF TIME REQUIRED FOR EACH TOOL REPLACEMENT OPERATION OVER A 1-HOUR FABRICATION TIME IS, RESPECTIVELY:

16% for the standard system
5% with Eurogrip Manual
2,5% with Eurogrip Pneumatic

FASE OPERATIVA OPERATING PHASE	SISTEMA DI STAFFAGGIO CLAMPING SYSTEM	DESCRIZIONE OPERAZIONE OPERATION DESCRIPTION	TEMPO RICHIESTO REQUIRED TIME		
1 **APERTURA STAFFE** *CLAMPS UNLOCKING*	Sistema di staffaggio tradizionale (ogni staffa con due viti) *Standard clamping system (each clamp with two screws)*	Allentamento 30 viti frontali (5 sec. Cad) *Untighten 30 allen bolts (5 seconds each)*	150		
	Sistema di staffaggio Eurogrip manuale (M-EASY o M-TOP) *Eurogrip manual clamping system (M-EASY or M-TOP)*	Apertura 15 levette (3 sec. Cad) *Unlock 15 handles (3 seconds each)*		45	
	Sistema di staffaggio Eurogrip pneumatico (P-EASY o P-TOP) *Eurogrip pneumatic clamping system (P-EASY or P-TOP)*	Pressione su pulsante per apertura staffe (2 sec.) *Button operation for opening the clamps (2 sec)*			2
2 **RIMOZIONE PUNZONI** *PUNCHES REMOVAL*	Sistema di staffaggio tradizionale (ogni staffa con due viti) *Standard clamping system (each clamp with two screws)*	Trascinamento ed estrazione utensili da lato macchina *Tooling sliding and extraction from machine side (3x835 + 1x SECT)*	100		
	Sistema di staffaggio Eurogrip manuale (M-EASY o M-TOP) *Eurogrip manual clamping system (M-EASY or M-TOP)*	Rimozione verticale utensili da fronte macchina *Tooling vertical removal from machine front (3x835 + 1x SECT)*		50	
	Sistema di staffaggio Eurogrip pneumatico (P-EASY o P-TOP) *Eurogrip pneumatic clamping system (P-EASY or P-TOP)*	Rimozione verticale utensili da fronte macchina *Tooling vertical removal from machine front (3x835 + 1x SECT)*			50
3 **INSERIMENTO PUNZONI** *PUNCHES INSERTION*	Sistema di staffaggio tradizionale (ogni staffa con due viti) *Standard clamping system (each clamp with two screws)*	Inserimento utensili da lato macchina e trascinamento in posizione *Tooling insertion from machine side and sliding to their position (3x835 + 1x SECT)*	100		
	Sistema di staffaggio Eurogrip manuale (M-EASY o M-TOP) *Eurogrip manual clamping system (M-EASY or M-TOP)*	Inserimento verticale utensili da fronte macchina *Tooling vertical insertion from machine front (3x835 + 1x SECT)*		40	
	Sistema di staffaggio Eurogrip pneumatico (P-EASY o P-TOP) *Eurogrip pneumatic clamping system (P-EASY or P-TOP)*	Inserimento verticale utensili da fronte macchina *Tooling vertical insertion from machine front (3x835 + 1x SECT)*			40
4 **CHIUSURA STAFFE** *CLAMPS LOCKING*	Sistema di staffaggio tradizionale (ogni staffa con due viti) *Standard clamping system (each clamp with two screws)*	Serraggio lieve 30 viti (4 secondi cad) *Light tighening of 30 allen bolts (4 seconds each)*	120		
		Chiusura macchina per allineamento utensili *Upper ram down for tooling alignment*	10		
		Serraggio finale 30 viti (3 secondi cad) *Final tightening of 30 allen bolts (3 seconds each)*	90		
	Sistema di staffaggio Eurogrip manuale (M-EASY o M-TOP) *Eurogrip manual clamping system (M-EASY or M-TOP)*	Chiusura 15 levette (3 sec. Cad) *Locking 15 handles (3 seconds each)*		45	
	Sistema di staffaggio Eurogrip pneumatico (P-EASY o P-TOP) *Eurogrip pneumatic clamping system (P-EASY or P-TOP)*	Pressione su pulsante per chiusura staffe (2 sec.) *Button operation for closing the clamps (2 sec)*			2
TEMPO TOTALE PREVISTO / *TOTAL ESTIMATED TIME*			570 s	180 s	94 s

PRINCIPIO OPERATIVO / *PRINCIPLE OF OPERATIONS*

INSERIMENTO PUNZONE
PUNCH LOADING

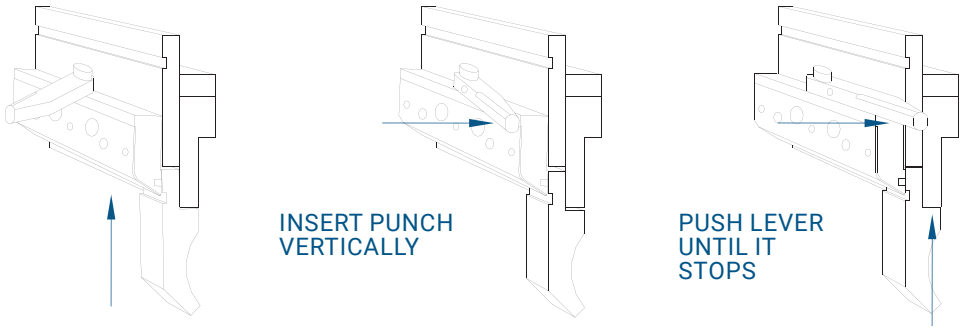


Quando la staffa è in posizione di apertura, permette l'inserimento del punzone in senso verticale verso l'alto fino a quando la cava di sicurezza incontra il meccanismo di sicurezza della staffa, che lo aggancia e lo mantiene sollevato.

Durante il movimento di chiusura della staffa, il meccanismo di sicurezza solleva il punzone fino al piano di riferimento (base dell'intermedio) e lo mantiene in posizione fino alla completa chiusura della staffa che blocca il punzone in posizione.

When the clamp is in open position, it allows the punch insertion in vertical upward direction until when the punch safety groove engages the clamp safety fingers, that hooks it and keeps the punch in position.

During the clamp closing stroke, the safety fingers lifts up the punch until intermediate reference surface and keeps it in the right position until the end of clamp closing movement that locks the punch.

RIMOZIONE PUNZONE
PUNCH UNLOADING

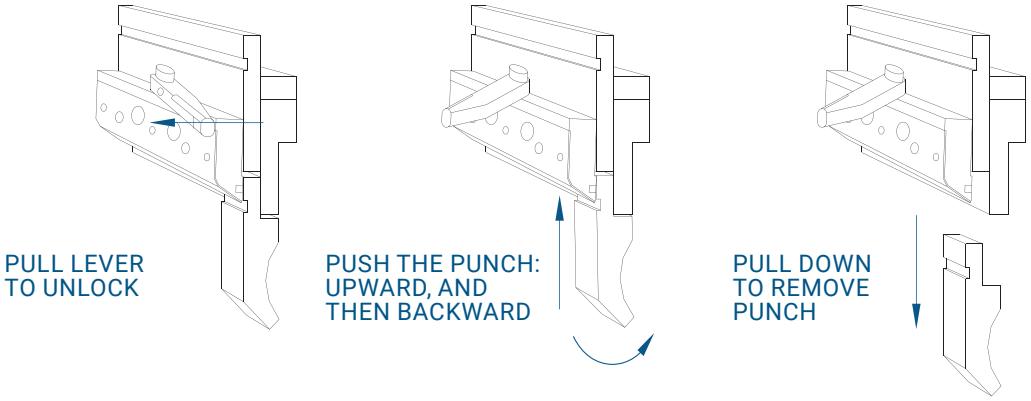

Quando la staffa viene aperta, il punzone viene sbloccato e scende fino ad arrestarsi perché rimane agganciato al meccanismo di sicurezza.

A questo punto è sufficiente sollevare manualmente il punzone e spingere la sua punta verso l'interno della macchina per liberarlo dal meccanismo di sicurezza e sfilarlo in senso verticale verso il basso.

When the clamp is opened, it unlocks the punch that can then move downwards until the point where it can remain hooked in against the safety fingers.

Now it is possible to manually lift the punch upwards and push on its bottom side to disengage it from the safety fingers and removing it in vertical downward direction.

LA GAMMA DI PRODOTTI EUROGRIP PER LA CONNESSIONE DEGLI UTENSILI SUPERIORI
THE EUROGPRIP RANGE FOR THE UPPER TOOL CLAMPING

L'innovativa staffa Eurogrip è alla base della gamma completa di soluzioni sviluppata da Eurostamp, orientata agli equipaggiamenti standard delle piegatrici e alle esigenze specifiche di clienti.

> La gamma include Sistemi Manuali e Pneumatici;
>
> ciascun Sistema è disponibile in due Versioni (EASY e TOP);
>
> finalmente, ogni versione comprende due Modelli, in base alle dimensioni degli intermediari originali.

The innovative Eurogrip clamp is the basis of the complete range of solutions developed by Eurostamp, in line with the press brakes standard equipment and suited to the customer needs.

> *The range includes Manual and Pneumatic, each available in two versions (EASY and TOP);*
>
> *Each version includes two models, according to the dimension of the original intermediates.*

1. DIMENSIONI CARATTERISTICHE DI INTERMEDIARIO TIPO Z1
   Z1 TYPE INTERMEDIATE TYPICAL DIMENSION
2. DIMENSIONI CARATTERISTICHE DI INTERMEDIARIO TIPO Z2
   Z2 TYPE INTERMEDIATE TYPICAL DIMENSION

SISTEMI MANUALI / *MANUAL CLAMPING SYSTEMS*

Versione / *Version* M-EASY

4389 Dimensioni intermediario / *Intermediate dimension* **Z1**
(Corpo / *Body*: 27mm – Asse / *Axis*: 7mm) **page 219**

4409 Dimensioni intermediario / *Intermediate dimension* **Z2**
(Corpo / *Body*: 40mm – Asse / *Axis*: 20mm) **page 220**

Versione / *Version* M-TOP

4390 Dimensioni intermediario / *Intermediate dimension* **Z1**
(Corpo / *Body*: 27mm – Asse / *Axis*: 7mm) **page 221**

4400 Dimensioni intermediario / *Intermediate dimension* **Z2**
(Corpo / *Body*: 40mm – Asse / *Axis*: 20mm) **page 222**

4419 Dimensioni intermediario / *Intermediate dimension* **Z1**
(Corpo / *Body*: 27mm – Asse / *Axis*: 7mm) **page 223**

4414 Dimensioni intermediario / *Intermediate dimension* **Z2**
(Corpo / *Body*: 40mm – Asse / *Axis*: 20mm) **page 224**

SISTEMI PNEUMATICI / *PNEUMATIC CLAMPING SYSTEMS*

Versione / *Version* P-EASY


4392 Dimensioni intermediario / *Intermediate dimension* **Z1**
(Corpo / *Body*: 27mm – Asse / *Axis*: 7mm) **page 228**


4405 Dimensioni intermediario / *Intermediate dimension* **Z2**
(Corpo / *Body*: 40mm – Asse / *Axis*: 20mm) **page 229**


Versione / *Version* P-TOP


4399 **4398** Dimensioni intermediario / *Intermediate dimension* **Z1**
(Corpo / *Body*: 27mm – Asse / *Axis*: 7mm) **page 230 - 231**

4399 **4410** Dimensioni intermediario / *Intermediate dimension* **Z2**
(Corpo / *Body*: 40mm – Asse / *Axis*: 20mm) **page 230 - 232**

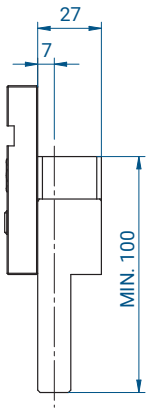

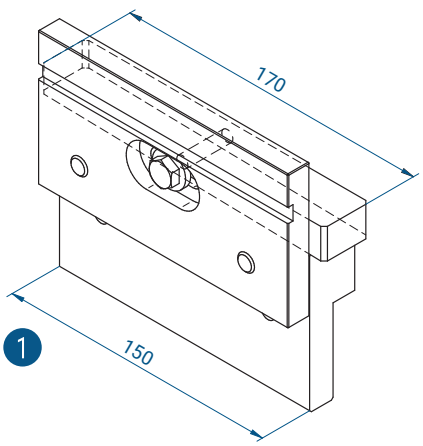

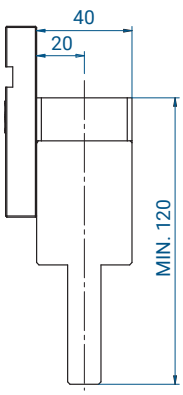

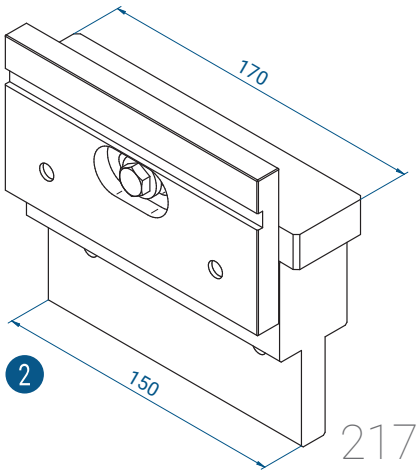

SISTEMI DI STAFFAGGIO MANUALI - INTRODUZIONE
MANUAL CLAMPING SYSTEM - INTRODUCTION

Ogni staffa viene operata da una comoda e robusta leva a scomparsa posizionata sulla parte superiore della staffa per evitare qualsiasi interferenza contro la lamiera durante il processo di piegatura.

Lo stesso principio di funzionamento è stato applicato anche ad un adattatore superiore che consente l'installazione di punzoni in style Trumpf e Wila su macchine con sistema di connessione in stile Europeo (stile Amada/Promecam).

Each clamp is individually operated by a comfortable and powerful handle, conveniently located on the top in order to avoid any interference with the product being fabricated.

We applied a similar solution also to an upper adapter that allows the installation of Wila/Trumpf style punches on machines equipped with European style (Amada/Promecam style) clamping system.



Modello / *Model*

4389

(M-EASY Z1)

150 mm	0,8 kg

SISTEMA MANUALE EUROGRIP M-EASY:
STAFFA PER RETROFIT SU INTERMEDIARIO Z1

MANUAL SYSTEM M-EASY:
FRONT CLAMP FOR RETROFIT OF Z1 STYLE INTERMEDIATE



DESCRIZIONE

Staffa frontale da installare al posto di quella esistente.

SPECIFICHE TECNICHE


Solo su intermediari conformi Z1 (altezza 100mm; corpo 27mm; asse 7mm): tutte le dimensioni dell'intermediario devono essere verificate e confrontate con il disegno tecnico di questa pagina.


DESCRIPTION

Front clamp replacement, installed over the existing intermediate in place of the "standard one".

TECHNICAL SPECIFICATIONS

Only on Z1 style intermediates (height 100mm; body width 27mm; bending axis located at 7mm). All dimensions of the intermediates need to be verified and confirmed as per the drawings on this page.

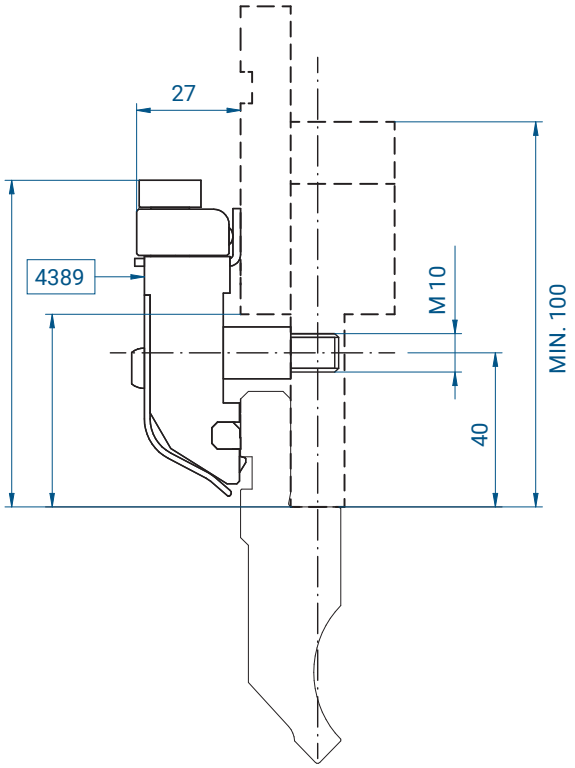

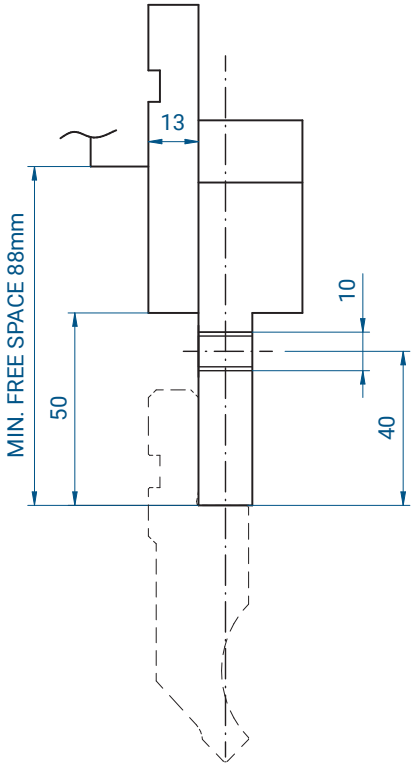

Modello / *Model*

4409
(M-EASY Z2)

150 mm	0,8 kg

SISTEMA MANUALE EUROGRIP M-EASY: ASSIEME DI STAFFA + PIASTRA ANTERIORE PER RETROFIT SU INTERMEDIARIO Z2

MANUAL SYSTEM M-EASY: *ASSEMBLY OF CLAMP + FRONT PLATE FOR RETROFIT OF Z2 STYLE INTERMEDIATE*



DESCRIZIONE

Assieme costituito dalla staffa 4389 e da una piastra anteriore, che deve essere installata sul corpo principale dell'intermediario esistente.

SPECIFICHE TECNICHE


Solo su intermediari conformi Z2 (altezza minima 120mm; corpo 40mm; asse 20mm). Tutte le dimensioni dell'intermediario devono essere verificate e confrontate con il disegno tecnico di questa pagina.

DESCRIPTION

Assembly made up with clamp model 4389 and by a replacement front plate that must be installed onto the original intermediate.

TECHNICAL SPECIFICATIONS

Only on Z2 style intermediates (minimum height 120mm; body width 40mm; bending axis located at 20mm). All dimensions of the intermediates need to be verified and confirmed as per the drawings on this page.

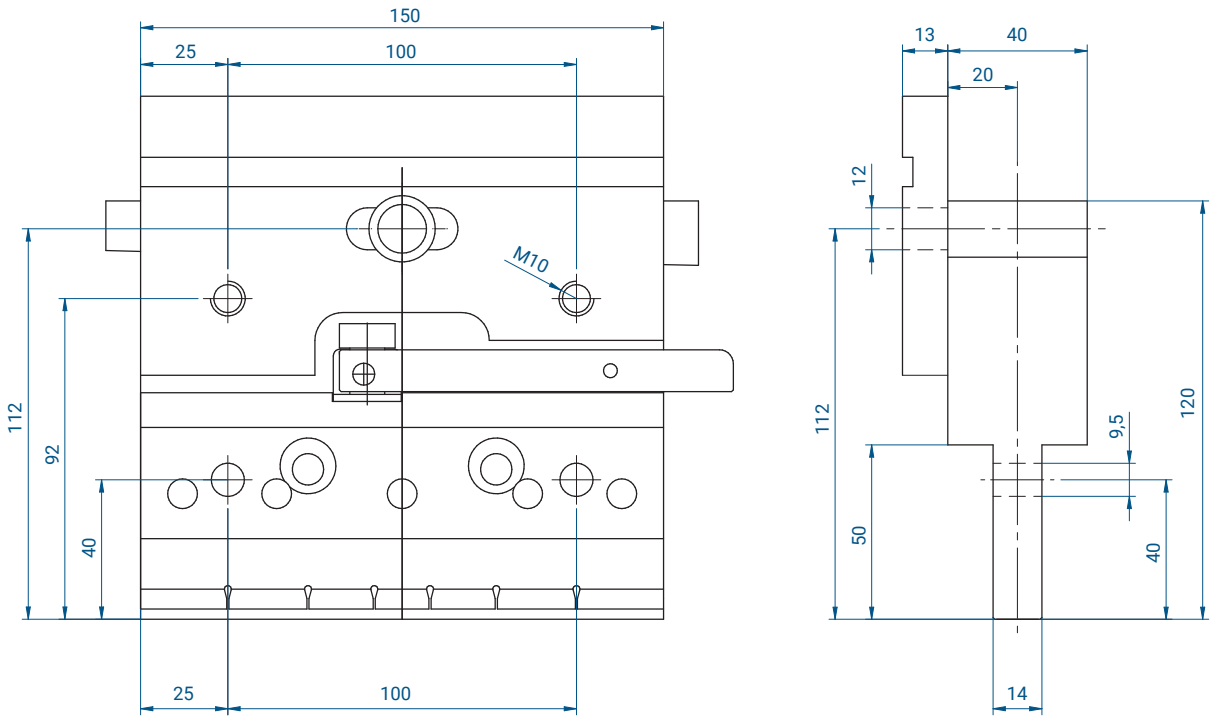


Modello / *Model*


4390
(M-TOP Z1)

150 mm	5,2 kg

SISTEMA MANUALE EUROGRIP M-TOP:
STAFFA ASSEMBLATA SU INTERMEDIO SPECIFICO Z1

EUROGRIP MANUAL SYSTEM M-TOP:
FRONT CLAMP ASSEMBLED ON SPECIFIC Z1 STYLE INTERMEDIATE

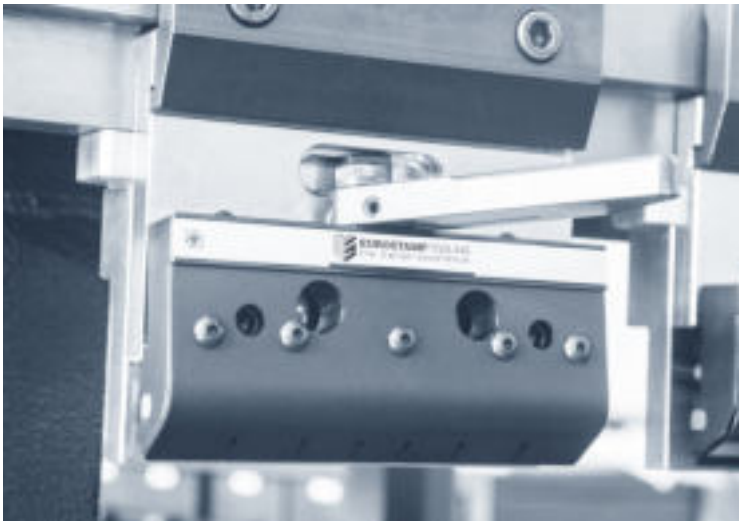

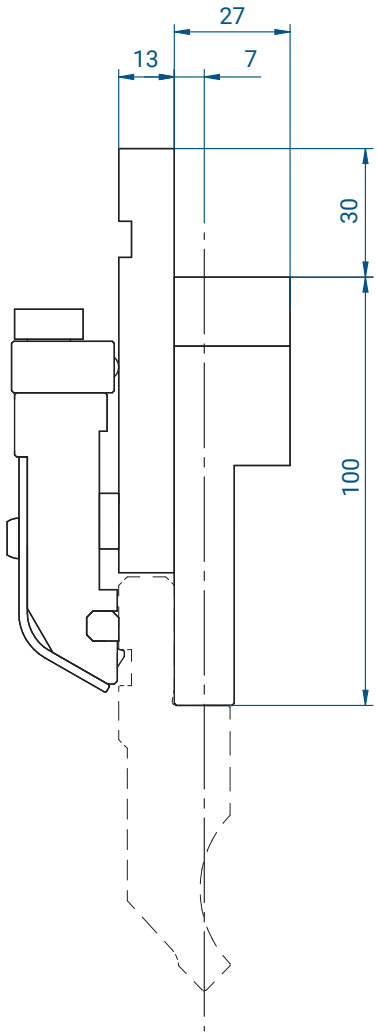

DESCRIZIONE

Assieme completo costituito da una speciale staffa manuale (dimensioni maggiorate) installata su un intermedio speciale (Z1) di alta qualità, disegnato per alloggiare la staffa maggiorata.

Soluzione privilegiata nei casi in cui sia necessario sostituire gli intermedi esistenti perché danneggiati e quando le dimensioni dell'intermedio esistente non consentano l'utilizzo di M-EASY.

Il codice 4390 è già predisposto per l'installazione delle staffe manuali posteriori opzionali codice 4404 (fori passanti).

SPECIFICHE TECNICHE

Solo su macchine predisposte ad installare intermedi di tipo Z1 (altezza 100mm; corpo 27mm; asse 7mm): tutte le dimensioni dell'intermediario devono essere verificate e confrontate con il disegno tecnico di questa pagina.

DESCRIPTION

Full intermediate assembly, made up of a special manual clamp (bigger dimension) already installed over a special, superior quality (Z1) intermediate body, designed for the movement of the operating fingers.

This solution is the best choice when a new set of intermediates is replacing the old ones (damaged or worn out) or when the original intermediate dimension does not allow to utilize the M-EASY.

The code 4390 is already set for installing the optional rear clamp manually operated code 4404(pass-through holes).

TECHNICAL SPECIFICATIONS

Only on machines equipped for Z1 style intermediates (height 100mm; body width 27mm; bending axis located at 7mm). All dimensions of the intermediates need to be verified and confirmed as per the drawings on this page.

Modello / *Model*


4400
(M-TOP Z2)

150 mm	7,0 kg

SISTEMA MANUALE EUROGRIP M-TOP: STAFFA ASSEMBLATA SU INTERMEDIO SPECIFICO Z2

EUROGRIP MANUAL SYSTEM M-TOP: *FRONT CLAMP ASSEMBLED ON SPECIFIC Z2 STYLE INTERMEDIATE*



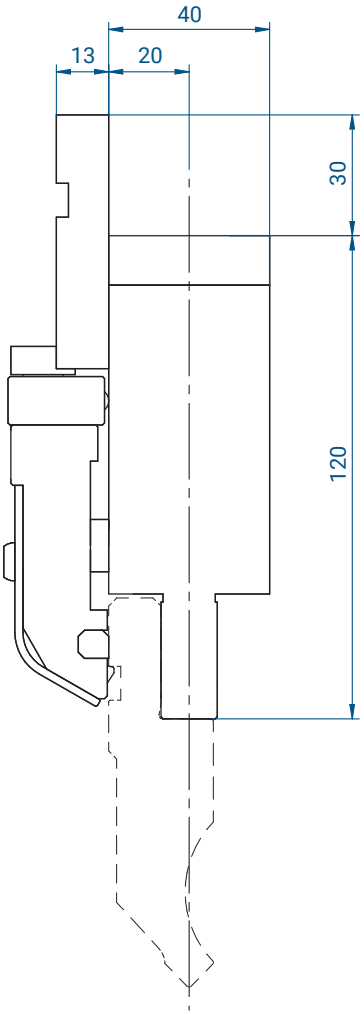

DESCRIZIONE

Assieme completo costituito da una speciale staffa manuale (dimensioni maggiorate) installata su un intermedio speciale (Z2) di alta qualità disegnato per alloggiare la staffa maggiorata.

Questa soluzione è la scelta migliore quando una nuova serie di intermedi sta sostituendo quelli vecchi (danneggiati o usurati) o quando la dimensione dell'intermedio originale non consente di utilizzare il M-EASY.

Il codice 4400 è già predisposto per l'installazione delle staffe manuali posteriori opzionali codice 4404 (fori passanti).

SPECIFICHE TECNICHE

Solo su macchine predisposte ad installare intermedi di tipo Z2 (altezza 120mm; corpo 40mm; asse 20mm): tutte le dimensioni dell'intermediario devono essere verificate e confrontate con il disegno tecnico di questa pagina.

Peso=5,5Kg

DESCRIPTION

Full intermediate assembly, made up of a special manual clamp (bigger dimension) already installed over a special, superior quality (Z2) intermediate body, conveniently machined for the movement of the operating fingers.

This solution is the best choice when a new set of intermediates is replacing the old ones (damaged or worn out) or when the original intermediate dimension does not allow to utilize the M-EASY.

The code 4400 is already set for installing the optional rear clamp manually operated code 4404 (pass-through holes).

TECHNICAL SPECIFICATIONS

Only on machines equipped for Z2 style intermediates (height 120mm; body width 40mm; bending axis located at 7mm). All dimensions of the intermediates need to be verified and confirmed as per the drawings on this page.

Weight=5,5Kg

Modello / *Model*


4419


Z1 (M-TOP Z1 DUO)

SISTEMA MANUALE EUROGRIP M-TOP Z1 DUO: STAFFE ASSEMBLATE SU INTERMEDIO SPECIFICO Z2

EUROGRIP MANUAL SYSTEM M-TOP Z1 DUO: *FRONT CLAMPS ASSEMBLED ON SPECIFIC Z2 STYLE INTERMEDIATE*

150 mm	7,0 kg

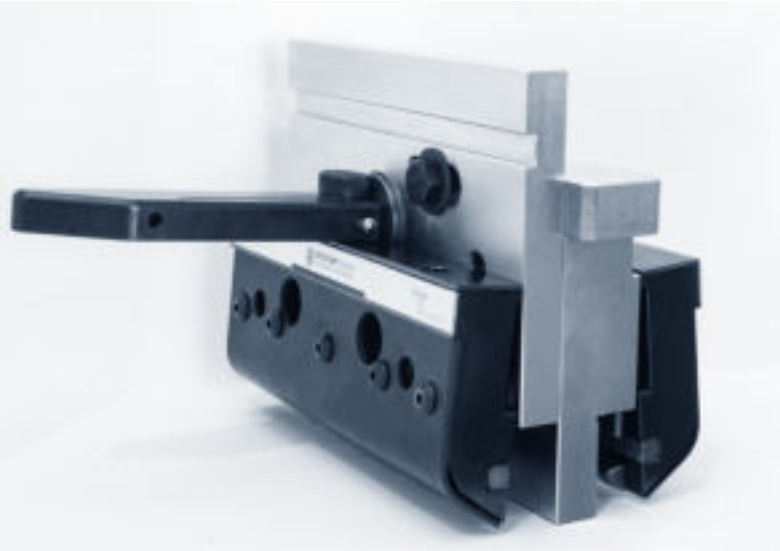

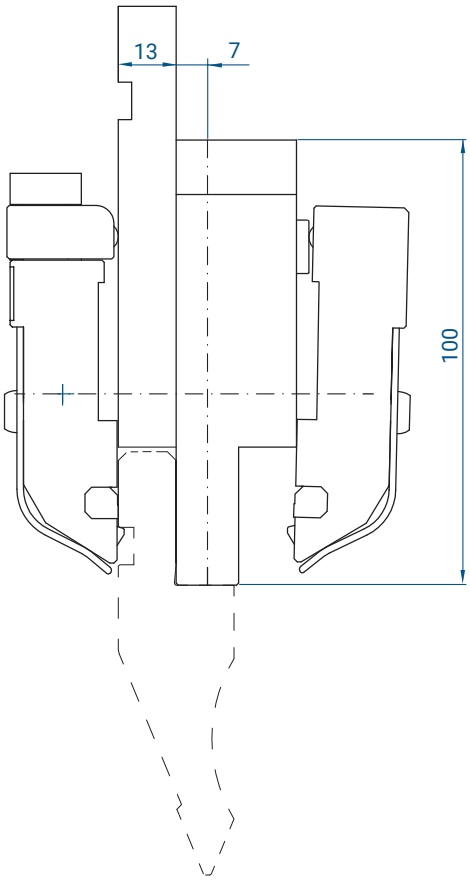

CARATTERISTICHE TECNICHE

Ogni singolo pezzo di utensile può essere montato con orientamento frontale oppure posteriore (rotazione di 180°) in base alla necessità di piegatura.

Inserimento verticale per entrambe gli orientamenti con aggancio automatico nel sistema aperto. Nessun limite di lunghezza, forma e quantità degli utensili inseriti.

Bloccaggio tramite unica leva per modulo che agisce su tutti gli utensili presenti con sollevamento in appoggio e bloccaggio sui piani di riferimento a garanzia di un perfetto allineamento. La leva in posizione di bloccaggio non presenta sporgenze.

Sbloccaggio: l'apertura della leva libera tutti gli utensili presenti. Il sistema ne impedisce lo sgancio con assoluta sicurezza.

Estrazione: avviene solamente agendo su ogni singolo pezzo con sollevamento in battuta, piccola rotazione e sfilamento verso il basso. L'operazione non richiede sforzi aggiuntivi oltre al peso dell'utensile.

TECHNICAL FEATURES

Each tool can be mounted in either front or reverse orientation (180° rotation) depending on the bending requirement.

Vertical insertion for both orientations with automatic docking when clamps are in "open" position. No limits on the length, shape and quantity of the tools inserted.

Locking by means of a single lever per module that acts on all tools present with lift-off and clamping on the reference planes to guarantee perfect alignment. The lever in the clamping position has no protrusions.

Unlocking: the opening of the lever frees all the tools present.The clamps safety system prevents them from being unhooked with absolute safety.

Extraction: it is performed by lifting upward the punch and tilting it forward. Once unlocked it can be removed safely sustaining only the tool weight.


Modello / *Model*


4414
Z2 (M-TOP Z2 DUO)

SISTEMA MANUALE EUROGRIP M-TOP Z2 DUO: STAFFE ASSEMBLATE SU INTERMEDIO SPECIFICO Z2

EUROGRIP MANUAL SYSTEM M-TOP Z2 DUO: *FRONT CLAMPS ASSEMBLED ON SPECIFIC Z2 STYLE INTERMEDIATE*

150 mm	7,0 kg

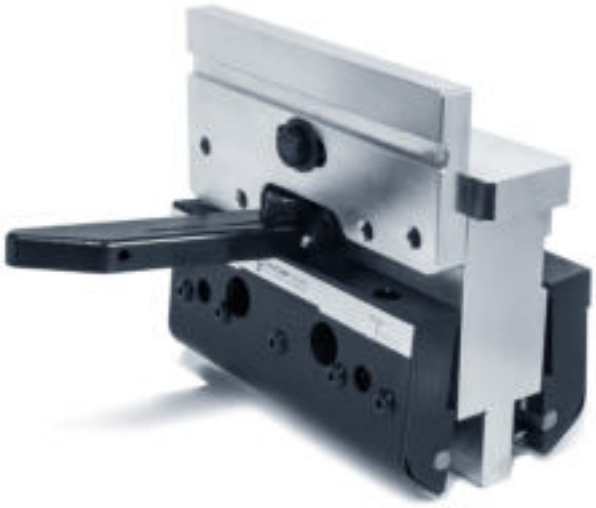

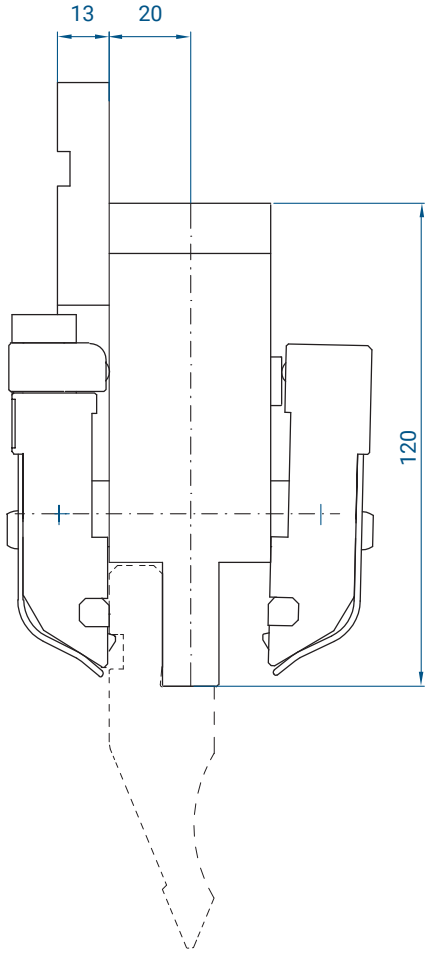

CARATTERISTICHE TECNICHE

Ogni singolo pezzo di utensile può essere montato con orientamento frontale oppure posteriore (rotazione di 180°) in base alla necessità di piegatura.

Inserimento verticale per entrambe gli orientamenti con aggancio automatico nel sistema aperto. Nessun limite di lunghezza, forma e quantità degli utensili inseriti.

Bloccaggio tramite unica leva per modulo che agisce su tutti gli utensili presenti con sollevamento in appoggio e bloccaggio sui piani di riferimento a garanzia di un perfetto allineamento. La leva in posizione di bloccaggio non presenta sporgenze.

Sbloccaggio: l'apertura della leva libera tutti gli utensili presenti. Il sistema ne impedisce lo sgancio con assoluta sicurezza.

Estrazione: avviene solamente agendo su ogni singolo pezzo con sollevamento in battuta, piccola rotazione e sfilamento verso il basso. L'operazione non richiede sforzi aggiuntivi oltre al peso dell'utensile.

TECHNICAL FEATURES

Each tool can be mounted in either front or reverse orientation (180° rotation) depending on the bending requirement.

Vertical insertion for both orientations with automatic docking when clamps are in "open" position. No limits on the length, shape and quantity of the tools inserted.

Locking by means of a single lever per module that acts on all tools present with lift-off and clamping on the reference planes to guarantee perfect alignment. The lever in the clamping position has no protrusions.

Unlocking: the opening of the lever frees all the tools present.The clamps safety system prevents them from being unhooked with absolute safety.

Extraction: it is performed by lifting upward the punch and tilting it forward. Once unlocked it can be removed safely sustaining only the tool weight.

Modello / *Model*


4393

(M-WDP Z1)

150 mm	6,7 kg

SISTEMA MANUALE EUROGRIP M-WPD: ADATTATORE SUPERIORE DA STILE AMADA (TIPO Z1) A STILE WILA/TRUMPF

EUROGRIP MANUAL SYSTEM M-WDP: *UPPER ADAPTER FROM AMADA STYLE (Z1 TYPE) TO WILA/TRUMPF STYLE*

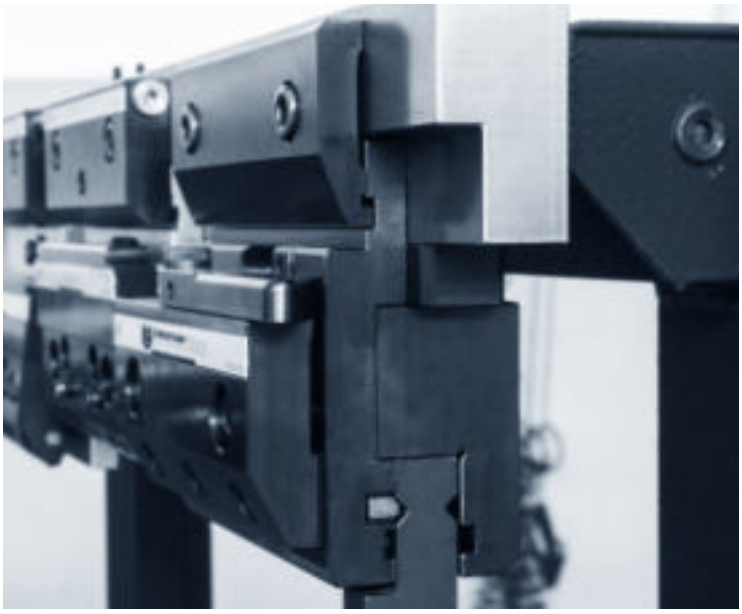

DESCRIZIONE


Adattatore speciale da stile standard Amada/ Promecam (stile Europeo) a stile standard Trumpf/Wila.

La staffa anteriore - operata da una leva a scomparsa - permette l'inserimento, la rimozione, l'allineamento e il bloccaggio di utensili conformi allo standard Trumpf/Wila su macchine con tavola superiore in stile Europeo (stile Amada Promecam).

SPECIFICHE TECNICHE

Solo su macchine predisposte ad installare intermedi di tipo Z1 (altezza 100mm; corpo 27mm; asse 7mm): tutte le dimensioni dell'intermediario devono essere verificate e confrontate con il disegno tecnico di questa pagina.

Peso=6,7Kg.

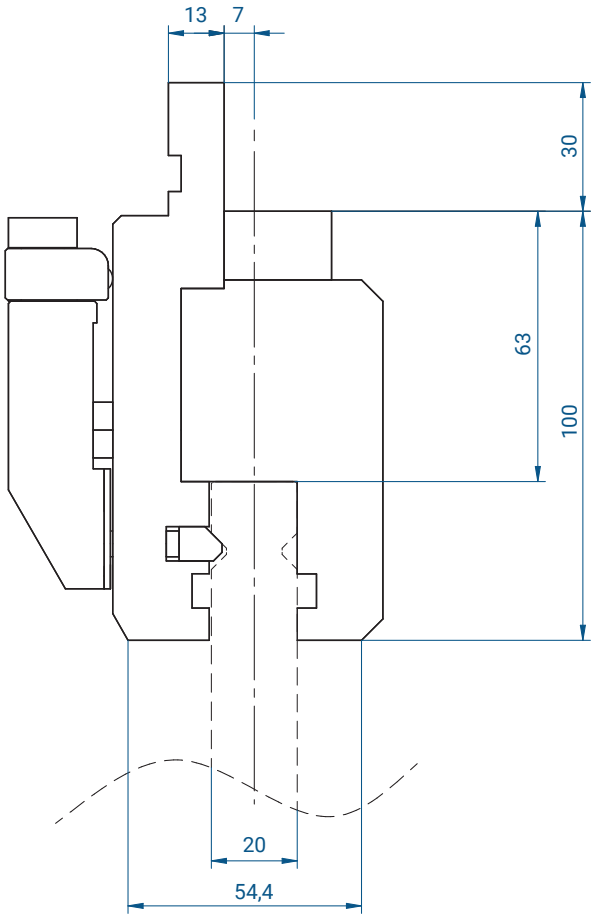

DESCRIPTION

Upper adapter from European style (Amada/ Promecam style) to Trumpf/Wila style.

The front clamp, operated by a foldaway handle allows the installation; the removal; the alignment and the locking of Trumpf/Wila style top tooling on a press brake equipped with European style clamping system.

TECHNICAL SPECIFICATIONS

Only on machines equipped for Z1 style intermediates (height 100mm; body width 27mm; bending axis located at 7mm). All dimensions of the intermediates need to be verified and confirmed as per the drawings on this page.


Weight=6,7Kg.


SISTEMI DI STAFFAGGIO MANUALI – DISPOSITIVI OPZIONALI
MANUAL CLAMPING SYSTEM – OPTIONAL ADD-ONS

Modello / *Model*

4408

150 mm	0,7 kg

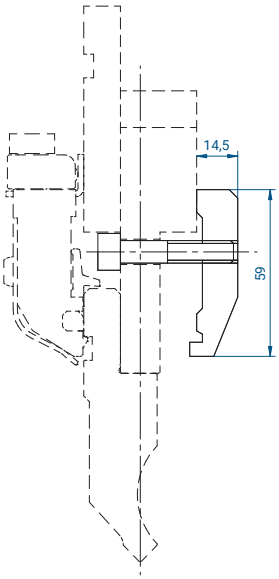

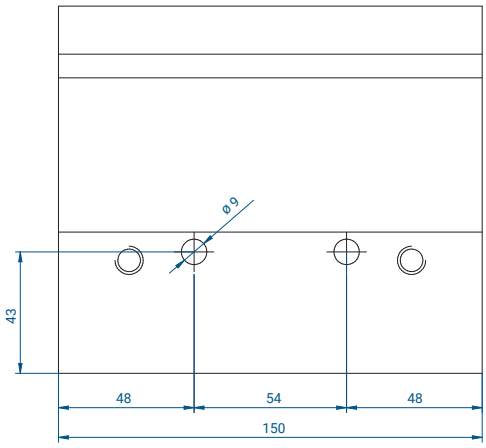

STAFFA POSTERIORE OPZIONALE, ESCLUSIVA PER MODELLI M-EASY

Per installare punzoni con orientamento "rovesciato" su intermedi equipaggiati con sistemi M-EASY (4389 e 4409).

La staffa posteriore viene operata da fronte macchina agendo su due viti a brugola.

Per installare la staffa opzionale è necessario eseguire due fori passanti diametro 9mm sul corpo dell'intermedio.

OPTIONAL REAR CLAMP EXCLUSIVELY FOR M-EASY MODELS

For inserting the punches in "reverse" direction on intermediates equipped with M-EASY clamps (4389 e 4409).


The rear clamp is operated by standing on the machine front and through two allen-key bolts.


For mounting the rear clamp, two additional holes Ø9mm need to be drilled on the intermediate body.

Modello / *Model*

4404

150 mm	0,8 kg

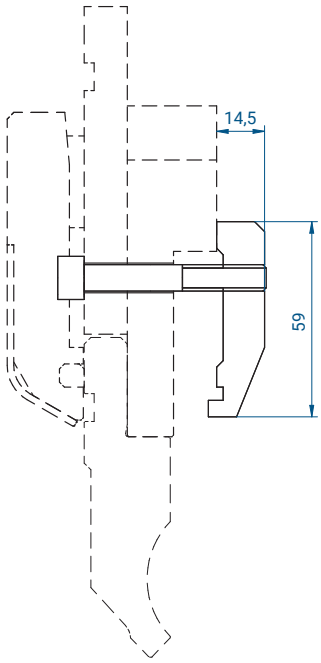

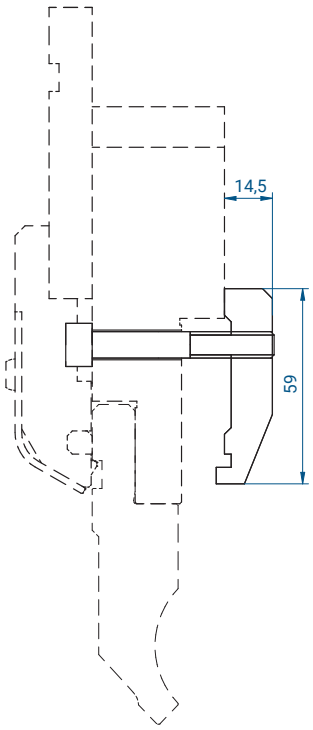

STAFFA POSTERIORE OPZIONALE, PER MODELLI M-TOP; P-EASY; P-TOP

Per installare punzoni con orientamento "rovesciato" su intermedi equipaggiati con sistemi M-TOP; P-EASY; P-TOP.

La staffa posteriore viene operata da fronte macchina agendo su due viti a brugola.

Tutti i modelli M-TOP; P-EASY; P-TOP sono forniti completi di fori passanti, per cui non è necessaria alcuna lavorazione aggiuntiva per installare la staffa.

OPTIONAL REAR CLAMP, FOR MODELS M-TOP; P-EASY; P-TOP

For inserting the punches in "reverse" direction on intermediates equipped with all the products M-TOP; P-EASY; P-TOP.

The rear clamp is operated by standing on the machine front and through two allen bolts.

All the models M-TOP; P-EASY; P-TOP are supplied with the pass-through holes already drilled on – ne need for any additional operation.


SISTEMI DI STAFFAGGIO PNEUMATICI - INTRODUZIONE
PNEUMATIC CLAMPING SYSTEM - INTRODUCTION

Tutte le staffe presenti sulla tavola superiore sono operate tramite aria compressa, controllata da una centralina e trasferita tramite tubi che collegano in serie gli intermedi.

La gamma di sistemi pneumatici include un sistema analogo per gli utensili inferiori.

All of the clamps located on the machine upper table are operated by compressed air, managed by a pneumatic control unit and transferred through pipes that connect serially the intermediates.

The pneumatic system product range includes also a solution for the pneumatic clamping of lower tooling.

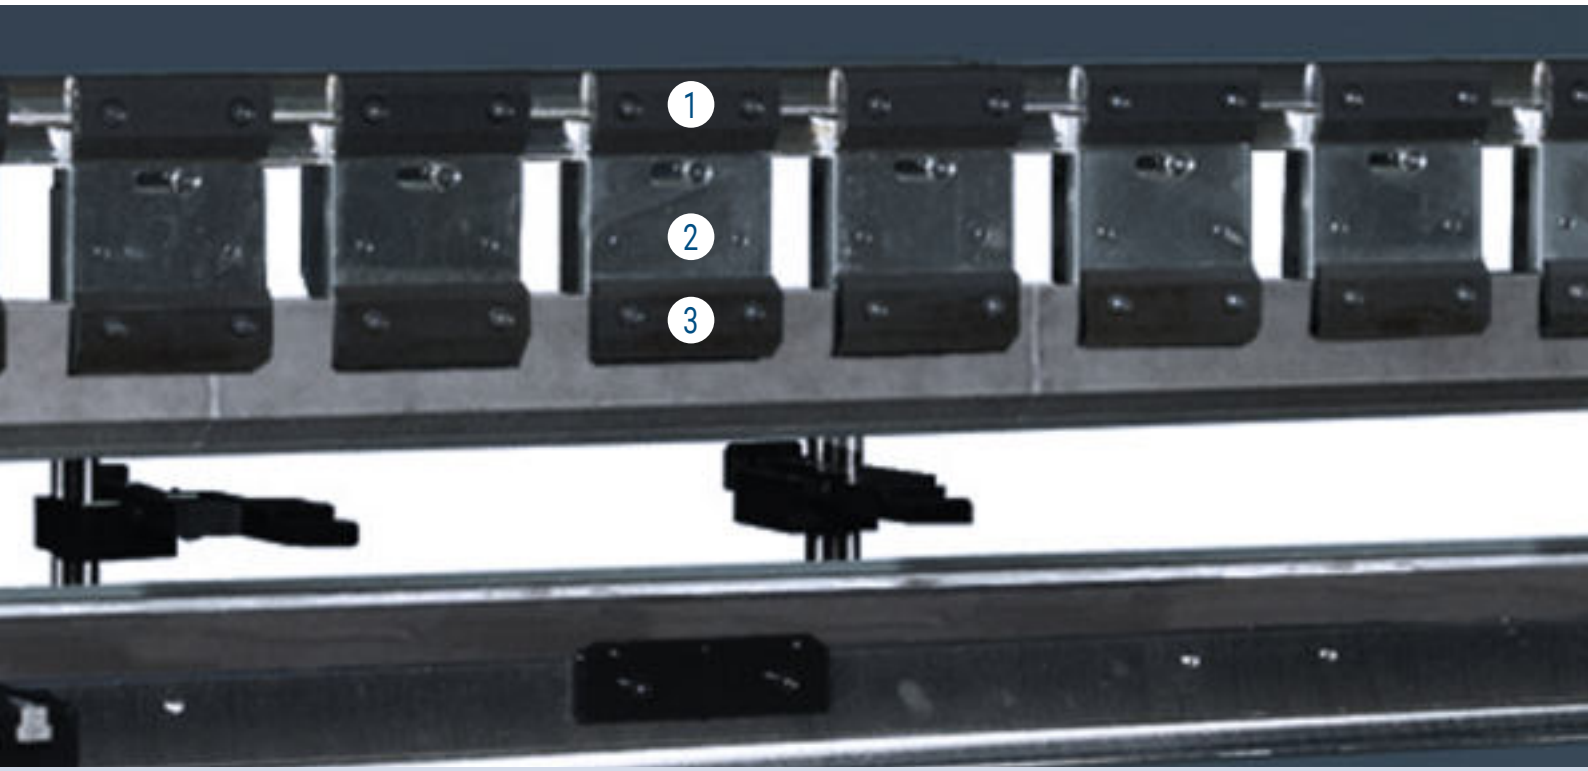

1 **STAFFA SU TAVOLA SUPERIORE (fissa)**
TOP BEAM CLAMP (fixed)

2 **INTERMEDIARIO (traslabile a destra/sinistra e rimovibile)**
INTERMEDIATE (shiftable right or left and removable)

3 **STAFFA SU INTERMEDIARIO**
INTERMEDIATE CLAMP

Il Sistema pneumatico superiore Eurogrip sostituisce alcuni dei componenti standard forniti assieme alla macchina.

In base al modello scelto verranno sostituiti solo gli intermediari (P-EASY) oppure anche la staffa sulla tavola superiore (P-TOP).

L'installazione di un sistema pneumatico richiede una centralina pneumatica e un kit (comprensivo di tubi, connettori, cavi e pulsanti di comando).

The Eurogrip upper pneumatic clamping systems replaces some of the standard components supplied with the press brake.

Depending by the chosen model (P-EASY or P-TOP), only the assembly of intermediate body and its clamp will be replaced, or it will be supplied also a new top beam clamp.

The installation of any pneumatic clamping system requires a pneumatic control unit and a pneumatic connection kit (pipes, connectors, cables, switch).

Modello / *Model*


4392
(P-EASY Z1)


150 mm	5,2 kg


SISTEMA PNEUMATICO EUROGRIP P-EASY:
STAFFA PNEUMATICA ASSEMBLATA SU INTERMEDIO SPECIFICO Z1

EUROGRIP PNEUMATIC SYSTEM P-EASY:
PNEUMATIC CLAMP ASSEMBLED TO SPECIFIC Z1 STYLE INTERMEDIATE



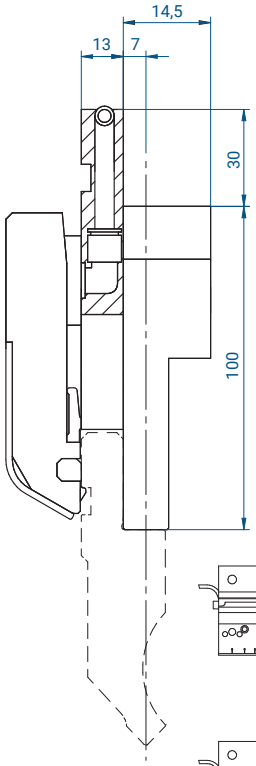

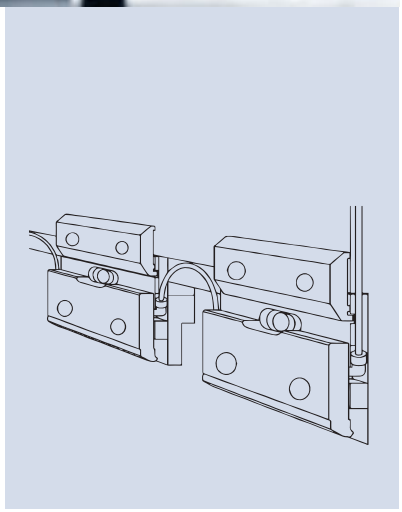

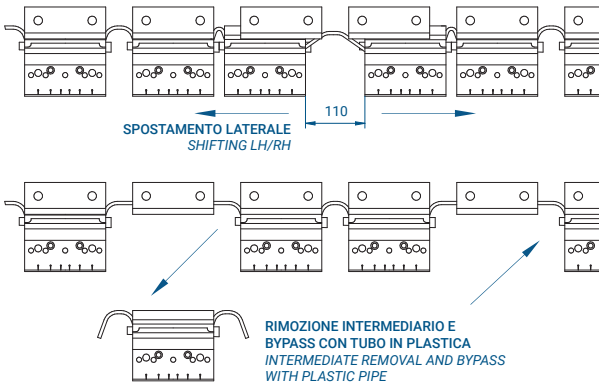

DESCRIZIONE

Assieme completo costituito da una speciale staffa, ad azionamento pneumatico, installata su un intermedio speciale (Z1) di alta qualità, disegnato per alloggiare la staffa maggiorata (vedere 2 e 3 a pag. 219).

Ciascun nuovo intermedio verrà installato al posto di quello esistente utilizzando le staffe già presenti sulla tavola superiore e verrà collegato in serie agli altri tramite tubo in plastica che ne permette lo spostamento orizzontale e la rimozione (tramite bypass). Soluzione raccomandata quando è necessario spostare/rimuovere gli intermediari raramente.

Il codice 4392 è già predisposto per l'installazione delle staffe manuali posteriori opzionali, codice 4404 (fori passanti).

SPECIFICHE TECNICHE

Solo su macchine predisposte ad installare intermedi di tipo Z1 (altezza 100mm; corpo 27mm; asse 7mm): tutte le dimensioni dell'intermediario devono essere verificate e confrontate con il disegno tecnico di questa pagina.

Peso= 5,2 Kg

DESCRIPTION

Full intermediate assembly made up of a special pneumatic clamp already installed over a special, superior quality (Z1), intermediate body conveniently machined for the movement of the operating fingers (see 2 and 3 on page 219).

Each new intermediate will be installed in place of the already existing one by utilizing the top beam clamp already mounted on the top beam and it will be connected in series with the others through a plastic pipe that will allow its horizontal shifting and removal (bypass). This is the recommended solution when the intermediate shifting (or removal) operation is required not more than few times a day.

The intermediate assembly code 4392 is already set for installing the optional rear clamp manually operated, code 4404 (pass-through holes).

TECHNICAL SPECIFICATIONS

Only on machines equipped for Z1 style intermediates (height 100mm; body width 27mm; bending axis located at 7mm). Please, verify the conformity of the existing intermediate to all of the dimension shown on the drawing.

Weight= 5,2Kg


Modello / *Model*


4405
(P-EASY Z2)


150 mm	5,2 kg


SISTEMA PNEUMATICO EUROGRIP P-EASY:
STAFFA PNEUMATICA ASSEMBLATA SU INTERMEDIO SPECIFICO Z2

EUROGRIP PNEUMATIC SYSTEM P-EASY:
PNEUMATIC CLAMP ASSEMBLED TO SPECIFIC Z2 STYLE INTERMEDIATE

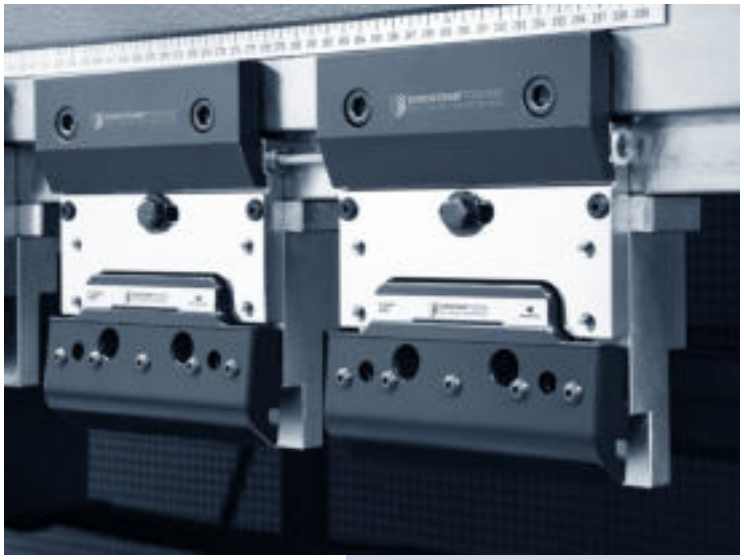

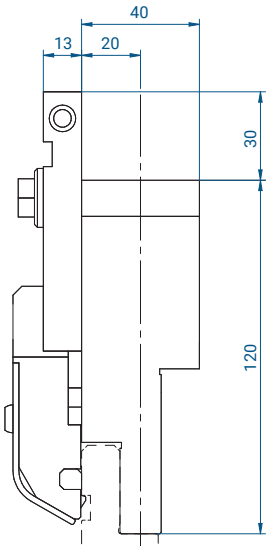

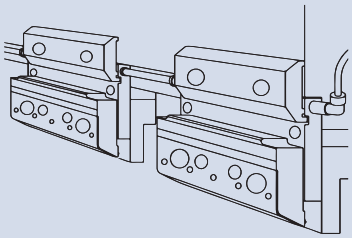

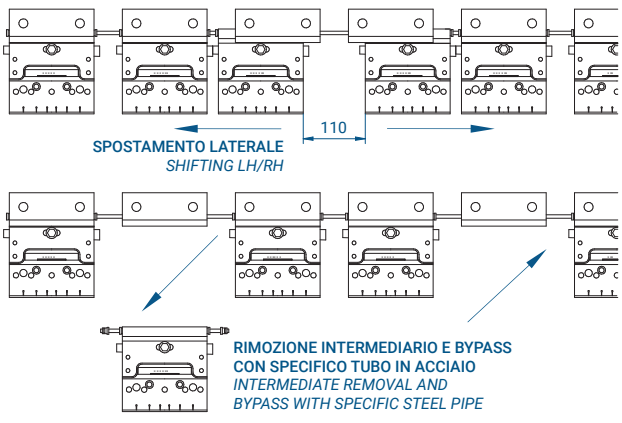

DESCRIZIONE

Assieme completo costituito da una speciale staffa, ad azionamento pneumatico, installata su un intermedio speciale (Z2) di alta qualità, disegnato per alloggiare la staffa maggiorata (vedere 2 e 3 a pag. 219).

Ciascun nuovo intermedio verrà installato al posto di quello esistente utilizzando le staffe già presenti sulla tavola superiore e verrà collegato in serie agli altri tramite tubo in acciaio che ne permette lo spostamento orizzontale e la rimozione (tramite bypass). Soluzione raccomandata quando è necessario spostare/rimuovere gli intermediari raramente.

Il codice 4405 è già predisposto per l'installazione delle staffe manuali posteriori opzionali, 4404 (fori passanti).

SPECIFICHE TECNICHE

Solo su macchine predisposte ad installare intermedi di tipo Z2 (altezza 120mm; corpo 40mm; asse 20mm): tutte le dimensioni dell'intermediario devono essere verificate e confrontate con il disegno tecnico di questa pagina.

Peso= 5,9 Kg

DESCRIPTION

Full intermediate assembly made up of a special pneumatic clamp already installed over a special, superior quality (Z1), intermediate body conveniently machined for the movement of the operating fingers (see 2 and 3 on page 219).

Each new intermediate will be installed in place of the already existing one by utilizing the top beam clamp already mounted on the top beam and it will be connected in series with the others through a steel pipe that will allow its horizontal shifting and removal (bypass). This is the recommended solution when the intermediate shifting (or removal) operation is not required more than few times a day.

The intermediate assembly code 4405 is already set for installing the optional rear clamp manually operated, code 4404 (pass-through holes).

TECHNICAL SPECIFICATIONS

Only on machines equipped for Z2 style intermediates (height 120mm; body width 40mm; bending axis located at 7mm). Please, verify the conformity of the existing intermediate to all of the dimension shown on the drawing.

Weight= 5,9Kg

Modello / *Model*


4399
(P-TOP common)


150 mm	1,0 kg

SISTEMA PNEUMATICO EUROGRIP P-TOP: STAFFA PNEUMATICA PER TAVOLA SUPERIORE – PREREQUISITO PER INSTALLAZIONE DI MODELLI P-TOP


EUROGRIP PNEUMATIC SYSTEM P-TOP: *PNEUMATIC CLAMP TO BE INSTALLED ON THE MACHINE UPPER TABLE – MANDATORY FOR THE INSTALLATION OF ANY P-TOP MODEL*



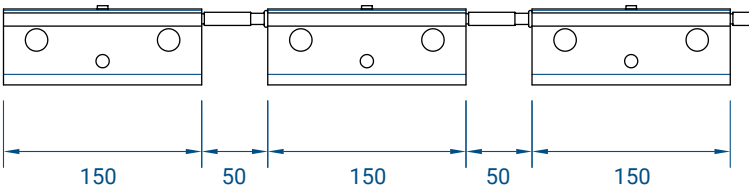

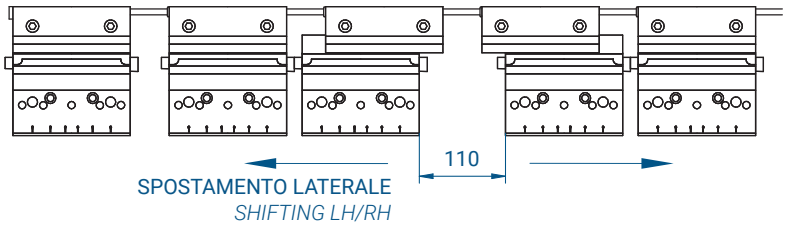

SPOSTAMENTO LATERALE
SHIFTING LH/RH

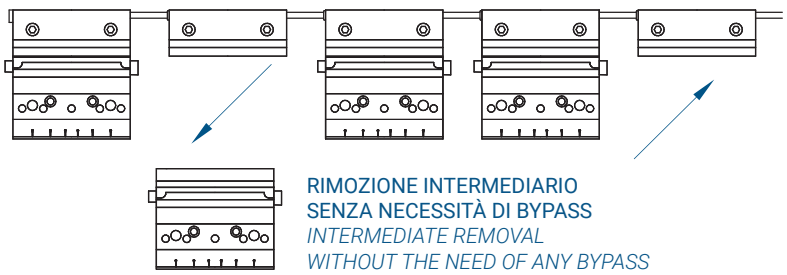

RIMOZIONE INTERMEDIARIO
SENZA NECESSITÀ DI BYPASS
INTERMEDIATE REMOVAL
WITHOUT THE NEED OF ANY BYPASS

DESCRIZIONE

Staffa per tavola superiore da installare al posto di quella montata in origine (vedere 1 a pag. 219).

Ogni staffa è collegata in serie tramite tubo in acciaio e trasferisce l'aria in pressione all'intermediario connesso attraverso una valvola interna che ne consente lo spostamento e la rimozione senza necessità di operazioni aggiuntive (bypass).


Soluzione raccomandata quando è necessario spostare (o rimuovere) gli intermediari con frequenza elevata.

DESCRIPTION

It must replace the actual standard clamps installed on the machine top beam (see 1on page 219).

Each new top beam clamp is connected in series through a steel pipe and transfers the air flow to the connected intermediate by an internal valve that allows to shift the intermediate left or right and even to remove it without the need of any bypass.

This is the recommended solution when the intermediate shifting (or removal) operation must be performed many times a day.

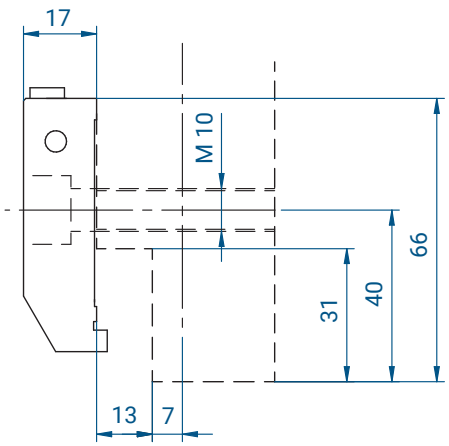

Modello / *Model*


4398


(P-TOP Z1)


150 mm	5,2 kg

SISTEMA PNEUMATICO EUROGRIP P-TOP: STAFFA PNEUMATICA ASSEMBLATA SU INTERMEDIO SPECIFICO Z1 - RICHIEDE INSTALLAZIONE DI STAFFA PER TAVOLA SUPERIORE 4399

EUROGRIP PNEUMATIC SYSTEM P-TOP: *PNEUMATIC CLAMP ASSEMBLED TO SPECIFIC Z1 STYLE INTERMEDIATE - IT IS MANDATORY TO INSTALL THE UPPER BEAM CLAMP 4399*

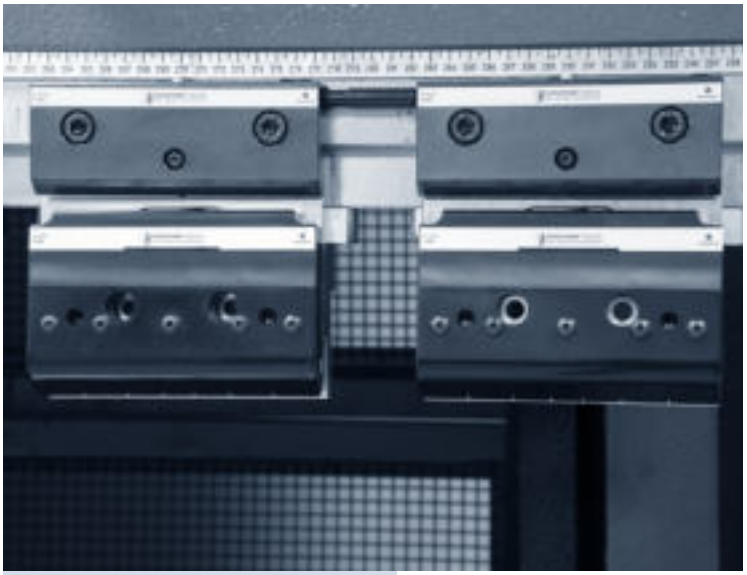



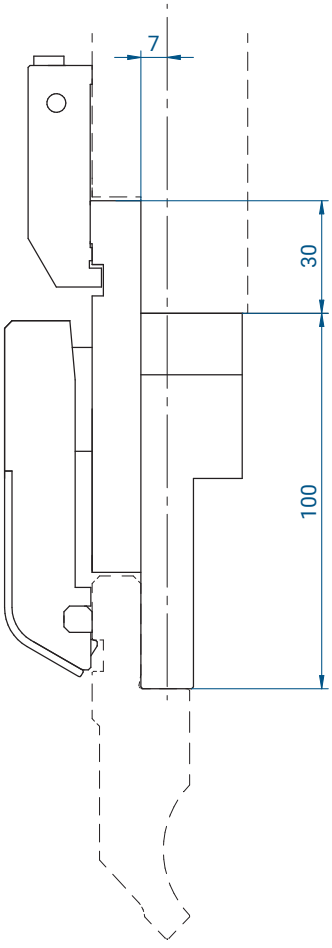

DESCRIZIONE

Assieme completo costituito da una speciale staffa, ad azionamento pneumatico, installata su un intermedio speciale (Z1) di alta qualità, disegnato per alloggiare la staffa maggiorata (vedere 2 e 3 a pag. 219).

Ciascun nuovo intermedio verrà installato utilizzando le staffe 4399 che ne gestiranno l'alimentazione di aria compressa.

L'assieme intermediario 4391 è già predisposto per l'installazione delle staffe manuali posteriori opzionali, codice 4404 (fori passanti).

SPECIFICHE TECNICHE

Solo su macchine predisposte ad installare intermedi di tipo Z1 (altezza 100mm; corpo 27mm; asse 7mm): tutte le dimensioni dell'intermediario devono essere verificate e confrontate con il disegno tecnico di questa pagina.

Peso= 6,2 Kg

Il codice 4398 identifica l'assieme intermedio + staffa superiore (4391+ 4399).

DESCRIPTION

Full intermediate assembly made up of a special pneumatic clamp already installed over a special, superior quality (Z1), intermediate body conveniently machined for the movement of the operating fingers (see 2 and 3 on page 219).

Each new intermediate will be installed in place of the already existing one by utilizing the 4399 top beam clamp that will manage the pneumatic supply.

The intermediate assembly code 4391 is already set for installing the optional rear clamp manually operated, code 4404 (pass-through holes).

TECHNICAL SPECIFICATIONS

Only on machines equipped for Z1 style intermediates (height 100mm; body width 27mm; bending axis located at 7mm). Please, verify the conformity of the existing intermediate to all of the dimension shown on the drawing.

Weight= 6,2Kg

The code 4398 identifies the assembly of intermediate + top beam clamp (4391+4399).

Modello / *Model*


4410


(P-TOP Z2)


150 mm	5,2 kg

SISTEMA PNEUMATICO EUROGRIP P-TOP: STAFFA PNEUMATICA ASSEMBLATA SU INTERMEDIO SPECIFICO Z2 RICHIEDE INSTALLAZIONE DI STAFFA PER TAVOLA SUPERIORE 4399

EUROGRIP PNEUMATIC SYSTEM P-TOP: *PNEUMATIC CLAMP ASSEMBLED TO SPECIFIC Z2 STYLE INTERMEDIATE IT IS MANDATORY TO INSTALL THE UPPER BEAM CLAMP 4399*

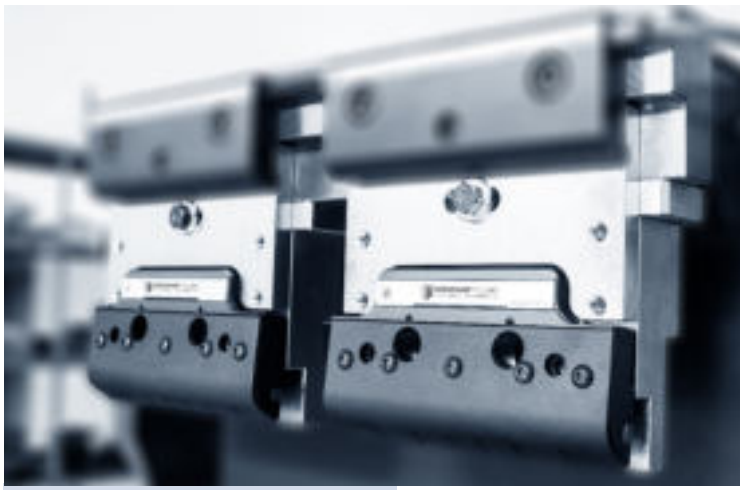

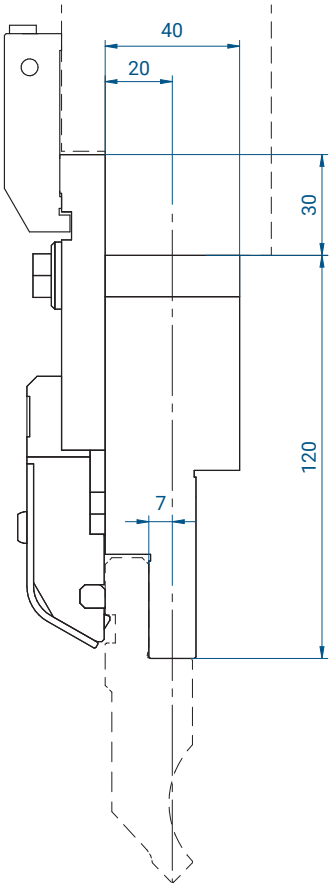

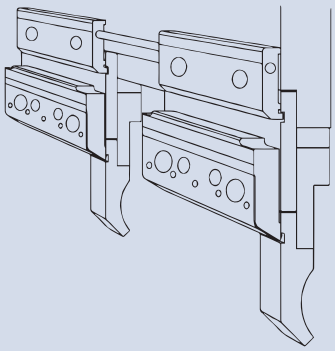

DESCRIZIONE

Assieme completo costituito da una speciale staffa, ad azionamento pneumatico, installata su un intermedio speciale (Z2) di alta qualità, disegnato per alloggiare la staffa maggiorata (vedere 2 e 3 a pag. 219).

Ciascun nuovo intermedio verrà installato utilizzando le staffe 4399 che ne gestiranno l'alimentazione di aria compressa.

L'assieme intermediario 4410 è già predisposto per l'installazione delle staffe manuali posteriori opzionali, codice 4404 (fori passanti).

SPECIFICHE TECNICHE

Solo su macchine predisposte ad installare intermedi di tipo Z2 (altezza 120mm; corpo 40mm; asse 20mm): tutte le dimensioni dell'intermediario devono essere verificate e confrontate con il disegno tecnico di questa pagina.

Peso= 6,2 Kg

Il codice 4412 identifica l'assieme intermedio + staffa superiore (4410+ 4399).

DESCRIPTION

Full intermediate assembly made up of a special pneumatic clamp already installed over a special, superior quality (Z2), intermediate body conveniently machined for the movement of the operating fingers (see 2 and 3 on page 219).

Each new intermediate will be installed in place of the already existing one by utilizing the 4399 top beam clamp that will manage the pneumatic supply.

The intermediate assembly code 4410 is already set for installing the optional rear clamp manually operated, code 4404 (pass-through holes).

TECHNICAL SPECIFICATIONS

Only on machines equipped for Z2 style intermediates (height 120mm; body width 40mm; bending axis located at 20mm). Please, verify the conformity of the existing intermediate to all of the dimension shown on the drawing.

Weight= 6,2Kg

The code 4412 identifies the assembly of intermediate + top beam clamp (4410+4399).

Modello / *Model*


4394
(P-HOLD)


SISTEMA PNEUMATICO INFERIORE EUROGRIP P-DHOLD: SUPPORTO AD AZIONAMENTO PNEUMATICO PER MATRICI STILE AMADA


EUROGRIP LOWER PNEUMATIC SYSTEM P-DHOLD: *PNEUMATIC DIE HOLDER FOR AMADA STYLE DIES*

835 mm	27,8 kg
625 mm	20,8 kg
415 mm	13,8 kg



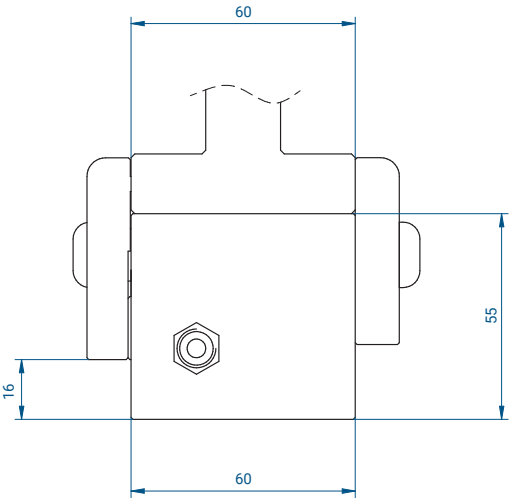

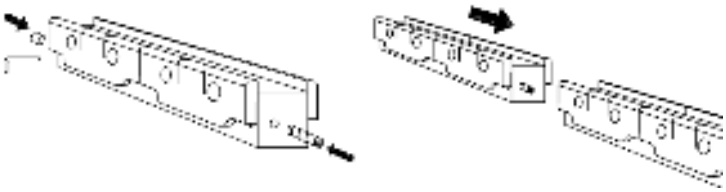

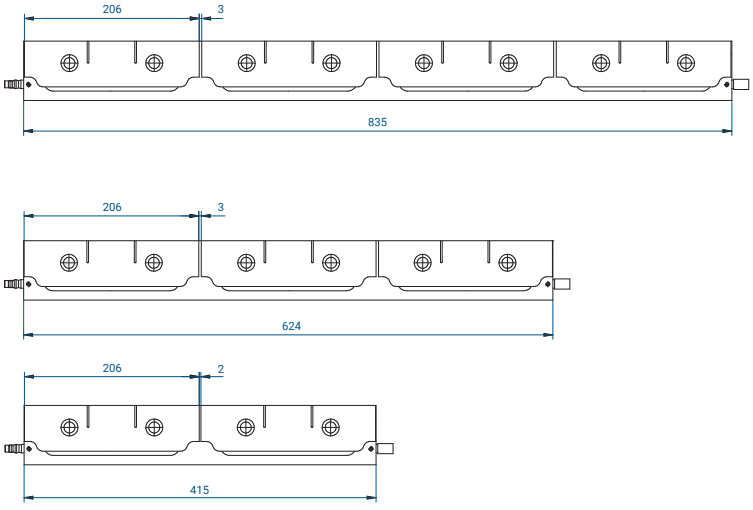

DESCRIZIONE

Supporto matrici modulare in stile Europeo (Stile Amada/Promecam). Sul lato frontale monta una serie di staffe ad azionamento pneumatico. Ogni modulo si connette al successivo tramite un connettore a scomparsa. Sistema raccomandato per clienti che devono sostituire frequentemente gli utensili inferiori perché consente il blocco/sblocco simultaneo di tutti gli utensili inferiori con la sola pressione di un pulsante.

SPECIFICHE TECNICHE

Installabile su macchine con tavola inferiore piana conforme allo standard stile Europeo (stile Amada /Promecam). Disponibile in moduli con lunghezza 835mm; 415mm; 625mm.

DESCRIPTION

Modular lower die support based on the standard European style (Amada/Promecam style) that carry on its front side a series of pneumatic clamps. Each module connects to the next one through a foldaway connector. This solution is recommended to those customers used to replace frequently the lower tooling because it allows to clamp/unclamp the whole lower table by simply operate a button.

TECHNICAL SPECIFICATIONS

Can be installed on any machine equipped with a lower flat table that conforms to the European style (Amada/Promecam style). Available in modules long 835mm; 415mm; 625mm.


COMPONENTI AGGIUNTIVI PER SISTEMI PNEUMATICI / *PNEUMATIC CLAMPING SYSTEM ADDITONAL COMPONENTS*

Per gestire i sistemi pneumatici Eurogrip è necessario installare una unità di controllo pneumatica, che contiene la componentistica elettrica e pneumatica per pilotare il sistema, oltre ad un kit, specifico per il modello ordinato, che comprende i tubi, i cavi ed i connettori da utilizzare per installare correttamente il sistema.

In order to manage correctly any Eurogrip pneumatic system is it required to install a pneumatic control unit, that contains the electric and pneumatic system components necessary for driving the system, and to utilize a hardware kit, specific for the ordered system, that includes the supply of the pipes, cables and connectors required for the correct installation of the system.

Modello / *Model*

4395
(single line)

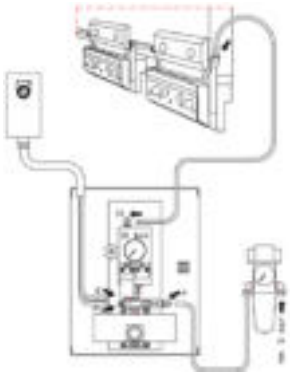

SISTEMA PNEUMATICO EUROGRIP: CENTRALINA PNEUMATICA LINEA SINGOLA, COMPRENSIVA DI ACCESSORI

EUROGRIP PNEUMATIC SYSTEM: PNEUMATIC CONTROL UNIT SINGLE LINE, ACCESSORIES INCLUDED

DESCRIZIONE

Si connette alla sorgente di aria compressa disponibile in officina (pressione minima ingresso 6 Bar). Gestisce la pressione in uscita verso il sistema di connessione tramite una sola uscita per pilotare solamente un sistema di connessione (superiore o inferiore). Contiene i circuiti di controllo e di sicurezza.

DESCRIPTION


It connects to the job shop pressurized air supply (minimum input pressure 6 Bar).

It manages the output pressure to the clamping system through only one output connector (only upper or only lower).

It contains all of the electrical connections and the safety system.

Modello / *Model*

4396
(two lines)

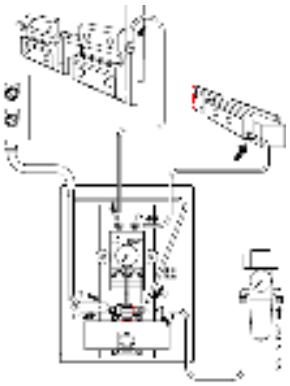

SISTEMA PNEUMATICO EUROGRIP: CENTRALINA PNEUMATICA LINEA DOPPIA, COMPRENSIVA DI ACCESSORI

EUROGRIP PNEUMATIC SYSTEM: PNEUMATIC CONTROL UNIT DOUBLE LINE, ACCESSORIES INCLUDED

DESCRIZIONE

Si connette alla sorgente di aria compressa disponibile in officina (pressione minima ingresso 6 Bar). Gestisce la pressione in uscita verso il sistema di connessione tramite due sole uscite per pilotare entrambi i sistemi di connessione (superiore e inferiore). Contiene i circuiti di controllo e di sicurezza.

DESCRIPTION

It connects to the job shop pressurized air supply (minimum input pressure 6 Bar). It manages the output pressure to the clamping system through two output connector (upper and lower).

It contains all of the electrical connections and the safety system.

Modello / *Model*

4397
(KIT P-EASY)

SISTEMA PNEUMATICO EUROGRIP: KIT CONNESSIONI P-EASY

EUROGRIP PNEUMATIC SYSTEM: P-EASY CONNECTION KIT

DESCRIZIONE

Assieme dei componenti necessari per installare e collegare il sistema P-EASY.

DESCRIPTION

Assembly of hardware required for installing and connecting the P-EASY system.

Modello / *Model*

4381
(KIT P-TOP)

SISTEMA PNEUMATICO EUROGRIP: KIT CONNESSIONI P-TOP

EUROGRIP PNEUMATIC SYSTEM: P-TOP CONNECTION KIT

DESCRIZIONE

Assieme dei componenti necessari per installare e collegare il sistema P-TOP.


DESCRIPTION


Hardware kit required for installing and connecting the P-TOP system.

INTERMEDIARI REGISTRABILI
ADJUSTABLE INTERMEDIATES

GLI INTERMEDIARI REGISTRABILI (COMPLETI CON CUNEO PER CENTINATURA) POTREBBERO ESSERE FORNITI IN VERSIONE MONOLITICA OPPURE ASSEMBLATA (CORPO INTERMEDIARIO + PIASTRA FRONTALE)

THE ADJUSTABLE INTERMEDIATES (ASSEMBLED WITH THE ADJUSTABLE WEDGE) COULD BE SUPPLIED IN MONOLITHIC VERSION OS IN THE ASSEMBLED VERSION (INTERMEDIATE BODY + FRONT PLATE)

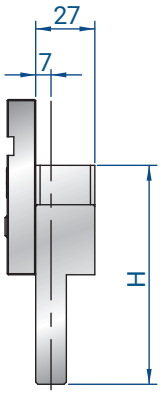

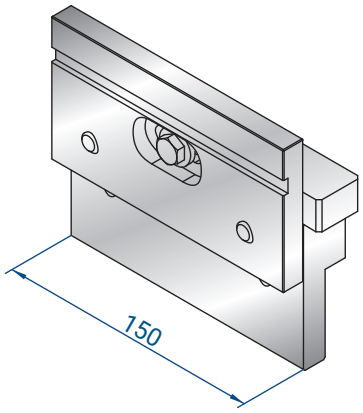

4221

H = 100

150 mm	3,6 kg

4222


H = 120


150 mm	4,6 kg

4223

H = 150

150 mm	6,0 kg

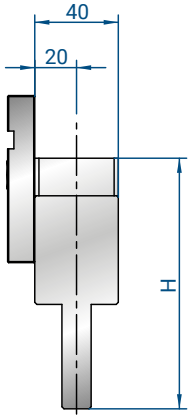

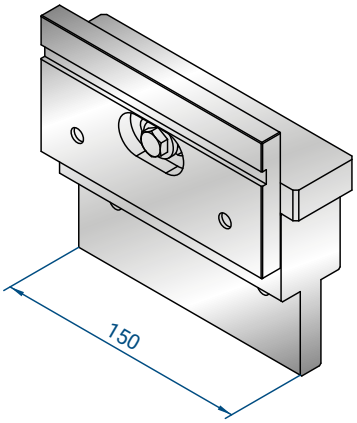

4224

H = 100

150 mm	4,2 kg


SOLO COMPATIBILE CON STAFFA 5012


COMPATIBLE ONLY WITH CLAMP 5012

4225

H = 120

150 mm	5,3 kg

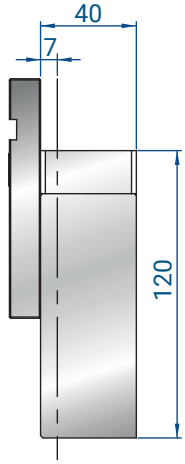

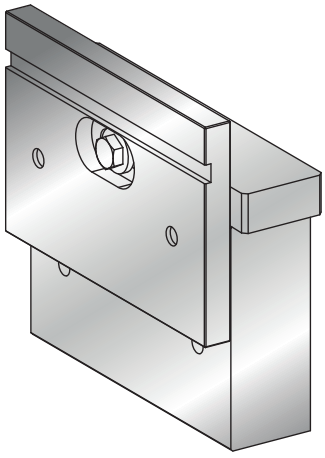

4073 - HD


H = 120


150 mm	7,2 kg

PER ALTI TONNELLAGGI

HEAVY DUTY

INTERMEDIARI REGISTRABILI
ADJUSTABLE INTERMEDIATES

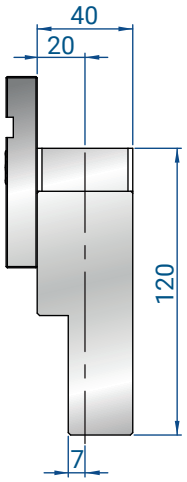

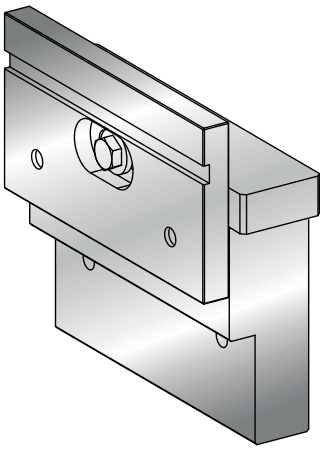

4411-HD


H = 120


150 mm	6,1 kg

PER ALTI TONNELLAGGI

HEAVY DUTY

INTERMEDIARI FISSI / FIXED INTERMEDIATES

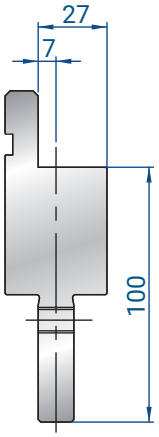


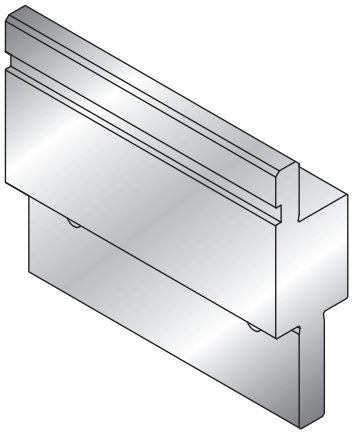


4282

H = 100

150 mm	3,8 kg

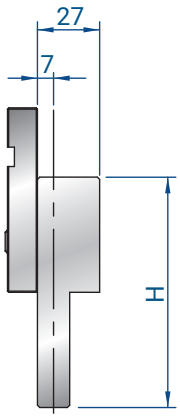

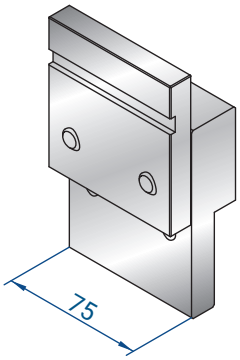

4226


H = 100


75 mm	1,8 kg

4227

H = 150

75 mm	2,9 kg

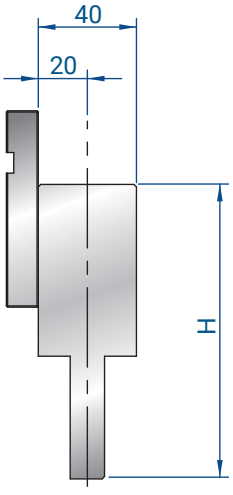

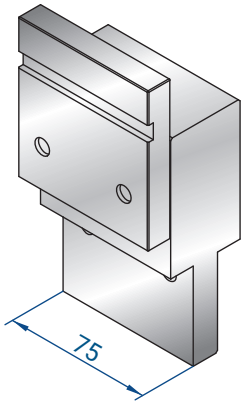


4228

H = 120

75 mm	2,6 kg

LE VITI STANDARD M10X35 VERRANNO INCLUSE SOLO PER ORDINI RELATIVI AD ASSIEME INTERMEDIO PIÙ STAFFA

THE STANDARD SCREWS M10X35 WILL BE INCLUDED ONLY FOR ORDERS RELATED TO INTERMEDIATE PLUS CLAMP ASSEMBLIES

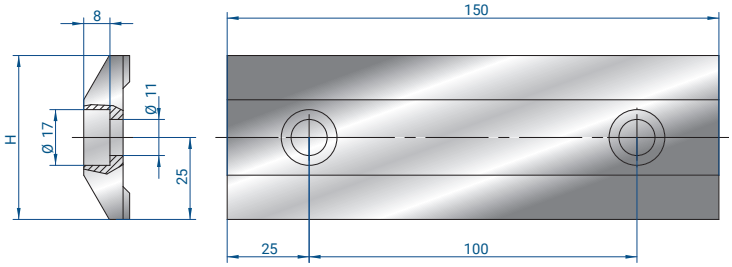

DA INSTALLARE UTILIZZANDO VITI STANDARD M10X35

TO BE INSTALLED WITH STANDARD SCREWS M10X35

4016


H = 50

150 mm	0,6 kg

5013

H = 43

150 mm	0,6 kg

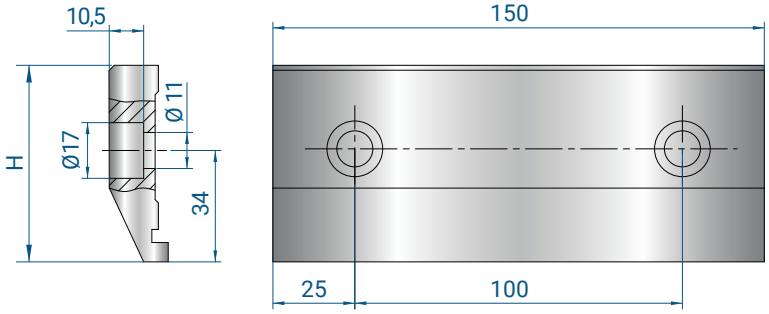

DA INSTALLARE UTILIZZANDO VITI STANDARD M10X35

TO BE INSTALLED WITH STANDARD SCREWS M10X35

4020

H = 60

150 mm	0,8 kg

✕ ***#4000; #4224***


5012

H = 52

150 mm	0,7 kg

✓ ***#4000; #4224***



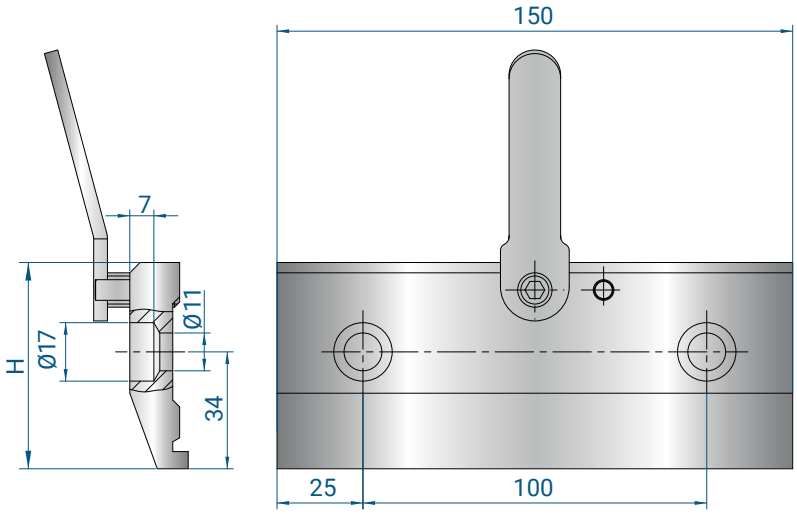

4021

H = 60

150 mm	0,9 kg

✕ ***#4000***; ***#4224***

5011


H = 52

150 mm	0,8 kg

✓ ***#4000***

DA INSTALLARE UTILIZZANDO LE VITI SPECIALI 4281 (IN DOTAZIONE)

TO BE INSTALLED WITH SPECIAL SCREWS 4281 (SUPPLIED WITH THE CLAMP)

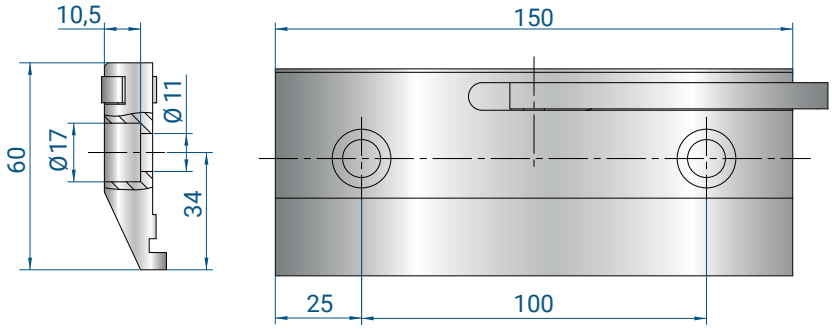

4009

H = 60

150 mm	0,9 kg


✕ ***#4000***; ***#4001***; ***#4224***

DA INSTALLARE UTILIZZANDO VITI STANDARD M10X35

TO BE INSTALLED WITH STANDARD SCREWS M10X35

LE VITI STANDARD M10X35 VERRANNO INCLUSE SOLO PER ORDINI RELATIVI AD ASSIEME INTERMEDIO PIÙ STAFFA

THE STANDARD SCREWS M10X35 WILL BE INCLUDED ONLY FOR ORDERS RELATED TO INTERMEDIATE PLUS CLAMP ASSEMBLIES

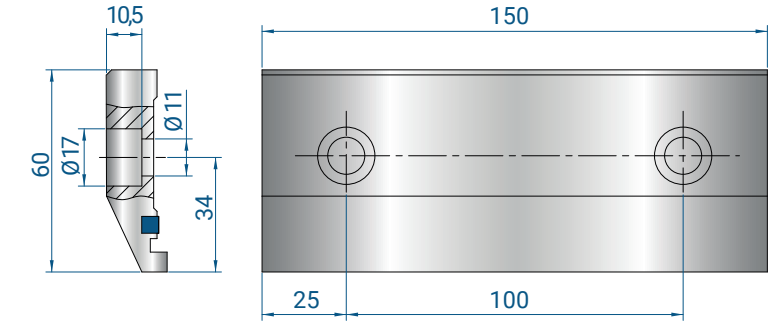

4199


H = 60

150 mm	0,8 kg

DA INSTALLARE UTILIZZANDO VITI STANDARD M10X35

TO BE INSTALLED WITH STANDARD SCREWS M10X35

#4000; #4001; #4224

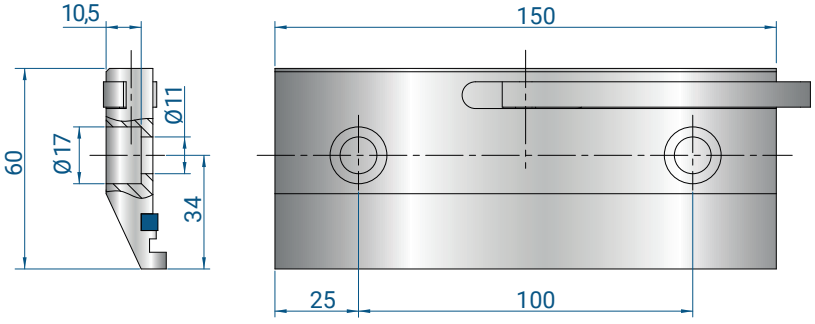

4220


H = 60

150 mm	0,8 kg

DA INSTALLARE UTILIZZANDO VITI STANDARD M10X35

TO BE INSTALLED WITH STANDARD SCREWS M10X35

#4000; #4001; #4224

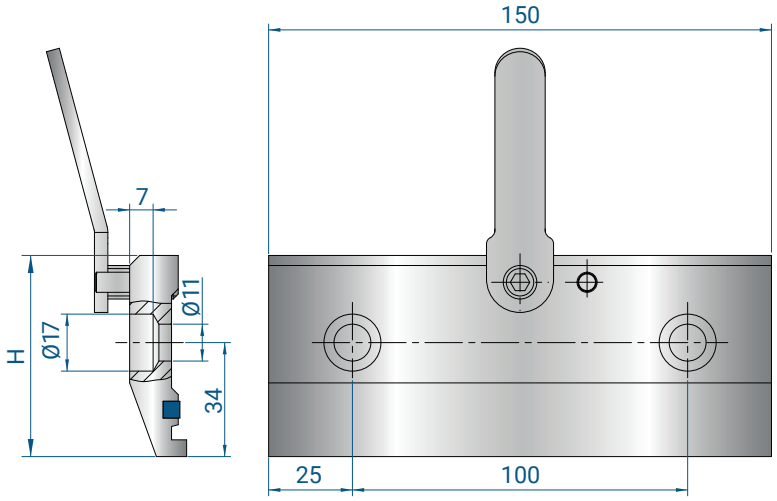

4219

H = 60

150 mm	0,9 kg

DA INSTALLARE UTILIZZANDO LE VITI SPECIALI 4281 (IN DOTAZIONE)

TO BE INSTALLED WITH SPECIAL SCREWS 4281 (SUPPLIED WITH THE CLAMP)

#4000; #4224

4349




LISTELLO IN POLIURETANO, RICAMBIO PER STAFFE:

POLYURETHANE STRIP, SPARE PART FOR:


#4199; #4220; #4219

4281



VITI SPECIALI PER STAFFE 4021-5011-4219-4007, FORNITE CON STAFFA

SPECIAL SCREWS FOR CLAMPS 4021-5011-4219-4007, SUPPLIED WITH CLAMP

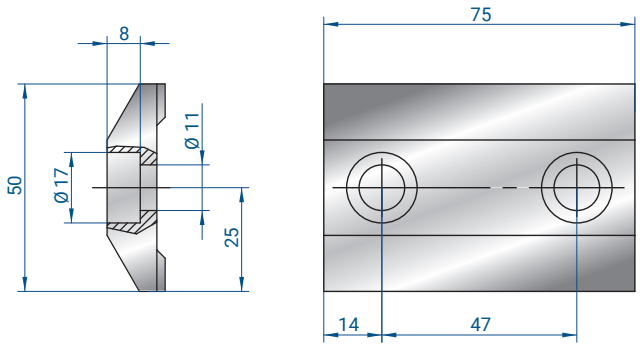


4008

H = 50

75 mm	0,3 kg

DA INSTALLARE UTILIZZANDO VITI STANDARD M10X35

TO BE INSTALLED WITH STANDARD SCREWS M10X35

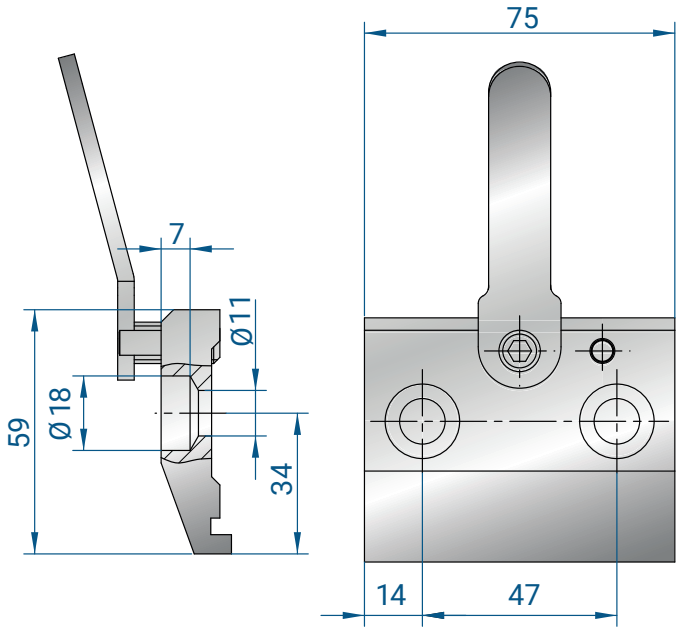


4007

H = 59

75 mm	0,5 kg

DA INSTALLARE UTILIZZANDO LE VITI SPECIALI 4281

TO BE INSTALLED WITH SPECIAL SCREWS 4281

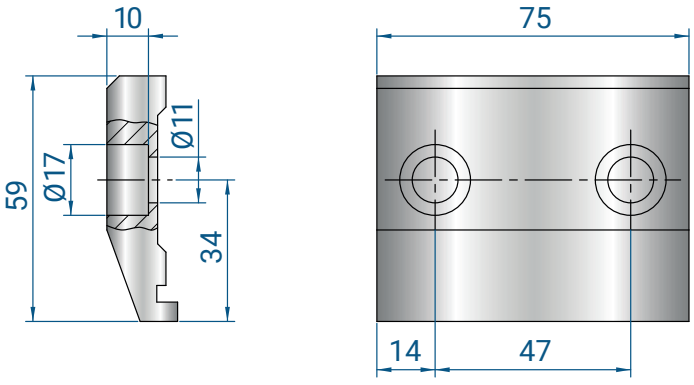


4090

H = 59

75 mm	0,4 kg

DA INSTALLARE UTILIZZANDO VITI STANDARD M10X35


TO BE INSTALLED WITH STANDARD SCREWS M10X35

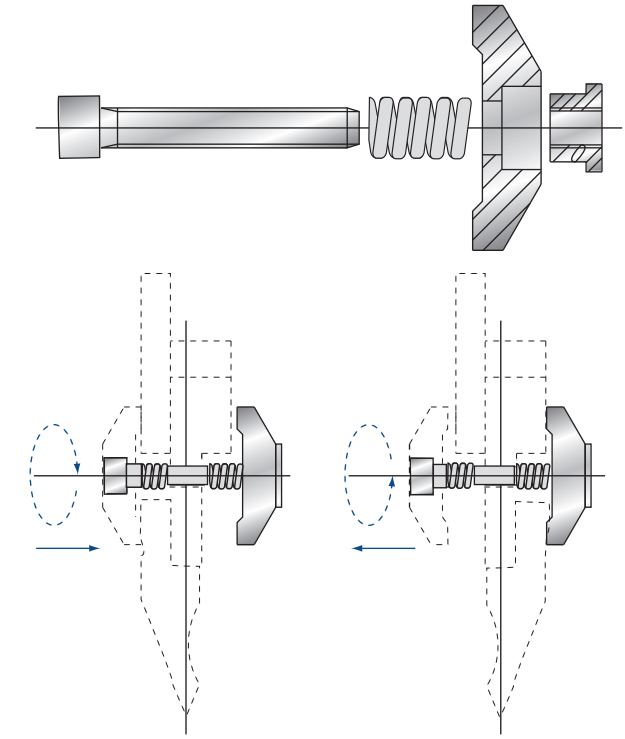

4031

KIT PER DOPPIO STAFFAGGIO
EQUIPMENT FOR DOUBLE CLAMPING


150 mm	1,0 kg

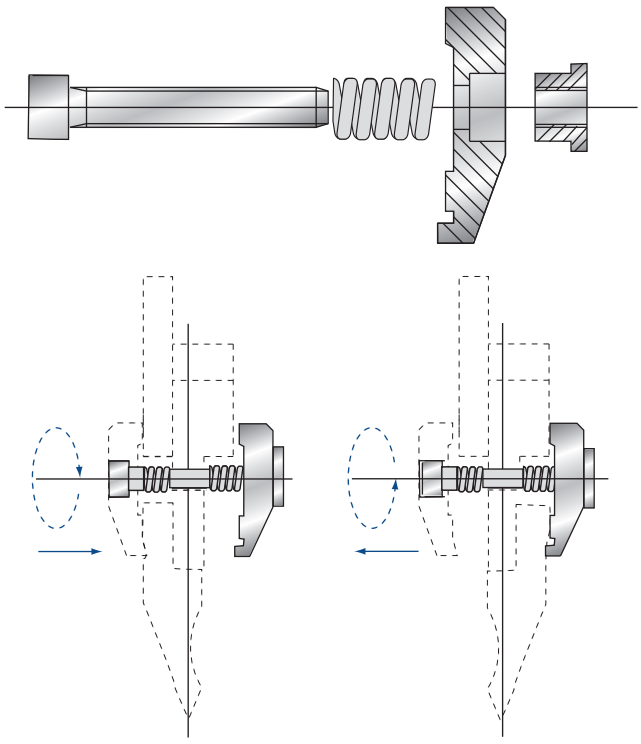


4032

KIT PER DOPPIO STAFFAGGIO
EQUIPMENT FOR DOUBLE CLAMPING

150 mm	1,2 kg

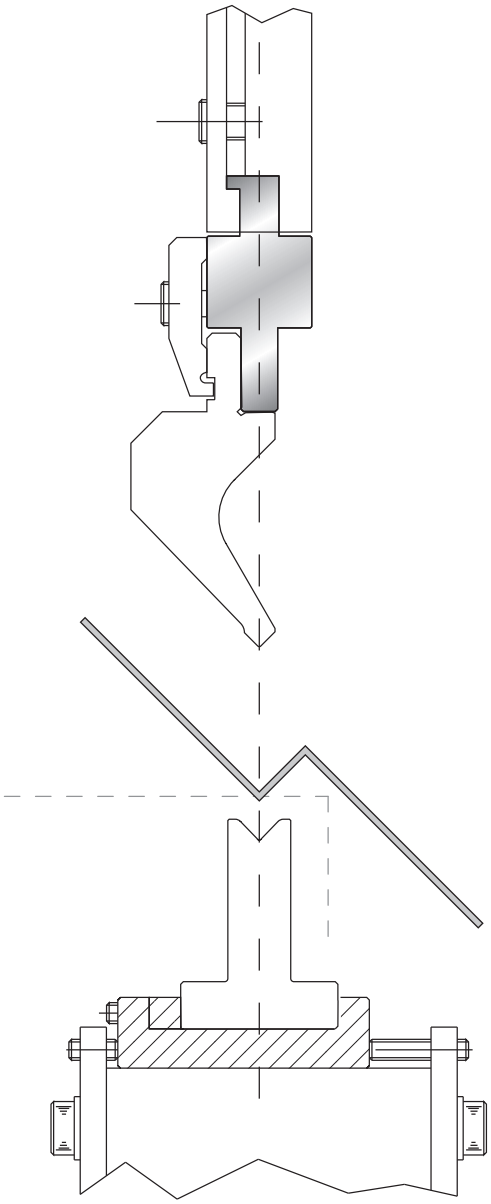

ORDINE MINIMO N. 5 ADATTATORI
MINIMUM ORDER N. 5 ADAPTERS




4000

150 mm	1,5 kg

STAFFA / *CLAMP*

5011*; *5012

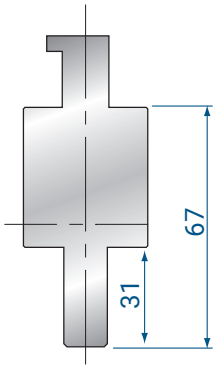


4001

150 mm	2,0 kg


STAFFA / *CLAMP*

Max H = 60mm

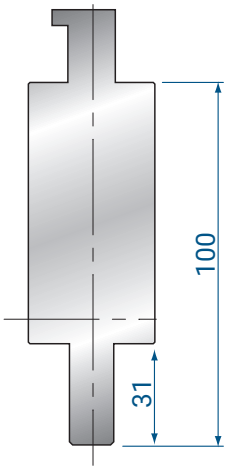

4002


150 mm	3,5 kg

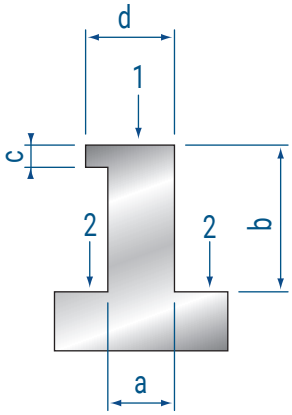

	1	2
a =		
b =		
c =		
d =		

INDICARE QUOTE D'ATTACCO
E PUNTI DI SPINTA (1,2)


PLEASE MARK CONTACT POINTS
AND PRESSURE POINTS (1,2)

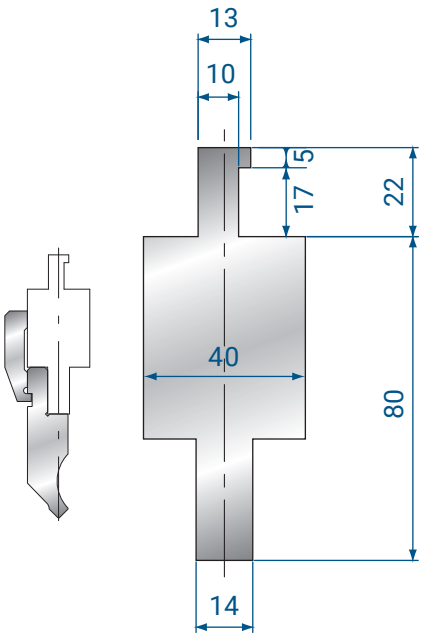

4143

LVD STYLE S (small) STANDARD


150 mm	3,0 kg



4144

LVD STYLE M (medium) SPECIAL


150 mm	3,0 kg



4145

LVD STYLE L (large) SPECIAL


150 mm	3,0 kg



4146

LVD STYLE XL (Extra Large) SPECIAL


150 mm	3,0 kg

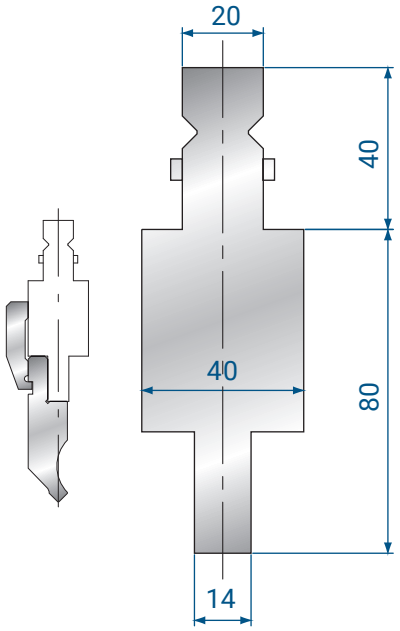

4191

TRUMPF/WILA STYLE


150 mm	3,6 kg

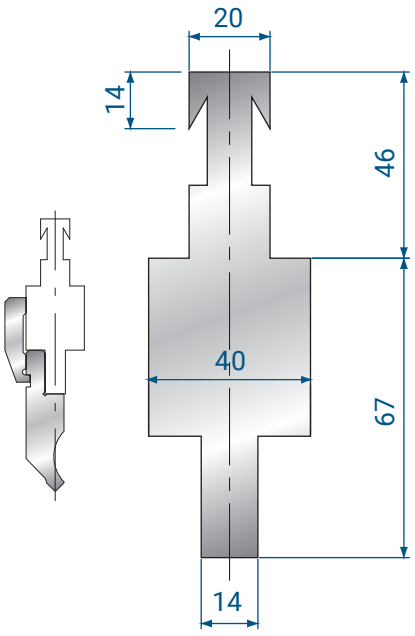

4192

BYSTRONIC-R STYLE


150 mm	3,0 kg

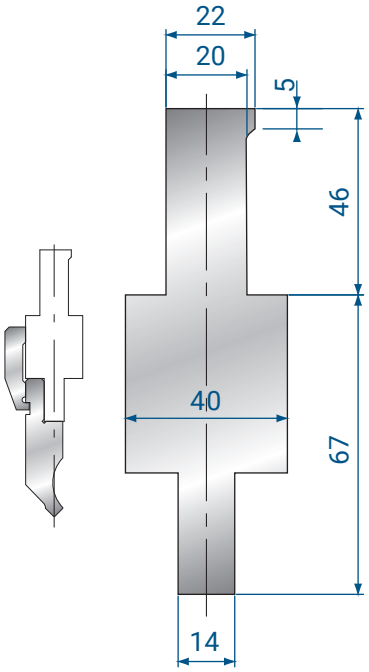

4193

BYSTRONIC - S STYLE


150 mm	3,2 kg

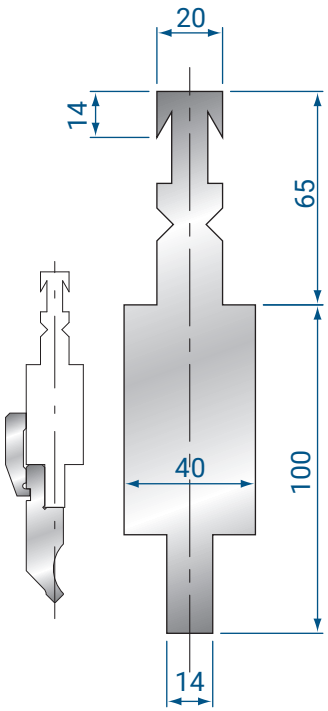

4214

BYSTRONIC - RF-A STYLE


150 mm	5,0 kg

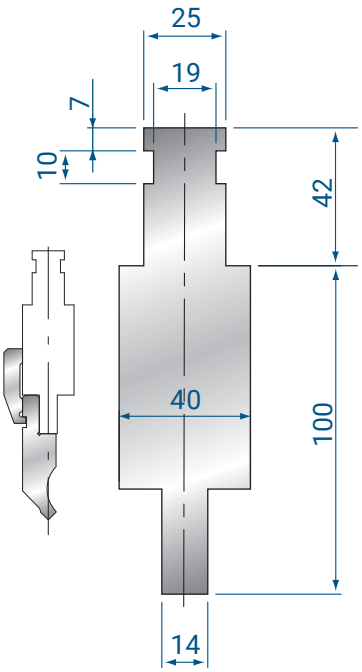

4215

WEINBRENNER STYLE


150 mm	4,8 kg

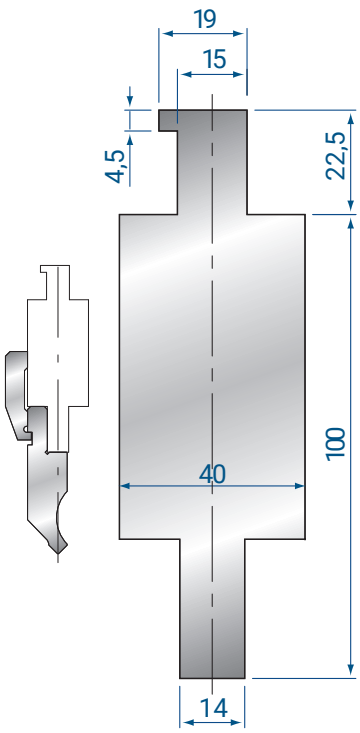

4216

CBC STYLE


150 mm	4,1 kg

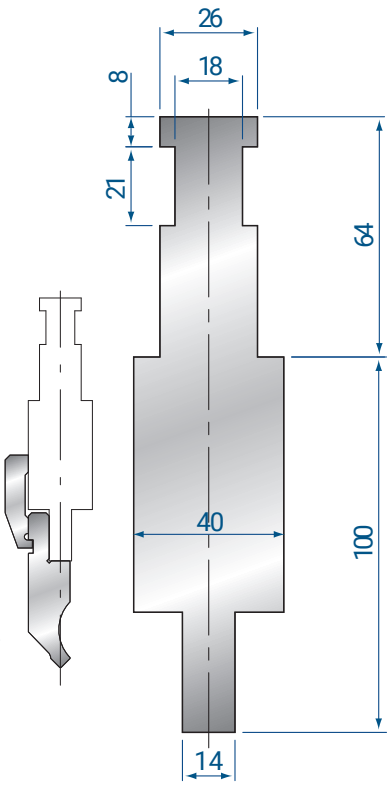

4217

EHT STYLE


150 mm	5,4 kg

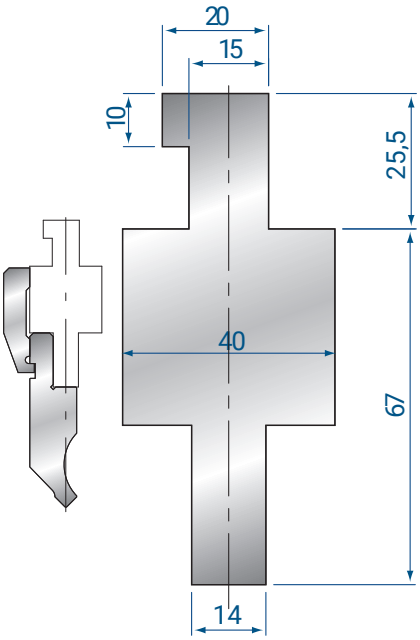

4218

DURMAZLAR STYLE


150 mm	2,6 kg

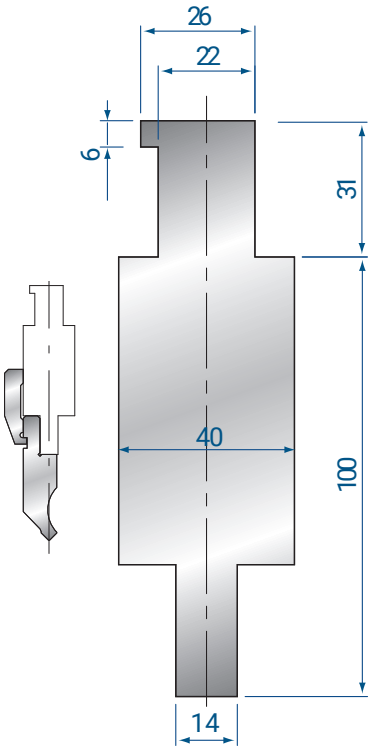

4229

DARLEY STYLE


150 mm	4,5 kg

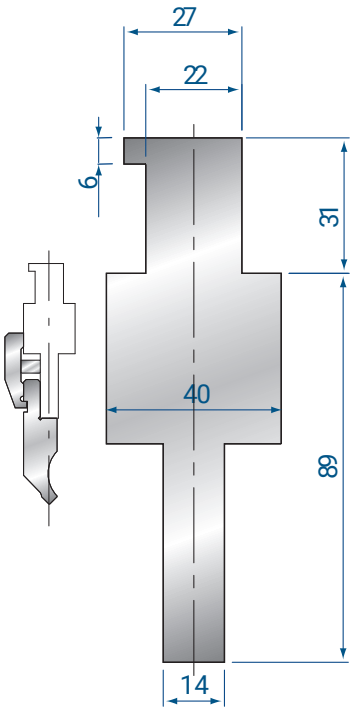

4272

BAYKAL STYLE


150 mm	3,5 kg

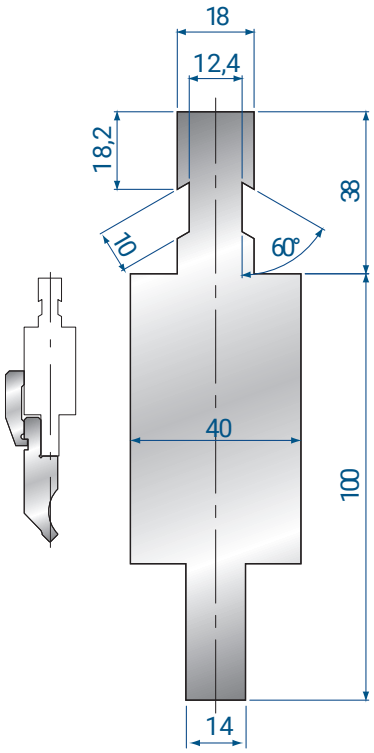

4273

COLGAR STYLE

150 mm	4,4 kg

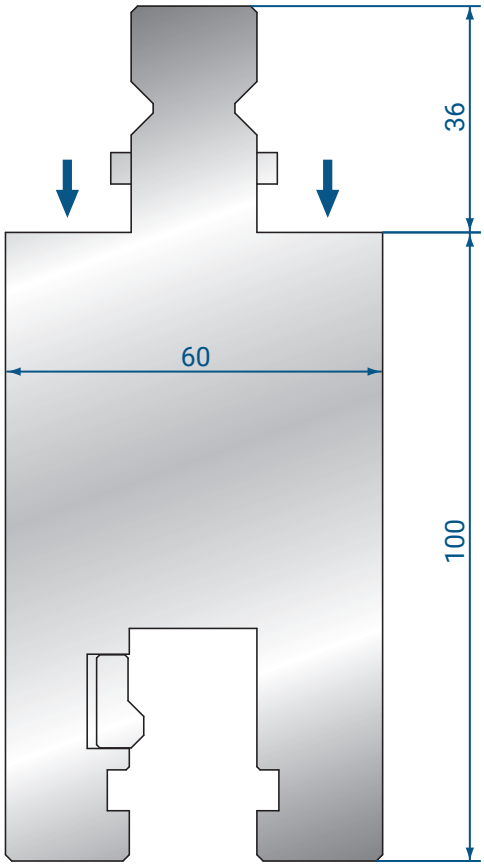


4361

PROLUNGA / *EXTENTION FOR*
TRUMPF / WILA STYLE

H = 100

150 mm	7,0 kg

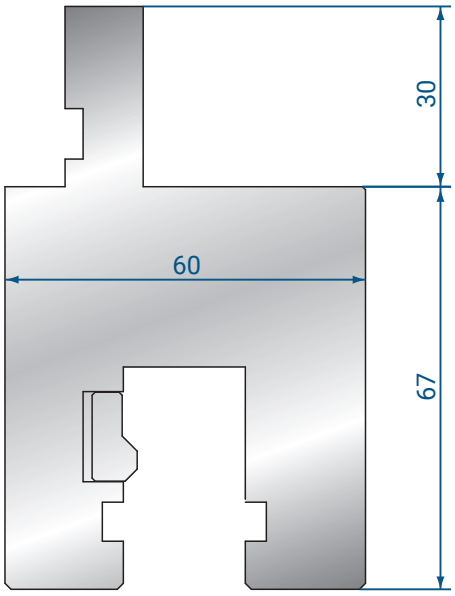


4362

ADATTATORE / *ADAPTER*
FROM AMADA STYLE TO
TRUMPF / WILA STYLE

H = 67


150 mm	4,0 kg

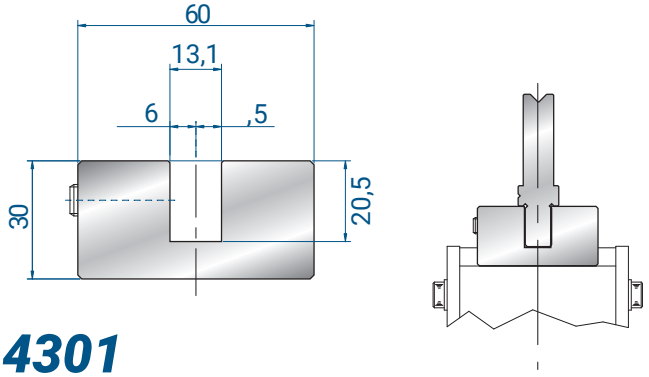

4301

FROM AMADA STYLE TO TRUMPF - WILA - BYSTRONIC STYLE


1000 mm	11,9 kg
500 mm	6,0 kg

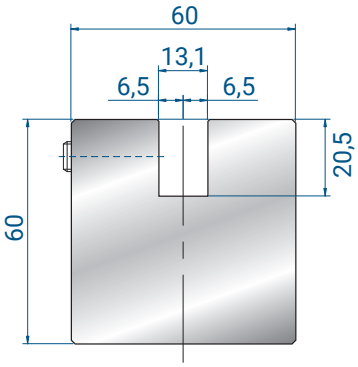

4302

FROM AMADA STYLE TO TRUMPF - WILA - BYSTRONIC STYLE


1000 mm	26,0 kg
500 mm	13,0 kg

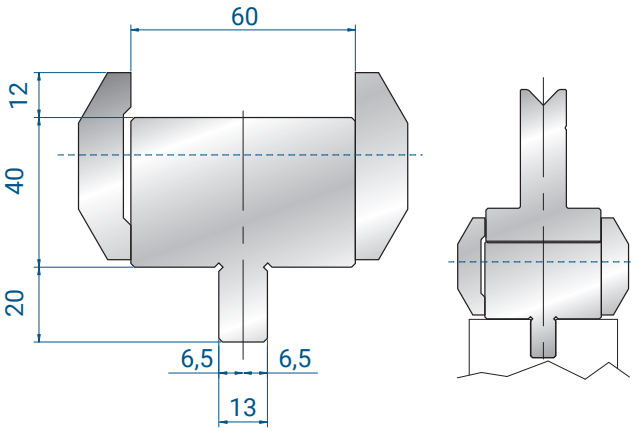

4303

FROM TRUMPF - WILA - BYSTRONIC STYLE TO AMADA STYLE


835 mm	21,3 kg
415 mm	11,2 kg

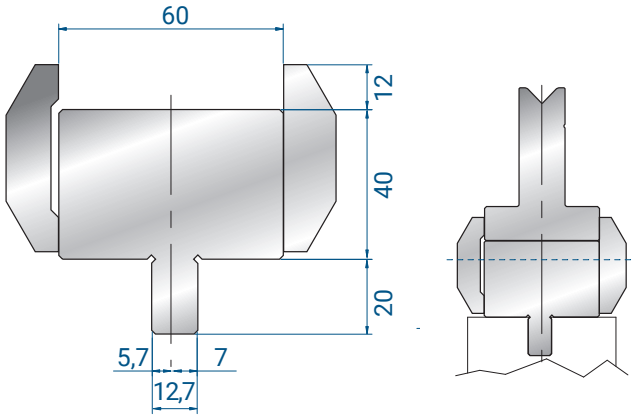

4304

FROM LVD STYLE TO AMADA STYLE

835 mm	21,3 kg
415 mm	11,2 kg

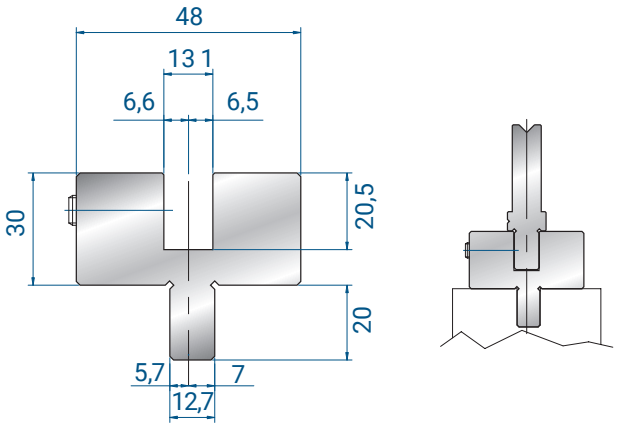

4305

FROM LVD STYLE TO TRUMPF - WILA - BYSTRONIC STYLE

1000 mm	11,0 kg
500 mm	11,0 kg

4033


835 mm	25,5 kg
415 mm	13,3 kg


4034

150 mm	0,7 kg

4016

150 mm	0,6 kg

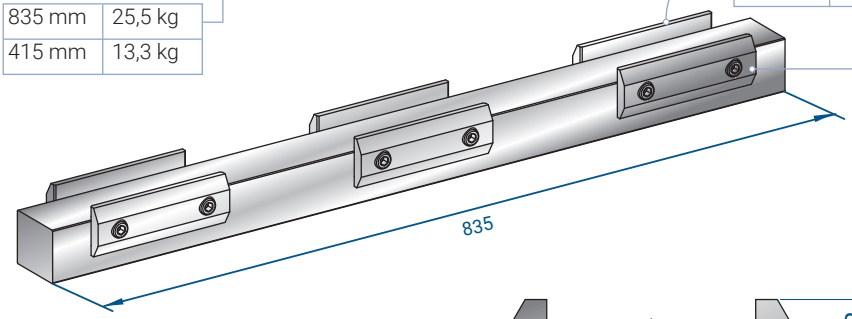

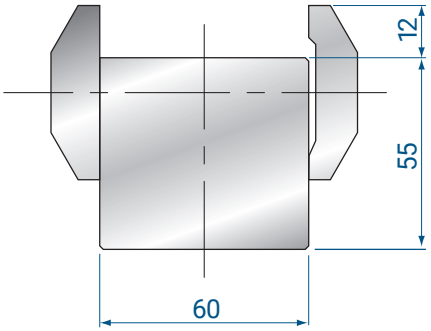

CONTROTAVOLA AMADA STYLE

AMADA STYLE LOWER ADAPTER

4050


835 mm	28,6 kg
415 mm	14,2 kg


4041

800 mm	3,6 kg
380 mm	1,7 kg

4040

800 mm	3,3kg
380 mm	1,6kg

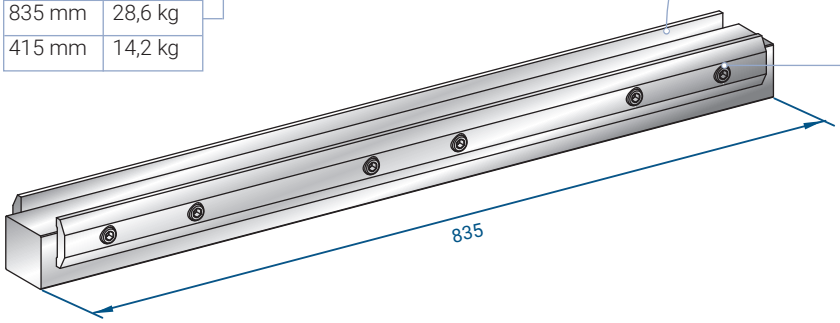


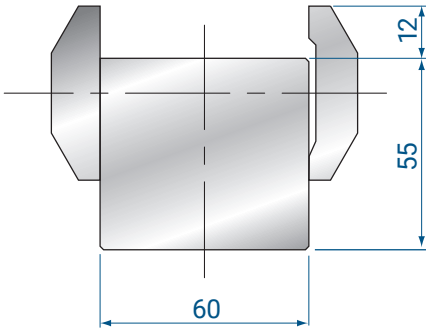

CONTROTAVOLA AMADA STYLE

AMADA STYLE LOWER ADAPTER

ADATTATORE INFERIORE MONOLITICO
SOLID LOWER ADAPTER

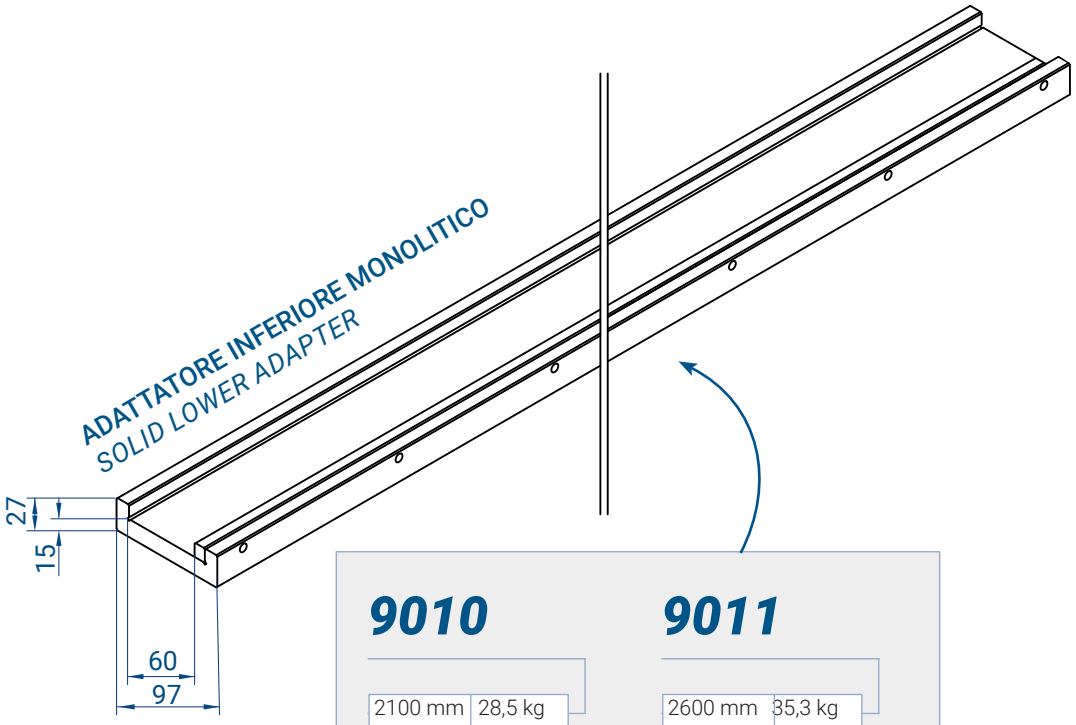

9010

2100 mm	28,5 kg

9011

2600 mm	35,3 kg


9012

3100 mm	42,0 kg

9013


4100 mm	55,6 kg

ADATTATORE INFERIORE MODULARE
MODULAR LOWER ADAPTER

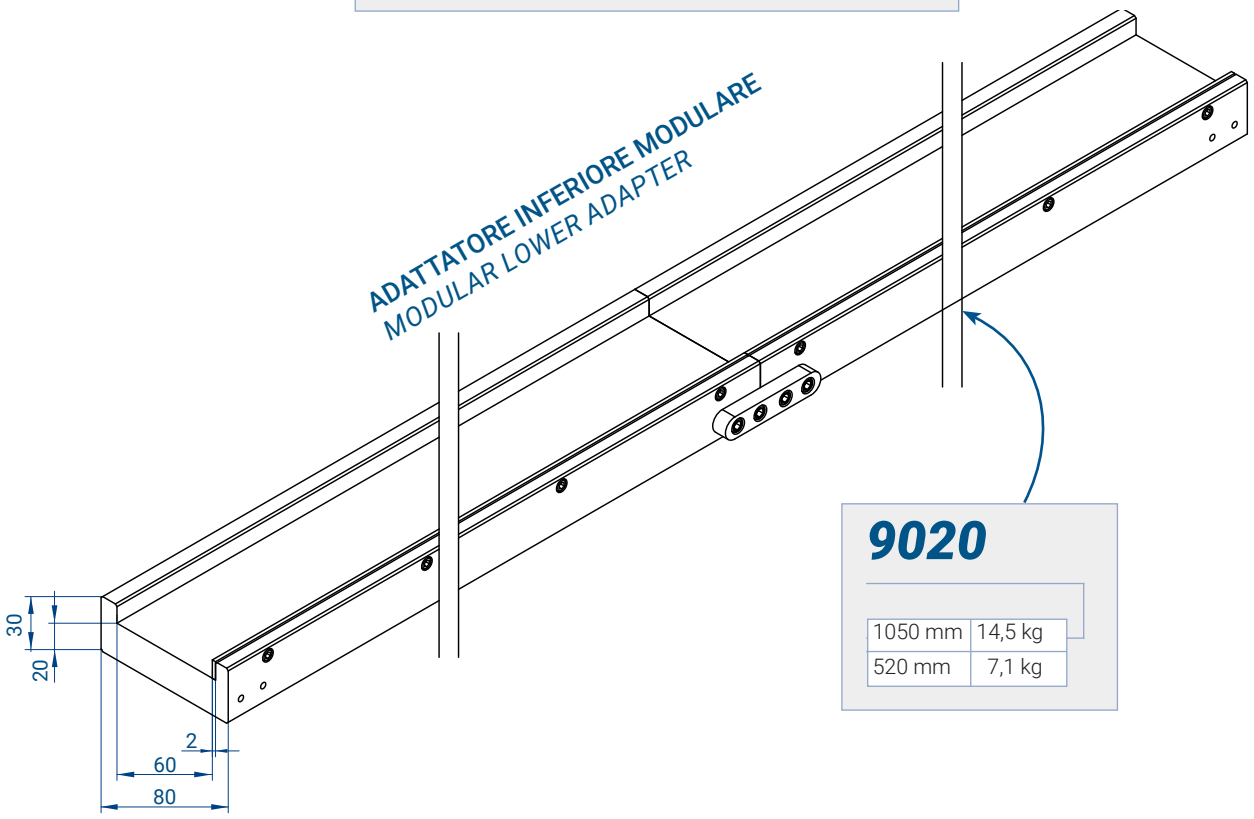

9020


1050 mm	14,5 kg
520 mm	7,1 kg

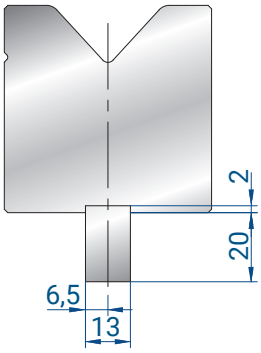

8100

BYSTRONIC / TRUMPF STYLE


832 mm	1,8 kg
412 mm	0,9 kg



8101

LVD STYLE


832 mm	1,8 kg
412 mm	0,9 kg

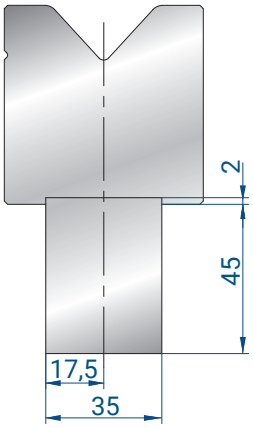

8102

WEINBRENNER STYLE


832 mm	10,5 kg
412 mm	5,2 kg



8107

AMERICAN STYLE


832 mm	1,4 kg
412 mm	0,7 kg



8010

BARRETTA STYLE


835 mm
415 mm
805 mm SEZ ONATO



8011

BMB STYLE


835 mm
415 mm
805 mm SEZIONATO



8012

AMADA / PROMECAM STYLE


STANDARD



8013

GASPARINI STYLE


835 mm
415 mm
805 mm SEZIONATO



8014

TEDA STYLE


835 mm	
415 mm	
805 mm SEZIONATO	



8016

EURO BYSTRONIC STYLE


835 mm	
415 mm	
805 mm SEZIONATO	



8017

BYSTRONIC STYLE


835 mm	
415 mm	
805 mm SEZIONATO	



8106

TRAFILATI 15X15
SQUARE BAR 15X15


835 mm	2,9 kg



8020

ONE TOUCH STYLE


835 mm	
415 mm	
805 mm SEZ ONATO	



8021

SMART CLAMP STYLE

835 mm	
415 mm	
805 mm SEZ ONATO	

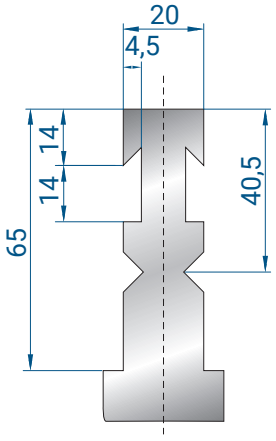



8022

BYSTRONIC RF - A STYLE

INCLUDED ON DEMAND

OGNI MODELLO DI MATRICE RICHIEDE UNO SPECIFICO SUPPORTO
EACH DIE REQUIRES THE PROPER SUPPORT

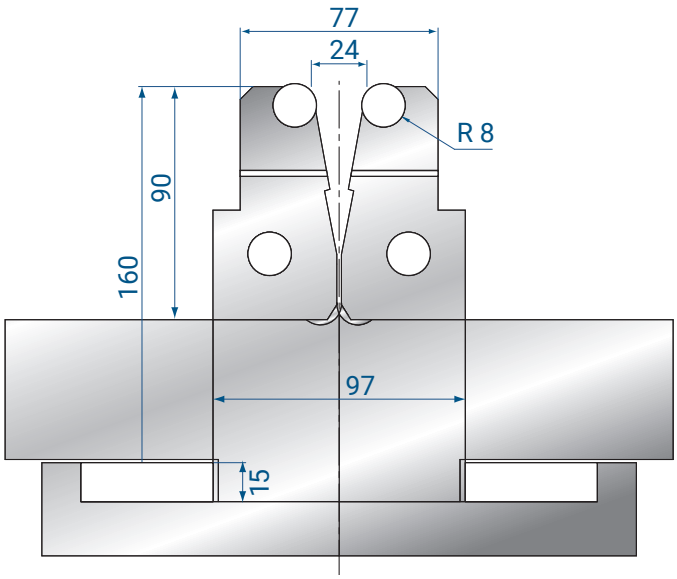

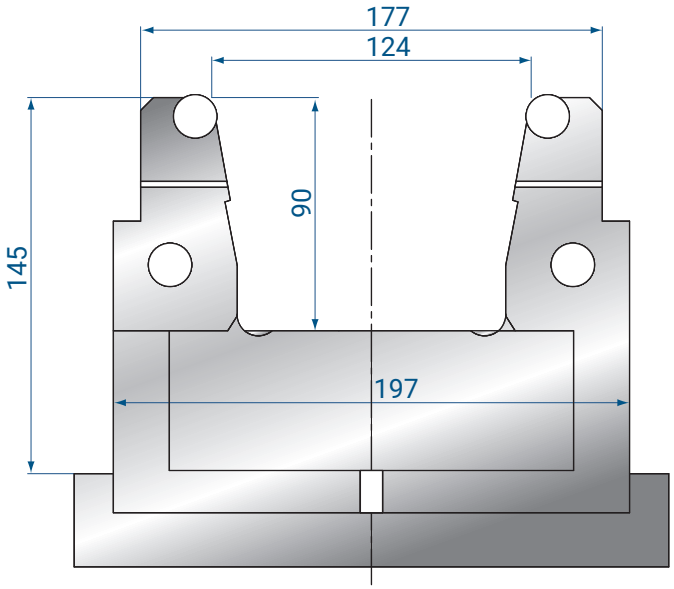





3190

1050 mm	133,0 kg
1000 mm	125,0 kg
550 mm	72,0 kg
500 mm	64,0 kg
250 mm	34,0kg

Angolo minimo di piega / *Minimum bend angle* = 30°
Apertura V / *V width* = min 24mm – max. 124mm
F Max =125 Ton/m at 90°

#9015*; *#9018 (pag 253)

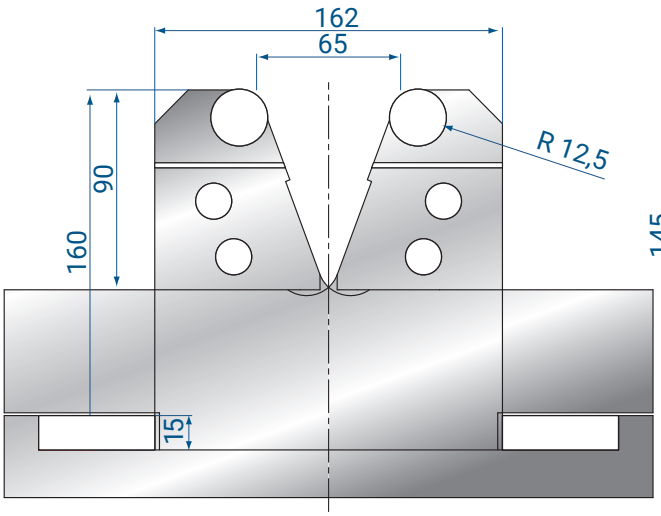

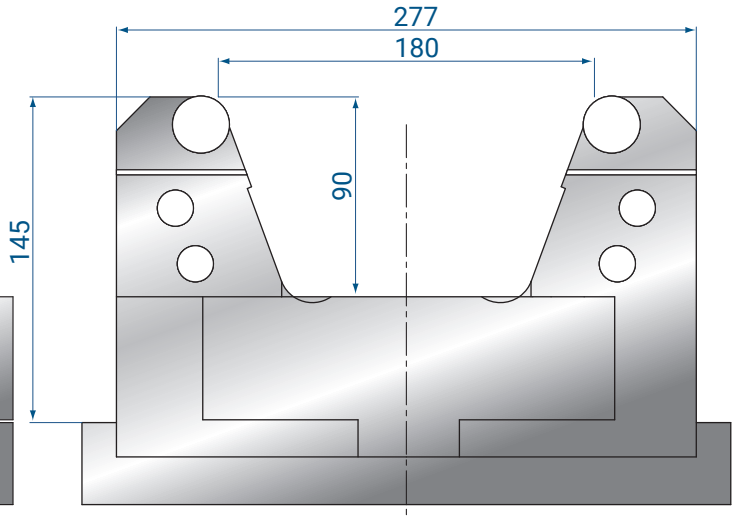





3191

1050 mm	180,0 kg
1000 mm	170,0 kg
550 mm	96,0 kg
500 mm	86,0 kg
250 mm	44,0kg

Angolo minimo di piega / *Minimum bend angle* = 60°
Apertura V / *V width* = min 65mm – max. 180mm
F max = 200 Ton/m at 90°

#9016*; *#9019 (pag 253)

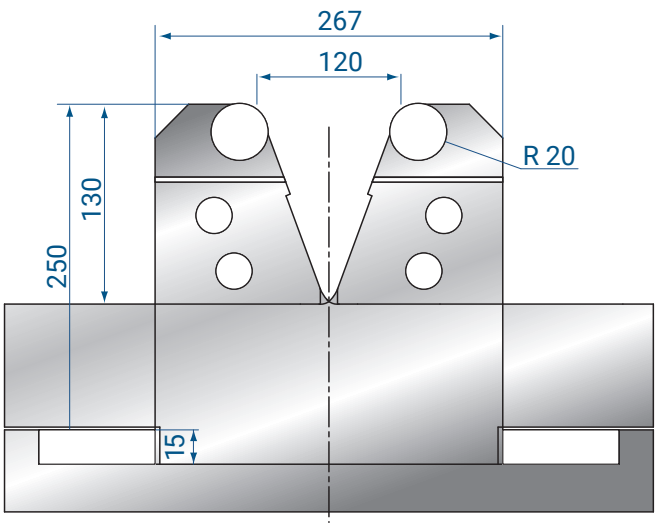

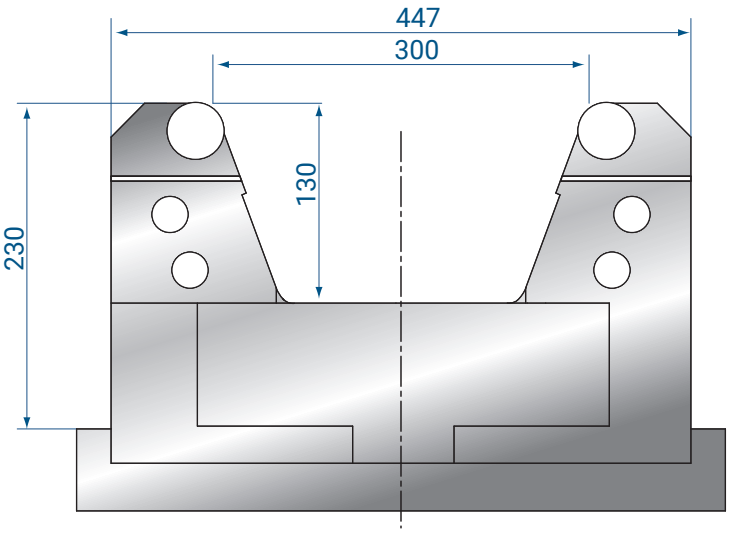





3192

700 mm	420 kg
600 mm	360 kg
500 mm	300 kg

Angolo minimo di piega / *Minimum bend angle* = 60°
Apertura V / *V width* = min. 120mm – max. 300mm
F Max = 400 T/m at 90°

#9014 (pag 253)

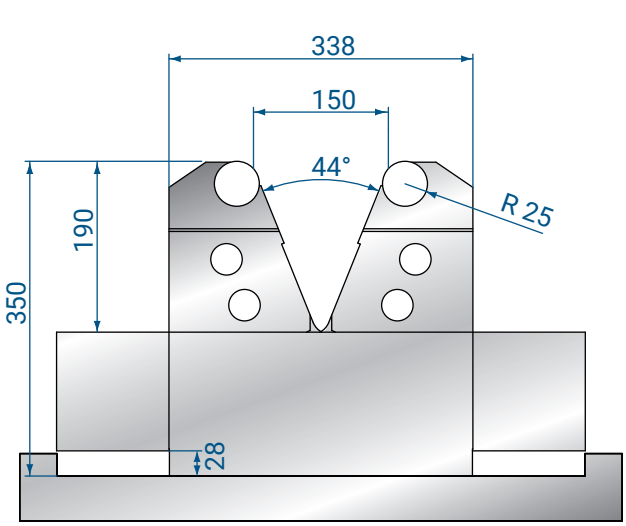

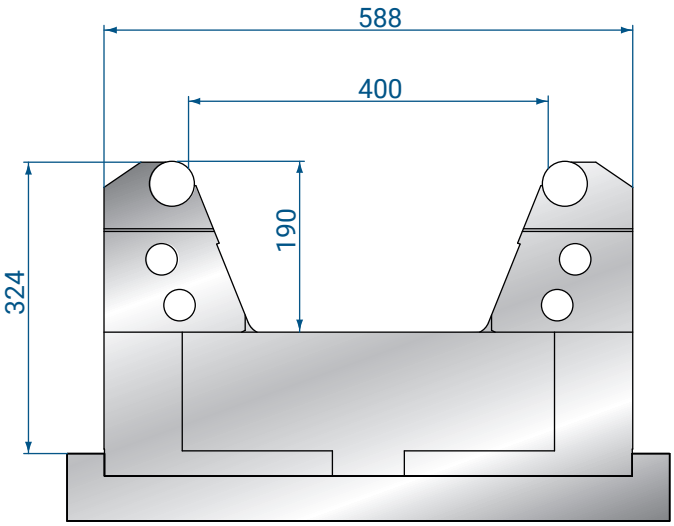



3243

600 mm	560,0 kg

Angolo minimo di piega / *Minimum bend angle* = 60°
Apertura V / *V width* = min 150mm – max. 400mm
F Max = 600 Ton/m at 90°

#9017 (pag 253)

SUPPORTI SPECIFICI PER OGNI MODELLO DI MATRICE REGOLABILE
SPECIFIC HOLDER FOR EACH ADJUSTABLE DIE HOLDER


9015

3000 mm	120 kg
2000 mm	80 kg
100 mm	40 kg
500 mm	20 kg

PER MATRICE / *FOR DIE*
3190

9018

SPECIFICO PER ATTACCO WILA / TRUMPF
WILA / TRUMPF DEDICATED TANG

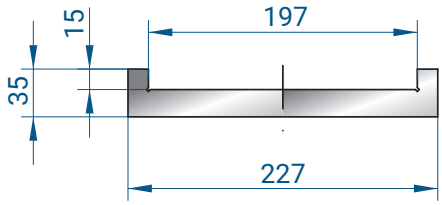


9016

3000 mm	318 kg
2000 mm	212 kg
100 mm	106 kg
500 mm	53 kg

PER MATRICE / *FOR DIE*
3191

9019


SPECIFICO PER ATTACCO WILA / TRUMPF
WILA / TRUMPF DEDICATED TANG

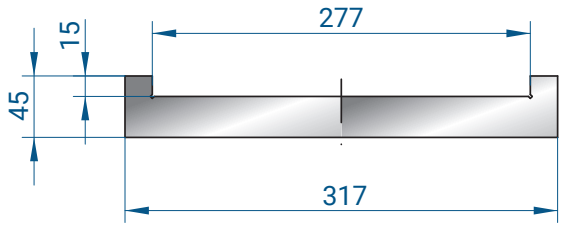

9014

3000 mm	594 kg
2400 mm	396 kg
1200 mm	198 kg
600 mm	99 kg


PER MATRICE
FOR DIE
3192

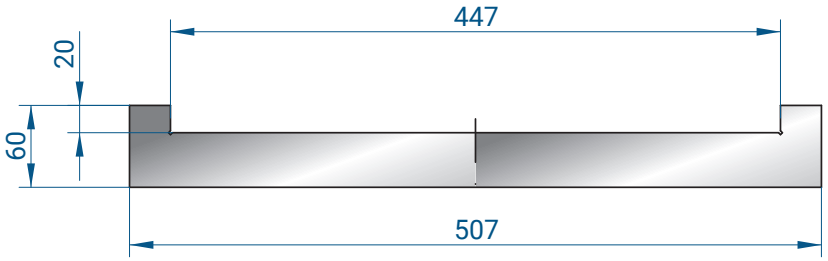

9017

3000 mm	900 kg
2400 mm	600 kg
1200 mm	300 kg
600 mm	150 kg

PER MATRICE
FOR DIE
3242

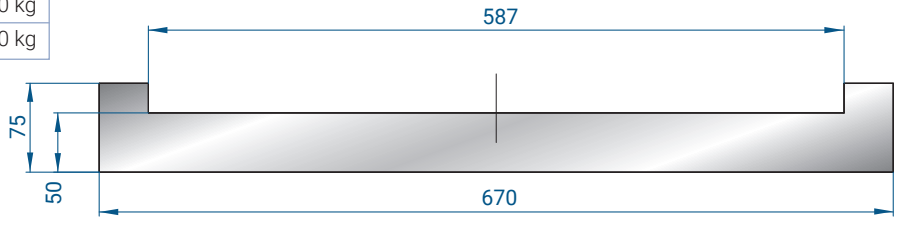



COPPIA DI SUPPORTI PER PELLICOLE / TESSUTI PROTETTIVI
COUPLE OF SUPPORT FOR PROTECTIVE SHEET / FABRIC

4309

2,6 kg



PELLICOLA DI POLIURETANO ANTIGRAFFIO
SCRATCH-RESISTANT POLYURETHANE FILM

4308

Spessore / *thickness* = 0,5 mm
Larghezza / *width* = 105 mm
Lunghezza / *length* = 33 m
Peso / *weight* = 1,7 kg

4314

Spessore / *thickness* = 0,8 mm
Larghezza / *width* = 95 mm
Lunghezza / *length* = 33 m
Peso / *weight* = 2,7 kg



TESSUTO PROTETTIVO PER PREVENIRE E RIDURRE ENTITÀ DI MARCATURE SU LAMIERA
PROTECTIVE FABRIC FOR AVOIDING / LIMITING THE ENTITY OF MARKS OF THE SHEET METAL

4379


L = 5 m / 0,4 kg
L = 10 m / 0,8 kg
Spessore / *thickness* = Max 3 mm




4380

L = 5 m / 0,4 kg
L = 10 m / 0,8 kg
Spessore / *thickness* = Max 6 mm



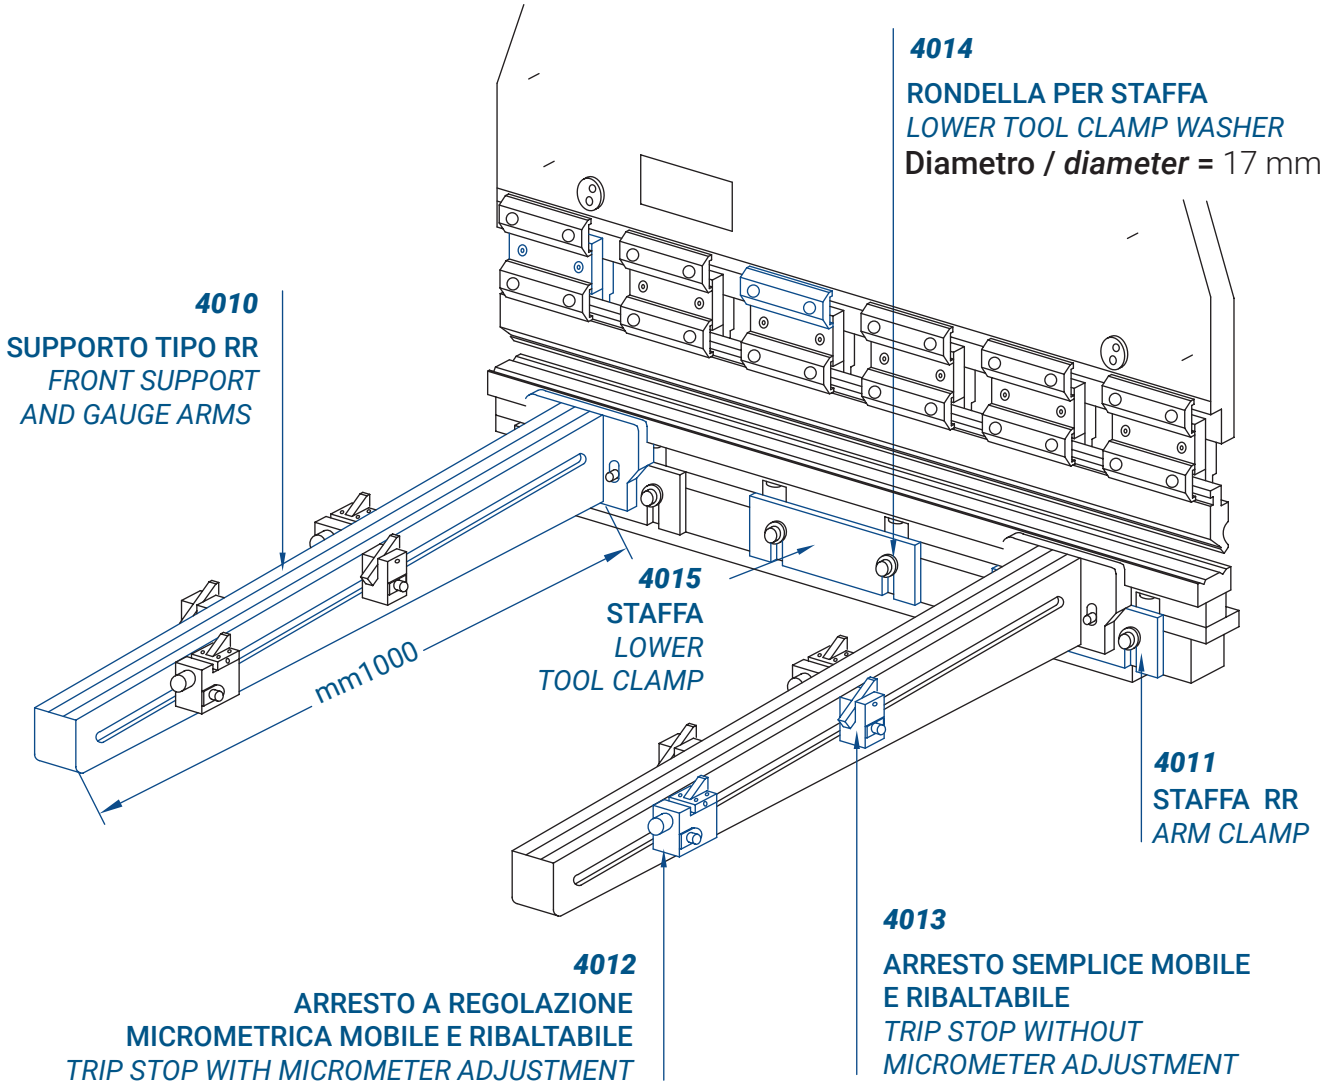


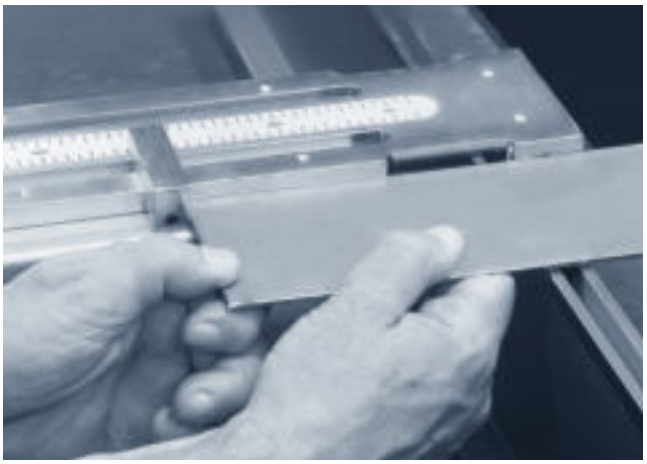

4306

SQUADRE DI RIFERIMENTO
REFERENCE SQUARES

3,0 kg

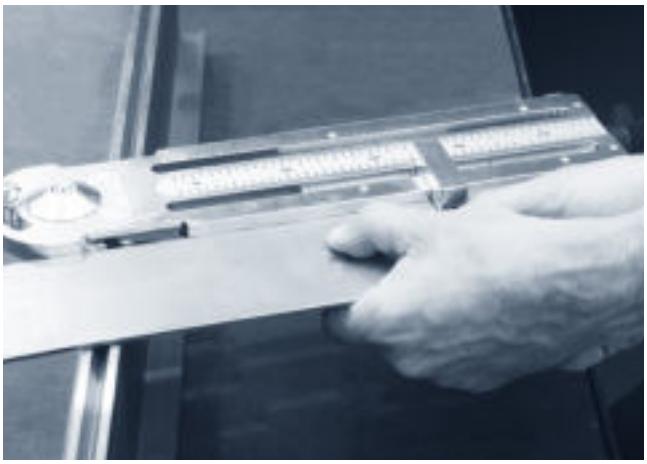

4307

SQUADRE DI RIFERIMENTO ORIENTABILI
ADJUSTSABLE REFERENCE SQUARES

3,5 kg

SQUADRETTE MAGNETICHE / MAGNETIC SQUARING

4318

SQUADRETTA DI RIFERIMENTO MAGNETICA SINISTRA
MAGNETIC SQUARING ARM - LEFT



4319

SQUADRETTA DI RIFERIMENTO MAGNETICA DESTRA
MAGNETIC SQUARING ARM - RIGHT



GONIOMETRO MANUALE / MANUAL PROTRACTOR


GONIOMETRO MANUALE PER LA MISURAZIONE DI ANGOLI INTERNI ED ESTERNI CON LA MINIMA INTERFERENZA

MANUAL PROTRACTOR FOR MEASURING INTERNAL AND EXTERNAL ANGLES WITHOUT INTEREFERENCE

4383


TRIPLA MODALITÀ DI LETTURA
THREE SETS OF READING



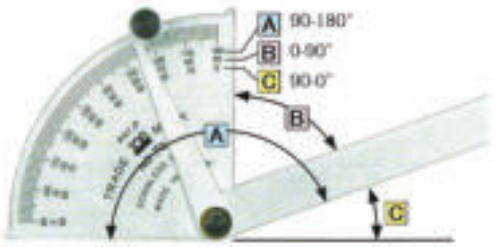


PRECISIONE *ACCURACY*	DIMENSIONI *DIMENSIONS*	UNITÀ *GRADUATION*	MATERIALE *MATERIAL*
+/- 0,2°	L = 255 mm H = 80 mm	1°	ACCIAIO INOX 1,2 mm

MODALITÀ DI UTILIZZO
HOW TO USE

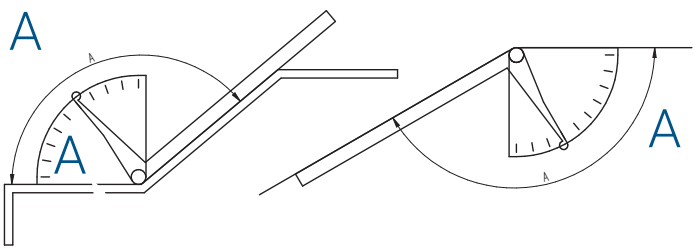

MISURA ANGOLO INTERNO
INTERNAL ANGLE MEASUREMENT

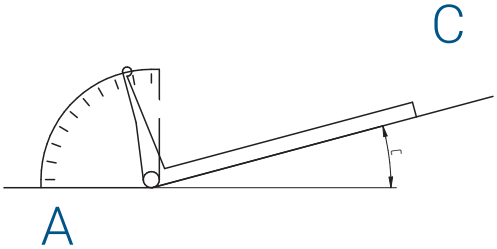

MISURA ANGOLO ESTERNO
OUTSIDE ANGLE MEASUREMENT

CALIBRO DIGITALE PER LA MISURA DI SMUSSI A 45° E DI RAGGI
DIGITAL GAUGE FOR 45° CHAMFERS AND RADIUS

4384



Utilizzabile per misurare le dimensioni di smussi a 45° e di raggi.
Il pulsante C/R commuta fra misura di smusso (c) e di raggio (r).
Possibilità di effettuare misure assolute e relative.
Definizione del punto 0 in qualsiasi posizione.
Pezzo campione ø 20 mm per calibrazione compreso nella confezione.

Measures a small 45°chamfer and radius.
The C/R toggles between chamfer and radius measurement.
Absolute and relative measurement functions are available.
Zero setting at any point.
Setting master pin gauge for calibration included.

MISURAZIONE ***MEASUREMENT***	Smusso a 45° su angolo retto; raggio esterno di piegatura. *45° chamfer on a square corner; outer corner radius.*
GAMMA DI MISURAZIONE ***MEASUREMENT RANGE***	Smusso su angoli 45° (C) 0,01 - 15,00 mm Raggio su angoli 90° (R) 0,01 - 25,00 mm Raggio su angoli acuti ≤ 89° (R) 0,06 - 25,00 mm *Chamfer on angle 45° (C) 0,01 - 15,00 mm* *Radius on angle 90° (R) 0,01 - 25,00 mm* *Radius on acute angles ≤ 89° (R) 0,06 - 25,00 mm*
RISOLUZIONE ***RESOLUTION***	0,01 mm
TOLLERANZA ***ACCURACY***	Smussi = +/- 0,05mm Raggi= +/- 0,08mm *Chamfer = +/- 0,05mm Radius= +/- 0,08mm*
MATERIALE ***MATERIAL***	Acciaio inox *Stainless steel*



COLORE STANDARD NERO, PIÙ OPZIONI COLORI A RICHIESTA
STANDARD COLOUR BLACK, MORE COLOR OPTIONS ON REQUEST




CODICE CODE	STILE STYLE	ANTE DRAWERS	LUNGHEZZA LENGTH (mm)
ACARM0NE0005	Amada	5	835
ACARM1NE0005	Trumpf / Wila / Bystronic / LVD	5	1100
ACARM2NE0005	Trumpf / Wila / Bystronic / LVD	5	550

DISPONIBILI SU RICHIESTA ARMADI A 3 O 4 ANTE
AVAILABLE ON REQUEST WARDROBES WITH 3 OR 4 DOORS




CODICE CODE	STILE STYLE	ANTE DRAWERS	LUNGHEZZA LENGTH (mm)
CARRELLO0005	Carrello mobile per utensili Amada 5 ripiani - L= 835 mm Mobile trolley for Amada tools 5 shelves - L= 835 mm		






MATERIALI
MATERIALS


1.2312
C45
42CrM04




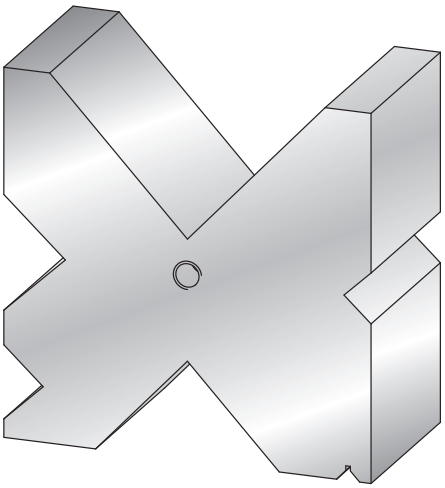

LAVORAZIONI
PROCESSING


Temprato / *Hardened*
Bonificato nitrurato / *Tempered - nitrided*
Piallato / *Planed*
Rettificato / *Ground*

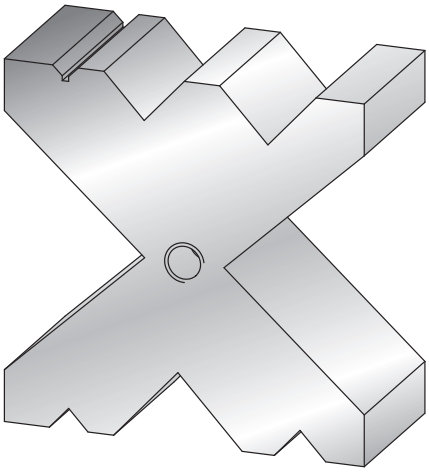

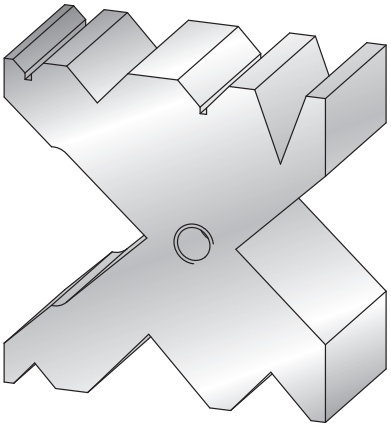

LUNGHEZZE
LENGTHS (MM)


2000
3000
4000
6000
8000

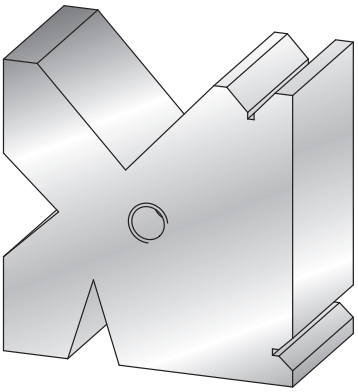



LVD Style


LVD Wila Style

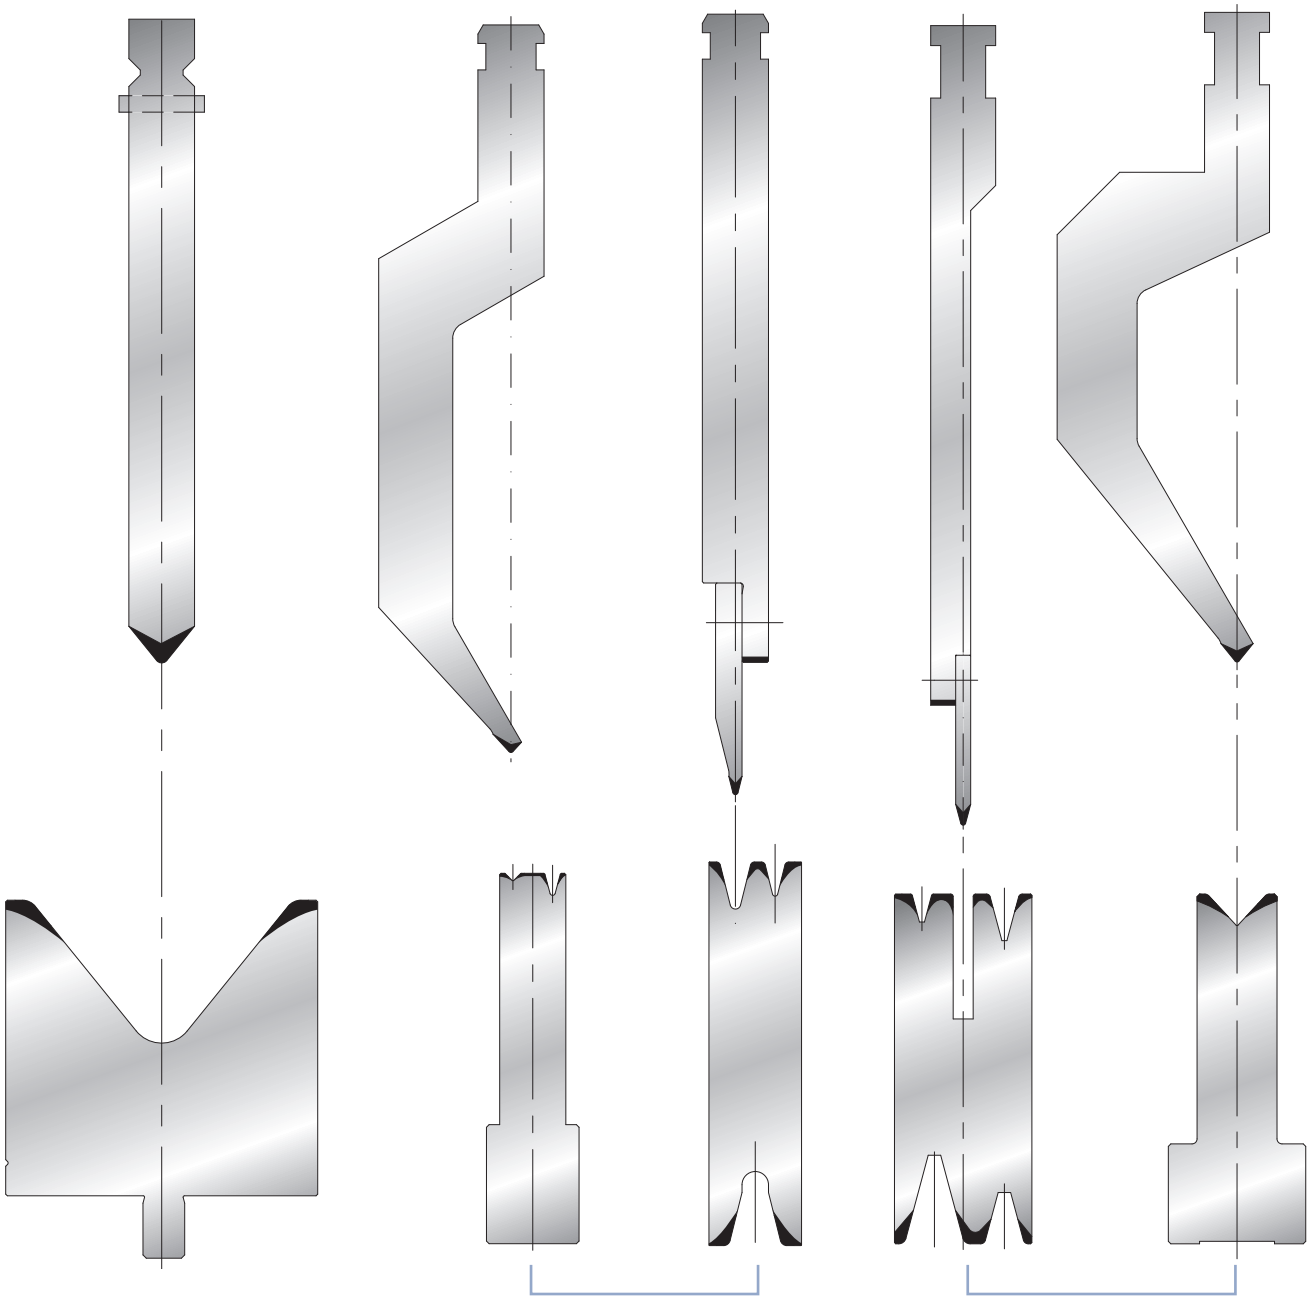


LVD - Wila Style


Weinbrenner Style


EHT Style

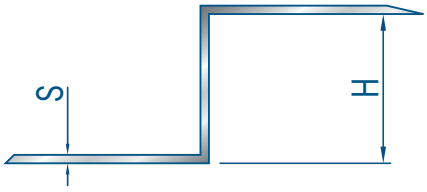

S
H

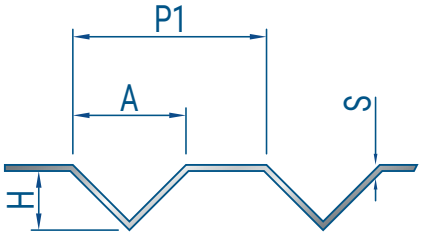

P1
A
S
H




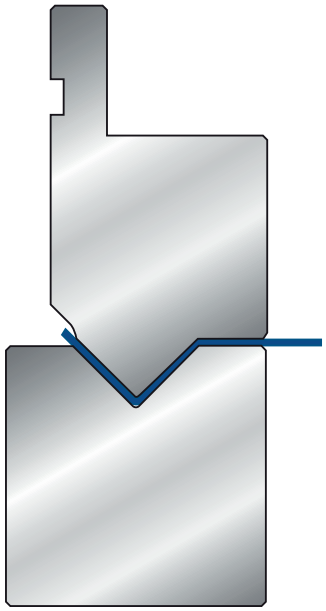


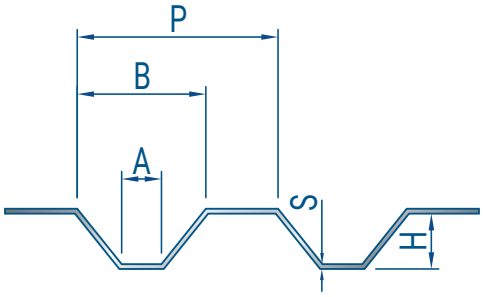
P
B
A
S
H

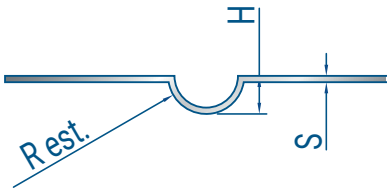
H
R est.
S

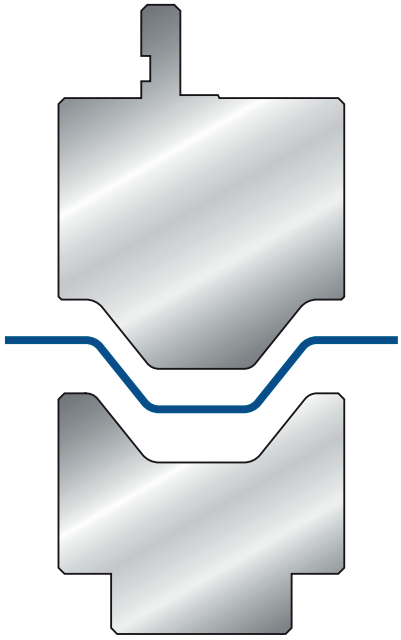

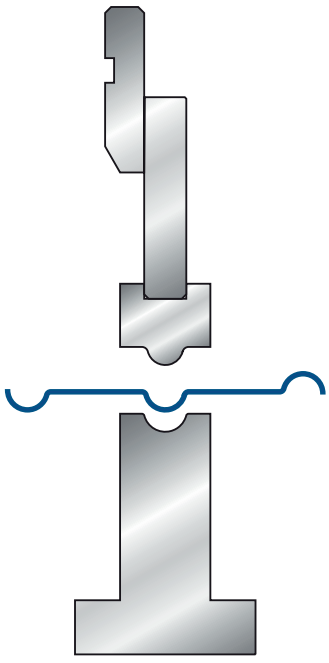

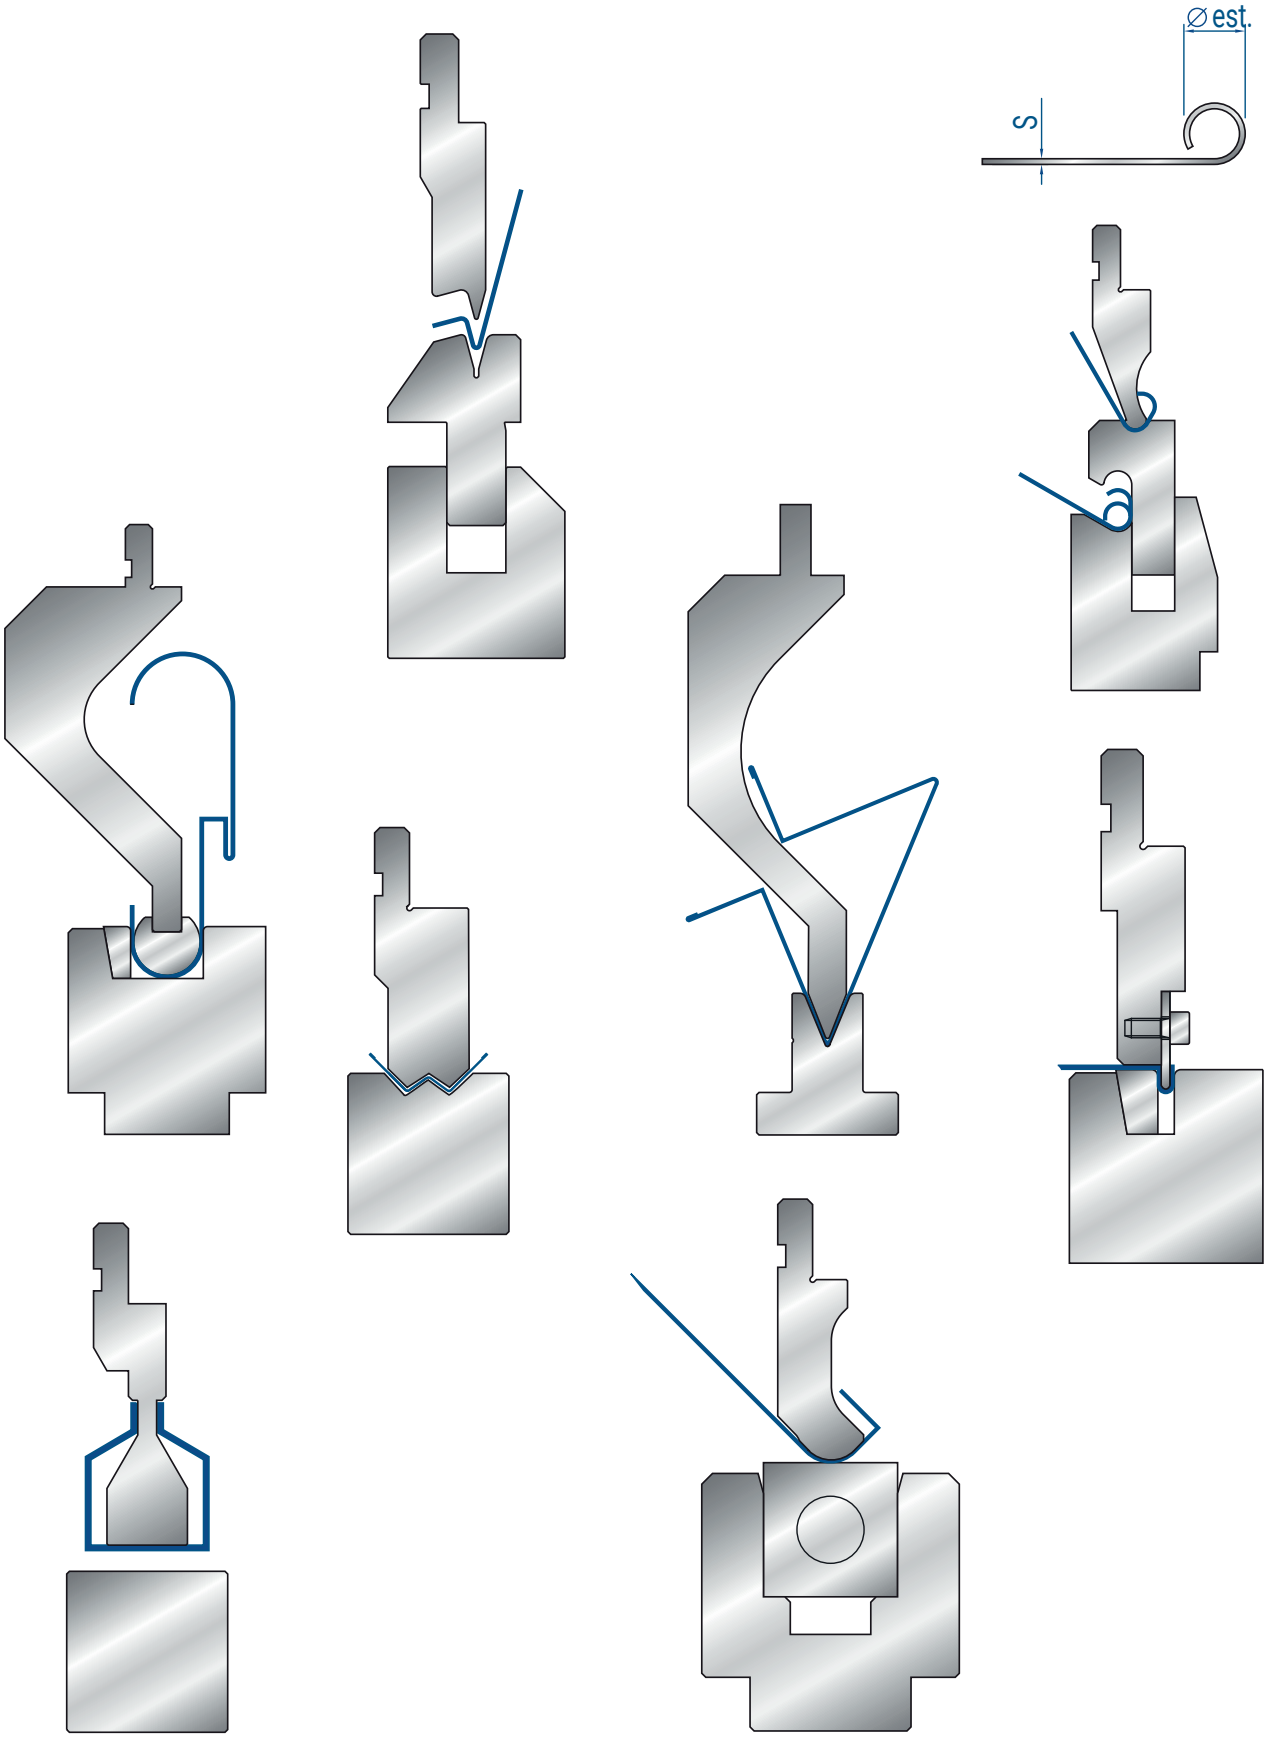
Ø est.
S

MATERIALE TAGLIATO / *CUT MATERIAL:*

☐ **Alluminio** / *Aluminium*

☐ **Ferro** / *Mild steel*

☐ **Acciaio inossidabile** / *Stainless steel*

☐ **Altro materiale** / *Other material:*


.....


MOD.....

PR.....


QUOTA *DIMENSION*	MISURA (mm) *MEASURE (mm)*
A	
B	
C	
D	
E	
F	
H	
I	
K	
L	
N° fori / *N° holes*	

PROFILO / *PROFILE*

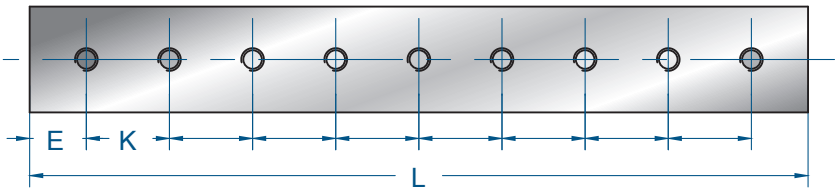





mod. 2000




mod. 2001




mod. 2002



mod. 2003



mod. 2004



mod. 2005



8201

FOSFATAZIONE

Trattamento superficiale che aumenta la resistenza alla corrosione.

PHOSPHATING TREATMENT

Surface treatment able to increase the corrosion resistance.


8205

NITRURAZIONE

Trattamento di indurimento superficiale che aumenta la resistenza all'usura, alla fatica e agli intagli.

NITRIDING TREATMENT

Surface hardening treatment able to increase the tool resistance to wear, to fatigue, to notches.

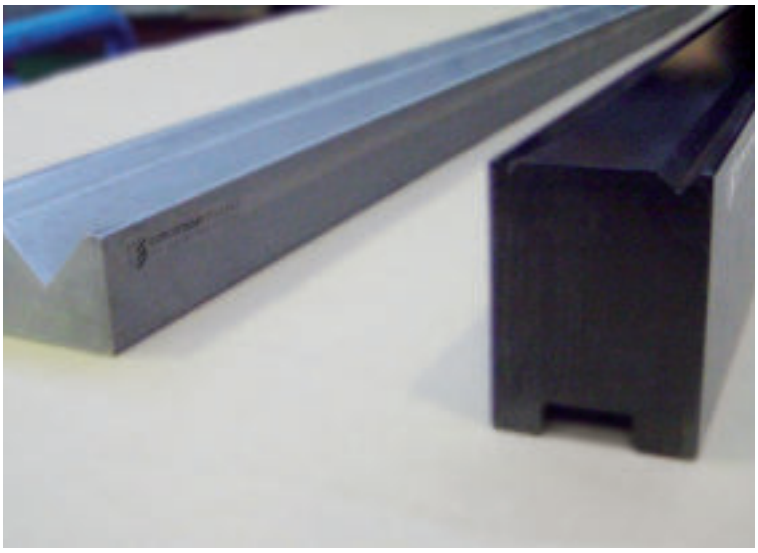

8202

NITRURAZIONE + FOSFATAZIONE

Indurimento superficiale + resistenza alla corrosione.

NITRIDING TREATMENT + PHOSPHATING

Surface hardening + corrosion resistance.





EUROSTAMP TOOLING

the Italian excellence



EUROSTAMP TOOLING
the Italian excellence

Via dell'Industria 11
29010 Gragnano Trebbiense
(PC-ITALY)

Tel. +39 0523 489 954
Tel. +39 0523 499 254
Fax +39 0523 400 490
info@eurostampsrl.it
www.eurostampsrl.it