PLASTMAK MACHINERY · SOLD & SERVICED IN CANADA BY NOVOTECH

PVC & ALUMINIUM WINDOW MACHINERY

PROFILE PROCESSING CENTRES · WELDING & CLEANING LINES · CUTTING SAWS · COPY ROUTERS · ASSEMBLY MACHINES











Turkey
MADE IN TURKEY

36
MACHINE FAMILIES

1-Year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

NovoTech Machine Tools Inc.
1365 Mid-Way Blvd, 26, Mississauga, ON L5T 2J5, Canada
NovoTechMachineTools.com | info@NovoTechMachineTools.com | +1 647 526 5510

PLASTMAK MACHINERY BY NOVOTECH

CONTENTS

PVC WELDING & CORNER CLEANING

4-Corner PVC Welding Machine SÇ 100 Gold Plus 04
4-Corner Welding & Cleaning Line SÇ 100 Gold Plus Full 05
Double-Corner Welding Machine (0.2 mm) SÇ 100 06
Single-Corner Welding Machine (0.2 mm) SÇ 101 07
Semi-Automatic CNC Corner Cleaner (2 Axes) SÇ 6000 08
CNC Corner Cleaning Machine (2 Axes) SÇ 6000S 09
Corner Cleaning Machine (3 Knives) SÇ 601 10

CUTTING SAWS

Glazing Bead Cutting Machine SÇ 301 11
Mouldless Glazing Bead Cutting Machine SÇ 301S 12
Undercut Cutting Machine (Ø450 mm) SÇ 401 13
Automatic Undercut Saw (Ø550 mm) SÇ 402 14
Automatic Undercut Saw (Ø600 / Ø650 mm) SÇ 403 15
Double-Head Cutting Machine (Ø500 mm) SÇ 400S 16
Servo Double-Head Cutting Machine (Ø600 mm) SÇ 4000S 18
Shutter Box & Lamella Cutting Machine SÇ 450 20
Manual Overhead Cutting Machine (Ø400 mm) SÇ 431 21

CNC CENTRES, COPY ROUTERS & MILLING

Profile Processing & Cutting Centre (9 Axes) SÇ 4550 22
PVC 3-Axis CNC Milling Machine SÇ 5000 24
Aluminium & PVC 3-Axis CNC Milling Machine SÇ 5000S 25
End Milling Machine (2 Knives) SÇ 211 26
End Milling Machine, Serial Blade Change SÇ 211S 27
Lock-Place & Drainage Copy Router SÇ 501 28
High-Frequency Lock-Place & Drainage Router SÇ 502S 29
High-Frequency 3-Hole Copy Router SÇ 512 30
Triple Water Drainage Slot Router SÇ 521S 31
High-Frequency Aluminium Copy Router SÇ 542 32

ASSEMBLY, PORTABLE MACHINES & CONVEYORS

Hydraulic Corner Crimping Machine SÇ 902 33
Single Screwing Machine Single Screwing 34
Sash Assembly Machine Sash Assembly 35
Double-Head Screwing Machine Double-Head Screwing 36
Portable Machines & Accessories Portable Machines 37
Digital Measuring Conveyor SÇ 1000 39

PRODUCTION GROUPS

PVC Single-Head Production Group PVC Single-Head Group 40
PVC Double-Head Production Group PVC Double-Head Group 41
Aluminium Double-Head Production Group Aluminium Group 42
Workshop Setup Plan Workshop Setup Plan 43

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR PLASTMAK MACHINERY

Sales, installation, parts and technical support across Canada

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario. Every machine in this catalogue is built by Plastmak and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

PLASTMAK · BURSA, TURKEY

ABOUT THE MANUFACTURER

Plastmak's roots go back to 1968, when the late Rahmi Çinli founded Anadolu Makina. Since Suat Çinli took over the management in 2003, the company has focused on PVC and aluminium window and door processing machinery, and in 2007 Plastmak and its registered brand Ersadmak were established. Around 80% of production is exported worldwide. Plastmak operates from 5,000 m^2 of manufacturing space with a team of around 50 experienced employees, including mechanical and electrical engineers and a dedicated export department, investing continuously in training and R&D to deliver reliable, precise and fairly priced machines with fast, friendly service.



Plastmak production facility, Bursa

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment.

SÇ 100 GOLD PLUS · WELDS ALL FOUR CORNERS OF A PVC FRAME AT ONCE


4-CORNER PVC WELDING MACHINE



MODEL **SÇ 100 Gold Plus** 4-corner PVC welding machine



Barcode scanner and touch screen



Linear-rail top presses and sliding system



Automatic carriers



Frame size min. 410 × 495 mm / 520 × 520 mm, max. 3700 × 2700 mm / 3650 × 2650 mm

Designed for joining PVC profiles by welding all four corners of the frame at the same time.

FEATURES

- Welds the four corners of PVC profiles at a 90° angle at the same time
- 0.2 mm welding possibility for all profile types
- Fast mould changing system that prevents loss of time
- High speed and precise welding thanks to axes controlled by servo motors and planetary gearboxes
- Heating temperature and time parameters are adjusted independently of each other with the PID system
- Single-corner welding feature
- U (door without threshold) welding system
- 19" Windows-based system screen
- Welding, cooling times and temperature settings digitally adjusted according to profile type
- Teflon surface can be changed quickly thanks to roll-type Teflon

TECHNICAL SPECIFICATIONS

Model		SÇ 100 Gold Plus
Welding profile height (min. – max.)	in	1.6 – 7.9
Welding profile width (max.)	in	5.9
Min. weldable frame (W × L)	in	16.1 × 19.5 20.5 × 20.5
Max. weldable frame (W × L)	in	145.7 × 106.3 143.7 × 104.3
Working angle	°	90°
Motor speed	rpm	2810
Total power	HP	34
Air pressure	psi	90 – 120
Air consumption		6.4 CFM
Weight	lb	4,189
Overall dimensions (L × W × H)	in	208 × 184 × 66

PRECISE MOTION WITH SERVO MOTORS AND PLANETARY GEARBOXES

Extremely precise and error-free operation, with the axes controlled by high-speed, sensitive servo motors and matched planetary gearboxes.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SÇ 100 GOLD PLUS FULL · 4-CORNER WELDING, ROBOTIC TRANSFER AND CNC CORNER CLEANING

4-CORNER WELDING & CLEANING LINE



MODEL **SÇ 100 Gold Plus Full** PVC 4-corner welding and cleaning line




Easy mould change



Precision measuring system



High-performance robotic arm



Superior cleaning quality thanks to different blades

Designed for welding frames made of PVC profiles and cleaning the burrs formed after welding, in one continuous line.

FEATURES

- Welding machine that welds all four corners of PVC profiles at the same time
- High-precision carrier robot arm
- CNC corner cleaning machine with automatic identification, without operator intervention
- Automatic profile sliding system with a high-speed, rugged 2-axis carrier arm
- Easy profile identification with barcode reader and user-friendly screen design
- Allows 1 station with 4 frames simultaneously on the line
- Automatic colour / white separation operating system

TECHNICAL SPECIFICATIONS

Model		SÇ 100 Gold Plus Full
Welding profile height (min. – max.)	in	1.6 – 7.9
Welding profile width (max.)	in	5.9
Total power	HP	46
Air pressure	psi	90 – 120
Air consumption		12.4 CFM
Weight	lb	8,267
Line footprint (L × W)	in	531 × 217

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.


SÇ 100 · TWO-HEAD WELDING WITH 0.2 MM WELD SEAM OPTION


DOUBLE-CORNER WELDING MACHINE (0.2 MM)



MODEL **SÇ 100** PVC double-corner welding machine


Easy operation panel


Minimum 340 mm, maximum 3200 mm


Top-down centring


Linear guide system

FEATURES

- Conforms to CE standards
- The simplified machine management panel saves time
- Provides maximum weld strength
- Ability to weld a single corner
- Welds both normal and 0.2 mm seams on veneered (laminated) profiles
- The movable right head is positioned and locked with a button
- Maximum length of the welded profile: 3200 mm; minimum length: 340 mm
- Welded profile height: maximum 160 mm, minimum 40 mm
- Time saving thanks to the easy mould changing system
- PLC control system
- Temperature, welding time and pressure can be adjusted for different profile types
- Heating unit with thermostatic control
- Heating plate temperature can be easily changed from the digital display
- The power supply protects the system against sudden voltage changes

TECHNICAL SPECIFICATIONS

Model		SÇ 100
Welded profile length (min. – max.)	FT	1.1 FT – 10.5 FT
Welded profile length (min. – max.)	in	13.4 – 126
Welding profile height (min. – max.)	in	1.6 – 6.3
Welding profile width (max.)	in	6.5
Welding angle	°	90°
Total power	HP	12
Air pressure	psi	90 – 120
Air consumption		2.5 CFM
Weight	lb	1,069
Overall dimensions (L × W × H)	in	152 × 55 × 62

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SÇ 101 · PVC SINGLE-HEAD WELDING, 25°–180°

SINGLE-CORNER WELDING MACHINE (0.2 MM)



Blades and adjustable moulds



MODEL **SÇ 101** Single-corner welding machine

FEATURES

- Conforms to CE standards
- Weldable angle: all angles from 25° to 180°
- Welded profile height: maximum 160 mm, minimum 40 mm
- Upper pistons with individual clamping
- Left movable table system
- Practical profile clamping with foot pedal
- PLC control system
- Heating unit with thermostatic control
- Heating plate temperature can be easily changed from the digital display
- Temperature, welding time and pressure can be set for different profile types
- Time saving thanks to the easy mould changing system

TECHNICAL SPECIFICATIONS

Model		SÇ 101
Welding angle	°	25°–180°
Welding profile height (min. – max.)	in	1.6 – 6.3
Welding profile width (max.)	in	7.9
Total power	HP	5.4
Air pressure	psi	90 – 120
Air consumption		2.5 CFM
Weight	lb	298
Overall dimensions (W × D × H)	in	24 × 25 × 55

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SÇ 6000 · PVC, PLC-CONTROLLED, 2 SERVO AXES, JOYSTICK PROGRAMMING

SEMI-AUTOMATIC CNC CORNER CLEANER (2 AXES)



Easy programming with the joystick



MODEL **SÇ 6000**


Semi-automatic CNC corner cleaning machine with profile carry tables; foot pedal for easy centring



Diamond-tipped circular saw



Bearing-guided scraping system



Sensor profile stop



Profile carry tables

A semi-automatic CNC machine designed to clean the weld burrs formed after welding PVC window, sash, door frame and other profiles at a 90° angle.

FEATURES

- Conforms to CE standards
- Cleans the bottom, top and outer surfaces of the profile independently
- Touch-screen panel
- Easy program memory
- User-adjustable processing speeds
- Easy writing of the cleaning program for each profile thanks to the special programming function
- NC control system with PLC unit
- User-friendly Y / Z axis programming and fine adjustment with the joystick
- Average processing time per corner: 5–8 seconds
- Cleans 400–500 frames in an average 8-hour shift
- Unlimited program memory
- Daily and monthly production report dashboard
- 2 servo motors and 1 high-frequency motor
- Ø250 mm diamond-toothed saw
- Makes angles and radii on all PVC profiles, with circular interpolation
- Front brush stand system prevents the profiles from being scratched and provides comfort during movement
- Easy centring with foot pedal

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

TECHNICAL SPECIFICATIONS


Model		SÇ 6000
Frame size A × B (min.)	in	13.8 × 13.8
Profile width a (max.)	in	5.9
Profile height h (max.)	in	7.9
Saw blade diameter (max.)		Ø9-⅞"
Saw blade bore		Ø1-¼"
Saw blade thickness	in	0.079
Spindle speed	rpm	18000
Spindle frequency	Hz	300
Spindle motor	HP	1.9
Total power	HP	4
Air pressure	psi	90 – 120
Air consumption		1.4 CFM
Weight	lb	882
Machine body dimensions (W × D × H)	in	41 × 55 × 62


SÇ 6000S · PVC CNC PRO CLEANER, 10 TOOLS, AUTOMATIC PROFILE RECOGNITION


CNC CORNER CLEANING MACHINE (2 AXES)



MODEL **SÇ 6000S** CNC corner cleaning machine with brush tables and 19" control screen


Ø250 mm diamond-tipped circular saw


Separate tool groups


Automatic profile recognition


19" Windows-based screen

Automatically cleans, at high speed and with high precision, the burrs formed on the inner and outer corners and on the lower and upper surfaces by the melting in the corner welding process of PVC profile frames.

FEATURES

- CNC control system (2 axes)
- Frame processing capacity of 160–200 frames in an 8-hour shift
- 10 cleaning tools in total
- Cleaning of upper and lower surfaces for white and coloured profiles
- Cleaning of upper and lower surfaces for laminated (coated) profiles
- Cleaning of the inner and outer seal grooves
- Cleaning of angled and radiused surfaces
- Unlimited memory capacity
- 19" LCD control screen for easy operation
- Long life thanks to the automatic (timer-controlled) lubrication system
- Linear slide system
- Very simple to use and program thanks to its own software
- DXF import and drawing with CAM Codex
- Brush table system to rotate the profiles easily
- Easy profile programming
- Working speeds adjustable as required
- Automatic profile recognition system


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

TECHNICAL SPECIFICATIONS

Model		SÇ 6000S
Frame size A × B (min.)	in	13.8 × 13.8
Profile width a (max.)	in	4.7
Profile height h (max.)	in	5.9
Saw blade diameter (max.)		Ø9-⅞"
Saw blade bore		Ø1-¼"
Saw blade thickness	in	0.079
Spindle speed	rpm	18000
Spindle frequency	Hz	300
Spindle motor	HP	2
Total power	HP	8
Air pressure	psi	90 – 120
Air consumption		4.2 CFM
Weight	lb	1,653
Machine body dimensions (W × D × H)	in	49 × 73 × 83

SÇ 601 · PVC, PLC-CONTROLLED AUTOMATIC CLEANING WITH 3 KNIVES

CORNER CLEANING MACHINE (3 KNIVES)

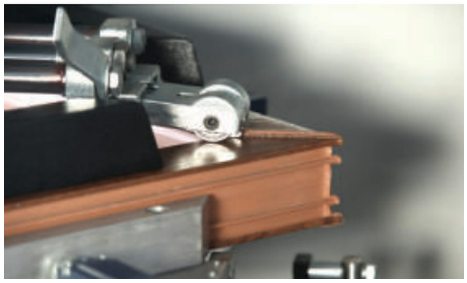

Bearing-guided scraping system



MODEL **SÇ 601** PVC corner cleaning machine with side tables

FEATURES

- Conforms to CE standards
- Cleans the corners of PVC profiles after welding
- Cleans the corners and the upper and lower surfaces
- Surface and corner cleaning can be separated for acrylic profiles
- Fully automatic operation with PLC
- 3 different knives can be fitted
- Automatic frame / sash profile separation feature
- Automatic squaring of the profile against the stop and automatic centring of the profile

TECHNICAL SPECIFICATIONS

Model		SÇ 601
Profile width a (max.)	in	4.9
Profile height h (min. – max.)	in	1.6 – 3.5
Cutter diameter b (max.)		Ø8-¼"
Cutter bore a (max.)		Ø1-¼"
Cutter speed	rpm	2810
Motor power	HP	1.5
Total power	HP	2
Air pressure	psi	90 – 120
Air consumption		0.35 CFM
Weight	lb	397
Machine body dimensions (W × D × H)	in	30 × 39 × 59

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SÇ 301 · AUTOMATIC 45° PVC BEAD CUTTING, TWIN Ø200 MM SAWS

GLAZING BEAD CUTTING MACHINE



Easy adjustable universal mould



MODEL **SÇ 301** Glazing bead cutting machine with measuring conveyor

FEATURES

- Conforms to CE standards
- 45° cutting of PVC glazing bead profiles
- Automatic working system
- Measuring conveyor system for long frames (2500 mm, sheet steel)
- Adjustable cutting speed
- Pneumatic profile clamping system
- Saw diameter: Ø200 mm

OPTIONS

- Left conveyor attachment
- Nail saw


TECHNICAL SPECIFICATIONS

Model		SÇ 301
Cutting angle	°	45°
Bead length (min. – max.)	FT	1 FT – 8.4 FT
Bead length (min. – max.)	in	11.8 – 100.4
Bead height (max.)	in	1.1
Saw blade diameter		1/16" × Ø7-7/8"
Saw blade bore		Ø1-1/4"
Saw motors	HP	2.7 × 1
Motor speed	rpm	2810
Total power	HP	2
Air pressure	psi	90 – 120
Air consumption		0.35 CFM
Weight	lb	209
Overall dimensions (W × D × H)	in	18 × 46 × 44


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SÇ 301S · PVC & ALUMINIUM BEADS, 12 BEAD PROFILES WITHOUT MOULDS

MOULDLESS GLAZING BEAD CUTTING MACHINE

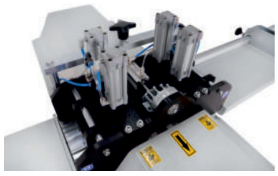

Wheel system for 12 different beads

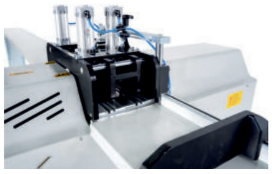

Cuts 2 beads at the same time



MODEL **SÇ 301S** Mouldless glazing bead cutting machine with conveyors

FEATURES

- Conforms to CE standards
- 45° cutting of glazing bead profiles
- Cuts 12 different bead profiles
- Adjustable cutting speed
- Ability to cut 2 beads at the same time
- Right / left conveyor system for long beads (2 × 2.5 m)
- Bead claw (nail) adjustment mechanism
- Pneumatic clamping system

OPTIONS

- Diamond-tipped saw for cutting aluminium beads (with cooling system)
- Nail saw


TECHNICAL SPECIFICATIONS

Model		SÇ 301S
Cutting angle	°	45°
Bead length (min. – max.)	FT	1 FT – 8.4 FT
Bead length (min. – max.)	in	11.8 – 100.4
Bead height (max.)	in	1.1
Main saw blades		1/16" × Ø7-7/8"
Nail saw blades		1/16" × Ø3-7/8"
Saw blade bore		Ø1-1/4"
Saw motors	HP	2.7 × 1.5
Motor speed	rpm	2810
Total power	HP	3
Air pressure	psi	90 – 120
Air consumption		0.35 CFM
Weight	lb	320
Overall dimensions (W × D × H)	in	20 × 55 × 46

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SÇ 401 · PVC & ALUMINIUM RISING-BLADE SAW, 0°–180°

UNDERCUT CUTTING MACHINE (Ø450 MM)

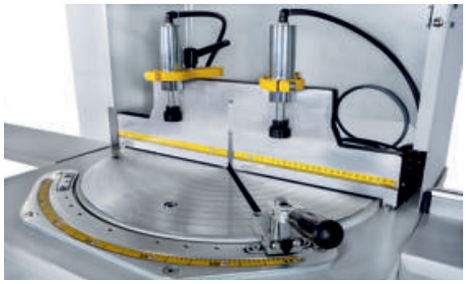

Precision cutting between 0° and 90°



MODEL **SÇ 401** Undercut cutting machine with measuring conveyors

FEATURES

- Conforms to CE standards
- Precise cuts at 0°–180° and intermediate angles
- Quick adjustment stops for 15°, 22.5°, 30°, 45°, 60° and 90°
- Table locking arm for intermediate angles
- Saw feed speed slows down when cutting aluminium, reducing motor load
- Protective cover for safe cutting
- Diamond saw blade diameter: 450 mm
- Blade rise (output distance): 13.5 cm
- Measuring and transport conveyors as standard (2.5 m, right and left)

OPTIONS

- Cooling device for aluminium profile cutting
- Hydro-check system for aluminium profile cutting
- Roller conveyor

CUTTING CAPACITY (Ø450 MM BLADE)

Cutting angle	Max. height	Max. width
90°	5-3/8″	8-1/2″
45°	5-3/8″	6-1/8″


TECHNICAL SPECIFICATIONS

Model		SÇ 401
Cutting angle range	°	0°–180°
Saw blade diameter		Ø17-3/4″
Saw blade bore		Ø1-1/4″
Blade rise (output distance)	in	5.3
Motor speed	rpm	2810
Motor power	HP	1.5
Air pressure	psi	90 – 120
Air consumption		1.4 CFM
Weight	lb	276
Overall dimensions (W × D × H)	in	26 × 31 × 51

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SÇ 402 · ALUMINIUM & PVC, HYDRO-PNEUMATIC, -60° TO +60°

AUTOMATIC UNDERCUT SAW (Ø550 MM)

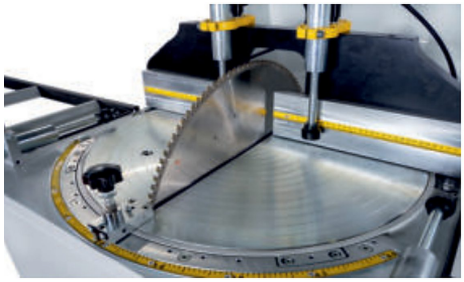

Cutting range between –60° and +60°



MODEL **SÇ 402** Fully automatic undercut cutting machine with roller conveyors

FEATURES

- Conforms to CE standards
- Used for cutting aluminium and PVC profiles
- Hydro-pneumatic cutting process
- Cutting speed adjustable according to the profile
- Cuts at fixed angles right and left: –60°, –45°, –30°, –22.5°, –15°, 0°, +15°, +22.5°, +30°, +45°, +60°
- Pneumatic vertical and horizontal clamps
- Ø550 mm diamond-tipped aluminium saw blade
- Roller conveyors (right and left, 3 m)
- Oil spray system
- 2.2 kW motor and hydro-checks providing precision cutting

CUTTING CAPACITY (Ø550 MM BLADE)

Cutting angle	Max. height	Max. width
90°	7-1⁄8″	10-1⁄2″
45°	7-1⁄8″	7-1⁄2″
60°	7-1⁄8″	5-1⁄2″


TECHNICAL SPECIFICATIONS

Model		SÇ 402
Cutting angle range	°	-60° / +60°
Saw blade diameter		Ø21-3⁄4″
Saw blade bore		Ø1-1⁄4″
Motor speed	rpm	2810
Saw motor power	HP	3
Total power	HP	4
Air pressure	psi	90 – 120
Air consumption		1.4 CFM
Weight	lb	441
Overall dimensions (W × D × H)	in	32 × 35 × 52

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SÇ 403 · ALUMINIUM & PVC, HYDRO-PNEUMATIC, FRONT-REAR MOVING GUARD

AUTOMATIC UNDERCUT SAW (Ø600 / Ø650 MM)

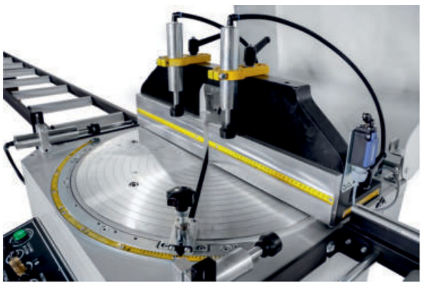

Front-rear moving guard



MODEL **SÇ 403** Fully automatic undercut cutting machine with roller conveyors

FEATURES

- Conforms to CE standards
- Used for cutting aluminium and PVC profiles
- Hydro-pneumatic cutting process
- Cutting speed adjustable according to the profile
- Cuts at fixed angles right and left: –60°, –45°, –30°, –22.5°, –15°, 0°, +15°, +22.5°, +30°, +45°, +60°
- Pneumatic vertical and horizontal clamps
- Ø600 or Ø650 mm diamond-tipped aluminium saw blade
- Roller conveyors (right and left, 3 m)
- Oil spray system
- 3 kW motor and hydro-checks providing precision cutting

OPTION

- Ø650 mm miter saw blade

CUTTING CAPACITY

Cutting angle	Max. height	Max. width
	Ø600 MM BLADE	
90°	8-1/4"	11-1/4"
45°	8-1/4"	8-1/8"
60°	8-1/4"	5-3/4"
	Ø650 MM BLADE	
90°	9-1/8"	12-1/2"
45°	9-1/8"	8-3/4"
60°	9-1/8"	6-1/8"


TECHNICAL SPECIFICATIONS

Model		SÇ 403
Cutting angle range	°	-60° / +60°
Saw blade diameter (max.)		Ø23-1/2" / Ø25-1/2"
Saw blade bore		Ø1-5/8"
Motor speed	rpm	2810
Saw motor power	HP	4
Total power	HP	4
Air pressure	psi	90 – 120
Air consumption		1.4 CFM
Weight	lb	573
Overall dimensions (W × D × H)	in	33 × 39 × 57


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SÇ 400S · PVC & ALUMINIUM, SERVO POSITIONING, HEADS TILT 90° / 45°

DOUBLE-HEAD CUTTING MACHINE (Ø500 MM)

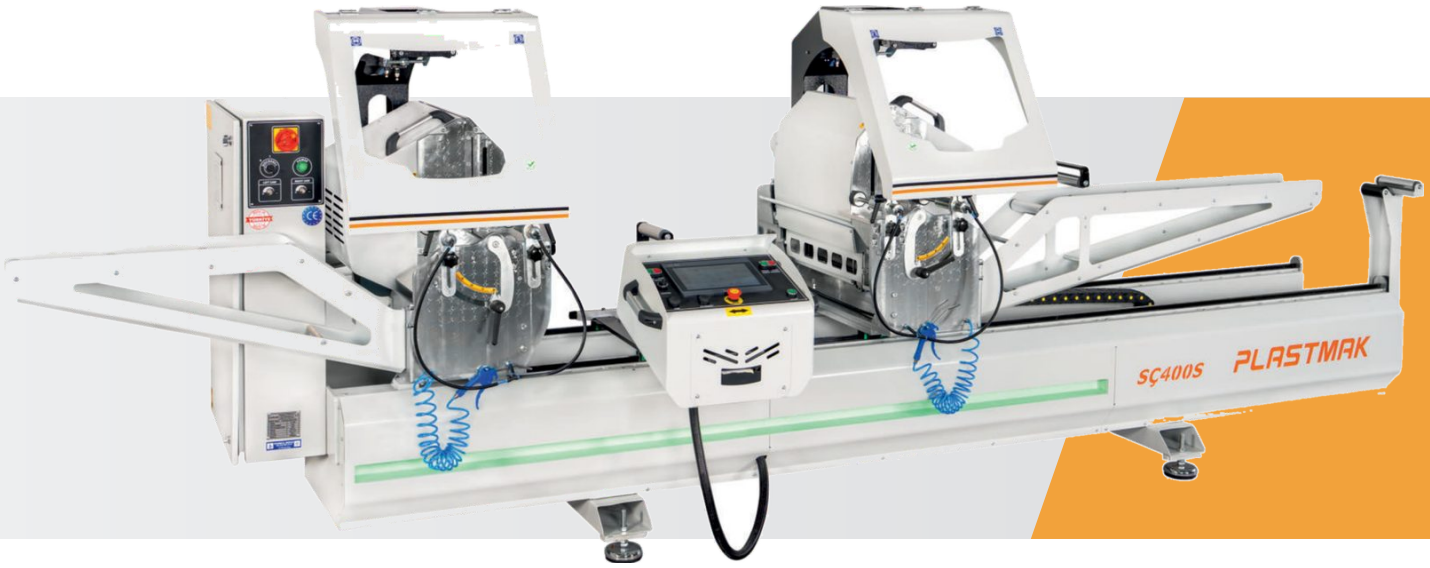

MODEL **SÇ 400S** Double-head cutting machine with control console



Cutting length min. 485 mm, max. 3350 mm; heads tilt 90° / 45°



1 vertical + 2 horizontal vise system



Short-piece cutting rail guard



Automatic support feet for long profiles



Barcode system compatible with Ercom and Teknosoft

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SÇ 400S · PVC & ALUMINIUM, SERVO POSITIONING, HEADS TILT 90° / 45°

DOUBLE-HEAD CUTTING MACHINE (Ø500 MM) (CONT.)

FEATURES

- Cutting accuracy ±1 mm
- Heads automatically adjustable to two angles, 90° and 45° inwards
- Automatic cutting at 90°
- Colour touch-panel display
- Remote connection and technical support
- 2 × Ø500 mm saw blades
- Cut-list transfer via USB memory
- 16.5 cm blade rise (saw exit distance) with Ø500 mm blade; cuts 2 × 80 mm profiles
- Saw speed adjustment
- 6 m cutting length feature
- Wedge (block) cutting
- Multi-language support
- Unlimited cut-size memory
- Right / left conveyor profile support units
- Profile support unit between the cutting heads
- Automatic support arm for long profiles
- Spray saw cooling system
- 2 vertical vises and 4 horizontal vises
- Servo motor motion system

OPTIONS

- Barcode printer (Ercom, Teknosoft)
- Hydro-pneumatic hydro-check controlled saw movement

CUTTING CAPACITY (Ø500 MM BLADE)

Cutting angle	Max. height	Max. width
90°	11″	6-1/2″
45°	7-7/8″	6-1/2″

TECHNICAL SPECIFICATIONS

Model		SÇ 400S
Cutting length (min. – max.)	FT	1.6 FT – 11 FT
Cutting length (min. – max.)	in	19.1 – 131.9
Head tilting angles	°	90° / 45°
Cutting accuracy	in	±0.039
Saw blade diameter		1/16″ × Ø19-3/4″
Saw blade bore		Ø1-1/4″
Saw motors	HP	2.7 × 3
Motor speed	rpm	2810
Total power	HP	8
Air pressure	psi	90 – 120
Air consumption		1.1 CFM
Weight	lb	1,951
Overall dimensions (L × W × H)	in	252 × 40 × 62

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SÇ 4000S · ALUMINIUM & PVC, FULLY AUTOMATIC, HEADS TILT 90° / 45°

SERVO DOUBLE-HEAD CUTTING MACHINE (Ø600 MM)



MODEL **SÇ 4000S** Fully automatic servo double-head cutting machine



Cutting length min. 550 mm, max. 4360 mm; heads tilt 90° / 45°




45°–90° automatic heads



Moving conveyor system



Top clamps for precise cutting

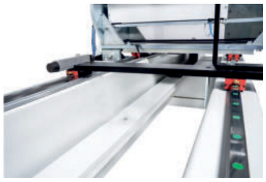

Linear slide system

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SÇ 4000S · ALUMINIUM & PVC, FULLY AUTOMATIC, HEADS TILT 90° / 45°

SERVO DOUBLE-HEAD CUTTING MACHINE (Ø600 MM) (CONT.)

A fully automatically controlled double-head cutting machine designed to cut PVC and aluminium profiles straight or at an angle with Ø600 mm saw blades.

FEATURES

- Complies with CE standards
- Hydro-pneumatic hydro-check controlled saw motion
- Cutting accuracy ±0.5 mm
- Heads automatically adjustable to 90° and 45° (inwards)
- Automatic cutting at 90°
- 10" colour touch-panel display
- Remote connection and technical support
- 2 × Ø600 mm saw blades
- Servo motor motion system
- 215 mm blade rise (saw exit distance); cuts 2 × 80 mm profiles
- Hydro-check saw speed adjustment
- 8 m cutting length feature
- Multi-language support
- Unlimited cut-list memory
- Data transfer via USB memory
- Spray saw cooling system
- 2 vertical vises and 4 horizontal vises
- Automatic support arm for long profiles

OPTION

- Barcode printer

CUTTING CAPACITY (Ø600 MM BLADE)

Cutting angle	Max. height	Max. width
90°	12-1/4"	8-1/2"
45°	8-3/4"	8-1/2"

TECHNICAL SPECIFICATIONS

Model		SÇ 4000S
Cutting length (min. – max.)	FT	1.8 FT – 14.3 FT
Cutting length (min. – max.)	in	21.7 – 171.7
Head tilting angles	°	90° / 45°
Cutting accuracy	in	±0.02
Saw blade diameter		1/16" × Ø23-1/2"
Saw blade bore		Ø1-5/8"
Saw motors	HP	2.7 × 4
Motor speed	rpm	2810
Total power	HP	11
Air pressure	psi	90 – 120
Air consumption		1.1 CFM
Weight	lb	2,392
Overall dimensions (L × W × H)	in	290 × 44 × 62

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SÇ 450 · ALUMINIUM & PVC ROLLER-SHUTTER LAMELLAS, BOXES AND SIDE POSTS, Ø550 MM

SHUTTER BOX & LAMELLA CUTTING MACHINE



Pistons matched to the part



Right / left 3 m roller conveyors



MODEL **SÇ 450** Shutter box and lamella cutting machine with roller conveyors

Designed for batch cutting of roller-shutter lamellas in packs, cutting shutter boxes and side posts, and cutting monoblock shutter boxes as a set.

FEATURES

- Clean surface cutting thanks to high saw speed
- Roller conveyor system, 2 × 3 m
- Adjustable saw cutting speed
- All shutter boxes up to max. 350 mm (L-shaped) can be cut
- Precision cutting with linear guide system
- Saw blade diameter: 550 mm

OPTION

- Cooling system

TECHNICAL SPECIFICATIONS

Model		SÇ 450
Max. cutting width (Ø550 mm blade)		14-1/4"
Max. shutter box size		13-3/4"
Saw blade diameter		Ø21-3/4"
Saw blade bore		Ø1-1/4"
Motor speed	rpm	2810
Motor power	HP	4
Air pressure	psi	90 – 120
Air consumption		0.35 CFM
Weight	lb	761
Overall dimensions (W × D × H)	in	33 × 35 × 78

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SÇ 431 · ALUMINIUM & PVC TOP-DOWN MITER SAW, ±45°

MANUAL OVERHEAD CUTTING MACHINE (Ø400 MM)



Burr-free aluminium cutting



MODEL **SÇ 431** Manual overhead cutting machine with roller conveyor

FEATURES

- Conforms to CE standards
- Cuts at +45°, –45° and intermediate angles
- Quick adjustment stops for 90°, 75°, 60° and 45°
- Table locking arm for intermediate angles
- Practical pneumatic profile clamping system
- Cooling device for aluminium profile cutting
- Roller conveyor system (3 m)
- Diamond saw blade diameter: 400 mm

OPTION

- Single-phase 220 V version

CUTTING CAPACITY (Ø400 MM BLADE)

Cutting angle	Max. height	Max. width
90°	4-3/4"	7-1/8"
45°	4-3/4"	4-7/8"

TECHNICAL SPECIFICATIONS

Model		SÇ 431
Cutting angle range	°	-45° / +45°
Cutting length (min. – max.)	FT	1.2 FT – 10.8 FT
Cutting length (min. – max.)	in	14.2 – 129.9
Saw blade diameter		Ø15-3/4"
Saw blade bore		Ø1-1/4"
Motor speed	rpm	2810
Motor power	HP	2
Air pressure	psi	90 – 120
Air consumption		0.08 CFM
Weight	lb	265
Overall dimensions (W × D × H)	in	26 × 31 × 53


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SÇ 4550 · 9-AXIS PROFILE MACHINING AND Ø550 MM SERVO CUTTING

PROFILE PROCESSING & CUTTING CENTRE (9 AXES)



MODEL **SÇ 4550** 9-axis profile processing and cutting centre

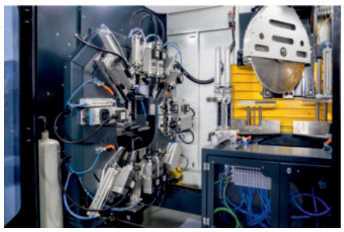

10 high-speed air-cooled spindle motors for aluminium



Precision 3-axis profile holding station



Waiting station for processed profiles



UPS energy support

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

SÇ 4550 · 9-AXIS PROFILE MACHINING AND Ø550 MM SERVO CUTTING

PROFILE PROCESSING & CUTTING CENTRE (9 AXES) (CONT.)

FEATURES

- Grooving, drilling, marking and cutting at different angles on aluminium and PVC profiles
- 10 high-speed air-cooled spindle motors for aluminium
- Axis speeds averaging over 120 m/min
- Precision 3-axis profile holding station
- Profile feeding capacity: 7 profiles
- Profile processing length: maximum 6500 mm, minimum 2000 mm
- Automatic profile length detection
- UPS energy support
- Windows-based, easily configurable user-friendly interface
- Data transfer via USB; online remote monitoring system
- Remote connection support
- 23.8" high-performance touch screen
- Servo-controlled cutting unit providing ±0.1° precision cutting between 30° and 150°
- Cut waste profiles are transported to the collection cart by an automatic conveyor system

TECHNICAL SPECIFICATIONS

Model		SÇ 4550
Number of axes		9
Profile processing length (min. – max.)	FT	6.6 FT – 21.3 FT
Profile processing length (min. – max.)	in	78.7 – 255.9
Spindle head travel X / Y / Z	in	11.8 / 12.6 / 10.2
Average axis speed	ft/min	394
Cutting angle range	°	30°-150°
Cutting accuracy		±0.1°
Saw blade diameter		Ø21-¾"
Saw blade bore		Ø1-¼"
High-speed air-cooled spindle motors		10
Profile feeding capacity (profiles)		7
Total power	HP	51
Air pressure	psi	90 – 120
Air consumption		17.7 CFM
Weight	lb	8,267
Overall dimensions (L × W × H)	in	535 × 109 × 87

STANDARD EQUIPMENT

- Ø550 mm miter saw
- Automatic waste chip conveyor discharge unit
- Barcode printer
- Outlet conveyor with belt system

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

OPTIONAL EQUIPMENT


- Compatibility with CAM programs
- Optional length
- Safety barrier (sensor)

INCLUDED WITH EVERY NOVOTECH MACHINE


- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SÇ 5000 · SERVO-DRIVEN CNC DRILLER FOR DOOR SASH AND HARDWARE MACHINING

PVC 3-AXIS CNC MILLING MACHINE

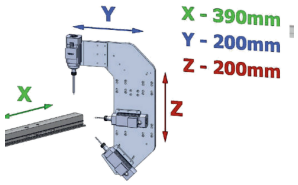

Travel X 390 mm · Y 200 mm · Z 200 mm



Independent motors



MODEL **SÇ 5000** 3-axis CNC milling machine with measuring conveyors

FEATURES

- Performs door sash (sliding) operations on PVC profiles thanks to 3 different motors
- 3-axis servo motor system
- Easy point-to-point programming
- Water drainage slot opening feature (interior)
- Right and left measuring system with stops
- Unlimited memory capacity
- Laser centring system

TECHNICAL SPECIFICATIONS

Model		SÇ 5000
Axis travel X / Y / Z	in	15.4 / 7.9 / 7.9
Spindle speed	rpm	18000
Spindle frequency	Hz	300
Spindle motors	HP	1.3 × 1 2.7 × 0.7
Router cutter Ø d1 / shank Ø d2		Ø3⁄16″ / Ø5⁄16″
Min. routing length (L min.)	in	3.1
Total power	HP	8
Air pressure	psi	90 – 120
Air consumption		0.32 CFM
Weight	lb	783
Overall dimensions (L × D × H)	in	94 × 44 × 76


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SÇ 5000S · CNC PRO DRILLER WITH THREE INDEPENDENT 18,000 RPM SPINDLES

ALUMINIUM & PVC 3-AXIS CNC MILLING MACHINE




MODEL **SÇ 5000S** 3-axis CNC milling machine with right and left measuring arms



Travel X 390 mm · Y 200 mm · Z 200 mm


Wide working area


Independent motors


Automatic closing safety cover


Spindle motor

FEATURES

- Conforms to CE standards
- Performs door, sash, handle-cylinder and triple drilling operations on aluminium and PVC profiles
- DXF import and drawing with CAM Codex
- 19" Windows-based screen
- 3 independent axes
- Cooling system for aluminium profiles
- Right and left arms with measuring system
- Precise operation thanks to the linear guide system
- Speed settings adjustable for all operations
- Easy switching between aluminium and PVC profiles on the touch screen, with automatic change of speed settings
- Unlimited memory capacity
- Automatic protective cover for safety
- Servo motor system on the X, Y and Z axes
- Automatic lubrication system
- Remote connection support
- Process simulation on screen
- Laser centring system

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

TECHNICAL SPECIFICATIONS

Model		SÇ 5000S
Axis travel X / Y / Z	in	15.4 / 7.9 / 7.9
Spindle speed	rpm	18000
Spindle frequency	Hz	300
Spindle motors	HP	4 × 1.9
Router cutter Ø d1 / shank Ø d2		Ø3⁄16" / Ø5⁄16"
Min. routing length (L min.)	in	3.1
Total power	HP	8
Air pressure	psi	90 – 120
Air consumption		0.32 CFM
Weight	lb	1,653
Machine body dimensions (W × D × H)	in	52 × 66 × 75

SÇ 211 · PVC & ALUMINIUM MULLION / TRANSOM END MILLING

END MILLING MACHINE (2 KNIVES)



2 vertical + 1 horizontal vise system



MODEL **SÇ 211** End milling machine with 2-knife cutter set

FEATURES

- Conforms to CE standards
- End milling of mullion (transom) connections on PVC and aluminium profiles
- Pneumatic profile clamping system
- Milling motor moved by a pneumatic cylinder
- Easy series change thanks to the separator button (60–70 series)

OPTIONS

- Hydro-check system
- Cooling system

TECHNICAL SPECIFICATIONS

Model		SÇ 211
Cutter diameter (max.)		Ø5-½"
Cutter bore (max.)		Ø1-⅛"
Cutter stack height (max.)	in	3.5
Spindle speed	rpm	2810
Motor power	HP	1.5
Air pressure	psi	90 – 120
Air consumption		0.35 CFM
Weight	lb	220
Overall dimensions (W × D × H)	in	27 × 24 × 48


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SÇ 211S · ALUMINIUM & PVC END MILLING, -45° / +45°, QUICK-CHANGE CUTTER GROUPS

END MILLING MACHINE, SERIAL BLADE CHANGE

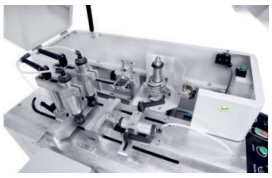

Easy blade changing with a single button



Blade group release button



MODEL **SÇ 211S** End milling machine with serial blade change system

FEATURES

- Robust mechanical structure that can process aluminium profiles at high quality
- End milling of mullion (transom) connections on aluminium profiles in the –45° / +45° angle range
- Easy blade group replacement system
- Easy angle adjustment with mechanical stops
- Support system that can be adjusted for four different profiles
- Cutting speed adjustment with hydro-pneumatic system
- Knife storage rack (3 pcs)
- Boron oil spray system
- Max. processing diameter: 160 mm
- Max. blade: 200 mm; min.: 90 mm


TECHNICAL SPECIFICATIONS

Model		SÇ 211S
Milling angle range	°	-45° / +45°
Cutter diameter (max.)		Ø6-¼"
Cutter bore (max.)		Ø1-⅛"
Cutter stack height (max.)	in	3.5 + 7.9
Spindle speed	rpm	2810
Motor power	HP	1.5
Air pressure	psi	90 – 120
Air consumption		0.35 CFM
Weight	lb	342
Overall dimensions (W × D × H)	in	41 × 26 × 49

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SÇ 501 · PVC COPY ROUTER WITH TRIPLE DRILLING UNIT

LOCK-PLACE & DRAINAGE COPY ROUTER

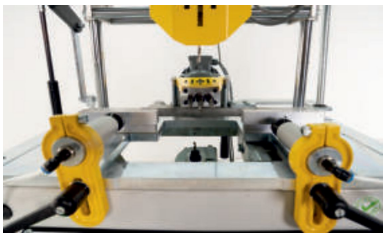

Motors that can work independently



MODEL **SÇ 501** Copy router with triple drilling unit

FEATURES

- Conforms to CE standards
- Opens lock places, hinge slots, handle holes and water drainage channels in PVC profiles
- Copy head works on the vertical axis
- Triple drilling system works on the horizontal axis
- Water drainage system can work in an angled position
- Universal template
- Triple drilling, copy milling or grooving can each work on their own
- Comfortable operation thanks to the powerful motor

OPTION

- Optional (custom) templates

TECHNICAL SPECIFICATIONS

Model		SÇ 501
Copy router speed	rpm	12000
Copy router motor	HP	2.7 × 1.2
Copy router travel X / Y / Z	in	11 / 4.9 / 3.5
Router cutter Ø d1 / shank Ø d2		Ø3⁄16″ / Ø5⁄16″
Min. routing length (L min.)	in	3.1
Triple drilling motor speed	rpm	2810
Triple drilling motor	HP	1
Triple drilling spindle lengths L1 / L2 / L3	in	4.3 / 4.3 / 4.3
Drill Ø D1 / D2 (max.)		Ø7⁄16″ / Ø1⁄2″
Drill shank Ø d1 / d2		Ø5⁄16″ / Ø5⁄16″
Total power	HP	3.4
Air pressure	psi	90 – 120
Air consumption		0.32 CFM
Weight	lb	254
Overall dimensions (W × D × H)	in	26 × 35 × 48

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SÇ 502S · ALUMINIUM & PVC, 18,000 RPM ROUTER WITH TRIPLE DRILLING UNIT

HIGH-FREQUENCY LOCK-PLACE & DRAINAGE ROUTER



Dual support system for ease of use



MODEL **SÇ 502S** High-frequency copy router with right conveyor

FEATURES

- Conforms to CE standards
- Opens lock places, hinge slots, handle holes and water drainage channels in aluminium and PVC profiles
- Copy head works on the vertical axis
- Triple drilling system works on the horizontal axis
- Water drainage system can work in an angled position
- Universal template; optional templates can be made
- Triple drilling, copy milling or grooving can each work on their own
- High-frequency router motor (18,000 rpm)
- Right conveyor system (1 m)


TECHNICAL SPECIFICATIONS

Model		SÇ 502S
Copy router speed	rpm	18000
Copy router motor	HP	1.2 + 1
Copy router travel X / Y / Z	in	11 / 4.9 / 3.5
Router cutter Ø d1 / shank Ø d2		Ø3⁄16″ / Ø5⁄16″
Min. routing length (L min.)	in	3.1
Triple drilling motor speed	rpm	2810
Triple drilling motor	HP	1
Triple drilling spindle lengths L1 / L2 / L3	in	4.3 / 4.3 / 4.3
Drill Ø D1 / D2 (max.)		Ø7⁄16″ / Ø1⁄2″
Drill shank Ø d1 / d2		Ø5⁄16″ / Ø5⁄16″
Total power	HP	4
Air pressure	psi	90 – 120
Air consumption		0.32 CFM
Weight	lb	287
Overall dimensions (W × D × H)	in	28 × 38 × 49

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SÇ 512 · ALUMINIUM & PVC, 18,000 RPM SPINDLE, TRIPLE DRILLING AND COOLING

HIGH-FREQUENCY 3-HOLE COPY ROUTER



Copy router with triple drilling unit



Spindle motor and cooling system



MODEL **SÇ 512** High-frequency 3-hole copy router with right conveyor

FEATURES

- Conforms to CE standards
- Opens lock places, hinge slots and handle holes in PVC and aluminium profiles
- Copy head works on the vertical axis
- Triple drilling system works on the horizontal axis
- Universal template; optional templates can be made
- Triple drilling, copy milling or grooving can each work on their own
- Comfortable operation thanks to the powerful motor
- High-frequency spindle motor (18,000 rpm)
- Cooling system
- Right conveyor system (1 m)

TECHNICAL SPECIFICATIONS

Model		SÇ 512
Copy router speed	rpm	18000
Copy router motor	HP	1
Copy router travel X / Y / Z	in	11 / 4.9 / 3.5
Router cutter Ø d1 / shank Ø d2		Ø3⁄16" / Ø5⁄16"
Min. routing length (L min.)	in	3.1
Triple drilling motor speed	rpm	2810
Triple drilling motor	HP	1
Triple drilling spindle lengths L1 / L2 / L3	in	4.3 / 4.3 / 4.3
Drill Ø D1 / D2 (max.)		Ø7⁄16" / Ø1⁄2"
Drill shank Ø d1 / d2		Ø5⁄16" / Ø5⁄16"
Total power	HP	2
Air pressure	psi	90 – 120
Air consumption		0.32 CFM
Weight	lb	243
Overall dimensions (W × D × H)	in	26 × 35 × 48

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SÇ 521S · THREE INDEPENDENT 18,000 RPM HEADS FOR PVC DRAINAGE SLOTS

TRIPLE WATER DRAINAGE SLOT ROUTER



Right and left moving table



MODEL **SÇ 521S** Triple water drainage slot router

FEATURES

- Opens water drainage channels in PVC profiles
- The three router groups can work separately
- Water drainage system can work in an angled position
- Pneumatic profile clamping system
- Fully automatic operation
- High-frequency router motors (18,000 rpm)

TECHNICAL SPECIFICATIONS

Model		SÇ 521S
Router speed	rpm	18000
Router motors	HP	4 × 1
Router travel X / Y / Z	in	11 / 4.9 / 3.5
Router cutter Ø d1 / shank Ø d2		Ø3⁄16″ / Ø5⁄16″
Min. routing length (L min.)	in	3.1
Total power	HP	4
Air pressure	psi	90 – 120
Air consumption		0.32 CFM
Weight	lb	309
Overall dimensions (W × D × H)	in	29 × 35 × 58

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SÇ 542 · 18,000 RPM ROUTER FOR ALUMINIUM HANDLE, LOCK AND HARDWARE SLOTS

HIGH-FREQUENCY ALUMINIUM COPY ROUTER



MODEL **SÇ 542** High-frequency aluminium copy router with right conveyor


Special template system for aluminium


Cooling system


Spindle motor system

FEATURES

- Conforms to CE standards
- Used for all profile operations such as handles and locks
- Works comfortably thanks to advanced motor technology
- Burr-free, comfortable processing speed
- Oil cooling system
- Pneumatic profile clamping system
- High-frequency motor (18,000 rpm)
- Right conveyor system (1 m)

TECHNICAL SPECIFICATIONS

Model		SÇ 542
Router speed	rpm	18000
Router motor	HP	1.9
Router travel X / Y / Z	in	11 / 4.9 / 3.5
Router cutter Ø d1 / shank Ø d2		Ø3⁄16″ / Ø5⁄16″
Min. routing length (L min.)	in	3.1
Total power	HP	1.9
Air pressure	psi	90 – 120
Air consumption		0.32 CFM
Weight	lb	198
Overall dimensions (W × D × H)	in	25 × 36 × 57

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SÇ 902 · ALUMINIUM 90° CORNER CRIMPING, 4 + 4 KNIFE SYSTEM

HYDRAULIC CORNER CRIMPING MACHINE



Easy adjustable size system



MODEL **SÇ 902** Hydraulic corner crimping machine with twin foot pedal

A corner press designed for joining aluminium profiles at 90°.

FEATURES

- Conforms to CE standards
- Both knife movements are hydraulic
- 4 right and 4 left knife system
- Millimetre scale system for setting the height and advance of the knives
- Pneumatic centring miter wedge
- Release button for precise adjustment
- 2 foot pedals used for hydraulic pressing and profile clamping
- Plexiglass sheet prevents the profile surfaces from being damaged
- Right and left arms for profile support

TECHNICAL SPECIFICATIONS

Model		SÇ 902
Max. profile height H	in	5.1
Pressing force per knife (at min. 7 bar)	lb	4 × 3,307
Hydraulic pressure (max.)	psi	1,450
Total power	HP	3
Air pressure	psi	90 – 120
Air consumption		0.71 CFM
Weight	lb	794
Machine body dimensions (W × D × H)	in	43 × 37 × 50

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

PNEUMATIC SCREWING STATION WITH FOOT-PEDAL OPERATION AND ROLLER TABLES

SINGLE SCREWING MACHINE



MODEL **Single screwing machine** Pneumatic single screwing machine with support tables

DESCRIPTION

The single screwing machine operates with a pneumatic system and is designed for fast and precise screwing applications. Its compact structure allows easy integration into production lines, and it ensures high efficiency with an adjustable screwing range and stable torque control.

FEATURES

- Pneumatic screwing system
- Adjustable working range (A–B)
- Precise torque control
- Foot-pedal controlled operation
- Compact and ergonomic design
- Easy maintenance and user-friendly operation

REQUIREMENTS

- Works with an automatic screw feeding unit
- Requires a compressed air system
- Regular maintenance is recommended
- Correct pressure adjustment is required

TECHNICAL SPECIFICATIONS

Model		Single screwing machine
Working range A (min. – max.)	in	1.6 – 4.7
Working range B (min. – max.)	in	1.6 – 4.7
Screw size (min. – max.)		3.9 × 16 mm – 4.2 × 38 mm
Air pressure	psi	90 – 120
Air consumption		0.56 CFM
Weight	lb	276
Overall dimensions (L × W × H)	in	43 × 22 × 79

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SCREWING MOTOR

Model		Screwing motor
Screwing motor power	HP	0.7
Stall torque	lb·ft	5
Speed	rpm	3000
Hose diameter		Ø3⁄8"
Air inlet		1/4"
Air consumption		28.2 CFM
Sound level	dB	83
Operating pressure	psi	90
Motor weight	lb	2

AUTOMATIC HARDWARE FITTING AND SCREWING FOR SINGLE AND DOUBLE OPENING SASHES

SASH ASSEMBLY MACHINE



MODEL **Sash assembly machine** Sash assembly machine with laser alignment and automatic screwing

FEATURES

- Works in series on different profiles for single and double opening hardware installation
- Quality, standardised assembly without the need for moulds and templates
- Fully automatic laser-based alignment screwing
- Automatic measurement and screwing system
- Triple-arm hole drilling with support plate
- Semi-automatic hinge template and screwing
- Espagnolette grooving milling cutter
- Hardware shelf lighting and corner-turning scissors
- Average hardware fitting time for a double opening window: 3.5 minutes
- Colour: RAL 7035

REQUIREMENTS

- Requires a compressed air system
- Regular maintenance is recommended
- Correct pressure adjustment is required
- Safety measures should be followed

TECHNICAL SPECIFICATIONS

Model		Sash assembly machine
Saw blade diameter		Ø19-¾"
Air pressure	psi	90 – 120
Colour		RAL 7035

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SIMULTANEOUS TWO-HEAD SCREWING OF PVC AND ALUMINIUM PROFILES

DOUBLE-HEAD SCREWING MACHINE





Pneumatic screwing motor

MODEL **Double-head screwing machine**

Double-head screwing machine with support tables

DESCRIPTION

The double-head screwing machine is used for precise and simultaneous screwing of PVC and aluminium profiles, enhancing productivity and consistency in assembly operations.

REQUIREMENTS

- Requires a compressed air system
- Regular maintenance is recommended
- Correct pressure adjustment is required
- Safety measures should be followed

TECHNICAL SPECIFICATIONS

Model		Double-head screwing machine
Screw size (max.)		4.2 × 38 mm
Air pressure	psi	90 – 120
Weight	lb	463
Overall dimensions (L × W × H)	in	35 × 30 × 79
Colour		RAL 7035

SCREWING MOTOR

Model		Screwing motor
Screwing motor power	HP	0.7
Stall torque	lb·ft	5
Speed	rpm	3000
Hose diameter		Ø3⁄8"
Air inlet		1/4"
Air consumption		2.8 CFM
Operating pressure	psi	90 – 120
Motor weight	lb	2

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SÇ 441 · SÇ 451 · SÇ 221 · SÇ 551 · BENCH-TOP CUTTING, NOTCHING AND MILLING

PORTABLE MACHINES & ACCESSORIES



SÇ 441

Portable cutting machine, Ø300 mm

- Used for cutting aluminium and PVC profiles
- Double spring system and saw guard for safe cutting
- Cutting on the top table
- Cutting at all angles between –45° and +45°
- Fixed stops right and left at 0°, 15°, 22.5°, 30° and 45°



SÇ 451

Portable cutting machine, Ø400 mm

- Used for cutting aluminium and PVC profiles
- Double spring system and saw guard for safe cutting
- Cutting on the top table
- Cutting at all angles between –45° and +45°
- Fixed stops right and left at 0°, 15°, 22.5°, 30° and 45°



SÇ 221

Portable notching and milling machine

- Mullion / transom (middle register) notching of aluminium and plastic profiles
- Vertical and horizontal vise system
- Single-phase motor



SÇ 551

Portable copy milling machine

- Opens lock, handle, hinge and espagnolette slots and grooves of any size in aluminium and plastic profiles
- Copy device suitable for your process
- Various grooving operations independent of the copy template with the help of the stop

OPTIONS

Option	SÇ 441	SÇ 451	SÇ 221	SÇ 551
Lower cabinet body	Optional	Optional	Optional	Optional
Right / left measuring system	Optional	Optional	–	–
Pneumatic press (clamping) and cooling system	Optional	Optional	–	–
Diamond triple saw	Optional	Optional	–	–
Pneumatic (air) system	–	–	Optional	Optional

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SÇ 1001 · SÇ 1002 · SÇ 1003 · ROLLER AND SHEET-METAL CONVEYORS, PORTABLE TABLE

PORTABLE MACHINES & ACCESSORIES



SÇ 1001

Aluminium roller conveyor

- Aluminium roller track
- Height-adjustable legs



SÇ 1002

Plastic roller conveyor

- Plastic roller track
- Height-adjustable legs



SÇ 1003

Standard sheet-metal conveyor

- Sheet-metal profile support track
- Height-adjustable legs



Portable table

Stand for portable machines

- Two-shelf steel stand for the portable machines

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SÇ 1000 · 3 M TOUCH-SCREEN DIGITAL STOP CONVEYOR, ±0.5 MM ACCURACY

DIGITAL MEASURING CONVEYOR



MODEL **SÇ 1000** Digital measuring conveyor with touch screen



Easy to fit to all machines

FEATURES

- 3 m length
- ±0.5 mm measuring accuracy
- Works with 220 V single-phase supply
- Touch screen
- Single push-button stop retraction makes it easy to remove the cut piece
- Easy mounting to the machines
- User-friendly ergonomic design
- Easy calibration

OPTION

- Bluetooth measuring station

TECHNICAL SPECIFICATIONS

Model		SÇ 1000
Measuring length	FT	9.8 FT
Measuring length	in	118.1
Measuring accuracy	in	±0.02

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SÇ 401 · SÇ 501 · SÇ 101 · SÇ 301 · SÇ 211 · SÇ 601

PVC SINGLE-HEAD PRODUCTION GROUP

A production group built around single-head machines, giving a continuous PVC window production flow. Produces 40–60 windows in an 8-hour shift.



SÇ 401
Aluminium & PVC undercut cutting machine (Ø450 mm)



SÇ 501
Aluminium & PVC triple lock-place drilling and water drainage copy router



SÇ 101
PVC single-corner welding machine



SÇ 301
Aluminium & PVC glazing bead cutting machine



SÇ 211
Aluminium & PVC end milling machine (2 knives)



SÇ 601
Automatic corner cleaning machine

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SÇ 400 · SÇ 501 · SÇ 100 · SÇ 301 · SÇ 211 · SÇ 601

PVC DOUBLE-HEAD PRODUCTION GROUP

A production group built around double-head cutting and welding machines for a higher-volume PVC window production flow. Produces 80–120 windows in an 8-hour shift.



SÇ 400

Aluminium & PVC double-head cutting machine (Ø450 mm)



SÇ 501

Aluminium & PVC triple lock-place drilling and water drainage copy router



SÇ 100

PVC double-corner welding machine (0.2 mm)



SÇ 301

Aluminium & PVC glazing bead cutting machine



SÇ 211

Aluminium & PVC end milling machine (2 knives)



SÇ 601

Automatic corner cleaning machine

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SÇ 4000S · SÇ 5000S · SÇ 211S · SÇ 902

ALUMINIUM DOUBLE-HEAD PRODUCTION GROUP

A production group for aluminium windows and doors, built around a double-head saw and a 3-axis CNC milling machine. Produces 80–120 windows in an 8-hour shift.



SÇ 4000S

Aluminium double-head cutting machine (Ø550 mm)



SÇ 5000S

Aluminium & PVC 3-axis CNC milling machine



SÇ 211S

Aluminium & PVC end milling machine with serial blade change system



SÇ 902

Hydraulic aluminium corner crimping machine

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SÇ 801 · SÇ 400 · SÇ 5000 · SÇ 100 · SÇ 6000 · SÇ 211S · SÇ 301S

WORKSHOP SETUP PLAN

A complete PVC window workshop laid out as a production loop: compressed air supply, double-head cutting, CNC milling, double-corner welding, CNC corner cleaning, end milling and glazing bead cutting. Produces 200–220 windows in an 8-hour shift.



SÇ 801
Air compressor, 500 L



SÇ 400
Double-head cutting machine



SÇ 5000
CNC milling machine



SÇ 100
Double-corner welding machine



SÇ 6000
CNC corner cleaning machine



SÇ 211S
End milling machine



SÇ 301S
Glazing bead cutting machine

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

NovoTech MACHINE TOOLS Inc.

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga location.

PHONE
+1 647 526 5510

WEB & EMAIL
NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS
1365 Mid-Way Blvd, 26
Mississauga, ON L5T 2J5
Canada

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**






Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment.