NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

DENER MAKINA · MADE IN TURKEY · SOLD & SERVICED IN CANADA BY NOVOTECH

CNC LATHES

DENER TTC AND TTH SLANT-BED CNC LATHES · 6″ TO 12″ CHUCKS · Ø22″ AND Ø27.6″ SWING · FANUC CONTROL







Turkey
MADE IN TURKEY

2
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

DENER CNC LATHES

CONTENTS

TTC COMPACT CNC LATHES

TTC compact CNC lathes, 6″ and 8″ chucks — 45° slant bed TTC-6 · TTC-8 · 2 models, C-axis versions 04

TTH CNC LATHES

TTH CNC lathes, 8″, 10″ and 12″ chucks — 45° slant bed, Ø27.6″ swing TTH-8 · TTH-10 · TTH-12 · 3 models, C-axis versions 07

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR DENER CNC LATHES

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey by Dener Makina
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

DENER MAKINA · KAYSERI, TURKEY

SLANT-BED CNC LATHES FROM DENER'S MACHINE-TOOL PLANT

The TTC and TTH lathes share one design: a one-piece cast bed inclined at 45° that sheds chips into the conveyor, roller linear guides with C1 and C3 ballscrews coupled straight to the servo motors, a spindle on super-precision bearings, a 12-station servo turret that indexes in 0.2 s, a hydraulic chuck and a hydraulic tailstock, under a Fanuc 0i-TF Plus control (Mitsubishi M80 to order). The compact TTC-6 and TTC-8 swing Ø22″ (560 mm) with 6″ and 8″ chucks; the TTH-8, TTH-10 and TTH-12 swing Ø27.6″ (700 mm), turn parts up to Ø20.8″ × 26.8″ (528 × 680 mm) and go up to a 12″ chuck and 3.74″ (95 mm) bar. A BMT55 C-axis turret with 12 live tools turns any of them into a turn-mill centre.


Dener Makina has built machinery in Kayseri since 1974, and since 2016 CNC machine tools in the Taksan plant it took over: 155,000 m^2 of factory buildings where the castings are machined and the machines assembled. NovoTech sells, installs and supports the lathes in Canada from Mississauga, Ontario, Canada, with a CSA-approved panel and a 1-year warranty.

TTC-6 · TTC-8 · 2 MODELS, C-AXIS VERSIONS


TTC COMPACT CNC LATHES, 6″ AND 8″ CHUCKS — 45° SLANT BED



MODEL TTC · DENER TTC CNC LATHE — FULLY ENCLOSED 45° SLANT-BED LATHE WITH THE CONTROL ON THE FRONT AND THE CHIP CONVEYOR AT THE END



12-station servo turret of the Dener TTC and TTH CNC lathes — slot type, hydraulically clamped

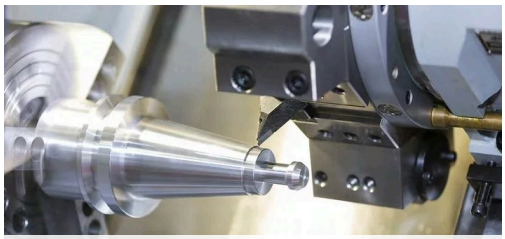

A shaft being turned on a Dener CNC lathe — the turret tool cutting the taper

The TTC is Dener's compact slant-bed CNC lathe for shaft, flange and bushing work in series: a one-piece cast bed inclined at 45° that sheds chips into the conveyor, roller linear guides and C1 / C3 ballscrews coupled straight to the servo motors, a spindle on super-precision bearings and a 12-station servo turret that indexes in 0.2 s. The TTC-6 turns parts to Ø12″ (305 mm) × 17″ (433 mm) behind a 6″ hydraulic chuck at 6,000 rpm and takes 1.77″ (45 mm) bar; the TTC-8 has an 8″ chuck, 2.05″ (52 mm) bar and 4,500 rpm. With the optional BMT55 C-axis turret and its 12 live tools the same machine drills, taps and mills flats and slots in the one setup. Fanuc 0i-TF Plus control as standard, Mitsubishi M80 to order.

STANDARD FEATURES

- ✓ 45° one-piece cast slant bed; finite-element designed; travels X 7.5″ × Z 17.7″ (190 × 450 mm)
- ✓ Swing over bed Ø22″ (560 mm); max. turning Ø12″ (305 mm)
- ✓ Fanuc 0i-TF Plus CNC with 10.4″ colour screen (Mitsubishi M80 optional)
- ✓ One-piece 45° cast slant bed; roller linear guides; C1 / C3 ballscrews coupled directly to the servo motors
- ✓ Spindle on super-precision roller bearings; hydraulic chuck with soft and hard jaws
- ✓ 12-station servo turret with tool holders; hydraulic tailstock moved independently of the turret
- ✓ Fully enclosed guarding with front-door interlock; chip conveyor, coolant system, oil skimmer, automatic lubrication
- ✓ Hydraulic unit, cabinet cooling, foot pedal, portable handwheel, levelling bolts and tools
- ✓ CSA-approved electrical panel; transformer for 600, 480, 240 or 208 V 3-phase

OPTIONAL EQUIPMENT

- + Mitsubishi M80A control
- + C-axis turret: BMT55, 12 live tools for drilling, tapping and milling
- + Tool-setting arm and workpiece probe
- + Automatic bar feeder; parts catcher
- + Programmable tailstock
- + Linear scales
- + Automatic door
- + Electrical cabinet air conditioner
- + Chip cart; mist extractor

DETAILS, COMPONENTS AND OPTIONS

TTC COMPACT CNC LATHES, 6" AND 8" CHUCKS — 45° SLANT BED



One-piece 45° slant-bed casting with the headstock, turret slide and tailstock — the structure of the Dener TTC and TTH lathes

TECHNICAL SPECIFICATIONS

TTC COMPACT CNC LATHES, 6" AND 8" CHUCKS — 45° SLANT BED

TTC CNC LATHES

2 models · 6" and 8" chucks · 45° slant bed

Model	TTC-6	TTC-8
Swing over bed	**Ø22.0" (560 mm)**	**Ø22.0" (560 mm)**
Max. turning diameter C-axis turret in brackets	**Ø12.0" (305 mm) · C: Ø10.8"**	**Ø12.0" (305 mm) · C: Ø10.8"**
Max. turning length C-axis turret in brackets	**17.0" (433 mm) · C: 14.3"**	**16.0" (406 mm) · C: 13.2"**
Chuck	**6" hydraulic, soft and hard jaws**	**8" hydraulic, soft and hard jaws**
Bar capacity	Ø1.77" (45 mm)	Ø2.05" (52 mm)
Spindle nose	A2-5	A2-6
Spindle bore	Ø2.20" (56 mm)	Ø2.60" (66 mm)
Max. spindle speed	**6,000 rpm**	**4,500 rpm**
Spindle motor Fanuc, continuous / max.	14.8 / 27.4 HP (11 / 20.4 kW)	14.8 / 27.4 HP (11 / 20.4 kW)
Max. spindle torque	127 lb·ft (171.6 N·m)	144 lb·ft (195 N·m)
Travels X / Z	**7.5 / 17.7" (190 / 450 mm)**	**7.5 / 17.7" (190 / 450 mm)**
Rapid traverse X / Z	1,181 in/min (30 m/min)	1,181 in/min (30 m/min)
Cutting feed	39 – 197 in/min (1 – 5 m/min)	39 – 197 in/min (1 – 5 m/min)
Turret	12 stations, servo-driven, hydraulic clamping; 0.20 – 0.34 s per station	12 stations, servo-driven, hydraulic clamping; 0.20 – 0.34 s per station
Tool shank / boring bar	1" square (25 × 25 mm) / Ø1.57" (40 mm)	1" square (25 × 25 mm) / Ø1.57" (40 mm)
C-axis turret option	BMT55, 12 live tools to 6,000 rpm, 5.0 / 11.1 HP (3.7 / 8.3 kW)	BMT55, 12 live tools to 6,000 rpm, 5.0 / 11.1 HP (3.7 / 8.3 kW)
Tailstock hydraulic, quill Ø2.68" (68 mm)	17.7" (450 mm) travel, MT4	17.7" (450 mm) travel, MT4
Positioning accuracy X / Z	.0003 / .00016" (0.008 / 0.004 mm)	.0003 / .00016" (0.008 / 0.004 mm)
Repeatability X / Z	.00016 / .00008" (0.004 / 0.002 mm)	.00016 / .00008" (0.004 / 0.002 mm)
Coolant tank	37 US gal (140 L)	37 US gal (140 L)
Power supply	25 kVA	25 kVA
Dimensions L × W × H	162 × 67 × 70" (4,123 × 1,709 × 1,778 mm)	162 × 67 × 70" (4,123 × 1,709 × 1,778 mm)
Weight	7,187 lb (3,260 kg)	7,288 lb (3,306 kg)

Dimensions in inches with Dener's millimetres in brackets. Spindle motor and torque are those of the standard Fanuc control; with the optional Mitsubishi control the spindle motor is 11 / 18 kW. Max. turning diameter and length are given for the standard slot turret and, after 'C:', for the optional C-axis turret with live tools.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey by Dener Makina
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

TTH-8 · TTH-10 · TTH-12 · 3 MODELS, C-AXIS VERSIONS


TTH CNC LATHES, 8", 10" AND 12" CHUCKS — 45° SLANT BED, Ø27.6" SWING

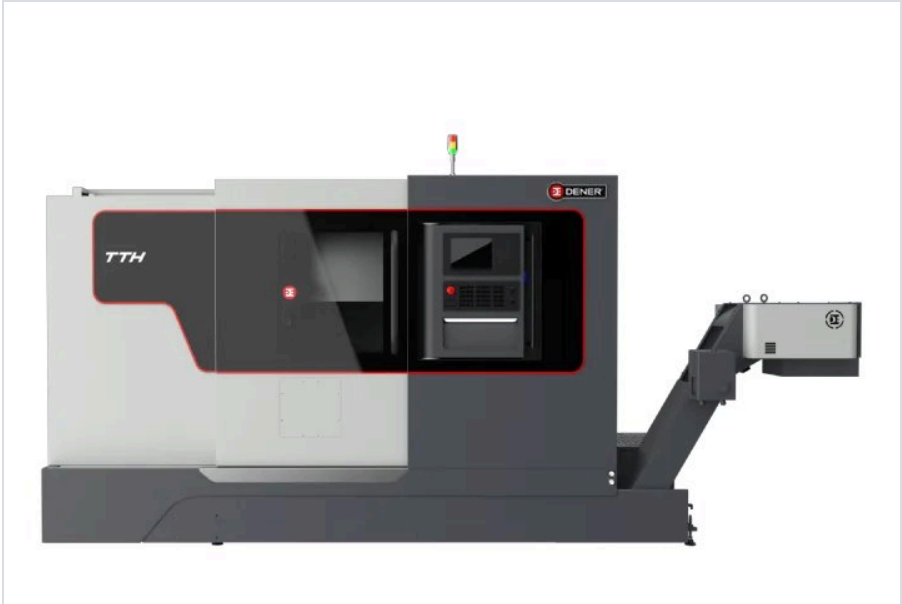

MODEL TTH · DENER TTH CNC LATHE — Ø27.6" SWING, 8" TO 12" CHUCKS, CHIP CONVEYOR AT THE END



BMT55 C-axis turret with 12 live-tool stations for drilling, tapping and milling (optional) — Dener TTH

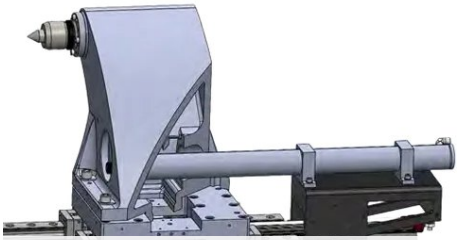

Hydraulic tailstock on its own linear guides, moved independently of the turret — Dener TTH

The TTH is the larger Dener slant-bed lathe: Ø27.6" (700 mm) swing over the bed, X 11.8" × Z 29.9" (300 × 760 mm) travels and parts to Ø20.8" (528 mm) × 26.8" (680 mm). Three spindles cover shaft and chuck work from 2" to 3.7" bar: the TTH-8 with an 8" chuck, 2.05" (52 mm) bar and 4,500 rpm, the TTH-10 with a 10" chuck, 2.95" (75 mm) bar and an A2-8 nose, and the TTH-12 with a 12" chuck, an A2-11 nose, a 4.65" (118 mm) spindle bore and 602 lb·ft (816 N·m) of torque for heavy cuts in large diameters. Same 45° cast bed, roller guides, servo turret and hydraulic tailstock as the TTC; the BMT55 C-axis turret with 12 live tools makes it a turn-mill centre.

STANDARD FEATURES

- ✓ 45° one-piece cast slant bed; travels X 11.8" × Z 29.9" (300 × 760 mm); tailstock travel 25.6" (650 mm)
- ✓ Swing over bed Ø27.6" (700 mm); max. turning Ø20.8" (528 mm)
- ✓ Fanuc 0i-TF Plus CNC with 10.4" colour screen (Mitsubishi M80 optional)
- ✓ One-piece 45° cast slant bed; roller linear guides; C1 / C3 ballscrews coupled directly to the servo motors
- ✓ Spindle on super-precision roller bearings; hydraulic chuck with soft and hard jaws
- ✓ 12-station servo turret with tool holders; hydraulic tailstock moved independently of the turret
- ✓ Fully enclosed guarding with front-door interlock; chip conveyor, coolant system, oil skimmer, automatic lubrication
- ✓ Hydraulic unit, cabinet cooling, foot pedal, portable handwheel, levelling bolts and tools
- ✓ CSA-approved electrical panel; transformer for 600, 480, 240 or 208 V 3-phase

OPTIONAL EQUIPMENT

- + Mitsubishi M80A control
- + C-axis turret: BMT55, 12 live tools for drilling, tapping and milling
- + Tool-setting arm and workpiece probe
- + Automatic bar feeder; parts catcher
- + Programmable tailstock
- + Linear scales
- + Automatic door
- + Electrical cabinet air conditioner
- + Chip cart; mist extractor

DETAILS, COMPONENTS AND OPTIONS

TTH CNC LATHES, 8", 10" AND 12" CHUCKS — 45° SLANT BED, Ø27.6" SWING



Turning a part on a Dener CNC lathe — chuck, turret and tool at work

TECHNICAL SPECIFICATIONS · 1 / 2

TTH CNC LATHES, 8", 10" AND 12" CHUCKS — 45° SLANT BED, Ø27.6" SWING

TTH CNC LATHES

3 models · 8", 10" and 12" chucks · 45° slant bed

Model	TTH-8	TTH-10	TTH-12
Swing over bed	**Ø27.6" (700 mm)**	**Ø27.6" (700 mm)**	**Ø27.6" (700 mm)**
Max. turning diameter C-axis turret in brackets	**Ø20.8" (528 mm) · C: Ø17.2"**	**Ø20.8" (528 mm) · C: Ø17.2"**	**Ø19.2" (488 mm) · C: Ø14.7"**
Max. turning length C-axis turret in brackets	**26.8" (680 mm) · C: 24.7"**	**26.0" (660 mm) · C: 23.9"**	**24.2" (614 mm) · C: 21.1"**
Chuck	**8" hydraulic, soft and hard jaws**	**10" hydraulic, soft and hard jaws**	**12" hydraulic, soft and hard jaws**
Bar capacity	Ø2.05" (52 mm)	Ø2.95" (75 mm)	Ø3.74" (95 mm)
Spindle nose	A2-6	A2-8	A2-11
Spindle bore	Ø2.60" (66 mm)	Ø3.62" (92 mm)	Ø4.65" (118 mm)
Max. spindle speed	**4,500 rpm**	**3,500 rpm**	**2,450 rpm**
Spindle motor Fanuc, continuous / max.	20.1 / 32.5 HP (15 / 24.2 kW)	14.8 / 22.1 HP (11 / 16.5 kW)	20.1 / 27.4 HP (15 / 20.4 kW)
Max. spindle torque	170 lb·ft (231 N·m)	232 lb·ft (315 N·m)	602 lb·ft (815.9 N·m)
Travels X / Z	**11.8 / 29.9" (300 / 760 mm)**	**11.8 / 29.9" (300 / 760 mm)**	**11.8 / 29.9" (300 / 760 mm)**
Rapid traverse X / Z	1,181 in/min (30 m/min)	1,181 in/min (30 m/min)	1,181 in/min (30 m/min)
Cutting feed	39 – 394 in/min (1 – 10 m/min)	39 – 394 in/min (1 – 10 m/min)	39 – 394 in/min (1 – 10 m/min)
Turret	12 stations, servo-driven, hydraulic clamping; 0.20 – 0.34 s per station	12 stations, servo-driven, hydraulic clamping; 0.20 – 0.34 s per station	12 stations, servo-driven, hydraulic clamping; 0.20 – 0.34 s per station
Tool shank / boring bar	1" square (25 × 25 mm) / Ø1.57" (40 mm)	1" square (25 × 25 mm) / Ø1.57" (40 mm)	1" square (25 × 25 mm) / Ø1.57" (40 mm)
C-axis turret option	BMT55, 12 live tools to 6,000 rpm, 5.0 / 11.1 HP (3.7 / 8.3 kW)	BMT55, 12 live tools to 6,000 rpm, 5.0 / 11.1 HP (3.7 / 8.3 kW)	BMT55, 12 live tools to 5,000 rpm, 5.0 / 11.1 HP (3.7 / 8.3 kW)
Tailstock hydraulic, quill Ø2.68" (68 mm)	25.6" (650 mm) travel, MT4	25.6" (650 mm) travel, MT4	25.6" (650 mm) travel, MT5

TECHNICAL SPECIFICATIONS · 2 / 2

TTH CNC LATHES, 8", 10" AND 12" CHUCKS — 45° SLANT BED, Ø27.6" SWING

TTH CNC LATHES (CONTINUED)

3 models · 8", 10" and 12" chucks · 45° slant bed

Model	TTH-8	TTH-10	TTH-12
Positioning accuracy X / Z	.0003 / .00016" (0.008 / 0.004 mm)	.0003 / .00016" (0.008 / 0.004 mm)	.0003 / .00016" (0.008 / 0.004 mm)
Repeatability X / Z	.00016 / .00008" (0.004 / 0.002 mm)	.00016 / .00008" (0.004 / 0.002 mm)	.00016 / .00008" (0.004 / 0.002 mm)
Coolant tank	42 US gal (160 L)	42 US gal (160 L)	42 US gal (160 L)
Power supply	32 kVA	32 kVA	32 kVA
Dimensions L × W × H	171 × 76 × 79" (4,345 × 1,924 × 2,008 mm)	171 × 76 × 79" (4,345 × 1,924 × 2,008 mm)	179 × 82 × 79" (4,545 × 2,073 × 2,008 mm)
Weight	11,881 lb (5,389 kg)	11,991 lb (5,439 kg)	12,976 lb (5,886 kg)

Dimensions in inches with Dener's millimetres in brackets. Spindle motor and torque are those of the standard Fanuc control; with the optional Mitsubishi control the spindle motor is 11 / 18 kW. Max. turning diameter and length are given for the standard slot turret and, after 'C:', for the optional C-axis turret with live tools.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey by Dener Makina
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.