NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

DENER MAKINA · MADE IN TURKEY · SOLD & SERVICED IN CANADA BY NOVOTECH

HYDRAULIC SHEARS

DENER BS / BSY SWING BEAM SHEARS TO 5/8" · DAS CNC GUILLOTINE SHEARS TO 3/4" × 20 FT







Turkey
MADE IN TURKEY

2
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

DENER HYDRAULIC SHEARS

CONTENTS

HYDRAULIC SWING BEAM SHEARS

BS / BSY hydraulic swing beam shears, 1/4" – 5/8" × 6.8 – 13.5 ft BSY 2006 – BS 4016 · 11 models 04

CNC HYDRAULIC GUILLOTINE SHEARS

DAS CNC hydraulic guillotine shears, 1/4" – 3/4" × 10 – 20 ft DAS 3006 – DAS 6020 · 13 models 07

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR DENER HYDRAULIC SHEARS

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

DENER MAKINA · KAYSERI, TURKEY

PLATE SHEARS FROM A BUILDER WITH 52 YEARS BEHIND IT

Dener Makina has built sheet-metal machinery in Kayseri since 1974 — press brakes, shears, fiber lasers and panel benders exported to more than 100 countries, with its own design awards and offices in the USA, Canada, Germany and India. The shears in this catalogue are the two hydraulic lines: the BS / BSY swing beam shears, a simple, rugged plate shear from 1/4" to 5/8" over 6.8 to 13.5 ft with an NC back gauge and hydraulic hold-downs, and the DAS CNC guillotine shears, the production machine from 1/4" to 3/4" over 10 to 20 ft whose ESA 630 control sets the back gauge, blade gap and variable cutting angle from the thickness and material the operator keys in.


Both lines are built on welded steel frames rigid against torsion over the full length, with motorised ball-screw back gauges accurate to 0.1 mm, sheet slider tables, squaring arms and photocell front guards. NovoTech sells, installs and supports them in Canada from Mississauga, Ontario, Canada, with a CSA-approved panel, a 1-year warranty and parts stocked in Canada.

BSY 2006 – BS 4016 · 11 MODELS


BS / BSY HYDRAULIC SWING BEAM SHEARS, 1/4" – 5/8" × 6.8 – 13.5 FT



MODEL BS · DENER BS HYDRAULIC SWING BEAM SHEAR — THREE-QUARTER VIEW WITH THE NC CONTROL

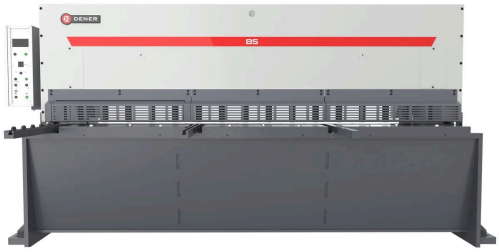

Dener BS hydraulic swing beam shear — front view

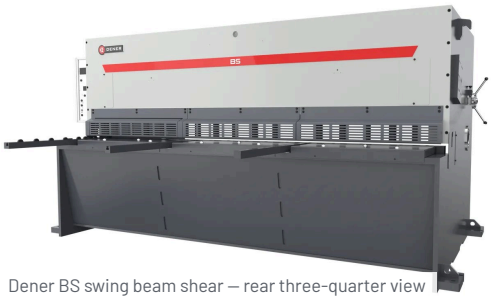

Dener BS swing beam shear — rear three-quarter view

The hydraulic shear for plate from 1/4" to 5/8": a swing beam on two cylinders cuts the full length in one stroke, 8 to 22 strokes a minute, with an NC back gauge, hydraulic hold-downs and a welded frame that thousands of shops run every day. The light BSY 2006 – 3006 cut 1/4" over 6.8 – 10 ft; the BS 3006 – 4016 go to 5/8" (16 mm) mild steel over 10 and 13.5 ft. Single-point blade-gap adjustment, sheet slider table and squaring arm are standard.

STANDARD FEATURES

- ✓ 1/4" to 5/8" (6 – 16 mm) mild steel; 5/32" to 15/32" stainless; 5/16" to 7/8" aluminum
- ✓ HT 071 NC control: back gauge, retract, stroke counter, 99 programs × 20 steps
- ✓ Motorised ball-screw back gauge, 0.1 mm accuracy, 39.4" (1,000 mm) stroke
- ✓ Single-point manual blade-gap adjustment; cutting-length adjustment by timer
- ✓ Hydraulic hold-downs; 1 m flip-up front guard; sheet support arms and squaring arm
- ✓ Sheet slider table and back slider; remote foot pedal with emergency stop
- ✓ Welded steel frame proven on thousands of machines
- ✓ CSA-approved electrical panel, 600 V 3-phase standard

OPTIONAL EQUIPMENT

- + Longer front support arms, 6.6 or 9.8 ft (2 / 3 m)
- + Pneumatic sheet support system
- + Motorised blade-clearance adjustment from a CNC control (ESA 630)
- + Shadow-line laser cutting line; light curtain
- + Hydraulic oil cooler
- + Spare blade set
- + Custom voltage: 208 V, 240 V or 480 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

BS / BSY HYDRAULIC SWING BEAM SHEARS, 1/4" – 5/8" × 6.8 – 13.5 FT



Dener BS 3013 hydraulic swing beam shear: 1/2" (13 mm) × 10 ft, with the NC control and the foot pedal



Dener BS 3010 hydraulic swing beam shear: 3/8" (10 mm) × 10 ft



Dener BS 3006 hydraulic swing beam shear: 1/4" (6 mm) × 10 ft, with the rear guard fence



HT 071 NC control on the BS: back gauge position, programs and stroke counter, with the mode switches below



Dener hydraulic guillotine shear in production

TECHNICAL SPECIFICATIONS

BS / BSY HYDRAULIC SWING BEAM SHEARS, 1/4" – 5/8" × 6.8 – 13.5 FT

BS / BSY HYDRAULIC SWING BEAM SHEARS

11 models · 1/4" – 5/8" × 6.8 – 13.5 ft

Model	BSY 2006	BSY 2606	BSY 3006	BS 3006	BS 4006	BS 3010	BS 4010	BS 3013	BS 4013	BS 3016	BS 4016
Cutting capacity, mild steel 42 kg/mm² · 60,000 psi	**1/4" (6 mm)**	**1/4" (6 mm)**	**1/4" (6 mm)**	**1/4" (6 mm)**	**1/4" (6 mm)**	**3/8" (10 mm)**	**3/8" (10 mm)**	**1/2" (13 mm)**	**1/2" (13 mm)**	**5/8" (16 mm)**	**5/8" (16 mm)**
Cutting capacity, stainless steel 70 kg/mm² · 100,000 psi	**5/32" (4 mm)**	**5/32" (4 mm)**	**5/32" (4 mm)**	**5/32" (4 mm)**	**5/32" (4 mm)**	**9/32" (7 mm)**	**9/32" (7 mm)**	**3/8" (10 mm)**	**3/8" (10 mm)**	**15/32" (12 mm)**	**15/32" (12 mm)**
Cutting capacity, aluminum 20 kg/mm²	**5/16" (8 mm)**	**5/16" (8 mm)**	**5/16" (8 mm)**	**5/16" (8 mm)**	**5/16" (8 mm)**	**1/2" (13 mm)**	**1/2" (13 mm)**	**11/16" (18 mm)**	**11/16" (18 mm)**	**7/8" (22 mm)**	**7/8" (22 mm)**
Cutting length	**6.8 ft · 81.9" (2,080 mm)**	**8.6 ft · 103.1" (2,620 mm)**	**10.1 ft · 120.9" (3,070 mm)**	**10 ft · 120.7" (3,065 mm)**	**13.5 ft · 161.8" (4,110 mm)**	**10.1 ft · 120.9" (3,070 mm)**	**13.5 ft · 161.8" (4,110 mm)**	**10.1 ft · 120.9" (3,070 mm)**	**13.5 ft · 161.8" (4,110 mm)**	**10.1 ft · 120.9" (3,070 mm)**	**13.5 ft · 161.8" (4,110 mm)**
Strokes per minute	22	20	18	18	14	12	8	12	8	12	8
Swing beam angle	1.39°	1.39°	1.39°	1.39°	1.33°	2°	2°	2.5°	2°	2.5°	2°
Main motor	14.8 HP (11 kW)	14.8 HP (11 kW)	14.8 HP (11 kW)	14.8 HP (11 kW)	14.8 HP (11 kW)	29.5 HP (22 kW)	29.5 HP (22 kW)	40.2 HP (30 kW)	40.2 HP (30 kW)	40.2 HP (30 kW)	40.2 HP (30 kW)
Hydraulic oil tank	53 US gal (200 L)	53 US gal (200 L)	53 US gal (200 L)	53 US gal (200 L)	53 US gal (200 L)	53 US gal (200 L)	53 US gal (200 L)	79 US gal (300 L)	106 US gal (400 L)	106 US gal (400 L)	106 US gal (400 L)
Throat depth	5.9" (150 mm)	5.9" (150 mm)	5.9" (150 mm)	5.9" (150 mm)	5.9" (150 mm)	5.9" (150 mm)	5.9" (150 mm)	5.9" (150 mm)	5.9" (150 mm)	5.9" (150 mm)	5.9" (150 mm)
Dimensions L × W × H	111 × 143 × 73" (2,830 × 3,640 × 1,860 mm)	133 × 144 × 73" (3,380 × 3,645 × 1,860 mm)	153 × 138 × 69" (3,880 × 3,495 × 1,750 mm)	153 × 146 × 85" (3,880 × 3,700 × 2,150 mm)	195 × 145 × 84" (4,955 × 3,695 × 2,140 mm)	154 × 148 × 96" (3,900 × 3,770 × 2,430 mm)	195 × 151 × 95" (4,950 × 3,830 × 2,415 mm)	154 × 151 × 99" (3,920 × 3,840 × 2,520 mm)	196 × 151 × 99" (4,970 × 3,840 × 2,508 mm)	155 × 152 × 98" (3,940 × 3,865 × 2,500 mm)	196 × 152 × 99" (4,970 × 3,865 × 2,508 mm)
Width without front supports	83.3" (2,115 mm)	83.3" (2,115 mm)	83.1" (2,110 mm)	84.3" (2,140 mm)	85.0" (2,160 mm)	90.7" (2,305 mm)	90.7" (2,305 mm)	90.9" (2,308 mm)	90.9" (2,308 mm)	88.0" (2,235 mm)	91.3" (2,320 mm)
Weight	10,582 lb (4,800 kg)	12,125 lb (5,500 kg)	14,330 lb (6,500 kg)	17,637 lb (8,000 kg)	22,928 lb (10,400 kg)	26,455 lb (12,000 kg)	33,069 lb (15,000 kg)	30,865 lb (14,000 kg)	37,148 lb (16,850 kg)	35,538 lb (16,120 kg)	40,565 lb (18,400 kg)

Capacities are Dener's ratings over the full blade length for mild steel of 60,000 psi (42 kg/mm²), stainless of 100,000 psi (70 kg/mm²) and aluminum; the model number is the metric cutting length × capacity. Dimensions are overall L (along the blade) × W × H with the standard front supports.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

DAS 3006 – DAS 6020 · 13 MODELS

DAS CNC HYDRAULIC GUILLOTINE SHEARS, 1/4" – 3/4" × 10 – 20 FT



MODEL DAS · DENER DAS CNC GUILLOTINE SHEAR — THREE-QUARTER VIEW



Dener DAS CNC hydraulic guillotine shear — front view



Dener DAS CNC guillotine shear with the ESA 630 control arm

The production shear: a guillotine beam on linear rollers with a variable cutting angle, so thin sheet is cut fast and flat at 0.5° and 3/4" plate at 3° with less distortion. The ESA 630 CNC sets back gauge, blade gap and angle from the thickness and material the operator keys in; 16 – 33 hydraulic hold-downs, a 1 m ball-screw back gauge and the front photocell guard are standard. Thirteen models: 1/4" to 3/4" (6 – 20 mm) mild steel over 10, 13 and 20 ft, from 8,000 to 55,000 kg.

STANDARD FEATURES

- ✓ 1/4" to 3/4" (6 – 20 mm) mild steel, 5/32" to 9/16" stainless, over 10 – 20 ft; up to 25 cuts a minute
- ✓ ESA 630 CNC control, 10" touchscreen: back gauge, blade gap and cutting angle set by the control from the thickness and material; 100-step programs
- ✓ Motorised ball-screw back gauge, 0.1 mm accuracy, 39.4" (1,000 mm) stroke
- ✓ Variable cutting angle and automatic blade-gap adjustment
- ✓ Hydraulic hold-downs; front protection frame with photocell; sheet slider table and squaring arm
- ✓ Remote foot pedal with emergency stop
- ✓ Welded steel frame, cutting beam on rollers — rigid against torsion over the full length
- ✓ CSA-approved electrical panel, 600 V 3-phase standard

OPTIONAL EQUIPMENT

- + Longer front support arms, 6.6 or 9.8 ft (2 / 3 m)
- + Pneumatic sheet support system (return of the cut piece)
- + Shadow-line laser cutting line; light curtain
- + Hydraulic oil cooler
- + Spare blade set
- + Custom voltage: 208 V, 240 V or 480 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

DAS CNC HYDRAULIC GUILLOTINE SHEARS, 1/4" – 3/4" × 10 – 20 FT



Dener DAS 3006 CNC hydraulic guillotine shear: 1/4" (6 mm) × 10 ft, with the CNC control on its arm



Dener DAS 6006 CNC hydraulic guillotine shear: 1/4" (6 mm) × 20 ft, with the front support arms



Dener AS 3006 CNC hydraulic shear — 10 ft × 1/4"



Dener shear cutting plate — the sheet on the slider table

TECHNICAL SPECIFICATIONS

DAS CNC HYDRAULIC GUILLOTINE SHEARS, 1/4" – 3/4" × 10 – 20 FT

DAS CNC HYDRAULIC GUILLOTINE SHEARS

13 models · 1/4" – 3/4" × 10 – 20 ft

Model	DAS 3006	DAS 4006	DAS 3010	DAS 3013	DAS 4013	DAS 3016	DAS 4016	DAS 3020	DAS 4020	DAS 6006	DAS 6013	DAS 6016	DAS 6020
Cutting capacity, mild steel 42 kg/mm² · 60,000 psi	1/4" (6 mm)	1/4" (6 mm)	3/8" (10 mm)	1/2" (13 mm)	1/2" (13 mm)	5/8" (16 mm)	5/8" (16 mm)	3/4" (20 mm)	3/4" (20 mm)	1/4" (6 mm)	1/2" (13 mm)	5/8" (16 mm)	3/4" (20 mm)
Cutting capacity, stainless steel 70 kg/mm² · 100,000 psi	5/32" (4 mm)	5/32" (4 mm)	9/32" (7 mm)	3/8" (10 mm)	3/8" (10 mm)	15/32" (12 mm)	15/32" (12 mm)	9/16" (14 mm)	9/16" (14 mm)	5/32" (4 mm)	11/32" (9 mm)	15/32" (12 mm)	9/16" (14 mm)
Cutting capacity, aluminum 20 kg/mm²	5/16" (8 mm)	5/16" (8 mm)	1/2" (13 mm)	11/16" (18 mm)	11/16" (18 mm)	7/8" (22 mm)	7/8" (22 mm)	1" (26 mm)	1" (26 mm)	5/16" (8 mm)	5/8" (16 mm)	7/8" (22 mm)	1" (26 mm)
Cutting length	10.1 ft · 121.3" (3,080 mm)	13.3 ft · 159.4" (4,050 mm)	10.1 ft · 121.3" (3,080 mm)	10.1 ft · 121.3" (3,080 mm)	13.3 ft · 159.4" (4,050 mm)	10.1 ft · 121.3" (3,080 mm)	13.3 ft · 159.4" (4,050 mm)	10.1 ft · 121.3" (3,080 mm)	13.3 ft · 159.4" (4,050 mm)	20 ft · 240.2" (6,100 mm)	20 ft · 240.6" (6,110 mm)	20.1 ft · 241.7" (6,140 mm)	20.1 ft · 241.7" (6,140 mm)
Cutting angle variable	0.5 – 2°	0.5 – 2°	0.5 – 2°	0.5 – 3°	0.5 – 3°	0.5 – 3°	0.5 – 3°	0.5 – 3°	0.5 – 3°	0.5 – 2.5°	0.5 – 2.5°	0.5 – 2.5°	0.5 – 2.5°
Hold-down cylinders	16	22	16	16	22	16	22	16	22	33	31	31	31
Cuts per minute at min / max angle	25 / 12	20 / 10	22 / 10	16 / 7	15 / 6	14 / 6	13 / 5	12 / 5	11 / 4	18 / 6.5	11.5 / 5.3	6.1 / 3.9	6 / 3.5
Main motor	14.8 HP (11 kW)	14.8 HP (11 kW)	29.5 HP (22 kW)	40.2 HP (30 kW)	40.2 HP (30 kW)	40.2 HP (30 kW)	40.2 HP (30 kW)	49.6 HP (37 kW)	49.6 HP (37 kW)	14.8 HP (11 kW)	49.6 HP (37 kW)	60.3 HP (45 kW)	60.3 HP (45 kW)
Hydraulic oil tank	48 US gal (180 L)	48 US gal (180 L)	53 US gal (200 L)	106 US gal (400 L)	106 US gal (400 L)	106 US gal (400 L)	106 US gal (400 L)	198 US gal (750 L)	198 US gal (750 L)	53 US gal (200 L)	106 US gal (400 L)	198 US gal (750 L)	198 US gal (750 L)
Throat depth	13.8" (350 mm)	13.8" (350 mm)	13.8" (350 mm)	13.8" (350 mm)	13.8" (350 mm)	13.8" (350 mm)	13.8" (350 mm)	13.8" (350 mm)	13.8" (350 mm)	13.8" (350 mm)	13.8" (350 mm)	13.8" (350 mm)	13.8" (350 mm)
Dimensions L × W × H	154 × 133 × 85" (3,900 × 3,380 × 2,165 mm)	194 × 133 × 88" (4,940 × 3,380 × 2,225 mm)	154 × 135 × 90" (3,920 × 3,440 × 2,290 mm)	154 × 139 × 102" (3,900 × 3,520 × 2,590 mm)	193 × 138 × 104" (4,900 × 3,500 × 2,650 mm)	154 × 144 × 104" (3,900 × 3,650 × 2,635 mm)	195 × 144 × 106" (4,950 × 3,660 × 2,700 mm)	156 × 148 × 104" (3,950 × 3,750 × 2,650 mm)	199 × 148 × 108" (5,050 × 3,755 × 2,740 mm)	277 × 157 × 102" (7,035 × 4,000 × 2,580 mm)	279 × 160 × 107" (7,090 × 4,055 × 2,730 mm)	283 × 173 × 109" (7,200 × 4,400 × 2,780 mm)	283 × 175 × 109" (7,200 × 4,450 × 2,780 mm)
Width without front supports	84.6" (2,150 mm)	85.8" (2,180 mm)	87.8" (2,230 mm)	88.0" (2,235 mm)	89.4" (2,270 mm)	88.2" (2,240 mm)	88.6" (2,250 mm)	92.1" (2,340 mm)	92.5" (2,350 mm)	107.1" (2,720 mm)	109.3" (2,775 mm)	122.0" (3,100 mm)	124.0" (3,150 mm)
Weight	17,637 lb (8,000 kg)	24,251 lb (11,000 kg)	22,046 lb (10,000 kg)	30,424 lb (13,800 kg)	36,817 lb (16,700 kg)	36,156 lb (16,400 kg)	47,399 lb (21,500 kg)	42,439 lb (19,250 kg)	62,832 lb (28,500 kg)	60,627 lb (27,500 kg)	82,673 lb (37,500 kg)	109,129 lb (49,500 kg)	121,254 lb (55,000 kg)

Capacities are Dener's ratings over the full blade length for mild steel of 60,000 psi (42 kg/mm²), stainless of 100,000 psi (70 kg/mm²) and aluminum; the model number is the metric cutting length × capacity. Dimensions are overall L (along the blade) × W × H with the standard front supports.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.