NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026


DENER MAKINA · MADE IN TURKEY · SOLD & SERVICED IN CANADA BY NOVOTECH

MACHINING CENTRES

DENER TMC VERTICAL MACHINING CENTRES, BBT40, X 33.5 – 63″ · TDC DOUBLE-COLUMN MACHINING CENTRES, BBT50, X 82.7 – 161.4″





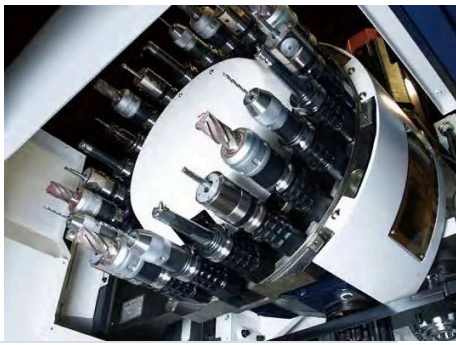

Turkey
MADE IN TURKEY

2
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

DENER MACHINING CENTRES

CONTENTS

TMC VERTICAL MACHINING CENTRES

TMC vertical machining centres, BBT40 — X 33.5 to 63" TMC 850 – TMC 1600 · 5 models 04

TDC DOUBLE-COLUMN MACHINING CENTRES

TDC double-column machining centres, BBT50 — X 82.7 to 161.4" TDC 2112 · TDC 3116 · TDC 4120 · 3 models 08

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR DENER MACHINING CENTRES

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey by Dener Makina
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

DENER MAKINA · KAYSERI, TURKEY

VERTICAL AND DOUBLE-COLUMN MACHINING CENTRES FROM DENER'S MACHINE-TOOL PLANT

The TMC vertical machining centres mill, drill, bore and tap in one setup on stress-relieved Meehanite castings laid out by finite-element analysis: a direct-drive BBT40 spindle at 10,000 rpm (12,000 or 15,000 to order), a 24-tool arm changer, double-nut C3 ballscrews and roller guides traversing at 1,417 in/min (36 m/min), positioning to ±0.00016" (±0.004 mm). Five sizes from the TMC 850 with 33.5 × 20.1 × 22" travels to the TMC 1600 with 63 × 27.6 × 27.6". The TDC double-column machining centres carry the spindle on a cross rail between two columns for long, wide and heavy parts: BBT50 at 10,000 rpm with through-spindle coolant, 82.7 to 161.4" of X travel and tables for up to 26,455 lb (12,000 kg).

Dener Makina has built machinery in Kayseri since 1974, and since 2016 CNC machine tools in the Taksan plant it took over: 155,000 m^2 of factory buildings where the castings are machined and the machines assembled. NovoTech sells, installs and supports the machining centres in Canada from Mississauga, Ontario, Canada, with a CSA-approved panel and a 1-year warranty.

TMC 850 – TMC 1600 · 5 MODELS


TMC VERTICAL MACHINING CENTRES, BBT40 — X 33.5 TO 63″



MODEL TMC · DENER TMC VERTICAL MACHINING CENTRE — FULLY ENCLOSED, WITH THE SWIVELLING CONTROL PENDANT AND THE CHIP CONVEYOR AND CART



Dener TMC — the swivelling control pendant beside the front door



Milling a pocket in an aluminium block with flood coolant on a Dener TMC vertical machining centre

Dener's TMC vertical machining centres mill, drill, bore and tap in one setup — pockets, contours, rigid tapping without a floating holder, and shapes drawn freehand in the Navi-Mill conversational software. The base, column and saddle are stress-relieved Meehanite castings laid out by finite-element analysis; the BBT40 spindle is direct-driven at 10,000 rpm (12,000 or 15,000 to order) with its own cooling; the 24-tool arm changer swaps tools in 1.3 s; double-nut C3 ballscrews and roller guides traverse at 1,417 in/min (36 m/min) and position to ±0.00016″ (±0.004 mm). Five sizes from the TMC 850 — 33.5 × 20.1 × 22″ (850 × 510 × 560 mm) over a 39 × 20″ table — to the TMC 1600 with 63 × 27.6 × 27.6″ (1,600 × 700 × 700 mm) and a 2,646 lb (1,200 kg) table load; the 1300 and 1600 have a 40 HP (30 kW) spindle motor.

STANDARD FEATURES


- ✓ Five sizes: X 33.5 – 63″, Y 20.1 – 27.6″, Z 22 – 27.6″ (850 – 1,600 × 510 – 700 × 560 – 700 mm)
- ✓ 1,417 in/min (36 m/min) rapids on all axes; ±0.00016″ (±0.004 mm) positioning, ±0.00008″ (±0.002 mm) repeatability
- ✓ Mitsubishi M80A CNC, 15″ touchscreen, Navi-Mill conversational programming (Fanuc 0i-MF optional)
- ✓ Stress-relieved Meehanite cast base, column and saddle, laid out by finite-element analysis
- ✓ BBT40 10,000 rpm direct-drive spindle with spindle cooling; 24-tool arm-type changer; rigid tapping
- ✓ C3 double-nut ballscrews coupled directly to the servo motors; roller linear guides; 4th-axis ready
- ✓ Fully enclosed guarding with front-door interlock; coolant round the spindle, air blast, chip wash-down
- ✓ Steel-belt chip conveyor with cart, oil skimmer, automatic lubrication, cabinet cooling, handwheel
- ✓ CSA-approved electrical panel; transformer for 600, 480, 240 or 208 V 3-phase

OPTIONAL EQUIPMENT

- + Fanuc 0i-MF control
- + 12,000 or 15,000 rpm BBT40 spindle
- + Through-spindle coolant, 435 psi (30 bar)
- + CNC rotary table — 4th axis
- + Tool setter and workpiece probe
- + Linear scales
- + Automatic door
- + Electrical cabinet air conditioner
- + Mist extractor

DETAILS, COMPONENTS AND OPTIONS


TMC VERTICAL MACHINING CENTRES, BBT40 — X 33.5 TO 63"

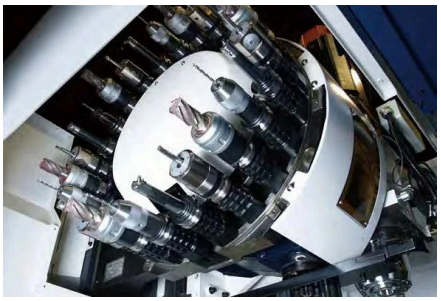


24-tool arm-type automatic tool changer of the Dener TMC — BBT40 tool holders



Mitsubishi M80 control with a 15" touchscreen on the Dener TMC

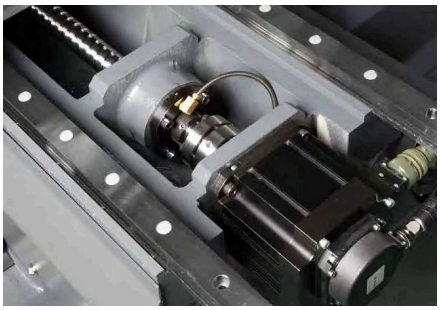

Servo motor coupled directly to the C3 ballscrew between the roller linear guides — Dener TMC axis drive



Stress-relieved Meehanite castings — base, saddle, table and column of the Dener TMC

TECHNICAL SPECIFICATIONS · 1 / 2

TMC VERTICAL MACHINING CENTRES, BBT40 — X 33.5 TO 63"

TMC VERTICAL MACHINING CENTRES

5 models · BBT40, 10,000 rpm, 24 tools · 33.5 to 63" X travel

Model	TMC 850	TMC 1000	TMC 1200	TMC 1300	TMC 1600
Travels X × Y × Z	**33.5 × 20.1 × 22.0" (850 × 510 × 560 mm)**	**40.2 × 20.1 × 22.0" (1,020 × 510 × 560 mm)**	**47.2 × 23.6 × 23.6" (1,200 × 600 × 600 mm)**	**51.2 × 27.6 × 27.6" (1,300 × 700 × 700 mm)**	**63.0 × 27.6 × 27.6" (1,600 × 700 × 700 mm)**
Table	**39.4 × 19.7" (1,000 × 500 mm)**	**47.2 × 19.7" (1,200 × 500 mm)**	**51.2 × 23.6" (1,300 × 600 mm)**	**57.1 × 27.6" (1,450 × 700 mm)**	**68.9 × 27.6" (1,750 × 700 mm)**
T-slots	5 × 18 mm at 100 mm (3.94")	5 × 18 mm at 100 mm (3.94")	5 × 18 mm at 100 mm (3.94")	5 × 18 mm at 125 mm (4.92")	5 × 18 mm at 125 mm (4.92")
Max. table load	1,102 lb (500 kg)	1,102 lb (500 kg)	2,205 lb (1,000 kg)	2,646 lb (1,200 kg)	2,646 lb (1,200 kg)
Spindle nose to table	5.9 – 28.0" (150 – 710 mm)	5.9 – 28.0" (150 – 710 mm)	5.9 – 29.5" (150 – 750 mm)	5.1 – 32.7" (130 – 830 mm)	5.1 – 32.7" (130 – 830 mm)
Spindle	BBT40 (7/24 taper), direct drive, with spindle cooling	BBT40 (7/24 taper), direct drive, with spindle cooling	BBT40 (7/24 taper), direct drive, with spindle cooling	BBT40 (7/24 taper), direct drive, with spindle cooling	BBT40 (7/24 taper), direct drive, with spindle cooling
Spindle speed	**10,000 rpm · 12,000 or 15,000 rpm optional**	**10,000 rpm · 12,000 or 15,000 rpm optional**	**10,000 rpm · 12,000 or 15,000 rpm optional**	**10,000 rpm · 12,000 or 15,000 rpm optional**	**10,000 rpm · 12,000 or 15,000 rpm optional**
Spindle motor Mitsubishi, continuous / max.	10.1 / 24.1 HP (7.5 / 18 kW)	10.1 / 24.1 HP (7.5 / 18 kW)	10.1 / 24.1 HP (7.5 / 18 kW)	14.8 / 40.2 HP (11 / 30 kW)	14.8 / 40.2 HP (11 / 30 kW)
Spindle torque continuous / max.	35 / 85 lb·ft (47.7 / 115 N·m)	35 / 85 lb·ft (47.7 / 115 N·m)	35 / 85 lb·ft (47.7 / 115 N·m)	57 / 141 lb·ft (77.8 / 191 N·m)	57 / 141 lb·ft (77.8 / 191 N·m)
Axis motors X / Y / Z	3.0 / 3.0 / 4.7 HP (2.2 / 2.2 / 3.5 kW)	3.0 / 3.0 / 4.7 HP (2.2 / 2.2 / 3.5 kW)	4.7 / 4.7 / 4.7 HP (3.5 / 3.5 / 3.5 kW)	4.7 / 4.7 / 6.0 HP (3.5 / 3.5 / 4.5 kW)	4.7 / 4.7 / 6.0 HP (3.5 / 3.5 / 4.5 kW)
Rapid traverse X / Y / Z	1,417 in/min (36 m/min)	1,417 in/min (36 m/min)	1,417 in/min (36 m/min)	1,417 in/min (36 m/min)	1,417 in/min (36 m/min)
Cutting feed	39 – 591 in/min (1 – 15 m/min)	39 – 591 in/min (1 – 15 m/min)	39 – 591 in/min (1 – 15 m/min)	39 – 591 in/min (1 – 15 m/min)	39 – 591 in/min (1 – 15 m/min)
Tool changer	24 tools, arm type, BBT40	24 tools, arm type, BBT40	24 tools, arm type, BBT40	24 tools, arm type, BBT40	24 tools, arm type, BBT40
Tool change tool to tool / chip to chip	1.3 / 3.1 s	1.3 / 3.1 s	1.3 / 3.7 s	1.3 / 3.7 s	1.3 / 3.7 s
Max. tool Ø with free neighbours · length · weight	Ø3.9" (100 mm), Ø5.9" (150 mm) · 11.8" (300 mm) · 15.4 lb (7 kg)	Ø3.9" (100 mm), Ø5.9" (150 mm) · 11.8" (300 mm) · 15.4 lb (7 kg)	Ø3.9" (100 mm), Ø5.9" (150 mm) · 11.8" (300 mm) · 15.4 lb (7 kg)	Ø3.9" (100 mm), Ø5.9" (150 mm) · 11.8" (300 mm) · 15.4 lb (7 kg)	Ø3.9" (100 mm), Ø5.9" (150 mm) · 11.8" (300 mm) · 15.4 lb (7 kg)
Linear guides roller type, X / Y / Z	30 / 35 / 35 mm	30 / 35 / 35 mm	35 / 45 / 45 mm	35 / 45 / 45 mm	35 / 45 / 45 mm
Ballscrews	C3 class, double nut, X / Y / Z	C3 class, double nut, X / Y / Z	C3 class, double nut, X / Y / Z	C3 class, double nut, X / Y / Z	C3 class, double nut, X / Y / Z
Positioning accuracy per 11.8" (300 mm)	±.00016" (±0.004 mm)	±.00016" (±0.004 mm)	±.00016" (±0.004 mm)	±.00016" (±0.004 mm)	±.0002" (±0.005 mm)
Repeatability per 11.8" (300 mm)	±.00008" (±0.002 mm)	±.00008" (±0.002 mm)	±.00008" (±0.002 mm)	±.00008" (±0.002 mm)	±.00008" (±0.002 mm)
Coolant tank	92 US gal (350 L)	92 US gal (350 L)	106 US gal (400 L)	106 US gal (400 L)	106 US gal (400 L)
Power supply / air	32 kVA · 73 – 87 psi (5 – 6 bar)	32 kVA · 73 – 87 psi (5 – 6 bar)	32 kVA · 73 – 87 psi (5 – 6 bar)	43 kVA · 73 – 87 psi (5 – 6 bar)	43 kVA · 73 – 87 psi (5 – 6 bar)

TECHNICAL SPECIFICATIONS · 2 / 2

TMC VERTICAL MACHINING CENTRES, BBT40 — X 33.5 TO 63"

TMC VERTICAL MACHINING CENTRES (CONTINUED)

5 models · BBT40, 10,000 rpm, 24 tools · 33.5 to 63" X travel

Model	TMC 850	TMC 1000	TMC 1200	TMC 1300	TMC 1600
Floor space L × W × H	156 × 87 × 125" (3,965 × 2,200 × 3,185 mm)	169 × 87 × 125" (4,300 × 2,200 × 3,185 mm)	184 × 94 × 124" (4,685 × 2,400 × 3,145 mm)	195 × 93 × 129" (4,945 × 2,370 × 3,280 mm)	224 × 94 × 129" (5,690 × 2,400 × 3,280 mm)
Weight	14,330 lb (6,500 kg)	16,535 lb (7,500 kg)	17,637 lb (8,000 kg)	20,944 lb (9,500 kg)	22,046 lb (10,000 kg)

Dimensions in inches with Dener's millimetres in brackets. Spindle motor and torque are those of the standard Mitsubishi control; with the optional Fanuc 0i-MF control the spindle is a Fanuc motor of the same class. Floor space is Dener's figure for the machine's working area.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Made in Turkey by Dener Makina
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

TDC 2112 · TDC 3116 · TDC 4120 · 3 MODELS

TDC DOUBLE-COLUMN MACHINING CENTRES, BBT50 — X 82.7 TO 161.4"



MODEL TDC · DENER TDC DOUBLE-COLUMN MACHINING CENTRE — SEMI-ENCLOSED GANTRY, THE CROSS RAIL ON TWO COLUMNS

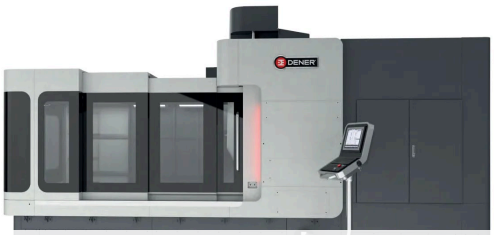

Dener TDC double-column machining centre — front view with the control on its swing arm



BBT50 direct-drive spindle of the Dener TDC — 10,000 rpm, through-spindle coolant

For parts too long, wide or heavy for a vertical machining centre — machine bases, moulds, plates, frames — the TDC double-column (gantry) machining centre carries the spindle on a saddle across a rigid cross rail between two columns, over a table that travels underneath. The BBT50 direct-drive spindle runs to 10,000 rpm on a 30 / 35 HP (22 / 26 kW) motor, with through-spindle coolant at 435 psi (30 bar); roller guides on all three axes. Three sizes: the TDC 2112 with 82.7 × 48 × 23.6" (2,100 × 1,220 × 600 mm) travels, 55" (1,400 mm) between the columns and a 24-tool changer, the TDC 3116 with 122 × 63 × 40" and the TDC 4120 with 161 × 79.5 × 40" (4,100 × 2,020 × 1,020 mm), a 157.5 × 71" table for 26,455 lb (12,000 kg) and a 40-tool chain magazine.

STANDARD FEATURES


- ✓ Gantry frame: two columns and a cross rail over a travelling table; 55 – 82.7" (1,400 – 2,100 mm) between the columns
- ✓ Table loads 8,818 – 26,455 lb (4,000 – 12,000 kg); X travel 82.7 – 161.4" (2,100 – 4,100 mm)
- ✓ Mitsubishi M80A CNC with Navi-Mill conversational programming (Fanuc 0i-MF Plus optional)
- ✓ BBT50 10,000 rpm direct-drive spindle with spindle cooling and through-spindle coolant, 435 psi (30 bar)
- ✓ Arm-type 24-tool changer (TDC 2112) or chain-type 40-tool magazine (TDC 3116, 4120); rigid tapping
- ✓ C3 ballscrews; roller linear guides on X, Y and Z; 4th-axis ready
- ✓ Semi-enclosed guarding; coolant round the spindle, air blast, chip wash-down; steel-belt chip conveyor
- ✓ Oil skimmer, automatic lubrication, cabinet cooling, portable handwheel
- ✓ CSA-approved electrical panel; transformer for 600, 480, 240 or 208 V 3-phase

OPTIONAL EQUIPMENT


- + Fanuc 0i-MF Plus 15" control
- + Z travel 31.5" (800 mm) on the TDC 2112
- + CNC rotary table
- + Tool setter and workpiece probe
- + Linear scales
- + Automatic door
- + Electrical cabinet air conditioner
- + Chip cart; mist extractor

DETAILS, COMPONENTS AND OPTIONS

TDC DOUBLE-COLUMN MACHINING CENTRES, BBT50 — X 82.7 TO 161.4"

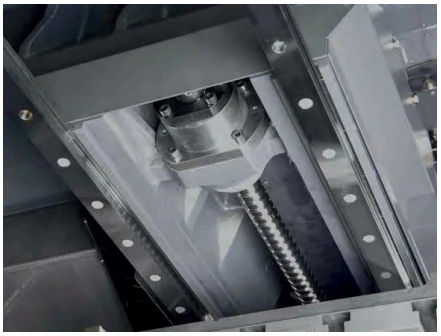

Roller linear guides and ballscrew on a Dener TDC axis

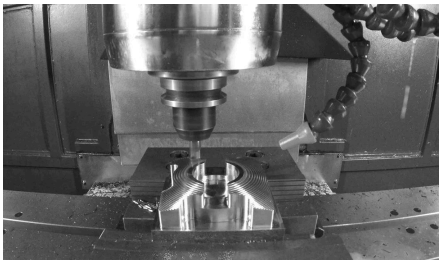

A 3-D contoured aluminium part machined on a Dener machining centre

TECHNICAL SPECIFICATIONS

TDC DOUBLE-COLUMN MACHINING CENTRES, BBT50 — X 82.7 TO 161.4"

TDC DOUBLE-COLUMN MACHINING CENTRES

3 models · BBT50, 10,000 rpm · 82.7 to 161.4" X travel

Model	TDC 2112	TDC 3116	TDC 4120
Travels X × Y × Z	**82.7 × 48.0 × 23.6" (2,100 × 1,220 × 600 mm) · Z 31.5" (800 mm) optional**	**122.0 × 63.0 × 40.2" (3,100 × 1,600 × 1,020 mm)**	**161.4 × 79.5 × 40.2" (4,100 × 2,020 × 1,020 mm)**
Distance between columns	**55.1" (1,400 mm)**	**66.9" (1,700 mm)**	**82.7" (2,100 mm)**
Table	**78.7 × 47.2" (2,000 × 1,200 mm)**	**118.1 × 59.1" (3,000 × 1,500 mm)**	**157.5 × 70.9" (4,000 × 1,800 mm)**
T-slots	7 × 22 mm at 150 mm (5.91")	9 × 22 mm at 150 mm (5.91")	9 × 22 mm at 150 mm (5.91")
Max. table load	8,818 lb (4,000 kg)	22,046 lb (10,000 kg)	26,455 lb (12,000 kg)
Spindle	BBT50, direct drive, through-spindle coolant 435 psi (30 bar)	BBT50, direct drive, through-spindle coolant 435 psi (30 bar)	BBT50, direct drive, through-spindle coolant 435 psi (30 bar)
Spindle speed	**10,000 rpm**	**10,000 rpm**	**10,000 rpm**
Spindle motor continuous / max.	29.5 / 34.9 HP (22 / 26 kW)	29.5 / 34.9 HP (22 / 26 kW)	29.5 / 34.9 HP (22 / 26 kW)
Axis motors X / Y / Z	12.1 / 6.0 / 6.0 HP (9 / 4.5 / 4.5 kW)	12.1 / 9.4 / 9.4 HP (9 / 7 / 7 kW)	12.1 / 9.4 / 9.4 HP (9 / 7 / 7 kW)
Rapid traverse X / Y / Z	945 / 945 / 591 in/min (24 / 24 / 15 m/min)	472 in/min (12 m/min)	472 in/min (12 m/min)
Cutting feed	39 – 394 in/min (1 – 10 m/min)	39 – 394 in/min (1 – 10 m/min)	39 – 394 in/min (1 – 10 m/min)
Tool changer	24 tools, arm type, BBT50	40 tools, chain type, BBT50	40 tools, chain type, BBT50
Linear guides	roller type on X, Y and Z	roller type on X, Y and Z	roller type on X, Y and Z
Positioning accuracy X / Y / Z	±.00031" (±0.008 mm)	±.00031" (±0.008 mm)	±.00031" (±0.008 mm)
Repeatability X / Y / Z	±.00016" (±0.004 mm)	±.00016" (±0.004 mm)	±.00016" (±0.004 mm)
Coolant tank	79 US gal (300 L)	211 US gal (800 L)	211 US gal (800 L)
Guarding	semi-enclosed	semi-enclosed	semi-enclosed
Dimensions L × W × H	235 × 143 × 133" (5,965 × 3,640 × 3,372 mm)	327 × 171 × 173" (8,315 × 4,340 × 4,390 mm)	406 × 187 × 173" (10,315 × 4,740 × 4,390 mm)
Weight	46,297 lb (21,000 kg)	70,548 lb (32,000 kg)	88,185 lb (40,000 kg)

Dimensions in inches with Dener's millimetres in brackets. Mitsubishi M80A control standard, Fanuc 0i-MF Plus optional. The TDC 2112's rapid traverse is from Dener USA's specification; the 3116 and 4120 traverse at 12 m/min on all axes.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey by Dener Makina
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.